



FCC TEST REPORT

FCC ID:2A2F7-G12

Report Number.....: ZKT-2603182845E-1

Date of Test..... Mar. 18, 2026 - Mar. 30, 2026

Date of issue.....: Mar. 30, 2026

Total number of pages..... 46

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Shenzhen Xingman Smart Technology Co., Ltd.

Address: 402, Building F, Tianyou Maker Industrial Park, No. 2 Lixin Road, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen China

Manufacturer's name: Shenzhen Xingman Smart Technology Co., Ltd.

Address: 402, Building F, Tianyou Maker Industrial Park, No. 2 Lixin Road, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen China

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020+Cor 1-2023

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-112_V0**Test Report Form(s) Originator.....: ZKT Testing****Master TRF: Dated: 2020-01-06**

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: G12 Gaming earphone

Trademark: N/A

Model/Type reference.....: G12
AOC ACT3512

5 V --- 0.5A

Ratings.....: Li-ion Battery: 3.7 V---45mAh 0.1665Wh(Earphone)

Battery: 3.7V, 300mAh, 1.11Wh(Charging Box)



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. TEST SUMMARY	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 Test Setup Configuration	10
3.3 Support Equipment	10
4. EMC EMISSION TEST	13
4.1 Conducted emissions	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 Test Result	15
4.2 Radiated emissions	17
4.2.1 Radiated Emission Limits	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	19
5. RADIATED BAND EMISSION MEASUREMENT	24
5.1 Test Requirement:	24
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	25
5.4 TEST SETUP	25
5.5 EUT OPERATING CONDITIONS	25
5.6 TEST RESULT	26
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	27
6.1 Limit	27
6.2 Test Setup	27
6.3 Test procedure	28
6.4 DEVIATION FROM STANDARD	28
7. 20DB BANDWIDTH	34
7.1 Test Setup	34
7.2 Limit	34
7.3 Test procedure	34
7.4 DEVIATION FROM STANDARD	34
7.5 Test Result	34
8. MAXIMUM PEAK OUTPUT POWER	37
8.1 Block Diagram Of Test Setup	37



8.2 Limit	37
8.3 Test procedure	37
8.4 DEVIATION FROM STANDARD	37
8.5 Test Result	37
9. Hopping Channel Separation	38
9.1 Test Setup	38
9.2 Test procedure	38
9.3 DEVIATION FROM STANDARD	38
9.4 Test Result	38
10. NUMBER OF HOPPING FREQUENCY	41
10.1 Test Setup	41
10.2 Test procedure	41
10.3 DEVIATION FROM STANDARD	41
10.4 Test Result	42
11. DWELL TIME	43
11.1 Test Setup	43
11.2 Test procedure	43
11.3 DEVIATION FROM STANDARD	43
11.4 Test Result	44
12. ANTENNA REQUIREMENT	45
13. TEST SETUP PHOTO	46
14. EUT CONSTRUCTIONAL DETAILS	46



1. VERSION

Report No.	Version	Description	Approved
ZKT-2603182845E-1	Rev.01	Initial issue of report	Mar. 30, 2026



2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 927491

Designation Number: CN1431

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	G12 Gaming earphone
Model No.:	G12
Model Different.:	Only for different model name
Serial No.:	AOC ACT3512
Sample(s) Status:	Engineer sample
Channel numbers:	40
Operation Frequency:	2402MHz ~ 2480MHz
Modulation technology:	GFSK
Antenna Type:	FPC Antenna
Antenna gain:	2.69dBi
Power supply:	5 V $\pm$ 0.5A Li-ion Battery: 3.7 V $\pm$ 45mAh 0.1665Wh(Earphone) Battery: 3.7V, 300mAh, 1.11Wh(Charging Box)
Note:	All models have been tested, with only the poorest-performing model G12 displayed.



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	11	2422 MHz	21	2442 MHz	31	2462 MHz
2	2404 MHz	12	2424 MHz	22	2444 MHz	32	2464 MHz
3	2406 MHz	13	2426 MHz	23	2446 MHz	33	2466 MHz
4	2408 MHz	14	2428 MHz	24	2448 MHz	34	2468 MHz
5	2410 MHz	15	2430 MHz	25	2450 MHz	35	2470 MHz
6	2412 MHz	16	2432 MHz	26	2452 MHz	36	2472 MHz
7	2414 MHz	17	2434 MHz	27	2454 MHz	37	2474 MHz
8	2416 MHz	18	2436 MHz	28	2456 MHz	38	2476 MHz
9	2418 MHz	19	2438 MHz	29	2458 MHz	39	2478 MHz
10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz



3.2 Test Setup Configuration

Conducted Emission



Radiated Emission



3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	G12 Gaming earphone	N/A	G12	N/A	EUT
A-1	Adapter	UGREEN	X569	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	ATS303X FCC Tool
Power level setup	Default



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 23, 2025	Sep. 22, 2026
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 19, 2025	Sep. 18, 2026
3	Test Cable	N/A	C-01	N/A	N/A	May. 22, 2025	May. 21, 2026
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Oct. 24, 2025	Oct. 23, 2026
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Oct. 24, 2025	Oct. 23, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 20, 2025	Sep. 19, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 20, 2025	Sep. 19, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2025	Sep. 29, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Sep. 20, 2025	Sep. 19, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 19, 2025	Sep. 18, 2026
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 19, 2025	Sep. 18, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Oct. 24, 2025	Oct. 23, 2026
11	Test Cable	N/A	R-01	N/A	N/A	May. 25, 2025	May. 24, 2026
12	Test Cable	N/A	R-02	N/A	N/A	May. 25, 2025	May. 24, 2026
13	Test Cable	N/A	R-03	N/A	N/A	May. 25, 2025	May. 24, 2026
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	Test Cable	N/A	RF-01	N/A	N/A	May. 25, 2025	May. 24, 2026
4	Test Cable	N/A	RF-02	N/A	N/A	May. 25, 2025	May. 24, 2026
5	Test Cable	N/A	RF-03	N/A	N/A	May. 25, 2025	May. 24, 2026
6	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Sep. 19, 2025	Sep. 18, 2026
7	Signal Generator	Agilent	N5182A	N/A	A.01.87	Sep. 20, 2025	Sep. 19, 2026
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344/M-1752	N/A	Sep. 25, 2025	Sep. 24, 2026
9	SHIELD BOX	TESCOM	TC-5970C	5970C015553	N/A	Dec. 18, 2025	Dec. 17, 2026
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 28, 2025	Sep. 27, 2026
11	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Sep. 19, 2025	Sep. 18, 2026
12	D.C. Power Supply	LongWei	TPR-6405 D	N/A	N/A	\	\
13	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020+Cor 1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

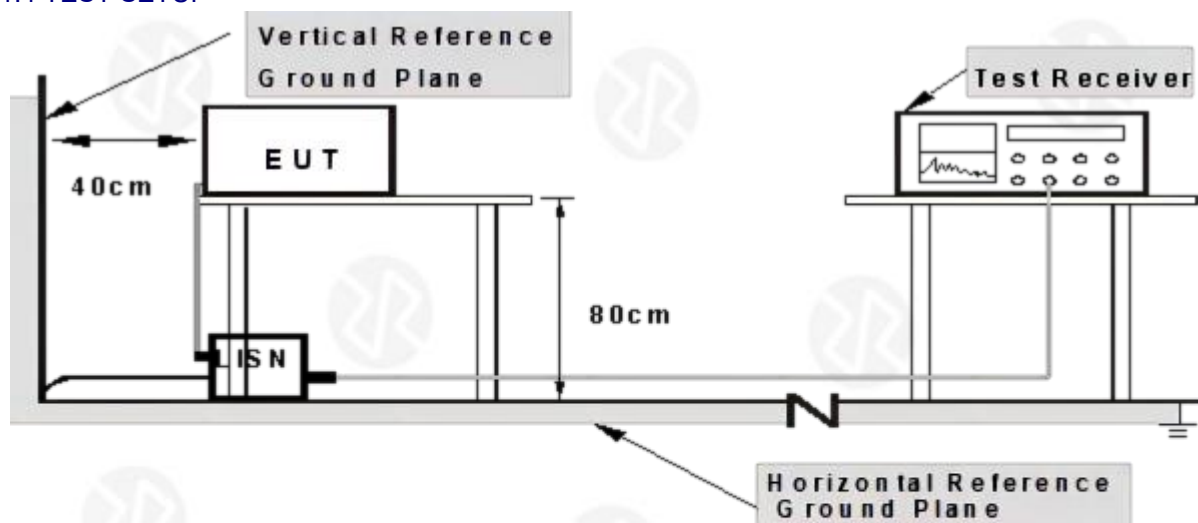

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	2440MHz

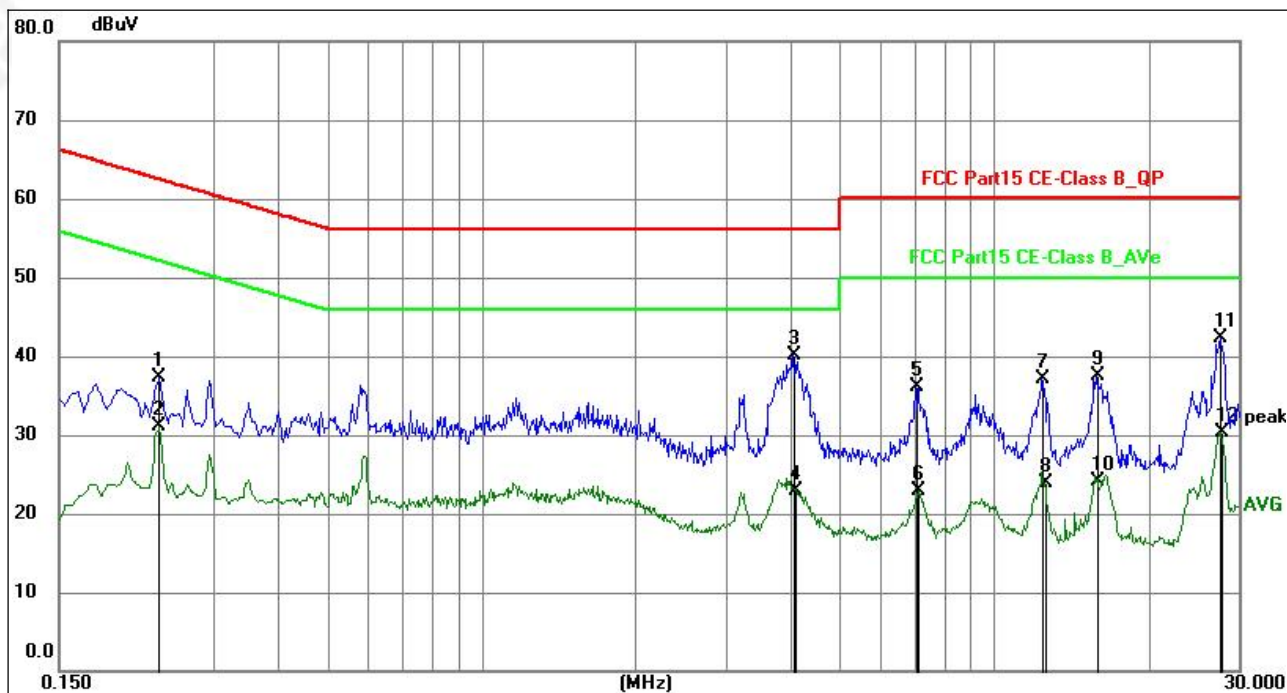

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2353	17.74	19.66	37.40	62.26	-24.86	QP	P	
2	0.2353	11.51	19.66	31.17	52.26	-21.09	AVG	P	
3	4.0605	20.37	19.71	40.08	56.00	-15.92	QP	P	
4	4.1009	3.12	19.71	22.83	46.00	-23.17	AVG	P	
5	7.0395	16.37	19.74	36.11	60.00	-23.89	QP	P	
6	7.1158	3.16	19.74	22.90	50.00	-27.10	AVG	P	
7	12.4214	17.29	19.76	37.05	60.00	-22.95	QP	P	
8	12.5563	4.15	19.76	23.91	50.00	-26.09	AVG	P	
9	15.8460	17.75	19.78	37.53	60.00	-22.47	QP	P	
10	15.8460	4.38	19.78	24.16	50.00	-25.84	AVG	P	
11	27.5730	22.60	19.76	42.36	60.00	-17.64	QP	P	
12	27.7347	10.56	19.76	30.32	50.00	-19.68	AVG	P	



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	2440MHz

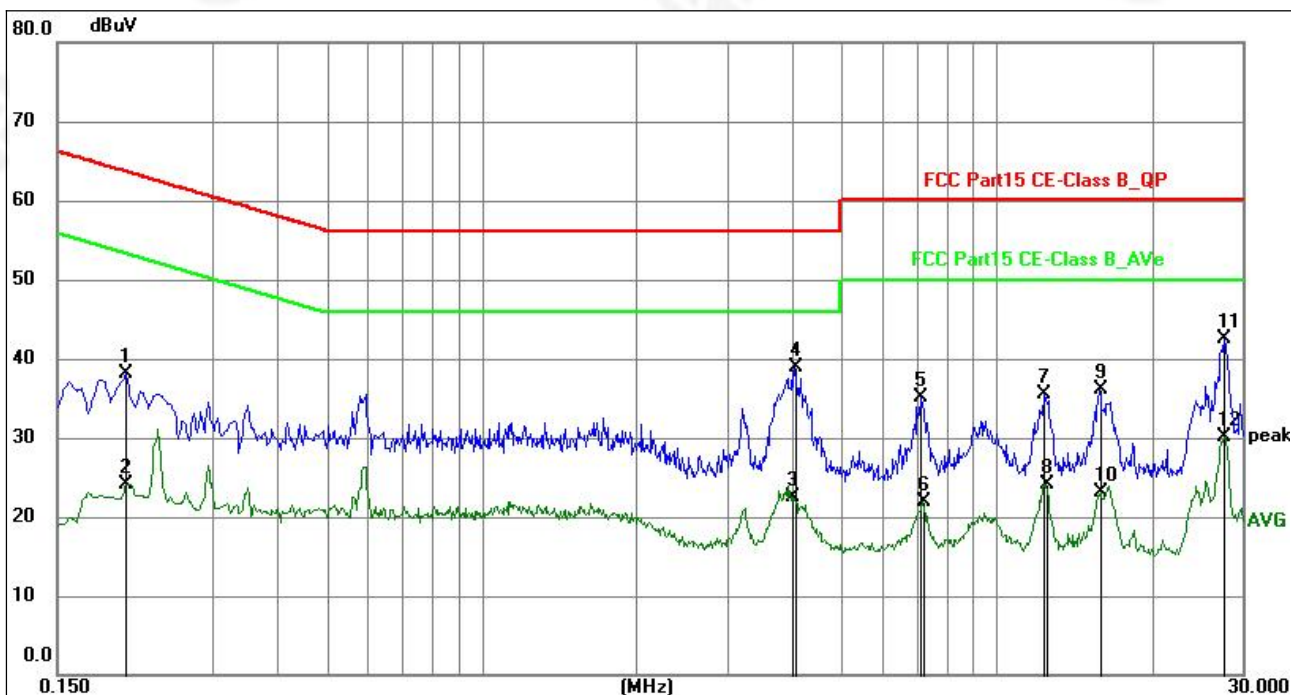

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2038	18.38	19.64	38.02	63.45	-25.43	QP	P	
2	0.2038	4.52	19.64	24.16	53.45	-29.29	AVG	P	
3	4.0155	2.89	19.69	22.58	46.00	-23.42	AVG	P	
4	4.0693	19.21	19.69	38.90	56.00	-17.10	QP	P	
5	7.1295	15.40	19.73	35.13	60.00	-24.87	QP	P	
6	7.1970	2.08	19.73	21.81	50.00	-28.19	AVG	P	
7	12.3810	15.66	19.75	35.41	60.00	-24.59	QP	P	
8	12.4664	4.35	19.75	24.10	50.00	-25.90	AVG	P	
9	15.8100	16.33	19.75	36.08	60.00	-23.92	QP	P	
10	15.9359	3.35	19.75	23.10	50.00	-26.90	AVG	P	
11	27.7031	22.76	19.73	42.49	60.00	-17.51	QP	P	
12	27.7031	10.40	19.73	30.13	50.00	-19.87	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 2440MHz and AC 120V mode



4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020+Cor 1-2023				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	MX5Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

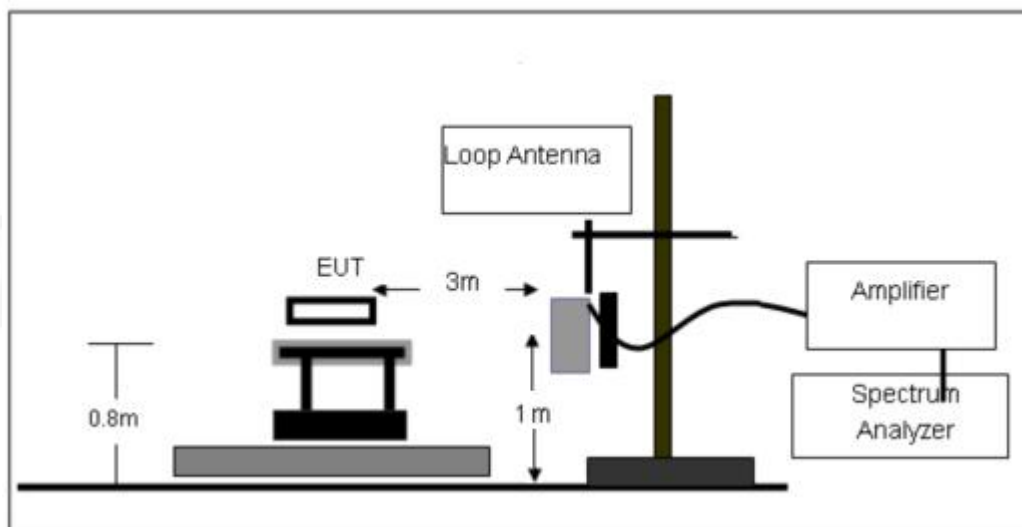




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

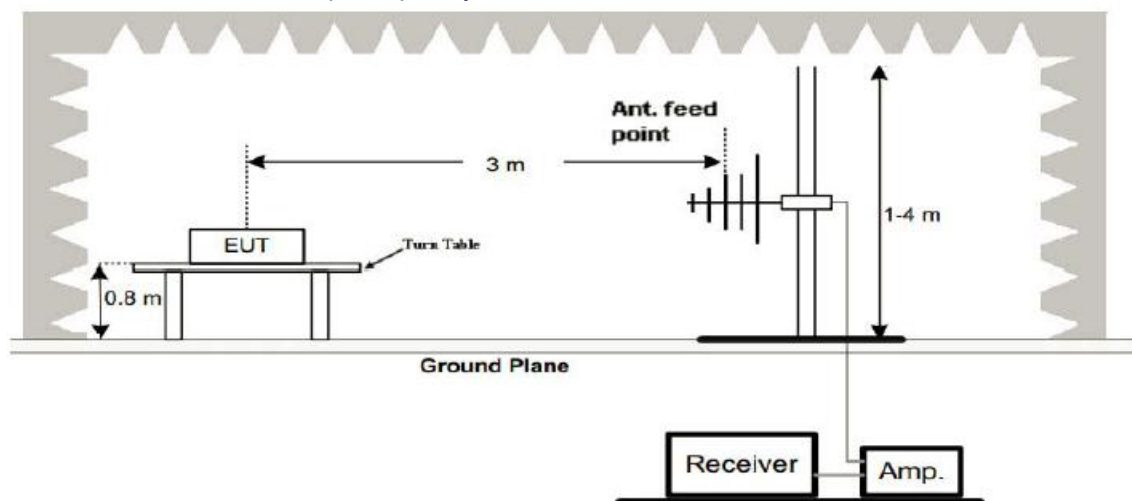

(C) Radiated Emission Test-Up Frequency Above 1GHz

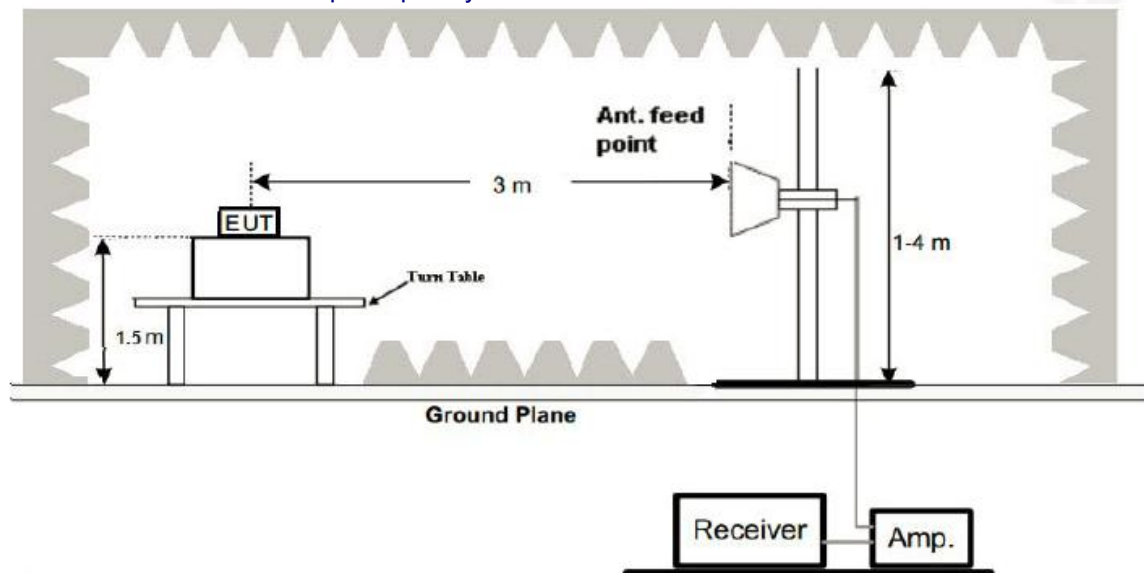

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode:	2440MHz

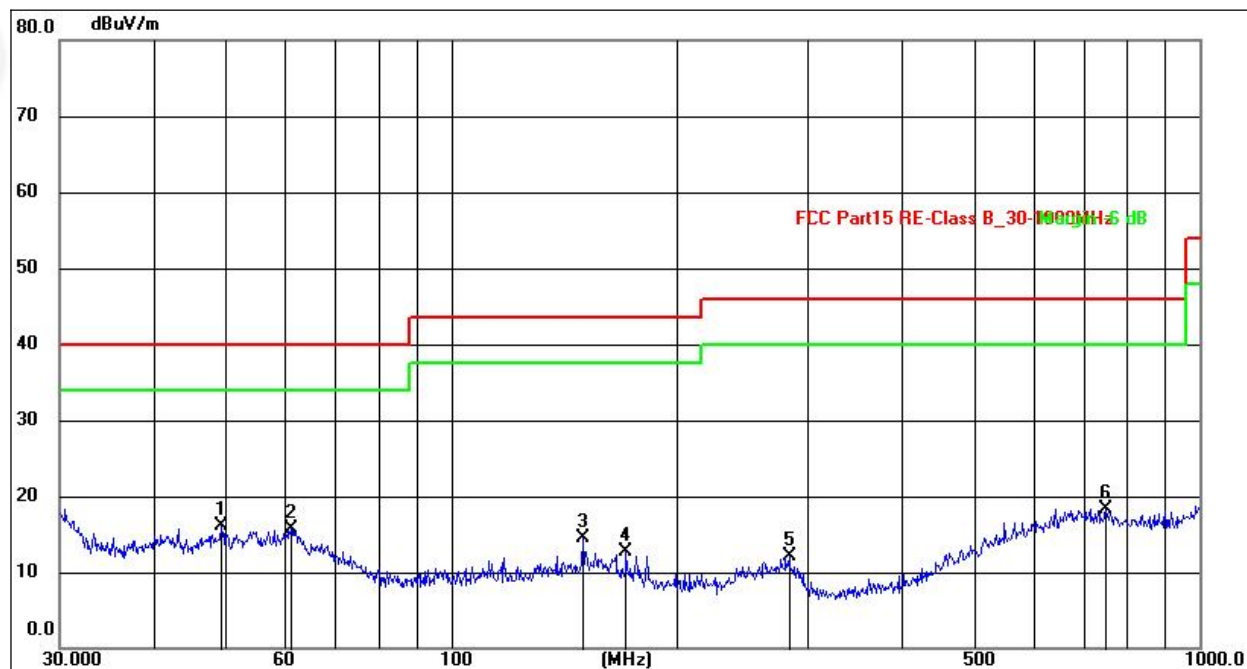

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.3594	31.47	-15.35	16.12	40.00	-23.88	QP
2	61.1315	31.67	-15.91	15.76	40.00	-24.24	QP
3	150.0107	33.39	-18.94	14.45	43.50	-29.05	QP
4	171.3925	32.53	-19.85	12.68	43.50	-30.82	QP
5	282.9849	31.12	-19.06	12.06	46.00	-33.94	QP
6	750.1082	31.15	-12.76	18.39	46.00	-27.61	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode:	2440MHz

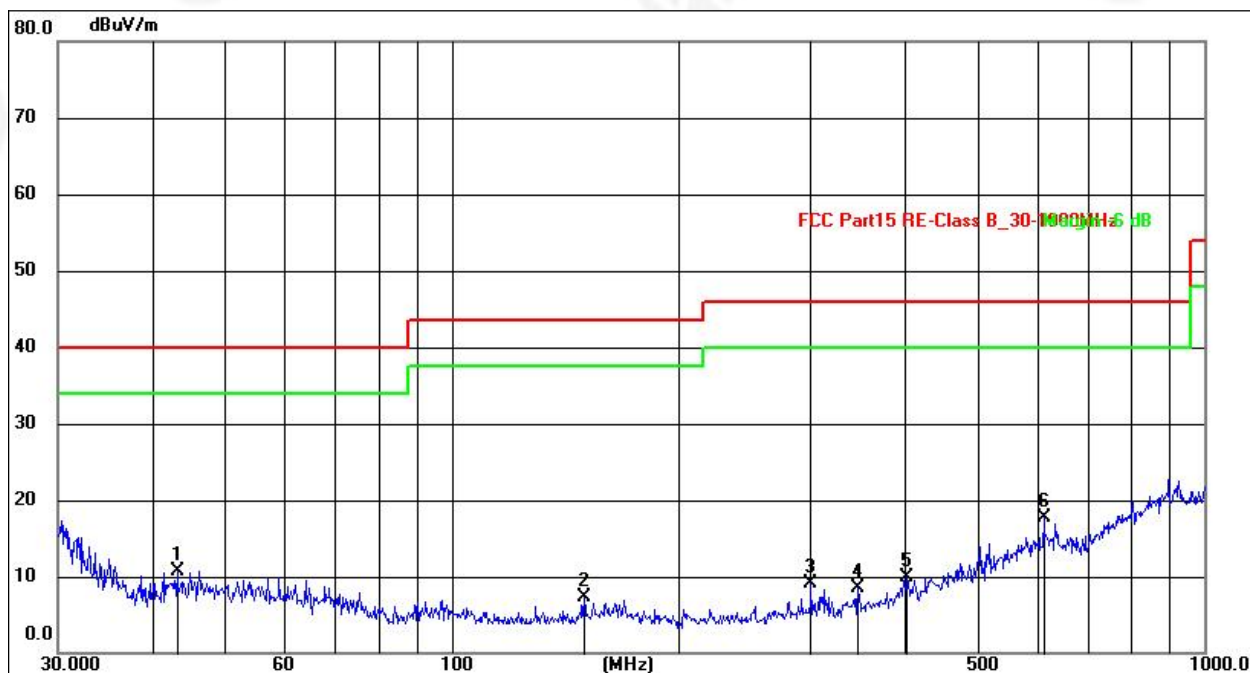

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.2014	29.03	-18.26	10.77	40.00	-29.23	QP
2	150.0107	30.27	-22.94	7.33	43.50	-36.17	QP
3	300.3672	31.96	-22.89	9.07	46.00	-36.93	QP
4	346.8091	30.03	-21.47	8.56	46.00	-37.44	QP
5	403.2500	29.70	-19.75	9.95	46.00	-36.05	QP
6	612.0641	30.90	-13.22	17.68	46.00	-28.32	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 2441MHz and DC 3.7V mode



1GHz~25GHz

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	51.42	30.55	5.77	24.66	51.30	74.00	-22.70	Pk
V	4804.00	43.33	30.55	5.77	24.66	43.21	54.00	-10.79	AV
V	7206.00	50.43	30.33	6.32	24.55	50.97	74.00	-23.03	Pk
V	7206.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
V	9608.00	54.42	30.85	7.45	24.69	55.71	74.00	-18.29	Pk
V	9608.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
V	12010.00	53.05	31.02	8.99	25.57	56.59	74.00	-17.41	Pk
V	12010.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV
H	4804.00	53.13	30.55	5.77	24.66	53.01	74.00	-20.99	Pk
H	4804.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
H	7206.00	51.89	30.33	6.32	24.55	52.43	74.00	-21.57	Pk
H	7206.00	43.27	30.33	6.32	24.55	43.81	54.00	-10.19	AV
H	9608.00	54.85	30.85	7.45	24.69	56.14	74.00	-17.86	Pk
H	9608.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
H	12010.00	54.22	31.02	8.99	25.57	57.76	74.00	-16.24	Pk
H	12010.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	50.11	30.55	5.77	24.66	49.99	74.00	-24.01	Pk
V	4880.00	43.14	30.55	5.77	24.66	43.02	54.00	-10.98	AV
V	7320.00	53.52	30.33	6.32	24.55	54.06	74.00	-19.94	Pk
V	7320.00	43.44	30.33	6.32	24.55	43.98	54.00	-10.02	AV
V	9760.00	54.35	30.85	7.45	24.69	55.64	74.00	-18.36	Pk
V	9760.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	12200.00	52.02	31.02	8.99	25.57	55.56	74.00	-18.44	Pk
V	12200.00	43.32	31.02	8.99	25.57	46.86	54.00	-7.14	AV
H	4880.00	52.89	30.55	5.77	24.66	52.77	74.00	-21.23	Pk
H	4880.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
H	7320.00	54.57	30.33	6.32	24.55	55.11	74.00	-18.89	Pk
H	7320.00	43.53	30.33	6.32	24.55	44.07	54.00	-9.93	AV
H	9760.00	52.18	30.85	7.45	24.69	53.47	74.00	-20.53	Pk
H	9760.00	43.34	30.85	7.45	24.69	44.63	54.00	-9.37	AV
H	12200.00	54.26	31.02	8.99	25.57	57.80	74.00	-16.20	Pk
H	12200.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	51.27	30.55	5.77	24.66	51.15	74.00	-22.85	Pk
V	4960.00	43.83	30.55	5.77	24.66	43.71	54.00	-10.29	AV
V	7440.00	52.45	30.33	6.32	24.55	52.99	74.00	-21.01	Pk
V	7440.00	43.55	30.33	6.32	24.55	44.09	54.00	-9.91	AV
V	9920.00	50.48	30.85	7.45	24.69	51.77	74.00	-22.23	Pk
V	9920.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
V	12400.00	54.06	31.02	8.99	25.57	57.60	74.00	-16.40	Pk
V	12400.00	43.39	31.02	8.99	25.57	46.93	54.00	-7.07	AV
H	4960.00	53.41	30.55	5.77	24.66	53.29	74.00	-20.71	Pk
H	4960.00	43.44	30.55	5.77	24.66	43.32	54.00	-10.68	AV
H	7440.00	50.09	30.33	6.32	24.55	50.63	74.00	-23.37	Pk
H	7440.00	43.63	30.33	6.32	24.55	44.17	54.00	-9.83	AV
H	9920.00	52.28	30.85	7.45	24.69	53.57	74.00	-20.43	Pk
H	9920.00	43.70	30.85	7.45	24.69	44.99	54.00	-9.01	AV
H	12400.00	50.55	31.02	8.99	25.57	54.09	74.00	-19.91	Pk
H	12400.00	43.64	31.02	8.99	25.57	47.18	54.00	-6.82	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020+Cor 1-2023				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

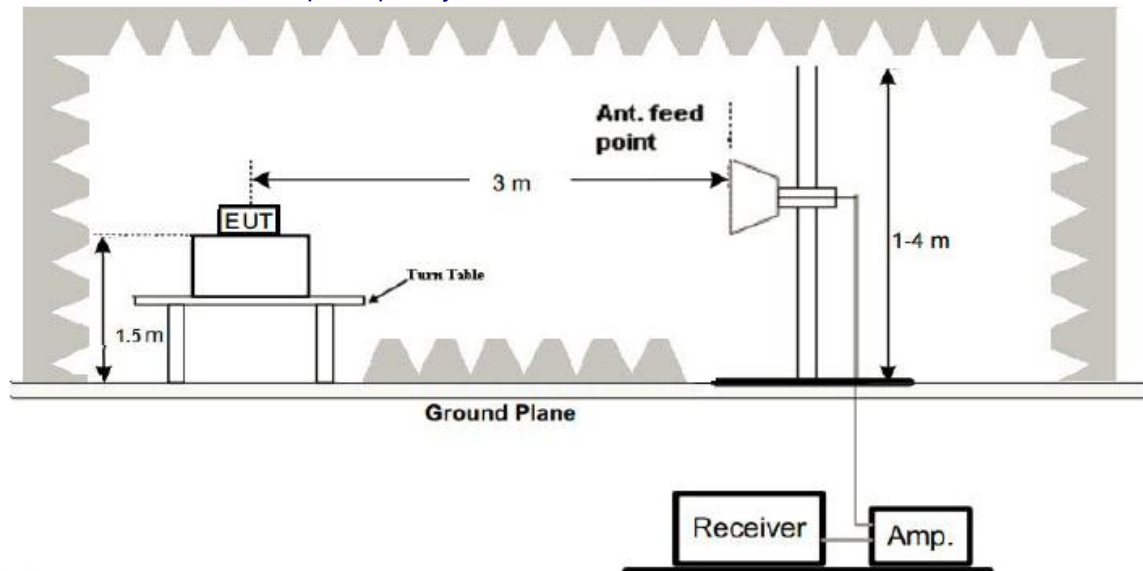

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2310.00	53.33	30.22	4.85	23.98	51.94	74.00	PK	PASS
	H	2310.00	44.48	30.22	4.85	23.98	43.09	54.00	AV	PASS
	H	2390.00	53.75	30.22	4.85	23.98	52.36	74.00	PK	PASS
	H	2390.00	44.21	30.22	4.85	23.98	42.82	54.00	AV	PASS
	V	2310.00	53.04	30.22	4.85	23.98	51.65	74.00	PK	PASS
	V	2310.00	44.46	30.22	4.85	23.98	43.07	54.00	AV	PASS
	V	2390.00	53.12	30.22	4.85	23.98	51.73	74.00	PK	PASS
	V	2390.00	44.72	30.22	4.85	23.98	43.33	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	54.50	30.22	4.85	23.98	53.11	74.00	Pk	PASS
	H	2483.50	44.94	30.22	4.85	23.98	43.55	54.00	AV	PASS
	H	2500.00	54.73	30.22	4.85	23.98	53.34	74.00	Pk	PASS
	H	2500.00	44.78	30.22	4.85	23.98	43.39	54.00	AV	PASS
	V	2483.50	54.27	30.22	4.85	23.98	52.88	74.00	Pk	PASS
	V	2483.50	44.98	30.22	4.85	23.98	43.59	54.00	AV	PASS
	V	2500.00	53.34	30.22	4.85	23.98	51.95	74.00	Pk	PASS
	V	2500.00	44.54	30.22	4.85	23.98	43.15	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit




6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup

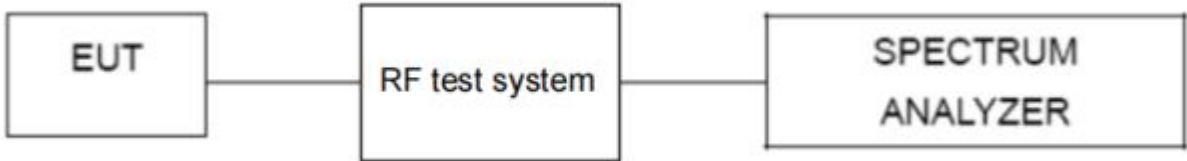



6.3 Test procedure

A. Reference level measurement, establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≥ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW = $[3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.
- Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

B. Emission level measurement, establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
 - b) Set the RBW = 100 kHz.
 - c) Set the VBW = $[3 \times \text{RBW}]$.
 - d) Detector = peak.
 - e) Sweep time = auto couple.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use the peak marker function to determine the maximum amplitude level.
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

6.4 DEVIATION FROM STANDARD


No deviation.




6.5 Test Result

GFSK mode:


Lowest channel

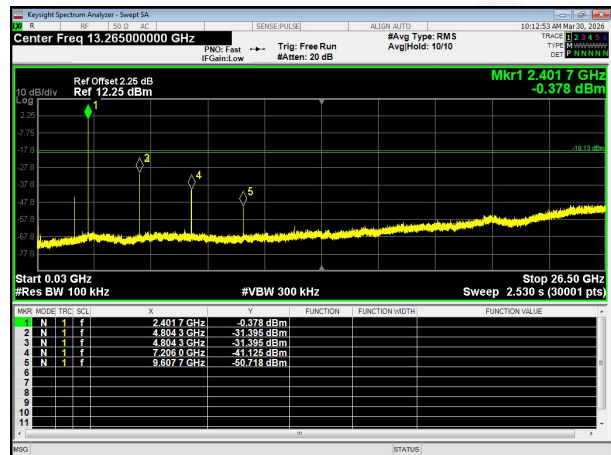

Middle channel

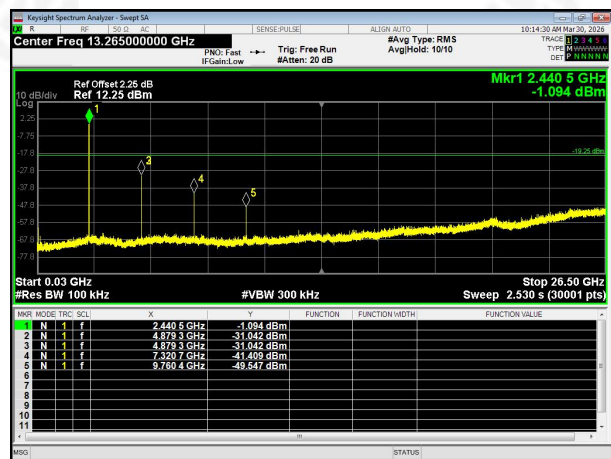


Highest channel

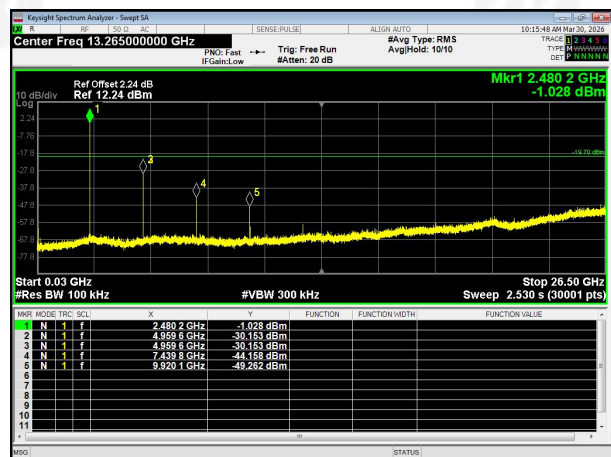

30MHz~26.5GHz




GFSK No-hopping Band edge-left side

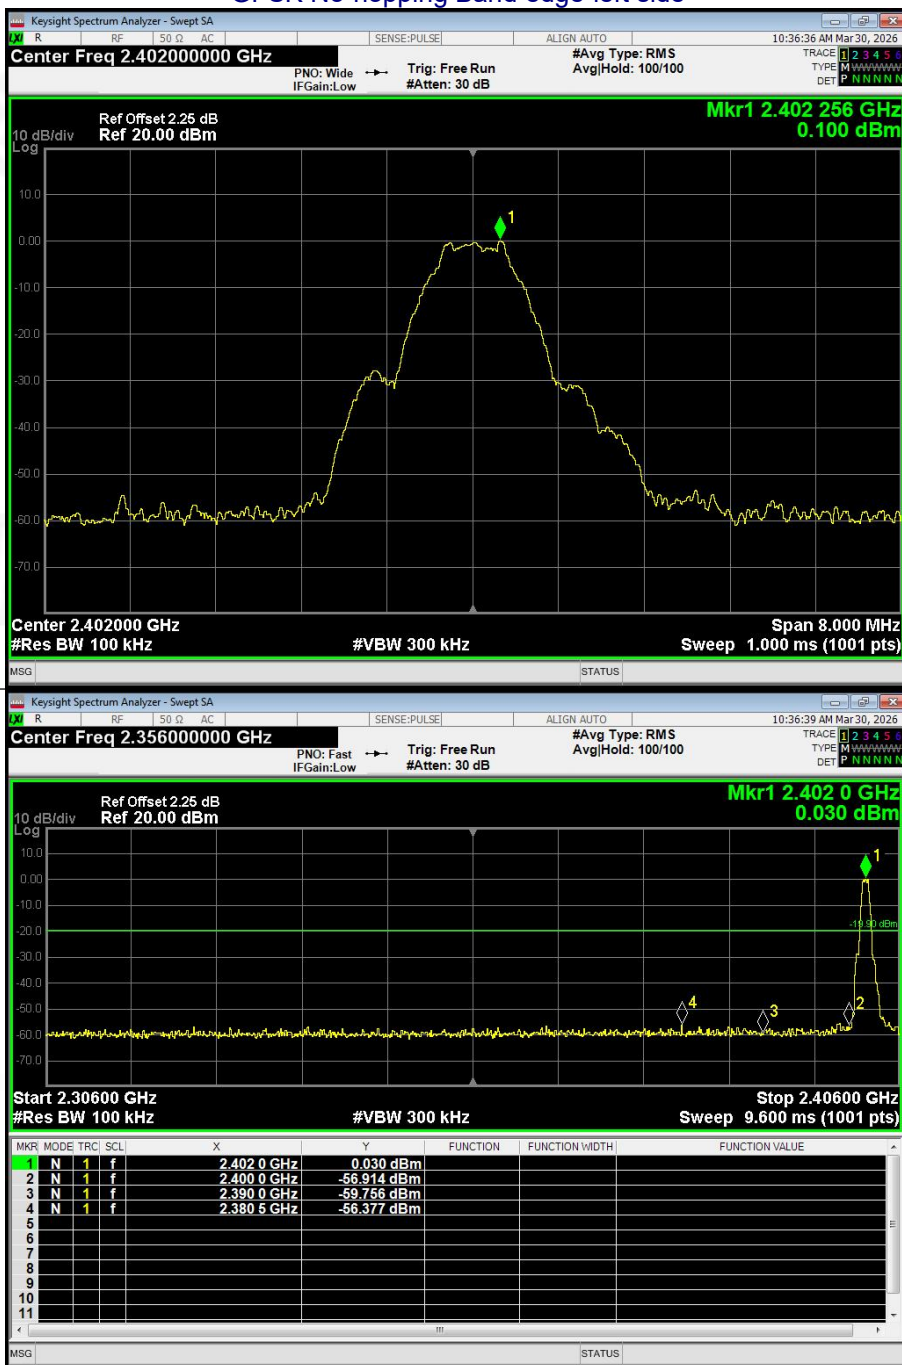




GFSK Hopping Band edge-left side

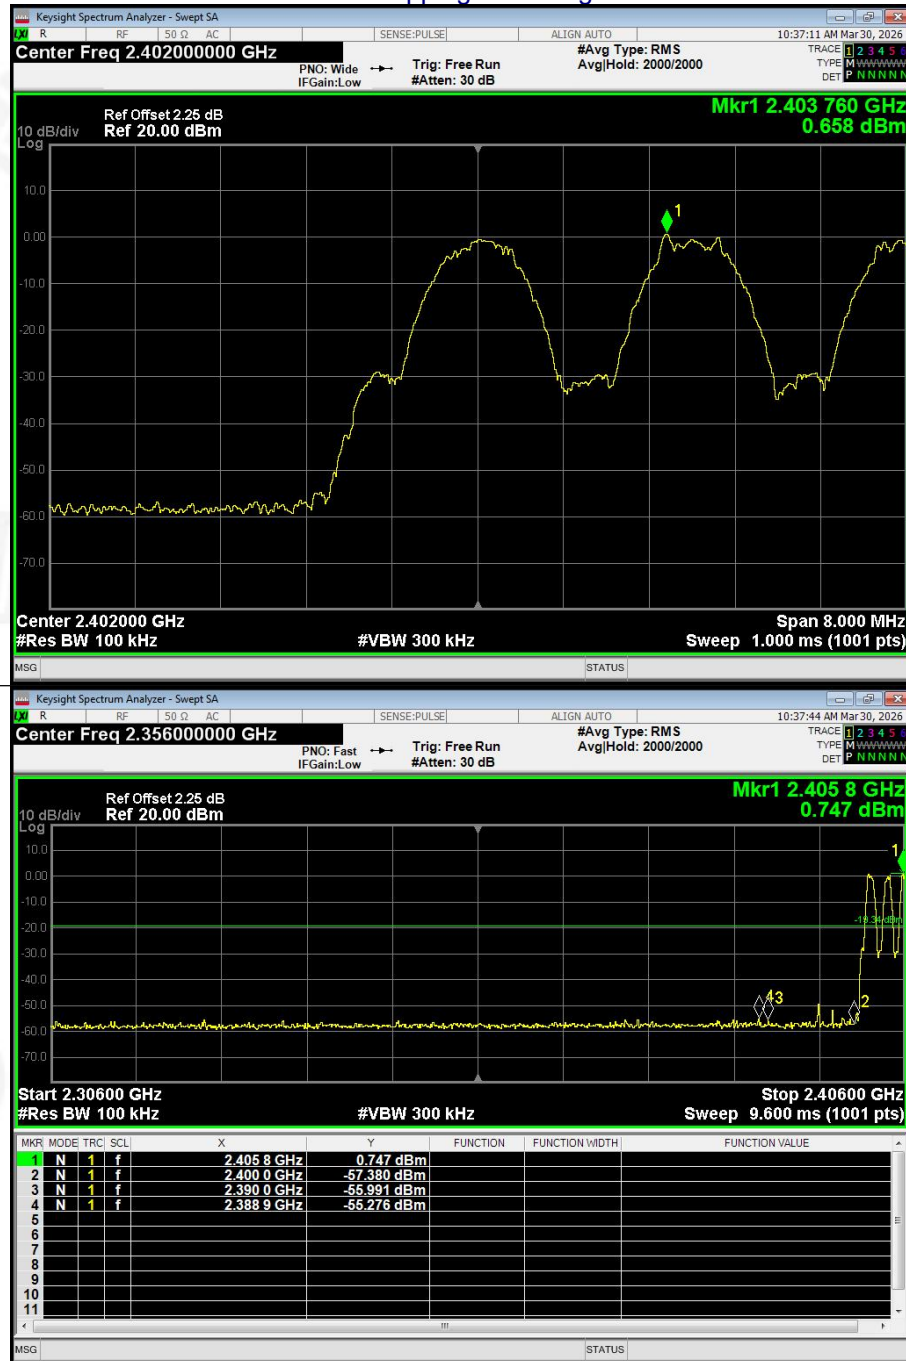




GFSK No-hopping Band edge-right side

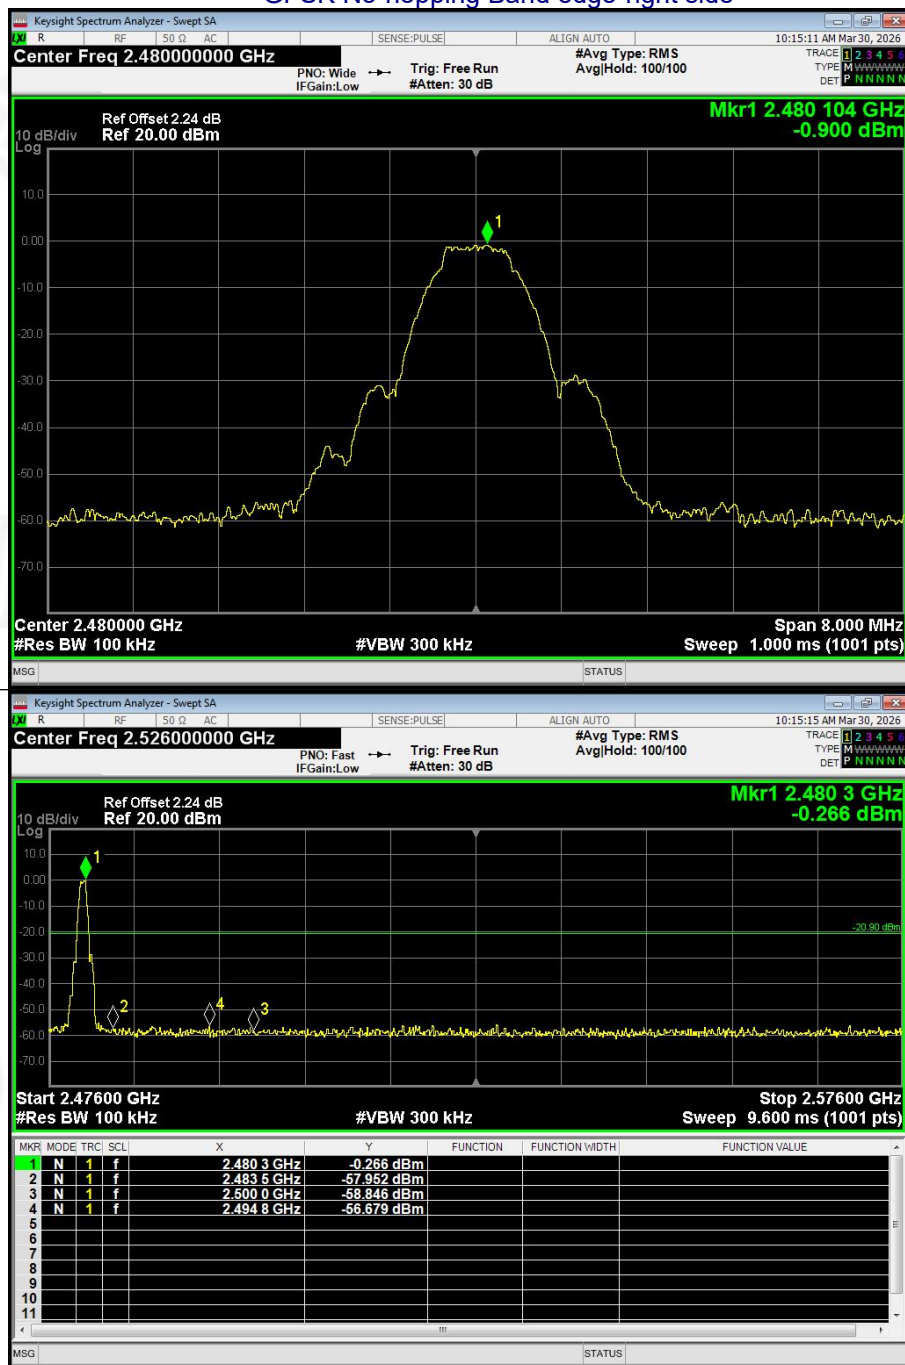



GFSK Hopping Band edge-right side

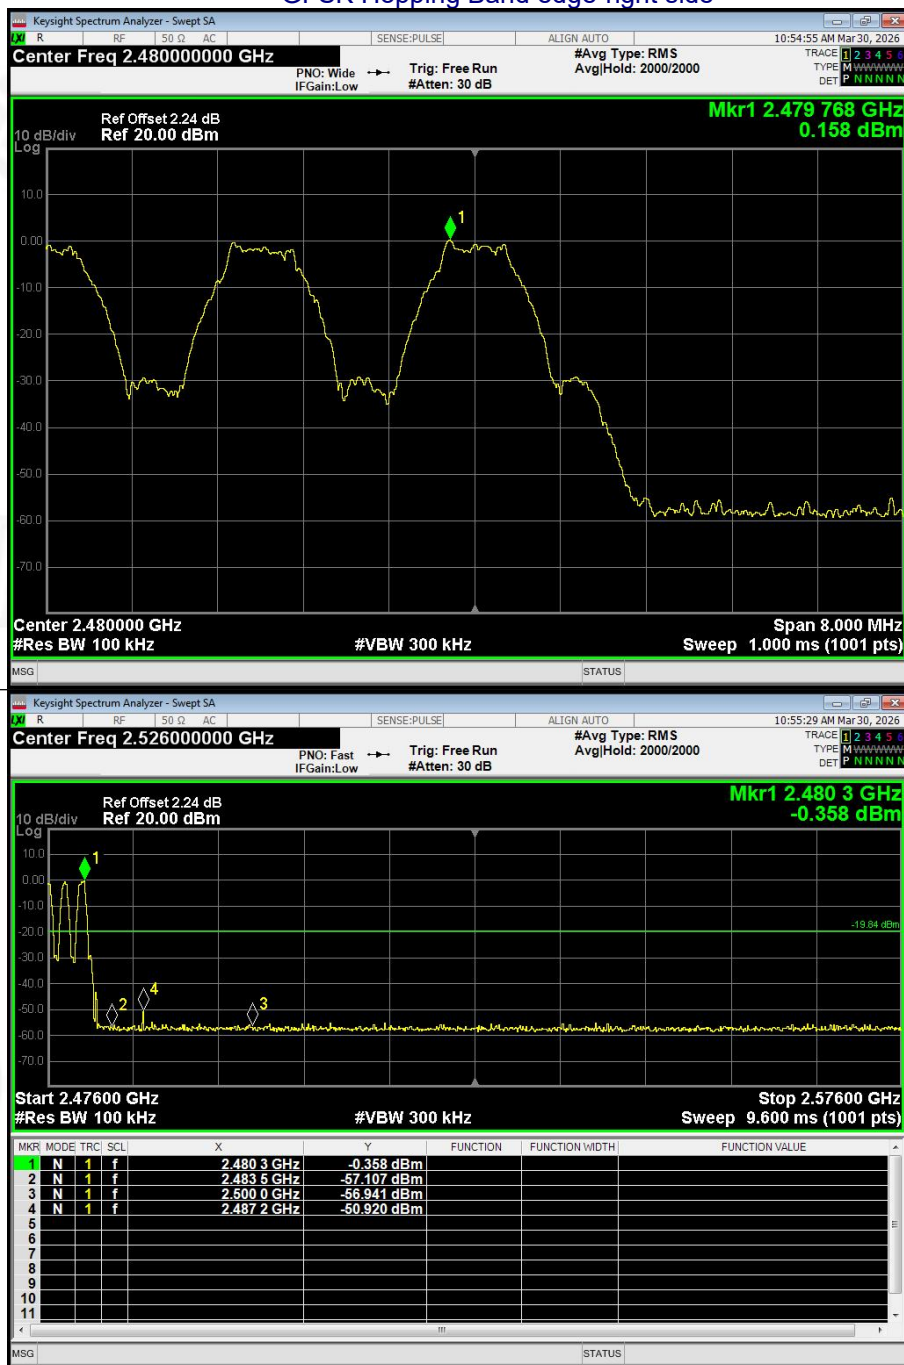




7. 20dB Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10-2020+Cor 1-2023

7.1 Test Setup

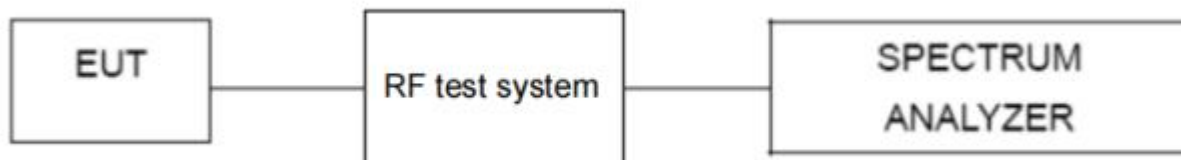

7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result



Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	1.182	Pass
	Middle	1.202	
	Highest	1.169	

Test plots

GFSK Low Channel






GFSK Middle Channel



GFSK High Channel

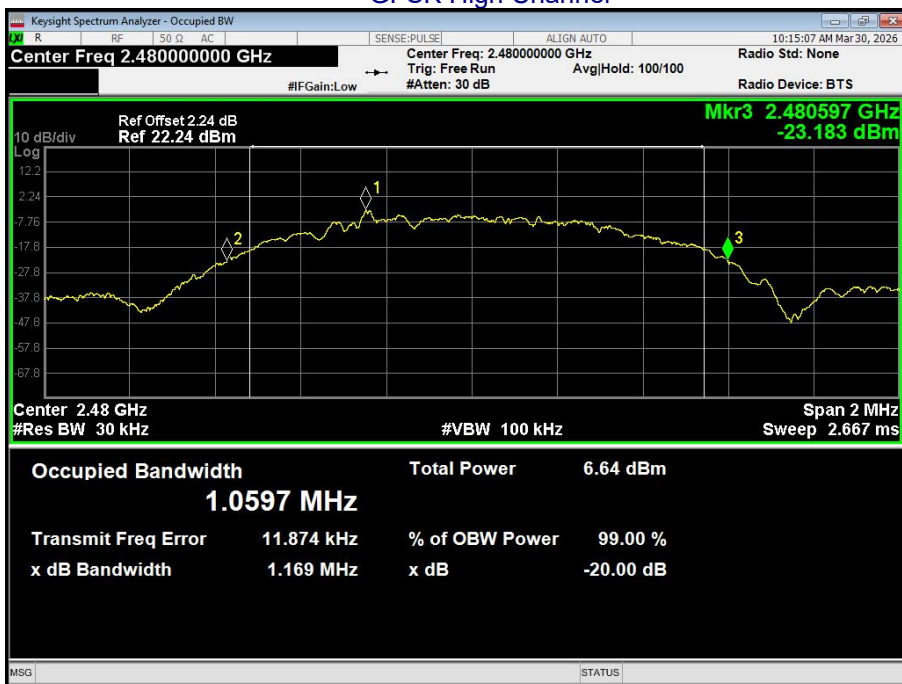




8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10-2020+Cor 1-2023
Limit:	GFSK:20.97dBm

8.1 Block Diagram Of Test Setup

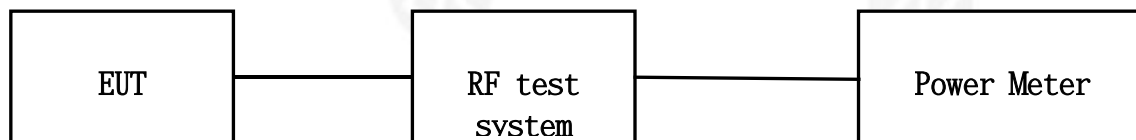

8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

The EUT tested system was configured as the statements of 8.1 Unless otherwise a special operating condition is specified in the follows during the testing.

8.4 DEVIATION FROM STANDARD

No deviation.

8.5 Test Result


Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	4.103	20.97	Pass
	Middle	4.123		
	Highest	3.339		



9. Hopping Channel Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10-2020+Cor 1-2023
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth

9.1 Test Setup

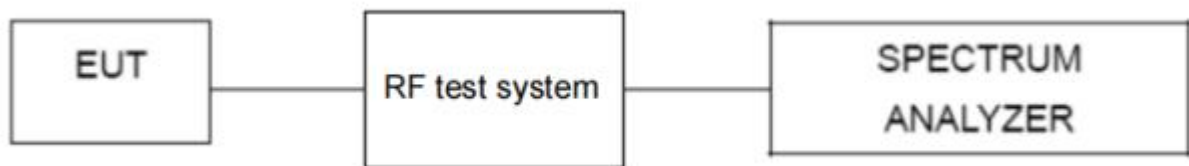

9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 Test Result



Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	2.005	1.182	PASS
GFSK	Middle	1.995	1.202	PASS
GFSK	High	2.000	1.169	PASS


Test plots

GFSK Low Channel





GFSK Middle Channel

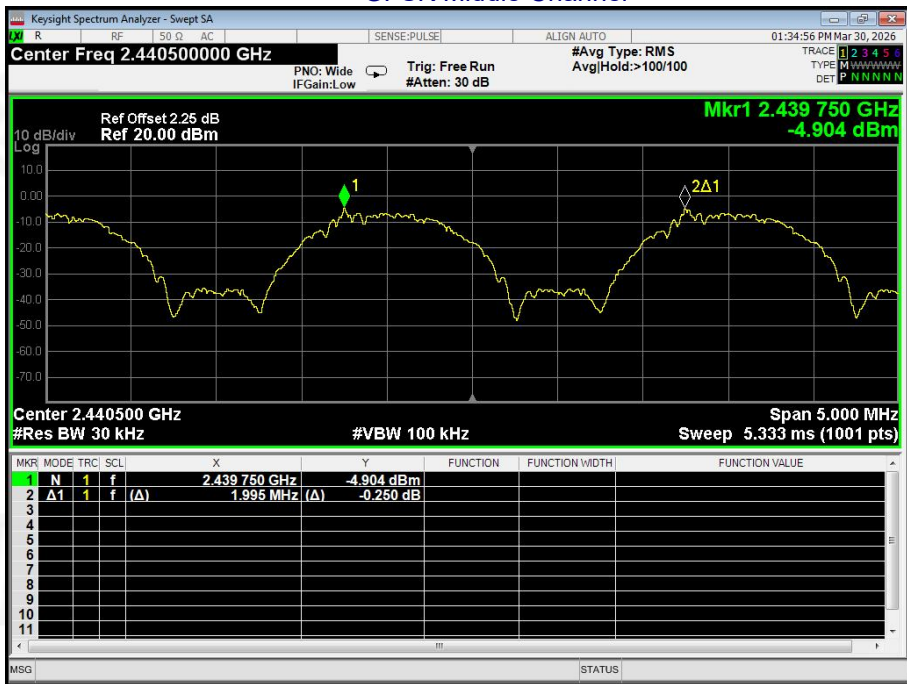

GFSK High Channel






10. NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10-2020+Cor 1-2023
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup

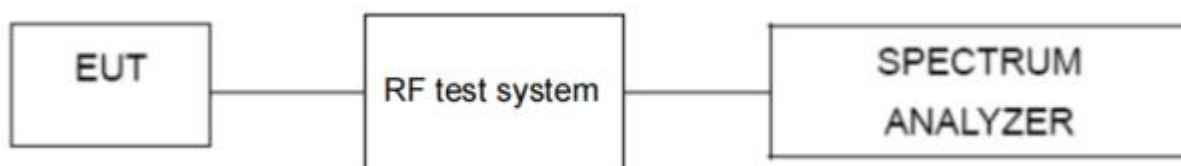

10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD


No deviation.



10.4 Test Result

Test Plots:

40 Channels in total
GFSK

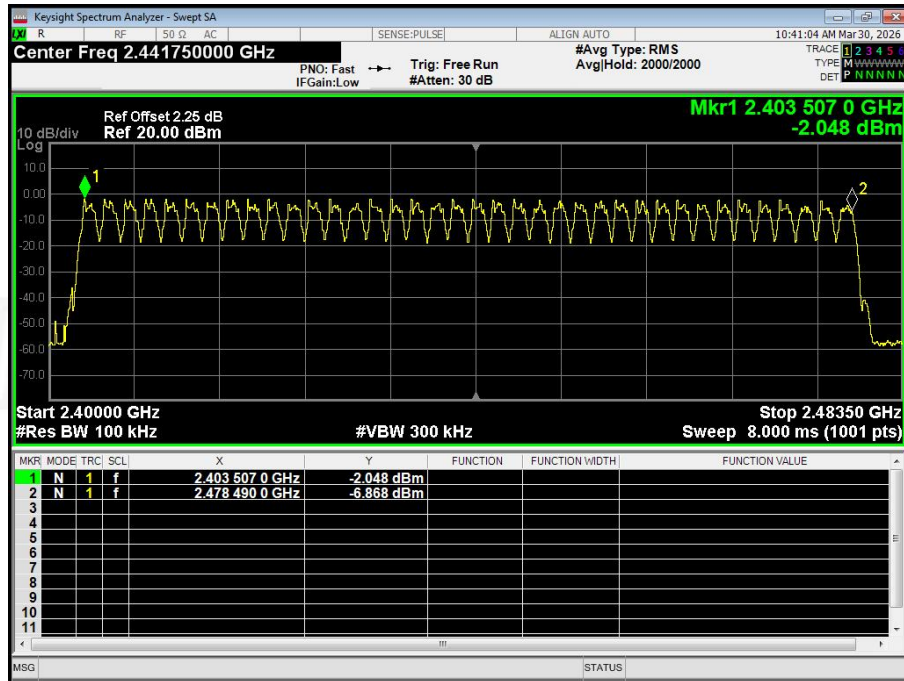




11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10-2020+Cor 1-2023
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup

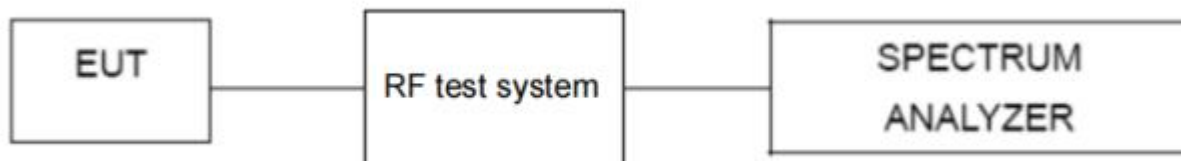

11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result

GFSK mode:

Frequency	Pulse Time (ms)	Burst Count	Dwell time(ms)	Limit(ms)	Result
2441MHz	2.137	160	341.92	400	Pass

Remarks:


The test period: $T = 0.4 \text{ Second/Channel} \times 40 \text{ Channel} = 16 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $2.137(\text{ms}) \times 160 = 341.92\text{ms}$

Test Plots

GFSK DH1 2441MHz

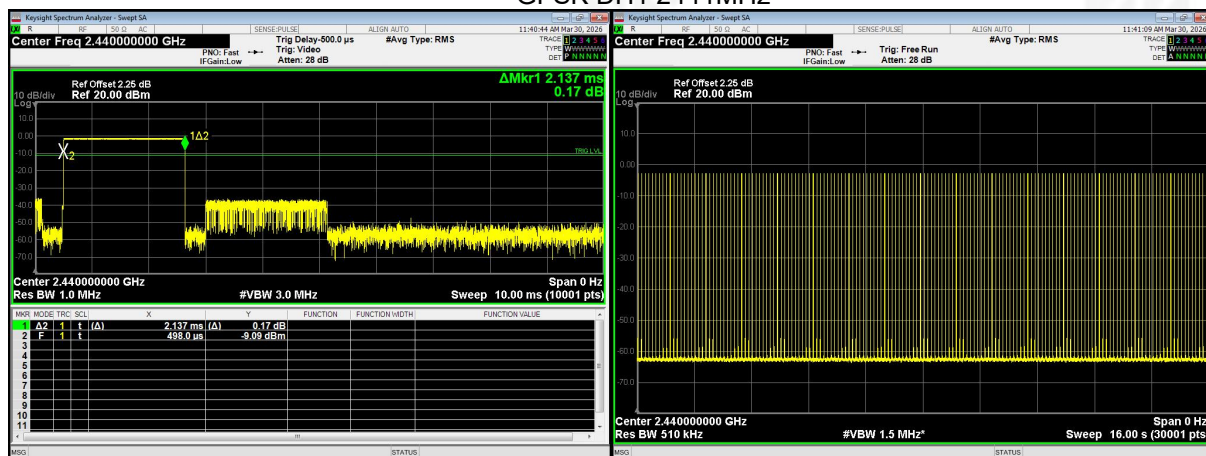



12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is FPC Antenna, the best case gain of the antennas is 2.69dBdBi, reference to the appendix II for details	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****