










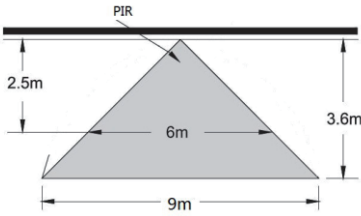


图纸发布类别： 正式归档图纸

成品尺寸	60x60mm
展开图尺寸:	360x120mm
公差:	±1mm

单位:mm

60.00 mm 60.00 mm SMART WiFi PIR Motion Sensor Wi-Fi Version Model: WIFI-703 Version: 1.0 	Product Description The core component of the smart motion sensor is the infrared sensor (PIR sensor), which works through the cooperation of the optical system to detect the thermal radiation in a certain area. When someone moves in the detection area, the infrared thermal radiation of the detector will change. The detector uses a fully digital CPU processor, adopting automatic temperature compensation technology to prevent low sensitivity caused by the temperature variation. It adopts the IoT Wi-Fi technology to connect the infrared detector to the cloud platform, make users to receive alarm information in the first time. Applicable Place Suitable for residential, shopping malls, warehouses, restaurants, parking lots, libraries, schools, hospitals, etc. Function Description 1. Improved passive infrared sensor with higher precision. 2. Customized Fresnel lens, more stable and reliable. 3. Specialized detection angle design. 4. Support alarm light signal, network indicator. 5. Support on-site alarm (LED flashing) and remote alarm (push to mobile APP via Wi-Fi connection cloud platform). 6. Long-life power supply design, the battery can work 1 year after fully charged. 7. Support low power detection, daily inspection. Electrical Specifications Operating voltage: 3.7V 500mA lithium battery (5V/1A micro USB charging port) Detecting distance: <60 meters Detecting angle: 110° Power consumption: max current < 90mA, standby current: < 20uA. Wi-Fi: 2.4G frequency support Working temperature: -20~50 °C	Working humidity: 10%~95% RH Installation way: wall-mounted / ceiling-mounted Anti-white light interference: <8000LUX Application environment: indoor Installation and Test Note: Make sure the APP configuration is completed before installation. 1. Choose the right installation position, usually at the building entrance, corridor, etc. 2. The best installation height is from 1.8 to 2.2 meters to avoid alarms caused by small animal movements. 3. Turn on the switch by pushing the button of the device to the "on" status, the red LED will be on and the sensor warms up for 30 seconds until the LED goes out. Configure the Wi-Fi network, the red LED will be on for 1 second after triggering the alarm, the APP interface displays an alarm information at the same time. It needs to wait for 30 seconds to be triggered again. If the Wi-Fi configuration is failed, the infrared triggering interval is 8 seconds. 4. Install the motion sensor on the wall, the angle is adjustable. 5. When the battery power is low, the APP interface will display low battery, please charge it in time. When the blue indicator is off, the charging is finished. Precautions 1. It is not advisable to install it by facing to the glass doors and windows, in order to prevent white light interference. 2. It is not advisable to install it face to the large objects that moves frequently, it will cause the changes of the infrared rays and lead to false alarm. 3. It is not advisable to install it face to the hot and cold vents, it will cause the changes of the infrared rays and lead to false alarms. 4. The detection area should not have any obstacles.	APP instruction 1. Download "smart life" APP - Search "smart life" in application market to download and install the App. - Registration - Click the APP and register an account according to the wizard. 	3. Add or delete devices Click the APP and log in, click Add Device —> Security Sensor —> Sensor (Wi-Fi)  	  Input the Wi-Fi SSID and password according to the APP prompt and start connection, wait about 60 seconds to complete the device's network configuration and its connection to the Tuya cloud server, synchronization with the APP. It will jump to the APP operation and monitoring interface directly when the device is added completely. You can modify the device name or share the device to other people on the APP directly. The device operation interface can see its status, alarm, offline and alarm release, etc., check history records and other setting options.
  Remarks: Ensure the device and APP work under the same Wi-Fi network to make sure the validity of the device which is set through SMART LINK or AP mode, then the device information recognized by the APP is valid. When the SMART LINK mode does not work due to Wi-Fi network configuration, use AP mode to configure the device and APP.	Smart Link mode When configuring in SMART LINK mode, make sure that the Wi-Fi network connect to the Internet normally, then ensure the APP and the device work in the same Wi-Fi network. Input the SSID and password to connect the device with cloud server to accomplish the configuration. If need different Wi-Fi network, use "Change network" through the APP.   	       	When the device is added to the Tuya smart user account, the indicating light will be off, the APP will jump to the operation interface, indicates that the device is added successfully. If not succeed, repeat the steps, until it is added successfully. Delete device Select the "Exit" icon to enter into the operation interface of the device. Click "Remove device" to delete it.  	PIR detection alarm When the PIR sensor is triggered, the alarm data will be delivered to the cloud server, the cloud server will transmit the alarm information to the APP simultaneously. The APP interface displays as below:  	Detection area 

材质	105g铜版纸	客户	产品名称	红外探测器	物料名称	红外探测器彩盒	设计	
印刷色	单印灰		型号	WIFI-703	物料编号		审核	
加工工艺	风琴6折页 正反印刷							
接合方式	/		设计编码				时间	2019/08/30

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.