



TEST REPORT

FCC ID:2A2FP-SK1200

IC :35966-SK1200

Report Number..... : ZKT-260716L0997E-2

Date of Test..... : Jul. 17, 2026 - Jul. 23, 2026

Date of issue..... : Jul. 23, 2026

Total number of pages..... : 80

Test Result..... : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen Phiradar Technology Co., Ltd.

Address : 911 Jiangshi Building, No.4 Xintian Avenue, Xintian Community, Fuhai Street, Baoan District, Shenzhen , China

Manufacturer's name : Shenzhen Phiradar Technology Co., Ltd.

Address : 911 Jiangshi Building, No.4 Xintian Avenue, Xintian Community, Fuhai Street, Baoan District, Shenzhen , China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-247 Issue 4 July 24, 2025
RSS-Gen Issue 5, April 2018+Amendment 1, March 2019+Amendment 2, February 2021
ANSIC63.10-2020+Cor 1-2023 + C63.10a-2024+ Errata to C63.10a-2024

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-110_V0

Test Report Form(s) Originator..... : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Fish finder

Trademark : vexilar

Model/Type reference..... : SK1200,SIDEKICK



Ratings.....	Charge Voltage : DC 5V DC 3.7V from battery
--------------	--



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	6
2. SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
4. EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION Limits	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 TEST RESULT	17
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 Radiated Emission Limits	19
4.2.2 TEST PROCEDURE	20
4.2.3 DEVIATION FROM TEST STANDARD	20
4.2.4 TEST SETUP	21
4.2.5 EUT OPERATING CONDITIONS	22
4.2.6 TEST RESULTS	22
5. RADIATED BAND EMISSIONMEASUREMENT	55
5.1 TEST REQUIREMENT	55
5.2 TEST PROCEDURE	55
5.3 DEVIATION FROM TEST STANDARD NO DEVIATION	55
5.4 TEST SETUP	56
5.5 EUT OPERATING CONDITIONS	56
5.6 TEST RESULT	57
6. POWER SPECTRAL DENSITY TEST	73
6.1 APPLIED PROCEDURES / LIMIT	73
6.2 TEST PROCEDURE	73
6.3 DEVIATION FROM STANDARD NO DEVIATION	73
6.4 TEST SETUP	73



6.5 EUT OPERATION CONDITIONS	73
6.6 TEST RESULT	74
7. 6 DB BANDWIDTH & 99% OCCUPIED BANDWIDTH	75
7.1 APPLIED PROCEDURES / LIMIT	75
7.2 TEST PROCEDURE	75
7.3 DEVIATION FROM STANDARD	75
7.4 TEST SETUP	76
7.5 EUT OPERATION CONDITIONS	76
7.6 TEST RESULT	76
8.AVERAGE OUTPUT POWER TEST	77
8.1 APPLIED PROCEDURES/LIMIT	77
8.2 TEST PROCEDURE	77
8.3 DEVIATION FROM STANDARD	77
8.4 TEST SETUP	77
8.5 EUT OPERATION CONDITIONS	77
8.6 TEST RESULT	77
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	78
9.1 APPLICABLE STANDARD	78
9.2 TEST PROCEDURE	78
9.3 DEVIATION FROM STANDARD	78
9.4 TEST SETUP	78
9.5 EUT OPERATION CONDITIONS	78
9.6 TEST RESULTS	78
11. ANTENNA REQUIREMENT	79
12. TEST SETUP PHOTO	80
13. EUT CONSTRUCTIONAL DETAILS	80



1. VERSION

Report No.	Version	Description	Approved
ZKT-260716L0997E-2	Rev.01	Initial issue of report	Jul. 23, 2026



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC CFR Title 47 Part 15 Subpart C Section 15.247 RSS-247 Issue 4 July 24, 2025 RSS-Gen Issue 5, April 2018+Amendment 1, March 2019+Amendment 2, February 2021			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c) RSS-Gen 6.8	Antenna requirement	PASS	
FCC part 15.207 RSS-Gen 8.8	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3) RSS-247 6.3.2	Conducted Average Output Power	PASS	
FCC part 15.247 (a)(2) RSS-247.6.3.1	6dB Occupied Bandwidth	PASS	
FCC part 15.247 (e) RSS-247.6.3.1	Power Spectral Density	PASS	
FCC part 15.247(d) RSS-Gen Section 8.10	Band Edge	PASS	
FCC part 15.205/15.209 RSS-Gen Section 8.9	Spurious Emission	PASS	



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 927491
Designation Number: CN1431
IC Registered No.: 27033
CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Fish finder
Model No.:	SK1200,SIDEKICK
Test Model:	SK1200
Model difference:	PCB boards, circuits, structures and internal configurations are the same. The difference is that model SK1200 is sold online, while SIDEKICK is sold offline.
Sample(s) Status:	Engineer sample
Sample Number:	ZKT-260716L0997-1
Frequency Range:	2412-2462MHz for 802.11 b/g/n(HT20) 2422-2452MHz for 802.11 n(HT40)
Channel numbers:	802.11b/g/n (HT20M): 11 CH 802.11n (HT40M): 7 CH
Channel separation:	5MHz
Modulation technology:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g/n(OFDM):BPSK,QPSK16QAM,64QAM
Data Rate	802.11b: 1~11Mbps 802.11g: 6~64Mbps 802.11n(HT20):6.5~72.2Mbps 802.11n(HT40):13~144.4Mbps
Antenna Type:	Cable line antenna
Antenna Gain:	1.4 dBi
Power Supply:	Charge Voltage: DC 5V DC 3.7V from battery
HVIN:	SK1200
PMN:	SK1200, SIDEKICK



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/g/n (20M)	802.11n (40M)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n20	802.11n40
Data rate	1Mbps	6Mbps	MCS0(HT20)	MCS0(HT40)

Test Software	EspRFTTestTool_v5.2_Manual
Power level setup	Default




3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious

3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Fish finder	vexilar	SK1200	N/A	EUT
E-2	Battery	vexilar	704548	N/A	EUT
E-3	Adapter	HUAWEI	ZC-050-A	N/A	AE
E-4	USB Cable	HUAWEI	ZC-050-A	N/A	AE
-	Test Cable	Shenzhen Tegat Technology Co., Ltd.	RF-01	N/A	AE
-	SMA RF Cable	Shenzhen Tegat Technology Co., Ltd.	RF001	N/A	AE
-	Serial port board	Shenzhen Tegat Technology Co., Ltd.	TTL340	N/A	AE



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESC17	100969	4.32	Oct. 24, 2025	Oct. 23, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 20, 2025	Sep. 19, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 20, 2025	Sep. 19, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2025	Sep. 29, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Sep. 20, 2025	Sep. 19, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 19, 2025	Sep. 18, 2026
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 19, 2025	Sep. 18, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Oct. 24, 2025	Oct. 23, 2026
11	Test Cable	Shenzhen Tegat Technology Co., Ltd.	R-01	N/A	ZKT-086	May. 25, 2025	May. 24, 2026
12	Test Cable	Shenzhen Tegat Technology Co., Ltd.	R-02	N/A	ZKT-087	May. 25, 2025	May. 24, 2026
13	Test Cable	Shenzhen Tegat Technology Co., Ltd.	R-03	N/A	ZKT-088	May. 25, 2025	May. 24, 2026
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\
18	Band-Filter	Link	JL-BPF-S MAKK	ZKT-0121	N/A	Sep. 19, 2025	Sep. 18, 2026



Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 23, 2025	Sep. 22, 2026
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 19, 2025	Sep. 18, 2026
3	Test Cable	Shenzhen Tegat Technology Co., Ltd.	C-01	N/A	N/A	May. 25, 2026	May. 24, 2027
4	Test Cable	Shenzhen Tegat Technology Co., Ltd.	C-02	N/A	N/A	May. 25, 2026	May. 24, 2027
5	Test Cable	Shenzhen Tegat Technology Co., Ltd.	C-03	N/A	N/A	May. 25, 2026	May. 24, 2027
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Oct. 24, 2025	Oct. 23, 2026
7	Triple-Loop Antenna	N/A	RF300	9194	N/A	Sep. 19, 2025	Sep. 18, 2026
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Sep. 23, 2025	Sep. 22, 2026
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	Test Cable	Shenzhen Tegot Technology Co., Ltd.	RF-01	N/A	N/A	May. 25, 2026	May. 24, 2027
4	Test Cable	Shenzhen Tegot Technology Co., Ltd.	RF-02	N/A	N/A	May. 25, 2026	May. 24, 2027
5	Test Cable	Shenzhen Tegot Technology Co., Ltd.	RF-03	N/A	N/A	May. 25, 2026	May. 24, 2027
6	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Sep. 19, 2025	Sep. 18, 2026
7	Signal Generator	Agilent	N5182A	N/A	A.01.87	Sep. 20, 2025	Sep. 19, 2026
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344/M-1752	N/A	Sep. 25, 2025	Sep. 24, 2026
9	SHIELD BOX	TESCOM	TC-5970C	5970C015553	N/A	Dec. 18, 2024	Dec. 17, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 28, 2025	Sep. 27, 2026
11	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Sep. 19, 2025	Sep. 18, 2026
12	D.C. Power Supply	LongWei	TPR-6405 D	N/A	N/A	Sep. 19, 2025	Sep. 18, 2026
13	RF Software	BTS	15	V2.0.0.0	N/A	\	\
14	RF Software	TST	255	V2.0.1	N/A	\	\

Radio frequency transmission test: The software used in this test was provided by BTS.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC PART15.207 RSS-Gen [8.8]
Test Method:	ANSIC63.10-2020+Cor 1-2023 + C63.10a-2024+ Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

RSS-Gen 8.8

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

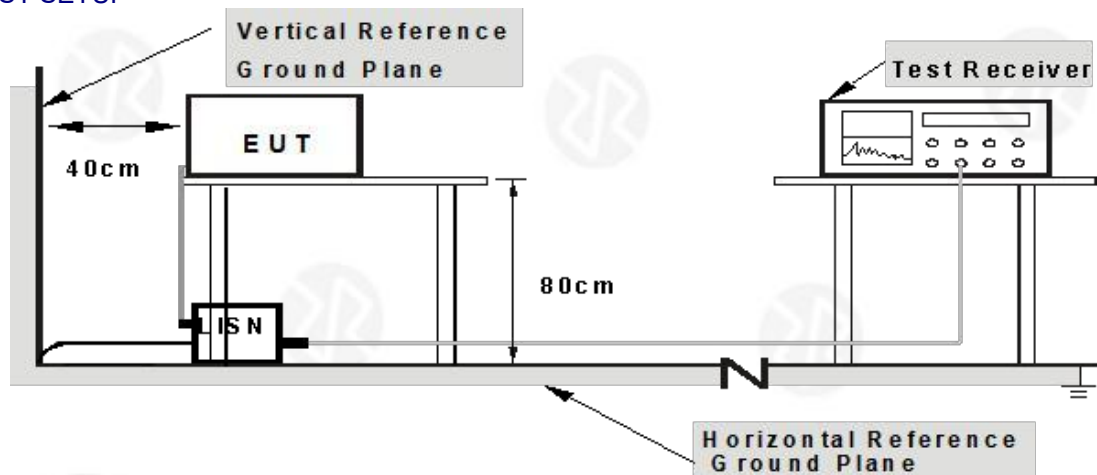

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11b-2437MHz

Note:Pre-scan all modes and recorded the worst case results in this report which is 802.11b mode 2437MHz.

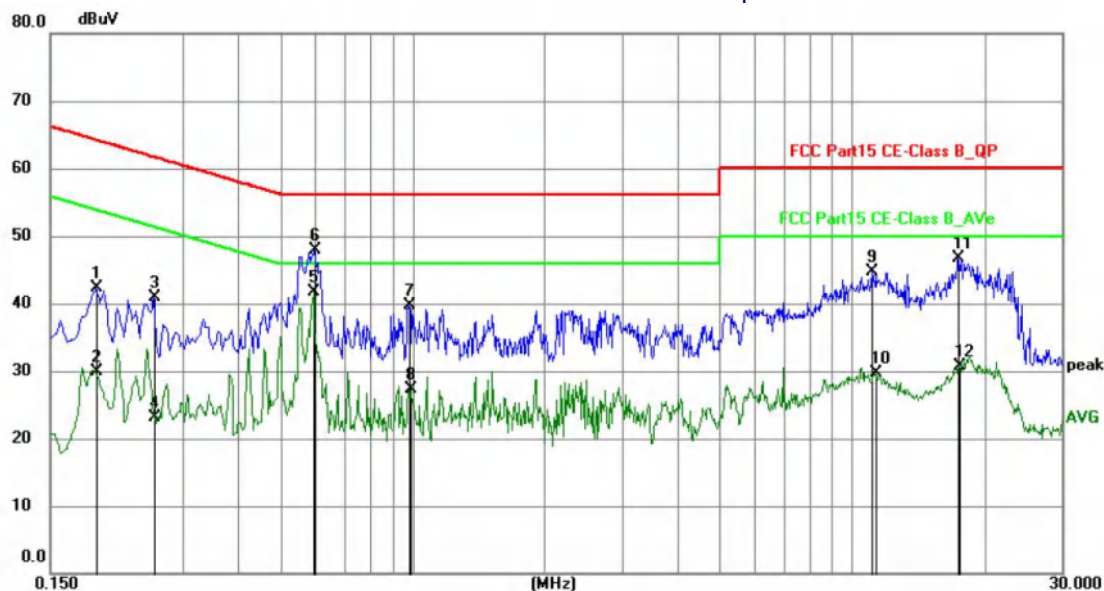


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1905	21.30	21.00	42.30	64.01	-21.71	QP	P
2	0.1905	8.97	21.00	29.97	54.01	-24.04	AVG	P
3	0.2580	19.88	21.01	40.89	61.50	-20.61	QP	P
4	0.2584	2.02	21.01	23.03	51.48	-28.45	AVG	P
5	0.5954	20.93	20.83	41.76	46.00	-4.24	AVG	P
6	0.6000	27.03	20.83	47.86	56.00	-8.14	QP	P
7	0.9824	18.79	20.95	39.74	56.00	-16.26	QP	P
8	0.9910	6.31	20.96	27.27	46.00	-18.73	AVG	P
9	11.1074	22.47	22.22	44.69	60.00	-15.31	QP	P
10	11.2736	7.52	22.25	29.77	50.00	-20.23	AVG	P
11	17.4615	23.42	23.29	46.71	60.00	-13.29	QP	P
12	17.5335	7.31	23.30	30.61	50.00	-19.39	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lish factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11b

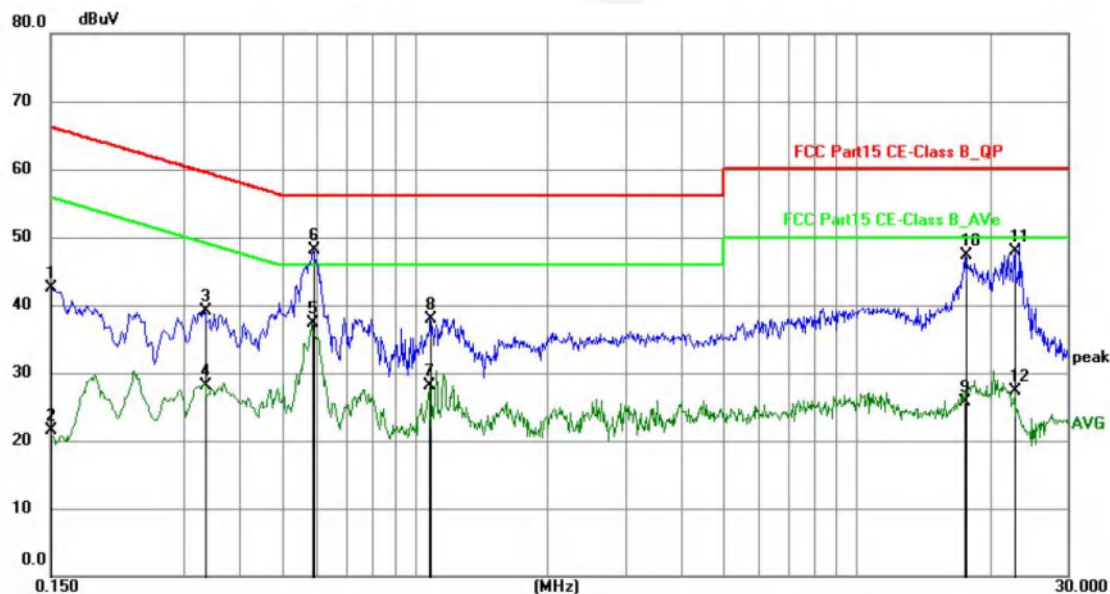

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	21.70	20.84	42.54	66.00	-23.46	QP	P
2	0.1500	0.65	20.84	21.49	56.00	-34.51	AVG	P
3	0.3345	18.06	20.95	39.01	59.34	-20.33	QP	P
4	0.3356	7.08	20.95	28.03	49.31	-21.28	AVG	P
5	0.5864	16.53	20.87	37.40	46.00	-8.60	AVG	P
6	0.5907	27.30	20.87	48.17	56.00	-7.83	QP	P
7	1.0766	7.15	20.93	28.08	46.00	-17.92	AVG	P
8	1.0859	17.05	20.93	37.98	56.00	-18.02	QP	P
9	17.4971	2.34	23.35	25.69	50.00	-24.31	AVG	P
10	17.5694	23.95	23.36	47.31	60.00	-12.69	QP	P
11	22.8255	23.65	24.22	47.87	60.00	-12.13	QP	P
12	22.8255	3.07	24.22	27.29	50.00	-22.71	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lisen factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC PART15.207 FCC part 15.205/15.209				
Test Method:	ANSIC63.10-2020+Cor 1-2023 + C63.10a-2024+ Errata to C63.10a-2024				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits FCC

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



RSS-Gen

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported


4.2.3 DEVIATION FROM TEST STANDARD




No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

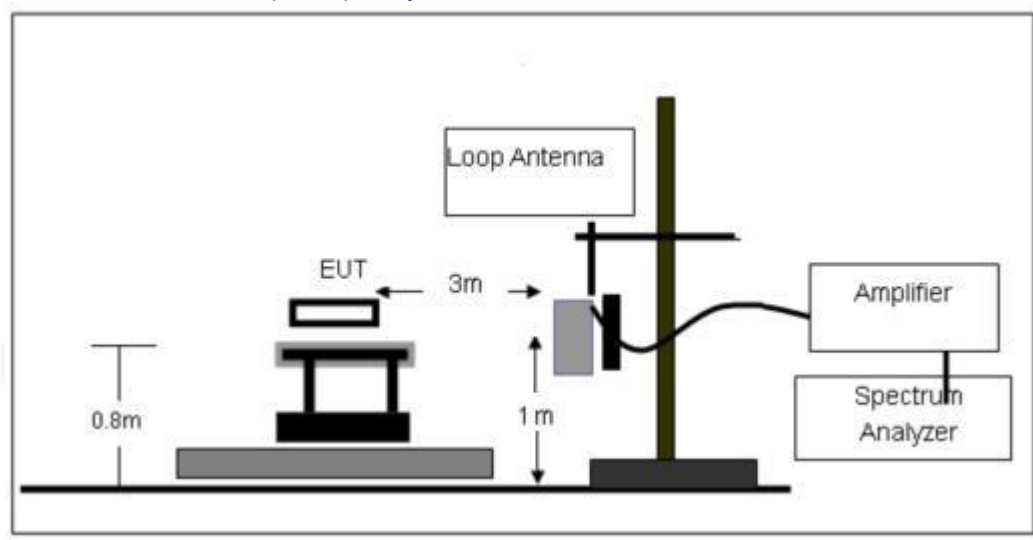


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

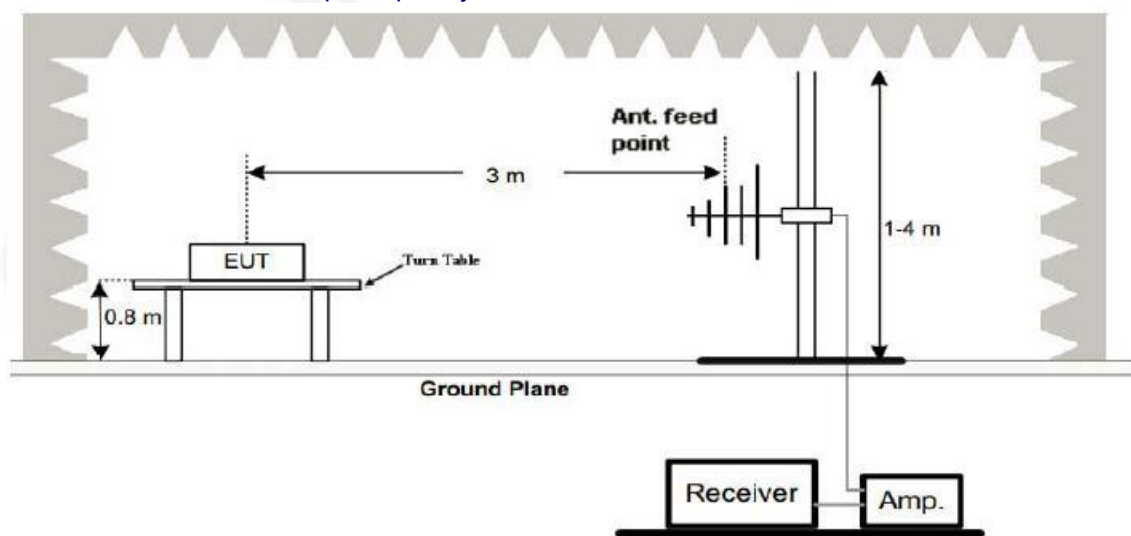



(C) Radiated Emission Test-Up Frequency Above 1GHz

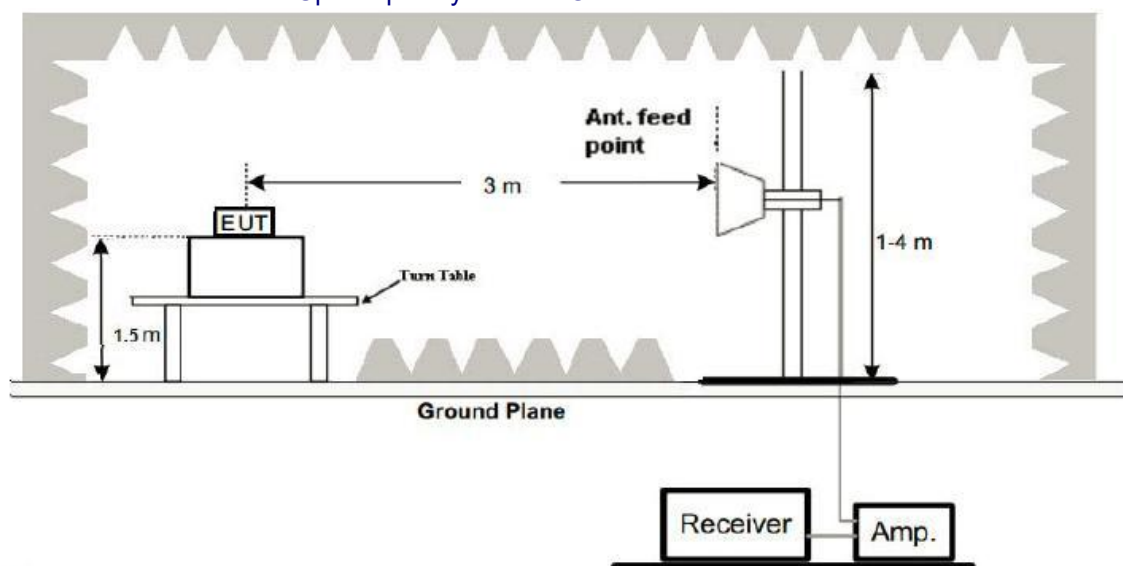

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 3.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS

Between 9KHz - 30MHz

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b - 2437MHz

Note:Pre-scan all modes and recorded the worst case results in this report which is 802.11b mode 2437MHz.

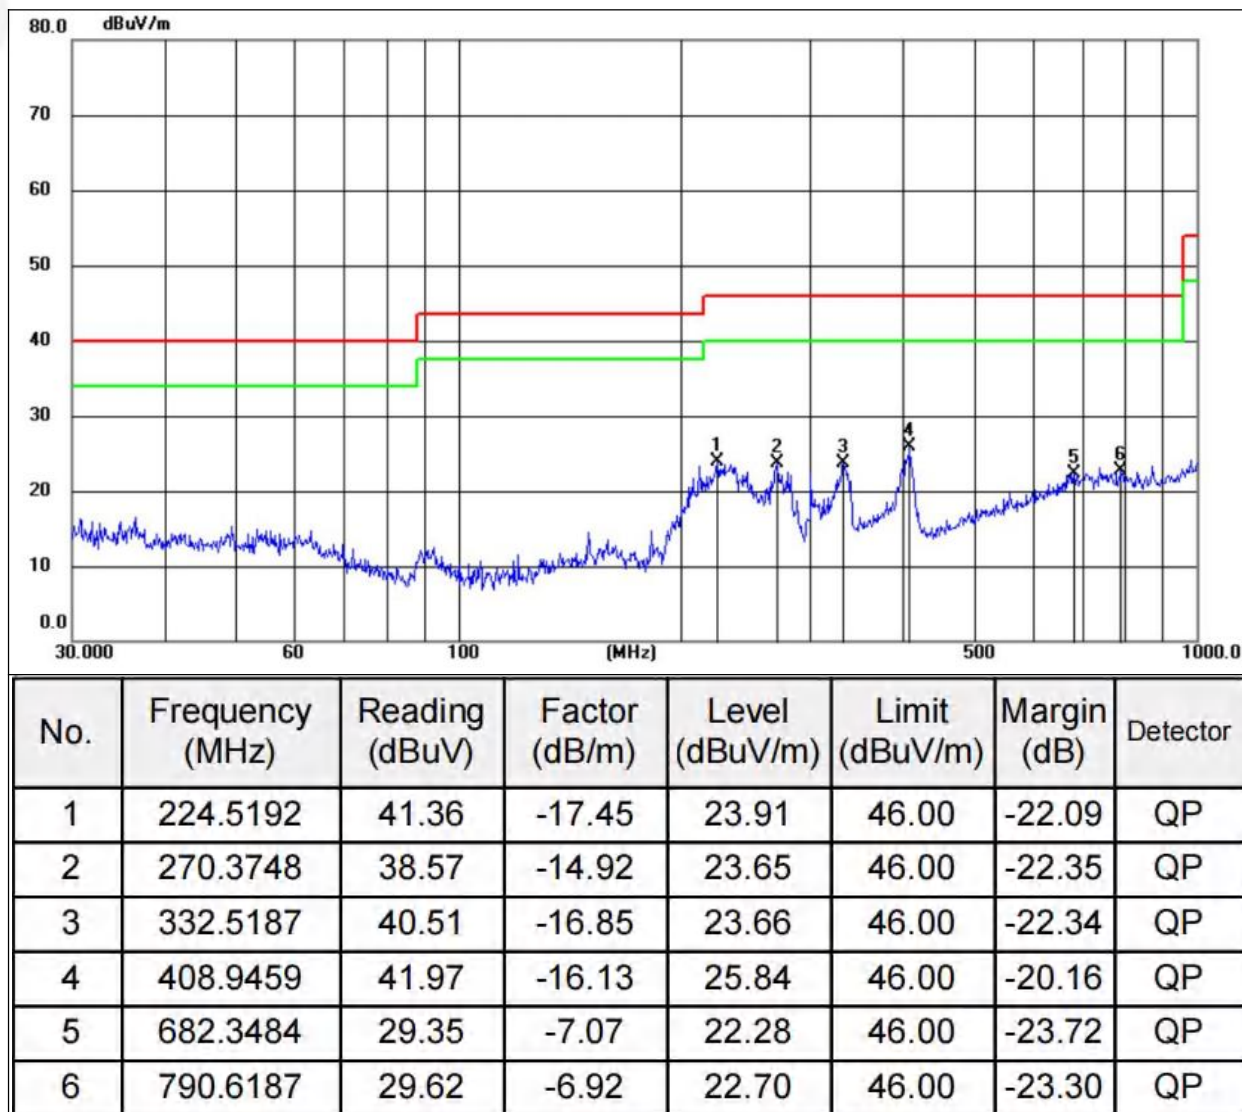


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin = Measurement Level-Limit.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b - 2437MHz

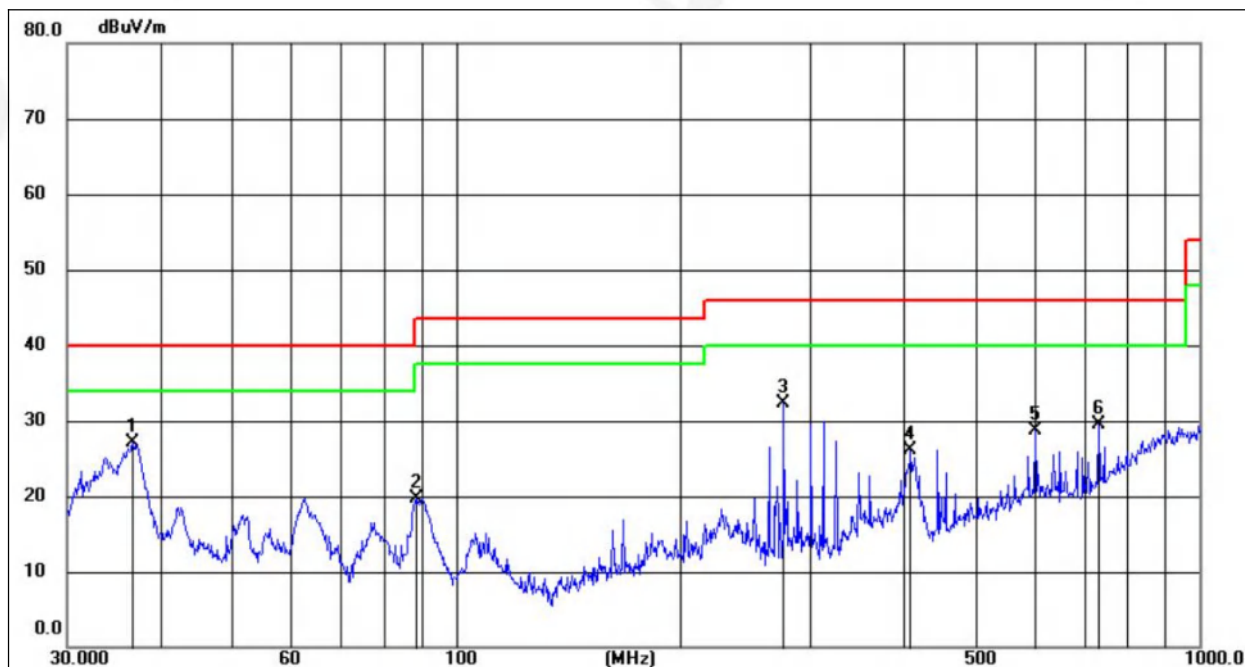

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.7661	44.53	-17.34	27.19	40.00	-12.81	QP
2	88.6524	41.21	-21.54	19.67	43.50	-23.83	QP
3	276.1235	51.29	-19.08	32.21	46.00	-13.79	QP
4	408.9459	40.75	-14.73	26.02	46.00	-19.98	QP
5	601.4265	36.42	-7.76	28.66	46.00	-17.34	QP
6	731.9202	35.81	-6.35	29.46	46.00	-16.54	QP


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin = Measurement Level-Limit.



TEST RESULTS 1GHz~25GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2412MHz

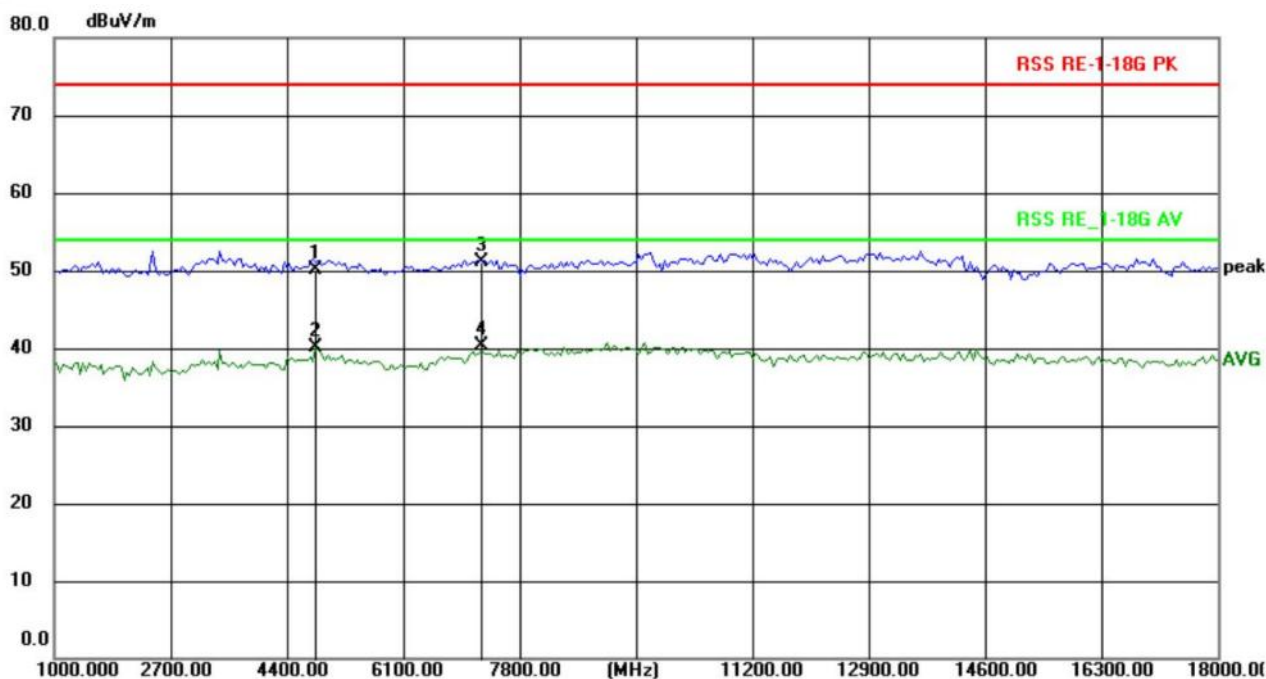


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.000	49.26	0.87	50.13	74.00	-23.87	peak
2	4824.000	39.19	0.87	40.06	54.00	-13.94	AVG
3	7236.000	48.72	2.45	51.17	74.00	-22.83	peak
4	7236.000	37.91	2.45	40.36	54.00	-13.64	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2412MHz

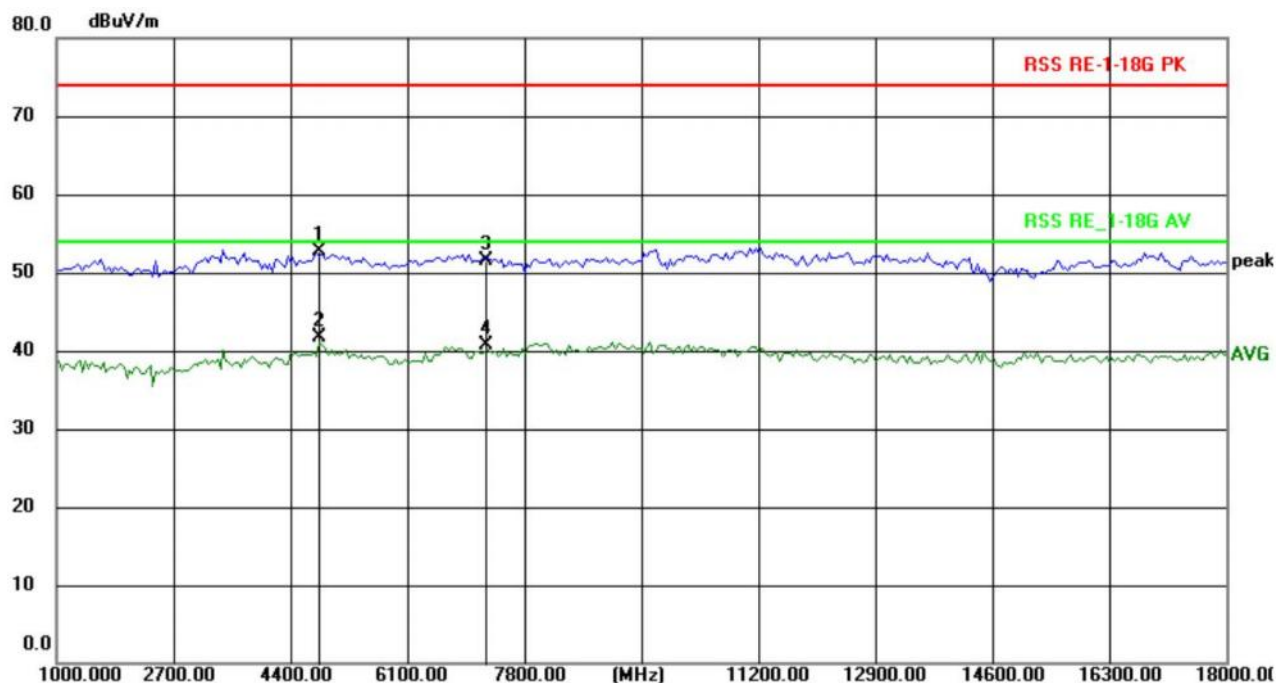


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.000	51.76	0.87	52.63	74.00	-21.37	peak
2	4824.000	40.81	0.87	41.68	54.00	-12.32	AVG
3	7236.000	49.12	2.45	51.57	74.00	-22.43	peak
4	7236.000	38.18	2.45	40.63	54.00	-13.37	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2437MHz

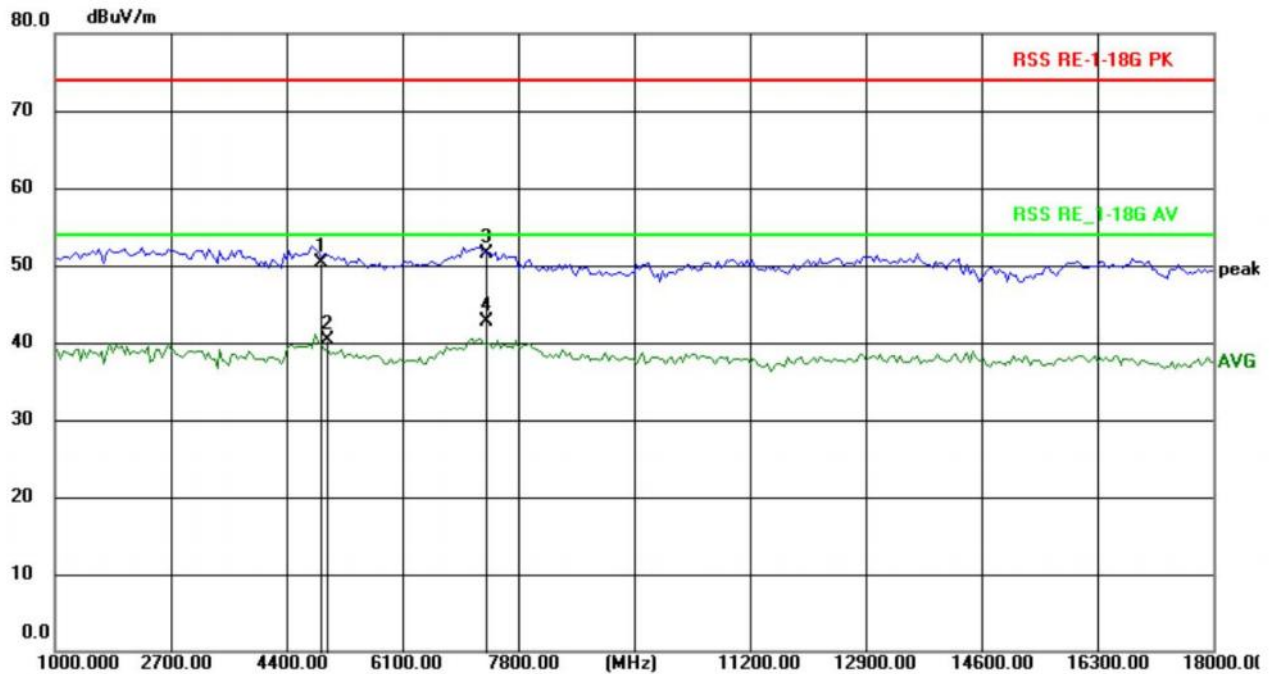


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.000	49.42	0.90	50.32	74.00	-23.68	peak
2	4974.000	39.27	0.99	40.26	54.00	-13.74	AVG
3	7311.000	48.99	2.49	51.48	74.00	-22.52	peak
4	7311.000	40.14	2.49	42.63	54.00	-11.37	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2437MHz

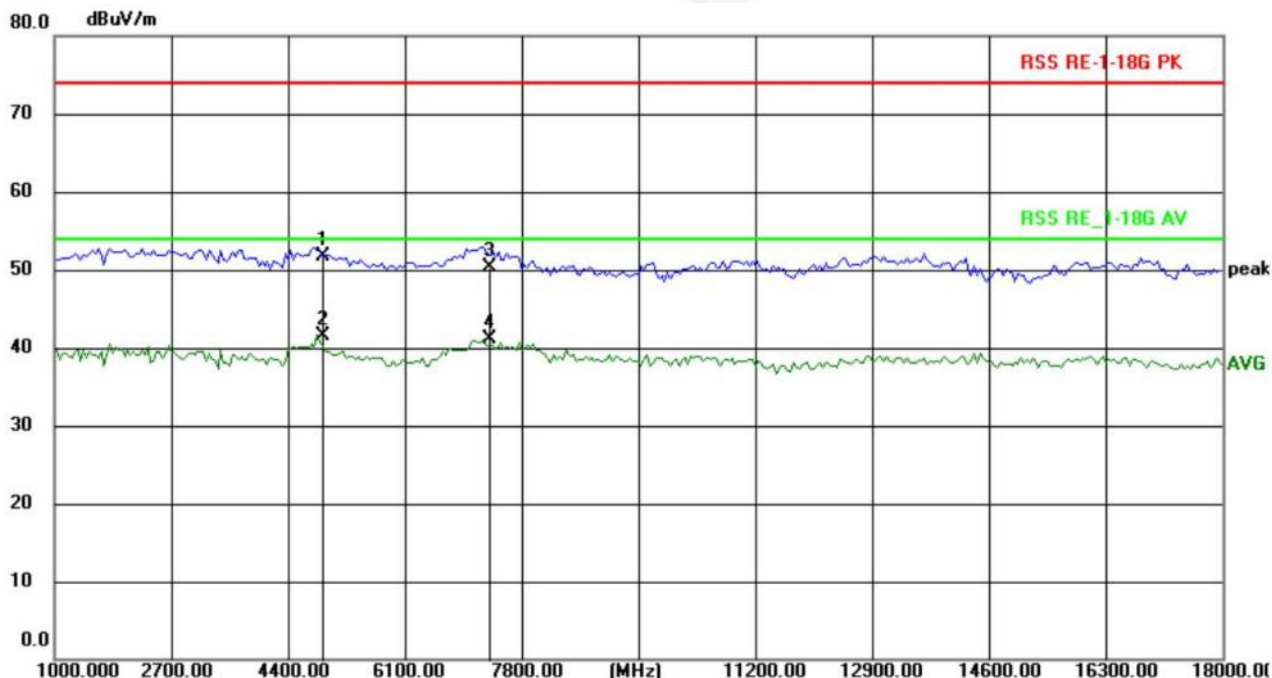


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.000	50.79	0.90	51.69	74.00	-22.31	peak
2	4874.000	40.68	0.90	41.58	54.00	-12.42	AVG
3	7311.000	47.87	2.49	50.36	74.00	-23.64	peak
4	7311.000	38.57	2.49	41.06	54.00	-12.94	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2462MHz

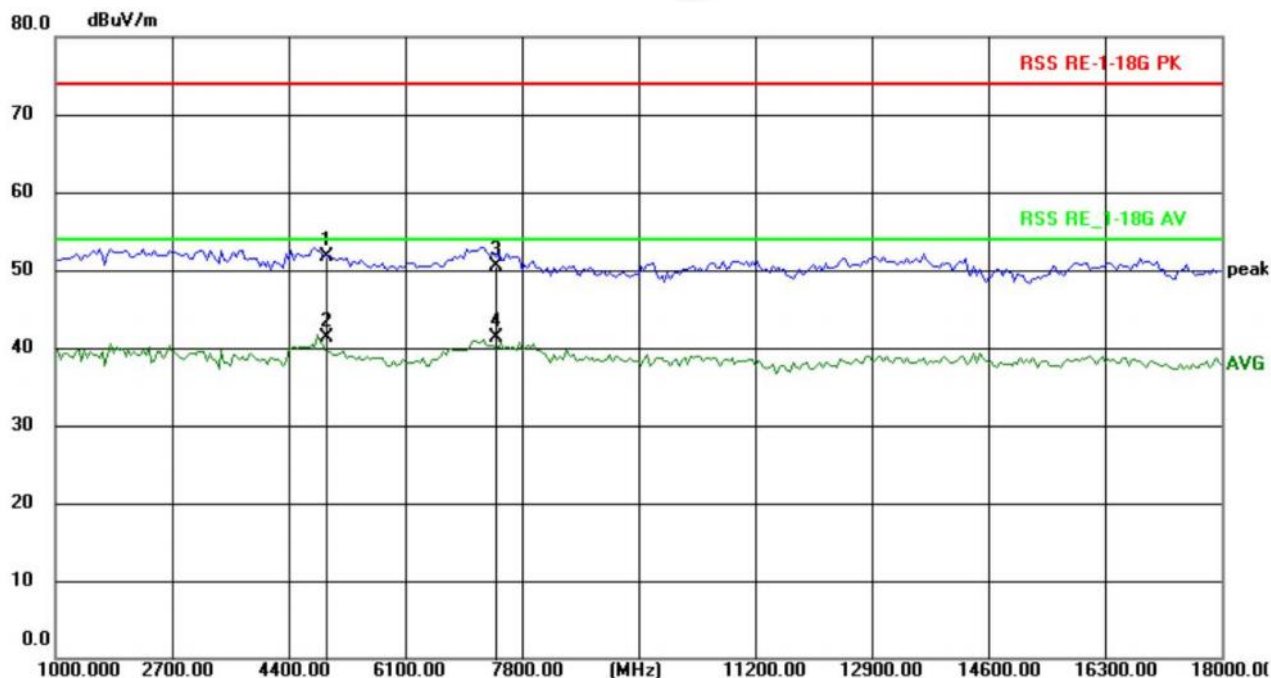


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	4924.000	50.74	0.95	51.69	74.00	-22.31	peak
2	4924.000	40.31	0.95	41.26	54.00	-12.74	AVG
3	7386.000	47.95	2.53	50.48	74.00	-23.52	peak
4	7386.000	38.73	2.53	41.26	54.00	-12.74	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2462MHz

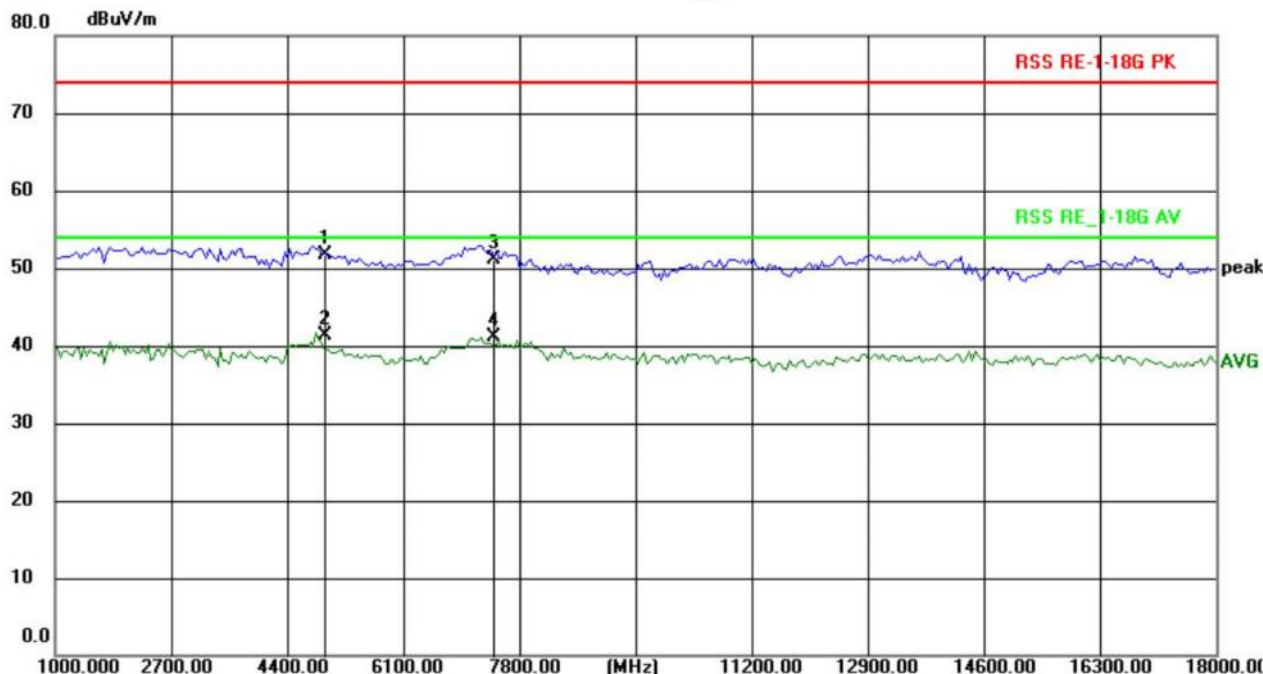


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.000	50.74	0.95	51.69	74.00	-22.31	peak
2	4924.000	40.31	0.95	41.26	54.00	-12.74	AVG
3	7386.000	48.48	2.53	51.01	74.00	-22.99	peak
4	7386.000	38.50	2.53	41.03	54.00	-12.97	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2412MHz

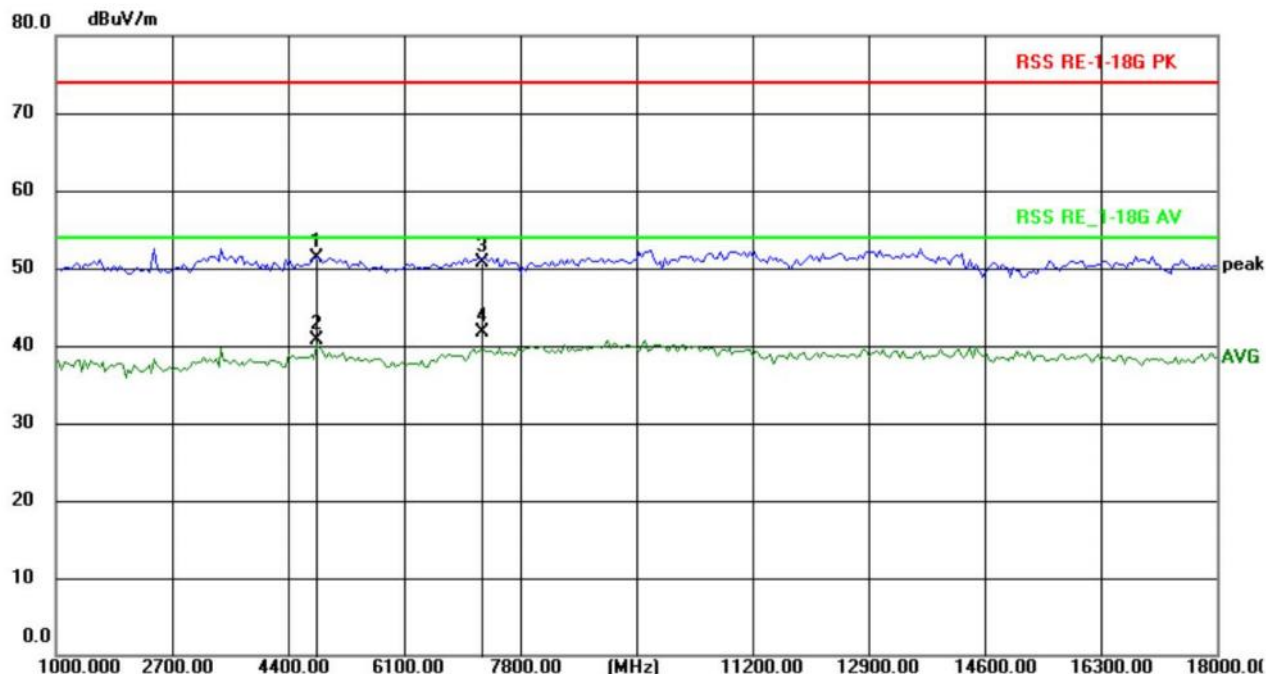


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.000	50.49	0.87	51.36	74.00	-22.64	peak
2	4824.000	39.76	0.87	40.63	54.00	-13.37	AVG
3	7236.000	48.22	2.45	50.67	74.00	-23.33	peak
4	7236.000	39.23	2.45	41.68	54.00	-12.32	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2412MHz

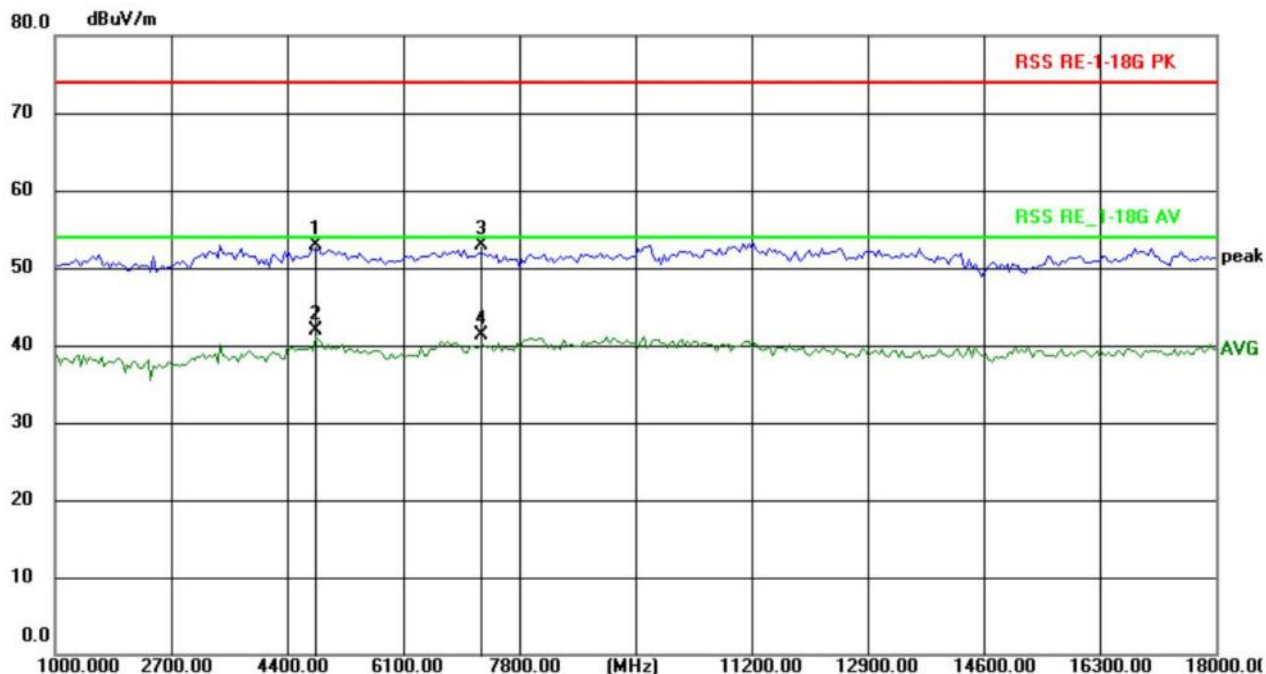


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.000	52.08	0.87	52.95	74.00	-21.05	peak
2	4824.000	40.98	0.87	41.85	54.00	-12.15	AVG
3	7236.000	50.52	2.45	52.97	74.00	-21.03	peak
4	7236.000	38.91	2.45	41.36	54.00	-12.64	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2437MHz

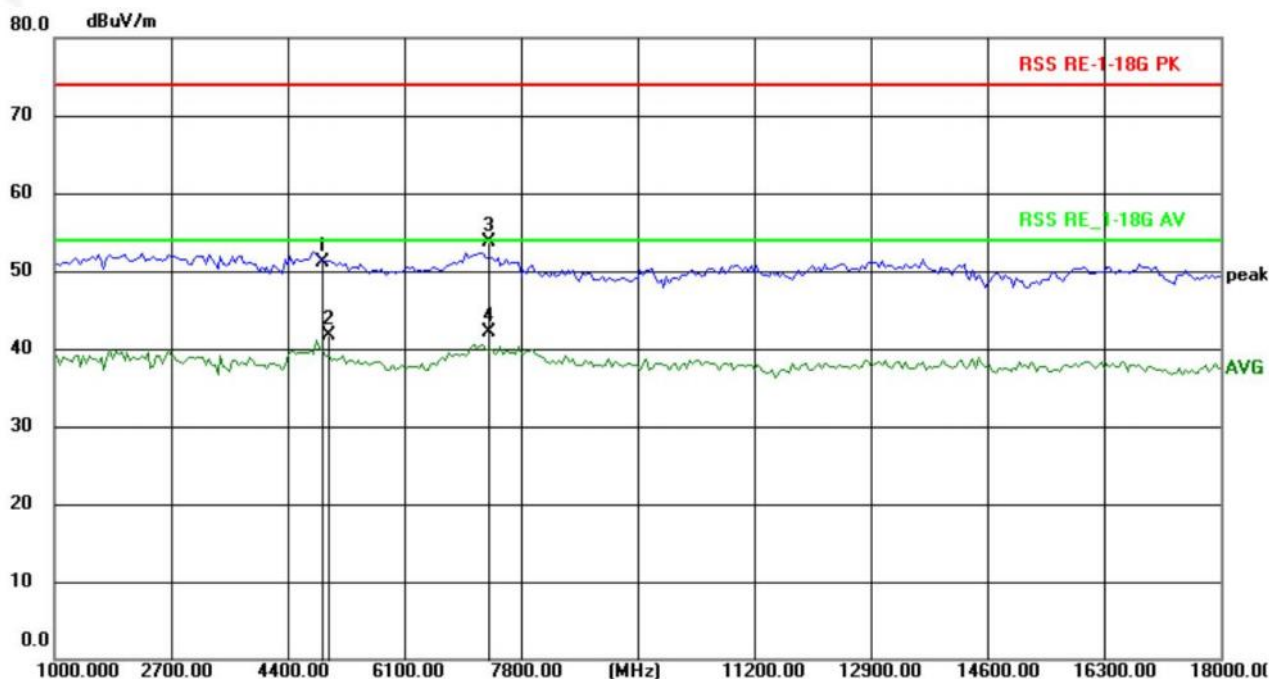


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.000	50.16	0.90	51.06	74.00	-22.94	peak
2	4974.000	40.68	0.99	41.67	54.00	-12.33	AVG
3	7311.000	51.14	2.49	53.63	74.00	-20.37	peak
4	7311.000	39.67	2.49	42.16	54.00	-11.84	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2437MHz

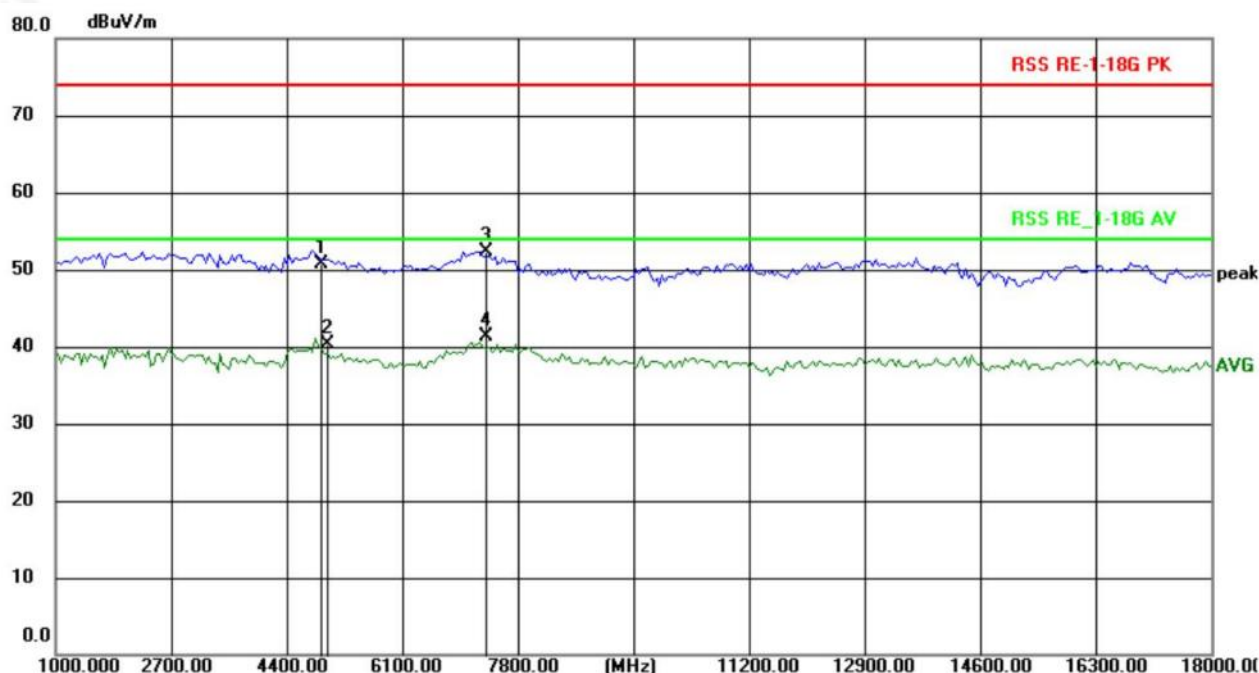


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.000	49.72	0.90	50.62	74.00	-23.38	peak
2	4974.000	39.38	0.99	40.37	54.00	-13.63	AVG
3	7311.000	49.85	2.49	52.34	74.00	-21.66	peak
4	7311.000	38.87	2.49	41.36	54.00	-12.64	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2462MHz

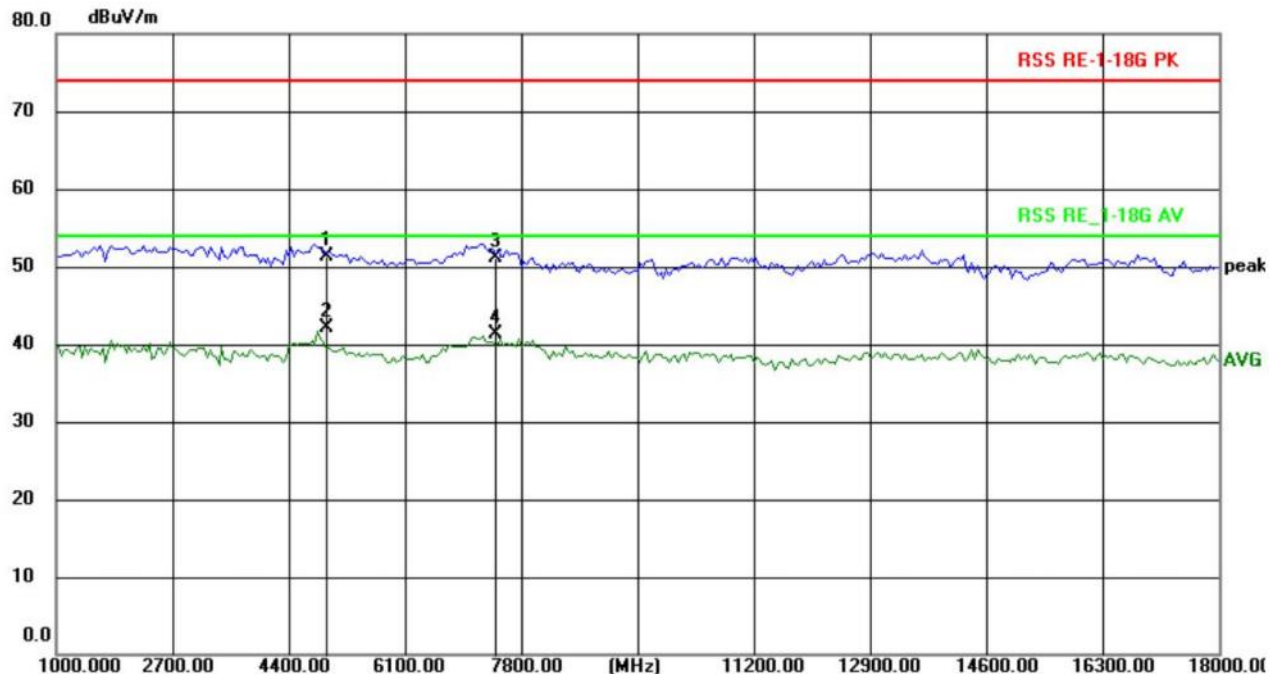


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.000	50.39	0.95	51.34	74.00	-22.66	peak
2	4924.000	41.11	0.95	42.06	54.00	-11.94	AVG
3	7386.000	48.53	2.53	51.06	74.00	-22.94	peak
4	7386.000	38.74	2.53	41.27	54.00	-12.73	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2462MHz

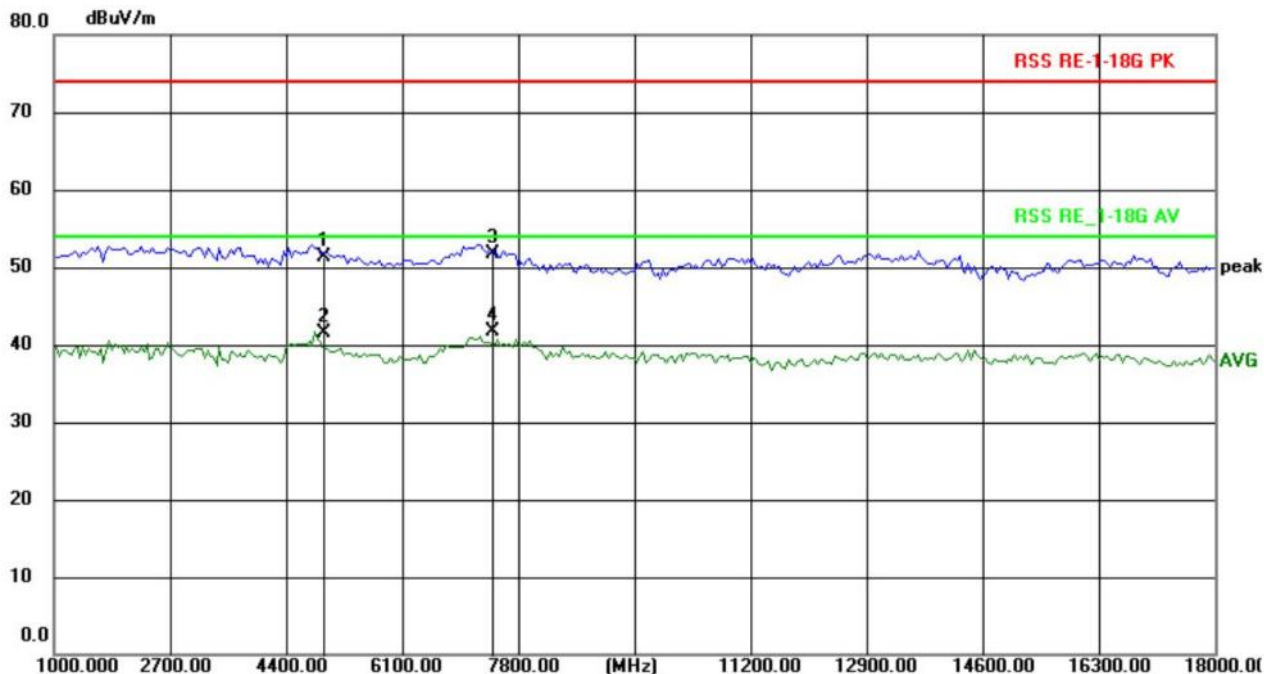


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.000	50.41	0.95	51.36	74.00	-22.64	peak
2	4924.000	40.63	0.95	41.58	54.00	-12.42	AVG
3	7386.000	49.10	2.53	51.63	74.00	-22.37	peak
4	7386.000	39.13	2.53	41.66	54.00	-12.34	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	8802.11n(HT20)-2412MHz

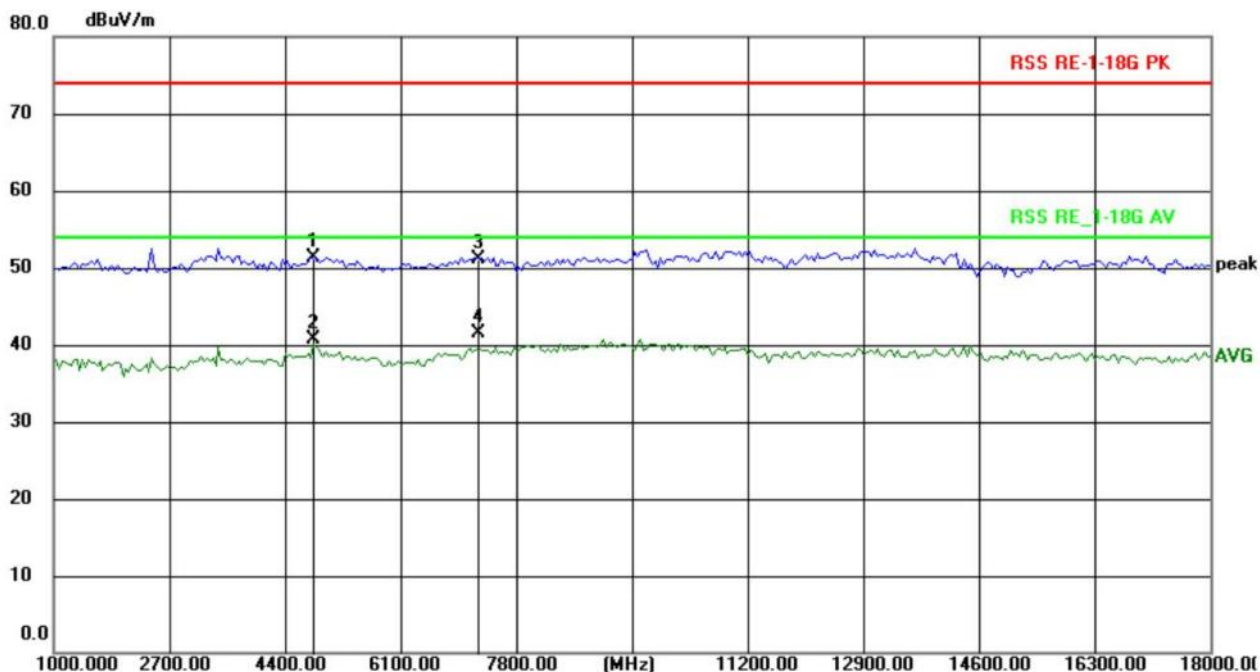


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.000	50.42	0.87	51.29	74.00	-22.71	peak
2	4824.000	39.82	0.87	40.69	54.00	-13.31	AVG
3	7236.000	48.63	2.45	51.08	74.00	-22.92	peak
4	7236.000	39.14	2.45	41.59	54.00	-12.41	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT20)-2412MHz

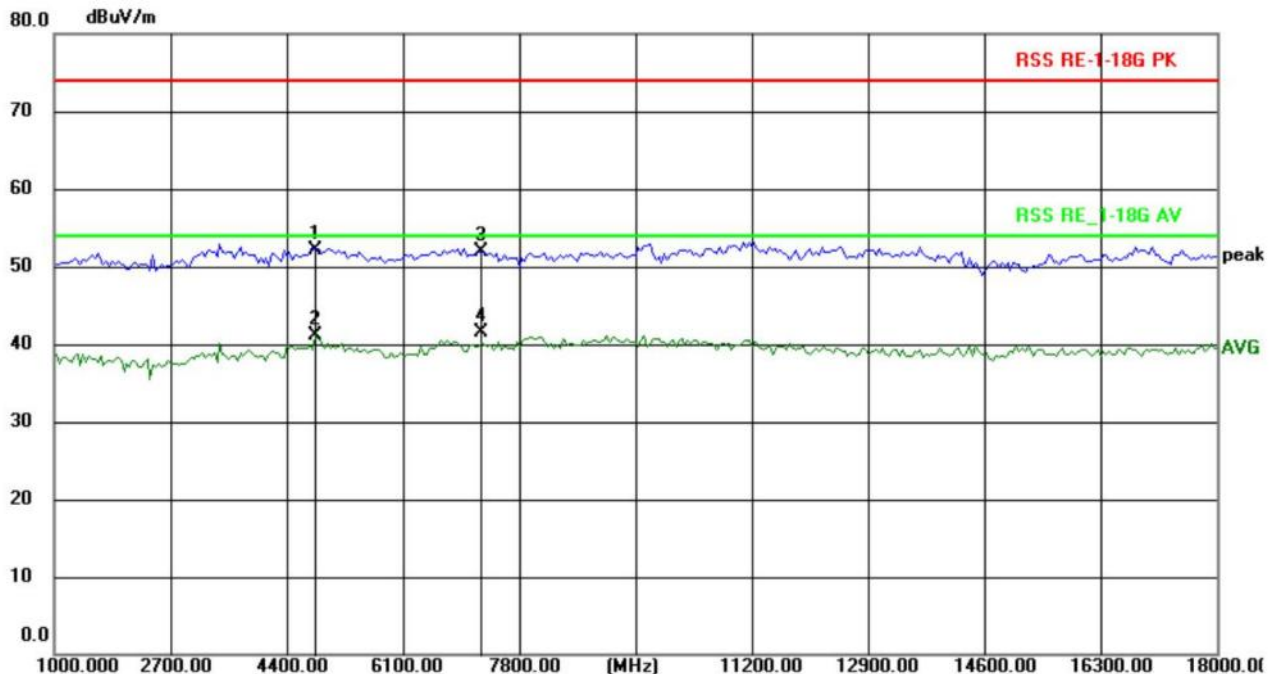


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.000	51.19	0.87	52.06	74.00	-21.94	peak
2	4824.000	40.22	0.87	41.09	54.00	-12.91	AVG
3	7236.000	49.51	2.45	51.96	74.00	-22.04	peak
4	7236.000	39.13	2.45	41.58	54.00	-12.42	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	8802.11n(HT20)-2437MHz

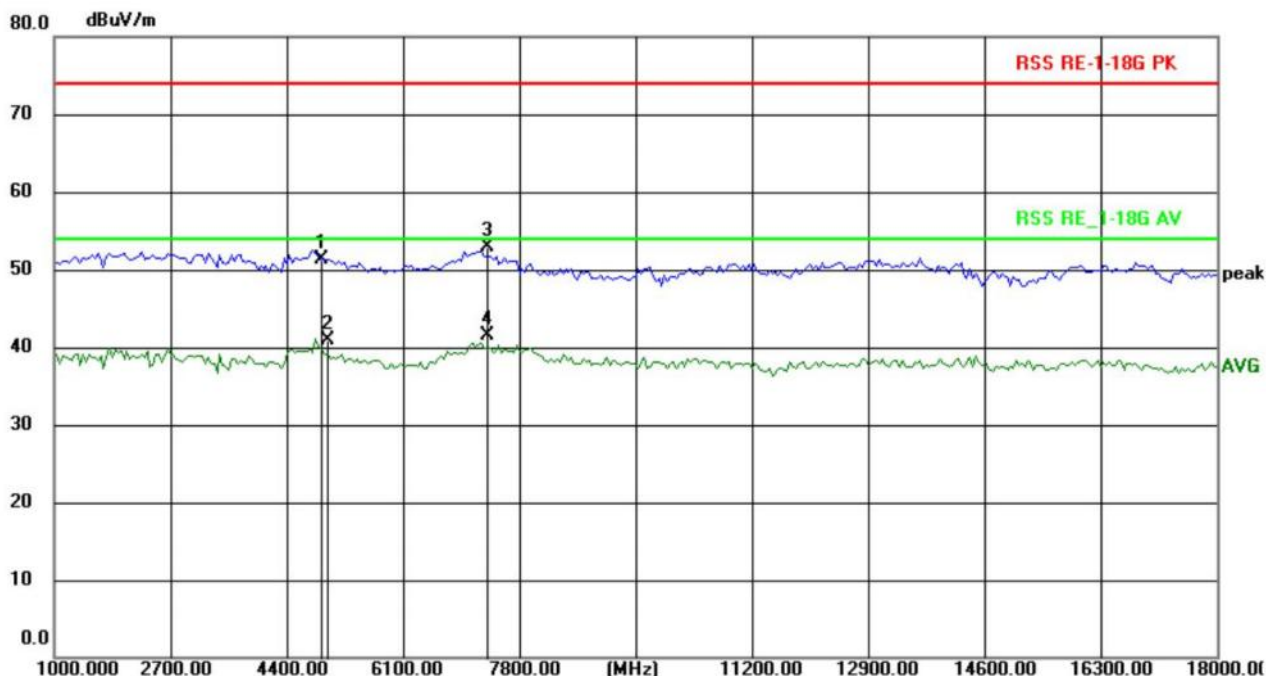


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.000	50.46	0.90	51.36	74.00	-22.64	peak
2	4974.000	39.97	0.99	40.96	54.00	-13.04	AVG
3	7311.000	50.35	2.49	52.84	74.00	-21.16	peak
4	7311.000	39.06	2.49	41.55	54.00	-12.45	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT20)-2437MHz

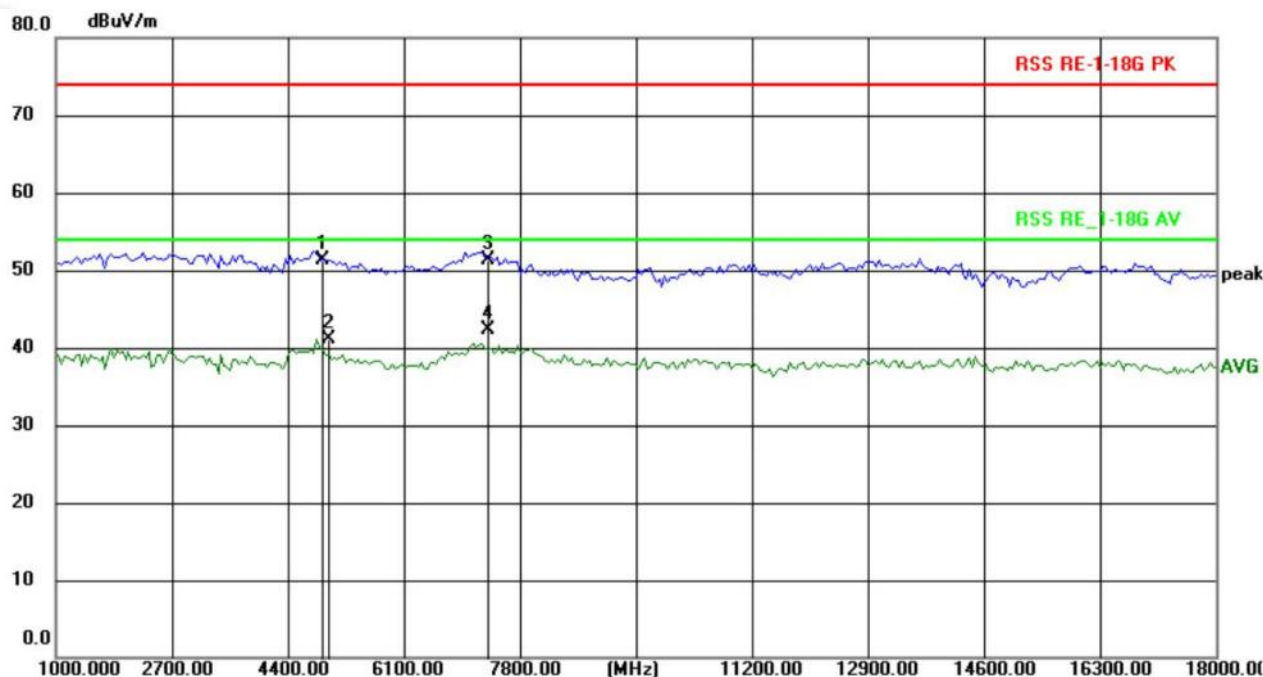


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.000	50.36	0.90	51.26	74.00	-22.74	peak
2	4974.000	40.07	0.99	41.06	54.00	-12.94	AVG
3	7311.000	48.87	2.49	51.36	74.00	-22.64	peak
4	7311.000	39.87	2.49	42.36	54.00	-11.64	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT20)-2462MHz

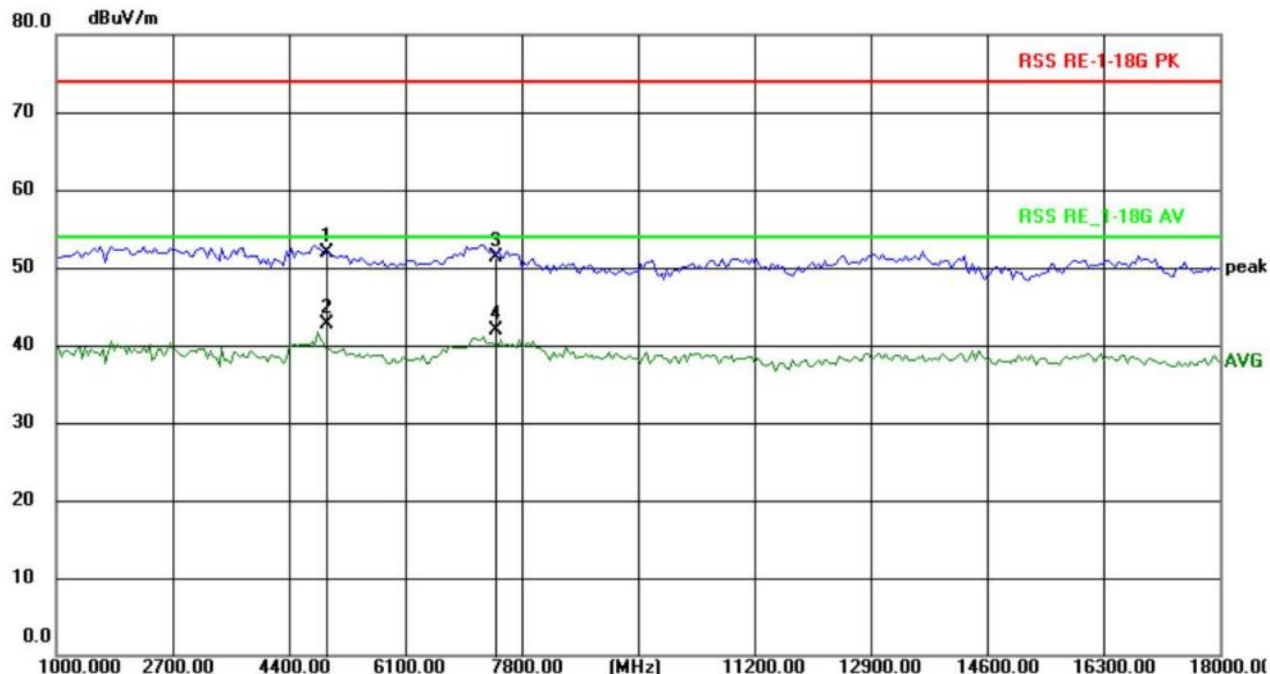


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.000	51.01	0.95	51.96	74.00	-22.04	peak
2	4924.000	41.66	0.95	42.61	54.00	-11.39	AVG
3	7386.000	48.72	2.53	51.25	74.00	-22.75	peak
4	7386.000	39.31	2.53	41.84	54.00	-12.16	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT20)-2462MHz

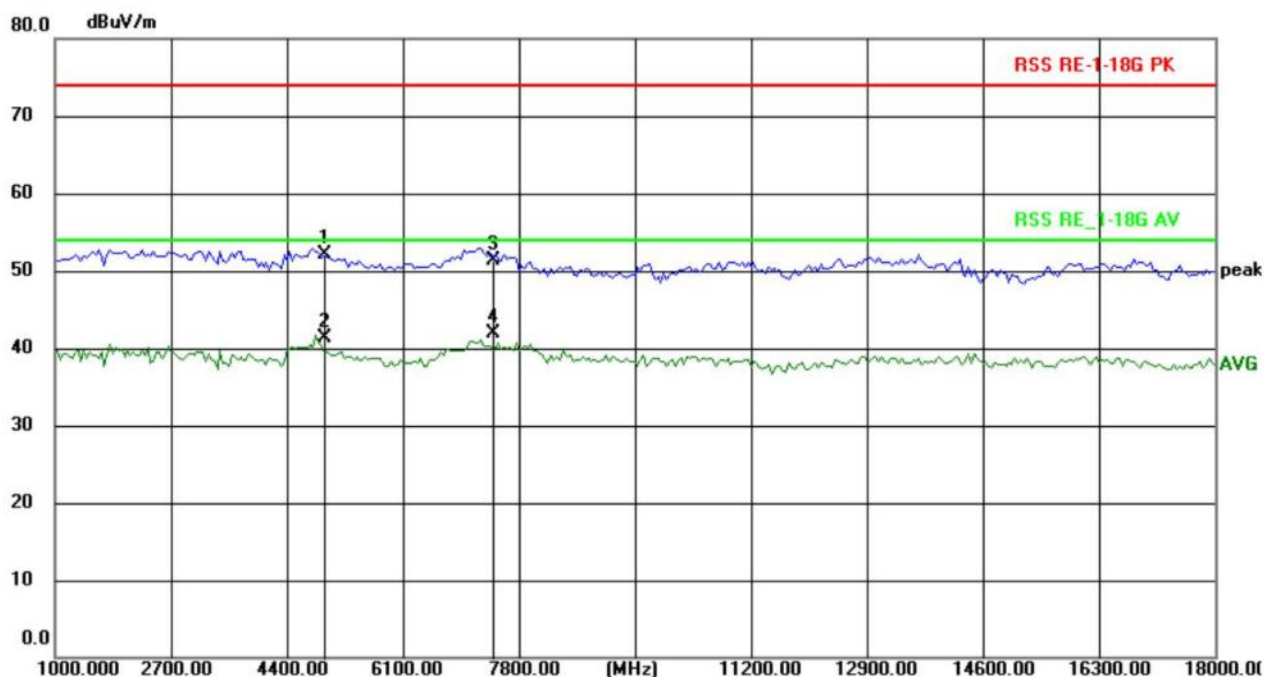


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.000	51.14	0.95	52.09	74.00	-21.91	peak
2	4924.000	40.31	0.95	41.26	54.00	-12.74	AVG
3	7386.000	48.69	2.53	51.22	74.00	-22.78	peak
4	7386.000	39.34	2.53	41.87	54.00	-12.13	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	8802.11n(HT40)-2422MHz

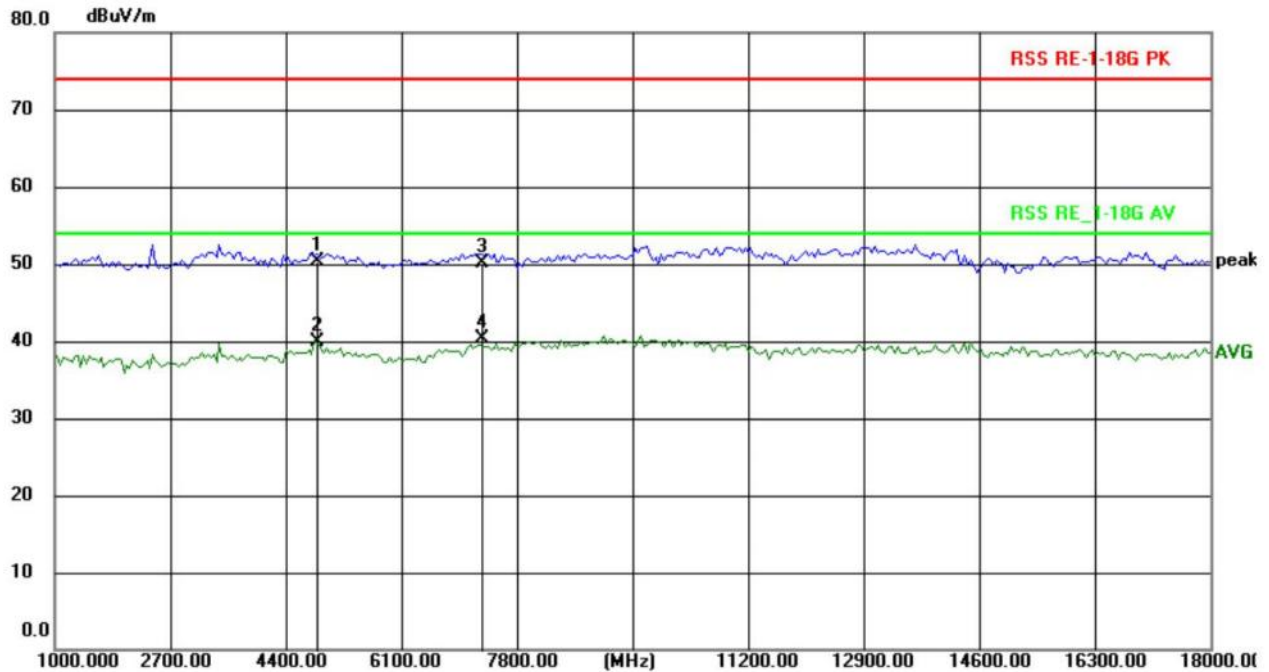


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4844.000	49.37	0.89	50.26	74.00	-23.74	peak
2	4844.000	38.95	0.89	39.84	54.00	-14.16	AVG
3	7266.000	47.71	2.47	50.18	74.00	-23.82	peak
4	7266.000	37.92	2.47	40.39	54.00	-13.61	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT40)-2422MHz

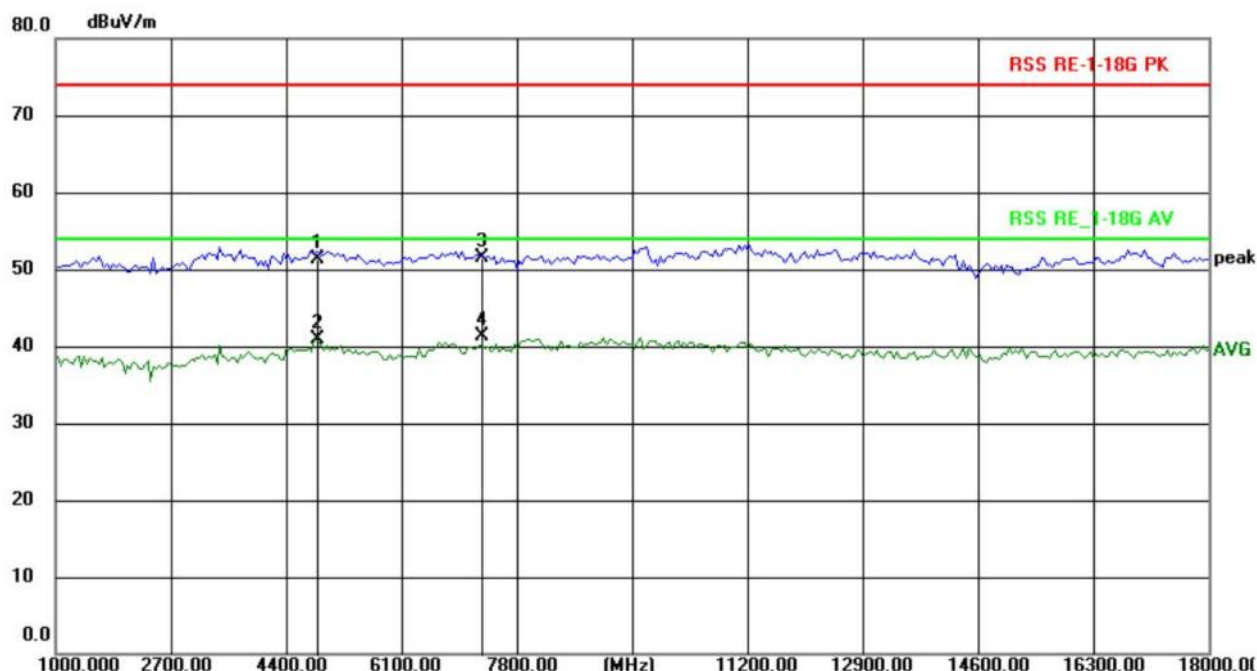


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4844.000	50.37	0.89	51.26	74.00	-22.74	peak
2	4844.000	40.09	0.89	40.98	54.00	-13.02	AVG
3	7260.000	49.08	2.46	51.54	74.00	-22.46	peak
4	7260.000	38.93	2.46	41.39	54.00	-12.61	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	8802.11n(HT40)-2437MHz

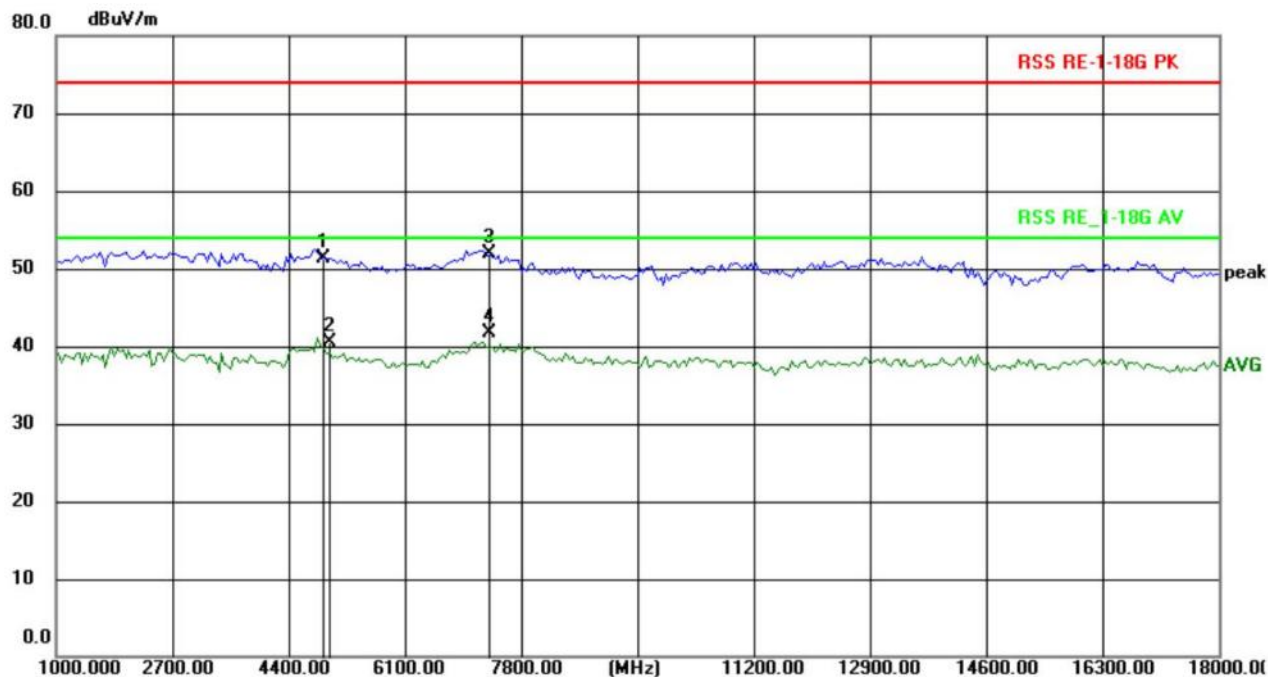


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.000	50.43	0.90	51.33	74.00	-22.67	peak
2	4974.000	39.60	0.99	40.59	54.00	-13.41	AVG
3	7311.000	49.35	2.49	51.84	74.00	-22.16	peak
4	7311.000	39.17	2.49	41.66	54.00	-12.34	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT40)-2437MHz

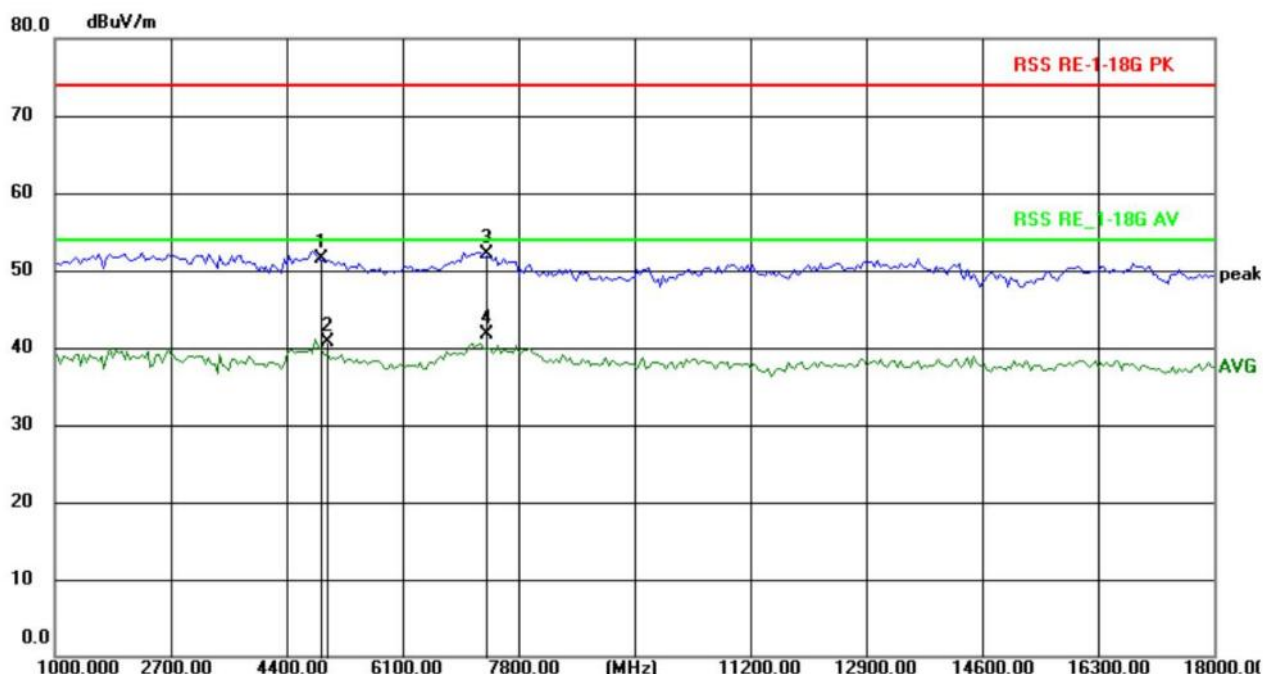


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.000	50.51	0.90	51.41	74.00	-22.59	peak
2	4974.000	39.70	0.99	40.69	54.00	-13.31	AVG
3	7311.000	49.69	2.49	52.18	74.00	-21.82	peak
4	7311.000	39.25	2.49	41.74	54.00	-12.26	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT40)-2452MHz

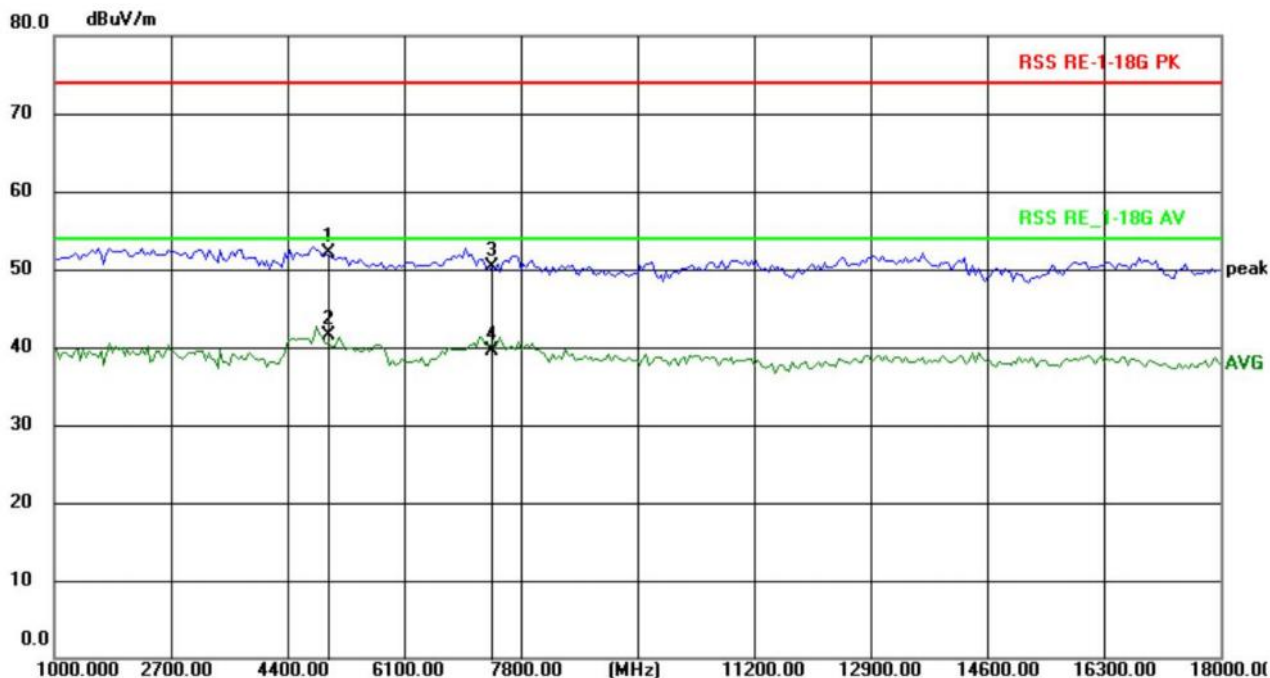


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4960.000	51.19	0.97	52.16	74.00	-21.84	peak
2	4960.000	40.51	0.97	41.48	54.00	-12.52	AVG
3	7356.000	47.78	2.51	50.29	74.00	-23.71	peak
4	7356.000	37.06	2.51	39.57	54.00	-14.43	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT40)-2452MHz

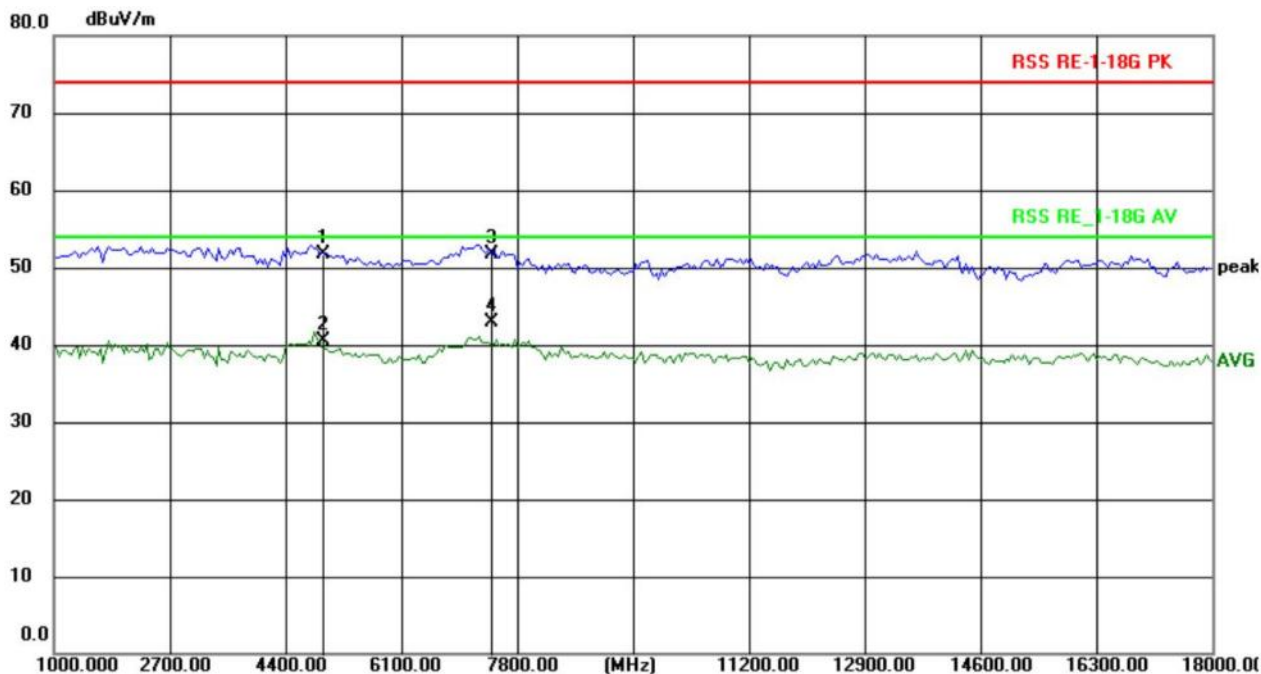

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.000	50.74	0.95	51.69	74.00	-22.31	peak
2	4924.000	39.63	0.95	40.58	54.00	-13.42	AVG
3	7386.000	49.13	2.53	51.66	74.00	-22.34	peak
4	7386.000	40.28	2.53	42.81	54.00	-11.19	AVG


Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b -2412MHz

Note:Pre-scan all modes and recorded the worst case results in this report which is 802.11b mode.

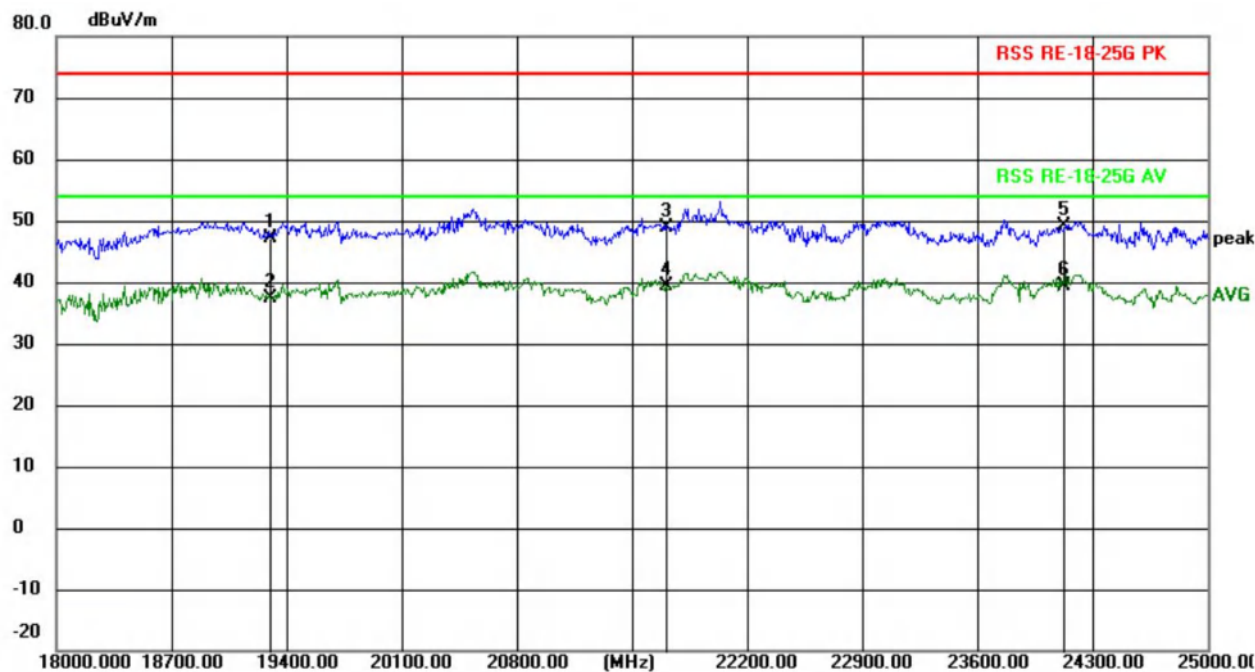


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19296.000	74.11	-26.90	47.21	74.00	-26.79	peak
2	19296.000	64.25	-26.90	37.35	54.00	-16.65	AVG
3	21708.000	75.73	-26.97	48.76	74.00	-25.24	peak
4	21708.000	66.31	-26.97	39.34	54.00	-14.66	AVG
5	24120.000	76.17	-27.06	49.11	74.00	-24.89	peak
6	24120.000	66.54	-27.06	39.48	54.00	-14.52	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b -2412MHz

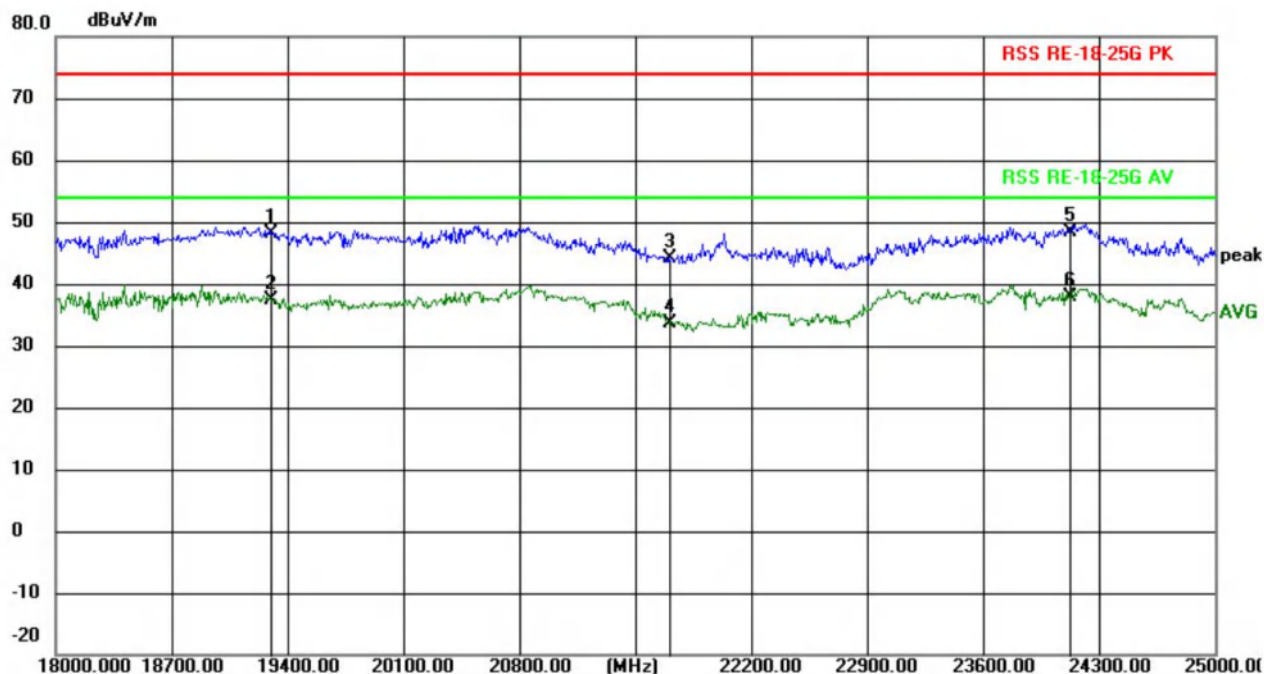


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19296.000	74.96	-26.90	48.06	74.00	-25.94	peak
2	19296.000	64.20	-26.90	37.30	54.00	-16.70	AVG
3	21708.000	71.03	-26.97	44.06	74.00	-29.94	peak
4	21708.000	60.70	-26.97	33.73	54.00	-20.27	AVG
5	24120.000	75.35	-27.06	48.29	74.00	-25.71	peak
6	24120.000	64.86	-27.06	37.80	54.00	-16.20	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b -2437MHz

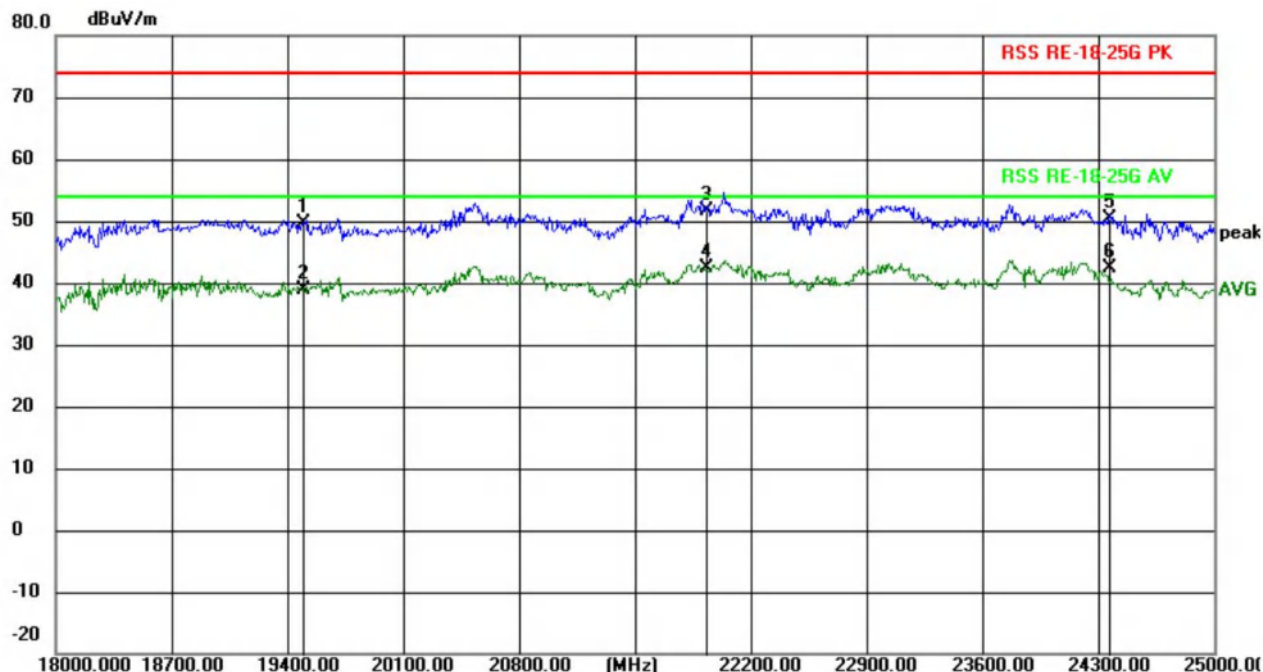


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19496.000	76.55	-26.90	49.65	74.00	-24.35	peak
2	19496.000	65.81	-26.90	38.91	54.00	-15.09	AVG
3	21933.000	78.61	-26.98	51.63	74.00	-22.37	peak
4	21933.000	69.35	-26.98	42.37	54.00	-11.63	AVG
5	24370.000	77.54	-27.07	50.47	74.00	-23.53	peak
6	24370.000	69.33	-27.07	42.26	54.00	-11.74	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b -2437MHz

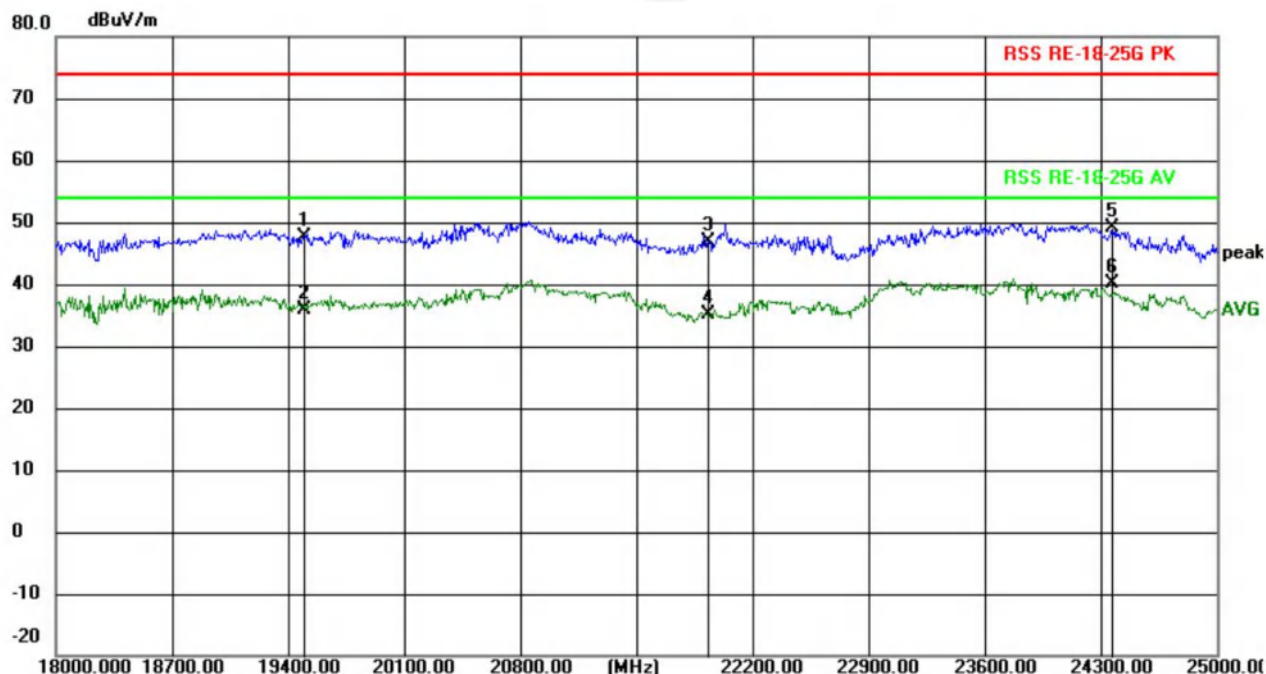


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19496.000	74.41	-26.90	47.51	74.00	-26.49	peak
2	19496.000	62.66	-26.90	35.76	54.00	-18.24	AVG
3	21933.000	73.85	-26.98	46.87	74.00	-27.13	peak
4	21933.000	62.21	-26.98	35.23	54.00	-18.77	AVG
5	24370.000	76.23	-27.07	49.16	74.00	-24.84	peak
6	24370.000	67.29	-27.07	40.22	54.00	-13.78	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b -2462MHz

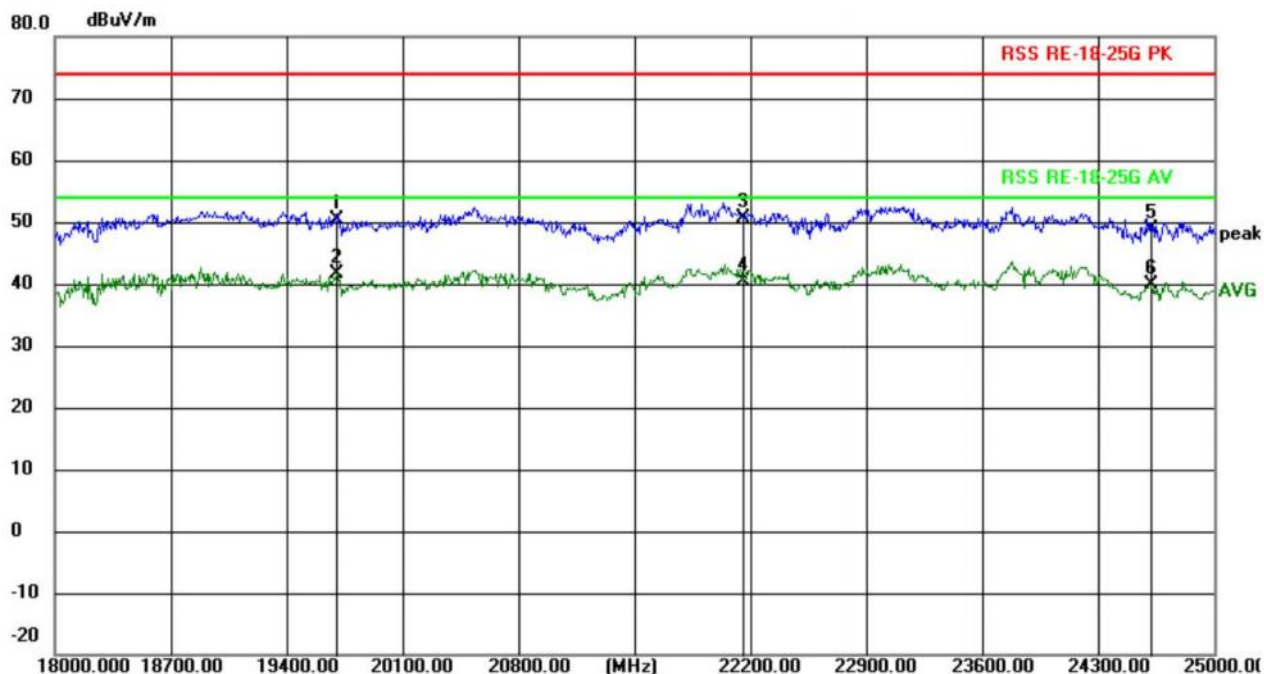


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19696.000	77.39	-26.90	50.49	74.00	-23.51	peak
2	19696.000	68.65	-26.90	41.75	54.00	-12.25	AVG
3	22158.000	77.69	-26.99	50.70	74.00	-23.30	peak
4	22158.000	67.47	-26.99	40.48	54.00	-13.52	AVG
5	24620.000	75.99	-27.08	48.91	74.00	-25.09	peak
6	24620.000	66.91	-27.08	39.83	54.00	-14.17	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b -2462MHz

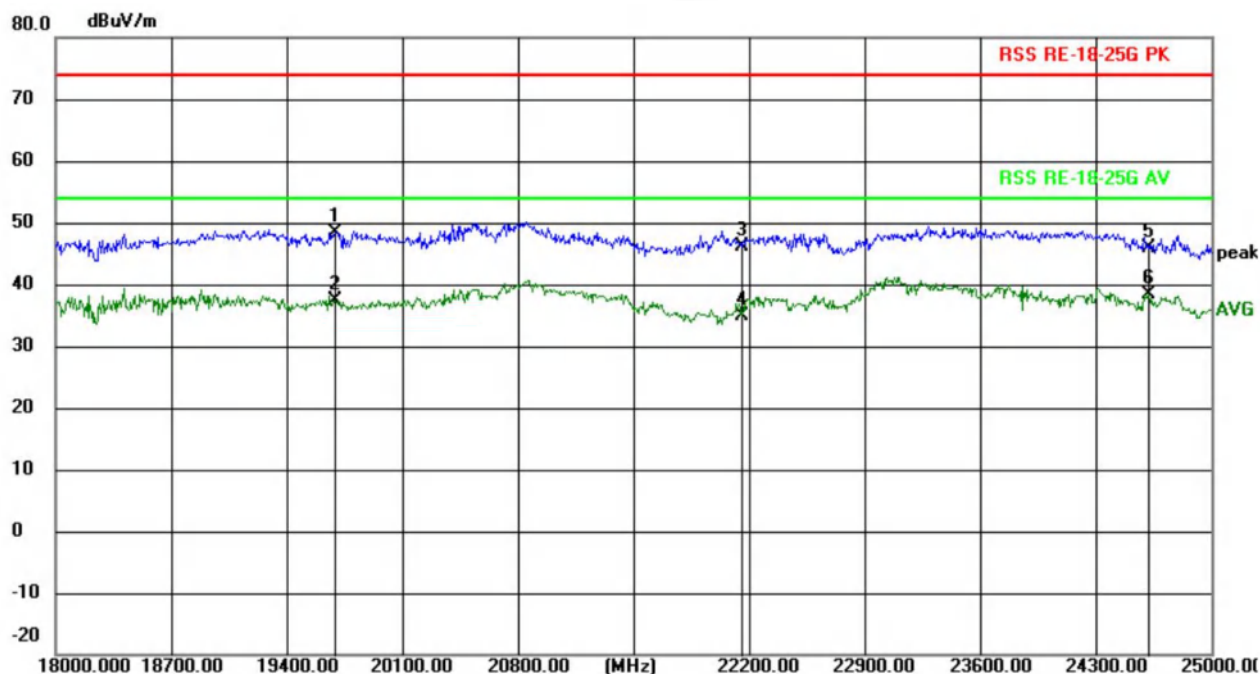

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19694.000	75.39	-26.90	48.49	74.00	-25.51	peak
2	19694.000	64.18	-26.90	37.28	54.00	-16.72	AVG
3	22158.000	73.19	-26.99	46.20	74.00	-27.80	peak
4	22158.000	61.97	-26.99	34.98	54.00	-19.02	AVG
5	24620.000	72.99	-27.08	45.91	74.00	-28.09	peak
6	24620.000	65.41	-27.08	38.33	54.00	-15.67	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. During the testing process, a band-stop filter was added, so there is no dominant frequency in the test data.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT

Test Requirement:	FCC Part15 C Section 15.209 and 15.205 RSS-Gen.8.9&RSS-Gen.8.10				
Test Method:	ANSI C63.10-2020+Cor 1-2023 + C63.10a-2024+ Errata to C63.10a-2024				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2390MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD NO DEVIATION



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

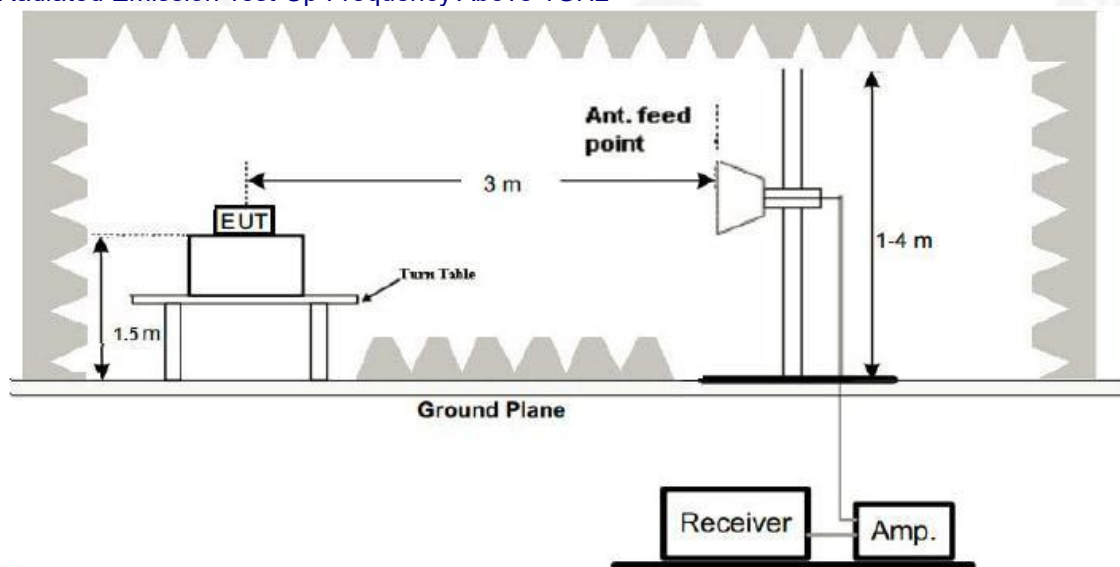


5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 3.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2412MHz

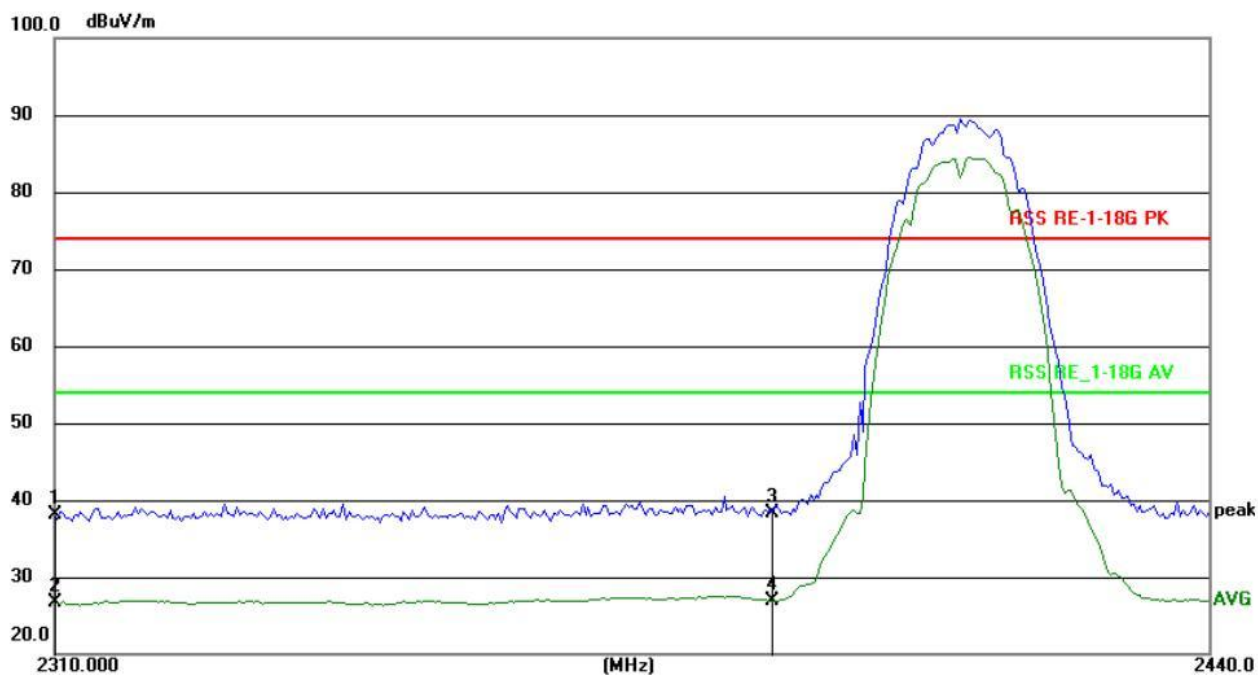


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	45.19	-7.13	38.06	74.00	-35.94	peak
2	2310.000	33.78	-7.13	26.65	54.00	-27.35	AVG
3	2390.000	45.31	-7.11	38.20	74.00	-35.80	peak
4	2390.000	34.02	-7.11	26.91	54.00	-27.09	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2412MHz

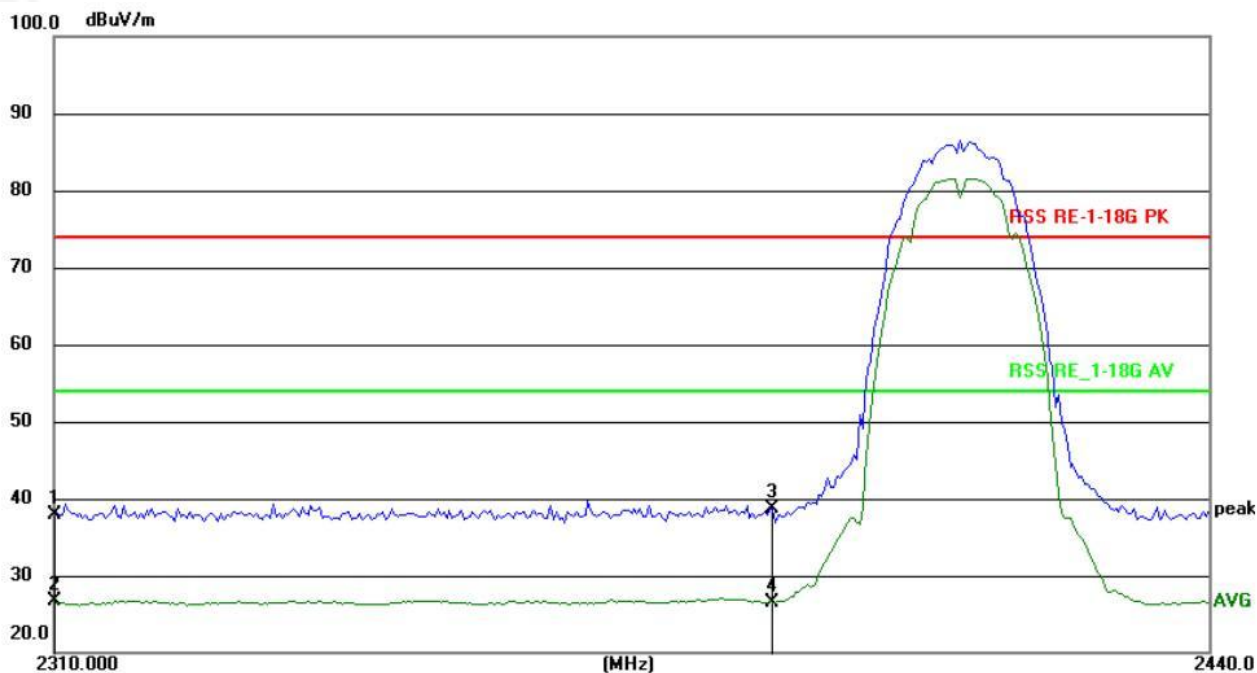


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	45.08	-7.13	37.95	74.00	-36.05	peak
2	2310.000	33.76	-7.13	26.63	54.00	-27.37	AVG
3	2390.000	45.88	-7.11	38.77	74.00	-35.23	peak
4	2390.000	33.64	-7.11	26.53	54.00	-27.47	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2462MHz

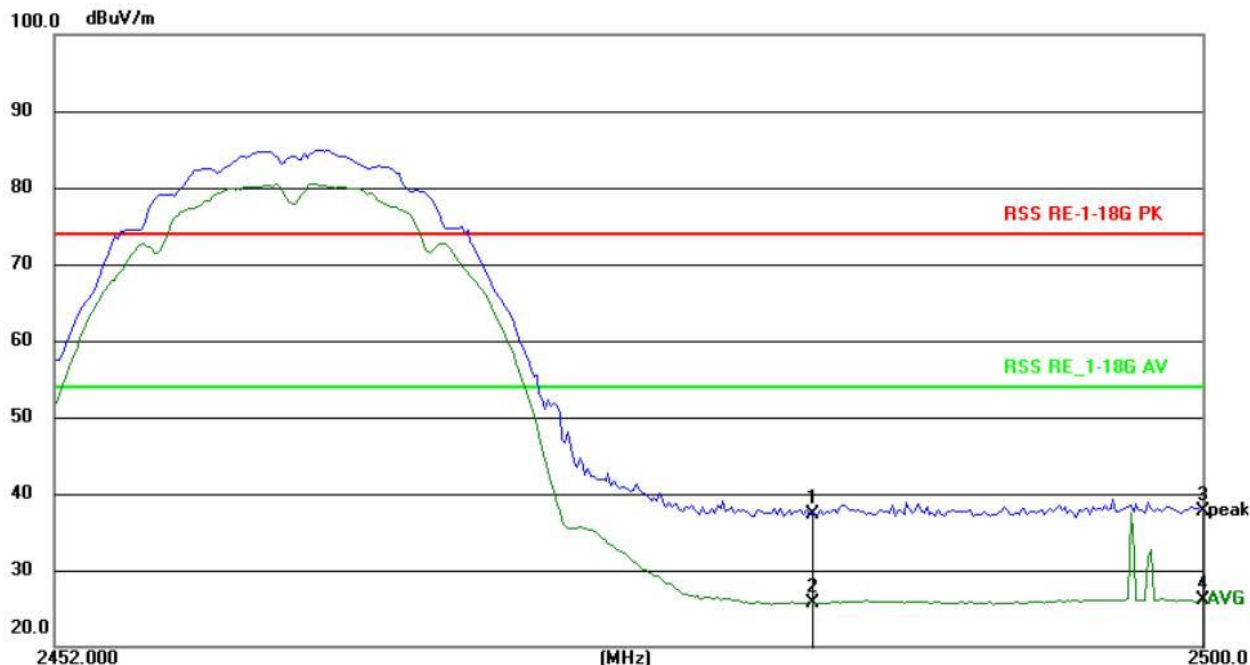


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	44.35	-7.10	37.25	74.00	-36.75	peak
2	2483.500	32.86	-7.10	25.76	54.00	-28.24	AVG
3	2500.000	44.73	-7.09	37.64	74.00	-36.36	peak
4	2500.000	33.14	-7.09	26.05	54.00	-27.95	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11b-2462MHz

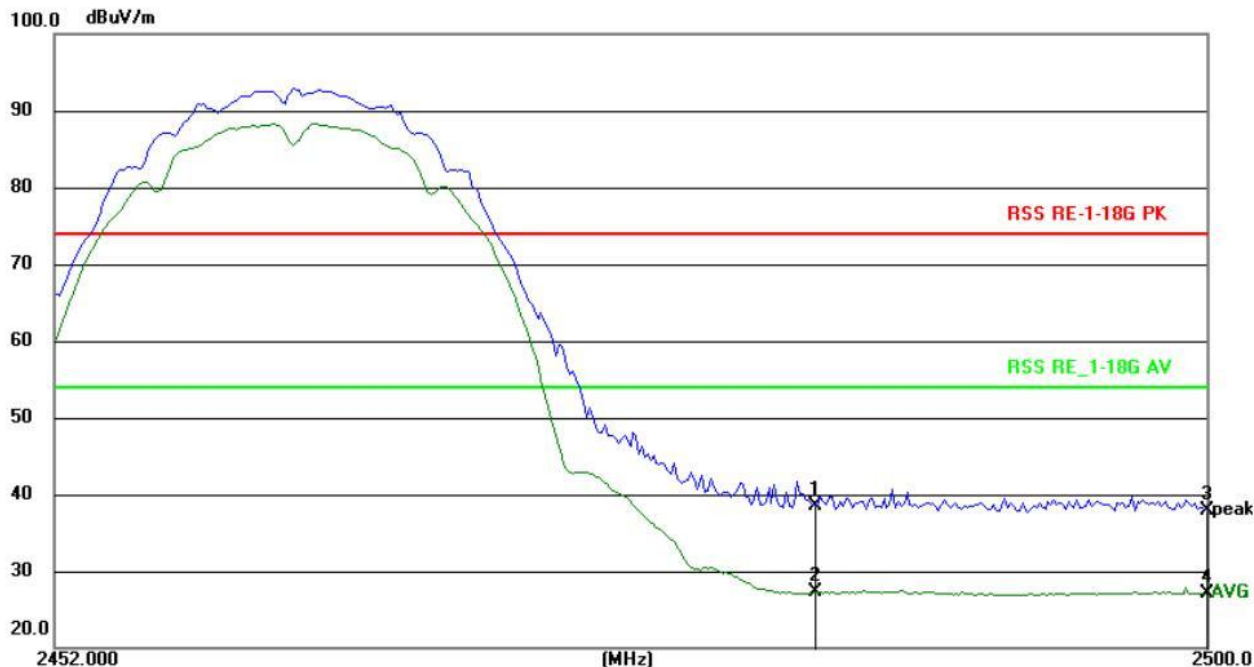


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	45.64	-7.10	38.54	74.00	-35.46	peak
2	2483.500	34.38	-7.10	27.28	54.00	-26.72	AVG
3	2500.000	45.04	-7.09	37.95	74.00	-36.05	peak
4	2500.000	34.18	-7.09	27.09	54.00	-26.91	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2412MHz

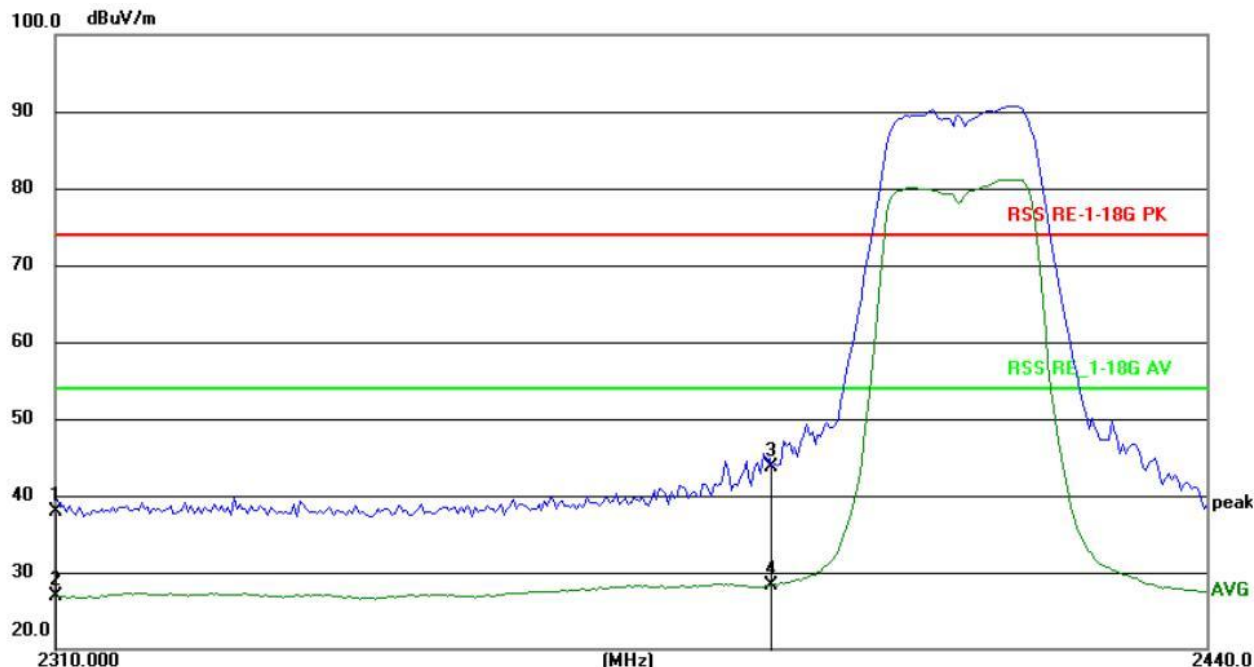


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	45.07	-7.13	37.94	74.00	-36.06	peak
2	2310.000	33.99	-7.13	26.86	54.00	-27.14	AVG
3	2390.000	50.88	-7.11	43.77	74.00	-30.23	peak
4	2390.000	35.39	-7.11	28.28	54.00	-25.72	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2412MHz

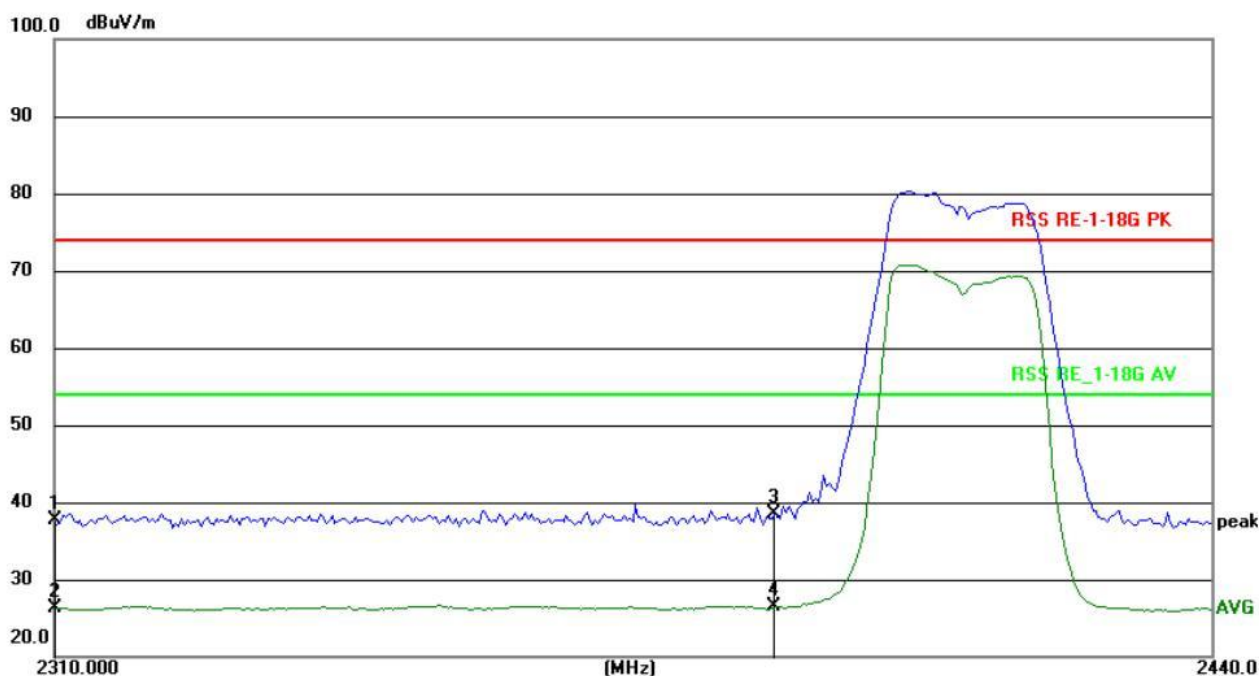


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	44.82	-7.13	37.69	74.00	-36.31	peak
2	2310.000	33.48	-7.13	26.35	54.00	-27.65	AVG
3	2390.000	45.67	-7.11	38.56	74.00	-35.44	peak
4	2390.000	33.52	-7.11	26.41	54.00	-27.59	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2462MHz

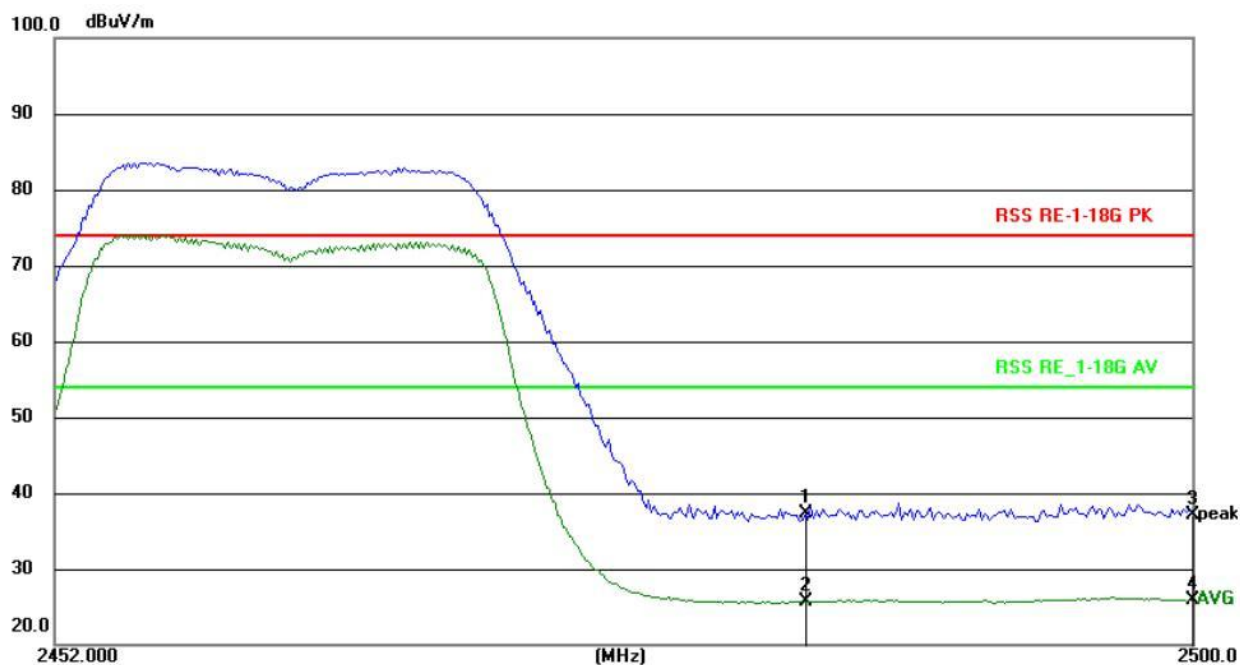


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	44.45	-7.10	37.35	74.00	-36.65	peak
2	2483.575	32.78	-7.10	25.68	54.00	-28.32	AVG
3	2500.000	44.14	-7.09	37.05	74.00	-36.95	peak
4	2500.000	32.97	-7.09	25.88	54.00	-28.12	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11g-2462MHz

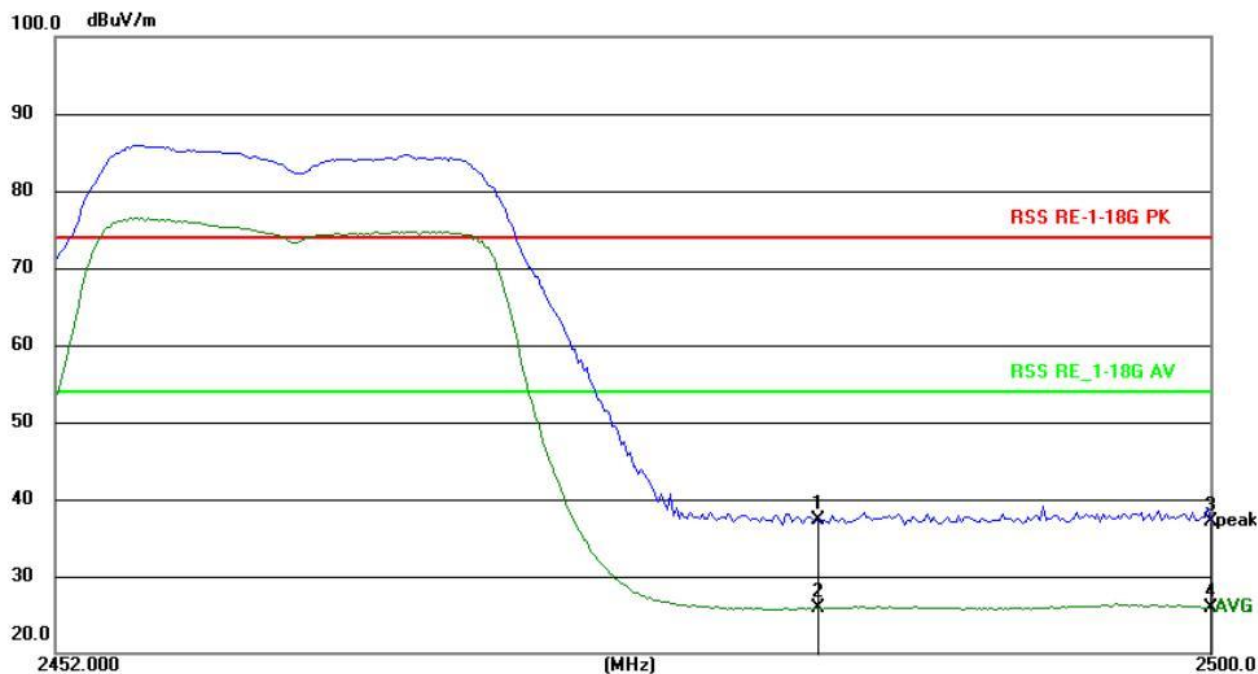


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	44.41	-7.10	37.31	74.00	-36.69	peak
2	2483.500	33.03	-7.10	25.93	54.00	-28.07	AVG
3	2500.000	44.10	-7.09	37.01	74.00	-36.99	peak
4	2500.000	32.99	-7.09	25.90	54.00	-28.10	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	8802.11n(HT20)-2412MHz

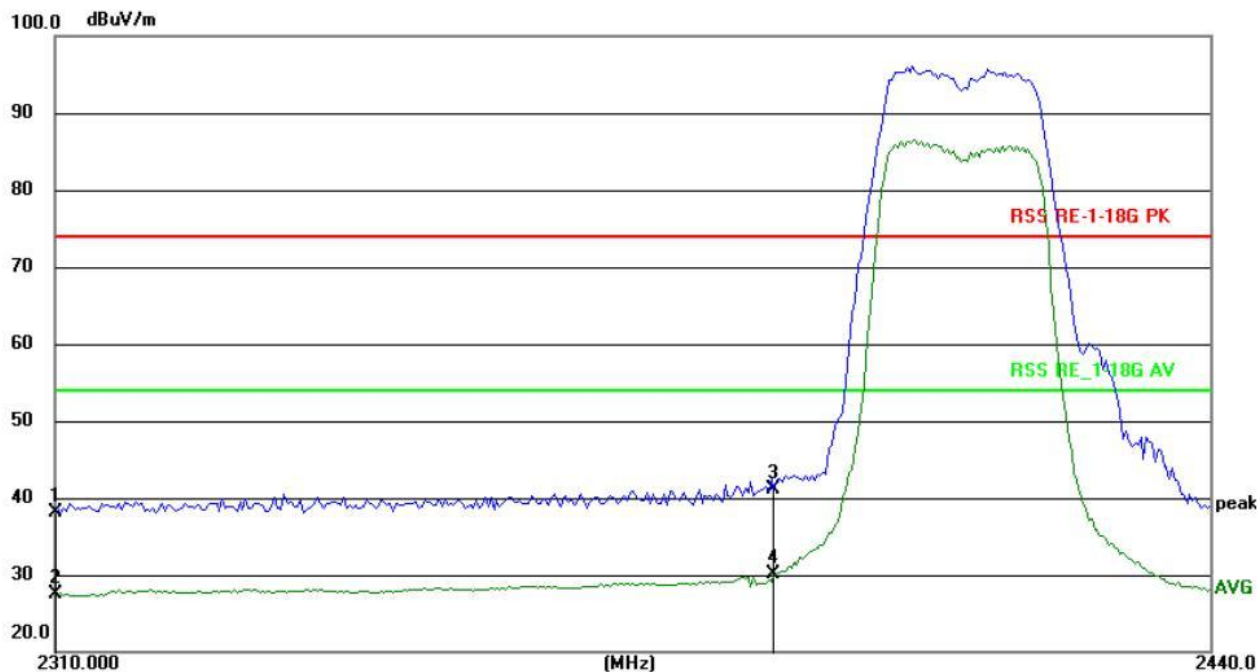


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	45.22	-7.13	38.09	74.00	-35.91	peak
2	2310.000	34.59	-7.13	27.46	54.00	-26.54	AVG
3	2390.000	48.28	-7.11	41.17	74.00	-32.83	peak
4	2390.000	37.17	-7.11	30.06	54.00	-23.94	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT20)-2412MHz

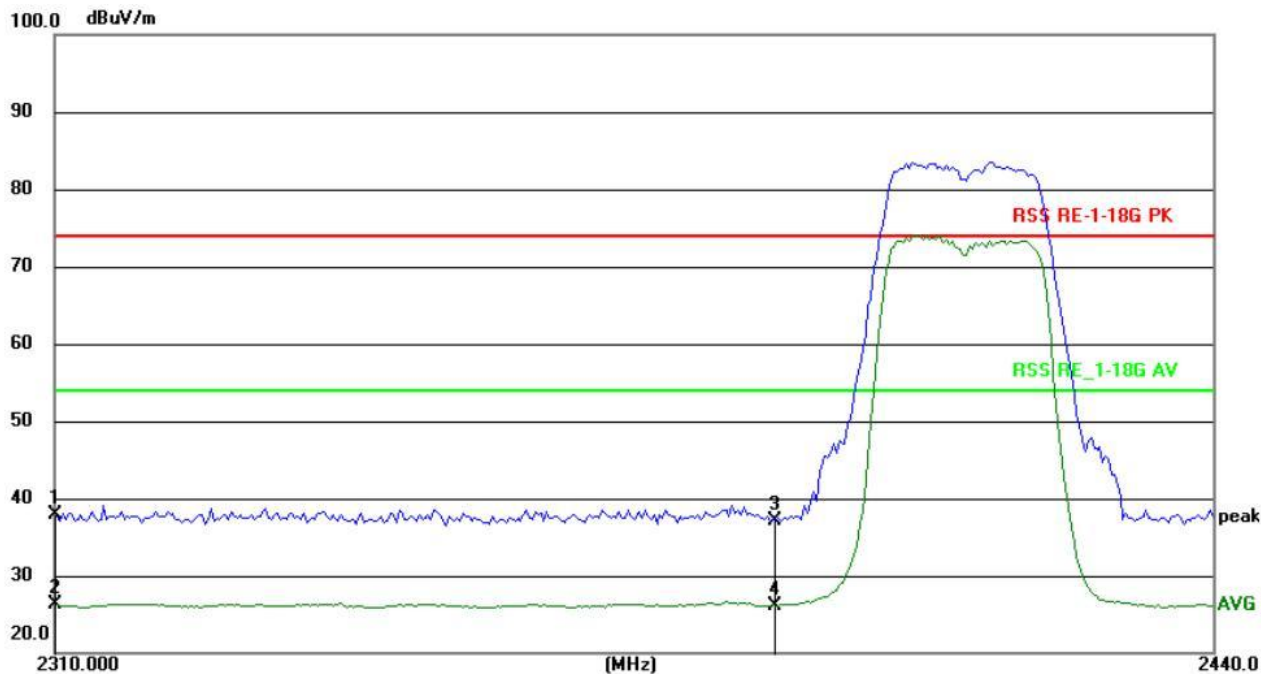


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	45.11	-7.13	37.98	74.00	-36.02	peak
2	2310.000	33.39	-7.13	26.26	54.00	-27.74	AVG
3	2390.000	44.18	-7.11	37.07	74.00	-36.93	peak
4	2390.000	33.26	-7.11	26.15	54.00	-27.85	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT20)-2462MHz

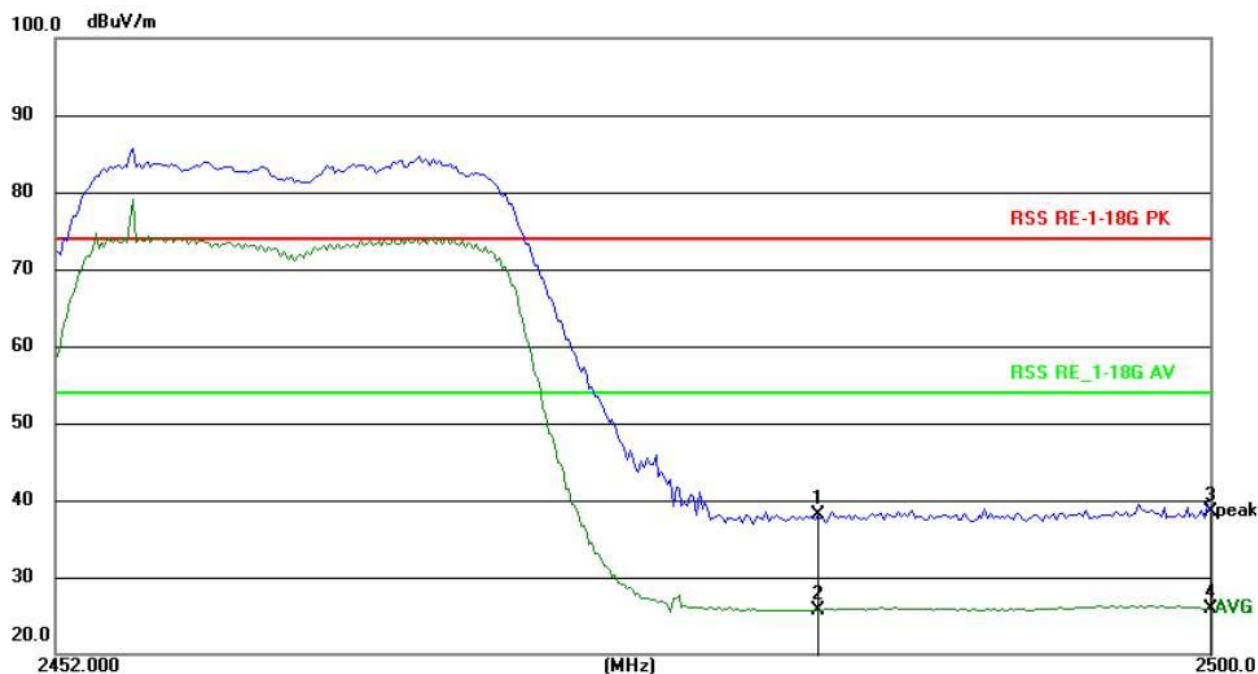


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	45.12	-7.10	38.02	74.00	-35.98	peak
2	2483.500	32.89	-7.10	25.79	54.00	-28.21	AVG
3	2500.000	45.53	-7.09	38.44	74.00	-35.56	peak
4	2500.000	33.05	-7.09	25.96	54.00	-28.04	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT20)-2462MHz

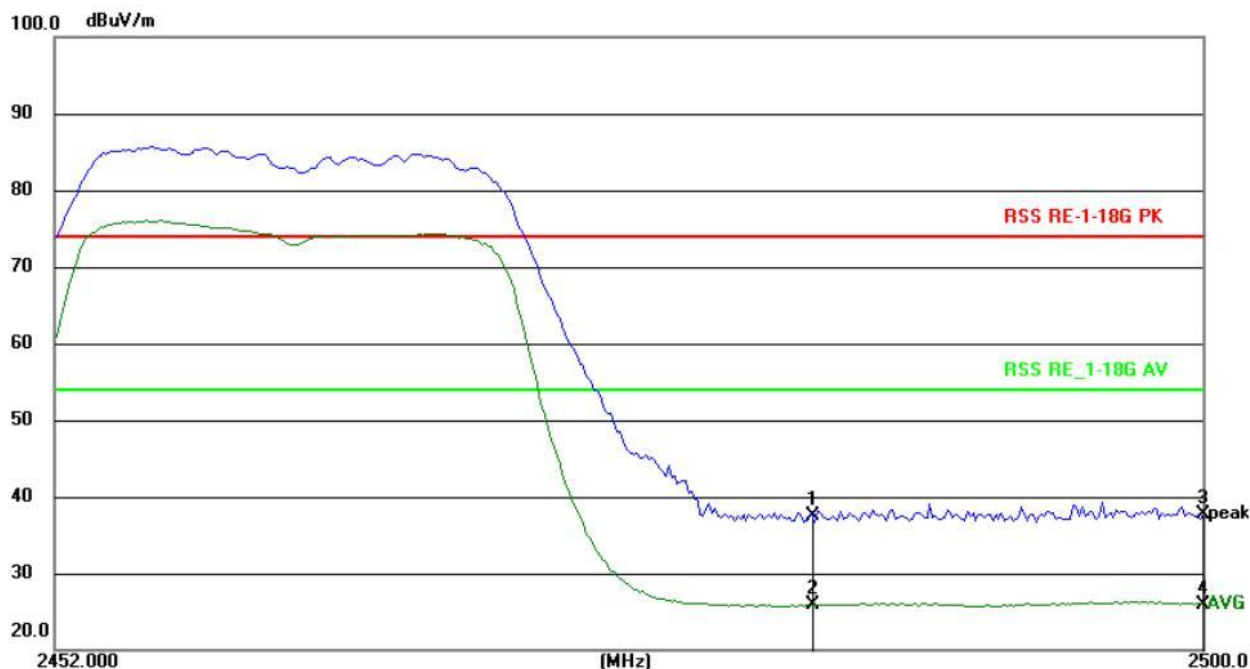


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	44.57	-7.10	37.47	74.00	-36.53	peak
2	2483.500	32.94	-7.10	25.84	54.00	-28.16	AVG
3	2500.000	44.80	-7.09	37.71	74.00	-36.29	peak
4	2500.000	33.03	-7.09	25.94	54.00	-28.06	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	8802.11n(HT40)-2422MHz

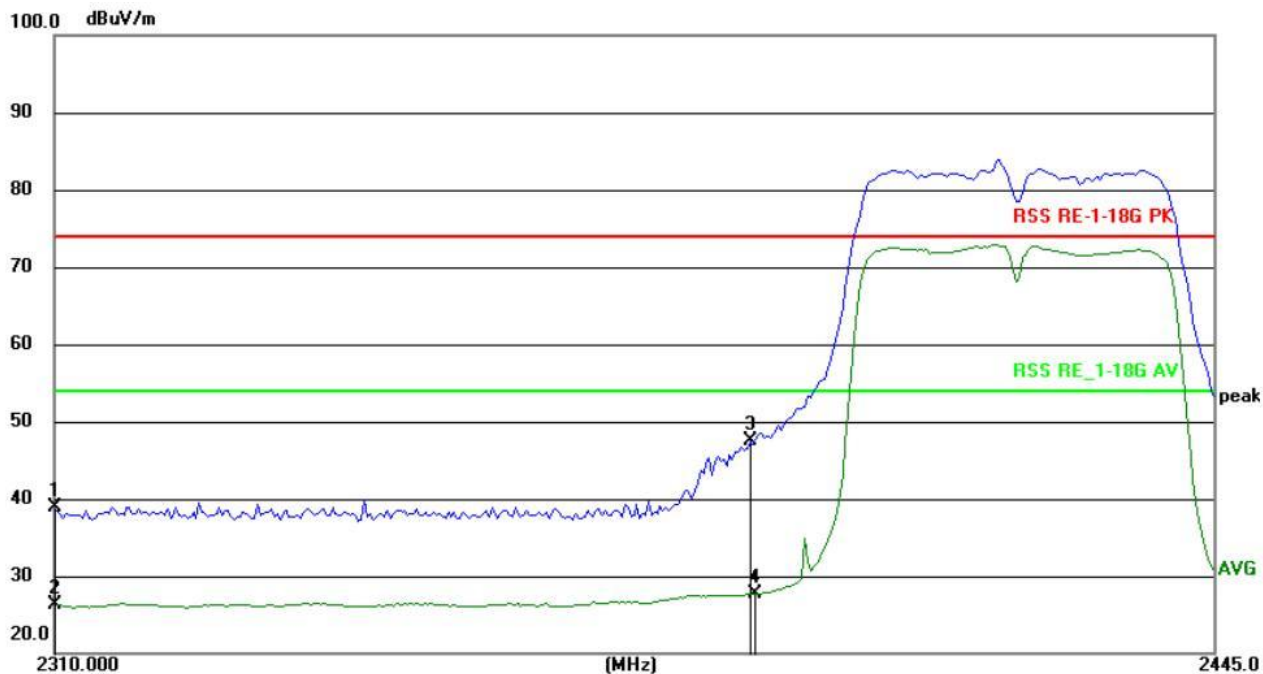


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	46.10	-7.13	38.97	74.00	-35.03	peak
2	2310.000	33.39	-7.13	26.26	54.00	-27.74	AVG
3	2390.000	54.64	-7.11	47.53	74.00	-26.47	peak
4	2390.418	34.79	-7.11	27.68	54.00	-26.32	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT40)-2422MHz

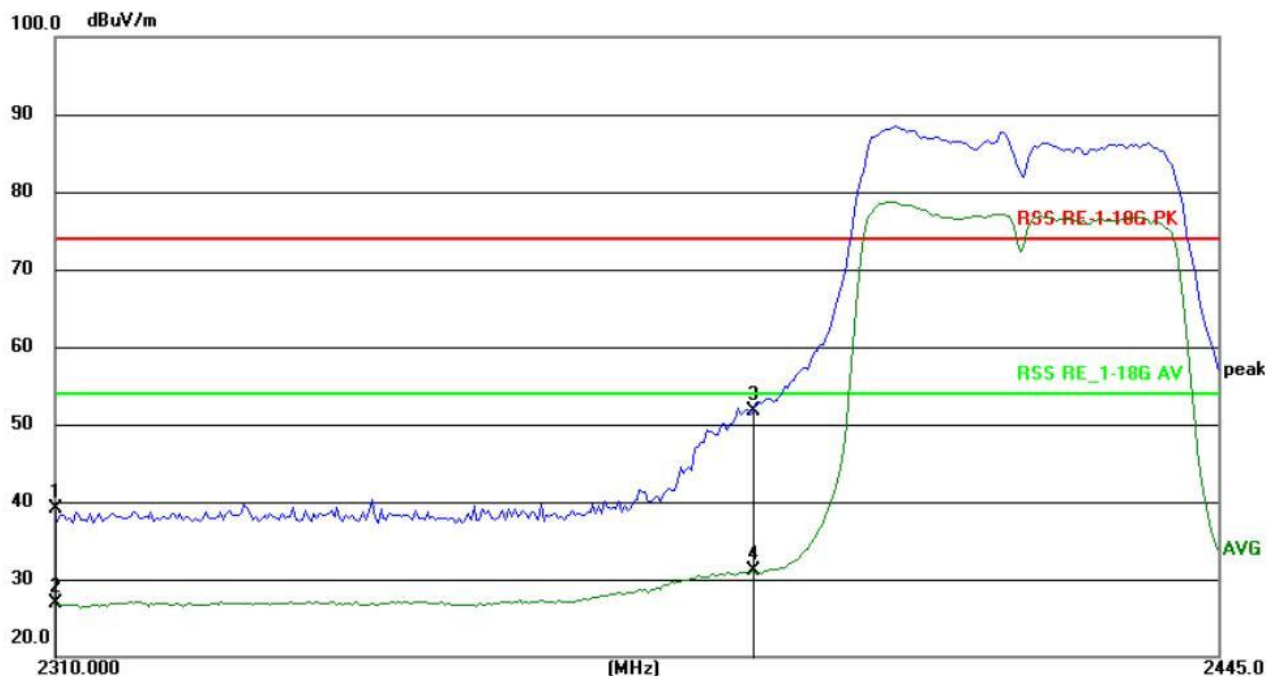


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	46.24	-7.13	39.11	74.00	-34.89	peak
2	2310.000	34.02	-7.13	26.89	54.00	-27.11	AVG
3	2390.000	58.78	-7.11	51.67	74.00	-22.33	peak
4	2390.000	38.16	-7.11	31.05	54.00	-22.95	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT40)-2452MHz

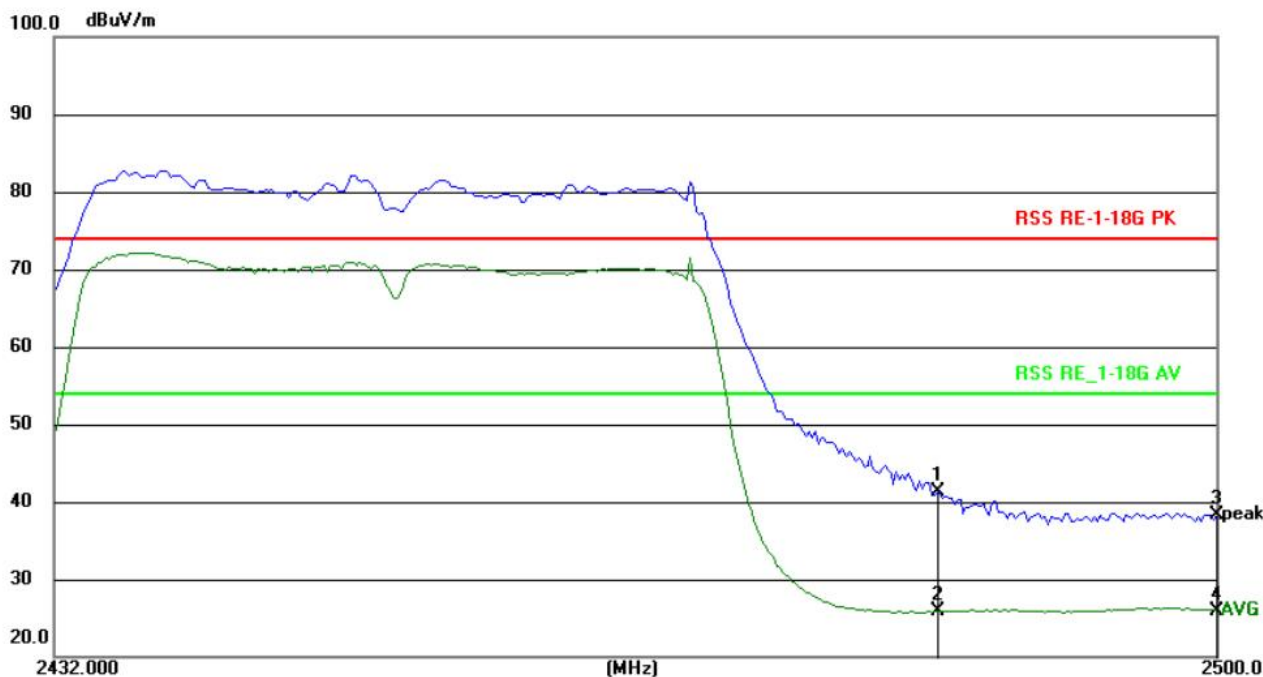


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	48.37	-7.10	41.27	74.00	-32.73	peak
2	2483.500	33.00	-7.10	25.90	54.00	-28.10	AVG
3	2500.000	45.43	-7.09	38.34	74.00	-35.66	peak
4	2500.000	33.04	-7.09	25.95	54.00	-28.05	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V from battery	Test Mode :	802.11n(HT40)-2452MHz

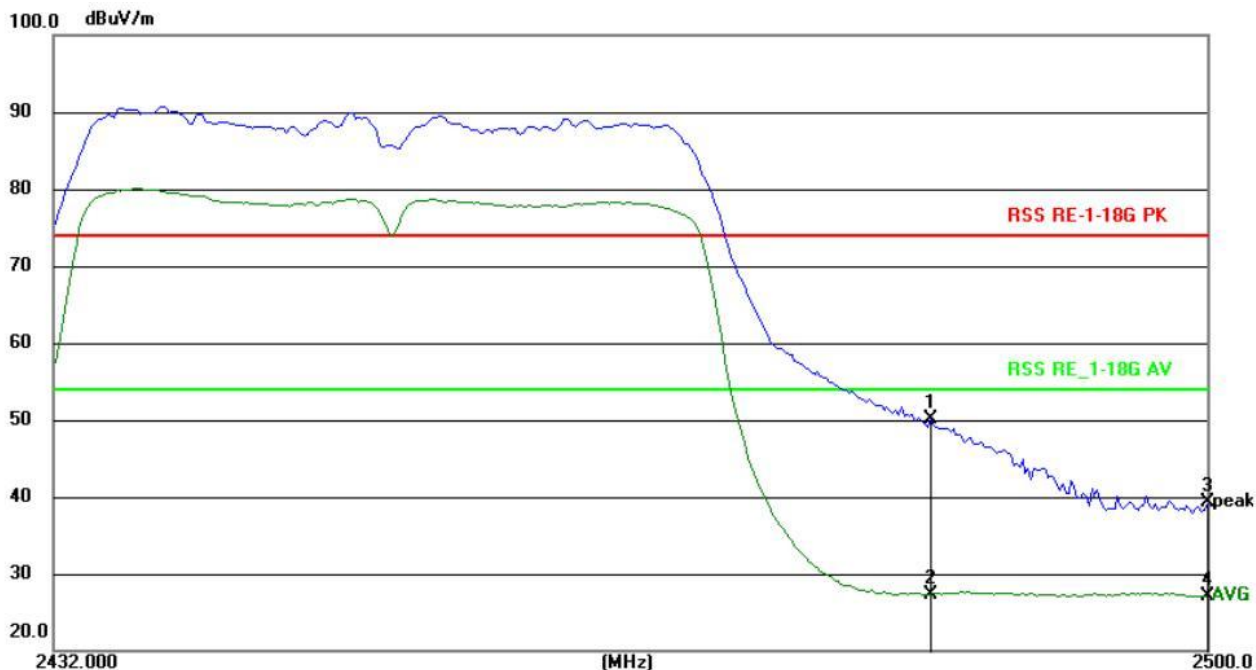

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	57.15	-7.10	50.05	74.00	-23.95	peak
2	2483.500	34.41	-7.10	27.31	54.00	-26.69	AVG
3	2500.000	46.41	-7.09	39.32	74.00	-34.68	peak
4	2500.000	34.23	-7.09	27.14	54.00	-26.86	AVG

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC part 15.247 RSS-247 Section 6.3.1
Test Method:	ANSIC63.10-2020+Cor 1-2023 + C63.10a-2024+ Errata to C63.10a-2024

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C RSS-247 Section 6.3.1				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 6.2 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULT

Measurement Data : The detailed test data see Appendix II



7. 6 DB BANDWIDTH & 99% OCCUPIED BANDWIDTH

Test Requirement:	FCC part 15.247 RSS-247 Section 6.3.1 RSS-Gen Section 6.7
Test Method:	ANSIC63.10-2020+Cor 1-2023 + C63.10a-2024+ Errata to C63.10a-2024

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C RSS-247 Section 6.3.1				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB Occupied Bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

99% BANDWIDTH

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6 dB bandwidth

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the video bandwidth (VBW) $\geq 3\text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by -6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.



7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 7.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

Measurement Data : The detailed test data see Appendix II



8.AVERAGE OUTPUT POWER TEST

Test Requirement:	FCC part 15.247 RSS-247 Section 6.3.2
Test Method:	ANSIC63.10-2020+Cor 1-2023 + C63.10a-2024+ Errata to C63.10a-2024

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C RSS-247 Section 6.3.2				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS
RSS-247 Section 6.3.2	EIRP Output Power	1 watt or 30dBm	2400-2483.5	PASS
		4 watt or 36dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 8.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Measurement Data : The detailed test data see Appendix II



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC part 15.247 (b)(3) RSS-247 Section 6.3.2
Test Method:	ANSIC63.10-2020+Cor 1-2023 + C63.10a-2024+ Errata to C63.10a-2024

9.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) & RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 9.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Note: The conducted spurious emissions test has compensated for the maximum line loss measurement, and the recorded data represents the worst-case scenario.

Measurement Data : The detailed test data see Appendix II



11. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c) RSS-Gen Section 6.8
RSS-Gen 6.8 requirement: For intentional device, according to & RSS-Gen 6.8 requirement: For intentional device, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2402-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Cable line antenna, the best case gain of the antennas is 1.4 dBi, reference to the appendix II for details	



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****