


USE AND CARE GUIDE

600 LUMEN SOLAR MOTION ACTIVATED LINKABLE WALL LIGHT

Model No.: RMWL00602H-06

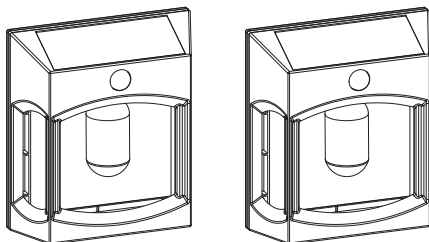

Please read the following precautions carefully before use to ensure the correct and safe operation of this product.

PACKAGE CONTENTS



A-Wall Lights X 2



B-Wall Anchors X 4



C-Screws X 4

TOOLS REQUIRED (NOT INCLUDED)



Phillips Screwdriver



Electric Drill

INSTALLATION




Figure 1




Figure 2

1. Mark & Drill Holes:

On the wall, mark two points along a horizontal line, matching the hanging hole spacing of the light. Drill holes at the marked positions.

2. Insert Wall Anchors & Insert Screws:

Insert wall anchors (B) into the drilled holes. Insert screws (C) but do not fully tighten—leave a 0.1-inch (≈ 2.5 mm) gap between the screw head and the wall (see Figure 1).

3. Power ON the Light:

Press the switch to the "ON" position.

4. Attach the Light:

Align the two mounting holes on the light with the two screws (C). Gently hang the light onto the screws (see Figure 2).

OPERATION

1. How to charge the light

- **Direct Sunlight Exposure:** Install the light on a wall that receives at least 8 hours of direct sunlight daily for optimal battery charging.
- **Avoid Shaded Areas:** Do not place the light under trees, bushes, or other obstructions that cast shadows, as this will reduce charging efficiency.
- **Keep Away from Other Light Sources:** Avoid installing near streetlights, porch lights, or other artificial light sources, as they may interfere with the solar panel's operation.

2. How to position the motion sensor

- **Avoid Frequent Movement Areas:** Do not install near pet activity zones, swaying trees, or bushes to prevent false triggers.
- **Optimal Detection Range:** Ensure the sensor has a clear line of sight to the desired detection zone without obstructions.

First-Time Use: For optimal battery performance, it is recommended to charge the light for 8-12 hours before initial use.

Operation Modes:

A. Single Light Mode

Switch to ON for automatic nightly operation (dusk to dawn). 20 lumens in stand-by mode. Boosts to 600 lumens for 20 seconds upon motion detection.

B. Pre-linked Mode

Install both lights within 15 meters (49ft). If one light detects motion and brightens at night, the other will also brighten simultaneously. Both revert to low light together after 20 seconds with no motion detected.

Important Notes:

- 1. Keep Away from High-Power Wireless Devices:** Avoid installing near high-power transmitters (e.g., routers, radio antennas) to prevent signal interference.
- 2. Optimal Mounting Height:** Install the light 1-2 meters (3.3-6.6 ft) above the ground for best motion detection and illumination coverage.
- 3. Pre-linked Mode Requirements: Max Distance Between Lights:** ≤15 meters (49 ft) for reliable synchronization.
- 4. Avoid Obstructions:** Do not place large obstacles (especially metal surfaces like tin roofs) between the two lights, as they may block signals.



BATTERY WARNING

This light contains a battery. Do not expose the battery to fire, extreme heat, or direct sunlight, as it may cause explosion or leakage. Do not short-circuit or disassemble the battery to avoid injury or malfunction. Dispose of the battery properly according to local regulations. Recycle the battery at designated facilities to minimize environmental impact. Failure to follow these instructions may result in injury, property damage, or environmental harm.

LIMITED WARRANTY

DO NOT RETURN THIS PRODUCT TO THE STORE

This product comes with a 12-month warranty starting from the date of purchase. If you have questions or need assistance, please call customer service at 1-888-445-8974 or email us at: Support@solarlights.Westinghouse.com

Warranty Notice: To ensure full warranty coverage, this product must be purchased from an authorized retailer. Purchases made through unauthorized third-party sellers will void all warranty protections. This includes eligibility for product replacements, repairs, or customer support. Please retain your proof of purchase from an authorized source.



and Westinghouse are trademarks of Westinghouse Electric Corporation. Used under license by Rayman Lights Inc. All Rights Reserved.

FCC WARNING

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

NOTES: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Company Name: Rayman Lights Inc.

Company address: 702 Interchange BLVD, Newark DE 19711

Telephone number: 1-888-445-8974