

DFS TEST REPORT FOR CERTIFICATION On Behalf of

TCL OVERSEAS MARKETING LTD

1. 11.1.4 Channel Dolby Atmos Sound Bar with Wireless Subwoofer and Satellite Speakers
2. 7.1.2 Channel Dolby Atmos Sound Bar with Wireless Subwoofer
3. 7.1.2 Channel Dolby Atmos Sound Bar with Built-in Subwoofer

Model Number: 1. Q95K; 2. Q85K; 3. Q75K

Additional Model:

1. Q95K-UK, Q95K Pro, Q90K, Q91K, Q92K, Q93K, Q94K, Q9CK, Q91C, Q9CC, Q95KS, Q9*****, (* can be any numerical number "0~9" or alphabetical number "A~Z" or blank)
2. Q85K-UK, Q85K Pro, Q80K, Q81K, Q82K, Q83K, Q84K, Q8CK, Q81C, Q8CC, Q85KS, Q8*****, (* can be any numerical number "0~9" or alphabetical number "A~Z" or blank)
3. Q75K-UK, Q75K Pro, Q70K, Q71K, Q72K, Q73K, Q74K, Q7CK, Q71C, Q7CC, Q75KS, Q7*****, (* can be any numerical number "0~9" or alphabetical number "A~Z" or blank)



FCC ID: 2BEHEQ95K

Applicant:	TCL OVERSEAS MARKETING LTD
Address:	Unit 1905,19/F, Nan Fung Centre, 264-298 Castle Peak Road,
	Tsuen Wan, New Territories,Hong Kong
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	

Report Number:	ESTE-R2606126
Date of Test:	Apr. 16, 2026 to Jun. 02, 2026
Date of Report:	Jun. 08, 2026

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. The antenna information for EUT	5
1.3. Information of RF Cable	5
2. SUMMARY OF TEST	6
2.1. Summary of test result	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty for EST Technology Co., Ltd.....	8
2.4. Test Equipment List.....	8
3. DYNAMIC FREQUENCY SELECTION REQUIREMENTS.....	9
3.1. DFS Overview	9
3.2. DFS Detection Thresholds	10
3.3. Response Requirements	10
3.4. Radar Test Waveforms.....	11
3.4.1. Short Pulse Radar Test Waveforms	11
3.4.2. Long Pulse Radar Test Waveform	13
3.4.3. Frequency Hopping Radar Test Waveform	14
3.5. Setup Configuration of EUT and TS8997&1120 System.....	15
3.6. Radar Waveform Calibration.....	15
3.7. Detection Thresholds	16
3.8. Channel Loading.....	21
3.9. Channel Availability Check Time	22
3.10. Channel Move Time	24
3.11. Channel Closing Transmission Time	25
3.12. Non-Occupancy Period Test Result	26
3.13. U-NII Detection Bandwidth	27
3.14. Statistical Performance check	28
4. TEST SETUP PHOTO.....	67

Applicant:	TCL OVERSEAS MARKETING LTD		
Address:	Unit 1905,19/F, Nan Fung Centre, 264-298 Castle Peak Road, Tsuen Wan, New Territories,Hong Kong		
Manufacturer:	TCL OVERSEAS MARKETING LTD		
Address:	Unit 1905,19/F, Nan Fung Centre, 264-298 Castle Peak Road, Tsuen Wan, New Territories,Hong Kong		
E.U.T:	1. 11.1.4 Channel Dolby Atmos Sound Bar with Wireless Subwoofer and Satellite Speakers 2. 7.1.2 Channel Dolby Atmos Sound Bar with Wireless Subwoofer 3. 7.1.2 Channel Dolby Atmos Sound Bar with Built-in Subwoofer		
Model Number:	1. Q95K; 2. Q85K; 3. Q75K		
Additional Model:	1. Q95K-UK, Q95K Pro, Q90K, Q91K, Q92K, Q93K, Q94K, Q9CK, Q91C, Q9CC, Q95KS, Q9***** (* can be any numerica number "0~9" or alphebtical number "A~Z" or blank) 2. Q85K-UK, Q85K Pro, Q80K, Q81K, Q82K, Q83K, Q84K, Q8CK, Q81C, Q8CC, Q85KS, Q8***** (* can be any numerica number "0~9" or alphebtical number "A~Z" or blank) 3. Q75K-UK, Q75K Pro, Q70K, Q71K, Q72K, Q73K, Q74K, Q7CK, Q71C, Q7CC, Q75KS, Q7***** (* can be any numerica number "0~9" or alphebtical number "A~Z" or blank)		
Power Supply:	AC 100-240V ,50/60Hz		
Trade Name:	TCL	Serial No.:	-----
Date of Receipt:	Apr. 16, 2026	Date of Test:	Apr. 16, 2026 to Jun. 02, 2026
Test Specification:	FCC Part 15 Subpart E 15.407 KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the Dynamic Frequency Selection (DFS) tests under FCC Rules and Regulations Part 15 Subpart E requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	Reviewed by:	Date: Jun. 08, 2026	
 Ring Yang / Assistant	 Seven Wang / Engineer	  Iceman Hu / Manager	
Other Aspects: None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.			

1.GENERAL INFORMATION

1.1.Description of Device (EUT)

FCC ID	:	2BEHEQ95K
Product Name	:	11.1.4 Channel Dolby Atmos Soundbar with Wireless Subwoofer and Satellite Speakers
Model Number	:	Q95K
Software Version	:	N/A
Hardware Version	:	N/A
Number of channel	:	U-NII-2A (5250 MHz~5350 MHz): IEEE 802.11a / ax HE20: 4 Channels; U-NII-2C (5470 MHz~5725 MHz): IEEE 802.11a / ax HE20: 12 Channels
Modulation	:	OFDM
Transmit Data Rate	:	IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps; IEEE 802.11ax: up to 57.8Mbps
Channels Spacing	:	IEEE 802.11a: 20MHz; IEEE 802.11ax HE20: 20MHz
TPC Function	:	☒ Without TPC ☐ With TPC
DFS Mode(s)	:	☒ Master ☐ Slave with radar detection ☐ Slave without radar detection
Sample Type	:	Prototype production
Note: The product information is provided by the manufacturer. The laboratory is not responsible for this data.		

1.2.The antenna information for EUT

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	FPC	-	4.42

Note:

- 1.The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.
- 2.The test results of this report only apply to the sample as received.

1.3.Information of RF Cable

Cable Loss(dB)	Provided by
1.0	TCL OVERSEAS MARKETING LTD

Note:

- 1.The customer declared the loss value of the RF Cable. and the test results of this report only apply to the sample as received.
- 2.The laboratory is not responsible for the accuracy of the cable loss.

2.SUMMARY OF TEST

2.1.Summary of test result

Description of Test Item	Test Mode	FCC Standard Section	Results
Channel Availability Check Time	IEEE 802.11ax 5260/5500MHz	15.407(h)	PASS
Channel Move Time		15.407(h)	PASS
Channel Closing Transmission Time		15.407(h)	PASS
Non-Occupancy Period		15.407(h)	PASS
U-NII Detection Bandwidth		15.407(h)	PASS
Statistical Performance check		15.407(h)	PASS

2.2.Test Facilities

EMC Lab : Accredited by CNAS, CHINA
Registration No.: L5288
This Accreditation is valid until: November 12, 2029

Recognized by FCC, USA
Designation Number: CN1215
This Recognition is valid until: January 31, 2028

Accredited by A2LA, USA
Registration No.: 4366.01
This Accreditation is valid until: January 31, 2028

Recognized by Industry Canada
CAB identifier No.: CN0035
This Recognition is valid until: January 31, 2028

Recognized by VCCI, Japan
Registration No.:C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2026
This Recognition is valid until: Apr. 19, 2029

Recognized by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Recognized by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3.Measurement uncertainty for EST Technology Co., Ltd.

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for spurious emissions test (Below 30MHz)	±1.62 dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for spurious emissions test (18GHz to 40GHz)	4.67
Uncertainty for radio frequency	7×10-8
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB
Temperature	±0.6°C
Humidity	±4.0 %
Volatage DC	±1.0%
Volatage (AC, <10KHz)	±1.5%

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.4.Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 8997	Rohde &Schwarz	/	/	/	/	/
Open Switch and Control Unit	Rohde &Schwarz	OSP-B157WB	EST-E036	LISAI	June 11,25	June 10,26
Signal and Spectrum Analyzer	Rohde &Schwarz	FSV	EST-E037	LISAI	June 11,25	June 10,26
Signal Generator	Rohde &Schwarz	SMB100A	EST-E038	LISAI	June 11,25	June 10,26
Vector Signal Generator	Rohde &Schwarz	SMBV100A	EST-E039	LISAI	June 11,25	June 10,26
Test Software	Rohde &Schwarz	WMS32	10.50.40	N/A	N/A	N/A
Notebook	DELL	Laititude E6420	N/A	N/A	N/A	N/A
TS 1120	Tonscend	/	/	/	/	/
Test Software	Tonscend	JS1120-3	3.5.39	/	/	/
RF Control Unit	Tonscend	JS0806-2	EST-E134	LISAI	June 11,25	June 10,26
Signal and Spectrum Analyzer	Keysight	N9010B	EST-E141	LISAI	June 11,25	June 10,26
MXG Vector Signal Generator	Keysight	N5182B	EST-E138	LISAI	June 11,25	June 10,26

3.DYNAMIC FREQUENCY SELECTION REQUIREMENTS

3.1.DFS Overview

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

3.2.DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

3.3.Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic

3.4. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

3.4.1. Short Pulse Radar Test Waveforms

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \left(\frac{1}{360} \right), \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μ sec is selected, the number of pulses would be Roundup $\{ (1/360)(19 \times 10^6 / 3066) \} = \text{Round up } \{17.2\} = 18$.

Table 5a - Pulse Repetition Intervals Values for Test A

Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%) / 4 = 80.2\%$			

3.4.2.Long Pulse Radar Test Waveform

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per <i>Burst</i>	Number of <i>Bursts</i>	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *transmission period* will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst Count*. Each interval is of length $(12,000,000 / \text{Burst Count})$ microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen randomly.

A representative example of a Long Pulse Radar Type waveform:

- 1) The total test waveform length is 12 seconds.
- 2) Eight (8) *Bursts* are randomly generated for the *Burst Count*.
- 3) *Burst* 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts* 2 through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst* 1 is randomly generated (1 to 1,500,000 minus the total *Burst* 1 length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts* 2 through 8

randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

3.4.3.Frequency Hopping Radar Test Waveform


Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

3.5.Setup Configuration of EUT and TS8997&1120 System

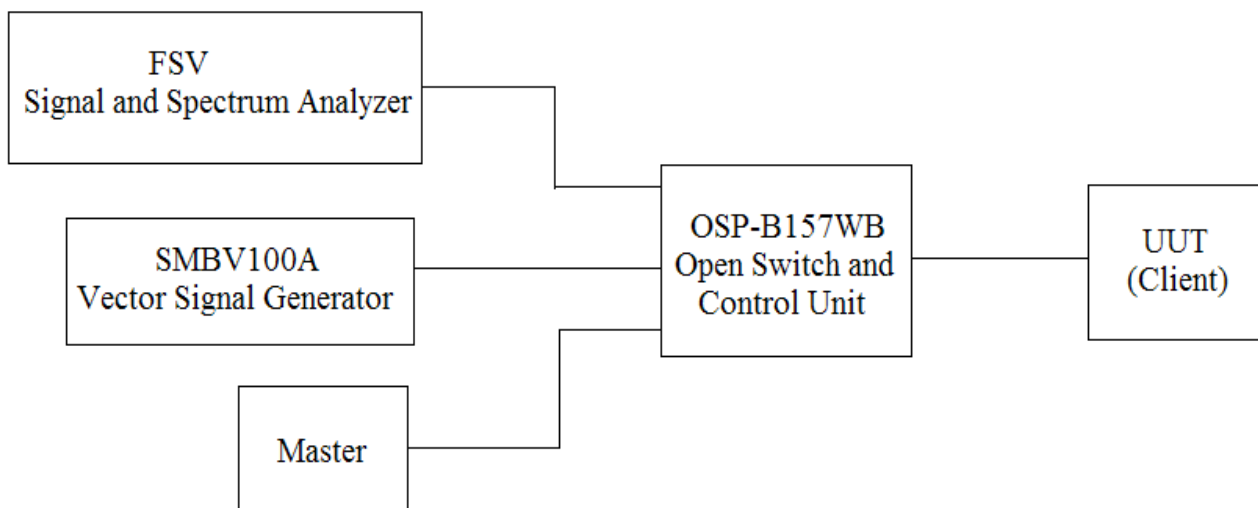

3.6.Radar Waveform Calibration


The conducted radar waveform calibration diagram of TS8997&1120 is shown below.

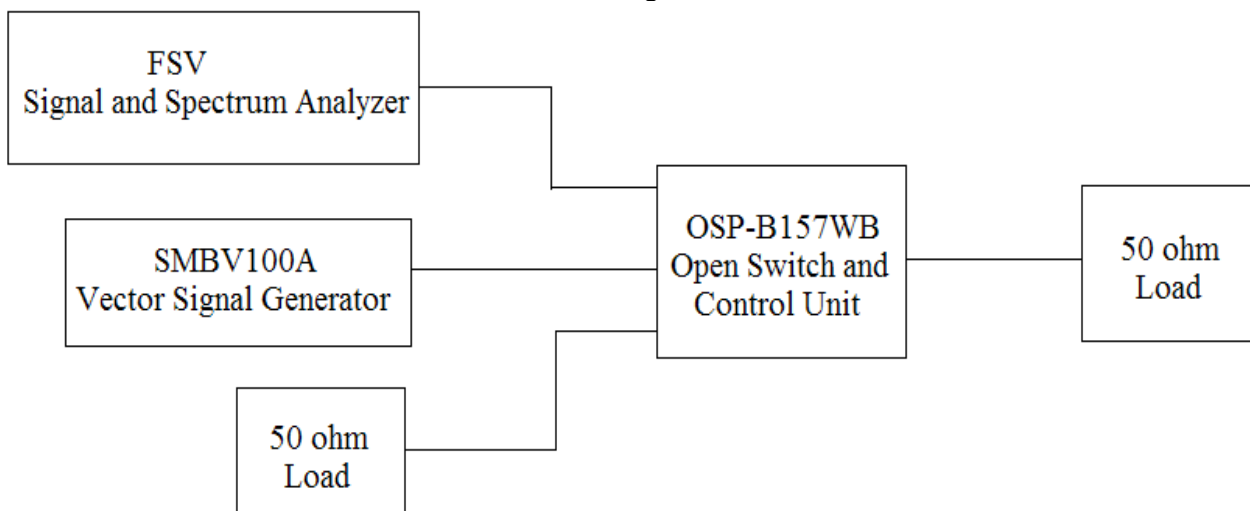


3.7.Detection Thresholds

Test Mode	Frequency[dbm]	Radar Type	Result	Limit[dbm]	Verdict
11AX20	5260	Type0	-62.19	-62.00	PASS
11AX20	5260	Type1	-62.49	-62.00	PASS
11AX20	5260	Type2	-62.18	-62.00	PASS
11AX20	5260	Type3	-62.18	-62.00	PASS
11AX20	5260	Type4	-62.08	-62.00	PASS
11AX20	5260	Type5	-62.08	-62.00	PASS
11AX20	5260	Type6	-62.37	-62.00	PASS
11AX20	5500	Type0	-62.18	-62.00	PASS
11AX20	5500	Type1	-62.43	-62.00	PASS
11AX20	5500	Type2	-62.15	-62.00	PASS
11AX20	5500	Type3	-62.07	-62.00	PASS
11AX20	5500	Type4	-62.04	-62.00	PASS
11AX20	5500	Type5	-62.40	-62.00	PASS
11AX20	5500	Type6	-62.20	-62.00	PASS


11AX20-5260-Type0-PASS

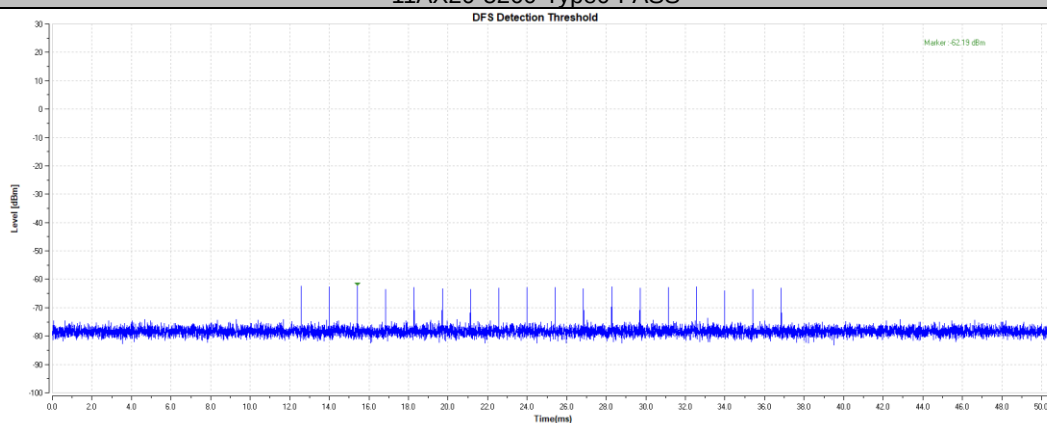


11AX20-5260-Type1-PASS

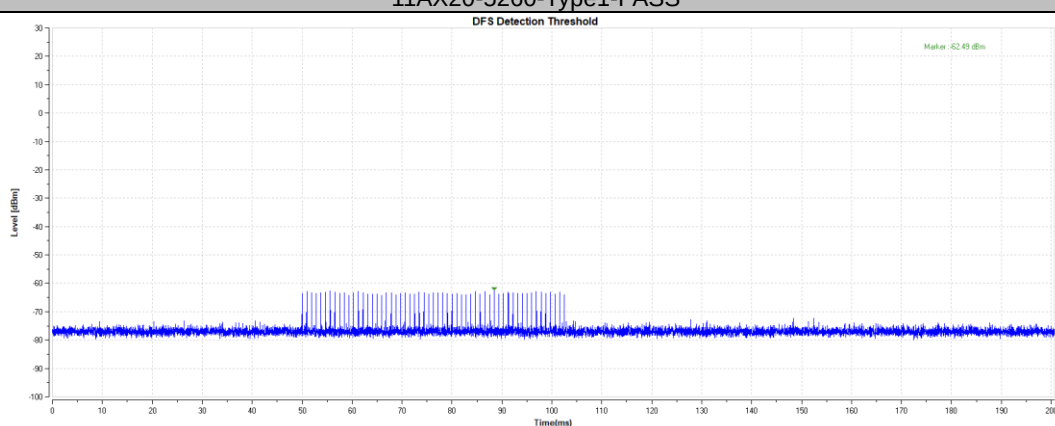


11AX20-5260-Type2-PASS

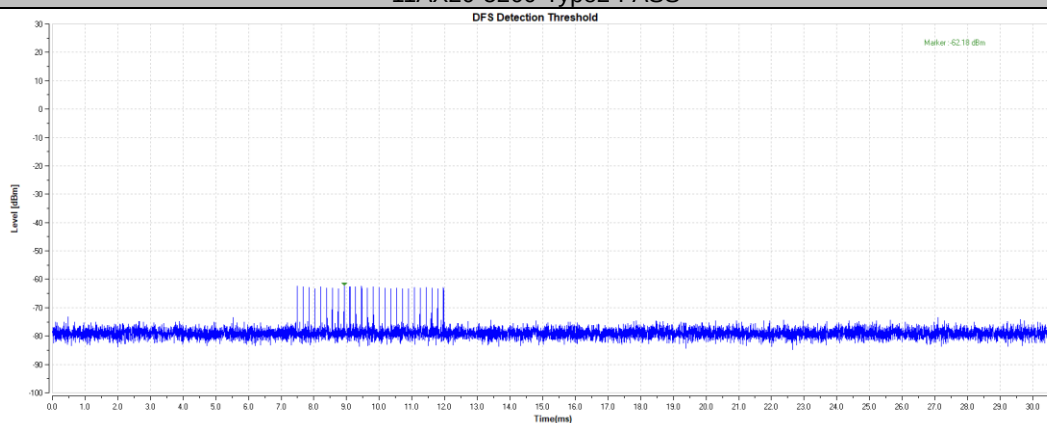


11AX20-5260-Type3-PASS

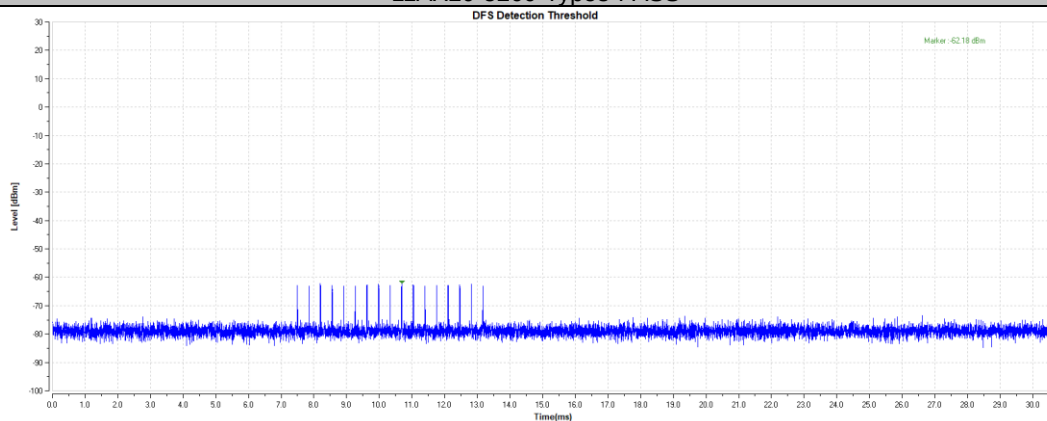


11AX20-5260-Type4-PASS

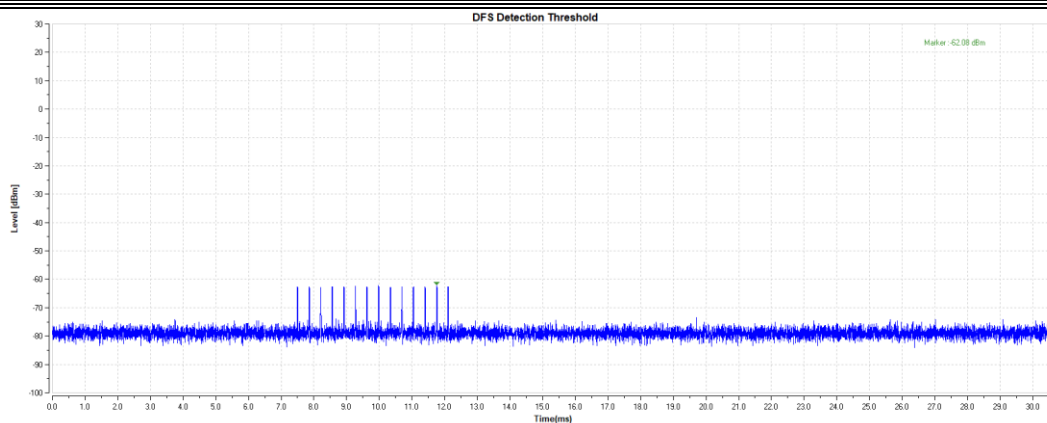


11AX20-5260-Type5-PASS

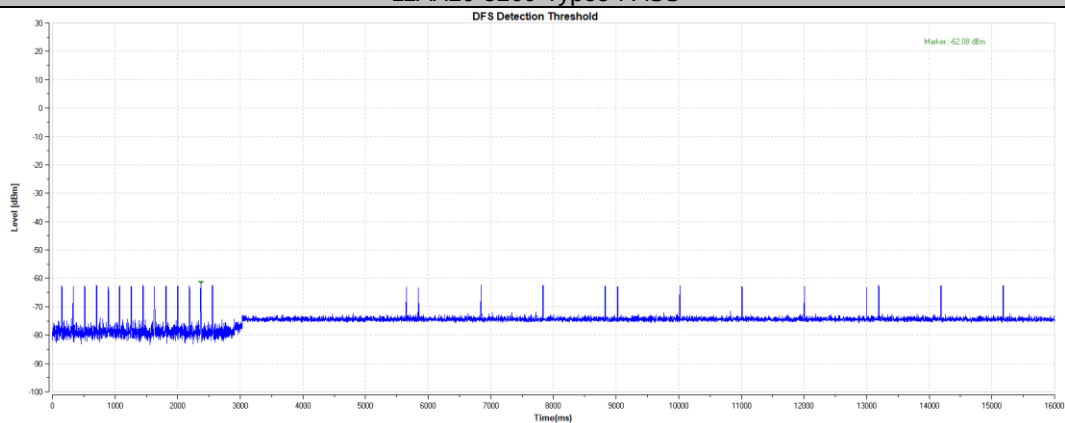


11AX20-5260-Type6-PASS

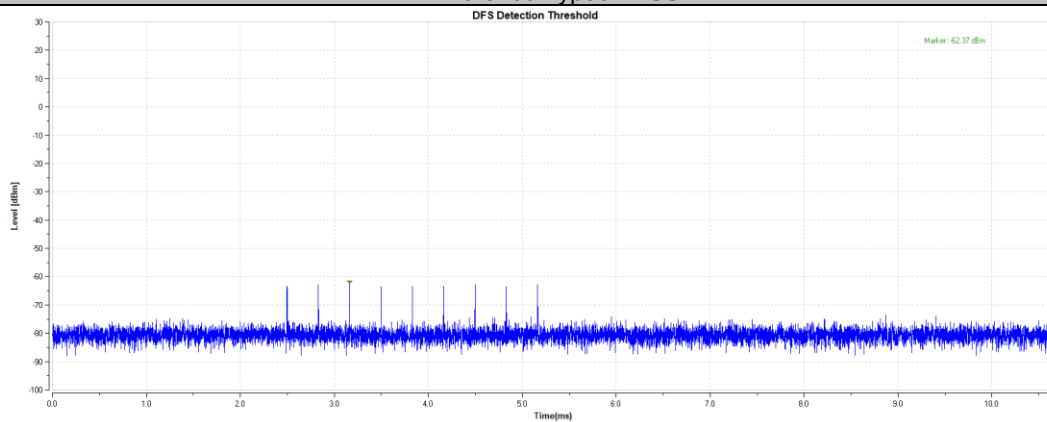


11AX20-5500-Type0-PASS

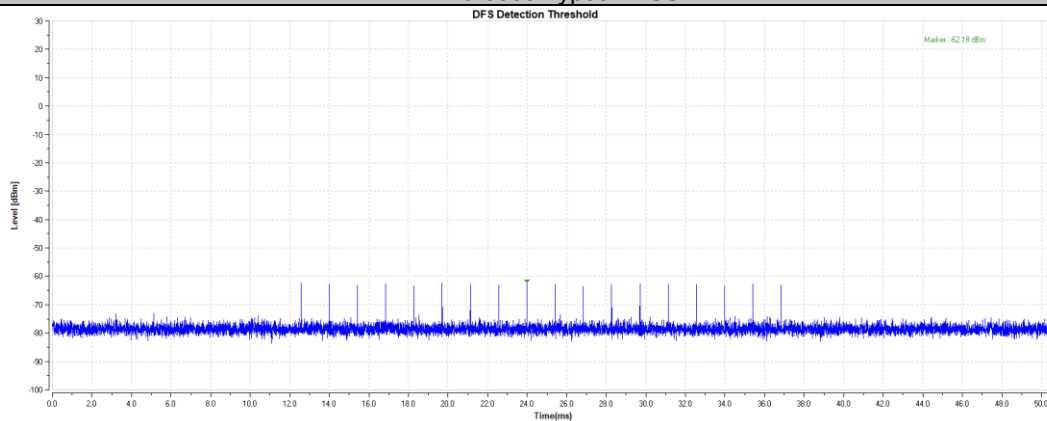


11AX20-5500-Type1-PASS

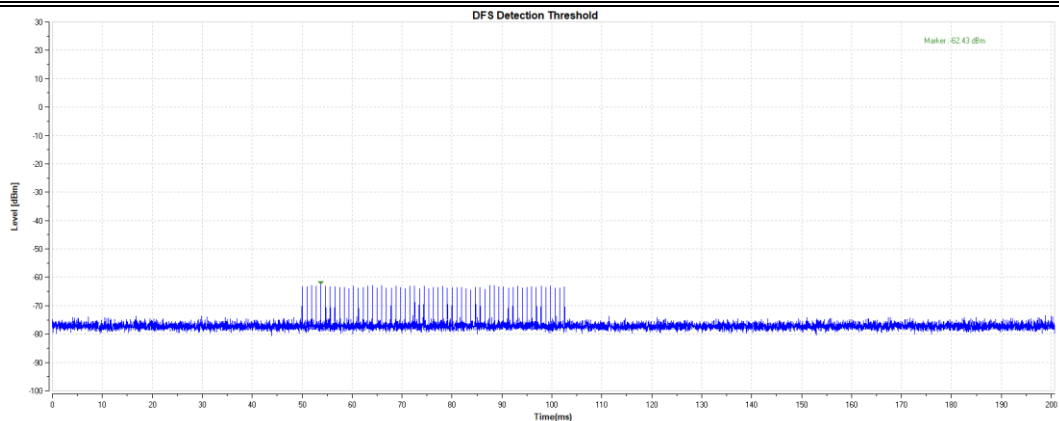


11AX20-5500-Type2-PASS

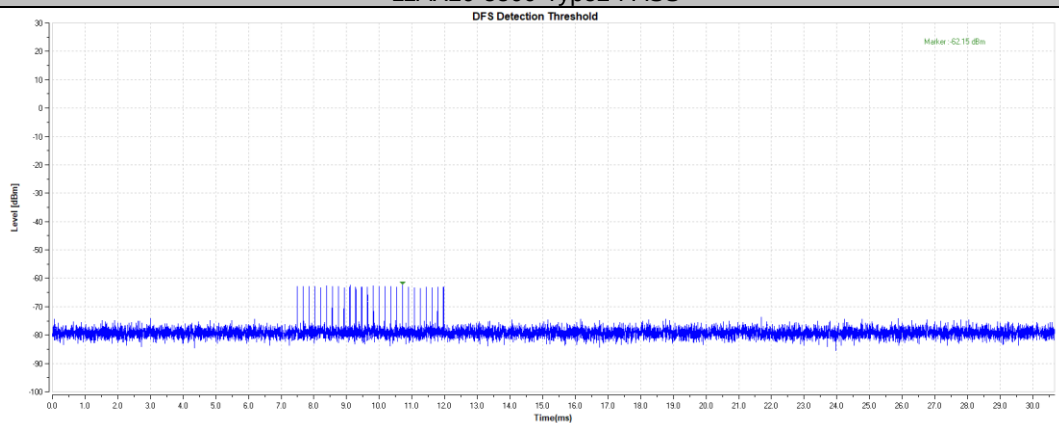



11AX20-5500-Type3-PASS

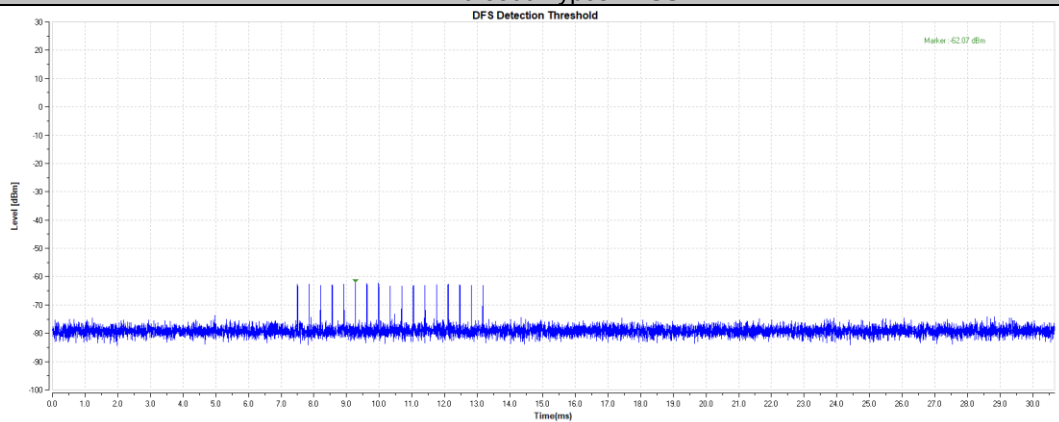

11AX20-5500-Type4-PASS

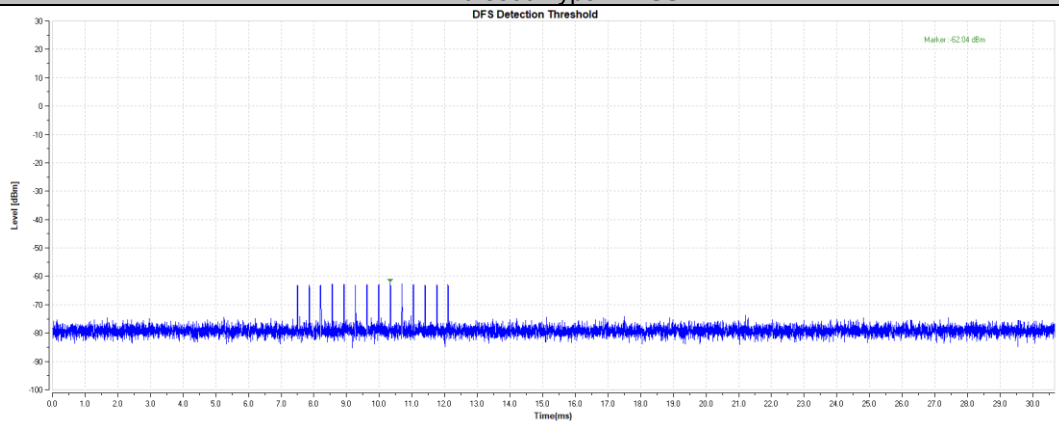


11AX20-5500-Type5-PASS

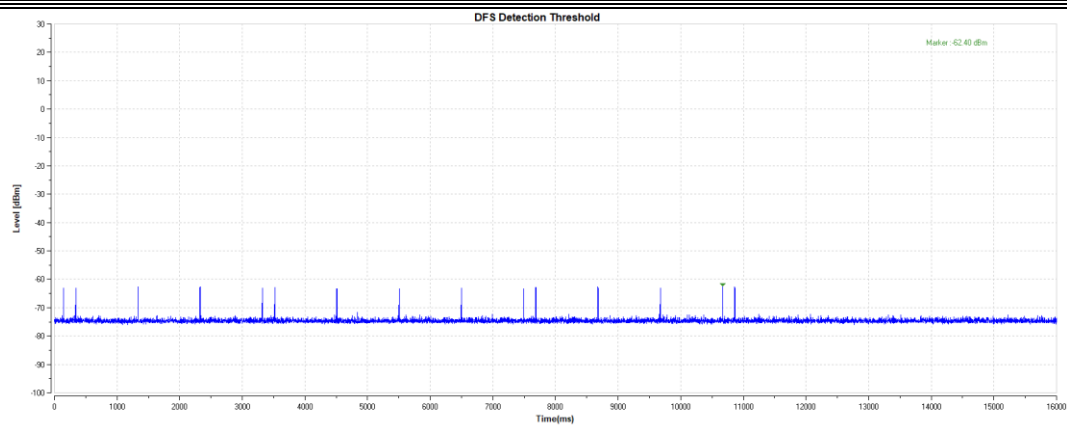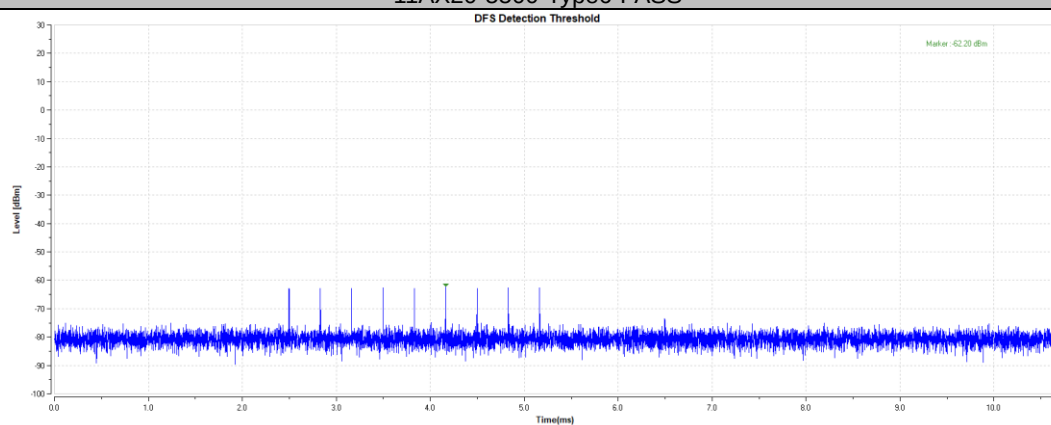**11AX20-5500-Type6-PASS**


3.8.Channel Loading


DUT Frequency (MHz)	Tx-Test Duty Cycle (%)	Tx-Test Duty Cycle Limit	Tx-Test No. of Pulses found	Tx-Test Result
IEEE 802.11ax 5260 MHz	36.090	$\geq 17\%$	142	PASS
IEEE 802.11ax 5500 MHz	35.964	$\geq 17\%$	141	PASS

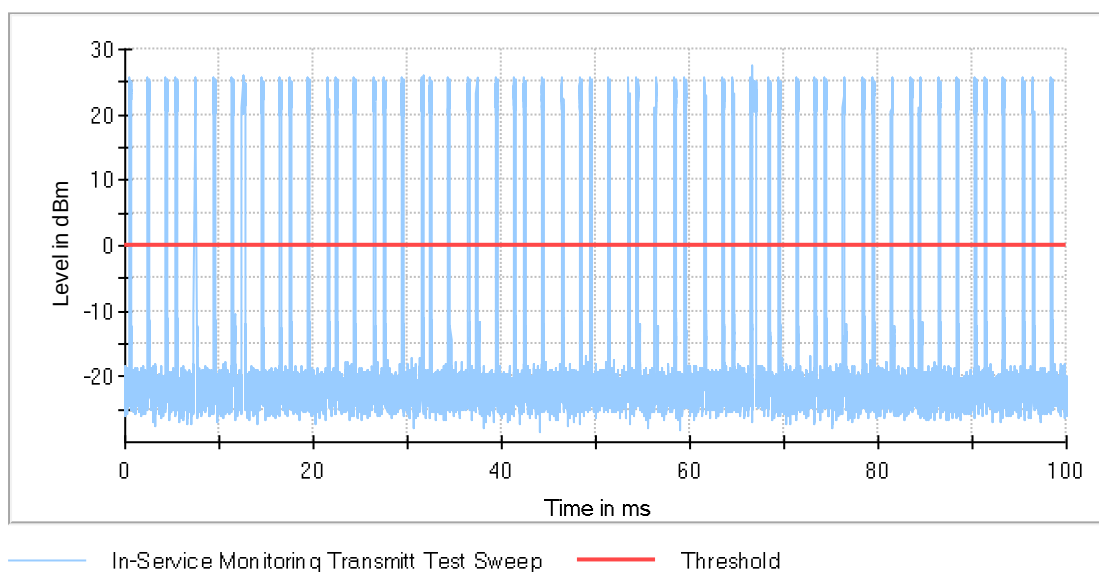

3.9.Channel Availability Check Time


TestMode	Frequency[MHz]	Result	Verdict
11AX20	5260	See test Graph	PASS
11AX20	5500	See test Graph	PASS

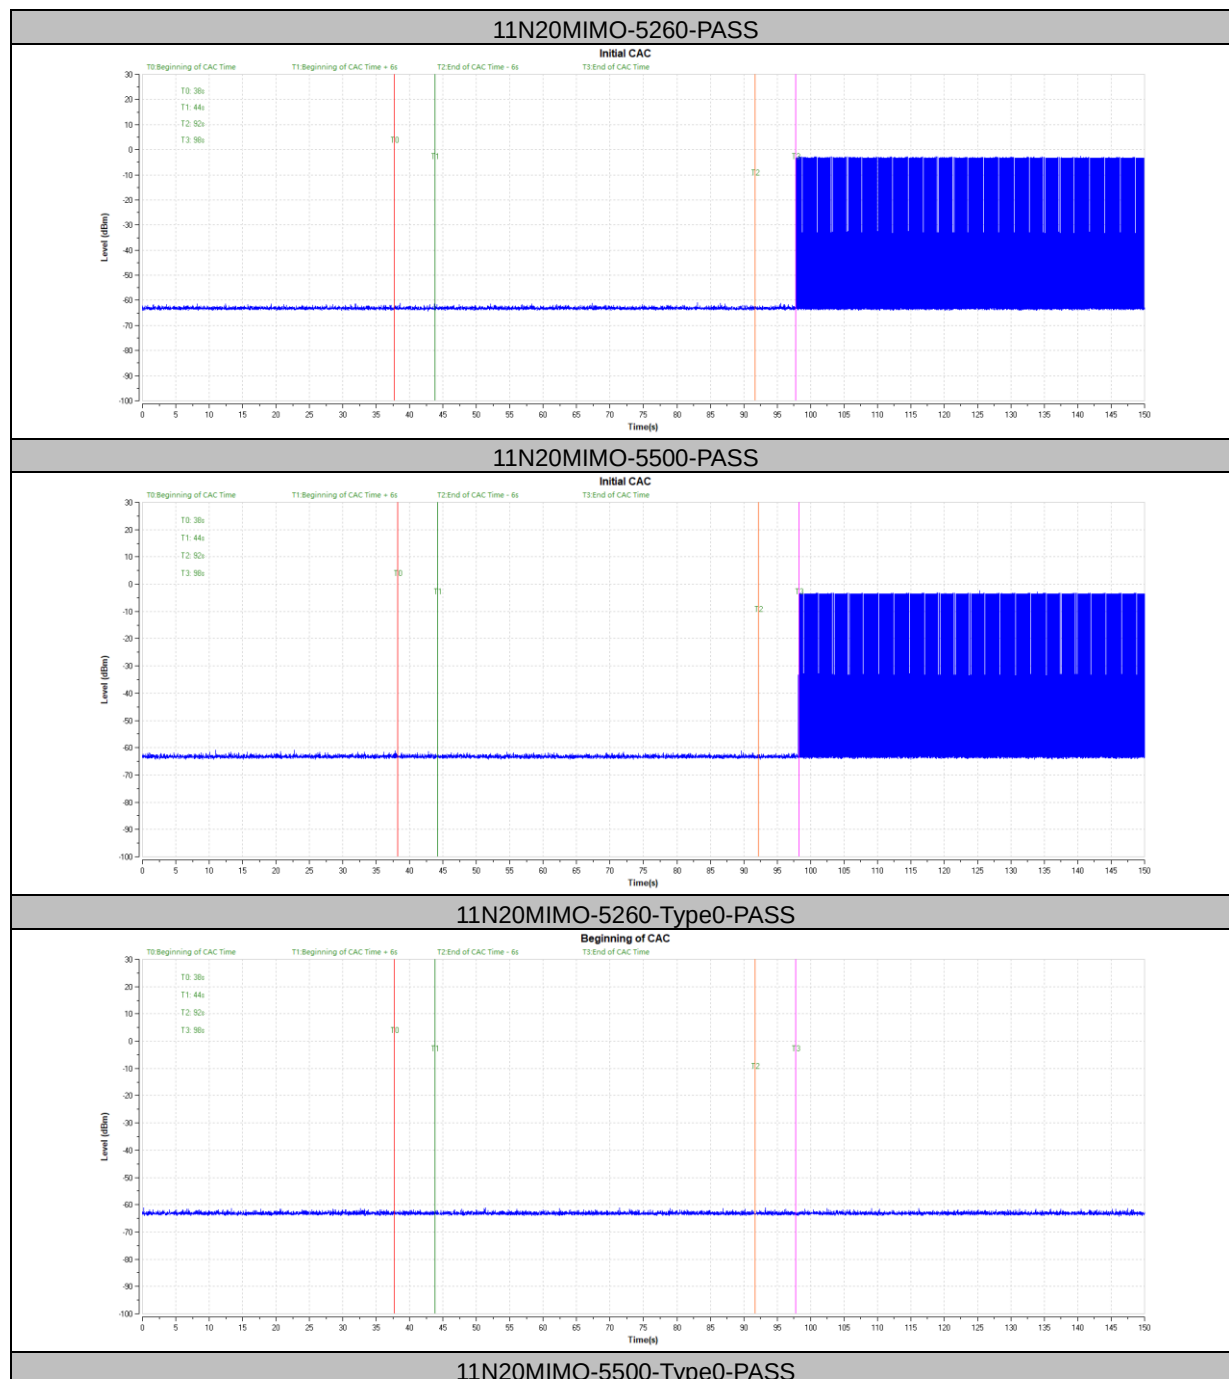

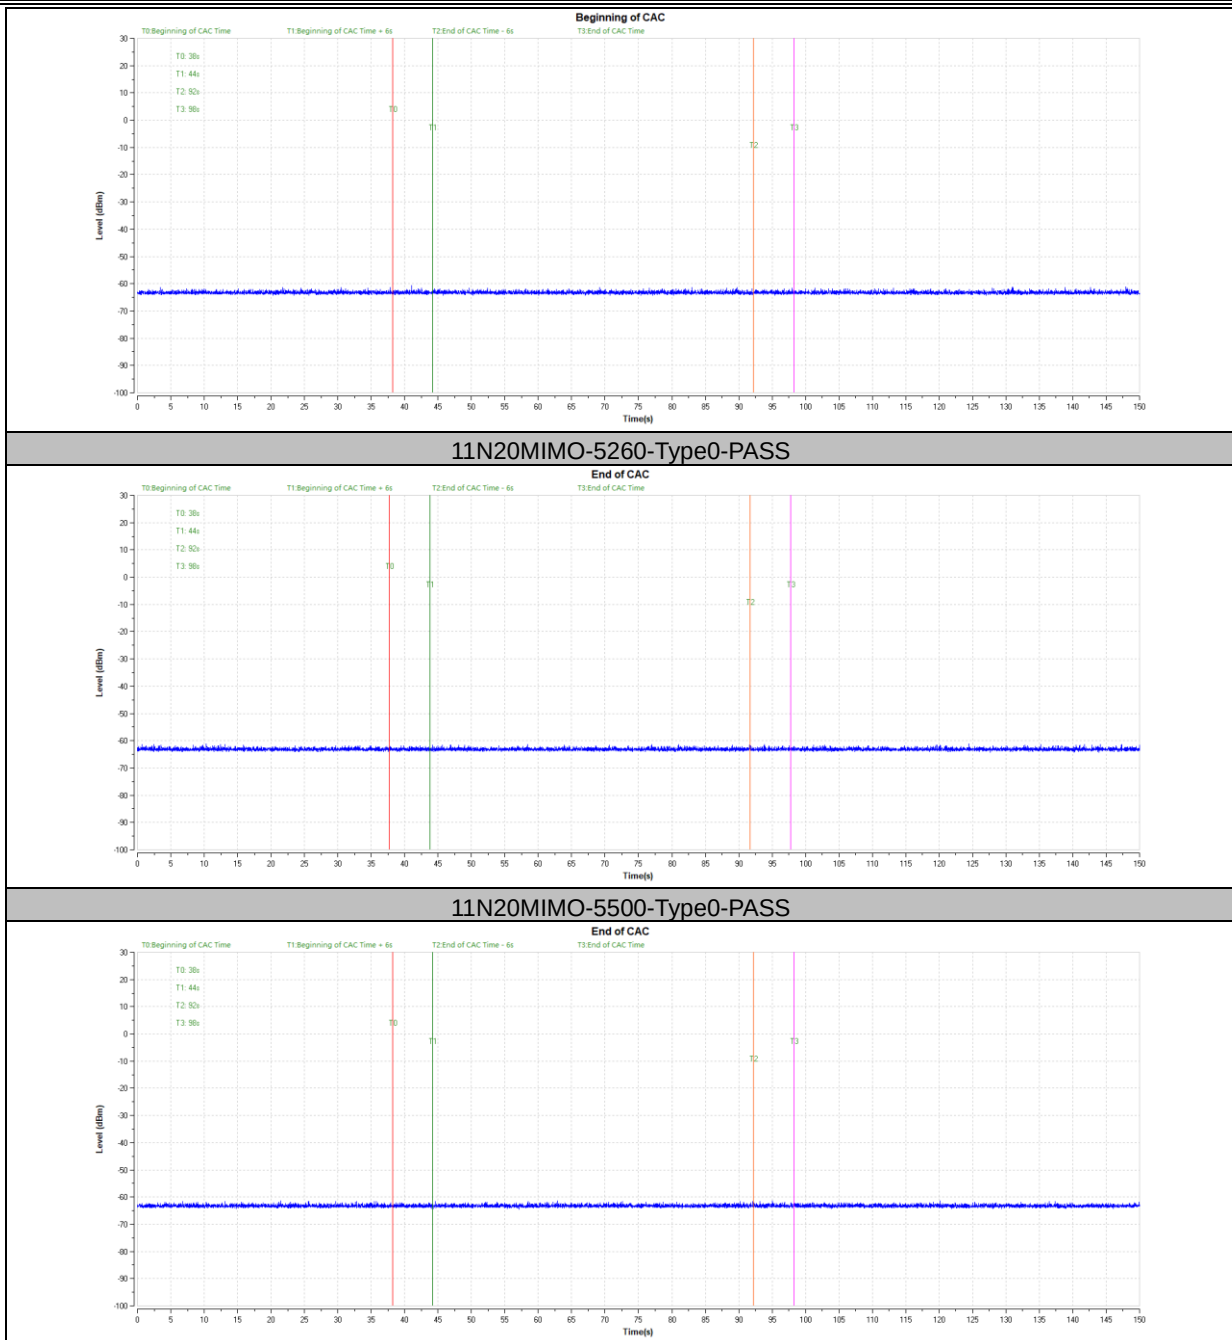

3.10.Channel Move Time


Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	Result
IEEE 802.11ax HE20 5260 MHz	0	0.446	10.000	PASS
IEEE 802.11ax HE20 5500 MHz	0	0.434	10.000	PASS

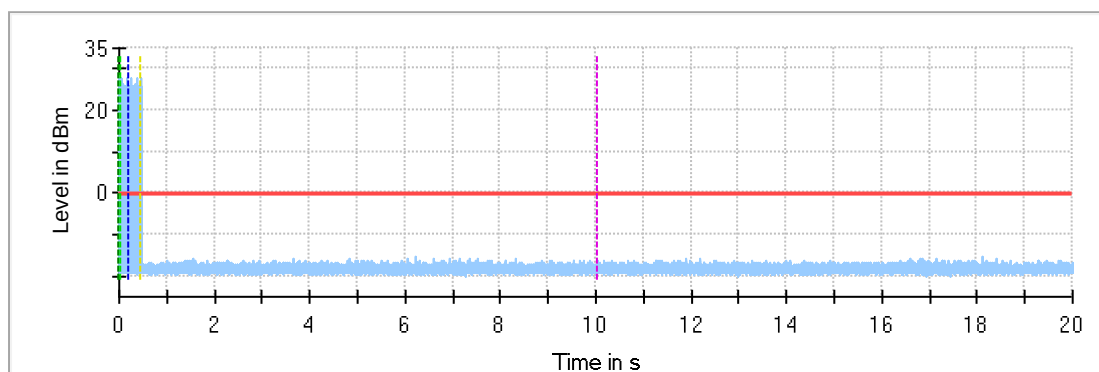

- In-Service Monitoring Channel Move Time
- Threshold
- Start of Radar
- Trigger at end of Radar
- First 200ms of Channel Closing Tx Time
- 10sec Channel Move Time Limit
- Last measured edge of Channel Closing Tx Time

3.11.Channel Closing Transmission Time


Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)	Limit (ms)	Result
IEEE 802.11ax 5260 MHz	0	first 200 ms	121	26.604	200	PASS
	0	remaining 10.0 second(s) period	148	32.536	60	PASS
IEEE 802.11ax 5500 MHz	0	first 200 ms	122	27.488	200	PASS
	0	remaining 10.0 second(s) period	142	32.084	60	PASS

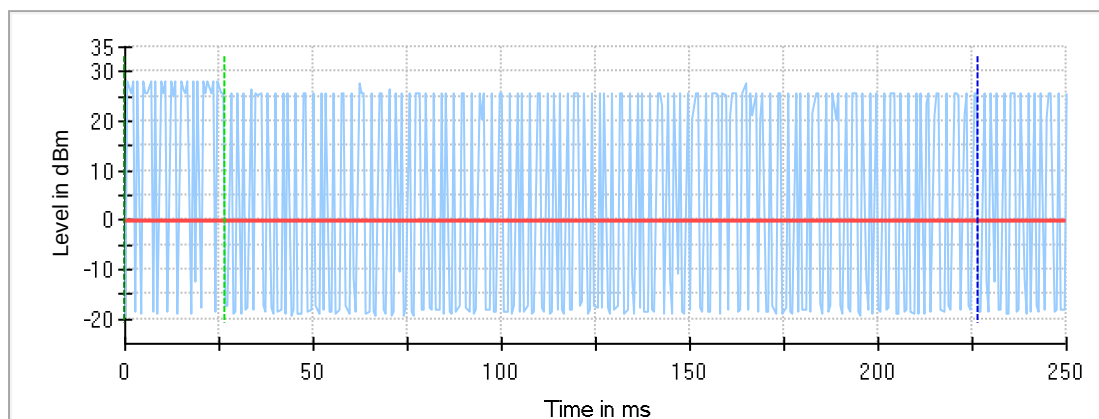

- In-Service Monitoring Channel Move Time first 200ms
- Threshold
- - - Start of Radar
- - - Trigger at end of Radar
- - - First 200ms of Channel Closing Tx Time


3.12.Non-Occupancy Period Test Result

Frequency (MHz)	Radar Type No.	NOP No. of Pulses found	NOP No. of Pulses Limit	NOP Tx Time (s)	NOP Tx Time Limit (s)	Result
IEEE 802.11ax 5260 MHz	0	0	0	0.000	0.000	PASS
IEEE 802.11ax 5500 MHz	0	0	0	0.000	0.000	PASS

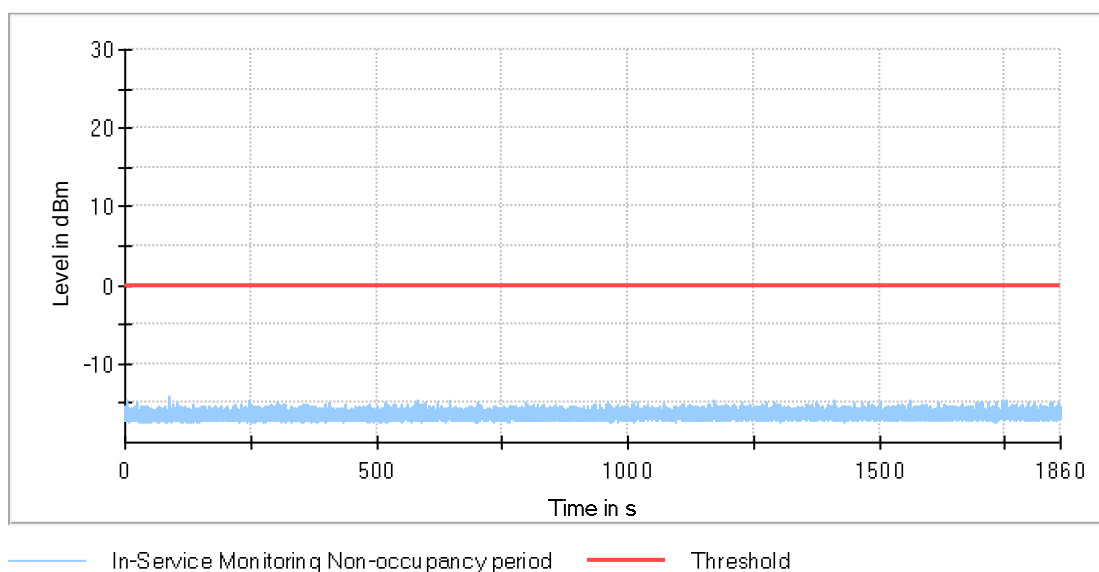

3.13.U-NII Detection Bandwidth

Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
IEEE 802.11ax 5260 MHz	5250	5270	20	19.04	105	≥100
IEEE 802.11ax 5500 MHz	5490	5510	20	19.02	105	≥100

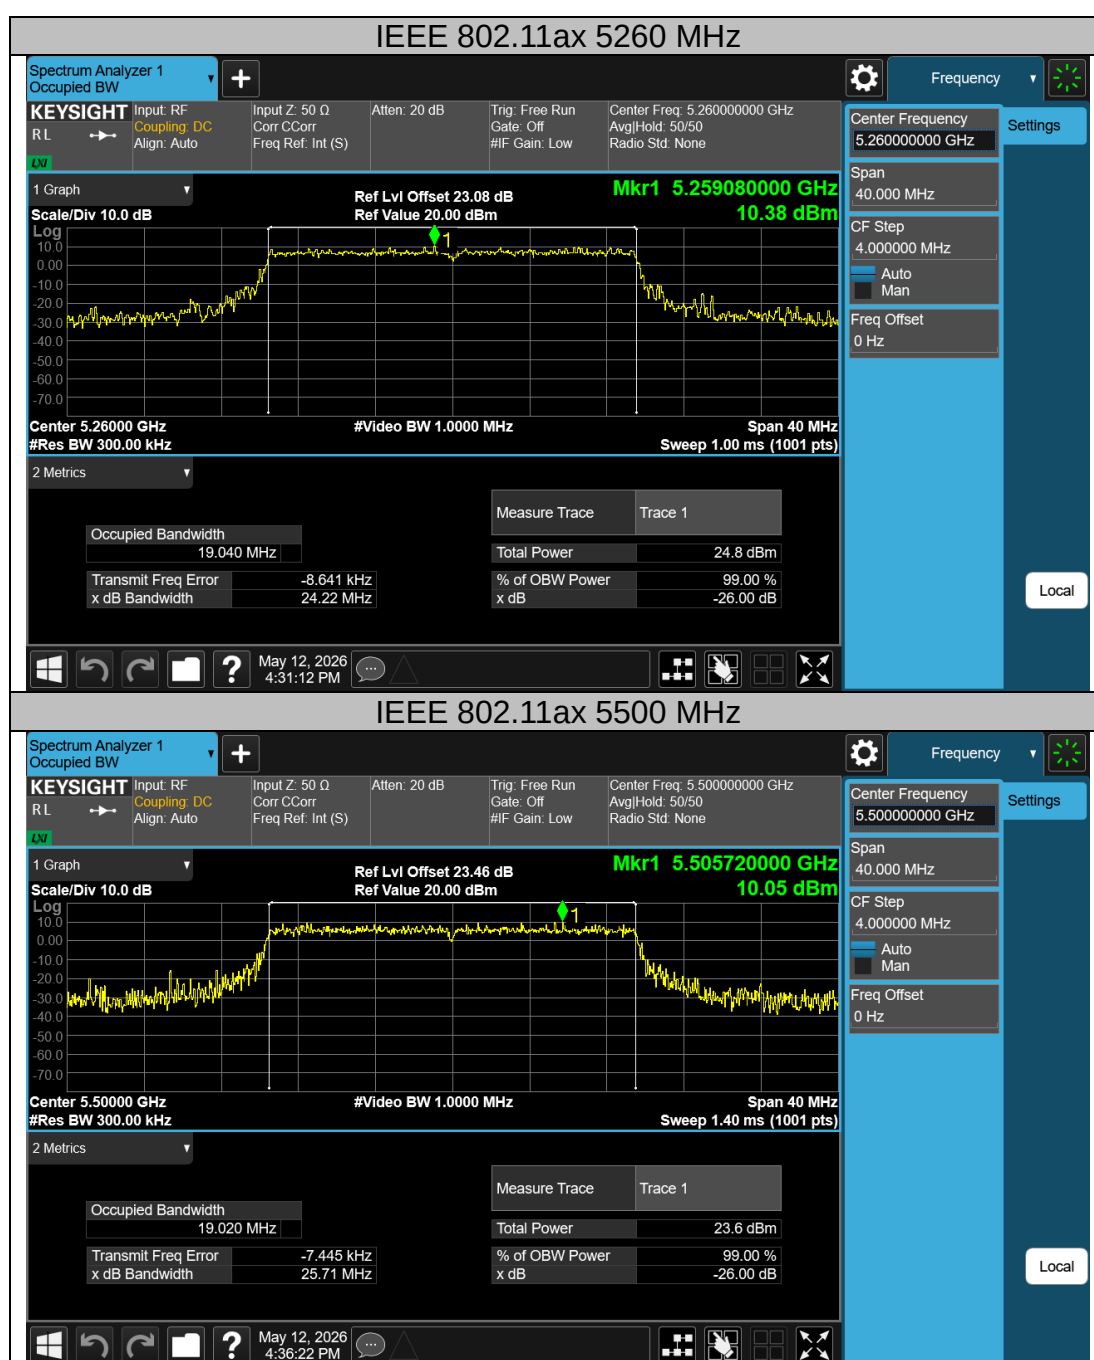

3.14. Statistical Performance check

Test Mode	802.11 ax20						
Frequency (MHz)	Radar signal	PRI (Msec)	Pulses width w (μs)	Pass Times	Fail Times	Probability	Limit
5260	Type1	Table 5a	1	28	2	93.3%	≥60 %
	Type2	Random	Random	29	1	96.6%	≥60 %
	Type3	Random	Random	26	4	86.6%	≥60 %
	Type4	Random	Random	27	3	90.0%	≥60 %
	Type1~4					91.6%	≥80 %
	Type5	Random	Random	26	4	86.6%	≥80 %
	Type6	Hopping	1	30	0	100.0%	≥70 %

Test Mode	802.11 ax20						
Frequency (MHz)	Radar signal	PRI (Msec)	Pulses width w (μs)	Pass Times	Fail Times	Probability	Limit
5500	Type1	Table 5a	1	28	2	93.3%	≥60 %
	Type2	Random	Random	27	3	90.0%	≥60 %
	Type3	Random	Random	27	3	90.0%	≥60 %
	Type4	Random	Random	28	2	93.3%	≥60 %
	Type1~4					91.6%	≥80 %
	Type5	Random	Random	27	3	90.0%	≥80 %
	Type6	Hopping	1	30	0	100.0%	≥70 %

Test Mode	802 .11 ax20				
Frequency	5260 MHz				
Radar signal	Type 1				
Trial #	Pulses width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	1	658	81	1520	1
2	1	798	67	1253	0
3	1	518	102	1931	1
4	1	758	70	1319	1
5	1	558	95	1792	1
6	1	658	81	1520	1
7	1	738	72	1355	1
8	1	518	102	1931	1
9	1	818	65	1222	1
10	1	658	81	1520	1
11	1	558	95	1792	1
12	1	758	70	1319	1
13	1	718	74	1393	0
14	1	658	81	1520	1
15	1	938	57	1066	1
16	1	2472	22	405	1
17	1	2399	22	417	1
18	1	519	102	1927	1
19	1	1610	33	621	1
20	1	669	79	1495	1
21	1	2832	19	353	1
22	1	1622	33	617	1
23	1	1741	31	574	1
24	1	2890	19	346	1
25	1	2151	25	465	1
26	1	2294	24	436	1
27	1	557	95	1795	1
28	1	2220	24	450	1
29	1	915	58	1093	1
30	1	1763	30	567	1
Detection Percentage (%)					93.3

Test Mode	802 .11 ax20				
Frequency	5260 MHz				
Radar signal	Type 2				
Trial #	Pulses width (us)	PRI (us)	Numberlf Pluse	PRF (Hz)	1=DetectiIn ; 0=NI DetectiIn
1	4.50	196.90	27	5079	1
2	2.50	210.80	28	4744	1
3	3.10	171.70	25	5824	0
4	2.90	222.70	26	4490	1
5	2.40	157.20	26	6361	1
6	1.90	202.50	25	4938	1
7	2.20	178.80	25	5593	1
8	4.40	158.00	26	6329	1
9	3.70	166.90	29	5992	1
10	1.10	195.20	27	5123	1
11	3.00	186.00	27	5376	1
12	3.80	222.20	26	4500	1
13	1.00	173.50	29	5764	1
14	4.80	198.70	26	5033	1
15	4.40	197.30	23	5068	1
16	2.90	212.00	27	4717	1
17	3.10	202.50	25	4938	1
18	3.90	180.10	28	5552	1
19	4.80	219.50	29	4556	1
20	4.60	157.90	25	6333	1
21	2.70	171.50	25	5831	1
22	3.40	154.00	27	6494	1
23	2.60	203.60	23	4912	1
24	1.20	154.60	25	6468	1
25	1.30	213.70	29	4679	1
26	3.50	151.30	24	6609	1
27	2.30	202.30	26	4943	1
28	3.40	160.20	28	6242	1
29	4.60	199.30	25	5018	1
30	2.50	157.00	27	6369	1
DetectiIn Percentage (%)					96.6

Test Mode	802 .11 ax20				
Frequency	5260 MHz				
Radar signal	Type 3				
Trial #	Pulses width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	7.50	488.90	18	2045.41	1
2	9.80	447.00	17	2237.14	0
3	6.20	427.60	17	2338.63	0
4	8.60	244.90	16	4083.30	1
5	6.50	385.10	18	2596.73	1
6	7.50	348.10	16	2872.74	1
7	9.50	201.90	18	4952.95	1
8	7.90	438.90	16	2278.42	1
9	8.30	405.60	16	2465.48	1
10	9.10	377.50	18	2649.01	1
11	6.10	306.60	18	3261.58	1
12	6.30	420.60	17	2377.56	1
13	8.50	308.90	16	3237.29	1
14	8.90	305.90	18	3269.04	1
15	8.20	491.20	18	2035.83	1
16	6.10	206.60	18	4840.27	1
17	9.90	256.90	18	3892.57	1
18	9.70	474.80	16	2106.15	1
19	6.50	326.40	16	3063.73	1
20	10.00	426.80	18	2343.02	1
21	7.10	398.30	17	2510.67	0
22	7.20	454.60	16	2199.74	1
23	6.90	319.20	17	3132.83	1
24	9.70	291.50	18	3430.53	1
25	9.00	363.50	16	2751.03	1
26	8.70	250.30	18	3995.21	1
27	6.40	393.20	16	2543.23	1
28	7.10	264.50	18	3780.72	1
29	6.50	229.30	16	4361.10	0
30	9.80	300.90	18	3323.36	1
Detection Percentage (%)					86.6

Test Mode	802 .11 ax20				
Frequency	5260 MHz				
Radar signal	Type 4				
Trial #	Pulses width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	19.60	481.00	12	2079	1
2	19.00	267.20	16	3743	0
3	18.20	317.30	12	3152	1
4	17.70	489.50	14	2043	1
5	14.00	266.80	14	3748	1
6	14.80	230.10	12	4346	0
7	18.80	276.10	14	3622	1
8	15.80	275.30	16	3632	1
9	16.50	433.80	13	2305	1
10	16.30	254.30	13	3932	1
11	16.50	438.80	14	2279	1
12	16.70	234.90	12	4257	1
13	17.40	273.80	16	3652	1
14	16.10	478.20	12	2091	1
15	11.40	382.20	16	2616	1
16	19.80	231.50	12	4320	1
17	12.80	497.00	13	2012	1
18	11.80	389.60	15	2567	1
19	11.10	344.80	15	2900	1
20	12.10	371.00	13	2695	1
21	14.80	473.00	14	2114	1
22	13.50	428.20	16	2335	1
23	15.30	464.20	14	2154	0
24	14.30	320.30	16	3122	1
25	12.40	337.50	13	2963	1
26	14.50	233.00	13	4292	1
27	18.20	446.60	14	2239	1
28	17.20	206.10	15	4852	1
29	16.30	208.50	14	4796	1
30	15.50	491.70	13	2034	1
Detection Percentage (%)					90.0

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	1	99.4	17	1337.6	1	1
	2	83.4	10	1495.0	2	
	3	65.6	15	1900.6	3	
	4	96.0	7	1121.7	1	
	5	88.5	9	1475.2	2	
	6	66.3	6	1050.4	1	
	7	59.5	6	1822.0	1	
	8	78.0	14	1091.2	1	
	9	91.9	15	1633.8	2	
	10	86.6	16	1003.3	1	
	11	96.3	7	1250.6	1	
2	1	70.8	15	1922.2	2	1
	2	63.7	18	1514.0	3	
	3	75.3	16	1831.6	1	
	4	70.6	8	1401.5	2	
	5	99.7	13	1336.6	2	
	6	57.7	7	1945.2	3	
	7	77.3	16	1182.4	2	
	8	61.5	10	1144.3	1	
	9	53.2	8	1535.4	3	
	10	93.3	16	1132.7	2	
	11	61.5	10	1716.4	3	
	12	83.5	5	1700.9	3	
3	1	88.5	9	1293.0	2	1
	2	50.2	6	1745.7	1	
	3	75.5	10	1377.9	3	
	4	83.9	8	1139.2	2	
	5	72.5	17	1112.4	1	
	6	65.6	11	1735.8	2	
	7	53.3	20	1102.3	3	
	8	86.3	9	1097.6	1	
	9	52.5	15	1258.4	1	
	10	78.0	17	1798.9	2	
	11	66.1	10	1798.3	2	
	12	54.8	11	1253.2	2	
	13	51.2	5	1951.0	1	

Test Mode	802 .11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	1	78.4	6	1594.0	3	1
	2	61.0	18	1229.9	1	
	3	97.1	20	1972.6	1	
	4	50.8	6	1318.7	2	
	5	68.7	14	1217.7	1	
	6	80.7	9	1416.2	2	
	7	76.8	9	1942.8	3	
	8	95.4	11	1623.6	1	
	9	83.5	16	1536.6	1	
5	1	88.8	11	1623.7	3	1
	2	81.6	11	1764.2	3	
	3	66.7	17	1853.2	1	
	4	68.1	10	1235.6	1	
	5	71.9	16	1808.1	3	
	6	90.6	9	1025.1	1	
	7	99.6	9	1482.6	1	
	8	95.7	10	1977.0	2	
	9	61.2	16	1486.1	2	
	10	91.3	10	1919.1	1	
	11	58.3	6	1006.8	2	
	12	97.6	7	1070.8	2	
	13	51.3	14	1537.8	2	
	14	57.3	17	1800.9	2	
	15	62.9	13	1386.2	3	
6	1	93.0	12	1741.2	1	1
	2	90.2	13	1217.4	1	
	3	89.9	11	1012.1	3	
	4	63.0	16	1252.4	2	
	5	64.2	6	1292.4	1	
	6	69.0	8	1639.4	1	
	7	86.2	7	1250.0	3	
	8	98.9	15	1993.9	2	
	9	77.9	14	1751.5	3	
	10	50.4	14	1675.0	2	
	11	66.5	15	1318.6	3	
	12	96.8	7	1059.7	1	
	13	62.9	10	1498.0	1	
	14	93.5	7	1638.9	1	

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	1	63.3	10	1130.0	1	0
	2	56.4	9	1817.0	2	
	3	70.8	11	1286.1	1	
	4	79.0	5	1064.4	2	
	5	81.8	6	1502.0	1	
	6	59.3	7	1840.8	2	
	7	55.5	13	1069.1	3	
	8	50.7	8	1464.5	2	
	9	97.9	14	1359.5	2	
	10	76.6	10	1768.2	2	
	11	78.0	15	1550.7	3	
	12	77.8	20	1781.7	3	
	13	96.4	16	1501.4	3	
	14	54.7	18	1068.1	3	
	15	61.9	7	1793.5	2	
	16	52.1	19	1797.1	2	
	17	69.3	16	1864.8	2	
8	1	65.5	7	1801.8	1	1
	2	71.3	8	1936.4	1	
	3	54.3	18	1708.4	1	
	4	55.1	19	1010.5	2	
	5	87.1	15	1878.0	1	
	6	94.4	17	1456.7	3	
	7	51.6	8	1933.0	3	
	8	98.0	13	1720.5	2	
	9	84.9	13	1372.2	1	
	10	83.6	12	1523.2	2	
	11	71.3	19	1381.1	3	
	12	80.4	15	1575.4	1	
	13	70.8	6	1901.2	2	
	14	70.9	9	1975.6	2	
	15	75.8	5	1502.9	1	
	16	79.1	15	1436.0	3	
	17	81.1	13	1147.6	2	
	18	63.2	13	1559.9	1	

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	1	89.0	9	1348.5	1	1
	2	66.4	6	1067.5	1	
	3	66.4	19	1010.2	3	
	4	80.5	18	1732.3	3	
	5	71.3	11	1202.2	1	
	6	90.3	9	1991.1	3	
	7	57.2	18	1053.9	1	
	8	71.6	8	1730.8	2	
	9	67.0	12	1655.3	3	
	10	55.8	16	1510.5	3	
	11	75.9	9	1267.6	2	
	12	80.9	14	1342.5	3	
	13	75.3	7	1951.8	3	
	14	79.7	17	1860.3	2	
	15	63.9	14	1346.9	3	
	16	72.4	14	1995.1	1	
	17	76.1	9	1434.7	3	
	18	63.9	18	1156.7	3	
	19	58.8	19	1598.9	1	
10	1	96.5	11	1177.5	3	1
	2	50.1	17	1994.7	1	
	3	85.4	5	1112.0	2	
	4	69.5	18	1137.7	1	
	5	54.4	15	1232.2	1	
	6	80.2	6	1554.4	2	
	7	51.2	11	1313.5	2	
	8	93.8	8	1134.9	1	

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	1	73.2	17	1655.1	3	1
	2	93.7	17	1466.2	2	
	3	73.8	16	1690.8	3	
	4	90.4	8	1792.7	1	
	5	66.5	7	1281.8	3	
	6	84.3	9	1971.3	2	
	7	92.9	9	1657.3	2	
	8	86.2	12	1414.5	1	
	9	66.3	11	1252.9	1	
	10	92.9	9	1828.2	3	
	11	74.5	19	1209.3	3	
	12	99.4	10	1813.0	3	
	13	63.1	6	1511.4	1	
	14	58.3	18	1828.7	3	
	15	96.8	12	1144.3	1	
	16	95.5	14	1638.9	3	
12	1	54.7	11	1926.4	1	1
	2	73.0	13	1098.6	3	
	3	58.0	19	1966.5	3	
	4	64.8	20	1039.8	2	
	5	71.7	13	1068.8	2	
	6	51.0	15	1357.4	1	
	7	62.3	13	1731.7	3	
	8	57.1	17	1525.5	1	
	9	59.0	6	1837.9	2	
	10	94.9	17	1530.2	3	
	11	97.5	14	1765.9	2	
	12	96.6	10	1663.0	1	
	13	99.2	19	1908.4	2	
	14	82.8	16	1973.0	1	
	15	61.3	15	1802.3	2	
	16	92.6	17	1498.4	2	
	17	79.3	8	1656.9	3	
	18	76.5	15	1873.1	3	
	19	54.7	16	1577.4	1	
	20	90.3	16	1820.9	1	

Test Mode	802 .11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	1	51.9	18	1838.4	3	1
	2	75.1	12	1104.7	2	
	3	61.8	8	1528.8	1	
	4	64.4	11	1787.7	1	
	5	51.6	19	1045.7	1	
	6	96.1	9	1354.3	3	
	7	69.3	6	1576.0	3	
	8	57.0	10	1134.5	1	
	9	98.5	11	1016.4	3	
	10	77.3	14	1268.9	3	
14	1	89.9	13	1999.2	2	1
	2	92.7	16	1652.1	3	
	3	96.9	14	1663.2	3	
	4	89.5	15	1991.2	3	
	5	69.8	15	1113.1	2	
	6	97.3	12	1900.9	2	
	7	83.3	11	1151.1	1	
	8	70.8	9	1845.1	3	
	9	93.3	16	1458.7	1	
	10	78.7	15	1769.1	1	
	11	87.7	15	1288.4	2	
	12	86.6	15	1384.4	3	
	13	91.6	12	1441.5	2	
	14	86.6	18	1000.9	3	
	15	72.1	11	1127.8	3	
	16	99.4	7	1502.4	2	
	17	71.8	5	1483.7	3	
	18	68.5	9	1860.8	2	
	19	88.6	10	1098.5	3	
	20	50.1	18	1172.6	3	

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	1	62.9	8	1444.1	1	1
	2	83.6	9	1214.1	1	
	3	90.3	17	1843.5	3	
	4	79.6	11	1972.5	1	
	5	63.9	14	1629.5	1	
	6	55.0	18	1196.7	3	
	7	75.7	19	1308.9	2	
	8	56.4	16	1536.8	3	
	9	92.9	6	1234.6	3	
	10	70.8	15	1158.4	1	
	11	52.3	16	1324.6	3	
	12	80.3	16	1982.7	2	
	13	88.2	14	1725.8	1	
	14	79.4	20	1393.2	3	
	15	75.9	6	1587.4	3	
	16	81.4	11	1823.5	1	
	17	64.3	16	1487.9	2	
	18	75.3	16	1417.3	3	
	19	92.2	19	1746.6	3	
16	1	53.5	14	1110.6	2	1
	2	72.6	14	1353.0	3	
	3	81.7	16	1594.9	3	
	4	62.5	20	1822.7	2	
	5	88.0	19	1102.6	3	
	6	53.2	14	1022.8	1	
	7	66.0	6	1009.6	2	
	8	56.7	14	1704.1	1	
	9	95.3	7	1341.2	2	
	10	64.2	16	1614.4	1	
	11	61.4	14	1063.9	3	
	12	52.8	13	1028.4	1	
	13	69.7	6	1203.2	1	
	14	60.2	6	1342.7	2	
	15	85.2	20	1938.2	3	
	16	66.1	6	1159.2	3	
	17	61.4	14	1238.2	2	
	18	89.9	11	1117.9	3	

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	1	72.6	15	1404.0	2	0
	2	91.2	17	1894.8	2	
	3	77.5	6	1563.3	2	
	4	67.0	12	1957.5	2	
	5	69.1	14	1763.9	3	
	6	56.3	19	1195.5	3	
	7	65.1	10	1988.3	1	
	8	63.1	19	1217.4	3	
	9	61.5	16	1135.5	2	
	10	77.3	11	1644.2	3	
	11	50.2	9	1826.3	1	
	12	56.0	16	1361.7	2	
	13	89.4	17	1924.4	3	
	14	50.0	17	1543.1	2	
	15	60.9	16	1586.0	1	
	16	83.0	12	1211.1	1	
	17	58.1	8	1433.6	1	
18	1	92.3	9	1750.9	2	1
	2	75.5	16	1018.5	1	
	3	87.7	10	1909.9	1	
	4	77.1	11	1507.6	2	
	5	92.3	8	1652.3	1	
	6	88.0	6	1160.8	3	
	7	82.2	8	1386.2	1	
	8	88.0	18	1217.6	1	
	9	57.7	17	1558.5	1	
	10	64.6	16	1021.7	3	
	11	80.7	15	1065.2	3	
	12	87.3	16	1378.0	2	
	13	73.7	18	1199.5	1	
	14	85.9	12	1881.9	2	
	15	82.6	7	1927.5	2	

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	1	59.3	17	1700.5	1	1
	2	65.2	14	1567.7	1	
	3	71.5	9	1268.9	3	
	4	80.5	19	1682.8	3	
	5	87.2	10	1618.8	1	
	6	71.5	7	1438.3	2	
	7	95.7	17	1990.0	2	
	8	60.7	13	1328.9	3	
	9	85.1	9	1617.4	1	
	10	91.4	14	1626.5	3	
	11	88.8	13	1178.0	1	
	12	77.9	9	1250.3	1	
	13	98.9	11	1184.9	2	
	14	99.8	11	1202.3	3	
20	1	75.0	18	1480.0	1	1
	2	51.3	19	1609.8	3	
	3	75.5	13	1835.1	1	
	4	52.0	10	1754.9	1	
	5	71.7	11	1100.4	1	
	6	85.3	17	1710.3	3	
	7	79.4	8	1556.5	1	
	8	64.9	16	1575.4	3	
	9	59.9	16	1947.9	3	
	10	94.1	9	1470.8	3	
21	1	92.2	19	1410.8	1	1
	2	50.5	14	1874.3	2	
	3	84.4	9	1453.9	2	
	4	93.9	19	1968.1	3	
	5	80.9	9	1749.7	3	
	6	82.4	17	1011.9	2	
	7	94.7	16	1993.8	2	
	8	87.9	19	1199.1	3	
	9	78.6	16	1282.8	3	
	10	86.1	20	1992.0	3	
	11	66.8	13	1478.2	3	
	12	85.6	15	1369.3	2	

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	1	75.2	19	1062.0	2	1
	2	65.3	7	1937.1	2	
	3	90.4	11	1851.3	1	
	4	84.3	18	1337.0	1	
	5	87.0	13	1802.5	2	
	6	55.2	7	1972.3	3	
	7	53.5	12	1272.3	1	
	8	79.9	18	1526.9	2	
	9	56.5	17	1855.1	3	
23	1	78.8	18	1293.1	3	1
	2	93.2	17	1939.6	1	
	3	58.7	17	1325.7	3	
	4	51.7	7	1370.8	3	
	5	73.5	20	1055.8	1	
	6	78.4	5	1785.3	2	
	7	88.4	15	1669.7	1	
	8	69.3	19	1982.7	1	
	9	95.5	14	1354.2	3	
	10	67.0	13	1420.4	2	
	11	91.3	6	1079.6	2	
	12	72.2	7	1925.7	3	
	13	74.4	6	1522.2	3	
	14	96.0	8	1570.8	3	
	15	90.7	6	1898.8	3	
24	1	70.6	6	1492.5	3	0
	2	64.4	17	1865.0	2	
	3	89.1	13	1989.4	3	
	4	77.6	9	1248.4	1	
	5	86.9	5	1026.3	2	
	6	82.2	5	1427.1	3	
	7	64.2	19	1633.4	3	
	8	70.0	11	1705.5	1	
	9	65.5	5	1848.5	2	
	10	50.4	9	1223.3	1	
	11	92.8	19	1978.4	3	
	12	72.4	13	1916.2	2	
	13	52.8	9	1545.6	2	
	14	71.3	18	1143.6	1	

Test Mode	802 .11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	1	53.5	17	1916.0	1	1
	2	67.9	19	1577.3	1	
	3	63.6	10	1707.3	1	
	4	94.3	10	1436.5	3	
	5	94.5	7	1035.5	1	
	6	64.7	15	1034.7	3	
	7	53.0	6	1851.3	1	
	8	98.2	16	1489.4	3	
	9	96.5	17	1222.7	1	
	10	78.1	17	1624.2	3	
	11	53.4	15	1237.5	1	
	12	73.6	14	1289.4	2	
	13	88.0	12	1040.7	2	
	14	51.7	11	1421.6	1	
	15	82.3	19	1943.7	1	
	16	71.5	14	1580.4	3	
	17	74.6	6	1205.3	2	
	18	94.1	19	1112.9	2	
26	1	97.1	11	1999.4	2	1
	2	74.6	12	1176.0	2	
	3	61.0	19	1880.8	3	
	4	84.6	13	1371.1	2	
	5	88.6	15	1527.5	1	
	6	91.7	18	1202.8	3	
	7	88.2	5	1023.9	3	
	8	97.8	12	1359.4	1	
	9	93.5	16	1246.5	2	
	10	66.5	11	1835.8	2	
	11	84.2	7	1098.3	2	
	12	86.8	11	1837.3	1	
	13	67.8	11	1167.6	3	
	14	79.6	6	1612.4	1	
	15	93.0	6	1156.9	3	
	16	71.3	13	1500.1	2	

Test Mode	802 .11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	1	66.2	8	1633.1	3	0
	2	87.5	15	1578.3	1	
	3	76.9	7	1502.1	3	
	4	76.8	16	1284.8	1	
	5	53.2	17	1022.0	3	
	6	61.4	6	1092.1	2	
	7	74.3	16	1241.0	3	
	8	95.2	12	1083.7	2	
	9	73.6	17	1988.2	3	
	10	73.1	14	1274.3	3	
	11	54.0	12	1087.3	1	
	12	87.3	16	1359.0	1	
	13	67.3	10	1035.8	2	
	14	50.7	7	1645.8	2	
	15	69.6	8	1436.0	1	
	16	70.3	18	1041.1	3	
	17	78.4	7	1793.3	3	
	18	94.6	13	1937.4	3	
	19	77.6	6	1034.8	2	
	20	96.3	5	1648.5	2	

Test Mode	802 .11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	1	61.6	17	1364.3	1	1
	2	79.8	12	1256.8	2	
	3	58.7	10	1639.2	1	
	4	68.7	10	1898.3	1	
	5	80.2	10	1524.4	3	
	6	57.4	11	1827.5	2	
	7	54.9	5	1033.3	1	
	8	56.1	20	1135.7	1	
	9	57.0	8	1103.7	2	
	10	81.6	7	1642.0	2	
	11	50.6	10	1852.5	1	
	12	64.3	19	1155.8	3	
	13	64.4	14	1849.6	3	
	14	50.1	7	1739.7	1	
	15	57.4	13	1974.3	3	
	16	98.0	15	1067.9	1	
	17	79.9	13	1207.4	2	
	18	96.0	16	1355.4	1	
	19	78.6	6	1997.2	3	
	20	65.0	14	1060.4	3	

Test Mode	802.11 ax20					
Frequency	5260 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	1	81.6	20	1322.4	2	1
	2	64.8	17	1325.7	2	
	3	90.9	16	1011.4	1	
	4	85.7	17	1460.2	2	
	5	52.2	11	1303.1	3	
	6	79.0	17	1393.7	1	
	7	76.7	6	1133.1	3	
	8	82.3	6	1830.5	2	
	9	81.1	16	1121.9	2	
	10	82.9	6	1787.2	2	
	11	82.2	8	1381.5	3	
	12	79.7	20	1236.2	1	
	13	93.3	15	1700.0	2	
	14	98.0	10	1737.8	2	
	15	71.4	18	1361.9	2	
	16	71.0	13	1979.4	3	
	17	61.0	11	1524.5	3	
30	1	69.0	12	1186.5	2	1
	2	95.1	15	1444.2	2	
	3	60.8	9	1066.1	2	
	4	65.2	12	1504.6	1	
	5	65.5	16	1166.5	1	
	6	86.7	16	1993.0	1	
	7	86.2	19	1693.2	3	
	8	87.7	6	1293.8	1	
	9	73.6	17	1676.0	2	
	10	56.8	12	1997.2	2	
	11	79.1	10	1192.7	3	
	12	58.4	14	1620.8	3	
	13	53.9	18	1119.3	1	
	14	55.2	12	1119.0	2	
Detection percentage (%)						86.6

Test Mode		802.11 ax20				
Frequency		5260 MHz				
Radar signal		Type 6				
Trial #	Pulse width (us)	PRI (us)	Pulses / Hop	Hopping Rate (KHz)	Hopping sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode	802 .11 ax20				
Frequency	5500 MHz				
Radar signal	Type 1				
Trial #	Pulses width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detectin ; 0=NI Detectin
1	1	718	74	1393	1
2	1	798	67	1253	1
3	1	818	65	1222	0
4	1	938	57	1066	1
5	1	558	95	1792	1
6	1	738	72	1355	1
7	1	698	76	1433	1
8	1	658	81	1520	1
9	1	798	67	1253	1
10	1	918	58	1089	1
11	1	518	102	1931	1
12	1	598	89	1672	1
13	1	938	57	1066	1
14	1	738	72	1355	1
15	1	738	72	1355	1
16	1	1004	53	996	1
17	1	770	69	1299	1
18	1	1362	39	734	1
19	1	650	82	1538	1
20	1	2000	27	500	1
21	1	1284	42	779	1
22	1	1660	32	602	1
23	1	2619	21	382	1
24	1	956	56	1046	1
25	1	2417	22	414	0
26	1	2708	20	369	1
27	1	1718	31	582	1
28	1	1872	29	534	1
29	1	1951	28	513	1
30	1	1228	43	814	1
Detectin Percentage (%)					93.3

Test Mode	802.11 ax20				
Frequency	5500 MHz				
Radar signal	Type 2				
Trial #	Pulses width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	1.70	200.90	25	4978	0
2	2.60	155.90	24	6414	1
3	3.30	221.80	25	4509	1
4	3.50	198.30	23	5043	1
5	2.40	220.80	27	4529	1
6	4.80	208.00	27	4808	1
7	2.30	187.50	27	5333	1
8	4.10	151.80	23	6588	1
9	3.60	207.30	23	4824	1
10	4.00	199.60	27	5010	1
11	4.50	191.30	25	5227	1
12	3.60	155.90	24	6414	0
13	1.10	181.30	28	5516	1
14	2.10	173.30	26	5770	1
15	3.70	153.70	29	6506	1
16	1.50	173.90	24	5750	1
17	3.90	160.50	28	6231	1
18	1.40	193.90	25	5157	1
19	1.30	186.60	29	5359	1
20	2.80	194.00	25	5155	1
21	2.80	185.30	24	5397	1
22	3.90	155.90	28	6414	1
23	4.70	220.40	23	4537	1
24	3.80	176.20	25	5675	1
25	3.50	229.40	28	4359	1
26	3.70	209.80	29	4766	1
27	2.10	177.10	23	5647	1
28	2.00	164.50	27	6079	1
29	1.20	152.50	23	6557	1
30	2.70	170.20	24	5875	0
Detection Percentage (%)					90.0

Test Mode	802.11 ax20				
Frequency	5500 MHz				
Radar signal	Type 3				
Trial #	Pulses width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	7.00	239.90	16	4168.40	1
2	10.00	429.60	16	2327.75	1
3	6.00	417.00	17	2398.08	1
4	6.20	223.80	16	4468.28	1
5	6.50	290.80	16	3438.79	1
6	6.30	263.50	17	3795.07	1
7	6.60	450.40	17	2220.25	1
8	6.30	204.30	18	4894.76	0
9	6.00	301.60	18	3315.65	1
10	7.30	454.30	18	2201.19	1
11	9.90	370.80	17	2696.87	1
12	9.90	463.30	16	2158.43	1
13	6.70	225.30	17	4438.53	1
14	6.30	211.70	17	4723.67	1
15	7.10	291.30	17	3432.89	1
16	6.70	415.50	17	2406.74	1
17	7.50	474.40	17	2107.93	1
18	9.10	370.70	17	2697.60	1
19	7.50	456.30	17	2191.54	1
20	7.50	329.70	17	3033.06	1
21	9.80	294.20	18	3399.05	1
22	6.20	353.90	17	2825.66	1
23	9.60	485.10	18	2061.43	0
24	8.40	378.30	18	2643.40	1
25	9.10	422.50	17	2366.86	1
26	7.30	384.40	18	2601.46	1
27	8.60	396.80	16	2520.16	0
28	7.80	314.40	17	3180.66	1
29	8.90	200.00	16	5000.00	1
30	8.60	248.80	18	4019.29	1
Detection Percentage (%)					90.00

Test Mode	802.11 ax20				
Frequency	5500 MHz				
Radar signal	Type 4				
Trial #	Pulses width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	15.80	472.30	15	2117	1
2	14.40	488.70	16	2046	0
3	12.40	446.40	12	2240	1
4	11.50	246.60	15	4055	1
5	11.90	301.70	16	3315	0
6	14.70	326.80	12	3060	1
7	14.70	482.90	13	2071	1
8	13.40	302.70	12	3304	1
9	13.70	292.80	14	3415	1
10	17.90	259.40	14	3855	1
11	19.20	261.00	14	3831	1
12	15.70	235.80	12	4241	1
13	19.20	348.10	14	2873	1
14	16.50	455.20	12	2197	1
15	14.60	248.70	12	4021	1
16	17.90	288.40	12	3467	1
17	16.50	438.80	15	2279	1
18	12.70	340.60	13	2936	1
19	19.50	366.50	12	2729	1
20	11.40	395.60	16	2528	1
21	13.90	211.60	15	4726	1
22	16.70	286.10	14	3495	1
23	13.60	292.60	12	3418	1
24	19.80	287.90	13	3473	1
25	13.00	445.30	12	2246	1
26	16.50	343.80	16	2909	1
27	12.80	204.70	16	4885	1
28	18.80	326.20	13	3066	1
29	15.70	452.00	14	2212	1
30	14.70	320.30	16	3122	1
Detection Percentage (%)					93.3

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	1	78.6	7	1790.4	3	1
	2	82.0	18	1758.9	1	
	3	99.3	15	1132.3	2	
	4	76.8	19	1427.7	2	
	5	73.9	18	1293.2	2	
	6	82.8	7	1954.1	2	
	7	68.5	16	1742.6	1	
	8	69.9	9	1357.3	2	
	9	52.6	12	1004.2	2	
	10	54.8	6	1814.2	1	
	11	76.5	16	1802.4	1	
2	1	95.6	8	1546.4	3	1
	2	52.0	7	1924.7	1	
	3	64.0	9	1638.2	2	
	4	55.2	16	1196.9	3	
	5	73.3	9	1540.5	2	
	6	81.1	18	1880.0	3	
	7	63.3	6	1876.8	3	
	8	74.6	9	1163.6	2	
	9	86.1	18	1836.0	3	
	10	60.8	19	1652.4	1	
	11	72.0	18	1234.4	3	
	12	51.1	11	1726.8	3	
3	1	91.0	12	1943.3	1	1
	2	51.1	17	1171.7	3	
	3	76.8	17	1753.1	3	
	4	68.2	16	1815.0	2	
	5	52.1	16	1489.6	1	
	6	59.7	16	1960.5	1	
	7	74.8	14	1212.9	3	
	8	54.6	14	1539.9	1	
	9	98.2	19	1283.7	1	
	10	72.8	11	1983.9	3	
	11	80.0	14	1854.3	2	
	12	65.1	6	1088.4	2	
	13	79.3	7	1978.3	1	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	1	95.7	6	1729.4	1	1
	2	97.7	18	1463.5	3	
	3	78.0	7	1416.6	2	
	4	79.2	7	1113.3	1	
	5	57.3	13	1452.6	3	
	6	51.6	16	1292.3	1	
	7	56.1	17	1201.4	3	
	8	97.1	17	1511.0	2	
	9	76.1	19	1370.8	2	
5	1	82.5	19	1784.2	2	0
	2	51.3	12	1808.7	1	
	3	50.2	13	1036.2	3	
	4	89.9	19	1472.0	3	
	5	97.7	7	1022.1	2	
	6	71.9	15	1809.5	1	
	7	53.5	11	1499.6	1	
	8	83.6	14	1195.2	2	
	9	64.9	7	1493.7	1	
	10	69.1	8	1428.9	3	
	11	78.7	18	1823.5	1	
	12	74.6	15	1435.2	2	
	13	95.8	20	1317.7	2	
	14	51.6	8	1166.8	2	
	15	71.3	10	1667.5	1	
6	1	58.2	18	1477.4	1	0
	2	62.3	11	1278.8	2	
	3	75.4	13	1098.5	3	
	4	85.7	20	1466.5	2	
	5	70.5	16	1914.3	1	
	6	71.9	17	1964.5	2	
	7	79.7	17	1001.1	2	
	8	96.0	14	1355.3	2	
	9	68.7	6	1533.9	3	
	10	74.2	17	1014.4	1	
	11	58.8	19	1461.8	2	
	12	72.2	12	1109.3	2	
	13	93.6	5	1867.5	3	
	14	57.4	14	1643.6	2	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	1	71.7	18	1989.7	2	1
	2	61.0	19	1613.2	1	
	3	90.6	15	1752.1	1	
	4	72.7	9	1435.3	3	
	5	93.7	15	1599.3	3	
	6	81.3	5	1777.9	3	
	7	65.8	18	1414.3	3	
	8	97.8	8	1424.8	3	
	9	66.2	13	1029.8	2	
	10	98.5	15	1968.6	3	
	11	98.9	19	1219.1	2	
	12	64.1	13	1364.9	3	
	13	83.0	9	1049.7	2	
	14	98.0	13	1873.3	1	
	15	55.1	9	1088.4	2	
	16	94.2	8	1741.7	1	
	17	61.2	19	1670.8	2	
8	1	75.6	14	1430.8	1	1
	2	57.0	17	1845.6	1	
	3	74.7	15	1393.0	1	
	4	82.2	8	1346.8	1	
	5	66.6	11	1028.3	1	
	6	91.8	7	1713.5	2	
	7	55.7	9	1579.3	3	
	8	80.3	17	1663.9	3	
	9	50.9	17	1510.7	3	
	10	78.3	15	1799.7	3	
	11	99.4	16	1500.2	3	
	12	59.5	13	1290.3	3	
	13	50.7	16	1401.3	1	
	14	84.3	10	1173.1	1	
	15	61.7	18	1019.8	1	
	16	69.4	17	1308.3	3	
	17	97.2	13	1512.1	3	
	18	89.8	15	1410.9	2	

Test Mode	802.11 ax20					
Frequency	5500MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	1	69.3	17	1882.1	2	1
	2	58.7	13	1944.0	3	
	3	81.8	14	1848.2	3	
	4	80.7	15	1767.7	1	
	5	66.4	7	1559.0	2	
	6	86.0	16	1559.9	2	
	7	83.7	14	1050.7	1	
	8	50.7	17	1328.6	1	
	9	79.7	17	1712.6	2	
	10	56.5	9	1595.2	2	
	11	89.9	20	1778.1	2	
	12	74.0	18	1060.8	2	
	13	90.0	12	1338.5	1	
	14	67.8	8	1113.1	1	
	15	91.1	20	1871.1	1	
	16	86.7	6	1949.2	3	
	17	54.5	14	1275.8	1	
	18	79.1	18	1475.5	3	
	19	50.8	8	1162.7	1	
10	1	91.0	8	1508.9	2	1
	2	58.5	6	1448.1	3	
	3	86.7	12	1704.3	2	
	4	73.8	10	1439.8	3	
	5	61.3	5	1356.0	1	
	6	70.7	6	1156.2	3	
	7	81.7	12	1214.6	3	
	8	91.3	17	1348.0	2	

Test Mode	802 .11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	1	72.5	15	1464.8	3	1
	2	58.1	12	1324.4	1	
	3	52.0	19	1185.9	1	
	4	64.0	17	1510.0	3	
	5	55.9	17	1168.6	3	
	6	56.7	16	1769.6	2	
	7	71.1	15	1409.1	3	
	8	51.8	11	1552.1	1	
	9	93.5	17	1673.8	2	
	10	91.9	20	1216.9	2	
	11	63.8	12	1483.2	1	
	12	71.5	8	1186.6	3	
	13	95.8	14	1712.1	2	
	14	87.4	9	1046.9	3	
	15	82.8	17	1230.1	1	
	16	74.3	19	1225.0	1	
12	1	51.1	13	1749.8	1	1
	2	56.2	13	1306.4	1	
	3	88.4	6	1975.5	1	
	4	50.1	6	1370.8	1	
	5	82.7	8	1783.0	1	
	6	70.8	16	1937.6	2	
	7	96.8	10	1386.0	2	
	8	83.7	19	1153.1	2	
	9	89.0	6	1593.6	3	
	10	66.7	16	1860.6	3	
	11	73.9	12	1245.4	1	
	12	62.7	18	1144.2	3	
	13	51.8	19	1916.5	2	
	14	97.6	7	1443.2	3	
	15	93.6	11	1650.6	2	
	16	75.4	16	1387.7	2	
	17	57.8	17	1406.1	1	
	18	52.1	15	1155.3	1	
	19	50.0	6	1310.7	2	
	20	93.4	6	1622.6	1	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	1	86.5	17	1903.0	3	1
	2	55.0	17	1223.2	2	
	3	64.5	12	1992.5	3	
	4	76.4	15	1457.9	3	
	5	76.0	5	1438.7	2	
	6	73.1	12	1913.3	1	
	7	75.0	12	1754.3	3	
	8	71.4	6	1581.8	2	
	9	79.5	6	1386.6	2	
	10	53.3	9	1266.0	2	
14	1	94.7	7	1849.0	2	1
	2	73.3	10	1491.1	1	
	3	63.2	8	1520.6	3	
	4	70.2	18	1398.6	3	
	5	80.8	16	1821.8	3	
	6	72.1	8	1849.2	3	
	7	86.8	13	1054.0	1	
	8	73.2	20	1739.9	3	
	9	87.2	16	1423.0	1	
	10	64.3	13	1805.4	1	
	11	95.4	9	1252.0	2	
	12	83.4	14	1994.5	1	
	13	89.9	19	1497.9	2	
	14	81.9	16	1065.9	1	
	15	83.4	15	1512.7	1	
	16	85.0	7	1924.3	3	
	17	79.5	13	1837.4	2	
	18	94.0	9	1847.0	3	
	19	71.5	14	1126.2	3	
	20	73.1	13	1750.7	2	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	1	74.3	14	1299.6	3	1
	2	74.2	14	1143.7	1	
	3	91.4	14	1114.4	1	
	4	56.4	19	1062.0	3	
	5	81.6	16	1815.6	2	
	6	70.5	12	1614.4	3	
	7	58.4	19	1298.4	1	
	8	79.9	6	1226.6	1	
	9	88.8	15	1797.4	1	
	10	95.7	6	1177.4	2	
	11	68.9	9	1407.8	2	
	12	88.9	12	1699.7	1	
	13	74.7	12	1355.3	2	
	14	65.0	15	1432.6	2	
	15	70.8	12	1964.9	1	
	16	69.8	17	1419.6	2	
	17	99.0	6	1629.8	1	
	18	53.0	7	1381.1	3	
	19	78.1	7	1941.5	2	
16	1	62.6	18	1144.7	1	1
	2	57.1	14	1928.5	3	
	3	74.2	9	1988.4	3	
	4	84.5	7	1738.1	3	
	5	76.3	11	1326.0	3	
	6	82.1	13	1369.8	2	
	7	74.5	12	1226.8	2	
	8	79.3	19	1653.3	3	
	9	82.2	15	1258.8	3	
	10	54.9	17	1639.5	2	
	11	68.0	12	1609.5	3	
	12	84.4	9	1623.6	3	
	13	73.8	12	1058.2	2	
	14	63.8	11	1068.9	1	
	15	81.1	16	1314.7	1	
	16	72.0	6	1565.3	3	
	17	76.7	10	1879.3	1	
	18	88.0	15	1876.3	1	

Test Mode	802 .11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	1	71.1	11	1265.0	2	1
	2	92.9	6	1347.0	2	
	3	74.9	17	1162.0	1	
	4	50.4	17	1207.3	1	
	5	89.2	13	1047.8	2	
	6	74.1	12	1110.8	2	
	7	84.1	15	1054.2	3	
	8	57.0	17	1356.8	3	
	9	83.5	9	1891.2	1	
	10	94.1	9	1042.1	2	
	11	83.9	20	1905.6	2	
	12	50.5	6	1477.6	1	
	13	78.9	19	1675.3	3	
	14	51.8	14	1007.2	2	
	15	99.9	9	1377.5	1	
	16	73.9	15	1186.0	2	
	17	57.6	15	1476.4	1	
18	1	86.2	12	1249.3	2	1
	2	73.4	6	1096.5	3	
	3	88.0	5	1344.4	1	
	4	82.0	14	1862.7	3	
	5	72.5	13	1832.2	1	
	6	64.3	8	1665.5	3	
	7	54.9	14	1417.1	1	
	8	72.3	19	1213.9	3	
	9	58.0	12	1124.8	2	
	10	91.9	12	1261.5	2	
	11	95.2	12	1284.8	3	
	12	94.1	10	1568.1	1	
	13	58.1	15	1103.8	3	
	14	79.1	14	1745.2	2	
	15	64.3	11	1190.1	2	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	1	91.8	20	1639.4	1	1
	2	94.7	14	1591.3	1	
	3	65.1	8	1874.8	1	
	4	71.0	19	1589.8	2	
	5	51.9	7	1445.6	2	
	6	81.8	5	1631.5	1	
	7	66.6	19	1624.7	3	
	8	70.3	17	1417.1	3	
	9	84.0	9	1074.5	3	
	10	81.2	11	1664.1	3	
	11	70.0	8	1718.5	2	
	12	67.1	7	1571.7	2	
	13	85.3	9	1248.2	3	
	14	55.4	13	1368.1	3	
20	1	68.9	5	1539.5	2	1
	2	97.7	13	1020.7	1	
	3	54.8	16	1137.4	2	
	4	79.1	9	1461.6	1	
	5	80.8	6	1000.3	3	
	6	92.7	14	1429.0	2	
	7	56.0	14	1938.7	2	
	8	53.4	19	1015.4	3	
	9	57.2	18	1052.6	1	
	10	66.3	15	1824.8	3	
21	1	91.6	11	1356.7	1	1
	2	82.7	5	1439.0	1	
	3	70.2	7	1694.3	2	
	4	57.5	8	1570.2	3	
	5	51.9	13	1200.9	2	
	6	65.0	15	1438.6	1	
	7	94.0	13	1081.2	3	
	8	86.1	8	1563.3	2	
	9	99.4	11	1322.8	3	
	10	98.1	12	1289.5	3	
	11	89.2	20	1062.2	1	
	12	65.7	8	1842.9	3	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	1	52.9	7	1369.8	1	1
	2	64.7	15	1787.3	3	
	3	59.7	19	1294.3	1	
	4	54.6	7	1641.8	3	
	5	99.5	14	1625.1	2	
	6	78.0	12	1195.6	3	
	7	96.1	14	1852.6	2	
	8	87.2	9	1714.6	1	
	9	88.2	14	1362.0	3	
23	1	85.1	12	1564.3	1	1
	2	82.2	10	1897.2	2	
	3	70.3	15	1819.2	1	
	4	68.1	15	1435.7	1	
	5	60.3	14	1221.8	2	
	6	60.8	10	1510.3	3	
	7	82.6	10	1042.3	3	
	8	84.1	8	1130.5	2	
	9	51.6	20	1514.3	1	
	10	70.4	7	1394.0	1	
	11	54.2	19	1311.8	1	
	12	89.2	9	1200.3	3	
	13	99.9	14	1363.4	2	
	14	55.0	14	1463.0	2	
	15	64.3	15	1772.4	3	
24	1	99.3	18	1335.8	2	1
	2	93.7	20	1515.6	3	
	3	78.0	5	1658.2	2	
	4	76.6	16	1266.8	2	
	5	89.8	13	1813.4	2	
	6	53.2	9	1273.3	1	
	7	63.5	14	1796.4	1	
	8	67.9	13	1668.4	1	
	9	64.4	19	1583.6	1	
	10	57.7	10	1654.0	3	
	11	99.7	5	1074.5	1	
	12	53.3	7	1193.9	3	
	13	51.0	11	1852.6	1	
	14	80.6	9	1030.6	3	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	1	84.8	13	1935.7	2	1
	2	70.6	17	1370.7	1	
	3	63.4	16	1494.8	2	
	4	78.1	12	1131.2	1	
	5	97.2	8	1425.4	2	
	6	66.0	15	1429.5	1	
	7	82.6	12	1523.9	3	
	8	54.5	6	1210.9	1	
	9	50.4	7	1937.5	3	
	10	78.0	20	1120.0	2	
	11	87.7	9	1515.4	1	
	12	54.2	17	1247.9	1	
	13	80.6	17	1241.5	1	
	14	51.7	15	1752.7	2	
	15	89.4	12	1152.5	3	
	16	93.7	8	1953.3	2	
	17	57.3	14	1859.8	1	
	18	87.8	17	1441.8	3	
26	1	63.0	10	1293.1	1	1
	2	59.6	6	1438.1	2	
	3	96.8	11	1265.7	2	
	4	70.2	17	1297.1	1	
	5	67.0	6	1471.2	1	
	6	65.7	13	1992.8	1	
	7	82.3	14	1029.3	1	
	8	94.6	11	1139.7	3	
	9	50.9	5	1411.5	1	
	10	95.6	15	1405.3	1	
	11	75.3	17	1799.5	3	
	12	81.8	8	1598.7	2	
	13	57.3	9	1710.8	1	
	14	90.5	8	1400.3	1	
	15	83.2	16	1878.9	1	
	16	51.5	14	1089.9	2	

Test Mode	802 .11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	1	61.3	15	1718.7	2	1
	2	73.7	18	1926.3	3	
	3	53.2	16	1000.2	2	
	4	77.6	7	1636.3	1	
	5	62.5	11	1833.6	3	
	6	89.0	8	1689.1	1	
	7	59.0	14	1509.5	2	
	8	56.8	19	1005.6	3	
	9	79.6	15	1480.0	2	
	10	75.3	6	1039.9	3	
	11	63.4	11	1652.0	2	
	12	94.1	15	1787.3	1	
	13	92.4	15	1881.0	1	
	14	99.3	14	1320.3	3	
	15	70.9	15	1243.0	2	
	16	68.7	16	1605.0	2	
	17	53.0	8	1026.0	3	
	18	76.5	6	1773.8	2	
	19	75.4	12	1269.8	2	
	20	99.8	18	1437.6	1	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI(us)	Number of Pulses/ Burst	1=Detection ; 0=No Detection
28	1	75.6	14	1226.1	3	1
	2	100.0	15	1484.3	1	
	3	53.0	11	1686.0	1	
	4	67.0	16	1801.7	2	
	5	66.5	5	1126.5	2	
	6	84.5	9	1366.4	2	
	7	96.4	18	1831.6	2	
	8	88.8	11	1402.7	2	
	9	70.2	12	1678.4	2	
	10	83.1	11	1312.0	3	
	11	50.2	18	1539.1	3	
	12	77.2	6	1654.2	2	
	13	85.6	13	1420.2	2	
	14	55.5	11	1984.0	3	
	15	68.3	8	1021.1	2	
	16	52.4	19	1206.2	3	
	17	56.1	8	1014.5	1	
	18	90.3	8	1863.5	3	
	19	78.1	9	1643.4	1	
	20	67.6	7	1615.2	3	

Test Mode	802.11 ax20					
Frequency	5500 MHz					
Radar signal	Type 5					
Trial #	Burst#	Pulses width (us)	chirp width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	1	64.8	11	1988.8	1	1
	2	69.4	17	1768.2	3	
	3	82.7	10	1985.0	2	
	4	70.1	13	1402.5	2	
	5	61.0	16	1671.4	1	
	6	81.7	20	1421.2	2	
	7	92.2	8	1095.4	1	
	8	66.9	5	1494.9	1	
	9	63.6	11	1232.0	3	
	10	79.9	9	1486.7	1	
	11	74.0	7	1410.6	1	
	12	53.0	11	1212.5	1	
	13	64.2	6	1098.1	1	
	14	78.6	13	1150.9	1	
	15	60.2	15	1062.4	3	
	16	97.6	17	1498.3	3	
	17	72.8	10	1335.9	3	
30	1	59.4	8	1628.4	1	0
	2	76.6	8	1845.2	1	
	3	63.6	18	1071.4	3	
	4	61.0	16	1421.0	3	
	5	87.2	17	1634.5	3	
	6	99.6	10	1955.4	2	
	7	84.9	16	1209.0	1	
	8	98.2	6	1912.6	1	
	9	97.3	19	1909.7	3	
	10	66.7	15	1252.1	2	
	11	95.7	9	1974.1	2	
	12	71.2	17	1382.5	1	
	13	80.6	5	1374.2	1	
	14	68.8	19	1504.7	2	
Detection percentage (%)						90.0

Test Mode		802.11 ax20				
Frequency		5500 MHz				
Radar signal		Type 6				
Trial #	Pulse width (us)	PR I (us)	Pulses / Hop	Hopping Rate (KHz)	Hopping sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection percentage (%)						100.0

4.TEST SETUP PHOTO



End of Test Report