



Channel 64 / 5320 MHz

Horizontal

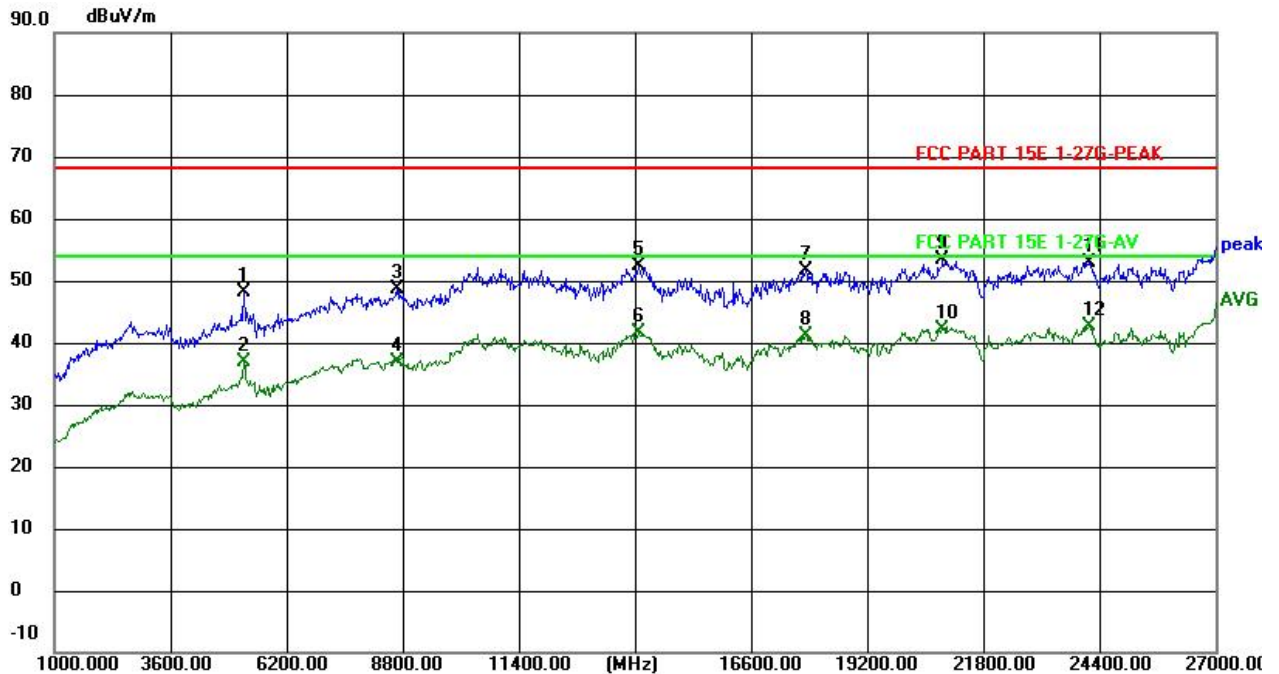

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5238.000	51.74	-3.69	48.05	68.20	-20.15	peak
2		5238.000	40.47	-3.69	36.78	54.00	-17.22	AVG
3		8670.000	47.09	1.56	48.65	68.20	-19.55	peak
4		8670.000	35.44	1.56	37.00	54.00	-17.00	AVG
5		14078.000	43.19	9.24	52.43	68.20	-15.77	peak
6		14078.000	32.36	9.24	41.60	54.00	-12.40	AVG
7		17822.000	35.01	16.53	51.54	68.20	-16.66	peak
8		17822.000	24.71	16.53	41.24	54.00	-12.76	AVG
9		20890.000	41.33	11.97	53.30	68.20	-14.90	peak
10		20890.000	30.04	11.97	42.01	54.00	-11.99	AVG
11		24166.000	39.68	13.31	52.99	68.20	-15.21	peak
12	*	24166.000	29.29	13.31	42.60	54.00	-11.40	AVG

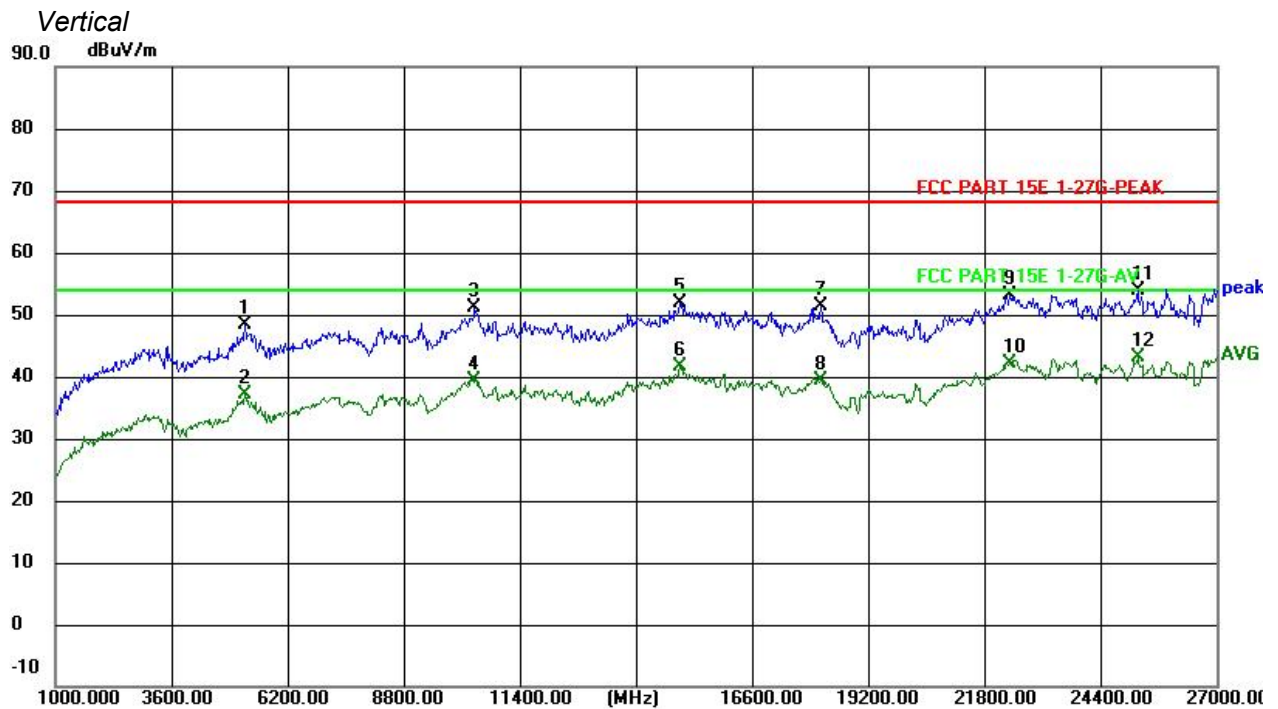


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5238.000	52.11	-3.69	48.42	68.20	-19.78	peak
2		5238.000	40.92	-3.69	37.23	54.00	-16.77	AVG
3		10386.000	46.88	4.25	51.13	68.20	-17.07	peak
4		10386.000	35.11	4.25	39.36	54.00	-14.64	AVG
5		14988.000	41.96	9.99	51.95	68.20	-16.25	peak
6		14988.000	31.58	9.99	41.57	54.00	-12.43	AVG
7		18134.000	41.01	10.48	51.49	68.20	-16.71	peak
8		18134.000	28.94	10.48	39.42	54.00	-14.58	AVG
9		22372.000	40.72	12.43	53.15	68.20	-15.05	peak
10		22372.000	29.79	12.43	42.22	54.00	-11.78	AVG
11		25232.000	40.04	13.87	53.91	68.20	-14.29	peak
12	*	25232.000	29.15	13.87	43.02	54.00	-10.98	AVG


IEEE 802.11ac VHT20 MIMO (worst case)

Channel 52 / 5260 MHz

Horizontal

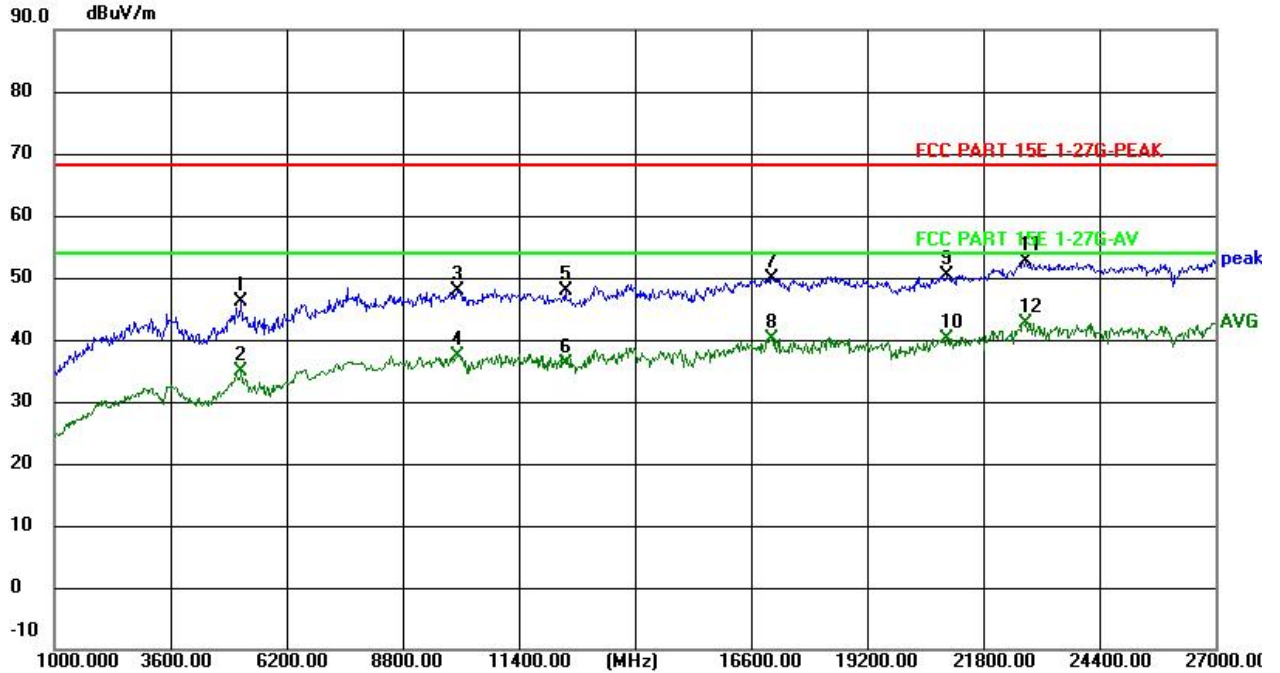


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5186.000	49.93	-3.77	46.16	68.20	-22.04	peak
2		5186.000	38.53	-3.77	34.76	54.00	-19.24	AVG
3		10022.000	44.19	3.59	47.78	68.20	-20.42	peak
4		10022.000	33.88	3.59	37.47	54.00	-16.53	AVG
5		12440.000	41.36	6.49	47.85	68.20	-20.35	peak
6		12440.000	29.69	6.49	36.18	54.00	-17.82	AVG
7		17068.000	38.23	11.76	49.99	68.20	-18.21	peak
8		17068.000	28.25	11.76	40.01	54.00	-13.99	AVG
9		20994.000	38.33	12.03	50.36	68.20	-17.84	peak
10		20994.000	28.07	12.03	40.10	54.00	-13.90	AVG
11		22736.000	40.00	12.69	52.69	68.20	-15.51	peak
12	*	22736.000	29.92	12.69	42.61	54.00	-11.39	AVG

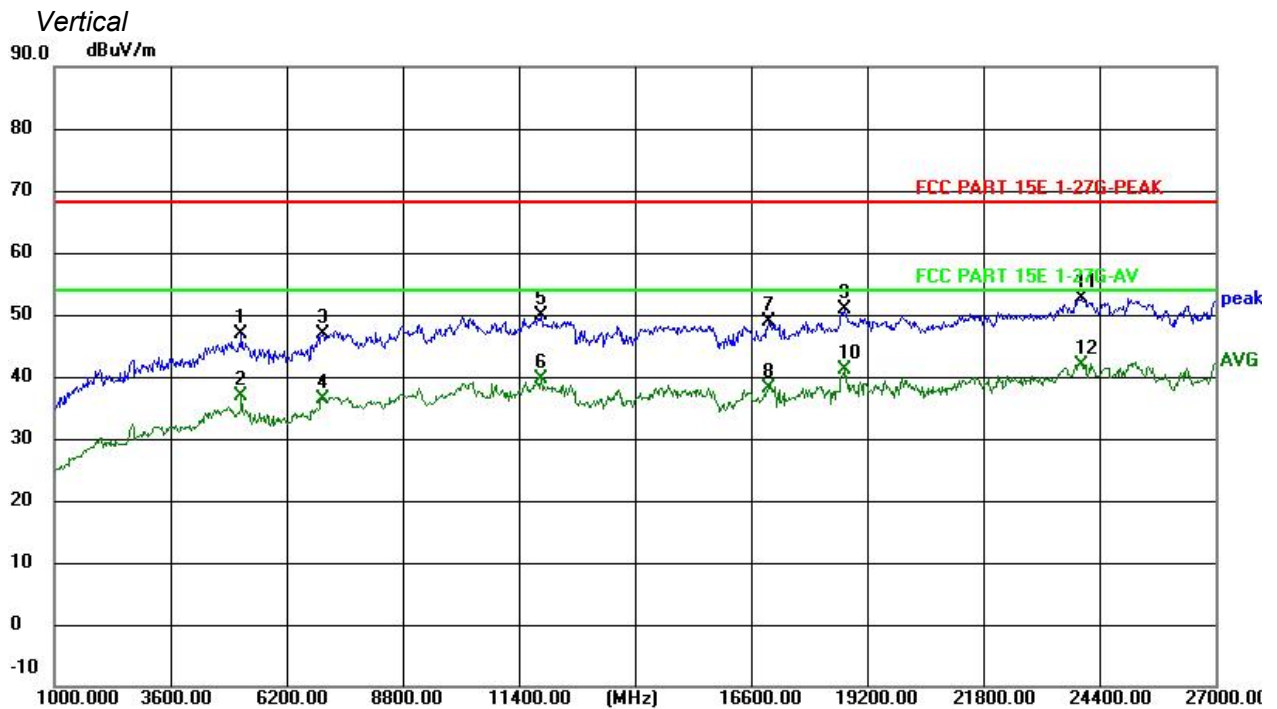


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5186.000	50.58	-3.77	46.81	68.20	-21.39	peak
2		5186.000	40.65	-3.77	36.88	54.00	-17.12	AVG
3		7006.000	47.15	-0.19	46.96	68.20	-21.24	peak
4		7006.000	36.67	-0.19	36.48	54.00	-17.52	AVG
5		11894.000	43.26	6.54	49.80	68.20	-18.40	peak
6		11894.000	32.99	6.54	39.53	54.00	-14.47	AVG
7		16990.000	37.61	11.29	48.90	68.20	-19.30	peak
8		16990.000	26.74	11.29	38.03	54.00	-15.97	AVG
9		18680.000	39.94	10.88	50.82	68.20	-17.38	peak
10		18680.000	30.21	10.88	41.09	54.00	-12.91	AVG
11		23984.000	39.39	13.23	52.62	68.20	-15.58	peak
12	*	23984.000	28.56	13.23	41.79	54.00	-12.21	AVG

Channel 60 / 5300 MHz

Horizontal

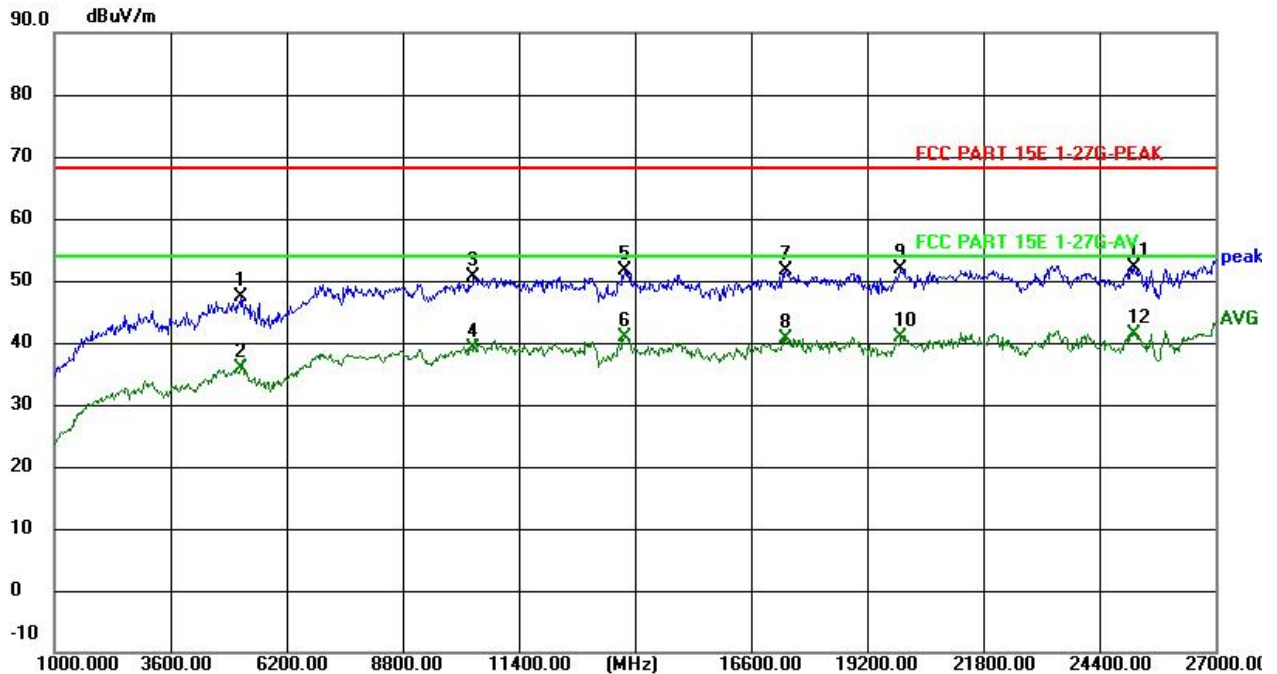


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5186.000	51.03	-3.77	47.26	68.20	-20.94	peak
2		5186.000	39.57	-3.77	35.80	54.00	-18.20	AVG
3		10386.000	46.44	4.25	50.69	68.20	-17.51	peak
4		10386.000	34.96	4.25	39.21	54.00	-14.79	AVG
5		13766.000	43.24	8.49	51.73	68.20	-16.47	peak
6		13766.000	32.33	8.49	40.82	54.00	-13.18	AVG
7		17380.000	37.97	13.73	51.70	68.20	-16.50	peak
8		17380.000	27.00	13.73	40.73	54.00	-13.27	AVG
9		19954.000	40.36	11.46	51.82	68.20	-16.38	peak
10		19954.000	29.51	11.46	40.97	54.00	-13.03	AVG
11		25180.000	38.39	13.82	52.21	68.20	-15.99	peak
12	*	25180.000	27.47	13.82	41.29	54.00	-12.71	AVG

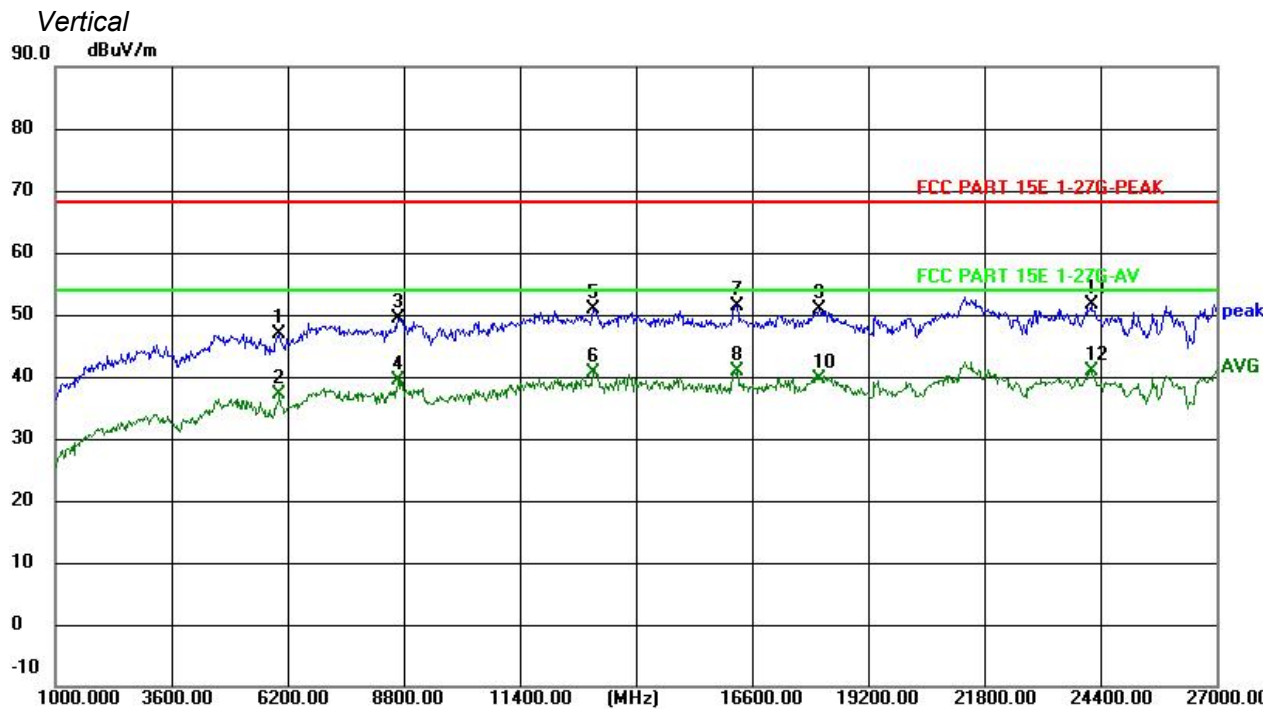


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		6018.000	50.56	-3.61	46.95	68.20	-21.25	peak
2		6018.000	40.62	-3.61	37.01	54.00	-16.99	AVG
3		8670.000	47.96	1.49	49.45	68.20	-18.75	peak
4		8670.000	37.86	1.49	39.35	54.00	-14.65	AVG
5		13038.000	44.62	6.36	50.98	68.20	-17.22	peak
6		13038.000	34.25	6.36	40.61	54.00	-13.39	AVG
7		16262.000	43.12	8.37	51.49	68.20	-16.71	peak
8	*	16262.000	32.60	8.37	40.97	54.00	-13.03	AVG
9		18108.000	40.30	10.46	50.76	68.20	-17.44	peak
10		18108.000	29.16	10.46	39.62	54.00	-14.38	AVG
11		24192.000	38.38	13.32	51.70	68.20	-16.50	peak
12		24192.000	27.50	13.32	40.82	54.00	-13.18	AVG

Channel 64 / 5320 MHz

Horizontal

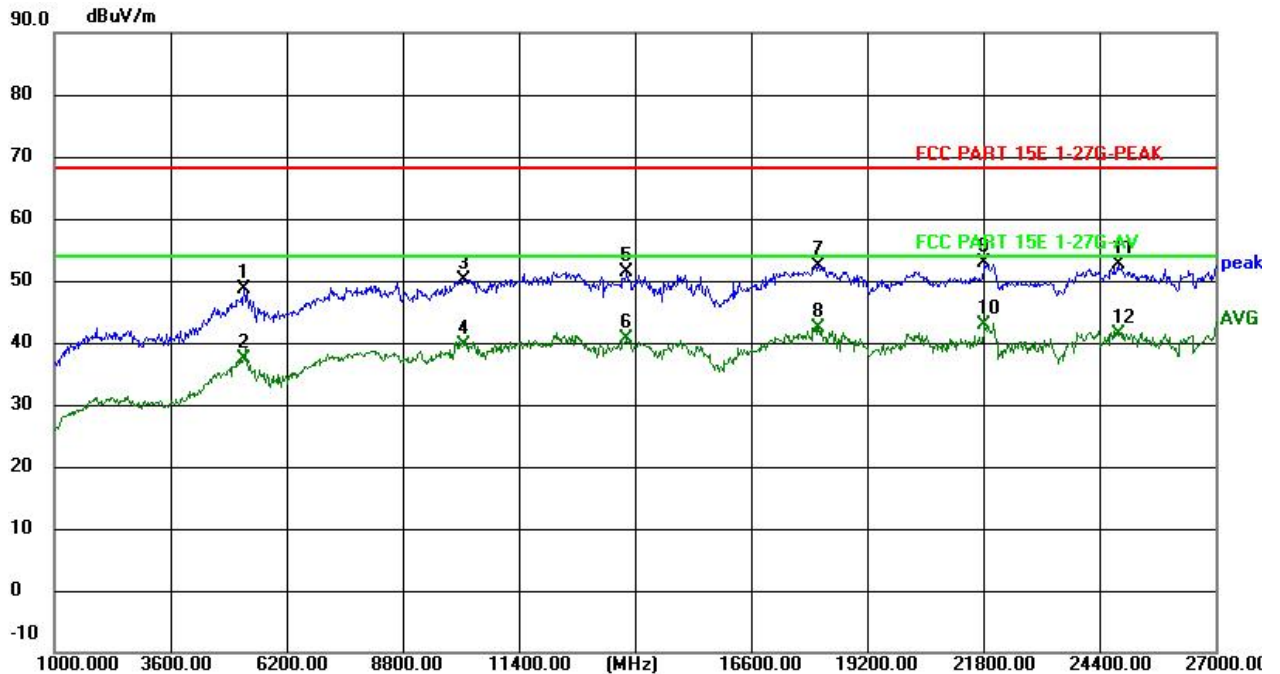


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5238.000	52.24	-3.69	48.55	68.20	-19.65	peak
2		5238.000	40.97	-3.69	37.28	54.00	-16.72	AVG
3		10152.000	46.41	3.82	50.23	68.20	-17.97	peak
4		10152.000	35.90	3.82	39.72	54.00	-14.28	AVG
5		13818.000	42.71	8.64	51.35	68.20	-16.85	peak
6		13818.000	32.08	8.64	40.72	54.00	-13.28	AVG
7		18108.000	41.90	10.46	52.36	68.20	-15.84	peak
8		18108.000	31.81	10.46	42.27	54.00	-11.73	AVG
9		21826.000	40.66	12.13	52.79	68.20	-15.41	peak
10	*	21826.000	30.76	12.13	42.89	54.00	-11.11	AVG
11		24816.000	39.14	13.59	52.73	68.20	-15.47	peak
12		24816.000	27.89	13.59	41.48	54.00	-12.52	AVG

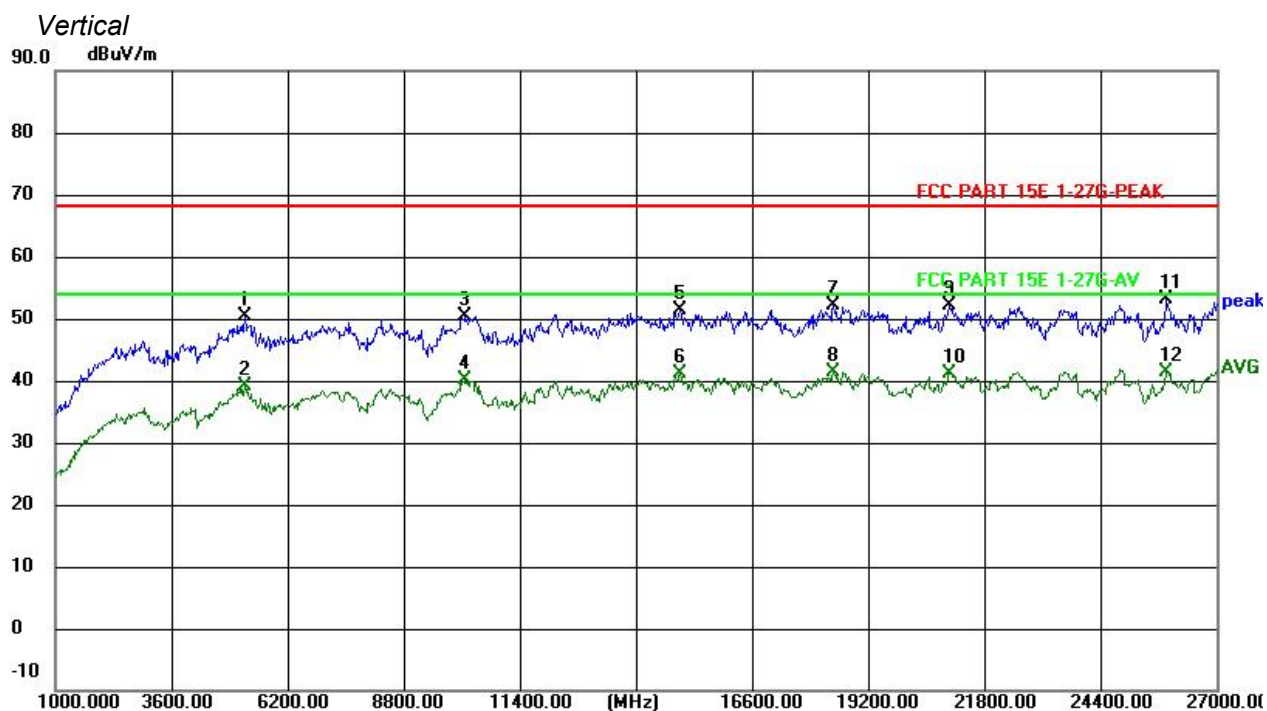


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5238.000	54.11	-3.69	50.42	68.20	-17.78	peak
2		5238.000	42.92	-3.69	39.23	54.00	-14.77	AVG
3		10178.000	46.41	3.87	50.28	68.20	-17.92	peak
4		10178.000	36.24	3.87	40.11	54.00	-13.89	AVG
5		14988.000	41.46	9.99	51.45	68.20	-16.75	peak
6		14988.000	31.08	9.99	41.07	54.00	-12.93	AVG
7		18420.000	41.35	10.69	52.04	68.20	-16.16	peak
8		18420.000	30.65	10.69	41.34	54.00	-12.66	AVG
9		21020.000	40.03	12.03	52.06	68.20	-16.14	peak
10		21020.000	29.05	12.03	41.08	54.00	-12.92	AVG
11		25882.000	38.60	14.42	53.02	68.20	-15.18	peak
12	*	25882.000	27.04	14.42	41.46	54.00	-12.54	AVG

IEEE 802.11n HT40 MIMO (worst case)
Channel 54 / 5270 MHz

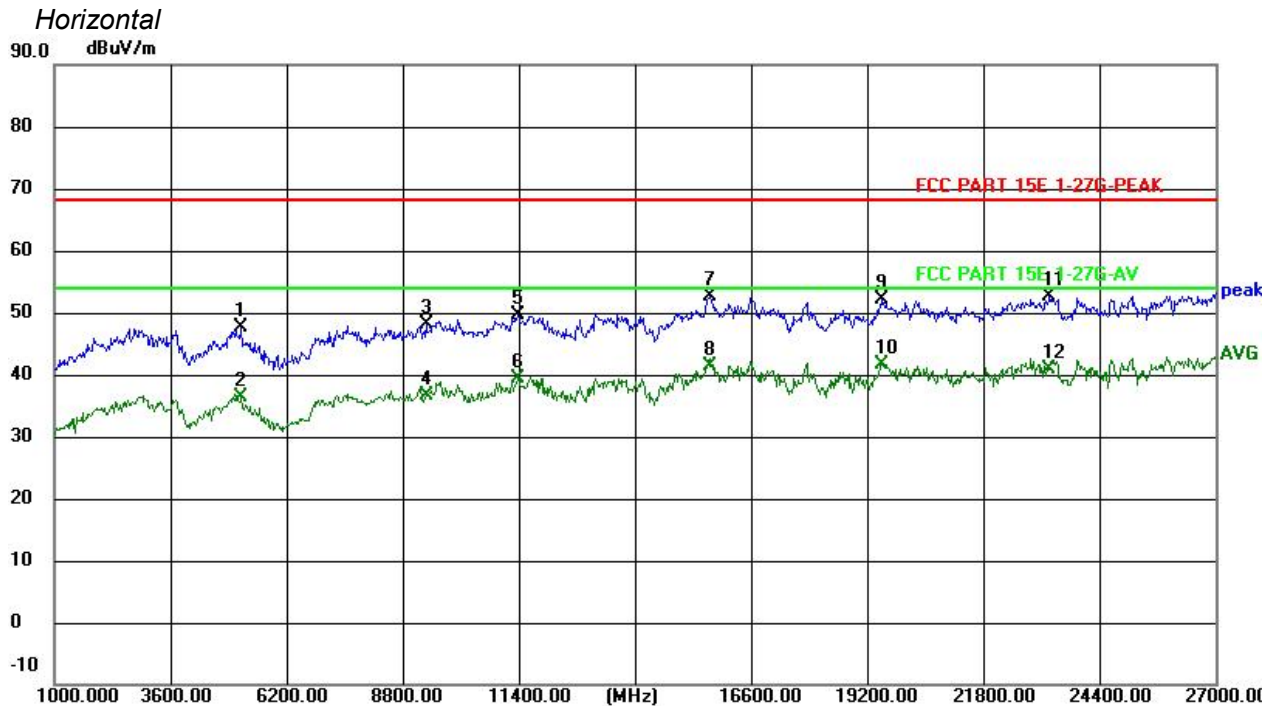


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5186.000	51.43	-3.77	47.66	68.20	-20.54	peak
2		5186.000	40.03	-3.77	36.26	54.00	-17.74	AVG
3		9320.000	45.75	2.43	48.18	68.20	-20.02	peak
4		9320.000	34.29	2.43	36.72	54.00	-17.28	AVG
5		11374.000	43.87	5.84	49.71	68.20	-18.49	peak
6		11374.000	33.51	5.84	39.35	54.00	-14.65	AVG
7		15690.000	44.55	8.15	52.70	68.20	-15.50	peak
8		15690.000	33.19	8.15	41.34	54.00	-12.66	AVG
9		19538.000	40.94	11.31	52.25	68.20	-15.95	peak
10	*	19538.000	30.27	11.31	41.58	54.00	-12.42	AVG
11		23282.000	39.74	12.99	52.73	68.20	-15.47	peak
12		23282.000	27.83	12.99	40.82	54.00	-13.18	AVG

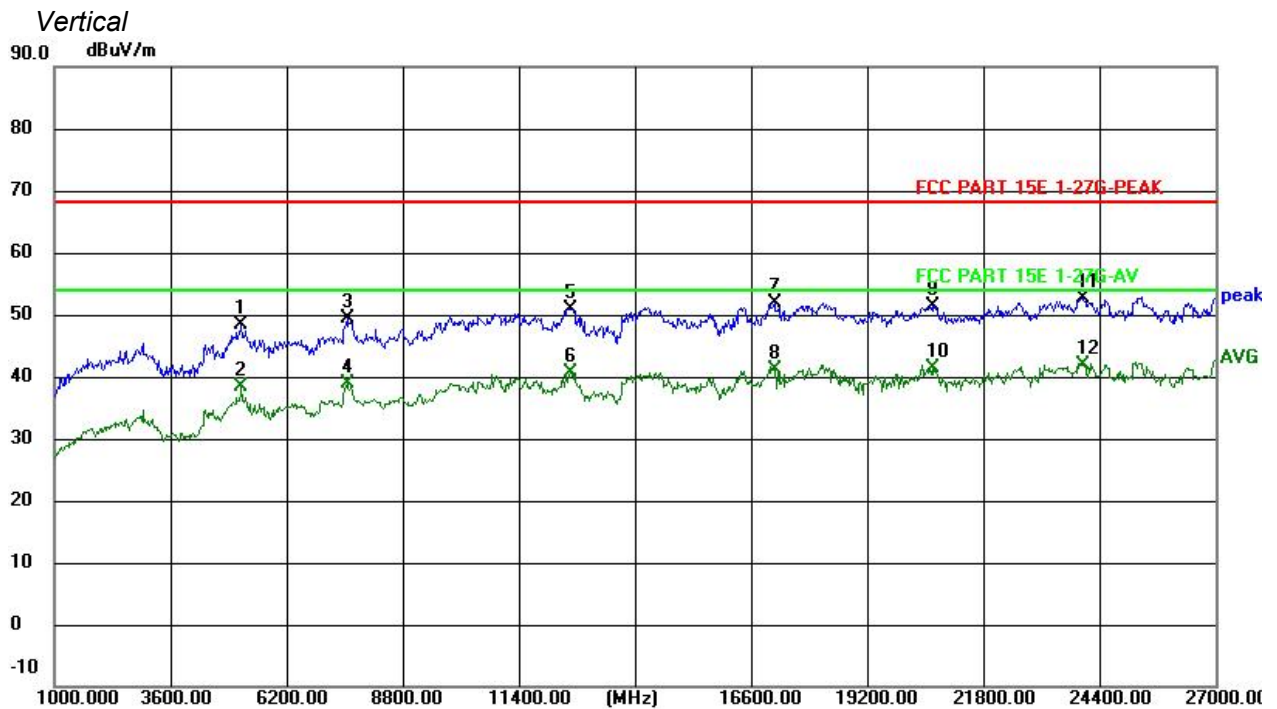


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5186.000	52.08	-3.77	48.31	68.20	-19.89	peak
2		5186.000	42.15	-3.77	38.38	54.00	-15.62	AVG
3		7552.000	48.67	0.66	49.33	68.20	-18.87	peak
4		7552.000	38.24	0.66	38.90	54.00	-15.10	AVG
5		12544.000	44.55	6.44	50.99	68.20	-17.21	peak
6		12544.000	34.14	6.44	40.58	54.00	-13.42	AVG
7		17120.000	39.83	12.10	51.93	68.20	-16.27	peak
8		17120.000	29.15	12.10	41.25	54.00	-12.75	AVG
9		20656.000	39.58	11.84	51.42	68.20	-16.78	peak
10		20656.000	29.50	11.84	41.34	54.00	-12.66	AVG
11		24036.000	39.38	13.26	52.64	68.20	-15.56	peak
12	*	24036.000	28.62	13.26	41.88	54.00	-12.12	AVG

Channel 62 / 5310 MHz

Horizontal

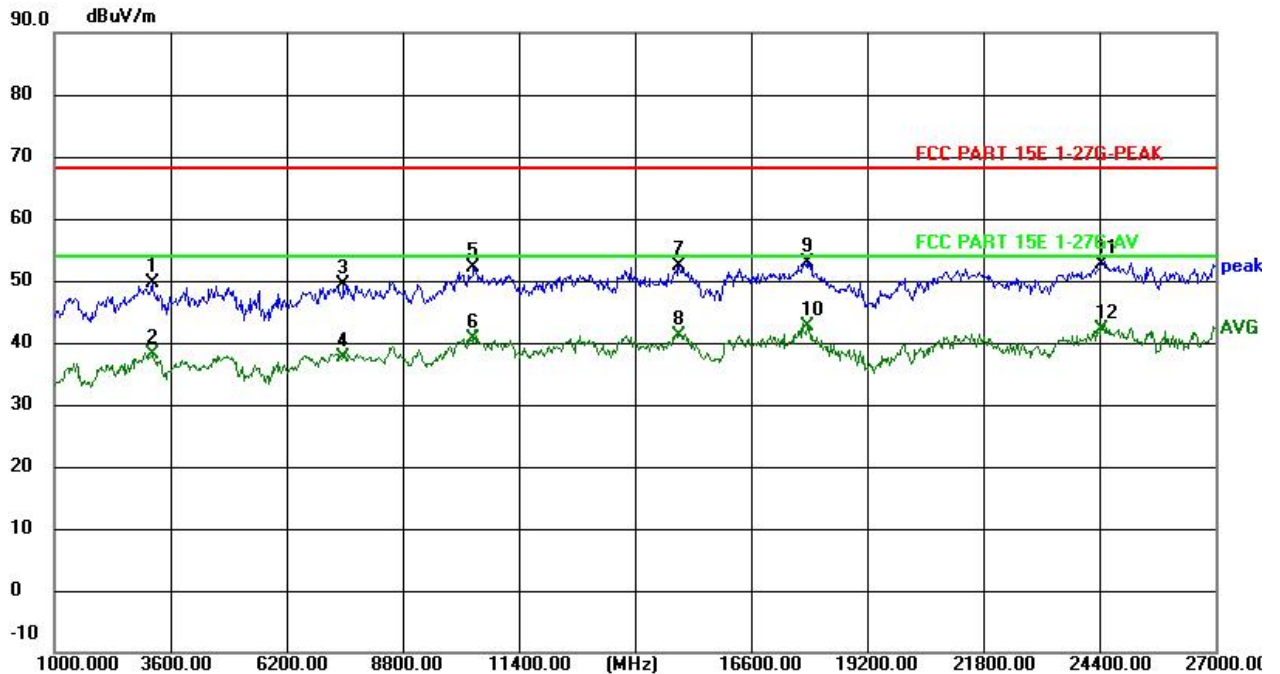

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		3184.000	59.19	-9.52	49.67	68.20	-18.53	peak
2		3184.000	47.59	-9.52	38.07	54.00	-15.93	AVG
3		7474.000	48.81	0.59	49.40	68.20	-18.80	peak
4		7474.000	37.05	0.59	37.64	54.00	-16.36	AVG
5		10386.000	47.94	4.25	52.19	68.20	-16.01	peak
6		10386.000	36.46	4.25	40.71	54.00	-13.29	AVG
7		14988.000	42.41	9.99	52.40	68.20	-15.80	peak
8		14988.000	31.14	9.99	41.13	54.00	-12.87	AVG
9		17848.000	36.24	16.69	52.93	68.20	-15.27	peak
10	*	17848.000	25.99	16.69	42.68	54.00	-11.32	AVG
11		24452.000	39.23	13.43	52.66	68.20	-15.54	peak
12		24452.000	28.72	13.43	42.15	54.00	-11.85	AVG

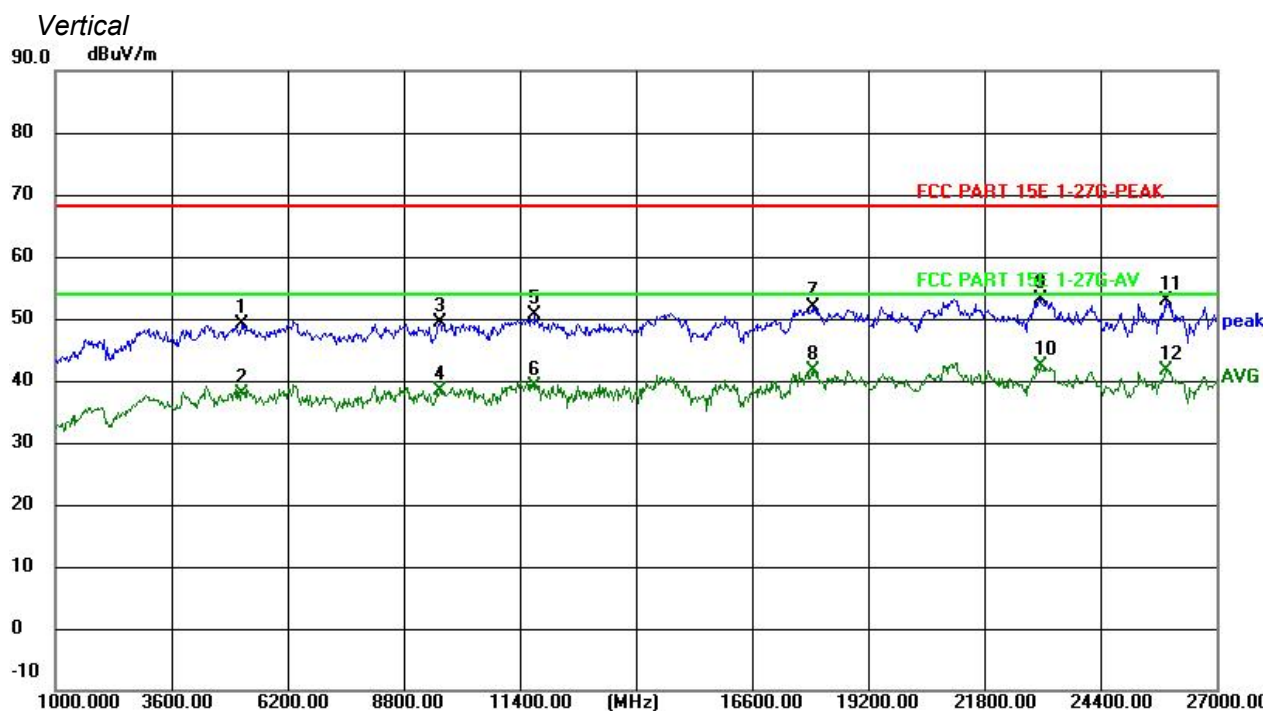


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5186.000	52.82	-3.77	49.05	68.20	-19.15	peak
2		5186.000	41.56	-3.77	37.79	54.00	-16.21	AVG
3		9606.000	46.45	2.89	49.34	68.20	-18.86	peak
4		9606.000	35.57	2.89	38.46	54.00	-15.54	AVG
5		11738.000	44.19	6.33	50.52	68.20	-17.68	peak
6		11738.000	32.86	6.33	39.19	54.00	-14.81	AVG
7		17952.000	34.57	17.36	51.93	68.20	-16.27	peak
8		17952.000	24.30	17.36	41.66	54.00	-12.34	AVG
9		23048.000	40.33	12.91	53.24	68.20	-14.96	peak
10	*	23048.000	29.58	12.91	42.49	54.00	-11.51	AVG
11		25856.000	38.41	14.40	52.81	68.20	-15.39	peak
12		25856.000	27.26	14.40	41.66	54.00	-12.34	AVG


IEEE 802.11ac VHT40 MIMO (worst case)

Channel 54 / 5270 MHz

Horizontal

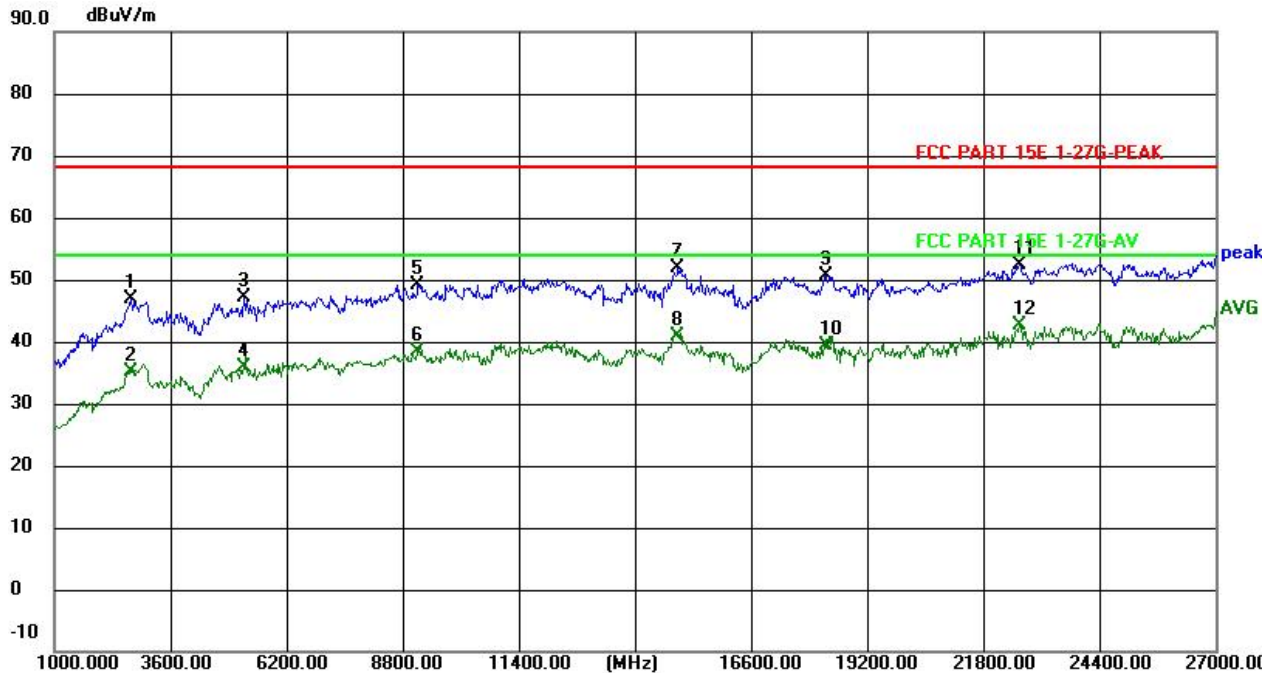


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		2716.000	57.58	-10.59	46.99	68.20	-21.21	peak
2		2716.000	45.65	-10.59	35.06	54.00	-18.94	AVG
3		5238.000	50.74	-3.69	47.05	68.20	-21.15	peak
4		5238.000	39.47	-3.69	35.78	54.00	-18.22	AVG
5		9138.000	46.98	2.13	49.11	68.20	-19.09	peak
6		9138.000	36.37	2.13	38.50	54.00	-15.50	AVG
7		14962.000	41.99	9.97	51.96	68.20	-16.24	peak
8		14962.000	30.95	9.97	40.92	54.00	-13.08	AVG
9		18290.000	40.05	10.59	50.64	68.20	-17.56	peak
10		18290.000	28.85	10.59	39.44	54.00	-14.56	AVG
11		22606.000	39.89	12.60	52.49	68.20	-15.71	peak
12	*	22606.000	29.98	12.60	42.58	54.00	-11.42	AVG

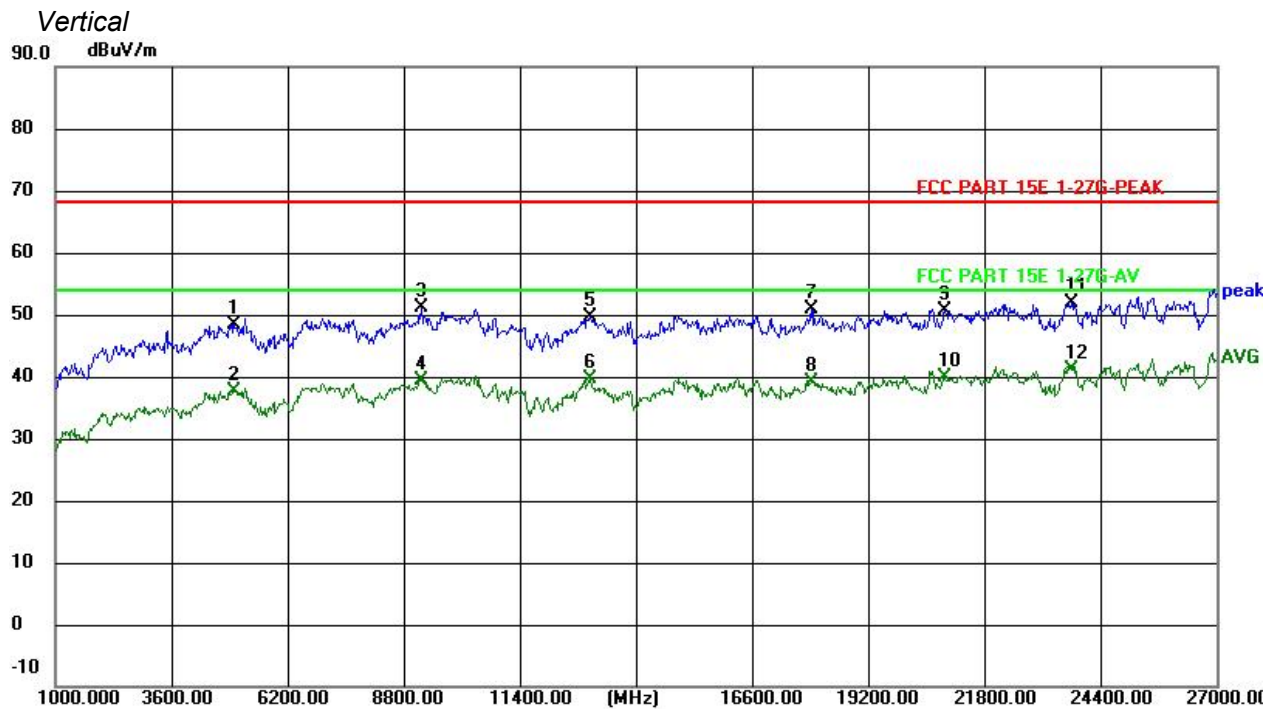


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5004.000	52.54	-4.11	48.43	68.20	-19.77	peak
2		5004.000	41.81	-4.11	37.70	54.00	-16.30	AVG
3		9190.000	48.84	2.21	51.05	68.20	-17.15	peak
4		9190.000	37.24	2.21	39.45	54.00	-14.55	AVG
5		12960.000	43.48	6.25	49.73	68.20	-18.47	peak
6		12960.000	33.42	6.25	39.67	54.00	-14.33	AVG
7		17926.000	33.69	17.19	50.88	68.20	-17.32	peak
8		17926.000	21.90	17.19	39.09	54.00	-14.91	AVG
9		20916.000	38.73	11.98	50.71	68.20	-17.49	peak
10		20916.000	27.95	11.98	39.93	54.00	-14.07	AVG
11		23750.000	38.74	13.15	51.89	68.20	-16.31	peak
12	*	23750.000	27.94	13.15	41.09	54.00	-12.91	AVG

Channel 62 / 5310 MHz

Horizontal

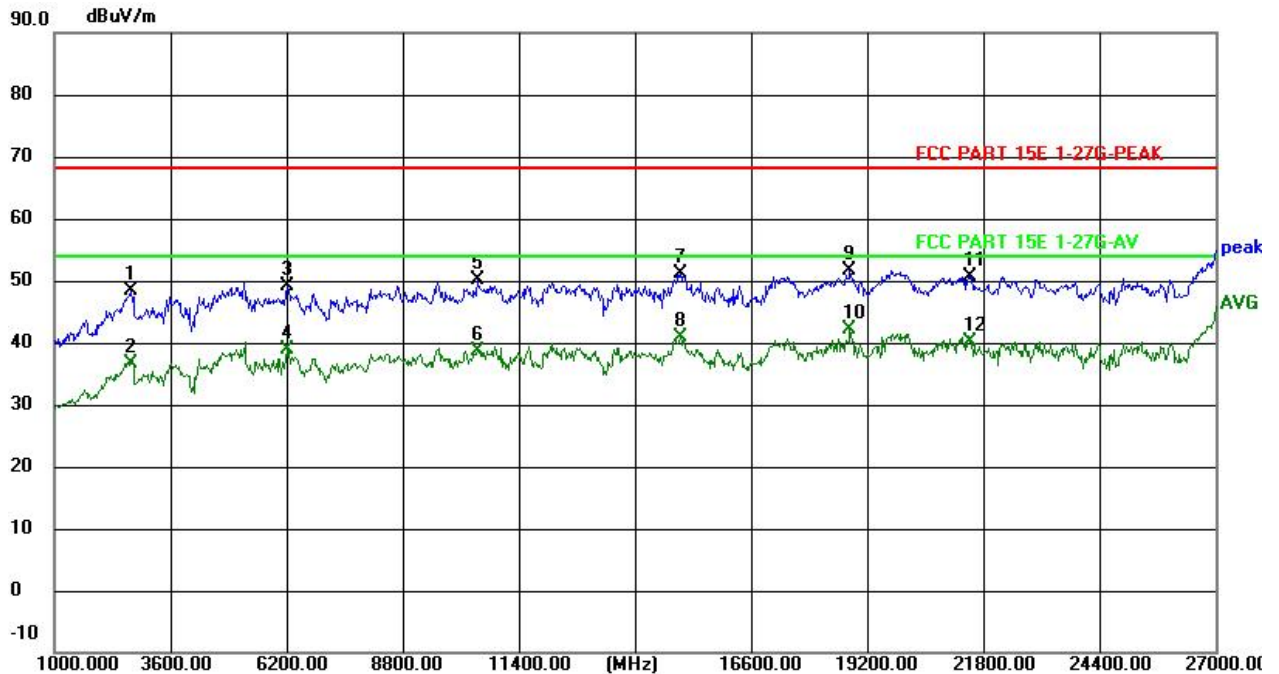

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		2716.000	59.08	-10.59	48.49	68.20	-19.71	peak
2		2716.000	47.15	-10.59	36.56	54.00	-17.44	AVG
3		6200.000	52.03	-2.79	49.24	68.20	-18.96	peak
4		6200.000	41.76	-2.79	38.97	54.00	-15.03	AVG
5		10464.000	45.67	4.38	50.05	68.20	-18.15	peak
6		10464.000	34.25	4.38	38.63	54.00	-15.37	AVG
7		15014.000	41.18	9.96	51.14	68.20	-17.06	peak
8		15014.000	30.80	9.96	40.76	54.00	-13.24	AVG
9		18810.000	40.72	10.98	51.70	68.20	-16.50	peak
10	*	18810.000	31.21	10.98	42.19	54.00	-11.81	AVG
11		21514.000	38.60	12.09	50.69	68.20	-17.51	peak
12		21514.000	28.08	12.09	40.17	54.00	-13.83	AVG

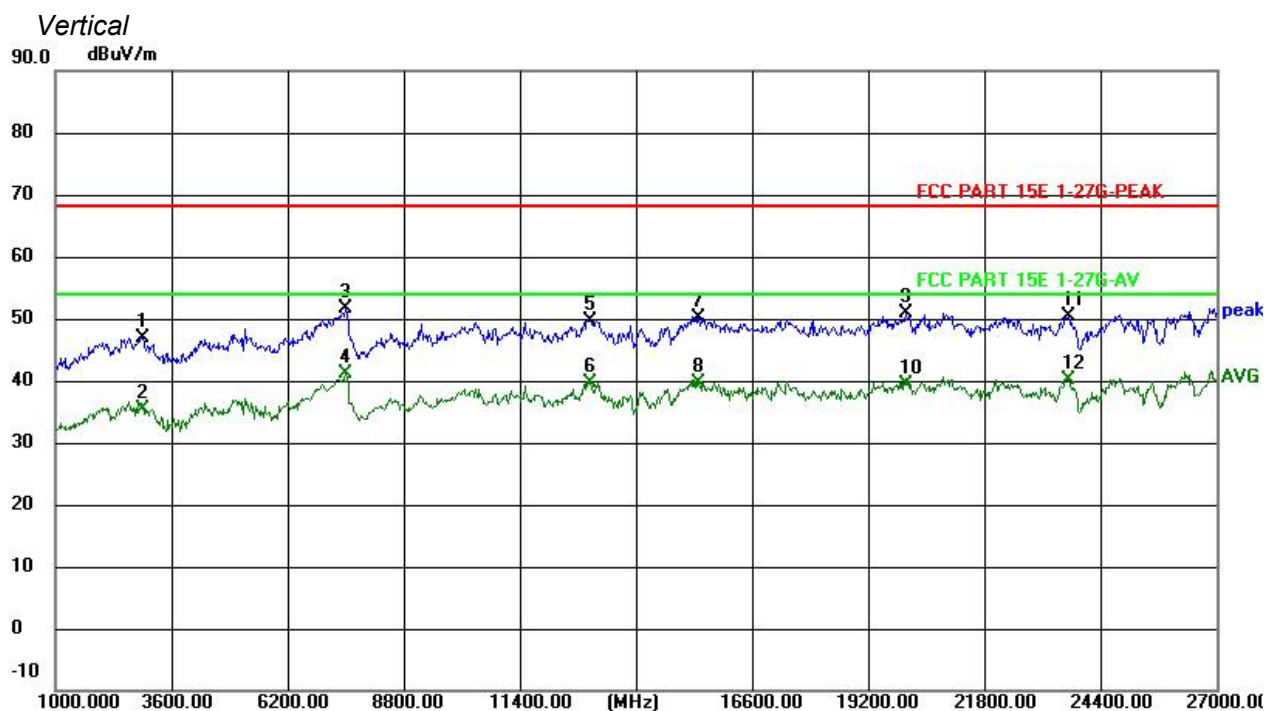


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		2950.000	56.71	-9.77	46.94	68.20	-21.26	peak
2		2950.000	45.13	-9.77	35.36	54.00	-18.64	AVG
3		7500.000	50.93	0.64	51.57	68.20	-16.63	peak
4	*	7500.000	40.47	0.64	41.11	54.00	-12.89	AVG
5		12960.000	43.48	6.25	49.73	68.20	-18.47	peak
6		12960.000	33.42	6.25	39.67	54.00	-14.33	AVG
7		15404.000	41.27	8.92	50.19	68.20	-18.01	peak
8		15404.000	30.81	8.92	39.73	54.00	-14.27	AVG
9		20032.000	39.47	11.50	50.97	68.20	-17.23	peak
10		20032.000	27.93	11.50	39.43	54.00	-14.57	AVG
11		23698.000	37.29	13.13	50.42	68.20	-17.78	peak
12		23698.000	27.04	13.13	40.17	54.00	-13.83	AVG


IEEE 802.11ac VHT80 MIMO (worst case)

Channel 42 / 5210 MHz

Horizontal

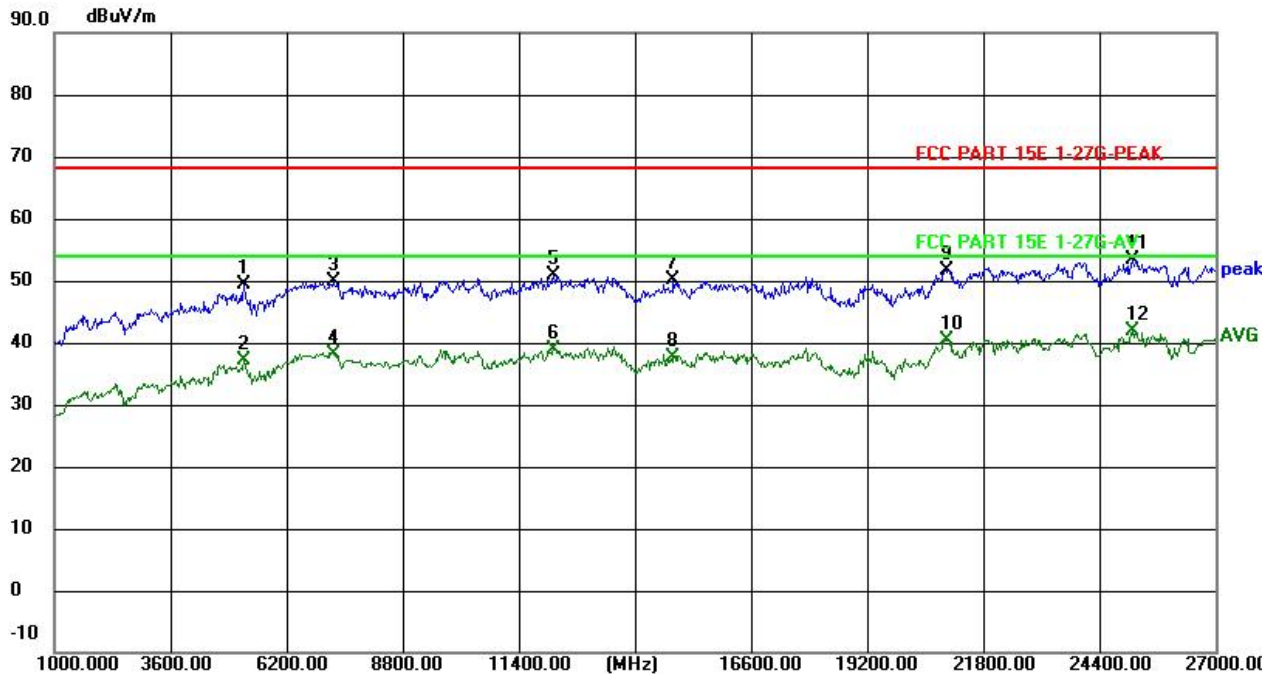

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5238.000	52.95	-3.69	49.26	68.20	-18.94	peak
2		5238.000	40.87	-3.69	37.18	54.00	-16.82	AVG
3		7240.000	49.56	0.21	49.77	68.20	-18.43	peak
4		7240.000	38.01	0.21	38.22	54.00	-15.78	AVG
5		12180.000	44.35	6.60	50.95	68.20	-17.25	peak
6		12180.000	32.28	6.60	38.88	54.00	-15.12	AVG
7		14858.000	40.26	9.88	50.14	68.20	-18.06	peak
8		14858.000	27.63	9.88	37.51	54.00	-16.49	AVG
9		20968.000	39.73	12.01	51.74	68.20	-16.46	peak
10		20968.000	28.39	12.01	40.40	54.00	-13.60	AVG
11		25128.000	39.62	13.78	53.40	68.20	-14.80	peak
12	*	25128.000	28.07	13.78	41.85	54.00	-12.15	AVG

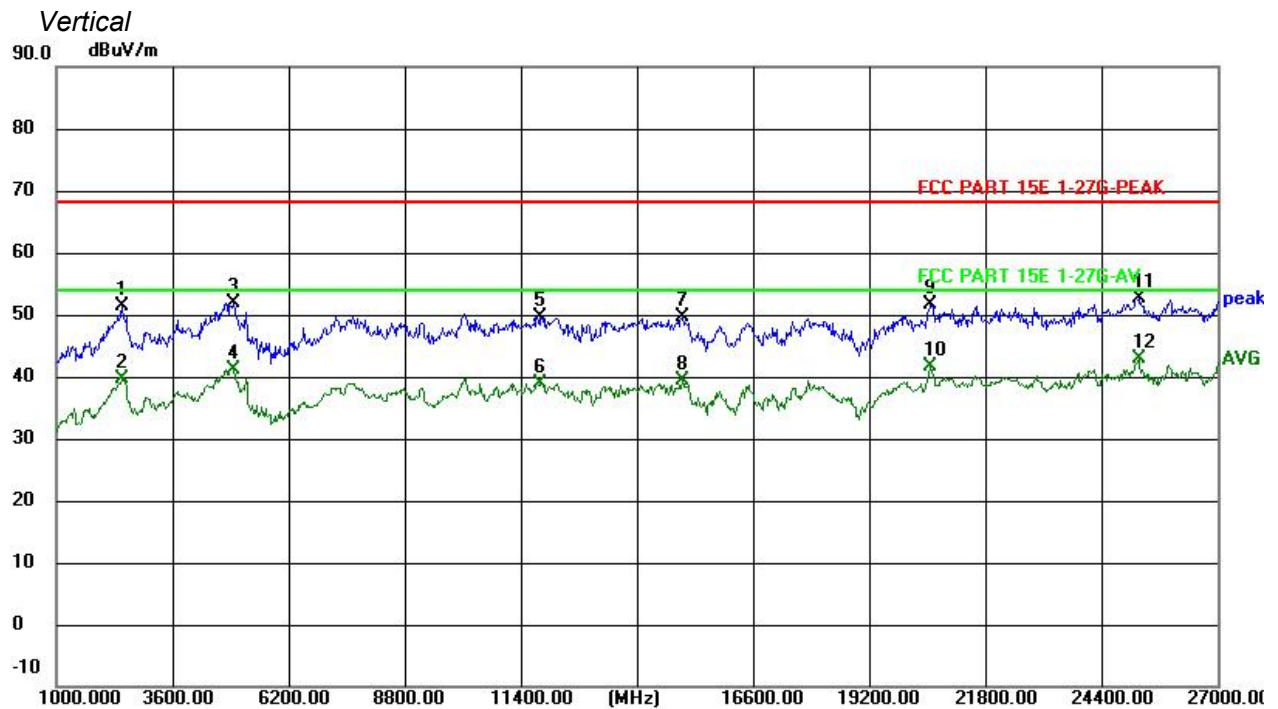


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		2456.000	62.87	-11.51	51.36	68.20	-16.84	peak
2		2456.000	51.02	-11.51	39.51	54.00	-14.49	AVG
3		4952.000	56.18	-4.36	51.82	68.20	-16.38	peak
4		4952.000	45.58	-4.36	41.22	54.00	-12.78	AVG
5		11842.000	43.26	6.48	49.74	68.20	-18.46	peak
6		11842.000	32.41	6.48	38.89	54.00	-15.11	AVG
7		15014.000	39.62	9.96	49.58	68.20	-18.62	peak
8		15014.000	29.45	9.96	39.41	54.00	-14.59	AVG
9		20578.000	39.77	11.80	51.57	68.20	-16.63	peak
10		20578.000	29.80	11.80	41.60	54.00	-12.40	AVG
11		25232.000	38.85	13.87	52.72	68.20	-15.48	peak
12	*	25232.000	29.11	13.87	42.98	54.00	-11.02	AVG


IEEE 802.11ac VHT80 MIMO (worst case)

Channel 58 / 5290 MHz

Horizontal

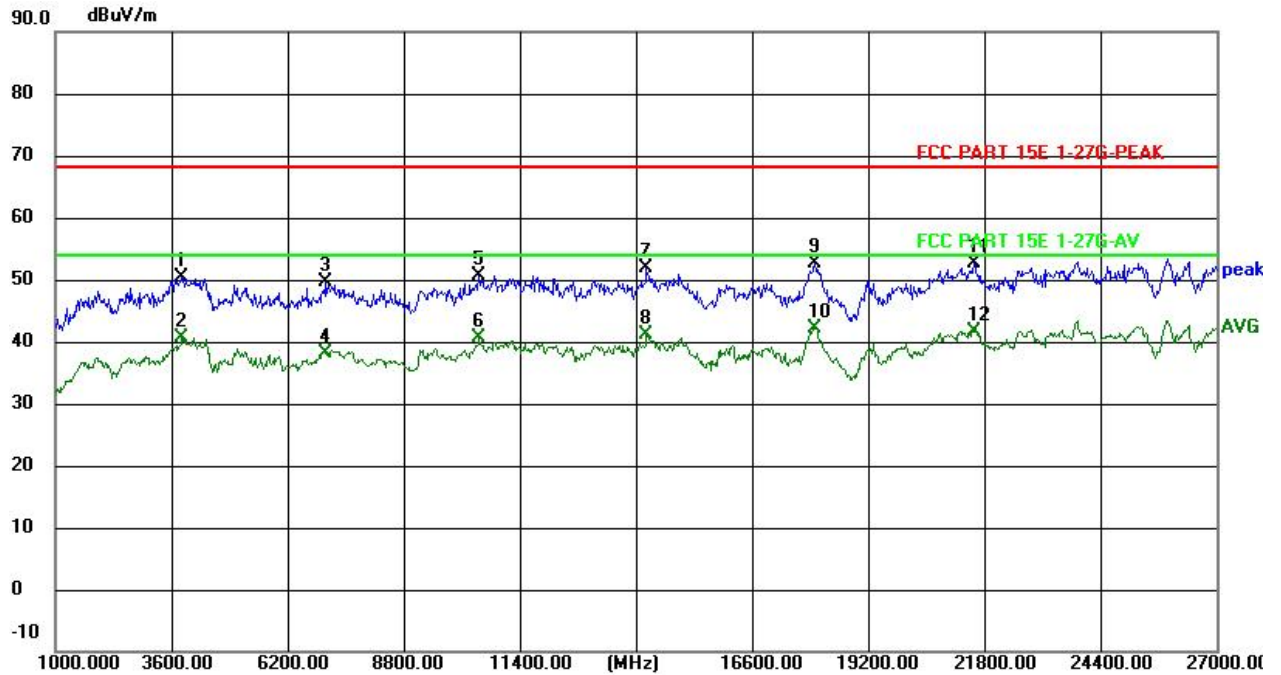

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		3834.000	59.13	-8.84	50.29	68.20	-17.91	peak
2		3834.000	49.45	-8.84	40.61	54.00	-13.39	AVG
3		7058.000	49.61	-0.10	49.51	68.20	-18.69	peak
4		7058.000	38.26	-0.10	38.16	54.00	-15.84	AVG
5		10490.000	46.27	4.43	50.70	68.20	-17.50	peak
6		10490.000	36.11	4.43	40.54	54.00	-13.46	AVG
7		14234.000	42.46	9.37	51.83	68.20	-16.37	peak
8		14234.000	31.70	9.37	41.07	54.00	-12.93	AVG
9		18004.000	42.28	10.38	52.66	68.20	-15.54	peak
10	*	18004.000	31.77	10.38	42.15	54.00	-11.85	AVG
11		21566.000	40.41	12.10	52.51	68.20	-15.69	peak
12		21566.000	29.60	12.10	41.70	54.00	-12.30	AVG

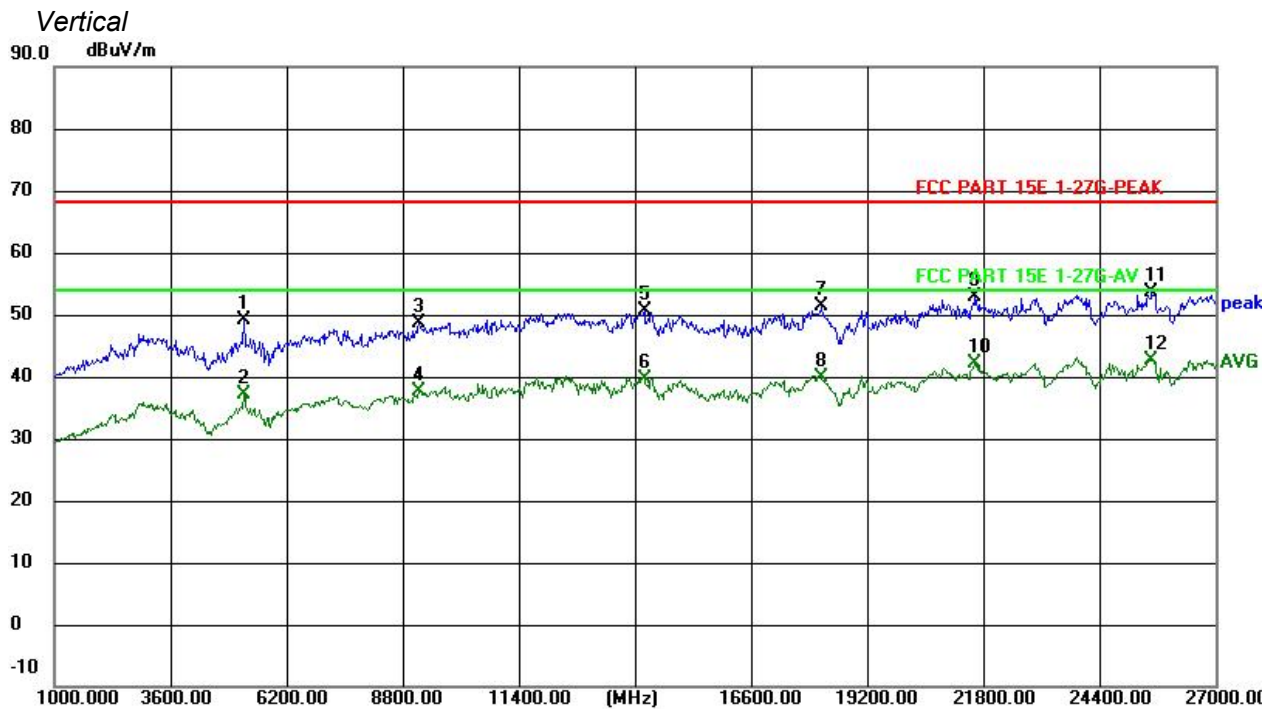


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		5238.000	52.78	-3.69	49.09	68.20	-19.11	peak
2		5238.000	40.83	-3.69	37.14	54.00	-16.86	AVG
3		9164.000	46.53	2.16	48.69	68.20	-19.51	peak
4		9164.000	35.46	2.16	37.62	54.00	-16.38	AVG
5		14208.000	41.30	9.35	50.65	68.20	-17.55	peak
6		14208.000	30.22	9.35	39.57	54.00	-14.43	AVG
7		18186.000	40.89	10.52	51.41	68.20	-16.79	peak
8		18186.000	29.40	10.52	39.92	54.00	-14.08	AVG
9		21618.000	40.74	12.10	52.84	68.20	-15.36	peak
10		21618.000	29.99	12.10	42.09	54.00	-11.91	AVG
11		25570.000	39.55	14.15	53.70	68.20	-14.50	peak
12	*	25570.000	28.47	14.15	42.62	54.00	-11.38	AVG


IEEE 802.11ac VHT160 MIMO (worst case)

Channel 50 / 5250 MHz

Horizontal

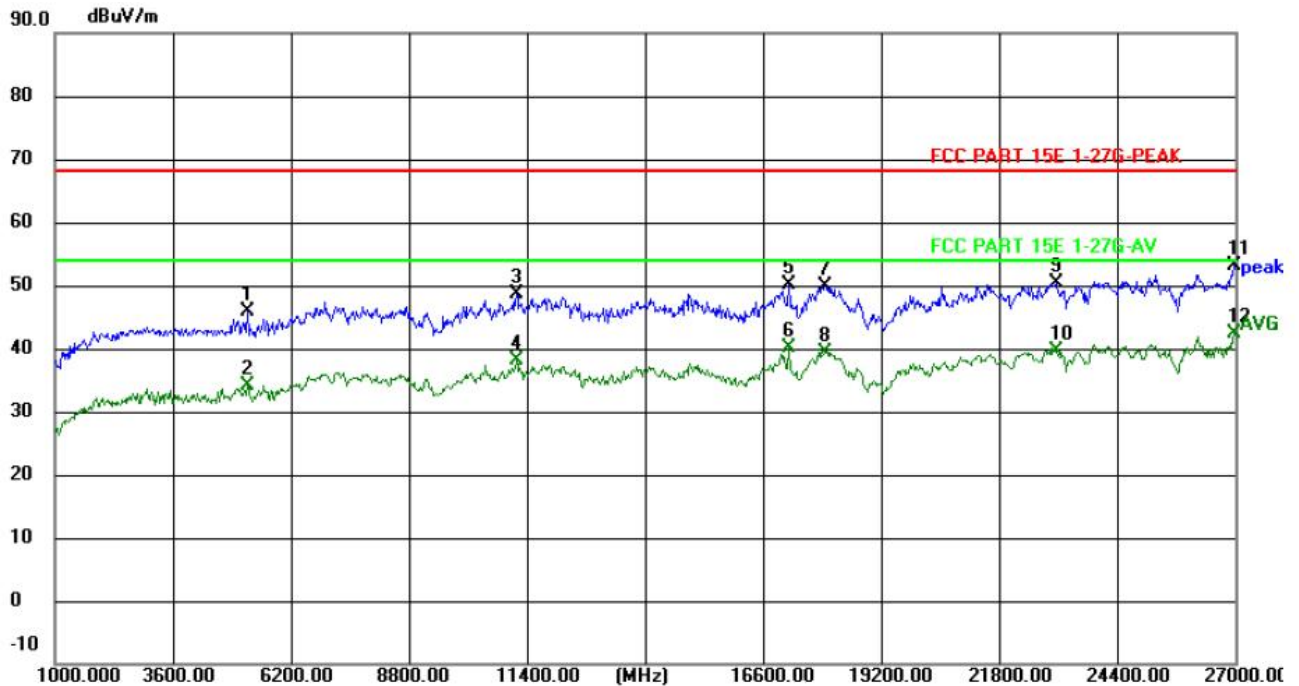

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5238.000	49.59	-3.69	45.90	68.20	-22.30	peak
2		5238.000	37.87	-3.69	34.18	54.00	-19.82	AVG
3		11166.000	43.10	5.57	48.67	68.20	-19.53	peak
4		11166.000	32.57	5.57	38.14	54.00	-15.86	AVG
5		17172.000	37.68	12.42	50.10	68.20	-18.10	peak
6		17172.000	27.73	12.42	40.15	54.00	-13.85	AVG
7		17978.000	32.46	17.52	49.98	68.20	-18.22	peak
8		17978.000	21.91	17.52	39.43	54.00	-14.57	AVG
9		23048.000	37.53	12.91	50.44	68.20	-17.76	peak
10		23048.000	26.61	12.91	39.52	54.00	-14.48	AVG
11		26974.000	37.35	15.66	53.01	68.20	-15.19	peak
12	*	26974.000	26.81	15.66	42.47	54.00	-11.53	AVG

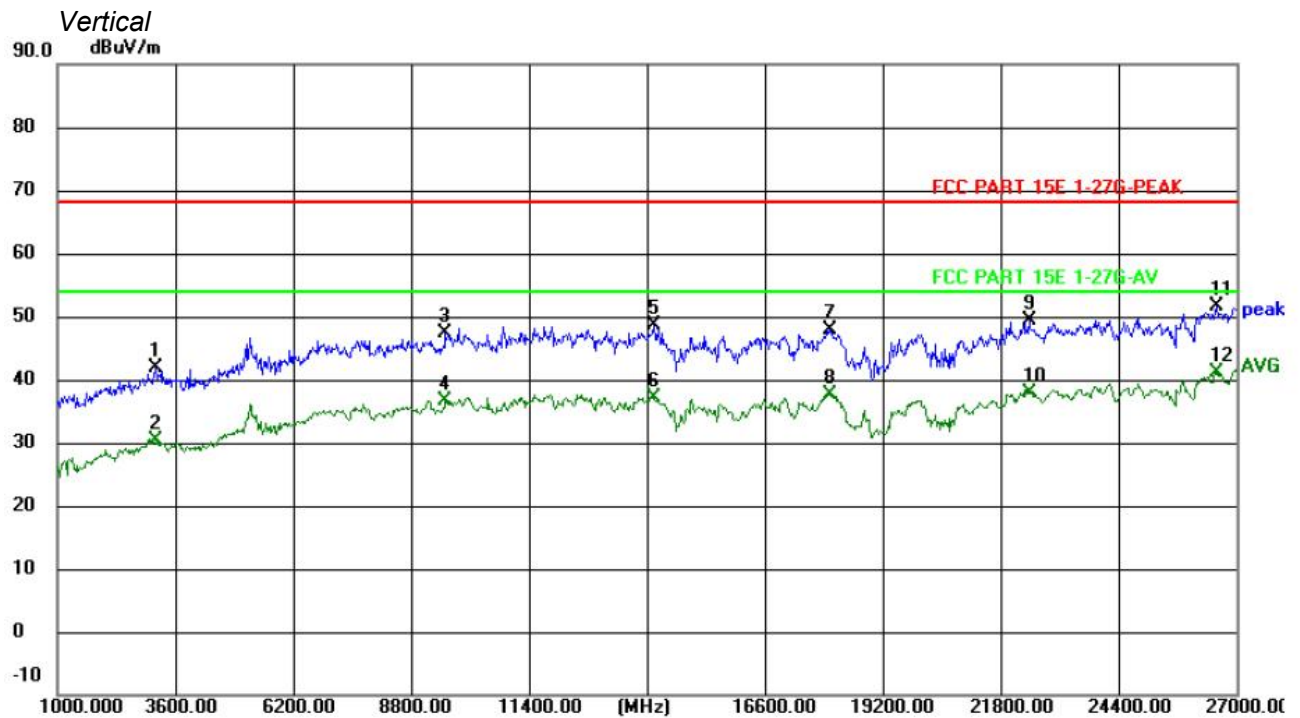

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		3158.000	51.29	-9.53	41.76	68.20	-26.44	peak
2		3158.000	39.89	-9.53	30.36	54.00	-23.64	AVG
3		9554.000	44.65	2.80	47.45	68.20	-20.75	peak
4		9554.000	33.84	2.80	36.64	54.00	-17.36	AVG
5		14156.000	39.32	9.31	48.63	68.20	-19.57	peak
6		14156.000	27.90	9.31	37.21	54.00	-16.79	AVG
7		18030.000	37.47	10.40	47.87	68.20	-20.33	peak
8		18030.000	27.18	10.40	37.58	54.00	-16.42	AVG
9		22424.000	36.83	12.46	49.29	68.20	-18.91	peak
10		22424.000	25.45	12.46	37.91	54.00	-16.09	AVG
11		26558.000	36.57	15.17	51.74	68.20	-16.46	peak
12	*	26558.000	25.94	15.17	41.11	54.00	-12.89	AVG

Appendix A.5: Test Results of Restrict Band

Note: Directional gain = GANT(Max.) + 3.01 = 1.94dBi + 3.01 = 4.95

Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
a	5180	Ant1	4500	-50.51	2.0	-	46.72	Peak	68.2	Pass
a	5180	Ant1	4500	-59.01	2.0	0.24	38.46	Average	54	Pass
a	5180	Ant1	5085.9	-46.72	2.0	-	50.51	Peak	68.2	Pass
a	5180	Ant1	5149.6	-56.26	2.0	0.24	41.21	Average	54	Pass
a	5180	Ant1	5150	-46.15	2.0	-	51.08	Peak	68.2	Pass
a	5180	Ant1	5150	-56.26	2.0	0.24	41.21	Average	54	Pass
a	5240	Ant1	5350	-50.25	2.0	-	46.98	Peak	68.2	Pass
a	5240	Ant1	5350	-58.13	2.0	0.24	39.34	Average	54	Pass
a	5240	Ant1	5407.2	-47.2	2.0	-	50.03	Peak	68.2	Pass
a	5240	Ant1	5377.68	-57.55	2.0	0.24	39.92	Average	54	Pass
a	5240	Ant1	5460	-50.01	2.0	-	47.22	Peak	68.2	Pass
a	5240	Ant1	5460	-58.13	2.0	0.24	39.34	Average	54	Pass
n20	5180	Ant1	4500	-50.68	2.0	-	46.55	Peak	68.2	Pass
n20	5180	Ant1	4500	-58.9	2.0	0.12	38.45	Average	54	Pass
n20	5180	Ant1	5148.2	-44.52	2.0	-	52.71	Peak	68.2	Pass
n20	5180	Ant1	5148.9	-55.59	2.0	0.12	41.76	Average	54	Pass
n20	5180	Ant1	5150	-45.1	2.0	-	52.13	Peak	68.2	Pass
n20	5180	Ant1	5150	-56.53	2.0	0.12	40.82	Average	54	Pass
n20	5240	Ant1	5350	-50.4	2.0	-	46.83	Peak	68.2	Pass
n20	5240	Ant1	5350	-58.27	2.0	0.12	39.08	Average	54	Pass
n20	5240	Ant1	5393.52	-46.8	2.0	-	50.43	Peak	68.2	Pass
n20	5240	Ant1	5355.6	-57.66	2.0	0.12	39.69	Average	54	Pass
n20	5240	Ant1	5460	-50.32	2.0	-	46.91	Peak	68.2	Pass
n20	5240	Ant1	5460	-58.45	2.0	0.12	38.90	Average	54	Pass
n40	5190	Ant1	4500	-50.21	2.0	-	47.02	Peak	68.2	Pass
n40	5190	Ant1	4500	-59.19	2.0	0.24	38.28	Average	54	Pass
n40	5190	Ant1	5145.32	-43.56	2.0	-	53.67	Peak	68.2	Pass
n40	5190	Ant1	5148.97	-55.08	2.0	0.24	42.39	Average	54	Pass
n40	5190	Ant1	5150	-45.93	2.0	-	51.30	Peak	68.2	Pass
n40	5190	Ant1	5150	-55.6	2.0	0.24	41.87	Average	54	Pass
n40	5230	Ant1	5350	-50.51	2.0	-	46.72	Peak	68.2	Pass
n40	5230	Ant1	5350	-58.04	2.0	0.24	39.43	Average	54	Pass
n40	5230	Ant1	5427.33	-47.13	2.0	-	50.10	Peak	68.2	Pass
n40	5230	Ant1	5355.51	-57.48	2.0	0.24	39.99	Average	54	Pass
n40	5230	Ant1	5460	-49.92	2.0	-	47.31	Peak	68.2	Pass
n40	5230	Ant1	5460	-58.36	2.0	0.24	39.11	Average	54	Pass
ac20	5180	Ant1	4500	-48.93	2.0	-	48.30	Peak	68.2	Pass
ac20	5180	Ant1	4500	-58.46	2.0	0.12	38.89	Average	54	Pass
ac20	5180	Ant1	5051.6	-45.33	2.0	-	51.90	Peak	68.2	Pass
ac20	5180	Ant1	5149.6	-55.32	2.0	0.12	42.03	Average	54	Pass
ac20	5180	Ant1	5150	-47.9	2.0	-	49.33	Peak	68.2	Pass
ac20	5180	Ant1	5150	-54.77	2.0	0.12	42.58	Average	54	Pass
ac20	5240	Ant1	5350	-50.86	2.0	-	46.37	Peak	68.2	Pass
ac20	5240	Ant1	5350	-58.43	2.0	0.12	38.92	Average	54	Pass
ac20	5240	Ant1	5372.16	-47.54	2.0	-	49.69	Peak	68.2	Pass
ac20	5240	Ant1	5435.76	-57.54	2.0	0.12	39.81	Average	54	Pass
ac20	5240	Ant1	5460	-50.71	2.0	-	46.52	Peak	68.2	Pass
ac20	5240	Ant1	5460	-58.49	2.0	0.12	38.86	Average	54	Pass
ac40	5190	Ant1	4500	-50.48	2.0	-	46.75	Peak	68.2	Pass
ac40	5190	Ant1	4500	-58.53	2.0	0.24	38.94	Average	54	Pass
ac40	5190	Ant1	5146.78	-44.32	2.0	-	52.91	Peak	68.2	Pass
ac40	5190	Ant1	5147.51	-55.15	2.0	0.24	42.32	Average	54	Pass
ac40	5190	Ant1	5150	-46.59	2.0	-	50.64	Peak	68.2	Pass
ac40	5190	Ant1	5150	-55.3	2.0	0.24	42.17	Average	54	Pass
ac40	5230	Ant1	5350	-50.52	2.0	-	46.71	Peak	68.2	Pass
ac40	5230	Ant1	5350	-58.26	2.0	0.23	39.20	Average	54	Pass
ac40	5230	Ant1	5412.21	-47.01	2.0	-	50.22	Peak	68.2	Pass
ac40	5230	Ant1	5408.43	-57.3	2.0	0.23	40.16	Average	54	Pass

ac40	5230	Ant1	5460	-50.55	2.0	-	46.68	Peak	68.2	Pass
ac40	5230	Ant1	5460	-57.84	2.0	0.23	39.62	Average	54	Pass
ac80	5210	Ant1	5350	-48.62	2.0	-	48.61	Peak	68.2	Pass
ac80	5210	Ant1	5350	-56.86	2.0	0.47	40.84	Average	54	Pass
ac80	5210	Ant1	5356.05	-45.96	2.0	-	51.27	Peak	68.2	Pass
ac80	5210	Ant1	5351.76	-56.18	2.0	0.47	41.52	Average	54	Pass
ac80	5210	Ant1	5460	-48.74	2.0	-	48.49	Peak	68.2	Pass
ac80	5210	Ant1	5460	-57.77	2.0	0.47	39.93	Average	54	Pass
ac80	5210	Ant1	4500	-50.42	2.0	-	46.81	Peak	68.2	Pass
ac80	5210	Ant1	4500	-59.03	2.0	0.47	38.67	Average	54	Pass
ac80	5210	Ant1	5147.01	-44.4	2.0	-	52.83	Peak	68.2	Pass
ac80	5210	Ant1	5149.38	-55.48	2.0	0.47	42.22	Average	54	Pass
ac80	5210	Ant1	5150	-46.29	2.0	-	50.94	Peak	68.2	Pass
ac80	5210	Ant1	5150	-55.3	2.0	0.47	42.40	Average	54	Pass
ax20	5180	Ant1	4500	-50.97	2.0	-	46.26	Peak	68.2	Pass
ax20	5180	Ant1	4500	-58.54	2.0	0.12	38.81	Average	54	Pass
ax20	5180	Ant1	5149.6	-44.47	2.0	-	52.76	Peak	68.2	Pass
ax20	5180	Ant1	5148.9	-55.8	2.0	0.12	41.55	Average	54	Pass
ax20	5180	Ant1	5150	-44.48	2.0	-	52.75	Peak	68.2	Pass
ax20	5180	Ant1	5150	-55.35	2.0	0.12	42.00	Average	54	Pass
ax20	5240	Ant1	5350	-51.68	2.0	-	45.55	Peak	68.2	Pass
ax20	5240	Ant1	5350	-58.02	2.0	0.12	39.33	Average	54	Pass
ax20	5240	Ant1	5363.52	-46.36	2.0	-	50.87	Peak	68.2	Pass
ax20	5240	Ant1	5450.16	-57.48	2.0	0.12	39.87	Average	54	Pass
ax20	5240	Ant1	5460	-50.55	2.0	-	46.68	Peak	68.2	Pass
ax20	5240	Ant1	5460	-58.57	2.0	0.12	38.78	Average	54	Pass
ax40	5190	Ant1	4500	-51.37	2.0	-	45.86	Peak	68.2	Pass
ax40	5190	Ant1	4500	-58.93	2.0	0.24	38.54	Average	54	Pass
ax40	5190	Ant1	5148.24	-43.95	2.0	-	53.28	Peak	68.2	Pass
ax40	5190	Ant1	5149.7	-55.12	2.0	0.24	42.35	Average	54	Pass
ax40	5190	Ant1	5150	-44.45	2.0	-	52.78	Peak	68.2	Pass
ax40	5190	Ant1	5150	-55.12	2.0	0.24	42.35	Average	54	Pass
ax40	5230	Ant1	5350	-49.69	2.0	-	47.54	Peak	68.2	Pass
ax40	5230	Ant1	5350	-58.51	2.0	0.24	38.96	Average	54	Pass
ax40	5230	Ant1	5373.33	-46.85	2.0	-	50.38	Peak	68.2	Pass
ax40	5230	Ant1	5363.61	-57.36	2.0	0.24	40.11	Average	54	Pass
ax40	5230	Ant1	5460	-49.27	2.0	-	47.96	Peak	68.2	Pass
ax40	5230	Ant1	5460	-58.14	2.0	0.24	39.33	Average	54	Pass
ax80	5210	Ant1	5350	-48.31	2.0	-	48.92	Peak	68.2	Pass
ax80	5210	Ant1	5350	-56.47	2.0	0.47	41.23	Average	54	Pass
ax80	5210	Ant1	5364.63	-46.24	2.0	-	50.99	Peak	68.2	Pass
ax80	5210	Ant1	5350.77	-56.35	2.0	0.47	41.35	Average	54	Pass
ax80	5210	Ant1	5460	-50.87	2.0	-	46.36	Peak	68.2	Pass
ax80	5210	Ant1	5460	-58.07	2.0	0.47	39.63	Average	54	Pass
ax80	5210	Ant1	4500	-49.68	2.0	-	47.55	Peak	68.2	Pass
ax80	5210	Ant1	4500	-58.76	2.0	0.47	38.94	Average	54	Pass
ax80	5210	Ant1	5149.38	-44.88	2.0	-	52.35	Peak	68.2	Pass
ax80	5210	Ant1	5149.38	-55.6	2.0	0.47	42.10	Average	54	Pass
ax80	5210	Ant1	5150	-45.1	2.0	-	52.13	Peak	68.2	Pass
ax80	5210	Ant1	5150	-55.19	2.0	0.47	42.51	Average	54	Pass

Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
a	5180	Ant2	4500	-48.73	2.0	-	48.50	Peak	68.2	Pass
a	5180	Ant2	4500	-58.84	2.0	0.24	38.63	Average	54	Pass
a	5180	Ant2	5090.1	-45.39	2.0	-	51.84	Peak	68.2	Pass
a	5180	Ant2	5148.9	-56.34	2.0	0.24	41.13	Average	54	Pass
a	5180	Ant2	5150	-47.96	2.0	-	49.27	Peak	68.2	Pass
a	5180	Ant2	5150	-56.38	2.0	0.24	41.09	Average	54	Pass
a	5240	Ant2	5350	-49.09	2.0	-	48.14	Peak	68.2	Pass
a	5240	Ant2	5350	-58.22	2.0	0.24	39.25	Average	54	Pass
a	5240	Ant2	5430.72	-47.55	2.0	-	49.68	Peak	68.2	Pass
a	5240	Ant2	5362.8	-57.44	2.0	0.24	40.03	Average	54	Pass
a	5240	Ant2	5460	-51.1	2.0	-	46.13	Peak	68.2	Pass
a	5240	Ant2	5460	-58.05	2.0	0.24	39.42	Average	54	Pass
n20	5180	Ant2	4500	-50.57	2.0	-	46.66	Peak	68.2	Pass
n20	5180	Ant2	4500	-58.5	2.0	0.12	38.85	Average	54	Pass
n20	5180	Ant2	5148.9	-36.77	2.0	-	60.46	Peak	68.2	Pass
n20	5180	Ant2	5149.6	-48.38	2.0	0.12	48.97	Average	54	Pass
n20	5180	Ant2	5150	-34.65	2.0	-	62.58	Peak	68.2	Pass
n20	5180	Ant2	5150	-49.07	2.0	0.12	48.28	Average	54	Pass
n20	5240	Ant2	5350	-49.7	2.0	-	47.53	Peak	68.2	Pass
n20	5240	Ant2	5350	-58.24	2.0	0.12	39.11	Average	54	Pass
n20	5240	Ant2	5388.96	-47.78	2.0	-	49.45	Peak	68.2	Pass
n20	5240	Ant2	5395.92	-57.57	2.0	0.12	39.78	Average	54	Pass
n20	5240	Ant2	5460	-50.34	2.0	-	46.89	Peak	68.2	Pass
n20	5240	Ant2	5460	-58.44	2.0	0.12	38.91	Average	54	Pass
n40	5190	Ant2	4500	-49.91	2.0	-	47.32	Peak	68.2	Pass
n40	5190	Ant2	4500	-58.73	2.0	0.24	38.74	Average	54	Pass
n40	5190	Ant2	5148.24	-43.8	2.0	-	53.43	Peak	68.2	Pass
n40	5190	Ant2	5148.24	-55.75	2.0	0.24	41.72	Average	54	Pass
n40	5190	Ant2	5150	-46.24	2.0	-	50.99	Peak	68.2	Pass
n40	5190	Ant2	5150	-55.86	2.0	0.24	41.61	Average	54	Pass
n40	5230	Ant2	5350	-50.36	2.0	-	46.87	Peak	68.2	Pass
n40	5230	Ant2	5350	-58.26	2.0	0.24	39.21	Average	54	Pass
n40	5230	Ant2	5439.48	-47.26	2.0	-	49.97	Peak	68.2	Pass
n40	5230	Ant2	5397.09	-57.37	2.0	0.24	40.10	Average	54	Pass
n40	5230	Ant2	5460	-49.06	2.0	-	48.17	Peak	68.2	Pass
n40	5230	Ant2	5460	-58.5	2.0	0.24	38.97	Average	54	Pass
ac20	5180	Ant2	4500	-51.27	2.0	-	45.96	Peak	68.2	Pass
ac20	5180	Ant2	4500	-59.1	2.0	0.12	38.25	Average	54	Pass
ac20	5180	Ant2	5149.6	-45.12	2.0	-	52.11	Peak	68.2	Pass
ac20	5180	Ant2	5148.2	-55.51	2.0	0.12	41.84	Average	54	Pass
ac20	5180	Ant2	5150	-46.03	2.0	-	51.20	Peak	68.2	Pass
ac20	5180	Ant2	5150	-55.79	2.0	0.12	41.56	Average	54	Pass
ac20	5240	Ant2	5350	-49.97	2.0	-	47.26	Peak	68.2	Pass
ac20	5240	Ant2	5350	-58.01	2.0	0.12	39.34	Average	54	Pass
ac20	5240	Ant2	5352	-47.55	2.0	-	49.68	Peak	68.2	Pass
ac20	5240	Ant2	5353.2	-57.38	2.0	0.12	39.97	Average	54	Pass
ac20	5240	Ant2	5460	-50.9	2.0	-	46.33	Peak	68.2	Pass
ac20	5240	Ant2	5460	-58.69	2.0	0.12	38.66	Average	54	Pass
ac40	5190	Ant2	4500	-50.58	2.0	-	46.65	Peak	68.2	Pass
ac40	5190	Ant2	4500	-59.52	2.0	0.24	37.95	Average	54	Pass
ac40	5190	Ant2	5149.7	-44.19	2.0	-	53.04	Peak	68.2	Pass
ac40	5190	Ant2	5149.7	-55.24	2.0	0.24	42.23	Average	54	Pass
ac40	5190	Ant2	5150	-44.19	2.0	-	53.04	Peak	68.2	Pass
ac40	5190	Ant2	5150	-55.24	2.0	0.24	42.23	Average	54	Pass
ac40	5230	Ant2	5350	-49.57	2.0	-	47.66	Peak	68.2	Pass
ac40	5230	Ant2	5350	-58.01	2.0	0.23	39.45	Average	54	Pass
ac40	5230	Ant2	5388.99	-47.32	2.0	-	49.91	Peak	68.2	Pass
ac40	5230	Ant2	5446.5	-57.39	2.0	0.23	40.07	Average	54	Pass
ac40	5230	Ant2	5460	-48.91	2.0	-	48.32	Peak	68.2	Pass
ac40	5230	Ant2	5460	-57.94	2.0	0.23	39.52	Average	54	Pass

ac80	5210	Ant2	5350	-48	2.0	-	49.23	Peak	68.2	Pass
ac80	5210	Ant2	5350	-57.13	2.0	0.47	40.57	Average	54	Pass
ac80	5210	Ant2	5358.36	-45.82	2.0	-	51.41	Peak	68.2	Pass
ac80	5210	Ant2	5350.77	-56.48	2.0	0.47	41.22	Average	54	Pass
ac80	5210	Ant2	5460	-49.45	2.0	-	47.78	Peak	68.2	Pass
ac80	5210	Ant2	5460	-58	2.0	0.47	39.70	Average	54	Pass
ac80	5210	Ant2	4500	-49.44	2.0	-	47.79	Peak	68.2	Pass
ac80	5210	Ant2	4500	-58.93	2.0	0.47	38.77	Average	54	Pass
ac80	5210	Ant2	5149.38	-45.36	2.0	-	51.87	Peak	68.2	Pass
ac80	5210	Ant2	5147.8	-55.26	2.0	0.47	42.44	Average	54	Pass
ac80	5210	Ant2	5150	-42.52	2.0	-	54.71	Peak	68.2	Pass
ac80	5210	Ant2	5150	-55.12	2.0	0.47	42.58	Average	54	Pass
ax20	5180	Ant2	4500	-50.91	2.0	-	46.32	Peak	68.2	Pass
ax20	5180	Ant2	4500	-59.2	2.0	0.12	38.15	Average	54	Pass
ax20	5180	Ant2	5148.2	-44.15	2.0	-	53.08	Peak	68.2	Pass
ax20	5180	Ant2	5149.6	-55.86	2.0	0.12	41.49	Average	54	Pass
ax20	5180	Ant2	5150	-46.82	2.0	-	50.41	Peak	68.2	Pass
ax20	5180	Ant2	5150	-55.9	2.0	0.12	41.45	Average	54	Pass
ax20	5240	Ant2	5350	-50.93	2.0	-	46.30	Peak	68.2	Pass
ax20	5240	Ant2	5350	-58.39	2.0	0.12	38.96	Average	54	Pass
ax20	5240	Ant2	5406.24	-47.71	2.0	-	49.52	Peak	68.2	Pass
ax20	5240	Ant2	5356.08	-57.39	2.0	0.12	39.96	Average	54	Pass
ax20	5240	Ant2	5460	-50.34	2.0	-	46.89	Peak	68.2	Pass
ax20	5240	Ant2	5460	-58.13	2.0	0.12	39.22	Average	54	Pass
ax40	5190	Ant2	4500	-50.08	2.0	-	47.15	Peak	68.2	Pass
ax40	5190	Ant2	4500	-58.97	2.0	0.24	38.50	Average	54	Pass
ax40	5190	Ant2	5149.7	-43.52	2.0	-	53.71	Peak	68.2	Pass
ax40	5190	Ant2	5148.97	-55.45	2.0	0.24	42.02	Average	54	Pass
ax40	5190	Ant2	5150	-43.52	2.0	-	53.71	Peak	68.2	Pass
ax40	5190	Ant2	5150	-55.76	2.0	0.24	41.71	Average	54	Pass
ax40	5230	Ant2	5350	-49.78	2.0	-	47.45	Peak	68.2	Pass
ax40	5230	Ant2	5350	-58.19	2.0	0.24	39.28	Average	54	Pass
ax40	5230	Ant2	5437.86	-47.42	2.0	-	49.81	Peak	68.2	Pass
ax40	5230	Ant2	5397.09	-57.51	2.0	0.24	39.96	Average	54	Pass
ax40	5230	Ant2	5460	-50.15	2.0	-	47.08	Peak	68.2	Pass
ax40	5230	Ant2	5460	-58.31	2.0	0.24	39.16	Average	54	Pass
ax80	5210	Ant2	5350	-48.87	2.0	-	48.36	Peak	68.2	Pass
ax80	5210	Ant2	5350	-57.25	2.0	0.47	40.45	Average	54	Pass
ax80	5210	Ant2	5382.12	-45.78	2.0	-	51.45	Peak	68.2	Pass
ax80	5210	Ant2	5359.35	-56.58	2.0	0.47	41.12	Average	54	Pass
ax80	5210	Ant2	5460	-48.47	2.0	-	48.76	Peak	68.2	Pass
ax80	5210	Ant2	5460	-58.1	2.0	0.47	39.60	Average	54	Pass
ax80	5210	Ant2	4500	-50.08	2.0	-	47.15	Peak	68.2	Pass
ax80	5210	Ant2	4500	-58.7	2.0	0.47	39.00	Average	54	Pass
ax80	5210	Ant2	5146.22	-45.21	2.0	-	52.02	Peak	68.2	Pass
ax80	5210	Ant2	5148.59	-55.42	2.0	0.47	42.28	Average	54	Pass
ax80	5210	Ant2	5150	-43.92	2.0	-	53.31	Peak	68.2	Pass
ax80	5210	Ant2	5150	-54.81	2.0	0.47	42.89	Average	54	Pass

MIMO

Mode	Frequency (MHz)	Ant1 Power (dBm)	Ant2 Power (dBm)	Gain (dBi)	Total E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
n20	5180	-50.68	-50.57	4.95	52.56	Peak	68.2	Pass
n20	5180	-58.9	-58.5	4.95	44.49	Average	54	Pass
n20	5180	-44.52	-36.77	4.95	64.08	Peak	68.2	Pass
n20	5180	-55.59	-48.38	4.95	52.55	Average	54	Pass
n20	5180	-45.1	-34.65	4.95	65.9	Peak	68.2	Pass
n20	5180	-56.53	-49.07	4.95	51.82	Average	54	Pass
n20	5240	-50.4	-49.7	4.95	53.15	Peak	68.2	Pass
n20	5240	-58.27	-58.24	4.95	44.93	Average	54	Pass
n20	5240	-46.8	-47.78	4.95	55.92	Peak	68.2	Pass
n20	5240	-57.66	-57.57	4.95	45.57	Average	54	Pass
n20	5240	-50.32	-50.34	4.95	52.86	Peak	68.2	Pass
n20	5240	-58.45	-58.44	4.95	44.74	Average	54	Pass
n40	5190	-50.21	-49.91	4.95	53.13	Peak	68.2	Pass
n40	5190	-59.19	-58.73	4.95	44.23	Average	54	Pass
n40	5190	-43.56	-43.8	4.95	59.51	Peak	68.2	Pass
n40	5190	-55.08	-55.75	4.95	47.78	Average	54	Pass
n40	5190	-45.93	-46.24	4.95	57.1	Peak	68.2	Pass
n40	5190	-55.6	-55.86	4.95	47.46	Average	54	Pass
n40	5230	-50.51	-50.36	4.95	52.75	Peak	68.2	Pass
n40	5230	-58.04	-58.26	4.95	45.04	Average	54	Pass
n40	5230	-47.13	-47.26	4.95	55.99	Peak	68.2	Pass
n40	5230	-57.48	-57.37	4.95	45.76	Average	54	Pass
n40	5230	-49.92	-49.06	4.95	53.72	Peak	68.2	Pass
n40	5230	-58.36	-58.5	4.95	44.76	Average	54	Pass
ac20	5180	-48.93	-51.27	4.95	53.24	Peak	68.2	Pass
ac20	5180	-58.46	-59.1	4.95	44.42	Average	54	Pass
ac20	5180	-45.33	-45.12	4.95	57.96	Peak	68.2	Pass
ac20	5180	-55.32	-55.51	4.95	47.77	Average	54	Pass
ac20	5180	-47.9	-46.03	4.95	56.32	Peak	68.2	Pass
ac20	5180	-54.77	-55.79	4.95	47.94	Average	54	Pass
ac20	5240	-50.86	-49.97	4.95	52.79	Peak	68.2	Pass
ac20	5240	-58.43	-58.01	4.95	44.97	Average	54	Pass
ac20	5240	-47.54	-47.55	4.95	55.64	Peak	68.2	Pass
ac20	5240	-57.54	-57.38	4.95	45.73	Average	54	Pass
ac20	5240	-50.71	-50.9	4.95	52.38	Peak	68.2	Pass
ac20	5240	-58.49	-58.69	4.95	44.6	Average	54	Pass
ac40	5190	-50.48	-50.58	4.95	52.66	Peak	68.2	Pass
ac40	5190	-58.53	-59.52	4.95	44.19	Average	54	Pass
ac40	5190	-44.32	-44.19	4.95	58.93	Peak	68.2	Pass
ac40	5190	-55.15	-55.24	4.95	47.99	Average	54	Pass
ac40	5190	-46.59	-44.19	4.95	57.96	Peak	68.2	Pass
ac40	5190	-55.3	-55.24	4.95	47.92	Average	54	Pass
ac40	5230	-50.52	-49.57	4.95	53.17	Peak	68.2	Pass
ac40	5230	-58.26	-58.01	4.95	45.05	Average	54	Pass
ac40	5230	-47.01	-47.32	4.95	56.02	Peak	68.2	Pass
ac40	5230	-57.3	-57.39	4.95	45.84	Average	54	Pass
ac40	5230	-50.55	-48.91	4.95	53.53	Peak	68.2	Pass
ac40	5230	-57.84	-57.94	4.95	45.3	Average	54	Pass
ac80	5210	-48.62	-48	4.95	54.89	Peak	68.2	Pass
ac80	5210	-56.86	-57.13	4.95	46.19	Average	54	Pass
ac80	5210	-45.96	-45.82	4.95	57.3	Peak	68.2	Pass
ac80	5210	-56.18	-56.48	4.95	46.86	Average	54	Pass
ac80	5210	-48.74	-49.45	4.95	54.1	Peak	68.2	Pass
ac80	5210	-57.77	-58	4.95	45.3	Average	54	Pass
ac80	5210	-50.42	-49.44	4.95	53.28	Peak	68.2	Pass
ac80	5210	-59.03	-58.93	4.95	44.21	Average	54	Pass
ac80	5210	-44.4	-45.36	4.95	58.33	Peak	68.2	Pass
ac80	5210	-55.48	-55.26	4.95	47.82	Average	54	Pass

ac80	5210	-46.29	-42.52	4.95	59.18	Peak	68.2	Pass
ac80	5210	-55.3	-55.12	4.95	47.98	Average	54	Pass
ax20	5180	-50.97	-50.91	4.95	52.25	Peak	68.2	Pass
ax20	5180	-58.54	-59.2	4.95	44.33	Average	54	Pass
ax20	5180	-44.47	-44.15	4.95	58.88	Peak	68.2	Pass
ax20	5180	-55.8	-55.86	4.95	47.36	Average	54	Pass
ax20	5180	-44.48	-46.82	4.95	57.69	Peak	68.2	Pass
ax20	5180	-55.35	-55.9	4.95	47.57	Average	54	Pass
ax20	5240	-51.68	-50.93	4.95	51.9	Peak	68.2	Pass
ax20	5240	-58.02	-58.39	4.95	44.98	Average	54	Pass
ax20	5240	-46.36	-47.71	4.95	56.2	Peak	68.2	Pass
ax20	5240	-57.48	-57.39	4.95	45.75	Average	54	Pass
ax20	5240	-50.55	-50.34	4.95	52.74	Peak	68.2	Pass
ax20	5240	-58.57	-58.13	4.95	44.84	Average	54	Pass
ax40	5190	-51.37	-50.08	4.95	52.51	Peak	68.2	Pass
ax40	5190	-58.93	-58.97	4.95	44.24	Average	54	Pass
ax40	5190	-43.95	-43.52	4.95	59.46	Peak	68.2	Pass
ax40	5190	-55.12	-55.45	4.95	47.9	Average	54	Pass
ax40	5190	-44.45	-43.52	4.95	59.23	Peak	68.2	Pass
ax40	5190	-55.12	-55.76	4.95	47.76	Average	54	Pass
ax40	5230	-49.69	-49.78	4.95	53.45	Peak	68.2	Pass
ax40	5230	-58.51	-58.19	4.95	44.84	Average	54	Pass
ax40	5230	-46.85	-47.42	4.95	56.06	Peak	68.2	Pass
ax40	5230	-57.36	-57.51	4.95	45.75	Average	54	Pass
ax40	5230	-49.27	-50.15	4.95	53.5	Peak	68.2	Pass
ax40	5230	-58.14	-58.31	4.95	44.96	Average	54	Pass
ax80	5210	-48.31	-48.87	4.95	54.6	Peak	68.2	Pass
ax80	5210	-56.47	-57.25	4.95	46.34	Average	54	Pass
ax80	5210	-46.24	-45.78	4.95	57.18	Peak	68.2	Pass
ax80	5210	-56.35	-56.58	4.95	46.72	Average	54	Pass
ax80	5210	-50.87	-48.47	4.95	53.68	Peak	68.2	Pass
ax80	5210	-58.07	-58.1	4.95	45.1	Average	54	Pass
ax80	5210	-49.68	-50.08	4.95	53.31	Peak	68.2	Pass
ax80	5210	-58.76	-58.7	4.95	44.46	Average	54	Pass
ax80	5210	-44.88	-45.21	4.95	58.14	Peak	68.2	Pass
ax80	5210	-55.6	-55.42	4.95	47.68	Average	54	Pass
ax80	5210	-45.1	-43.92	4.95	58.72	Peak	68.2	Pass
ax80	5210	-55.19	-54.81	4.95	48.19	Average	54	Pass

Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
a	5260	Ant1	4500	-51.19	2.0	-	46.04	Peak	68.2	Pass
a	5260	Ant1	4500	-58.96	2.0	0.24	38.51	Average	54	Pass
a	5260	Ant1	5092.02	-46.58	2.0	-	50.65	Peak	68.2	Pass
a	5260	Ant1	5085	-56.7	2.0	0.24	40.77	Average	54	Pass
a	5260	Ant1	5150	-49.21	2.0	-	48.02	Peak	68.2	Pass
a	5260	Ant1	5150	-56.85	2.0	0.24	40.62	Average	54	Pass
a	5320	Ant1	5350	-48.02	2.0	-	49.21	Peak	68.2	Pass
a	5320	Ant1	5350	-57.08	2.0	0.24	40.39	Average	54	Pass
a	5320	Ant1	5350.2	-45.21	2.0	-	52.02	Peak	68.2	Pass
a	5320	Ant1	5350.4	-56.35	2.0	0.24	41.12	Average	54	Pass
a	5320	Ant1	5460	-49.67	2.0	-	47.56	Peak	68.2	Pass
a	5320	Ant1	5460	-57.78	2.0	0.24	39.69	Average	54	Pass
n20	5260	Ant1	4500	-49.8	2.0	-	47.43	Peak	68.2	Pass
n20	5260	Ant1	4500	-58.99	2.0	0.12	38.36	Average	54	Pass
n20	5260	Ant1	5111.52	-46.85	2.0	-	50.38	Peak	68.2	Pass
n20	5260	Ant1	5042.88	-56.68	2.0	0.12	40.67	Average	54	Pass
n20	5260	Ant1	5150	-47.36	2.0	-	49.87	Peak	68.2	Pass
n20	5260	Ant1	5150	-57.34	2.0	0.12	40.01	Average	54	Pass
n20	5320	Ant1	5350	-45.67	2.0	-	51.56	Peak	68.2	Pass
n20	5320	Ant1	5350	-55.9	2.0	0.12	41.45	Average	54	Pass
n20	5320	Ant1	5351.6	-44.17	2.0	-	53.06	Peak	68.2	Pass
n20	5320	Ant1	5351.6	-55.74	2.0	0.12	41.61	Average	54	Pass
n20	5320	Ant1	5460	-49.27	2.0	-	47.96	Peak	68.2	Pass
n20	5320	Ant1	5460	-57.97	2.0	0.12	39.38	Average	54	Pass
n40	5270	Ant1	4500	-50.13	2.0	-	47.10	Peak	68.2	Pass
n40	5270	Ant1	4500	-58.71	2.0	0.23	38.75	Average	54	Pass
n40	5270	Ant1	4781.07	-45.9	2.0	-	51.33	Peak	68.2	Pass
n40	5270	Ant1	5128.56	-56.65	2.0	0.23	40.81	Average	54	Pass
n40	5270	Ant1	5150	-49.35	2.0	-	47.88	Peak	68.2	Pass
n40	5270	Ant1	5150	-57.3	2.0	0.23	40.16	Average	54	Pass
n40	5310	Ant1	5350	-43.58	2.0	-	53.65	Peak	68.2	Pass
n40	5310	Ant1	5350	-56.07	2.0	0.24	41.40	Average	54	Pass
n40	5310	Ant1	5350	-43.58	2.0	-	53.65	Peak	68.2	Pass
n40	5310	Ant1	5352	-55.79	2.0	0.24	41.68	Average	54	Pass
n40	5310	Ant1	5460	-48.64	2.0	-	48.59	Peak	68.2	Pass
n40	5310	Ant1	5460	-57.52	2.0	0.24	39.95	Average	54	Pass
ac20	5260	Ant1	4500	-51.07	2.0	-	46.16	Peak	68.2	Pass
ac20	5260	Ant1	4500	-58.9	2.0	0.12	38.45	Average	54	Pass
ac20	5260	Ant1	5067.06	-46.25	2.0	-	50.98	Peak	68.2	Pass
ac20	5260	Ant1	5056.92	-56.53	2.0	0.12	40.82	Average	54	Pass
ac20	5260	Ant1	5150	-48.69	2.0	-	48.54	Peak	68.2	Pass
ac20	5260	Ant1	5150	-57.12	2.0	0.12	40.23	Average	54	Pass
ac20	5320	Ant1	5350	-46.08	2.0	-	51.15	Peak	68.2	Pass
ac20	5320	Ant1	5350	-56.32	2.0	0.12	41.03	Average	54	Pass
ac20	5320	Ant1	5350.8	-45.16	2.0	-	52.07	Peak	68.2	Pass
ac20	5320	Ant1	5351	-55.51	2.0	0.12	41.84	Average	54	Pass
ac20	5320	Ant1	5460	-50.31	2.0	-	46.92	Peak	68.2	Pass
ac20	5320	Ant1	5460	-57.7	2.0	0.12	39.65	Average	54	Pass
ac40	5270	Ant1	4500	-50.56	2.0	-	46.67	Peak	68.2	Pass
ac40	5270	Ant1	4500	-58.44	2.0	0.23	39.02	Average	54	Pass
ac40	5270	Ant1	5143.95	-45.76	2.0	-	51.47	Peak	68.2	Pass
ac40	5270	Ant1	5093.73	-56.64	2.0	0.23	40.82	Average	54	Pass
ac40	5270	Ant1	5150	-49.54	2.0	-	47.69	Peak	68.2	Pass
ac40	5270	Ant1	5150	-57.52	2.0	0.23	39.94	Average	54	Pass
ac40	5310	Ant1	5350	-43.23	2.0	-	54.00	Peak	68.2	Pass
ac40	5310	Ant1	5350	-55.99	2.0	0.23	41.47	Average	54	Pass
ac40	5310	Ant1	5350.4	-42.72	2.0	-	54.51	Peak	68.2	Pass
ac40	5310	Ant1	5351.8	-55.82	2.0	0.23	41.64	Average	54	Pass
ac40	5310	Ant1	5460	-49.64	2.0	-	47.59	Peak	68.2	Pass
ac40	5310	Ant1	5460	-58.34	2.0	0.23	39.12	Average	54	Pass

ac80	5290	Ant1	4500	-50.9	2.0	-	46.33	Peak	68.2	Pass
ac80	5290	Ant1	4500	-58.42	2.0	0.47	39.28	Average	54	Pass
ac80	5290	Ant1	4860.18	-46.01	2.0	-	51.22	Peak	68.2	Pass
ac80	5290	Ant1	5145.54	-55.48	2.0	0.47	42.22	Average	54	Pass
ac80	5290	Ant1	5150	-48.7	2.0	-	48.53	Peak	68.2	Pass
ac80	5290	Ant1	5150	-55.88	2.0	0.47	41.82	Average	54	Pass
ac80	5290	Ant1	5350	-46.36	2.0	-	50.87	Peak	68.2	Pass
ac80	5290	Ant1	5350	-56.09	2.0	0.47	41.61	Average	54	Pass
ac80	5290	Ant1	5350.75	-45.02	2.0	-	52.21	Peak	68.2	Pass
ac80	5290	Ant1	5350.25	-55.73	2.0	0.47	41.97	Average	54	Pass
ac80	5290	Ant1	5460	-48.58	2.0	-	48.65	Peak	68.2	Pass
ac80	5290	Ant1	5460	-57.68	2.0	0.47	40.02	Average	54	Pass
ax20	5260	Ant1	4500	-49.58	2.0	-	47.65	Peak	68.2	Pass
ax20	5260	Ant1	4500	-58.78	2.0	0.12	38.57	Average	54	Pass
ax20	5260	Ant1	5138.82	-46.73	2.0	-	50.50	Peak	68.2	Pass
ax20	5260	Ant1	5126.34	-56.64	2.0	0.12	40.71	Average	54	Pass
ax20	5260	Ant1	5150	-49.52	2.0	-	47.71	Peak	68.2	Pass
ax20	5260	Ant1	5150	-57.32	2.0	0.12	40.03	Average	54	Pass
ax20	5320	Ant1	5350	-47.61	2.0	-	49.62	Peak	68.2	Pass
ax20	5320	Ant1	5350	-55.96	2.0	0.12	41.39	Average	54	Pass
ax20	5320	Ant1	5351.6	-43.21	2.0	-	54.02	Peak	68.2	Pass
ax20	5320	Ant1	5350.4	-55.44	2.0	0.12	41.91	Average	54	Pass
ax20	5320	Ant1	5460	-48.51	2.0	-	48.72	Peak	68.2	Pass
ax20	5320	Ant1	5460	-58.01	2.0	0.12	39.34	Average	54	Pass
ax40	5270	Ant1	4500	-49.56	2.0	-	47.67	Peak	68.2	Pass
ax40	5270	Ant1	4500	-58.83	2.0	0.24	38.64	Average	54	Pass
ax40	5270	Ant1	4777.83	-46.36	2.0	-	50.87	Peak	68.2	Pass
ax40	5270	Ant1	4774.59	-56.36	2.0	0.24	41.11	Average	54	Pass
ax40	5270	Ant1	5150	-49.19	2.0	-	48.04	Peak	68.2	Pass
ax40	5270	Ant1	5150	-57.13	2.0	0.24	40.34	Average	54	Pass
ax40	5310	Ant1	5350	-42.4	2.0	-	54.83	Peak	68.2	Pass
ax40	5310	Ant1	5350	-55.8	2.0	0.24	41.67	Average	54	Pass
ax40	5310	Ant1	5350	-42.4	2.0	-	54.83	Peak	68.2	Pass
ax40	5310	Ant1	5350	-55.8	2.0	0.24	41.67	Average	54	Pass
ax40	5310	Ant1	5460	-49.68	2.0	-	47.55	Peak	68.2	Pass
ax40	5310	Ant1	5460	-57.8	2.0	0.24	39.67	Average	54	Pass
ax80	5290	Ant1	5350	-47.96	2.0	-	49.27	Peak	68.2	Pass
ax80	5290	Ant1	5350	-55.5	2.0	0.47	42.20	Average	54	Pass
ax80	5290	Ant1	5351.5	-43.38	2.0	-	53.85	Peak	68.2	Pass
ax80	5290	Ant1	5351	-55.33	2.0	0.47	42.37	Average	54	Pass
ax80	5290	Ant1	5460	-49.67	2.0	-	47.56	Peak	68.2	Pass
ax80	5290	Ant1	5460	-57.9	2.0	0.47	39.80	Average	54	Pass
ax80	5290	Ant1	4500	-49.35	2.0	-	47.88	Peak	68.2	Pass
ax80	5290	Ant1	4500	-58.38	2.0	0.47	39.32	Average	54	Pass
ax80	5290	Ant1	5146.41	-44.56	2.0	-	52.67	Peak	68.2	Pass
ax80	5290	Ant1	5149.89	-55.51	2.0	0.47	42.19	Average	54	Pass
ax80	5290	Ant1	5150	-46.6	2.0	-	50.63	Peak	68.2	Pass
ax80	5290	Ant1	5150	-55.51	2.0	0.47	42.19	Average	54	Pass
ac160	5250	Ant1	5350	-43.5	2.0	-	53.73	Peak	68.2	Pass
ac160	5250	Ant1	5350	-57.75	2.0	2.31	41.79	Average	54	Pass
ac160	5250	Ant1	5354.55	-38.8	2.0	-	58.43	Peak	68.2	Pass
ac160	5250	Ant1	5357.51	-55.64	2.0	2.31	43.90	Average	54	Pass
ac160	5250	Ant1	5460	-56.35	2.0	-	40.88	Peak	68.2	Pass
ac160	5250	Ant1	5460	-65.24	2.0	2.31	34.30	Average	54	Pass
ac160	5250	Ant1	4500	-61.46	2.0	-	35.77	Peak	68.2	Pass
ac160	5250	Ant1	4500	-68.64	2.0	2.31	30.90	Average	54	Pass
ac160	5250	Ant1	5144.28	-40.26	2.0	-	56.97	Peak	68.2	Pass
ac160	5250	Ant1	5147.01	-54.37	2.0	2.31	45.17	Average	54	Pass
ac160	5250	Ant1	5150	-42.05	2.0	-	55.18	Peak	68.2	Pass
ac160	5250	Ant1	5150	-55.28	2.0	2.31	44.26	Average	54	Pass
ax160	5250	Ant1	5350	-46.16	2.0	-	51.07	Peak	68.2	Pass
ax160	5250	Ant1	5350	-56.49	2.0	2.31	43.05	Average	54	Pass
ax160	5250	Ant1	5351.22	-38.45	2.0	-	58.78	Peak	68.2	Pass
ax160	5250	Ant1	5360.84	-54.88	2.0	2.31	44.66	Average	54	Pass
ax160	5250	Ant1	5460	-57.28	2.0	-	39.95	Peak	68.2	Pass

ax160	5250	Ant1	5460	-65.76	2.0	2.31	33.78	Average	54	Pass
ax160	5250	Ant1	4500	-61.6	2.0	-	35.63	Peak	68.2	Pass
ax160	5250	Ant1	4500	-69.09	2.0	2.31	30.45	Average	54	Pass
ax160	5250	Ant1	5144.28	-38.91	2.0	-	58.32	Peak	68.2	Pass
ax160	5250	Ant1	5144.28	-54.62	2.0	2.31	44.92	Average	54	Pass
ax160	5250	Ant1	5150	-41.66	2.0	-	55.57	Peak	68.2	Pass
ax160	5250	Ant1	5150	-55.22	2.0	2.31	44.32	Average	54	Pass

Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
a	5260	Ant2	4500	-50.65	2.0	-	46.58	Peak	68.2	Pass
a	5260	Ant2	4500	-59.04	2.0	0.24	38.43	Average	54	Pass
a	5260	Ant2	5085	-46.15	2.0	-	51.08	Peak	68.2	Pass
a	5260	Ant2	5134.92	-56.47	2.0	0.24	41.00	Average	54	Pass
a	5260	Ant2	5150	-48.44	2.0	-	48.79	Peak	68.2	Pass
a	5260	Ant2	5150	-56.83	2.0	0.24	40.64	Average	54	Pass
a	5320	Ant2	5350	-48.75	2.0	-	48.48	Peak	68.2	Pass
a	5320	Ant2	5350	-56.99	2.0	0.24	40.48	Average	54	Pass
a	5320	Ant2	5351	-42.61	2.0	-	54.62	Peak	68.2	Pass
a	5320	Ant2	5439.6	-56.58	2.0	0.24	40.89	Average	54	Pass
a	5320	Ant2	5460	-49.25	2.0	-	47.98	Peak	68.2	Pass
a	5320	Ant2	5460	-58.03	2.0	0.24	39.44	Average	54	Pass
n20	5260	Ant2	4500	-50.19	2.0	-	47.04	Peak	68.2	Pass
n20	5260	Ant2	4500	-58.72	2.0	0.12	38.63	Average	54	Pass
n20	5260	Ant2	4639.62	-46.2	2.0	-	51.03	Peak	68.2	Pass
n20	5260	Ant2	5125.56	-56.58	2.0	0.12	40.77	Average	54	Pass
n20	5260	Ant2	5150	-47.48	2.0	-	49.75	Peak	68.2	Pass
n20	5260	Ant2	5150	-56.91	2.0	0.12	40.44	Average	54	Pass
n20	5320	Ant2	5350	-45.02	2.0	-	52.21	Peak	68.2	Pass
n20	5320	Ant2	5350	-56.1	2.0	0.12	41.25	Average	54	Pass
n20	5320	Ant2	5350	-45.02	2.0	-	52.21	Peak	68.2	Pass
n20	5320	Ant2	5350.2	-54.72	2.0	0.12	42.63	Average	54	Pass
n20	5320	Ant2	5460	-49.5	2.0	-	47.73	Peak	68.2	Pass
n20	5320	Ant2	5460	-57.5	2.0	0.12	39.85	Average	54	Pass
n40	5270	Ant2	4500	-51.77	2.0	-	45.46	Peak	68.2	Pass
n40	5270	Ant2	4500	-59.19	2.0	0.24	38.28	Average	54	Pass
n40	5270	Ant2	5137.47	-45.38	2.0	-	51.85	Peak	68.2	Pass
n40	5270	Ant2	4807.8	-56.36	2.0	0.24	41.11	Average	54	Pass
n40	5270	Ant2	5150	-47.99	2.0	-	49.24	Peak	68.2	Pass
n40	5270	Ant2	5150	-57.3	2.0	0.24	40.17	Average	54	Pass
n40	5310	Ant2	5350	-45.33	2.0	-	51.90	Peak	68.2	Pass
n40	5310	Ant2	5350	-56.28	2.0	0.24	41.19	Average	54	Pass
n40	5310	Ant2	5354.6	-44.65	2.0	-	52.58	Peak	68.2	Pass
n40	5310	Ant2	5350.6	-55.73	2.0	0.24	41.74	Average	54	Pass
n40	5310	Ant2	5460	-49.72	2.0	-	47.51	Peak	68.2	Pass
n40	5310	Ant2	5460	-57.72	2.0	0.24	39.75	Average	54	Pass
ac20	5260	Ant2	4500	-48.89	2.0	-	48.34	Peak	68.2	Pass
ac20	5260	Ant2	4500	-58.47	2.0	0.12	38.88	Average	54	Pass
ac20	5260	Ant2	4938.36	-46.31	2.0	-	50.92	Peak	68.2	Pass
ac20	5260	Ant2	5112.3	-56.58	2.0	0.12	40.77	Average	54	Pass
ac20	5260	Ant2	5150	-47.07	2.0	-	50.16	Peak	68.2	Pass
ac20	5260	Ant2	5150	-57.1	2.0	0.12	40.25	Average	54	Pass
ac20	5320	Ant2	5350	-46.57	2.0	-	50.66	Peak	68.2	Pass
ac20	5320	Ant2	5350	-56.29	2.0	0.12	41.06	Average	54	Pass
ac20	5320	Ant2	5350.2	-40.27	2.0	-	56.96	Peak	68.2	Pass
ac20	5320	Ant2	5350.6	-55.78	2.0	0.12	41.57	Average	54	Pass
ac20	5320	Ant2	5460	-49.49	2.0	-	47.74	Peak	68.2	Pass
ac20	5320	Ant2	5460	-57.6	2.0	0.12	39.75	Average	54	Pass
ac40	5270	Ant2	4500	-48.12	2.0	-	49.11	Peak	68.2	Pass
ac40	5270	Ant2	4500	-58.85	2.0	0.24	38.62	Average	54	Pass
ac40	5270	Ant2	4991.67	-46.28	2.0	-	50.95	Peak	68.2	Pass
ac40	5270	Ant2	4806.99	-56.48	2.0	0.24	40.99	Average	54	Pass
ac40	5270	Ant2	5150	-48.74	2.0	-	48.49	Peak	68.2	Pass

ac40	5270	Ant2	5150	-57.33	2.0	0.24	40.14	Average	54	Pass
ac40	5310	Ant2	5350	-44.28	2.0	-	52.95	Peak	68.2	Pass
ac40	5310	Ant2	5350	-56.49	2.0	0.24	40.98	Average	54	Pass
ac40	5310	Ant2	5350.4	-43.48	2.0	-	53.75	Peak	68.2	Pass
ac40	5310	Ant2	5351.6	-56.12	2.0	0.24	41.35	Average	54	Pass
ac40	5310	Ant2	5460	-49.84	2.0	-	47.39	Peak	68.2	Pass
ac40	5310	Ant2	5460	-57.42	2.0	0.24	40.05	Average	54	Pass
ac80	5290	Ant2	4500	-49.68	2.0	-	47.55	Peak	68.2	Pass
ac80	5290	Ant2	4500	-58.33	2.0	0.47	39.37	Average	54	Pass
ac80	5290	Ant2	5140.32	-44.99	2.0	-	52.24	Peak	68.2	Pass
ac80	5290	Ant2	5149.89	-55.24	2.0	0.47	42.46	Average	54	Pass
ac80	5290	Ant2	5150	-45.39	2.0	-	51.84	Peak	68.2	Pass
ac80	5290	Ant2	5150	-55.24	2.0	0.47	42.46	Average	54	Pass
ac80	5290	Ant2	5350	-48.15	2.0	-	49.08	Peak	68.2	Pass
ac80	5290	Ant2	5350	-56.36	2.0	0.47	41.34	Average	54	Pass
ac80	5290	Ant2	5351.5	-44.81	2.0	-	52.42	Peak	68.2	Pass
ac80	5290	Ant2	5351	-55.61	2.0	0.47	42.09	Average	54	Pass
ac80	5290	Ant2	5460	-50.92	2.0	-	46.31	Peak	68.2	Pass
ac80	5290	Ant2	5460	-57.75	2.0	0.47	39.95	Average	54	Pass
ax20	5260	Ant2	4500	-49.92	2.0	-	47.31	Peak	68.2	Pass
ax20	5260	Ant2	4500	-58.92	2.0	0.12	38.43	Average	54	Pass
ax20	5260	Ant2	5038.98	-46.29	2.0	-	50.94	Peak	68.2	Pass
ax20	5260	Ant2	5028.06	-56.5	2.0	0.12	40.85	Average	54	Pass
ax20	5260	Ant2	5150	-49.08	2.0	-	48.15	Peak	68.2	Pass
ax20	5260	Ant2	5150	-57.5	2.0	0.12	39.85	Average	54	Pass
ax20	5320	Ant2	5350	-46.72	2.0	-	50.51	Peak	68.2	Pass
ax20	5320	Ant2	5350	-55.91	2.0	0.12	41.44	Average	54	Pass
ax20	5320	Ant2	5352.2	-42.14	2.0	-	55.09	Peak	68.2	Pass
ax20	5320	Ant2	5350.2	-55.61	2.0	0.12	41.74	Average	54	Pass
ax20	5320	Ant2	5460	-49.02	2.0	-	48.21	Peak	68.2	Pass
ax20	5320	Ant2	5460	-57.5	2.0	0.12	39.85	Average	54	Pass
ax40	5270	Ant2	4500	-50.32	2.0	-	46.91	Peak	68.2	Pass
ax40	5270	Ant2	4500	-59	2.0	0.24	38.47	Average	54	Pass
ax40	5270	Ant2	5102.64	-46.41	2.0	-	50.82	Peak	68.2	Pass
ax40	5270	Ant2	4772.97	-56.47	2.0	0.24	41.00	Average	54	Pass
ax40	5270	Ant2	5150	-47.58	2.0	-	49.65	Peak	68.2	Pass
ax40	5270	Ant2	5150	-57.77	2.0	0.24	39.70	Average	54	Pass
ax40	5310	Ant2	5350	-44.7	2.0	-	52.53	Peak	68.2	Pass
ax40	5310	Ant2	5350	-56.03	2.0	0.24	41.44	Average	54	Pass
ax40	5310	Ant2	5350.2	-43.32	2.0	-	53.91	Peak	68.2	Pass
ax40	5310	Ant2	5350.4	-55.25	2.0	0.24	42.22	Average	54	Pass
ax40	5310	Ant2	5460	-49.68	2.0	-	47.55	Peak	68.2	Pass
ax40	5310	Ant2	5460	-57.85	2.0	0.24	39.62	Average	54	Pass
ax80	5290	Ant2	5350	-46.73	2.0	-	50.50	Peak	68.2	Pass
ax80	5290	Ant2	5350	-55.6	2.0	0.47	42.10	Average	54	Pass
ax80	5290	Ant2	5351.75	-44.49	2.0	-	52.74	Peak	68.2	Pass
ax80	5290	Ant2	5350	-55.6	2.0	0.47	42.10	Average	54	Pass
ax80	5290	Ant2	5460	-49.59	2.0	-	47.64	Peak	68.2	Pass
ax80	5290	Ant2	5460	-57.55	2.0	0.47	40.15	Average	54	Pass
ax80	5290	Ant2	4500	-49.94	2.0	-	47.29	Peak	68.2	Pass
ax80	5290	Ant2	4500	-58.62	2.0	0.47	39.08	Average	54	Pass
ax80	5290	Ant2	5148.15	-43.86	2.0	-	53.37	Peak	68.2	Pass
ax80	5290	Ant2	5147.28	-55.2	2.0	0.47	42.50	Average	54	Pass
ax80	5290	Ant2	5150	-46.12	2.0	-	51.11	Peak	68.2	Pass
ax80	5290	Ant2	5150	-55.3	2.0	0.47	42.40	Average	54	Pass
ac160	5250	Ant2	5350	-55.97	2.0	-	41.26	Peak	68.2	Pass
ac160	5250	Ant2	5350	-65.78	2.0	3.79	35.24	Average	54	Pass
ac160	5250	Ant2	5350.85	-41.71	2.0	-	55.52	Peak	68.2	Pass
ac160	5250	Ant2	5355.66	-60.04	2.0	3.79	40.98	Average	54	Pass
ac160	5250	Ant2	5460	-58.47	2.0	-	38.76	Peak	68.2	Pass
ac160	5250	Ant2	5460	-66.93	2.0	3.79	34.09	Average	54	Pass
ac160	5250	Ant2	4500	-60.24	2.0	-	36.99	Peak	68.2	Pass
ac160	5250	Ant2	4500	-68.84	2.0	3.79	32.18	Average	54	Pass
ac160	5250	Ant2	5148.83	-45.09	2.0	-	52.14	Peak	68.2	Pass
ac160	5250	Ant2	5128.81	-61.87	2.0	3.79	39.15	Average	54	Pass


ac160	5250	Ant2	5150	-54.76	2.0	-	42.47	Peak	68.2	Pass
ac160	5250	Ant2	5150	-63.19	2.0	3.79	37.83	Average	54	Pass
ax160	5250	Ant2	5350	-56.09	2.0	-	41.14	Peak	68.2	Pass
ax160	5250	Ant2	5350	-65.26	2.0	3.77	35.74	Average	54	Pass
ax160	5250	Ant2	5350.48	-42.42	2.0	-	54.81	Peak	68.2	Pass
ax160	5250	Ant2	5355.66	-60.7	2.0	3.77	40.30	Average	54	Pass
ax160	5250	Ant2	5460	-58.67	2.0	-	38.56	Peak	68.2	Pass
ax160	5250	Ant2	5460	-68.11	2.0	3.77	32.89	Average	54	Pass
ax160	5250	Ant2	4500	-59.92	2.0	-	37.31	Peak	68.2	Pass
ax160	5250	Ant2	4500	-68.98	2.0	3.77	32.02	Average	54	Pass
ax160	5250	Ant2	5145.19	-45.5	2.0	-	51.73	Peak	68.2	Pass
ax160	5250	Ant2	5127.9	-62.03	2.0	3.77	38.97	Average	54	Pass
ax160	5250	Ant2	5150	-53.22	2.0	-	44.01	Peak	68.2	Pass
ax160	5250	Ant2	5150	-63.57	2.0	3.77	37.43	Average	54	Pass


MIMO


Condition	Mode	Frequency (MHz)	Ant1 Power (dBm)	Ant2 Power (dBm)	Directional gain (dBi)	Total E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	n20	5260	-49.8	-50.19	4.95	53.19	Peak	68.2	Pass
NVNT	n20	5260	-58.99	-58.72	4.95	44.33	Average	54	Pass
NVNT	n20	5260	-46.85	-46.2	4.95	56.67	Peak	68.2	Pass
NVNT	n20	5260	-56.68	-56.58	4.95	46.56	Average	54	Pass
NVNT	n20	5260	-47.36	-47.48	4.95	55.77	Peak	68.2	Pass
NVNT	n20	5260	-57.34	-56.91	4.95	46.07	Average	54	Pass
NVNT	n20	5320	-45.67	-45.02	4.95	57.85	Peak	68.2	Pass
NVNT	n20	5320	-55.9	-56.1	4.95	47.19	Average	54	Pass
NVNT	n20	5320	-44.17	-45.02	4.95	58.61	Peak	68.2	Pass
NVNT	n20	5320	-55.74	-54.72	4.95	47.99	Average	54	Pass
NVNT	n20	5320	-49.27	-49.5	4.95	53.8	Peak	68.2	Pass
NVNT	n20	5320	-57.97	-57.5	4.95	45.46	Average	54	Pass
NVNT	n40	5270	-50.13	-51.77	4.95	52.31	Peak	68.2	Pass
NVNT	n40	5270	-58.71	-59.19	4.95	44.24	Average	54	Pass
NVNT	n40	5270	-45.9	-45.38	4.95	57.55	Peak	68.2	Pass
NVNT	n40	5270	-56.65	-56.36	4.95	46.68	Average	54	Pass
NVNT	n40	5270	-49.35	-47.99	4.95	54.57	Peak	68.2	Pass
NVNT	n40	5270	-57.3	-57.3	4.95	45.89	Average	54	Pass
NVNT	n40	5310	-43.58	-45.33	4.95	58.82	Peak	68.2	Pass
NVNT	n40	5310	-56.07	-56.28	4.95	47.01	Average	54	Pass
NVNT	n40	5310	-43.58	-44.65	4.95	59.1	Peak	68.2	Pass
NVNT	n40	5310	-55.79	-55.73	4.95	47.43	Average	54	Pass
NVNT	n40	5310	-48.64	-49.72	4.95	54.04	Peak	68.2	Pass
NVNT	n40	5310	-57.52	-57.72	4.95	45.57	Average	54	Pass
NVNT	ac20	5260	-51.07	-48.89	4.95	53.34	Peak	68.2	Pass
NVNT	ac20	5260	-58.9	-58.47	4.95	44.51	Average	54	Pass
NVNT	ac20	5260	-46.25	-46.31	4.95	56.91	Peak	68.2	Pass
NVNT	ac20	5260	-56.53	-56.58	4.95	46.63	Average	54	Pass
NVNT	ac20	5260	-48.69	-47.07	4.95	55.38	Peak	68.2	Pass
NVNT	ac20	5260	-57.12	-57.1	4.95	46.08	Average	54	Pass
NVNT	ac20	5320	-46.08	-46.57	4.95	56.87	Peak	68.2	Pass
NVNT	ac20	5320	-56.32	-56.29	4.95	46.88	Average	54	Pass
NVNT	ac20	5320	-45.16	-40.27	4.95	61.12	Peak	68.2	Pass
NVNT	ac20	5320	-55.51	-55.78	4.95	47.54	Average	54	Pass
NVNT	ac20	5320	-50.31	-49.49	4.95	53.3	Peak	68.2	Pass
NVNT	ac20	5320	-57.7	-57.6	4.95	45.54	Average	54	Pass
NVNT	ac40	5270	-50.56	-48.12	4.95	54.01	Peak	68.2	Pass
NVNT	ac40	5270	-58.44	-58.85	4.95	44.55	Average	54	Pass
NVNT	ac40	5270	-45.76	-46.28	4.95	57.17	Peak	68.2	Pass
NVNT	ac40	5270	-56.64	-56.48	4.95	46.63	Average	54	Pass
NVNT	ac40	5270	-49.54	-48.74	4.95	54.06	Peak	68.2	Pass
NVNT	ac40	5270	-57.52	-57.33	4.95	45.76	Average	54	Pass
NVNT	ac40	5310	-43.23	-44.28	4.95	59.46	Peak	68.2	Pass


NVNT	ac40	5310	-55.99	-56.49	4.95	46.95	Average	54	Pass
NVNT	ac40	5310	-42.72	-43.48	4.95	60.1	Peak	68.2	Pass
NVNT	ac40	5310	-55.82	-56.12	4.95	47.22	Average	54	Pass
NVNT	ac40	5310	-49.64	-49.84	4.95	53.45	Peak	68.2	Pass
NVNT	ac40	5310	-58.34	-57.42	4.95	45.33	Average	54	Pass
NVNT	ac80	5290	-50.9	-49.68	4.95	52.94	Peak	68.2	Pass
NVNT	ac80	5290	-58.42	-58.33	4.95	44.81	Average	54	Pass
NVNT	ac80	5290	-46.01	-44.99	4.95	57.72	Peak	68.2	Pass
NVNT	ac80	5290	-55.48	-55.24	4.95	47.83	Average	54	Pass
NVNT	ac80	5290	-48.7	-45.39	4.95	56.45	Peak	68.2	Pass
NVNT	ac80	5290	-55.88	-55.24	4.95	47.64	Average	54	Pass
NVNT	ac80	5290	-46.36	-48.15	4.95	56.02	Peak	68.2	Pass
NVNT	ac80	5290	-56.09	-56.36	4.95	46.96	Average	54	Pass
NVNT	ac80	5290	-45.02	-44.81	4.95	58.27	Peak	68.2	Pass
NVNT	ac80	5290	-55.73	-55.61	4.95	47.52	Average	54	Pass
NVNT	ac80	5290	-48.58	-50.92	4.95	53.59	Peak	68.2	Pass
NVNT	ac80	5290	-57.68	-57.75	4.95	45.47	Average	54	Pass
NVNT	ax20	5260	-49.58	-49.92	4.95	53.44	Peak	68.2	Pass
NVNT	ax20	5260	-58.78	-58.92	4.95	44.34	Average	54	Pass
NVNT	ax20	5260	-46.73	-46.29	4.95	56.68	Peak	68.2	Pass
NVNT	ax20	5260	-56.64	-56.5	4.95	46.62	Average	54	Pass
NVNT	ax20	5260	-49.52	-49.08	4.95	53.89	Peak	68.2	Pass
NVNT	ax20	5260	-57.32	-57.5	4.95	45.78	Average	54	Pass
NVNT	ax20	5320	-47.61	-46.72	4.95	56.04	Peak	68.2	Pass
NVNT	ax20	5320	-55.96	-55.91	4.95	47.25	Average	54	Pass
NVNT	ax20	5320	-43.21	-42.14	4.95	60.54	Peak	68.2	Pass
NVNT	ax20	5320	-55.44	-55.61	4.95	47.66	Average	54	Pass
NVNT	ax20	5320	-48.51	-49.02	4.95	54.43	Peak	68.2	Pass
NVNT	ax20	5320	-58.01	-57.5	4.95	45.44	Average	54	Pass
NVNT	ax40	5270	-49.56	-50.32	4.95	53.26	Peak	68.2	Pass
NVNT	ax40	5270	-58.83	-59	4.95	44.27	Average	54	Pass
NVNT	ax40	5270	-46.36	-46.41	4.95	56.8	Peak	68.2	Pass
NVNT	ax40	5270	-56.36	-56.47	4.95	46.77	Average	54	Pass
NVNT	ax40	5270	-49.19	-47.58	4.95	54.87	Peak	68.2	Pass
NVNT	ax40	5270	-57.13	-57.77	4.95	45.75	Average	54	Pass
NVNT	ax40	5310	-42.4	-44.7	4.95	59.79	Peak	68.2	Pass
NVNT	ax40	5310	-55.8	-56.03	4.95	47.27	Average	54	Pass
NVNT	ax40	5310	-42.4	-43.32	4.95	60.35	Peak	68.2	Pass
NVNT	ax40	5310	-55.8	-55.25	4.95	47.67	Average	54	Pass
NVNT	ax40	5310	-49.68	-49.68	4.95	53.51	Peak	68.2	Pass
NVNT	ax40	5310	-57.8	-57.85	4.95	45.36	Average	54	Pass
NVNT	ax80	5290	-47.96	-46.73	4.95	55.88	Peak	68.2	Pass
NVNT	ax80	5290	-55.5	-55.6	4.95	47.64	Average	54	Pass
NVNT	ax80	5290	-43.38	-44.49	4.95	59.29	Peak	68.2	Pass
NVNT	ax80	5290	-55.33	-55.6	4.95	47.72	Average	54	Pass
NVNT	ax80	5290	-49.67	-49.59	4.95	53.56	Peak	68.2	Pass
NVNT	ax80	5290	-57.9	-57.55	4.95	45.46	Average	54	Pass
NVNT	ax80	5290	-49.35	-49.94	4.95	53.55	Peak	68.2	Pass
NVNT	ax80	5290	-58.38	-58.62	4.95	44.69	Average	54	Pass
NVNT	ax80	5290	-44.56	-43.86	4.95	58.99	Peak	68.2	Pass
NVNT	ax80	5290	-55.51	-55.2	4.95	47.83	Average	54	Pass
NVNT	ax80	5290	-46.6	-46.12	4.95	56.83	Peak	68.2	Pass
NVNT	ax80	5290	-55.51	-55.3	4.95	47.78	Average	54	Pass
NVNT	ac160	5250	-43.5	-55.97	4.95	56.91	Peak	68.2	Pass
NVNT	ac160	5250	-57.75	-65.78	4.95	43.06	Average	54	Pass
NVNT	ac160	5250	-38.8	-41.71	4.95	63.17	Peak	68.2	Pass
NVNT	ac160	5250	-55.64	-60.04	4.95	45.88	Average	54	Pass
NVNT	ac160	5250	-56.35	-58.47	4.95	45.9	Peak	68.2	Pass
NVNT	ac160	5250	-65.24	-66.93	4.95	37.18	Average	54	Pass
NVNT	ac160	5250	-61.46	-60.24	4.95	42.38	Peak	68.2	Pass
NVNT	ac160	5250	-68.64	-68.84	4.95	34.45	Average	54	Pass
NVNT	ac160	5250	-40.26	-45.09	4.95	61.15	Peak	68.2	Pass


NVNT	ac160	5250	-54.37	-61.87	4.95	46.52	Average	54	Pass
NVNT	ac160	5250	-42.05	-54.76	4.95	58.35	Peak	68.2	Pass
NVNT	ac160	5250	-55.28	-63.19	4.95	45.55	Average	54	Pass
NVNT	ax160	5250	-46.16	-56.09	4.95	54.44	Peak	68.2	Pass
NVNT	ax160	5250	-56.49	-65.26	4.95	44.23	Average	54	Pass
NVNT	ax160	5250	-38.45	-42.42	4.95	63.19	Peak	68.2	Pass
NVNT	ax160	5250	-54.88	-60.7	4.95	46.3	Average	54	Pass
NVNT	ax160	5250	-57.28	-58.67	4.95	45.27	Peak	68.2	Pass
NVNT	ax160	5250	-65.76	-68.11	4.95	36.41	Average	54	Pass
NVNT	ax160	5250	-61.6	-59.92	4.95	42.51	Peak	68.2	Pass
NVNT	ax160	5250	-69.09	-68.98	4.95	34.15	Average	54	Pass
NVNT	ax160	5250	-38.91	-45.5	4.95	62.13	Peak	68.2	Pass
NVNT	ax160	5250	-54.62	-62.03	4.95	46.28	Average	54	Pass
NVNT	ax160	5250	-41.66	-53.22	4.95	58.81	Peak	68.2	Pass
NVNT	ax160	5250	-55.22	-63.57	4.95	45.55	Average	54	Pass

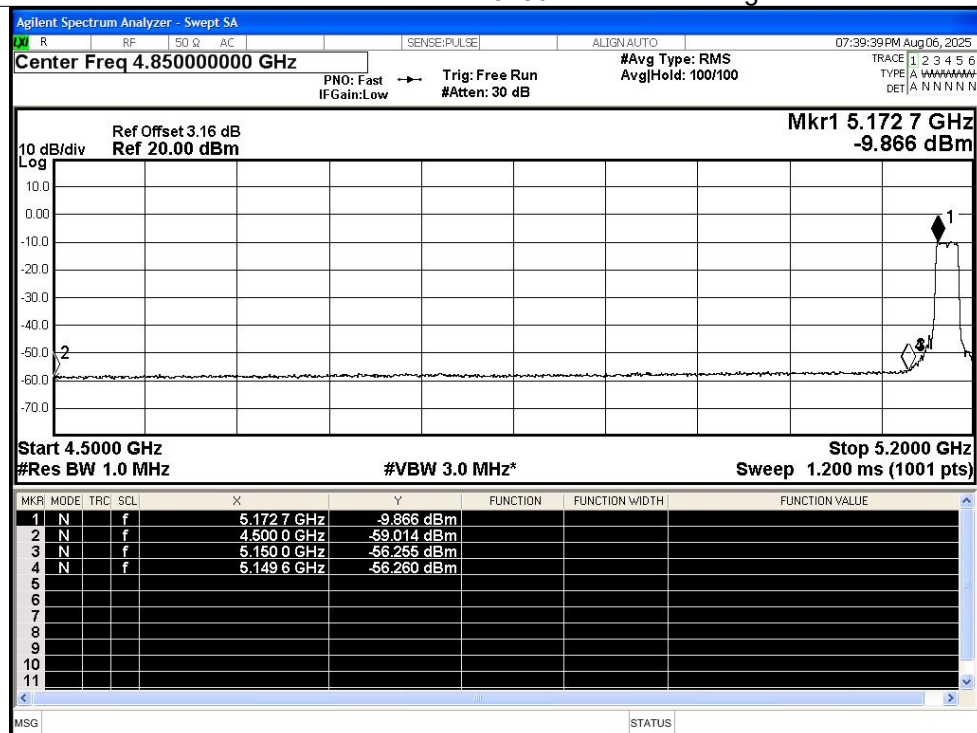

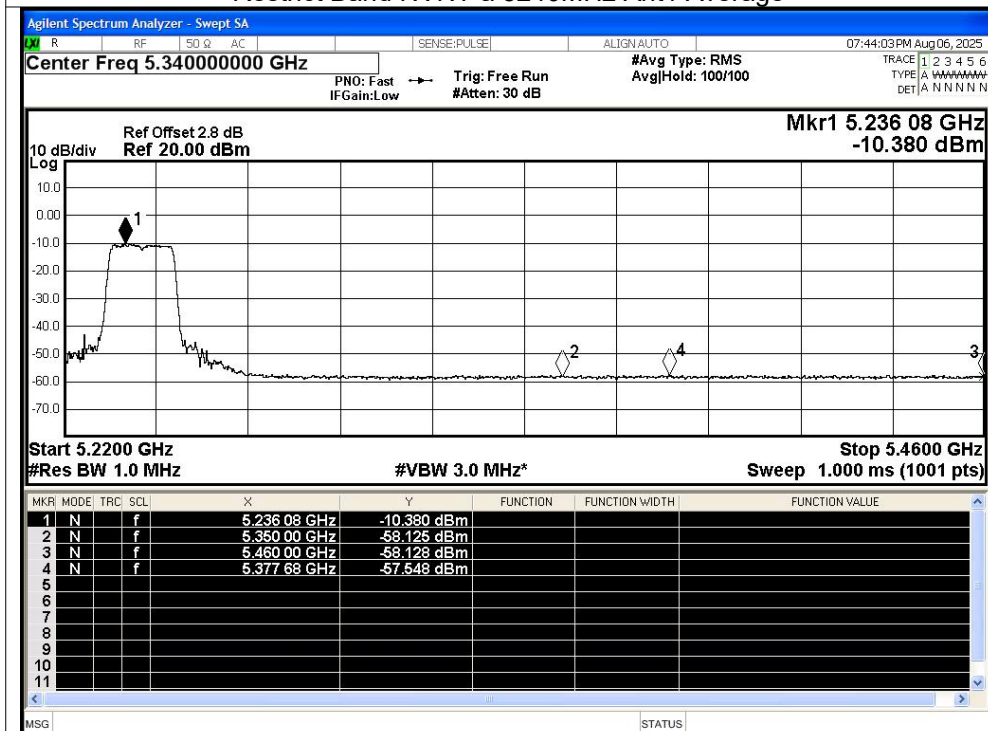


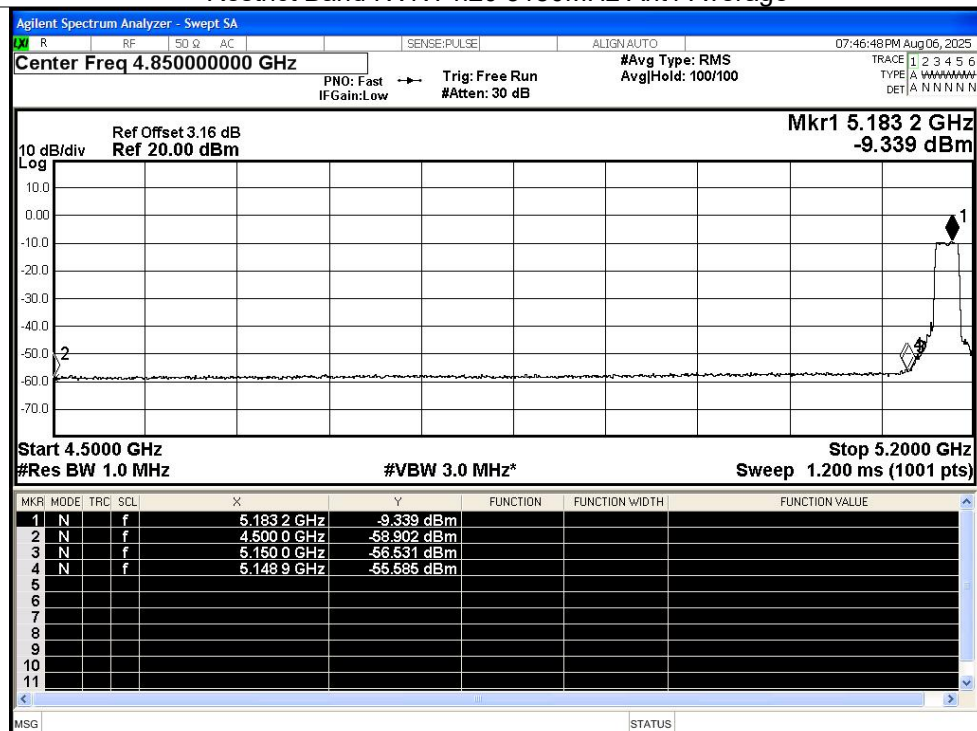

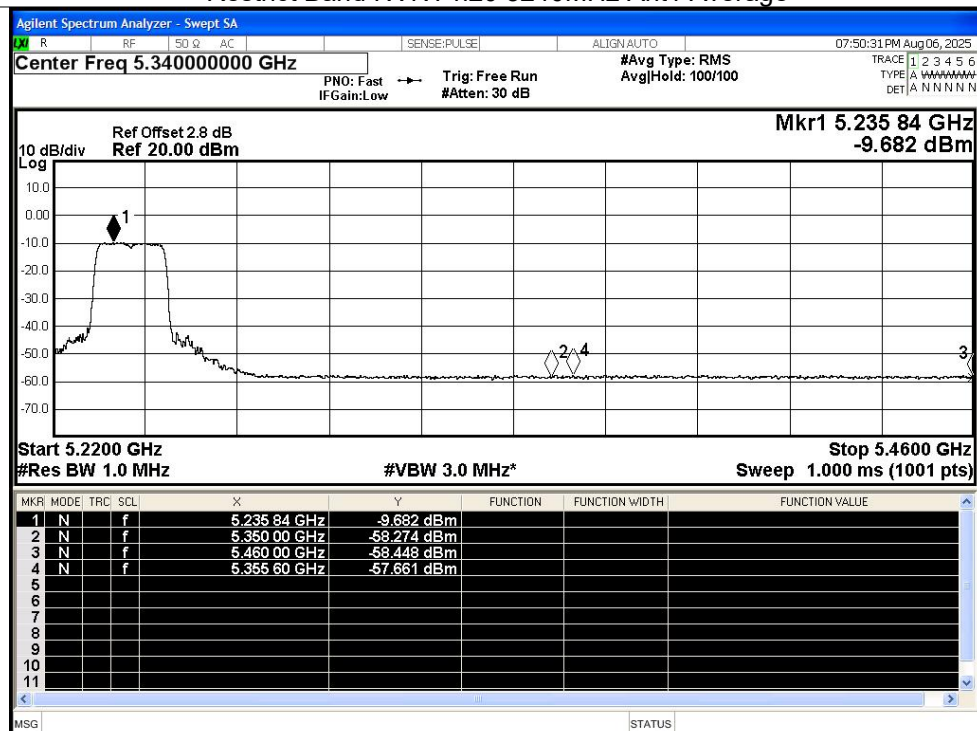

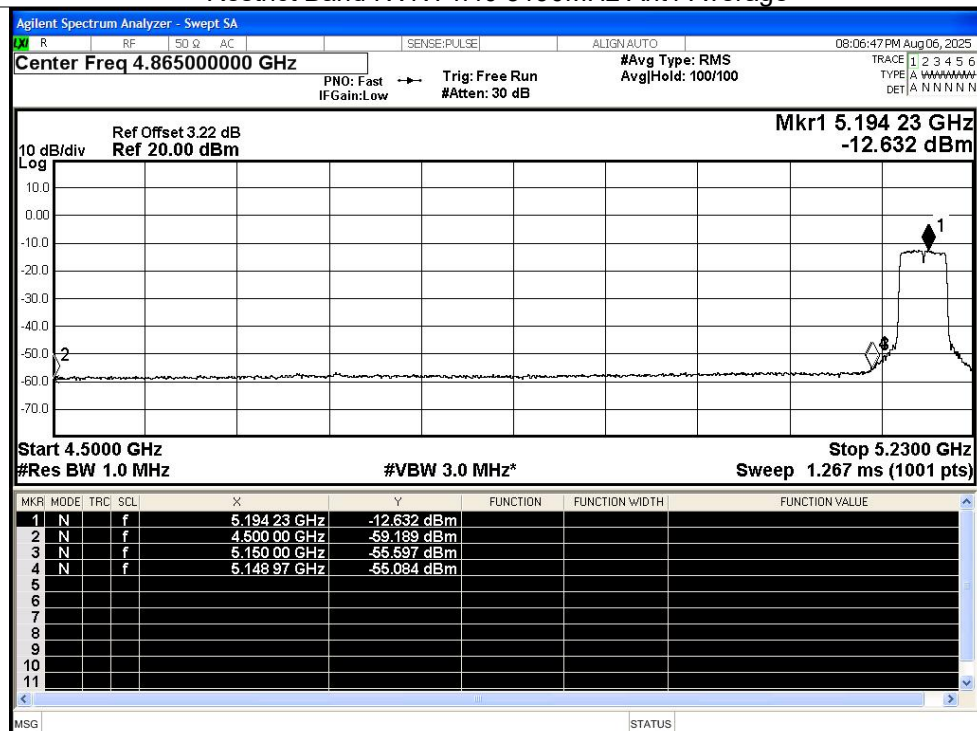

Restrict Band NVNT n40 5230MHz Ant1 Peak

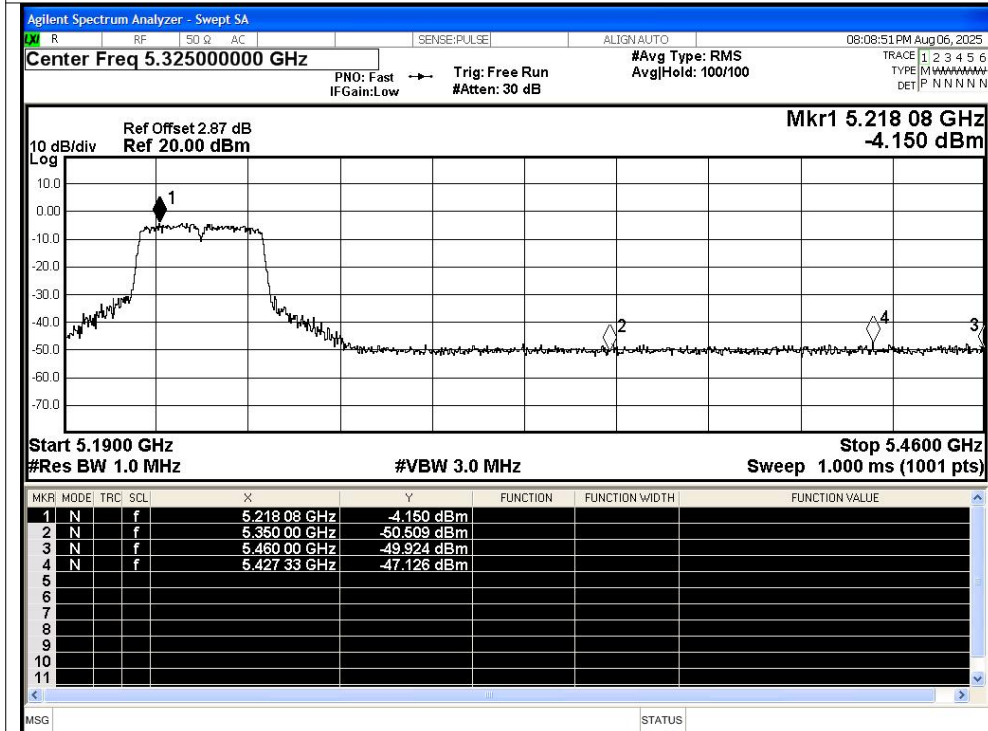

Restrict Band NVNT n40 5230MHz Ant1 Average

