

6 Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness



fn + W

Press fn + S to decrease the backlight brightness



fn + S


7 Adjust The Backlight Speed

Press fn + T to increase the light effect speed



fn + T

Press fn + G to decrease the light effect speed

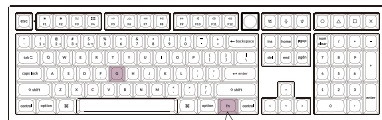

fn + G

8 The Keychron Launcher App

Please visit launcher.keychron.com to use the online Launcher web app to remap the keys, create macro commands, or flash the firmware. If the Launcher cannot recognize your keyboard, please reach our support to get the instructions.




* The online Launcher can only run on the latest version of Chrome, Edge, and Opera browsers.

9 The Layers

There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Mac system. The layer 2 and layer 3 are for the Windows system.

If your system toggle is switched to Mac, then the layer 0 will be activated.

If your system toggle is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.



10 Factory Reset & Firmware Update



fn + J + Z

Troubleshooting? Don't know what's going on with the keyboard?

Factory reset your keyboard

1. Power on your keyboard.
2. Press and hold fn + J + Z (for 4 seconds). The keyboard backlight will flash in red quickly for 3 seconds, indicating that the keyboard has been reset.

Flash your keyboard firmware

1. Visit launcher.keychron.com to open the online Launcher web app.
2. Ensure the keyboard is in Cable or Wired mode and plug in the power cable.
3. Find the 'Firmware Update' tab on the left side of the Launcher and connect your keyboard with it.
4. Follow the instructions on the Launcher and complete the firmware update.

*Step-by-step guide, search the keyword "firmware" on keychron.com.

11 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



Q6 ULTRA WIRELESS MECHANICAL KEYBOARD SPECIFICATIONS

Number of keys: 108

Switch type: Mechanical

Battery: 4000mAh

Charging time: Around 5 hours

Charging port: Type-C

Mode: 2.4 GHz/ Cable / Bluetooth



Wireless operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron Q6 Ultra 8K

Operating environment: -10 to 50°C

Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.


Q6 ULTRA WIRELESS MECHANICAL KEYBOARD OVERVIEW

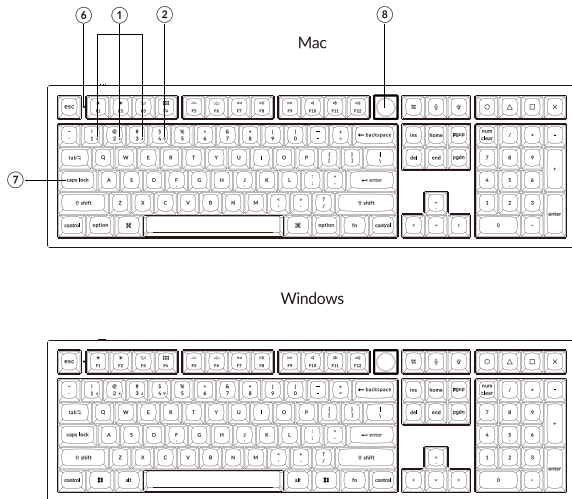

- ① Bluetooth Indicator
- ② 2.4 GHz Indicator
- ③ 2.4G / Cable / BT (Mode Toggle)
- ④ Win/Android Mac/iOS (OS Toggle)
- ⑤ Type-C Port
- ⑥ Power Indicator
- ⑦ Caps Lock Indicator
- ⑧ Knob

DEFAULT KEY LAYOUT:

LAYER 0: This layer will be activated when your keyboard's system toggle is switched to Mac.

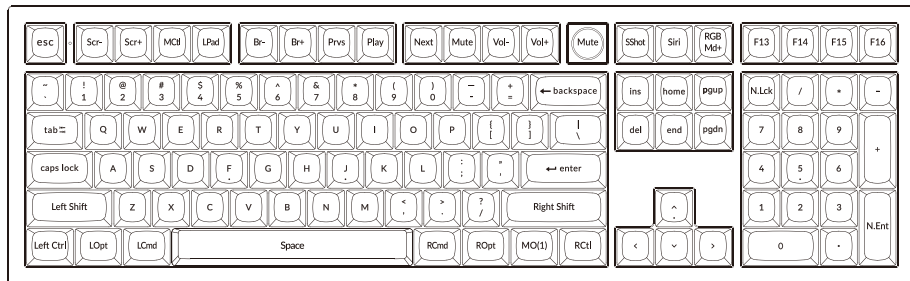

Layer 1: This layer will be activated when your keyboard's system toggle is switched to Mac and press the fn/MO(1) key.

