


PCB antenna

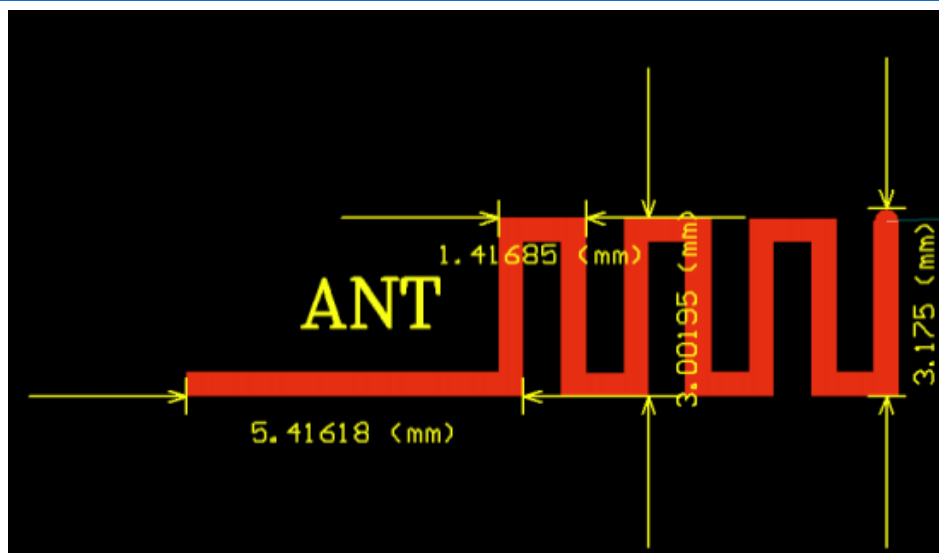

基础指标

Product model	PCB Antenna		
packaging	2.4G PCB antenna	Size:	15.0*4.7mm
frequency range	2400 ~ 2500MHz	frequency bandwidth	100MHz
input impedance	50Ω	voltage standing wave ratio	≤ 2.0
Maximum input power	50W		
operating temperature	-40 °C~ +85°C	operating humidity	20~80%

天线增益

Center Frequency (MHz)	Horizontal			Vertical		
	2400	2450	2500	2400	2450	2500
	1.54	1.23	0.86	-2.89	-4.73	-5.74
Max Gain(dBi)	1.54dBi					

驻波比和回损

Freq (MHz)	2400	2450	2500
voltage standing wave ratio	1.8	2.48	3.23
return loss (dB)	-10.87	-7.42	-5.56



联系我们

Shenzhen Qishang Technology Co.,Ltd.


Address: 313, 3rd Floor, Dingdu Guzhen Digital Trade Port, No. 30, Xinxing Middle Road, Guzhen Town, Zhongshan City

E-mail: wch@qesan.com

Radiation Chart

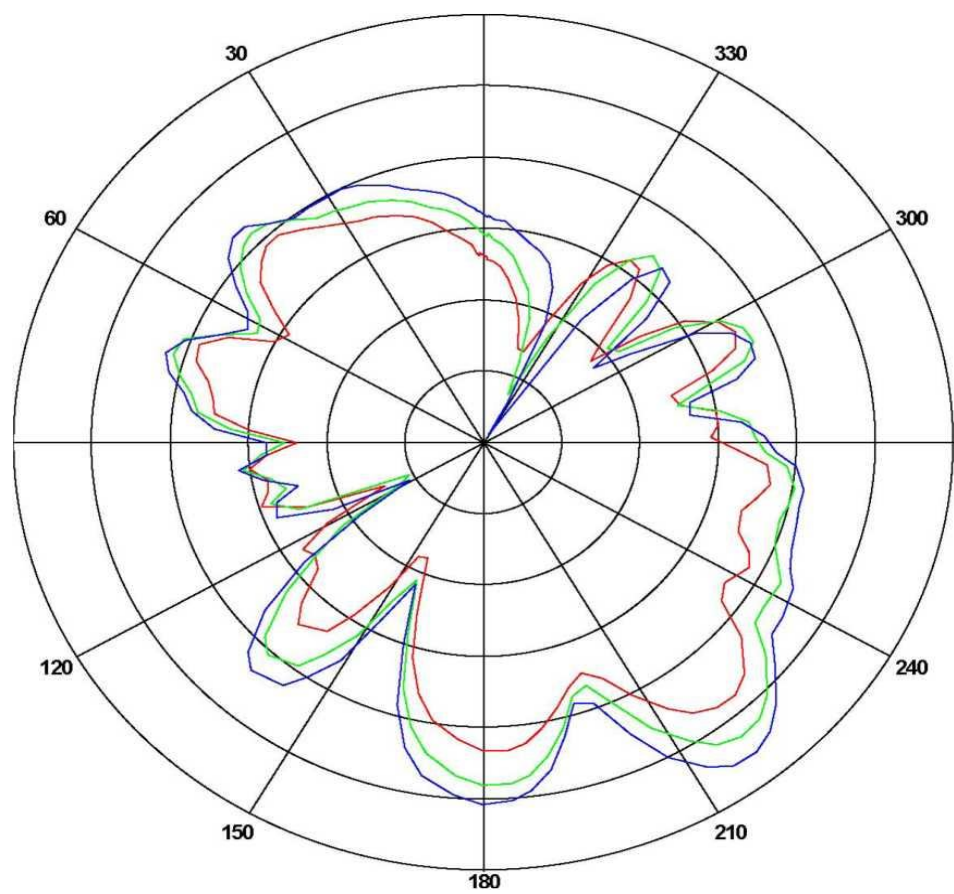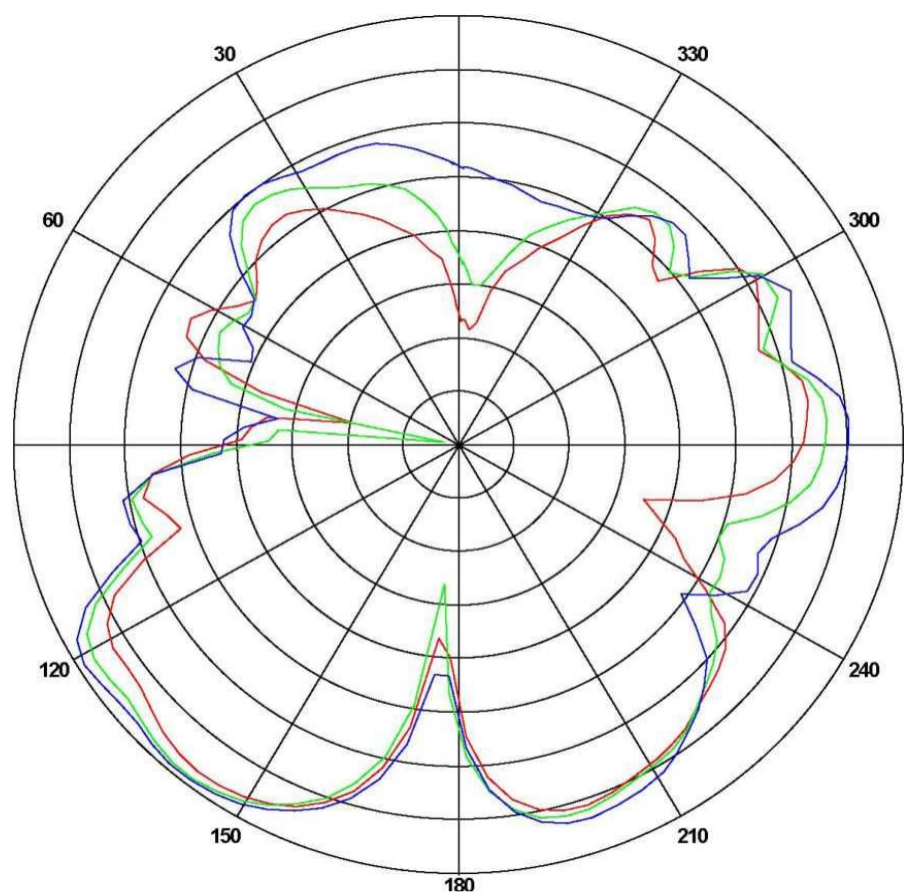

Antenna field type diagram

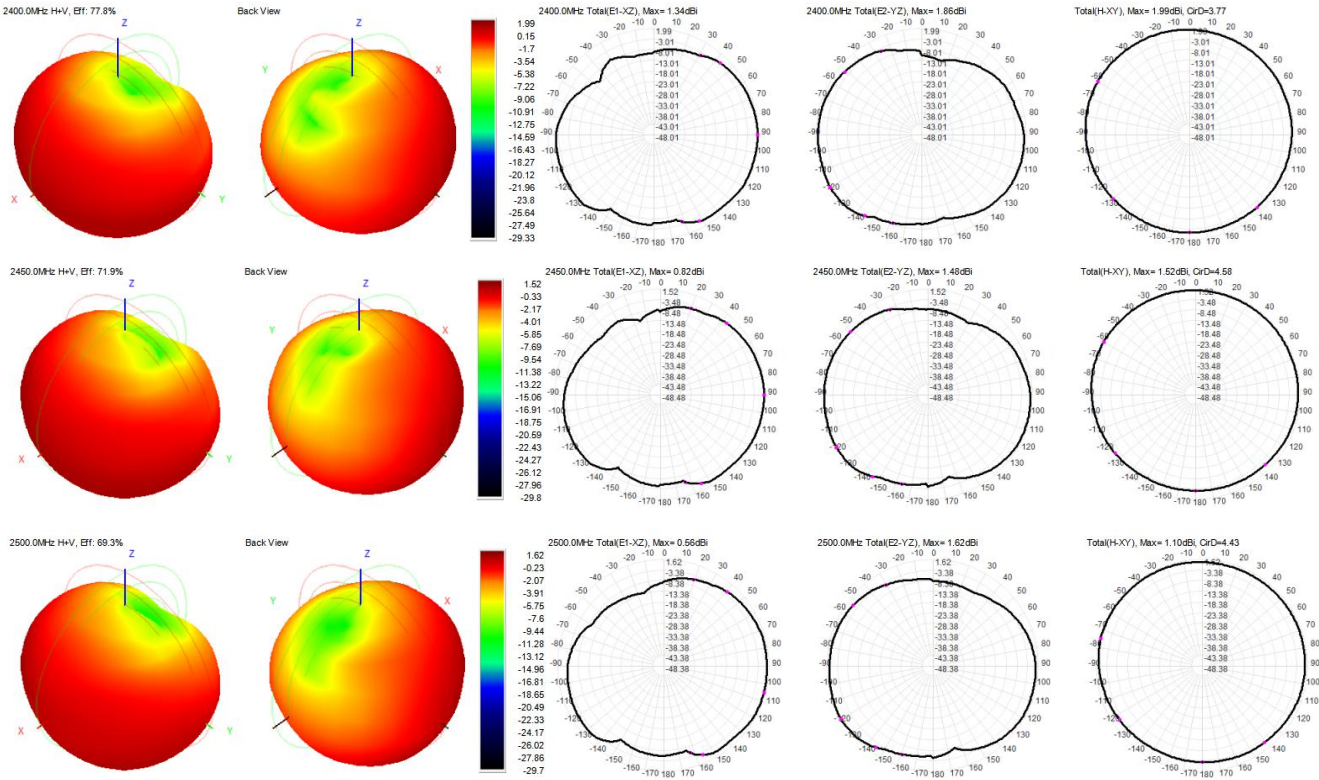

Antenna field type diagram