

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 7	Ant 8	Ant 9	Ant 10				
802.11be-EHT80	MCS0	39	6145	13.97	14.55	14.54	14.62	20.45	2.16	22.61	≤ 30.00
802.11be-EHT80	MCS0	55	6225	13.45	14.12	14.35	14.24	20.07	2.16	22.23	≤ 30.00
802.11be-EHT80	MCS0	87	6385	13.75	13.52	14.15	13.69	19.80	2.16	21.96	≤ 30.00
802.11be-EHT80	MCS0	103	6465	13.63	13.42	13.69	13.66	19.62	2.11	21.73	≤ 30.00
802.11be-EHT80	MCS0	119	6545	13.77	13.19	13.17	13.42	19.41	2.71	22.12	≤ 30.00
802.11be-EHT80	MCS0	135	6625	13.52	13.45	13.33	12.94	19.34	2.71	22.05	≤ 30.00
802.11be-EHT80	MCS0	151	6705	14.43	13.57	14.20	14.06	20.10	2.71	22.81	≤ 30.00
802.11be-EHT80	MCS0	167	6785	13.91	13.56	13.99	14.09	19.91	2.71	22.62	≤ 30.00
802.11be-EHT80	MCS0	183	6865	13.86	13.61	13.80	13.81	19.79	2.71	22.50	≤ 30.00
802.11be-EHT80	MCS0	199	6945	15.35	14.59	15.05	14.97	21.02	1.50	22.52	≤ 30.00
802.11be-EHT80	MCS0	215	7025	14.81	14.35	14.97	14.77	20.75	1.50	22.25	≤ 30.00
802.11be-EHT160	MCS0	47	6185	16.56	16.69	16.95	16.91	22.80	2.16	24.96	≤ 30.00
802.11be-EHT160	MCS0	79	6345	16.61	16.44	16.88	16.81	22.71	2.16	24.87	≤ 30.00
802.11be-EHT160	MCS0	111	6505	16.15	16.48	16.27	16.09	22.27	2.71	24.98	≤ 30.00
802.11be-EHT160	MCS0	143	6665	16.50	15.79	16.71	16.21	22.34	2.71	25.05	≤ 30.00
802.11be-EHT160	MCS0	175	6825	16.63	16.12	16.66	16.76	22.57	2.71	25.28	≤ 30.00
802.11be-EHT160	MCS0	207	6985	17.51	16.91	17.59	17.39	23.38	1.50	24.88	≤ 30.00
802.11be-EHT320	MCS0	95	6425	18.78	18.45	19.16	17.49	24.53	2.71	27.24	≤ 30.00
802.11be-EHT320	MCS0	159	6745	18.74	18.35	18.67	17.85	24.44	2.71	27.15	≤ 30.00
802.11be-EHT320	MCS0	63	6265	18.45	19.84	19.83	19.02	25.34	2.16	27.50	≤ 30.00
802.11be-EHT320	MCS0	127	6585	18.24	19.43	19.48	18.22	24.91	2.71	27.62	≤ 30.00
802.11be-EHT320	MCS0	191	6905	18.34	18.76	19.15	18.17	24.64	2.71	27.35	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 7 Average Power} / 10)} + 10^{(\text{Ant 8 Average Power} / 10)} + 10^{(\text{Ant 9 Average Power} / 10)} + 10^{(\text{Ant 10 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

Test Site	WJ-SR2	Test Engineer	Layla Gui
Test Date	2025-12-02 ~ 2025-12-03	Test Mode	Mode B, Nss = 1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 7	Ant 8	Ant 11	Ant 12				
802.11ax-HE20	MCS0	33	6115	1.65	1.91	1.74	0.93	7.59	4.57	12.16	≤ 30.00
802.11ax-HE20	MCS0	61	6255	1.47	2.02	1.63	0.51	7.46	4.57	12.03	≤ 30.00
802.11ax-HE20	MCS0	93	6415	1.81	1.66	1.57	1.69	7.70	4.57	12.27	≤ 30.00
802.11ax-HE20	MCS0	97	6435	1.97	1.83	1.49	1.61	7.75	3.89	11.64	≤ 30.00
802.11ax-HE20	MCS0	105	6475	2.57	2.01	1.72	1.33	7.95	3.89	11.84	≤ 30.00
802.11ax-HE20	MCS0	113	6515	2.08	1.89	1.98	0.72	7.72	3.89	11.61	≤ 30.00
802.11ax-HE20	MCS0	117	6535	3.23	2.61	2.92	1.91	8.72	2.72	11.44	≤ 30.00
802.11ax-HE20	MCS0	149	6695	3.21	3.06	3.08	3.61	9.27	2.72	11.99	≤ 30.00
802.11ax-HE20	MCS0	181	6855	3.22	3.25	3.21	2.11	8.99	2.72	11.71	≤ 30.00
802.11ax-HE20	MCS0	185	6875	3.36	3.23	3.19	2.03	9.00	2.72	11.72	≤ 30.00
802.11ax-HE20	MCS0	189	6895	3.65	3.69	3.88	2.96	9.58	1.64	11.22	≤ 30.00
802.11ax-HE20	MCS0	209	6995	3.74	3.85	3.80	3.61	9.77	1.64	11.41	≤ 30.00
802.11ax-HE20	MCS0	229	7095	3.89	4.23	3.84	3.94	10.00	1.64	11.64	≤ 30.00
802.11ax-HE40	MCS0	35	6125	4.27	4.61	5.01	4.21	10.56	4.57	15.13	≤ 30.00
802.11ax-HE40	MCS0	59	6245	4.62	5.37	4.95	3.72	10.73	4.57	15.30	≤ 30.00
802.11ax-HE40	MCS0	91	6405	4.53	4.37	4.41	4.47	10.47	4.57	15.04	≤ 30.00
802.11ax-HE40	MCS0	99	6445	4.93	4.68	4.42	4.34	10.62	3.89	14.51	≤ 30.00
802.11ax-HE40	MCS0	107	6485	4.64	4.83	4.47	3.58	10.43	3.89	14.32	≤ 30.00
802.11ax-HE40	MCS0	115	6525	4.86	4.36	4.33	3.46	10.30	3.89	14.19	≤ 30.00
802.11ax-HE40	MCS0	123	6565	6.21	5.62	5.56	4.28	11.49	2.72	14.21	≤ 30.00
802.11ax-HE40	MCS0	147	6685	6.17	5.79	6.20	5.75	12.00	2.72	14.72	≤ 30.00
802.11ax-HE40	MCS0	179	6845	6.63	6.09	5.61	5.85	12.08	2.72	14.80	≤ 30.00
802.11ax-HE40	MCS0	187	6885	6.49	6.33	5.91	5.32	12.06	2.72	14.78	≤ 30.00
802.11ax-HE40	MCS0	195	6925	7.32	6.78	6.92	5.05	12.62	1.64	14.26	≤ 30.00
802.11ax-HE40	MCS0	211	7005	6.67	6.07	7.26	5.03	12.35	1.64	13.99	≤ 30.00
802.11ax-HE40	MCS0	227	7085	6.63	6.61	6.90	6.08	12.59	1.64	14.23	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 7	Ant 8	Ant 11	Ant 12				
802.11ax-HE80	MCS0	39	6145	7.05	7.78	7.75	7.36	13.52	4.57	18.09	≤ 30.00
802.11ax-HE80	MCS0	55	6225	7.45	7.65	7.24	7.66	13.52	4.57	18.09	≤ 30.00
802.11ax-HE80	MCS0	87	6385	6.70	6.65	6.89	7.04	12.84	4.57	17.41	≤ 30.00
802.11ax-HE80	MCS0	103	6465	7.29	6.91	6.84	7.43	13.15	3.89	17.04	≤ 30.00
802.11ax-HE80	MCS0	119	6545	8.39	7.61	7.49	6.51	13.57	3.89	17.46	≤ 30.00
802.11ax-HE80	MCS0	135	6625	8.99	8.37	8.59	7.26	14.37	2.72	17.09	≤ 30.00
802.11ax-HE80	MCS0	151	6705	8.66	8.43	8.89	8.81	14.72	2.72	17.44	≤ 30.00
802.11ax-HE80	MCS0	167	6785	8.84	8.42	8.39	9.29	14.77	2.72	17.49	≤ 30.00
802.11ax-HE80	MCS0	183	6865	9.23	8.68	8.55	7.83	14.62	2.72	17.34	≤ 30.00
802.11ax-HE80	MCS0	199	6945	10.22	9.64	9.32	8.05	15.40	1.64	17.04	≤ 30.00
802.11ax-HE80	MCS0	215	7025	9.51	9.31	10.05	8.36	15.37	1.64	17.01	≤ 30.00
802.11ax-HE160	MCS0	47	6185	9.63	9.86	9.62	9.95	15.79	4.57	20.36	≤ 30.00
802.11ax-HE160	MCS0	79	6345	10.17	10.09	10.31	9.72	16.10	4.57	20.67	≤ 30.00
802.11ax-HE160	MCS0	111	6505	10.57	10.05	10.08	10.04	16.21	3.89	20.10	≤ 30.00
802.11ax-HE160	MCS0	143	6665	12.41	11.64	12.45	11.62	18.07	2.72	20.79	≤ 30.00
802.11ax-HE160	MCS0	175	6825	11.71	11.28	11.14	11.44	17.42	2.72	20.14	≤ 30.00
802.11ax-HE160	MCS0	207	6985	12.72	12.21	13.01	11.27	18.37	1.64	20.01	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 7 Average Power} / 10)} + 10^{(\text{Ant 8 Average Power} / 10)} + 10^{(\text{Ant 11 Average Power} / 10)} + 10^{(\text{Ant 12 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 7	Ant 8	Ant 11	Ant 12				
802.11be-EHT20	MCS0	33	6115	1.10	1.98	2.23	1.88	7.84	4.57	12.41	≤ 30.00
802.11be-EHT20	MCS0	61	6255	2.06	2.45	2.19	0.95	7.97	4.57	12.54	≤ 30.00
802.11be-EHT20	MCS0	93	6415	1.81	1.64	1.49	1.75	7.69	4.57	12.26	≤ 30.00
802.11be-EHT20	MCS0	97	6435	2.04	1.86	1.58	1.68	7.81	3.89	11.70	≤ 30.00
802.11be-EHT20	MCS0	105	6475	1.67	1.54	1.32	0.88	7.38	3.89	11.27	≤ 30.00
802.11be-EHT20	MCS0	113	6515	2.12	1.85	1.71	0.80	7.67	3.89	11.56	≤ 30.00
802.11be-EHT20	MCS0	117	6535	3.32	2.38	2.72	1.99	8.65	2.72	11.37	≤ 30.00
802.11be-EHT20	MCS0	149	6695	3.19	3.08	3.05	3.63	9.26	2.72	11.98	≤ 30.00
802.11be-EHT20	MCS0	181	6855	2.98	3.15	3.13	2.12	8.89	2.72	11.61	≤ 30.00
802.11be-EHT20	MCS0	185	6875	3.51	3.15	3.08	2.11	9.01	2.72	11.73	≤ 30.00
802.11be-EHT20	MCS0	189	6895	3.99	3.65	3.85	3.03	9.67	1.64	11.31	≤ 30.00
802.11be-EHT20	MCS0	209	6995	3.86	3.73	3.78	3.66	9.78	1.64	11.42	≤ 30.00
802.11be-EHT20	MCS0	229	7095	4.09	4.26	4.46	3.94	10.21	1.64	11.85	≤ 30.00
802.11be-EHT40	MCS0	35	6125	4.29	4.49	4.71	4.17	10.44	4.57	15.01	≤ 30.00
802.11be-EHT40	MCS0	59	6245	4.63	5.15	4.81	3.52	10.59	4.57	15.16	≤ 30.00
802.11be-EHT40	MCS0	91	6405	4.61	4.88	4.73	3.54	10.49	4.57	15.06	≤ 30.00
802.11be-EHT40	MCS0	99	6445	4.66	4.59	4.52	4.00	10.47	3.89	14.36	≤ 30.00
802.11be-EHT40	MCS0	107	6485	4.63	4.74	4.52	3.45	10.39	3.89	14.28	≤ 30.00
802.11be-EHT40	MCS0	115	6525	4.86	4.30	4.63	3.32	10.34	3.89	14.23	≤ 30.00
802.11be-EHT40	MCS0	123	6565	6.38	5.49	5.68	4.19	11.53	2.72	14.25	≤ 30.00
802.11be-EHT40	MCS0	147	6685	6.21	5.83	6.32	5.77	12.06	2.72	14.78	≤ 30.00
802.11be-EHT40	MCS0	179	6845	6.78	6.13	5.72	5.75	12.14	2.72	14.86	≤ 30.00
802.11be-EHT40	MCS0	187	6885	6.64	6.36	5.92	5.23	12.09	2.72	14.81	≤ 30.00
802.11be-EHT40	MCS0	195	6925	7.42	6.77	6.99	5.14	12.68	1.64	14.32	≤ 30.00
802.11be-EHT40	MCS0	211	7005	6.79	6.11	7.25	5.17	12.42	1.64	14.06	≤ 30.00
802.11be-EHT40	MCS0	227	7085	6.81	6.61	6.79	6.57	12.72	1.64	14.36	≤ 30.00

Test Mode	Data	Channel No.	Freq. (MHz)	Average Power				Total Average Power	Antenna Gain	EIRP	Limit	
	Rate/ MCS			(dBm)								(dBi)
				Ant 7	Ant 8	Ant 11	Ant 12					
802.11be-EHT80	MCS0	39	6145	7.07	7.78	7.68	7.23	13.47	4.57	18.04	≤ 30.00	
802.11be-EHT80	MCS0	55	6225	7.49	7.69	7.12	7.46	13.47	4.57	18.04	≤ 30.00	
802.11be-EHT80	MCS0	87	6385	6.75	6.70	6.91	6.93	12.84	4.57	17.41	≤ 30.00	
802.11be-EHT80	MCS0	103	6465	7.43	6.95	6.75	7.41	13.17	3.89	17.06	≤ 30.00	
802.11be-EHT80	MCS0	119	6545	8.43	7.60	7.48	6.40	13.56	3.89	17.45	≤ 30.00	
802.11be-EHT80	MCS0	135	6625	9.10	8.34	8.62	7.14	14.38	2.72	17.10	≤ 30.00	
802.11be-EHT80	MCS0	151	6705	8.74	8.45	8.89	8.65	14.71	2.72	17.43	≤ 30.00	
802.11be-EHT80	MCS0	167	6785	8.95	8.41	8.46	9.21	14.79	2.72	17.51	≤ 30.00	
802.11be-EHT80	MCS0	183	6865	9.28	8.68	8.61	7.82	14.65	2.72	17.37	≤ 30.00	
802.11be-EHT80	MCS0	199	6945	10.01	9.58	9.06	8.05	15.26	1.64	16.90	≤ 30.00	
802.11be-EHT80	MCS0	215	7025	9.29	9.33	9.77	8.40	15.25	1.64	16.89	≤ 30.00	
802.11be-EHT160	MCS0	47	6185	9.77	9.82	9.48	9.85	15.75	4.57	20.32	≤ 30.00	
802.11be-EHT160	MCS0	79	6345	9.69	9.54	9.76	9.18	15.57	4.57	20.14	≤ 30.00	
802.11be-EHT160	MCS0	111	6505	10.58	10.11	10.21	9.96	16.24	3.89	20.13	≤ 30.00	
802.11be-EHT160	MCS0	143	6665	11.47	10.75	11.58	10.59	17.14	2.72	19.86	≤ 30.00	
802.11be-EHT160	MCS0	175	6825	11.56	11.22	11.21	11.33	17.35	2.72	20.07	≤ 30.00	
802.11be-EHT160	MCS0	207	6985	12.68	12.24	13.15	11.19	18.39	1.64	20.03	≤ 30.00	
802.11be-EHT320	MCS0	95	6425	13.94	13.06	13.26	12.99	19.35	4.57	23.92	≤ 30.00	
802.11be-EHT320	MCS0	159	6745	15.33	14.28	14.95	14.04	20.70	2.72	23.42	≤ 30.00	
802.11be-EHT320	MCS0	63	6265	12.39	12.95	13.12	12.33	18.73	4.57	23.30	≤ 30.00	
802.11be-EHT320	MCS0	127	6585	13.53	13.71	13.75	13.15	19.56	3.89	23.45	≤ 30.00	
802.11be-EHT320	MCS0	191	6905	14.79	14.21	14.89	13.68	20.44	2.72	23.16	≤ 30.00	

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 7 Average Power} / 10)} + 10^{(\text{Ant 8 Average Power} / 10)} + 10^{(\text{Ant 11 Average Power} / 10)} + 10^{(\text{Ant 12 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

Test Site	WJ-SR2	Test Engineer	Layla Gui
Test Date	2025-11-30 ~ 2025-12-03	Test Mode	Mode B, Nss = 4

Test Mode	Data	Channel No.	Freq. (MHz)	Average Power				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
	Rate/ MCS			(dBm)							
				Ant 7	Ant 8	Ant 11	Ant 12				
802.11ax-HE20	MCS0	33	6115	4.89	4.97	5.66	4.04	10.95	4.57	15.52	≤ 30.00
802.11ax-HE20	MCS0	61	6255	4.93	5.13	5.40	4.27	10.97	4.57	15.54	≤ 30.00
802.11ax-HE20	MCS0	93	6415	4.52	4.58	5.02	5.57	10.96	4.57	15.53	≤ 30.00
802.11ax-HE20	MCS0	97	6435	5.53	4.96	5.33	6.49	11.64	3.89	15.53	≤ 30.00
802.11ax-HE20	MCS0	105	6475	5.64	5.47	5.46	5.81	11.62	3.89	15.51	≤ 30.00
802.11ax-HE20	MCS0	113	6515	6.65	5.99	6.05	5.52	12.09	3.89	15.98	≤ 30.00
802.11ax-HE20	MCS0	117	6535	7.79	7.07	7.21	6.09	13.10	2.72	15.82	≤ 30.00
802.11ax-HE20	MCS0	149	6695	7.25	7.18	7.68	7.09	13.33	2.72	16.05	≤ 30.00
802.11ax-HE20	MCS0	181	6855	7.68	7.07	6.88	6.31	13.03	2.72	15.75	≤ 30.00
802.11ax-HE20	MCS0	185	6875	7.33	6.52	6.60	5.71	12.60	2.72	15.32	≤ 30.00
802.11ax-HE20	MCS0	189	6895	8.49	8.42	8.44	7.51	14.25	1.64	15.89	≤ 30.00
802.11ax-HE20	MCS0	209	6995	8.80	8.25	8.68	7.26	14.31	1.64	15.95	≤ 30.00
802.11ax-HE20	MCS0	229	7095	8.65	8.39	8.87	8.76	14.69	1.64	16.33	≤ 30.00
802.11ax-HE40	MCS0	35	6125	9.18	9.45	9.88	8.75	15.36	4.57	19.93	≤ 30.00
802.11ax-HE40	MCS0	59	6245	9.23	9.52	9.14	8.84	15.21	4.57	19.78	≤ 30.00
802.11ax-HE40	MCS0	91	6405	8.83	8.79	8.62	9.53	14.98	4.57	19.55	≤ 30.00
802.11ax-HE40	MCS0	99	6445	9.17	9.02	8.75	9.85	15.24	3.89	19.13	≤ 30.00
802.11ax-HE40	MCS0	107	6485	9.42	9.33	8.94	9.57	15.34	3.89	19.23	≤ 30.00
802.11ax-HE40	MCS0	115	6525	9.92	9.33	9.30	8.62	15.34	3.89	19.23	≤ 30.00
802.11ax-HE40	MCS0	123	6565	11.45	10.72	10.91	9.48	16.72	2.72	19.44	≤ 30.00
802.11ax-HE40	MCS0	147	6685	11.34	11.06	11.33	11.03	17.21	2.72	19.93	≤ 30.00
802.11ax-HE40	MCS0	179	6845	11.47	11.23	10.90	11.24	17.24	2.72	19.96	≤ 30.00
802.11ax-HE40	MCS0	187	6885	11.19	11.39	11.71	10.63	17.27	2.72	19.99	≤ 30.00
802.11ax-HE40	MCS0	195	6925	11.51	12.46	11.03	10.73	17.50	1.64	19.14	≤ 30.00
802.11ax-HE40	MCS0	211	7005	10.99	11.88	11.45	10.78	17.32	1.64	18.96	≤ 30.00
802.11ax-HE40	MCS0	227	7085	12.02	11.62	10.91	11.83	17.64	1.64	19.28	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 7	Ant 8	Ant 11	Ant 12				
802.11ax-HE80	MCS0	39	6145	10.68	10.88	11.37	10.80	16.96	4.57	21.53	≤ 30.00
802.11ax-HE80	MCS0	55	6225	10.46	10.73	10.38	9.82	16.38	4.57	20.95	≤ 30.00
802.11ax-HE80	MCS0	87	6385	11.33	11.35	11.63	11.71	17.53	4.57	22.10	≤ 30.00
802.11ax-HE80	MCS0	103	6465	12.34	12.08	11.91	12.58	18.26	3.89	22.15	≤ 30.00
802.11ax-HE80	MCS0	119	6545	12.82	12.23	12.26	11.06	18.16	3.89	22.05	≤ 30.00
802.11ax-HE80	MCS0	135	6625	14.10	13.09	13.77	12.33	19.40	2.72	22.12	≤ 30.00
802.11ax-HE80	MCS0	151	6705	13.83	13.24	14.04	13.51	19.69	2.72	22.41	≤ 30.00
802.11ax-HE80	MCS0	167	6785	14.09	13.61	14.17	14.54	20.14	2.72	22.86	≤ 30.00
802.11ax-HE80	MCS0	183	6865	14.44	14.03	14.16	13.44	20.05	2.72	22.77	≤ 30.00
802.11ax-HE80	MCS0	199	6945	14.66	15.52	14.99	13.11	20.68	1.64	22.32	≤ 30.00
802.11ax-HE80	MCS0	215	7025	14.87	14.29	15.29	13.30	20.52	1.64	22.16	≤ 30.00
802.11ax-HE160	MCS0	47	6185	14.11	14.01	14.15	14.09	20.11	4.57	24.68	≤ 30.00
802.11ax-HE160	MCS0	79	6345	14.24	13.86	14.19	13.53	19.98	4.57	24.55	≤ 30.00
802.11ax-HE160	MCS0	111	6505	15.08	14.32	14.41	14.27	20.55	3.89	24.44	≤ 30.00
802.11ax-HE160	MCS0	143	6665	16.52	15.70	16.54	15.77	22.17	2.72	24.89	≤ 30.00
802.11ax-HE160	MCS0	175	6825	16.09	15.69	15.92	15.93	21.93	2.72	24.65	≤ 30.00
802.11ax-HE160	MCS0	207	6985	17.36	16.90	17.61	15.87	23.00	1.64	24.64	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 7 Average Power} / 10)} + 10^{(\text{Ant 8 Average Power} / 10)} + 10^{(\text{Ant 11 Average Power} / 10)} + 10^{(\text{Ant 12 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 7	Ant 8	Ant 11	Ant 12				
802.11be-EHT20	MCS0	33	6115	6.24	6.02	6.77	4.95	12.06	4.57	16.63	≤ 30.00
802.11be-EHT20	MCS0	61	6255	6.60	6.78	6.86	5.71	12.53	4.57	17.10	≤ 30.00
802.11be-EHT20	MCS0	93	6415	6.14	5.84	6.39	6.90	12.36	4.57	16.93	≤ 30.00
802.11be-EHT20	MCS0	97	6435	6.68	5.96	6.31	7.12	12.56	3.89	16.45	≤ 30.00
802.11be-EHT20	MCS0	105	6475	6.72	6.47	6.46	6.79	12.63	3.89	16.52	≤ 30.00
802.11be-EHT20	MCS0	113	6515	7.62	7.03	6.85	6.27	12.99	3.89	16.88	≤ 30.00
802.11be-EHT20	MCS0	117	6535	8.89	8.24	8.01	7.03	14.11	2.72	16.83	≤ 30.00
802.11be-EHT20	MCS0	149	6695	8.12	7.85	8.37	7.56	14.01	2.72	16.73	≤ 30.00
802.11be-EHT20	MCS0	181	6855	8.44	7.95	8.22	7.35	14.03	2.72	16.75	≤ 30.00
802.11be-EHT20	MCS0	185	6875	8.51	8.11	8.17	7.12	14.03	2.72	16.75	≤ 30.00
802.11be-EHT20	MCS0	189	6895	9.94	9.19	9.38	8.29	15.26	1.64	16.90	≤ 30.00
802.11be-EHT20	MCS0	209	6995	9.63	9.02	9.44	7.89	15.07	1.64	16.71	≤ 30.00
802.11be-EHT20	MCS0	229	7095	9.07	9.46	9.71	8.62	15.25	1.64	16.89	≤ 30.00
802.11be-EHT40	MCS0	35	6125	9.12	9.32	9.87	8.46	15.24	4.57	19.81	≤ 30.00
802.11be-EHT40	MCS0	59	6245	9.24	9.42	9.18	8.60	15.14	4.57	19.71	≤ 30.00
802.11be-EHT40	MCS0	91	6405	8.75	8.58	8.37	9.33	14.79	4.57	19.36	≤ 30.00
802.11be-EHT40	MCS0	99	6445	9.14	8.95	8.63	9.71	15.15	3.89	19.04	≤ 30.00
802.11be-EHT40	MCS0	107	6485	9.38	9.21	8.93	9.21	15.21	3.89	19.10	≤ 30.00
802.11be-EHT40	MCS0	115	6525	9.86	9.26	9.23	8.23	15.20	3.89	19.09	≤ 30.00
802.11be-EHT40	MCS0	123	6565	11.46	10.59	10.81	9.34	16.64	2.72	19.36	≤ 30.00
802.11be-EHT40	MCS0	147	6685	11.35	10.94	11.25	10.68	17.08	2.72	19.80	≤ 30.00
802.11be-EHT40	MCS0	179	6845	11.41	11.02	10.78	10.89	17.05	2.72	19.77	≤ 30.00
802.11be-EHT40	MCS0	187	6885	11.69	11.24	11.15	10.38	17.16	2.72	19.88	≤ 30.00
802.11be-EHT40	MCS0	195	6925	13.05	12.44	12.59	10.78	18.32	1.64	19.96	≤ 30.00
802.11be-EHT40	MCS0	211	7005	12.38	11.88	12.71	10.75	18.01	1.64	19.65	≤ 30.00
802.11be-EHT40	MCS0	227	7085	12.05	11.45	12.09	11.68	17.85	1.64	19.49	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 7	Ant 8	Ant 11	Ant 12				
802.11be-EHT80	MCS0	39	6145	11.55	11.85	12.41	11.82	17.94	4.57	22.51	≤ 30.00
802.11be-EHT80	MCS0	55	6225	11.37	11.76	11.52	11.89	17.66	4.57	22.23	≤ 30.00
802.11be-EHT80	MCS0	87	6385	11.34	11.28	11.58	11.74	17.51	4.57	22.08	≤ 30.00
802.11be-EHT80	MCS0	103	6465	11.28	12.01	11.84	12.66	18.00	3.89	21.89	≤ 30.00
802.11be-EHT80	MCS0	119	6545	12.76	12.09	12.15	11.12	18.09	3.89	21.98	≤ 30.00
802.11be-EHT80	MCS0	135	6625	13.60	12.42	13.09	11.79	18.80	2.72	21.52	≤ 30.00
802.11be-EHT80	MCS0	151	6705	13.88	12.96	13.78	13.36	19.53	2.72	22.25	≤ 30.00
802.11be-EHT80	MCS0	167	6785	13.59	12.95	13.34	13.81	19.45	2.72	22.17	≤ 30.00
802.11be-EHT80	MCS0	183	6865	14.31	14.04	13.95	12.91	19.85	2.72	22.57	≤ 30.00
802.11be-EHT80	MCS0	199	6945	15.44	14.62	14.78	13.10	20.59	1.64	22.23	≤ 30.00
802.11be-EHT80	MCS0	215	7025	14.95	14.34	15.19	13.39	20.54	1.64	22.18	≤ 30.00
802.11be-EHT160	MCS0	47	6185	14.11	13.86	14.09	13.98	20.03	4.57	24.60	≤ 30.00
802.11be-EHT160	MCS0	79	6345	14.15	13.77	14.31	13.56	19.98	4.57	24.55	≤ 30.00
802.11be-EHT160	MCS0	111	6505	14.98	14.39	14.42	14.29	20.55	3.89	24.44	≤ 30.00
802.11be-EHT160	MCS0	143	6665	15.95	15.20	16.23	15.24	21.70	2.72	24.42	≤ 30.00
802.11be-EHT160	MCS0	175	6825	16.19	15.62	15.99	15.79	21.92	2.72	24.64	≤ 30.00
802.11be-EHT160	MCS0	207	6985	17.35	16.86	17.61	15.92	23.00	1.64	24.64	≤ 30.00
802.11be-EHT320	MCS0	95	6425	17.93	16.95	17.26	16.97	23.32	4.57	27.89	≤ 30.00
802.11be-EHT320	MCS0	159	6745	20.02	18.83	19.39	18.39	25.22	2.72	27.94	≤ 30.00
802.11be-EHT320	MCS0	63	6265	17.06	17.37	17.56	16.56	23.17	4.57	27.74	≤ 30.00
802.11be-EHT320	MCS0	127	6585	17.88	18.23	18.22	17.53	24.00	3.89	27.89	≤ 30.00
802.11be-EHT320	MCS0	191	6905	19.57	19.12	19.56	18.66	25.26	2.72	27.98	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 7 Average Power} / 10)} + 10^{(\text{Ant 8 Average Power} / 10)} + 10^{(\text{Ant 11 Average Power} / 10)} + 10^{(\text{Ant 12 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

A.4 Power Spectral Density Test Result

Test Site	WJ-SR2	Test Engineer	Layla Gui
Test Date	2025-11-19 ~ 2025-12-05	Test Mode	Mode A, Nss = 1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 7	Ant 8	Ant 9	Ant 10				
802.11ax-HE20	MCS0	33	6115	-8.951	-9.128	-8.713	-8.966	99.71	7.50	4.58	≤ 5.00
802.11ax-HE20	MCS0	61	6255	-8.891	-8.437	-8.385	-8.679	99.71	7.50	4.93	≤ 5.00
802.11ax-HE20	MCS0	93	6415	-8.762	-9.098	-8.976	-8.878	99.71	7.50	4.59	≤ 5.00
802.11ax-HE20	MCS0	97	6435	-8.408	-9.062	-8.766	-8.889	99.71	7.50	4.75	≤ 5.00
802.11ax-HE20	MCS0	105	6475	-8.132	-8.947	-8.557	-8.567	99.71	7.50	4.98	≤ 5.00
802.11ax-HE20	MCS0	113	6515	-8.635	-9.048	-8.824	-9.068	99.71	7.50	4.63	≤ 5.00
802.11ax-HE20	MCS0	117	6535	-8.699	-9.347	-8.938	-9.048	99.71	7.50	4.52	≤ 5.00
802.11ax-HE20	MCS0	149	6695	-8.993	-9.180	-8.248	-8.739	99.71	7.50	4.74	≤ 5.00
802.11ax-HE20	MCS0	181	6855	-8.245	-8.894	-8.464	-8.571	99.71	7.50	4.98	≤ 5.00
802.11ax-HE20	MCS0	185	6875	-8.437	-9.436	-9.147	-9.225	99.71	7.50	4.48	≤ 5.00
802.11ax-HE20	MCS0	189	6895	-8.082	-8.739	-8.112	-8.225	99.71	6.50	4.24	≤ 5.00
802.11ax-HE20	MCS0	209	6995	-8.037	-8.158	-7.940	-8.029	99.71	6.50	4.48	≤ 5.00
802.11ax-HE20	MCS0	229	7095	-8.572	-8.455	-7.732	-7.924	99.71	6.50	4.36	≤ 5.00
802.11ax-HE40	MCS0	35	6125	-8.923	-8.786	-8.725	-9.045	99.63	7.50	4.65	≤ 5.00
802.11ax-HE40	MCS0	59	6245	-8.804	-8.399	-8.299	-8.850	99.63	7.50	4.94	≤ 5.00
802.11ax-HE40	MCS0	91	6405	-8.714	-8.355	-8.215	-8.912	99.63	7.50	4.98	≤ 5.00
802.11ax-HE40	MCS0	99	6445	-9.211	-9.079	-8.732	-9.176	99.63	7.50	4.48	≤ 5.00
802.11ax-HE40	MCS0	107	6485	-8.834	-8.819	-8.617	-8.872	99.63	7.50	4.74	≤ 5.00
802.11ax-HE40	MCS0	115	6525	-8.477	-8.764	-8.787	-8.642	99.63	7.50	4.85	≤ 5.00
802.11ax-HE40	MCS0	123	6565	-8.242	-8.860	-8.730	-8.697	99.63	7.50	4.89	≤ 5.00
802.11ax-HE40	MCS0	147	6685	-8.630	-9.382	-8.514	-9.339	99.63	7.50	4.57	≤ 5.00
802.11ax-HE40	MCS0	179	6845	-8.204	-8.792	-8.991	-8.995	99.63	7.50	4.79	≤ 5.00
802.11ax-HE40	MCS0	187	6885	-8.598	-8.678	-8.638	-8.826	99.63	7.50	4.84	≤ 5.00
802.11ax-HE40	MCS0	195	6925	-7.989	-8.332	-8.433	-8.445	99.63	6.50	4.22	≤ 5.00
802.11ax-HE40	MCS0	211	7005	-7.950	-8.402	-8.038	-7.900	99.63	6.50	4.45	≤ 5.00
802.11ax-HE40	MCS0	227	7085	-8.061	-7.843	-7.627	-8.498	99.63	6.50	4.53	≤ 5.00

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 7	Ant 8	Ant 9	Ant 10				
802.11ax-HE80	MCS0	39	6145	-9.102	-9.172	-8.611	-9.074	99.63	7.50	4.54	≤ 5.00
802.11ax-HE80	MCS0	55	6225	-8.622	-8.590	-8.576	-9.078	99.63	7.50	4.81	≤ 5.00
802.11ax-HE80	MCS0	87	6385	-8.817	-8.657	-8.379	-9.228	99.63	7.50	4.76	≤ 5.00
802.11ax-HE80	MCS0	103	6465	-8.589	-8.826	-8.637	-9.239	99.63	7.50	4.71	≤ 5.00
802.11ax-HE80	MCS0	119	6545	-8.084	-8.578	-8.894	-8.943	99.63	7.50	4.91	≤ 5.00
802.11ax-HE80	MCS0	135	6625	-8.303	-9.218	-9.189	-9.370	99.63	7.50	4.52	≤ 5.00
802.11ax-HE80	MCS0	151	6705	-8.621	-8.836	-8.316	-8.888	99.63	7.50	4.86	≤ 5.00
802.11ax-HE80	MCS0	167	6785	-8.319	-8.584	-8.637	-8.633	99.63	7.50	4.98	≤ 5.00
802.11ax-HE80	MCS0	183	6865	-8.422	-8.591	-8.639	-8.659	99.63	7.50	4.94	≤ 5.00
802.11ax-HE80	MCS0	199	6945	-7.810	-8.662	-8.518	-8.904	99.63	6.50	4.07	≤ 5.00
802.11ax-HE80	MCS0	215	7025	-8.054	-7.982	-7.890	-8.287	99.63	6.50	4.47	≤ 5.00
802.11ax-HE160	MCS0	47	6185	-8.171	-9.190	-8.530	-9.610	99.67	7.50	4.68	≤ 5.00
802.11ax-HE160	MCS0	79	6345	-8.812	-8.668	-8.471	-9.360	99.67	7.50	4.71	≤ 5.00
802.11ax-HE160	MCS0	111	6505	-8.445	-8.754	-8.580	-9.015	99.67	7.50	4.83	≤ 5.00
802.11ax-HE160	MCS0	143	6665	-7.996	-8.966	-8.409	-9.115	99.67	7.50	4.92	≤ 5.00
802.11ax-HE160	MCS0	175	6825	-8.602	-9.013	-8.821	-9.278	99.67	7.50	4.60	≤ 5.00
802.11ax-HE160	MCS0	207	6985	-7.713	-8.398	-7.557	-8.032	99.67	6.50	4.61	≤ 5.00

Note: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 7 PSD}/10)} + 10^{(\text{Ant 8 PSD}/10)} + 10^{(\text{Ant 9 PSD}/10)} + 10^{(\text{Ant 10 PSD}/10)}\}$

(dBm/MHz) + $10 \times \log (1/\text{Duty Cycle})$ + Antenna Gain (dBi).

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 7	Ant 8	Ant 9	Ant 10				
802.11be-EHT20	MCS0	33	6115	-8.316	-9.001	-8.699	-8.556	99.67	7.50	4.88	≤ 5.00
802.11be-EHT20	MCS0	61	6255	-8.834	-8.784	-9.045	-8.637	99.67	7.50	4.70	≤ 5.00
802.11be-EHT20	MCS0	93	6415	-8.261	-8.813	-8.955	-8.296	99.67	7.50	4.95	≤ 5.00
802.11be-EHT20	MCS0	97	6435	-8.530	-9.234	-9.152	-8.792	99.67	7.50	4.60	≤ 5.00
802.11be-EHT20	MCS0	105	6475	-7.907	-9.238	-8.795	-8.554	99.67	7.50	4.92	≤ 5.00
802.11be-EHT20	MCS0	113	6515	-8.567	-9.398	-9.151	-8.972	99.67	7.50	4.51	≤ 5.00
802.11be-EHT20	MCS0	117	6535	-8.019	-9.097	-8.693	-8.672	99.67	7.50	4.92	≤ 5.00
802.11be-EHT20	MCS0	149	6695	-8.977	-9.425	-8.532	-8.688	99.67	7.50	4.63	≤ 5.00
802.11be-EHT20	MCS0	181	6855	-8.495	-9.112	-8.725	-8.962	99.67	7.50	4.70	≤ 5.00
802.11be-EHT20	MCS0	185	6875	-8.418	-9.294	-8.974	-9.046	99.67	7.50	4.60	≤ 5.00
802.11be-EHT20	MCS0	189	6895	-8.083	-8.711	-8.043	-8.275	99.67	6.50	4.25	≤ 5.00
802.11be-EHT20	MCS0	209	6995	-8.133	-8.340	-7.974	-8.337	99.67	6.50	4.33	≤ 5.00
802.11be-EHT20	MCS0	229	7095	-8.982	-8.940	-8.274	-8.530	99.67	6.50	3.85	≤ 5.00
802.11be-EHT40	MCS0	35	6125	-8.784	-8.721	-8.626	-8.797	99.63	7.50	4.79	≤ 5.00
802.11be-EHT40	MCS0	59	6245	-9.489	-8.835	-8.656	-8.994	99.63	7.50	4.54	≤ 5.00
802.11be-EHT40	MCS0	91	6405	-9.258	-8.817	-8.836	-9.277	99.63	7.50	4.48	≤ 5.00
802.11be-EHT40	MCS0	99	6445	-9.052	-9.009	-8.772	-8.981	99.63	7.50	4.57	≤ 5.00
802.11be-EHT40	MCS0	107	6485	-8.627	-8.653	-8.542	-8.947	99.63	7.50	4.83	≤ 5.00
802.11be-EHT40	MCS0	115	6525	-8.381	-8.934	-8.714	-8.428	99.63	7.50	4.91	≤ 5.00
802.11be-EHT40	MCS0	123	6565	-8.190	-9.030	-8.872	-8.900	99.63	7.50	4.79	≤ 5.00
802.11be-EHT40	MCS0	147	6685	-8.635	-9.555	-8.660	-9.169	99.63	7.50	4.53	≤ 5.00
802.11be-EHT40	MCS0	179	6845	-8.564	-8.884	-8.932	-9.419	99.63	7.50	4.58	≤ 5.00
802.11be-EHT40	MCS0	187	6885	-8.625	-8.667	-8.395	-8.994	99.63	7.50	4.86	≤ 5.00
802.11be-EHT40	MCS0	195	6925	-8.062	-8.550	-8.350	-8.835	99.63	6.50	4.08	≤ 5.00
802.11be-EHT40	MCS0	211	7005	-8.155	-8.450	-7.926	-8.108	99.63	6.50	4.36	≤ 5.00
802.11be-EHT40	MCS0	227	7085	-8.009	-7.901	-7.797	-8.413	99.63	6.50	4.50	≤ 5.00

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 7	Ant 8	Ant 9	Ant 10				
802.11be-EHT80	MCS0	39	6145	-8.589	-8.853	-8.858	-9.291	99.67	7.50	4.63	≤ 5.00
802.11be-EHT80	MCS0	55	6225	-9.060	-8.795	-8.411	-9.758	99.67	7.50	4.54	≤ 5.00
802.11be-EHT80	MCS0	87	6385	-8.825	-8.180	-8.151	-9.151	99.67	7.50	4.96	≤ 5.00
802.11be-EHT80	MCS0	103	6465	-8.470	-8.525	-8.748	-9.086	99.67	7.50	4.82	≤ 5.00
802.11be-EHT80	MCS0	119	6545	-8.667	-9.024	-9.156	-9.127	99.67	7.50	4.53	≤ 5.00
802.11be-EHT80	MCS0	135	6625	-8.183	-9.047	-8.919	-9.316	99.67	7.50	4.68	≤ 5.00
802.11be-EHT80	MCS0	151	6705	-8.481	-9.113	-8.385	-8.613	99.67	7.50	4.88	≤ 5.00
802.11be-EHT80	MCS0	167	6785	-8.314	-8.620	-8.519	-8.880	99.67	7.50	4.94	≤ 5.00
802.11be-EHT80	MCS0	183	6865	-8.464	-8.791	-8.580	-8.533	99.67	7.50	4.93	≤ 5.00
802.11be-EHT80	MCS0	199	6945	-8.010	-8.964	-8.960	-8.874	99.67	6.50	3.84	≤ 5.00
802.11be-EHT80	MCS0	215	7025	-8.119	-8.269	-8.106	-8.193	99.67	6.50	4.35	≤ 5.00
802.11be-EHT160	MCS0	47	6185	-8.115	-8.983	-8.154	-9.210	99.71	7.50	4.93	≤ 5.00
802.11be-EHT160	MCS0	79	6345	-8.645	-9.156	-8.650	-9.416	99.71	7.50	4.57	≤ 5.00
802.11be-EHT160	MCS0	111	6505	-8.866	-9.037	-9.007	-9.054	99.71	7.50	4.53	≤ 5.00
802.11be-EHT160	MCS0	143	6665	-8.333	-9.505	-8.553	-9.291	99.71	7.50	4.63	≤ 5.00
802.11be-EHT160	MCS0	175	6825	-8.565	-9.009	-8.793	-8.634	99.71	7.50	4.77	≤ 5.00
802.11be-EHT160	MCS0	207	6985	-7.723	-8.322	-7.672	-7.676	99.71	6.50	4.68	≤ 5.00
802.11be-EHT320	MCS0	95	6425	-8.272	-9.307	-8.549	-9.240	99.71	7.50	4.70	≤ 5.00
802.11be-EHT320	MCS0	159	6745	-7.914	-9.137	-8.925	-8.722	99.71	7.50	4.87	≤ 5.00
802.11be-EHT320	MCS0	63	6265	-8.924	-8.477	-8.958	-8.816	99.71	7.50	4.73	≤ 5.00
802.11be-EHT320	MCS0	127	6585	-8.555	-8.192	-8.780	-9.072	99.71	7.50	4.88	≤ 5.00
802.11be-EHT320	MCS0	191	6905	-8.419	-8.828	-8.675	-8.801	99.71	7.50	4.84	≤ 5.00


Note: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 7 PSD}/10)} + 10^{(\text{Ant 8 PSD}/10)} + 10^{(\text{Ant 9 PSD}/10)} + 10^{(\text{Ant 10 PSD}/10)}\}$

(dBm/MHz) + $10 \times \log (1/\text{Duty Cycle})$ + Antenna Gain (dBi).

Channel 61 (6255 MHz)



Channel 97 (6435 MHz)

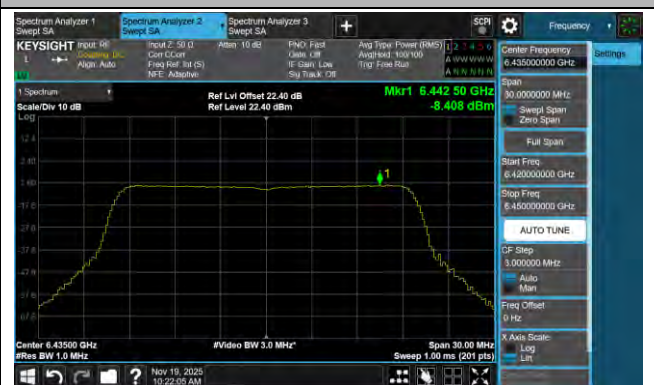

Channel 113 (6515 MHz)



802.11ax-HE20 Power Spectral Density- Ant 7 (Nss = 1)

Channel 117 (6535 MHz)



Channel 149 (6695 MHz)




Channel 181 (6855 MHz)



Channel 185 (6875 MHz)




Channel 189 (6895 MHz)

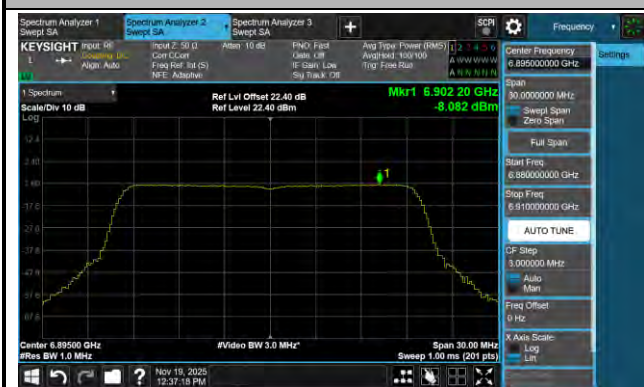

Channel 209 (6995 MHz)



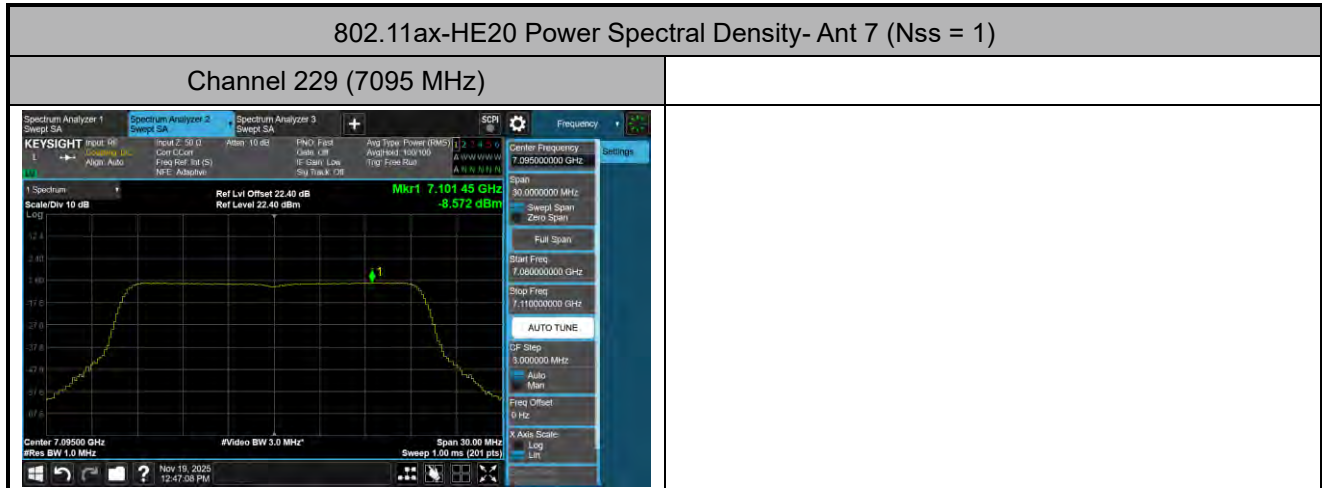


802.11ax-HE40 Power Spectral Density- Ant 7 (Nss = 1)

Channel 35 (6125 MHz)




Channel 59 (6245 MHz)

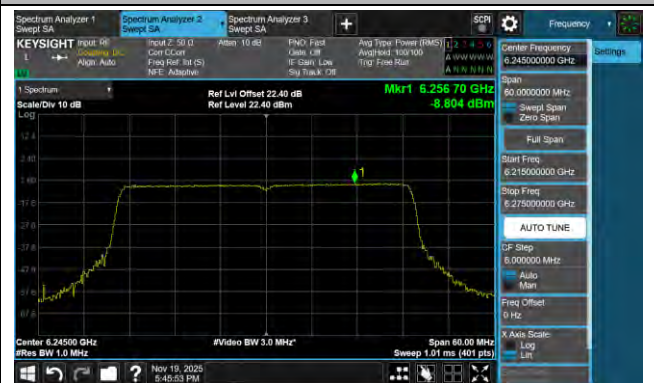


Channel 91 (6405 MHz)



Channel 99 (6445 MHz)

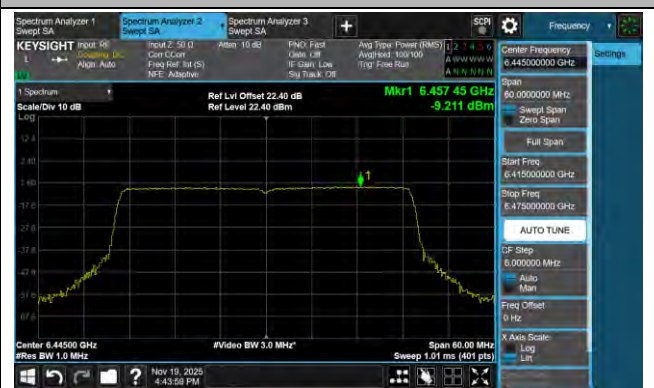

Channel 107 (6485 MHz)

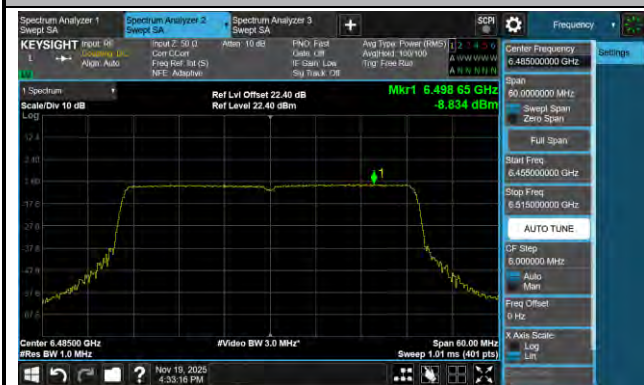

Channel 115 (6525 MHz)




802.11ax-HE40 Power Spectral Density- Ant 7 (Nss = 1)


Channel 123 (6565 MHz)




Channel 147 (6685 MHz)

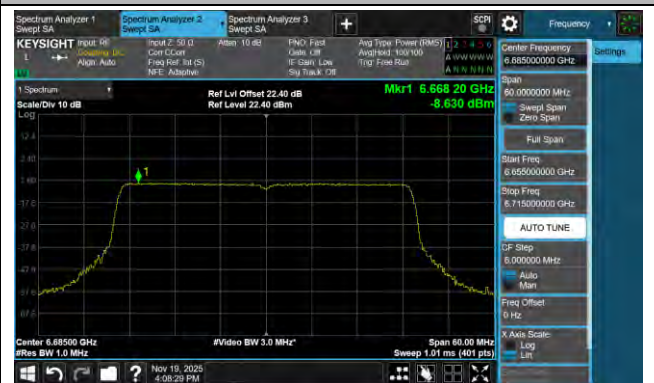

Channel 179 (6845 MHz)

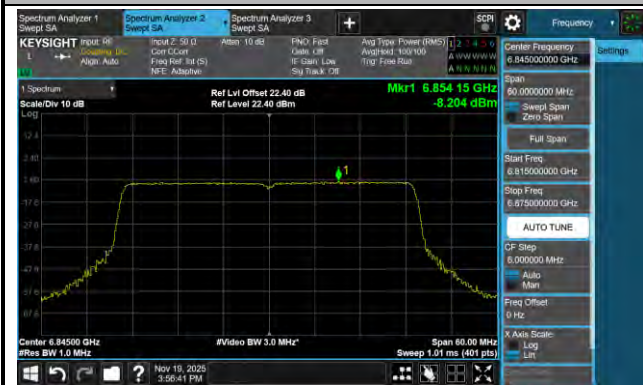


Channel 187 (6885 MHz)

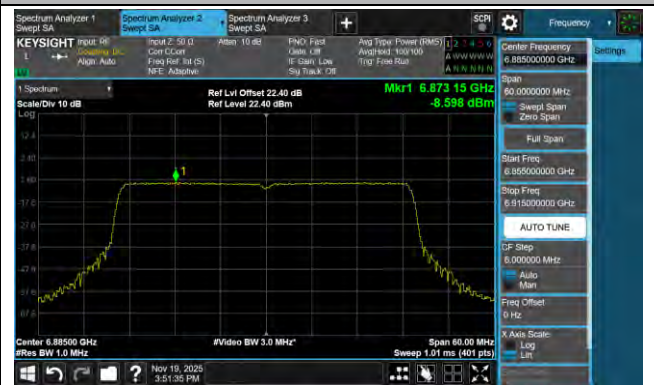


Channel 195 (6925 MHz)



Channel 211 (7005 MHz)

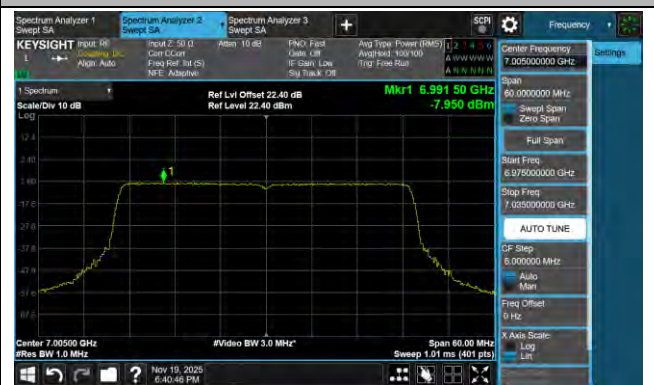

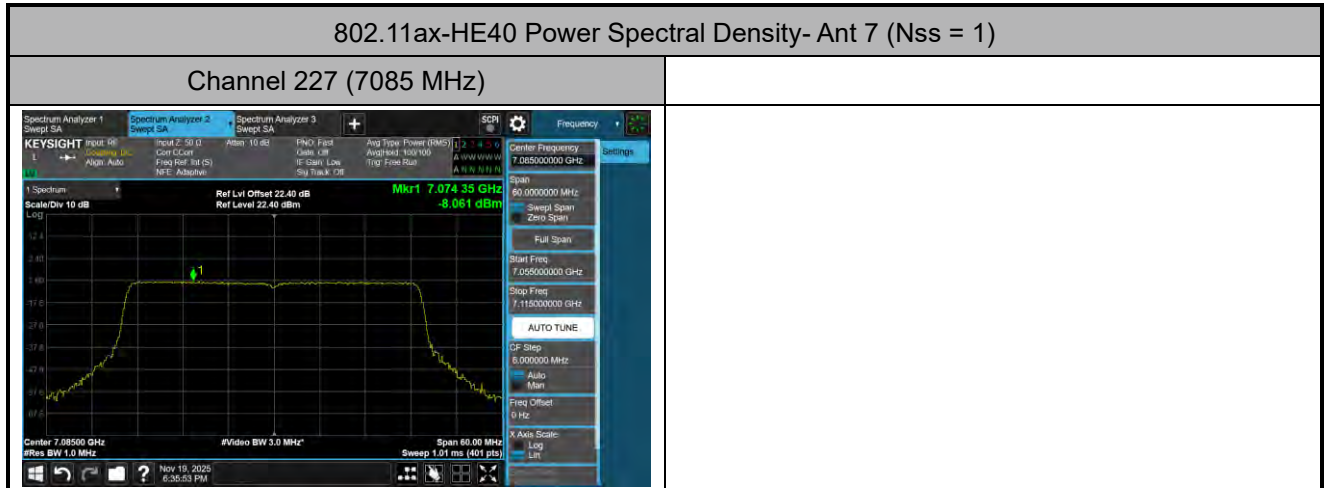

802.11ax-HE80 Power Spectral Density- Ant 7 (Nss = 1)

Channel 39 (6145 MHz)




Channel 55 (6225 MHz)



Channel 87 (6385 MHz)



Channel 103 (6465 MHz)

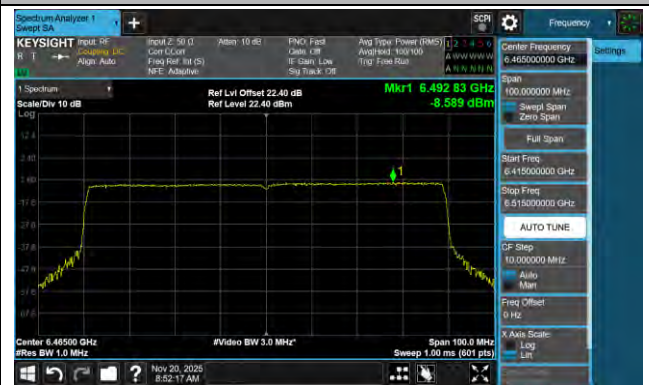

Channel 119 (6545 MHz)



Channel 135 (6625 MHz)



802.11ax-HE80 Power Spectral Density- Ant 7 (Nss = 1)


Channel 151 (6705 MHz)




Channel 167 (6785 MHz)



Channel 183 (6865 MHz)

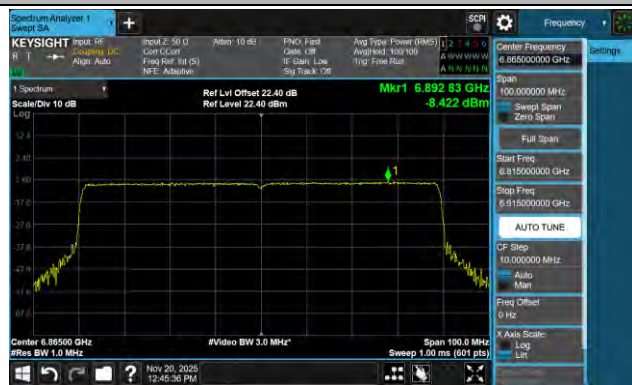

Channel 199 (6945 MHz)

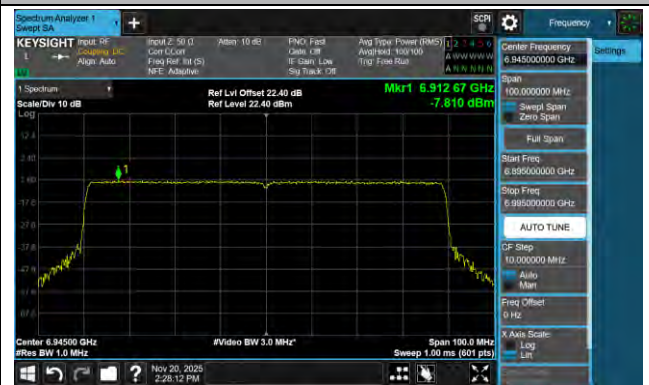

Channel 215 (7025 MHz)




802.11ax-HE160 Power Spectral Density- Ant 7 (Nss = 1)


Channel 47 (6185 MHz)



Channel 79 (6345 MHz)

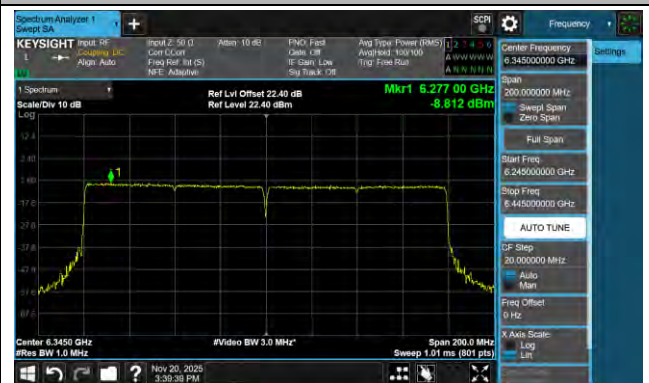


Channel 111 (6505 MHz)

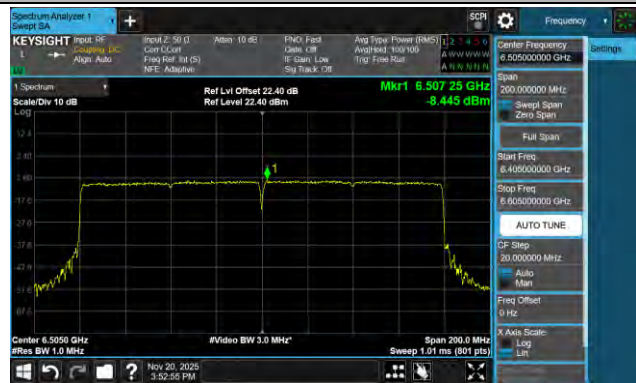


Channel 143 (6665 MHz)



Channel 175 (6825 MHz)

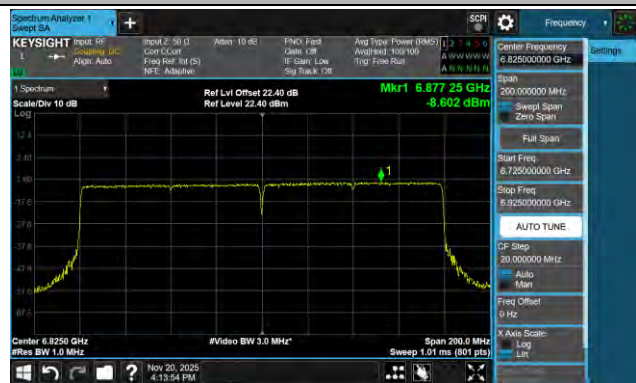

Channel 207 (6985 MHz)

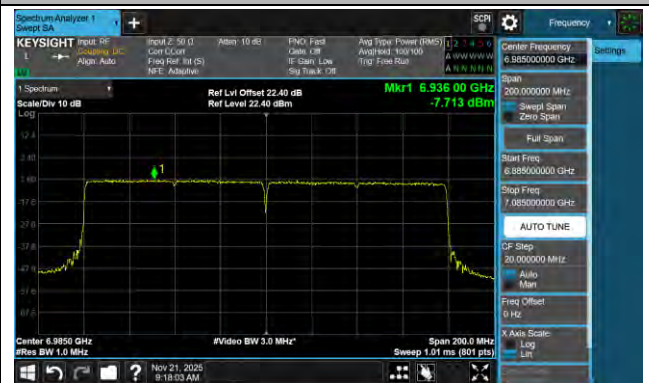

802.11be-EHT20 Power Spectral Density- Ant 7 (Nss = 1)


Channel 33 (6115 MHz)



Channel 61 (6255 MHz)




Channel 93 (6415 MHz)

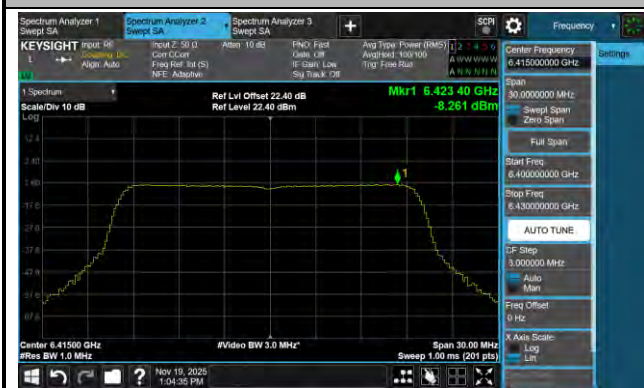

Channel 97 (6435 MHz)



Channel 105 (6475 MHz)

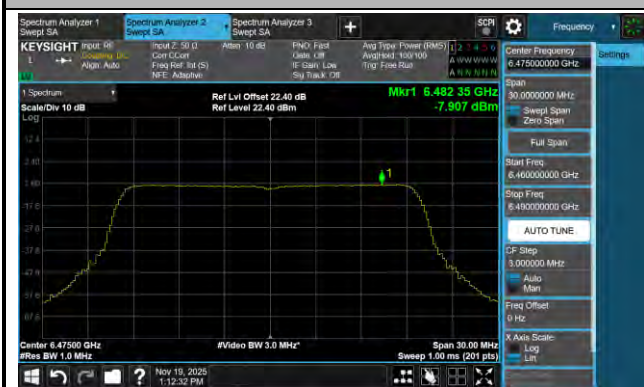

Channel 113 (6515 MHz)



802.11be-EHT20 Power Spectral Density- Ant 7 (Nss = 1)

Channel 117 (6535 MHz)




Channel 149 (6695 MHz)



Channel 181 (6855 MHz)



Channel 185 (6875 MHz)

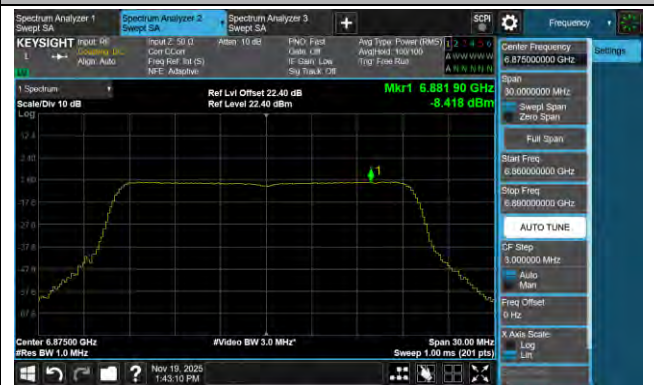

Channel 189 (6895 MHz)



Channel 209 (6995 MHz)



802.11be-EHT20 Power Spectral Density- Ant 7 (Nss = 1)

Channel 229 (7095 MHz)



802.11be-EHT40 Power Spectral Density- Ant 7 (Nss = 1)

Channel 35 (6125 MHz)




Channel 59 (6245 MHz)



Channel 91 (6405 MHz)




Channel 99 (6445 MHz)

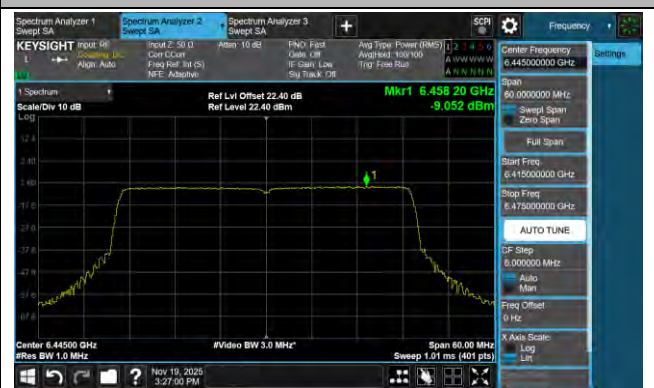

Channel 107 (6485 MHz)



Channel 115 (6525 MHz)

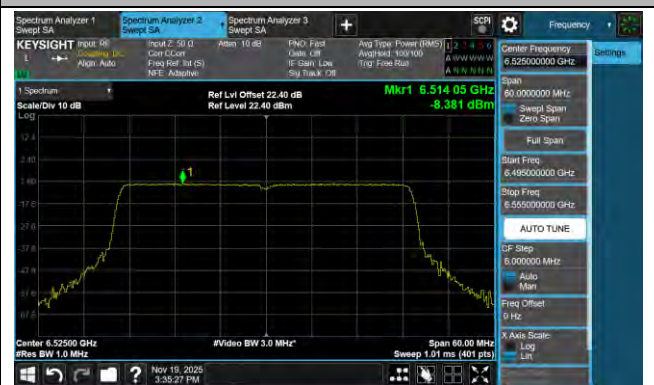


802.11be-EHT40 Power Spectral Density- Ant 7 (Nss = 1)

Channel 123 (6565 MHz)



Channel 147 (6685 MHz)

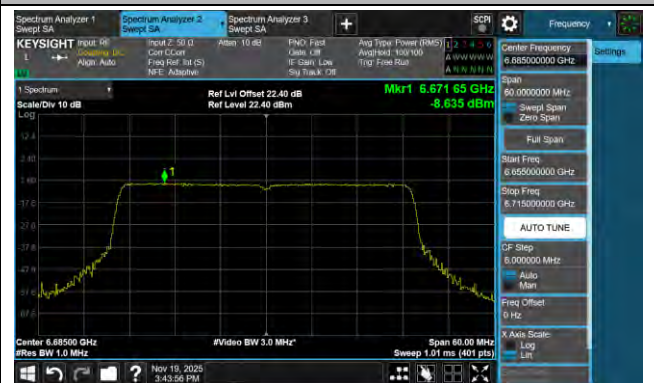

Channel 179 (6845 MHz)



Channel 187 (6885 MHz)



Channel 195 (6925 MHz)




Channel 211 (7005 MHz)



802.11be-EHT40 Power Spectral Density- Ant 7 (Nss = 1)

Channel 227 (7085 MHz)

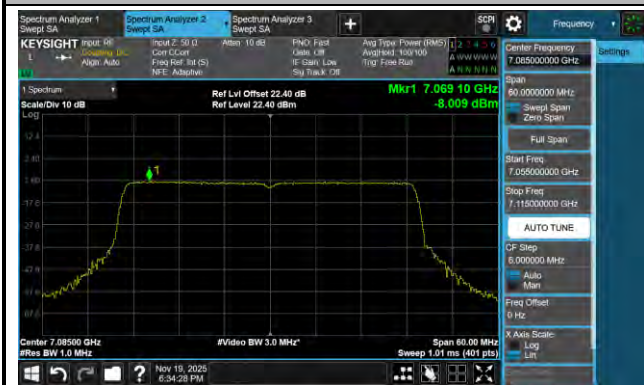


802.11be-EHT80 Power Spectral Density- Ant 7 (Nss = 1)


Channel 39 (6145 MHz)



Channel 55 (6225 MHz)

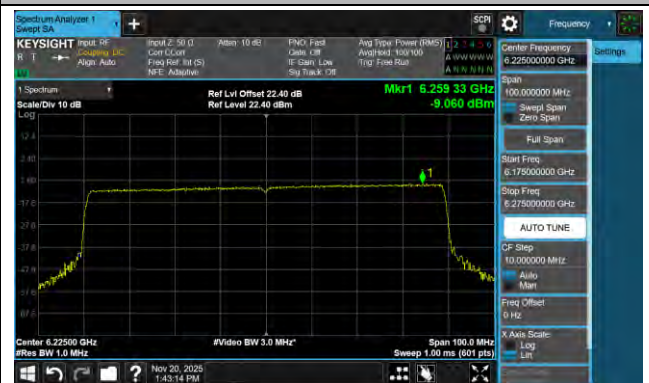


Channel 87 (6385 MHz)

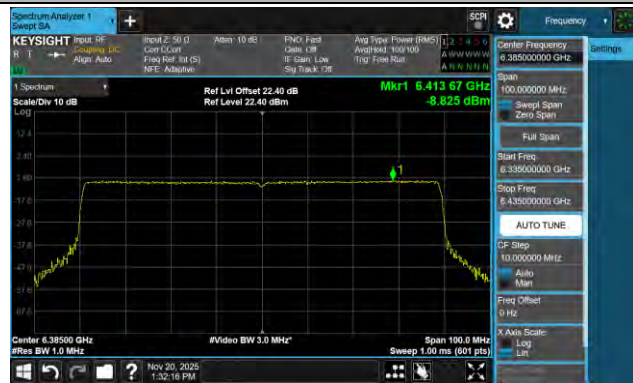

Channel 103 (6465 MHz)



Channel 119 (6545 MHz)

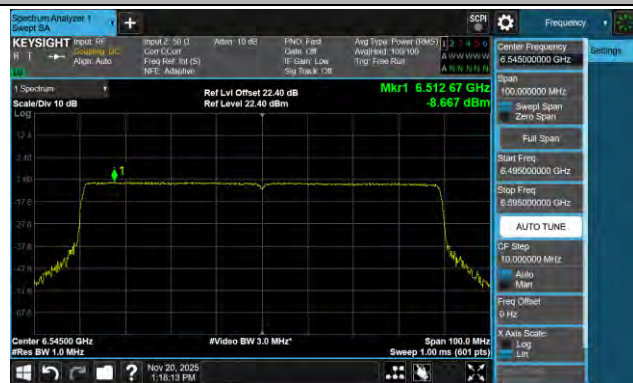

Channel 135 (6625 MHz)




802.11be-EHT80 Power Spectral Density- Ant 7 (Nss = 1)


Channel 151 (6705 MHz)



Channel 167 (6785 MHz)

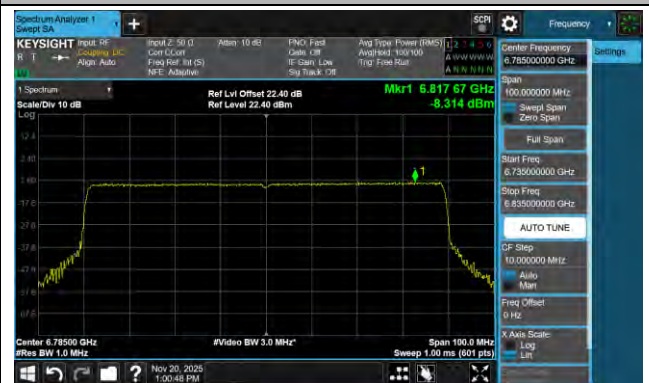

Channel 183 (6865 MHz)

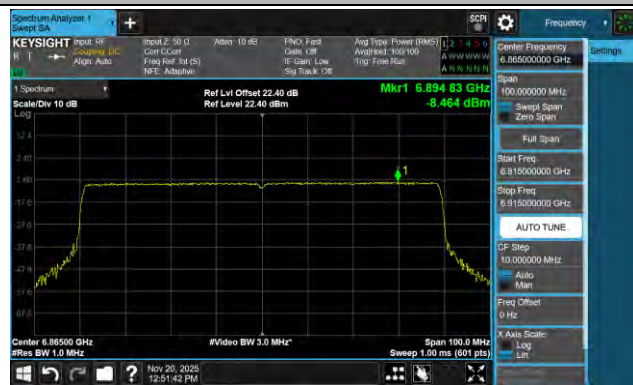

Channel 199 (6945 MHz)




Channel 215 (7025 MHz)




802.11be-EHT160 Power Spectral Density- Ant 7 (Nss = 1)


Channel 47 (6185 MHz)

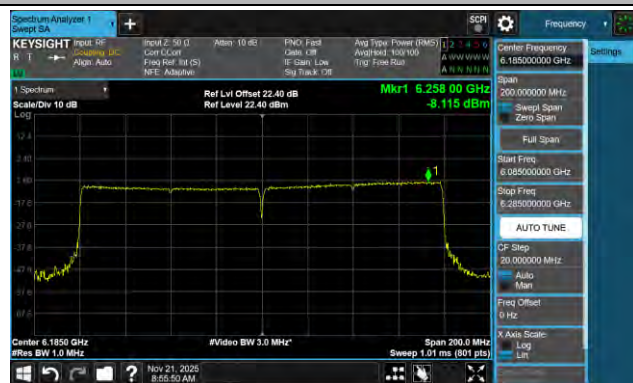


Channel 79 (6345 MHz)

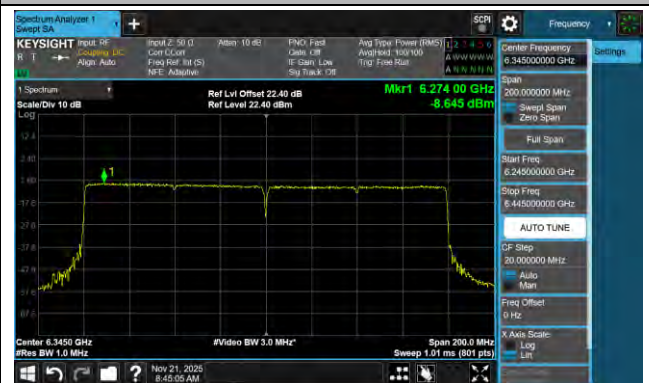


Channel 111 (6505 MHz)

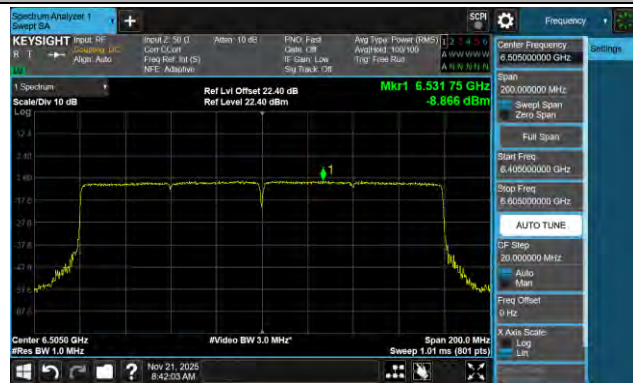


Channel 143 (6665 MHz)

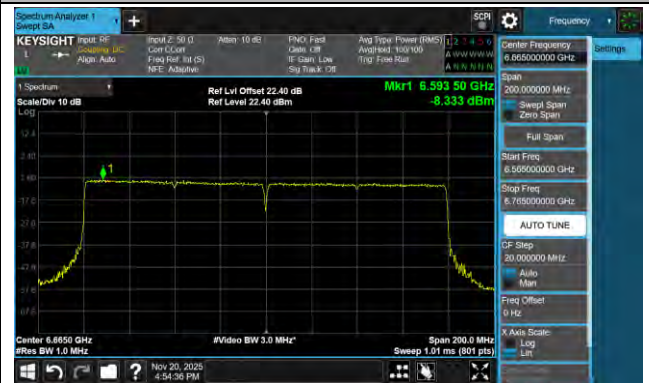

Channel 175 (6825 MHz)

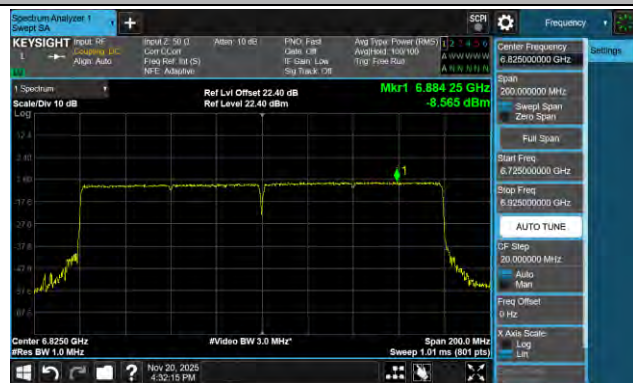


Channel 207 (6985 MHz)

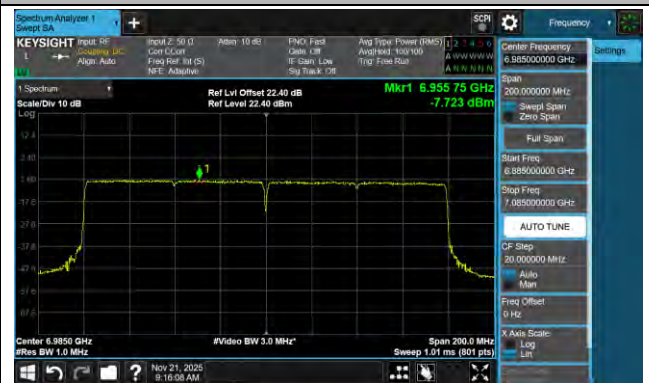

802.11be-EHT320 Power Spectral Density- Ant 7 (Nss = 1)

Channel 95 (6425 MHz)

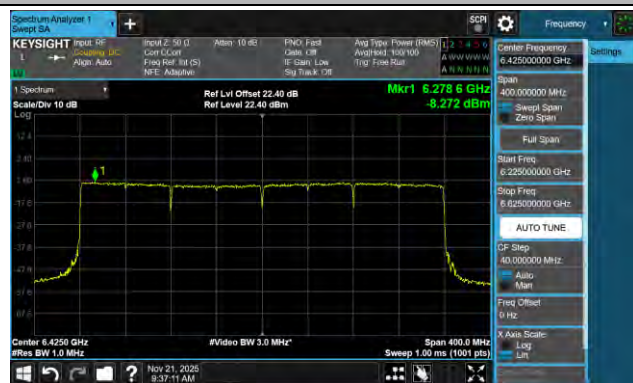

Channel 159 (6745 MHz)




802.11be-EHT320 Power Spectral Density- Ant 7 (Nss = 1)


Channel 63 (6265 MHz)



Channel 127 (6585 MHz)

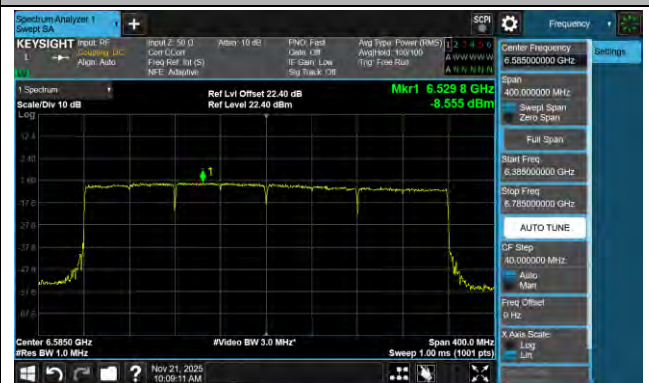

Channel 191 (6905 MHz)

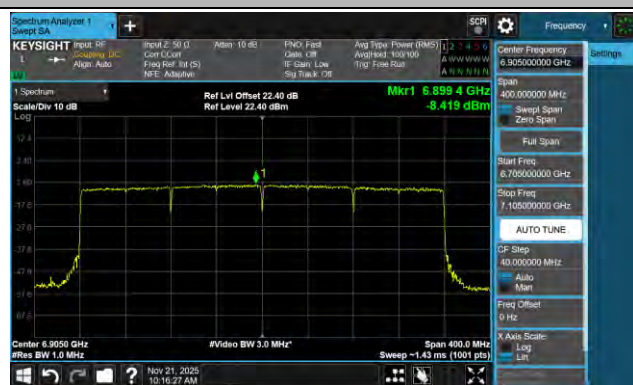

802.11ax-HE20 Power Spectral Density- Ant 8 (Nss = 1)


Channel 33 (6115 MHz)




Channel 61 (6255 MHz)




Channel 93 (6415 MHz)

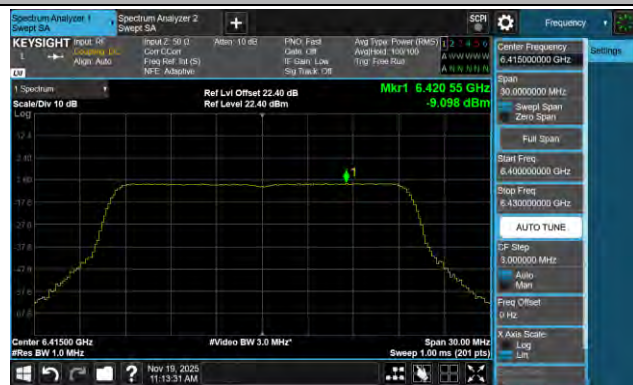

Channel 97 (6435 MHz)

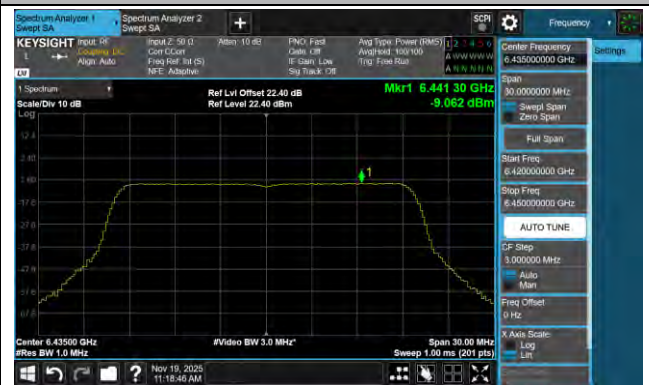

Channel 105 (6475 MHz)

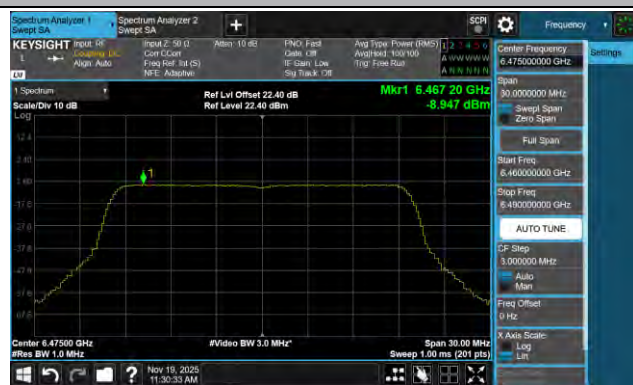

Channel 113 (6515 MHz)



802.11ax-HE20 Power Spectral Density- Ant 8 (Nss = 1)

Channel 117 (6535 MHz)



Channel 149 (6695 MHz)



Channel 181 (6855 MHz)




Channel 185 (6875 MHz)




Channel 189 (6895 MHz)




Channel 209 (6995 MHz)

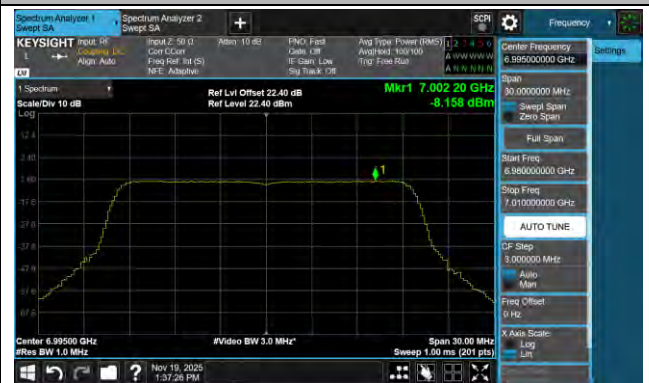

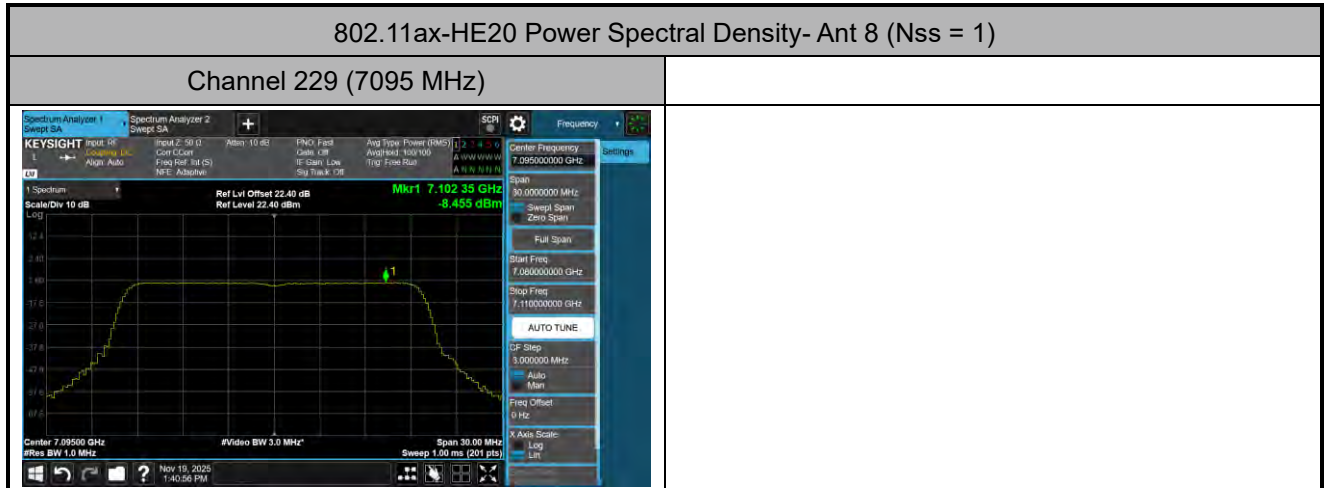

802.11ax-HE40 Power Spectral Density- Ant 8 (Nss = 1)


Channel 35 (6125 MHz)

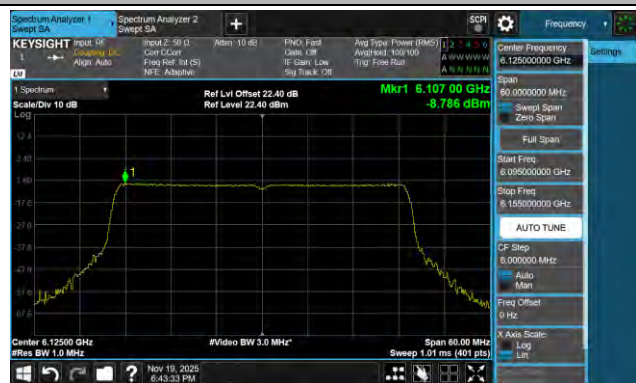


Channel 59 (6245 MHz)



Channel 91 (6405 MHz)

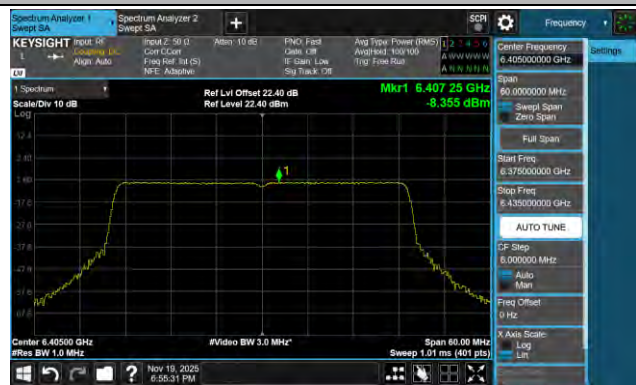

Channel 99 (6445 MHz)

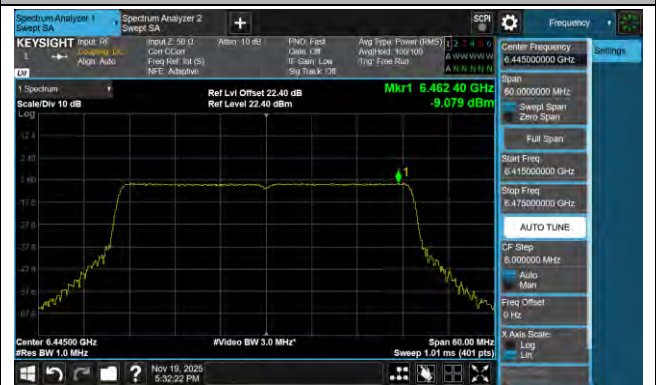

Channel 107 (6485 MHz)



Channel 115 (6525 MHz)



802.11ax-HE40 Power Spectral Density- Ant 8 (Nss = 1)

Channel 123 (6565 MHz)




Channel 147 (6685 MHz)



Channel 179 (6845 MHz)



Channel 187 (6885 MHz)

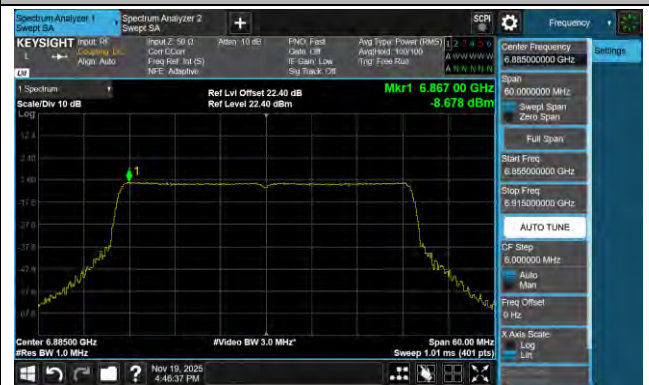


Channel 195 (6925 MHz)




Channel 211 (7005 MHz)



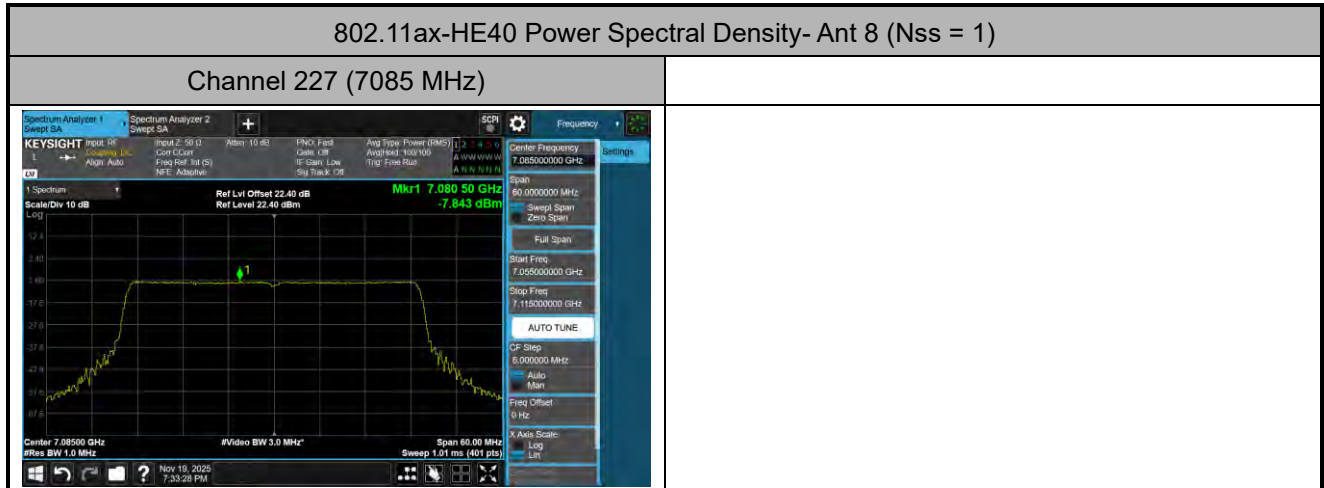

802.11ax-HE80 Power Spectral Density- Ant 8 (Nss = 1)


Channel 39 (6145 MHz)

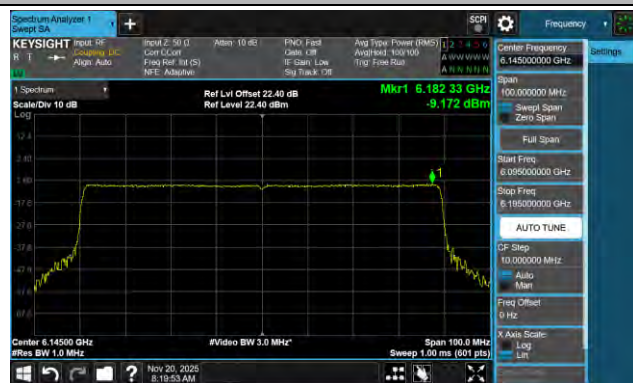


Channel 55 (6225 MHz)



Channel 87 (6385 MHz)

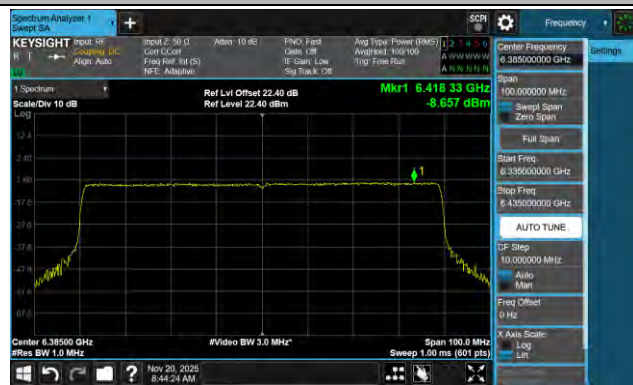

Channel 103 (6465 MHz)

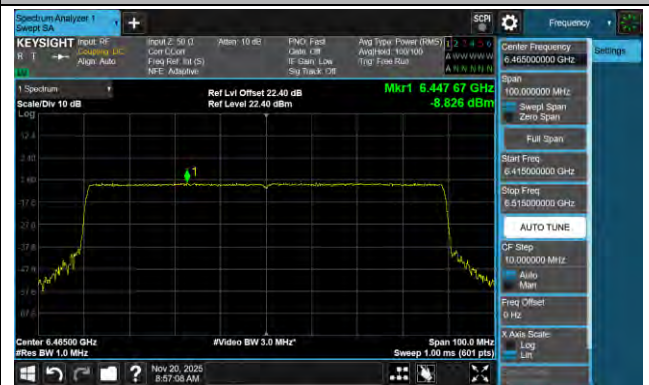

Channel 119 (6545 MHz)



Channel 135 (6625 MHz)




802.11ax-HE80 Power Spectral Density- Ant 8 (Nss = 1)


Channel 151 (6705 MHz)




Channel 167 (6785 MHz)

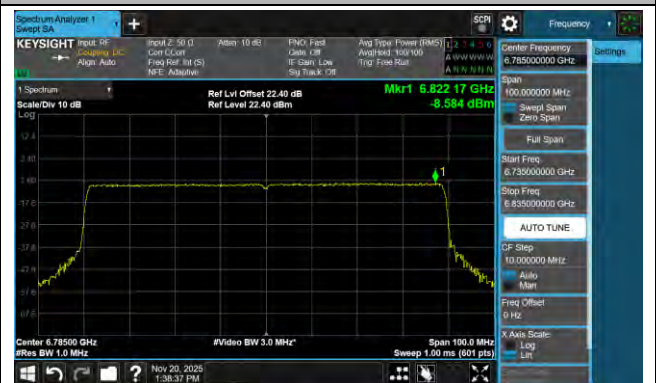

Channel 183 (6865 MHz)

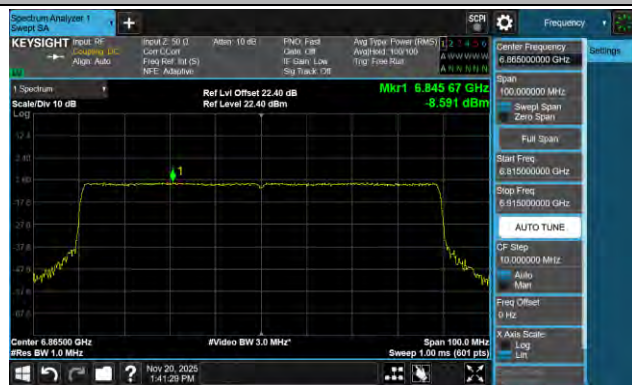

Channel 199 (6945 MHz)

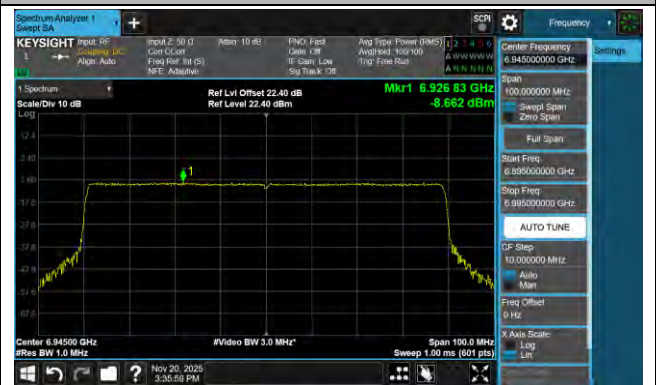


Channel 215 (7025 MHz)



802.11ax-HE160 Power Spectral Density- Ant 8 (Nss = 1)


Channel 47 (6185 MHz)

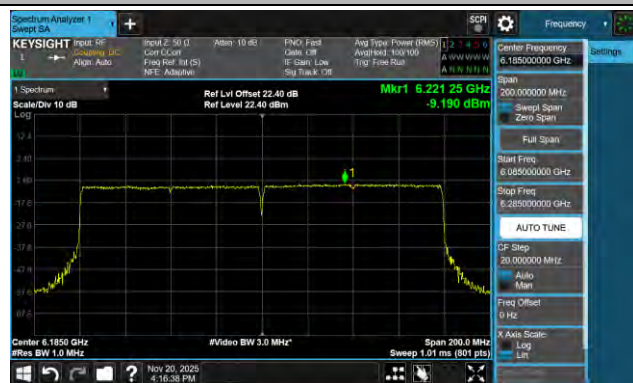


Channel 79 (6345 MHz)




Channel 111 (6505 MHz)

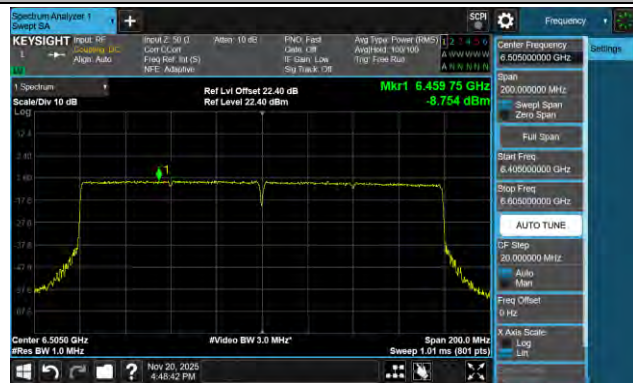

Channel 143 (6665 MHz)

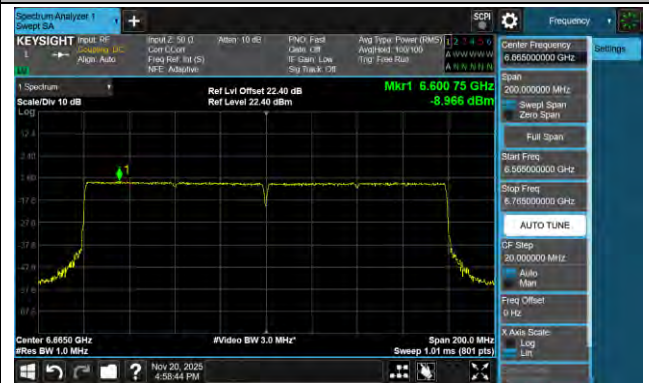

Channel 175 (6825 MHz)

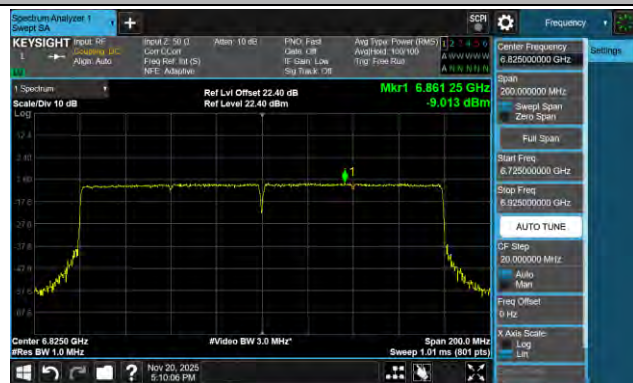

Channel 207 (6985 MHz)




802.11be-EHT20 Power Spectral Density- Ant 8 (Nss = 1)


Channel 33 (6115 MHz)




Channel 61 (6255 MHz)

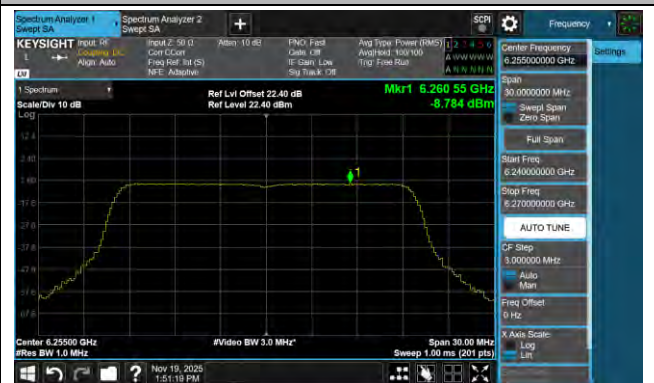

Channel 93 (6415 MHz)

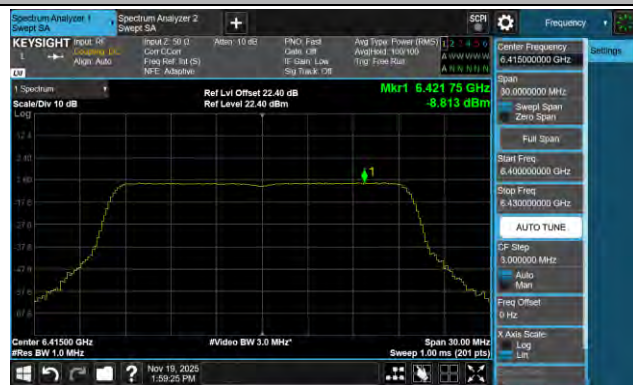

Channel 97 (6435 MHz)

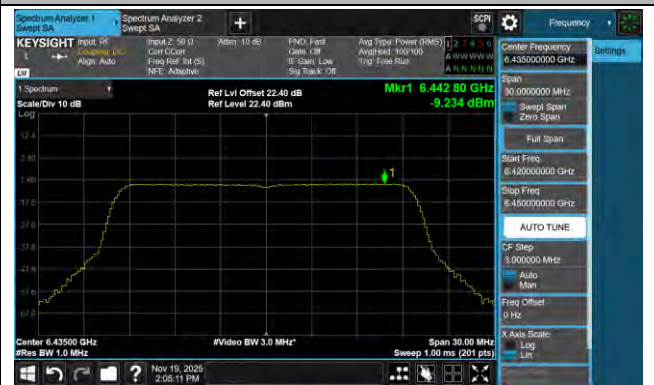

Channel 105 (6475 MHz)



Channel 113 (6515 MHz)



802.11be-EHT20 Power Spectral Density- Ant 8 (Nss = 1)

Channel 117 (6535 MHz)



Channel 149 (6695 MHz)



Channel 181 (6855 MHz)



Channel 185 (6875 MHz)



Channel 189 (6895 MHz)




Channel 209 (6995 MHz)



802.11be-EHT20 Power Spectral Density- Ant 8 (Nss = 1)

Channel 229 (7095 MHz)

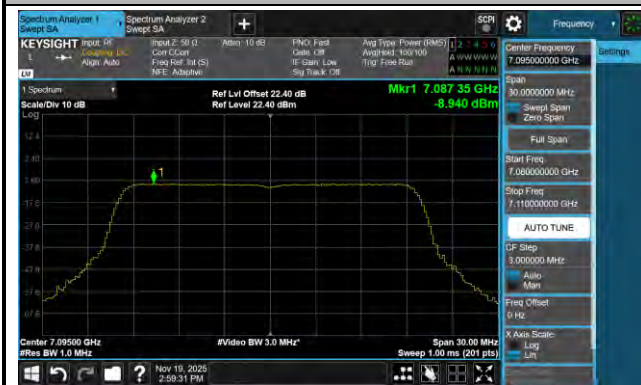

802.11be-EHT40 Power Spectral Density- Ant 8 (Nss = 1)

Channel 35 (6125 MHz)



Channel 59 (6245 MHz)



Channel 91 (6405 MHz)




Channel 99 (6445 MHz)



Channel 107 (6485 MHz)



Channel 115 (6525 MHz)

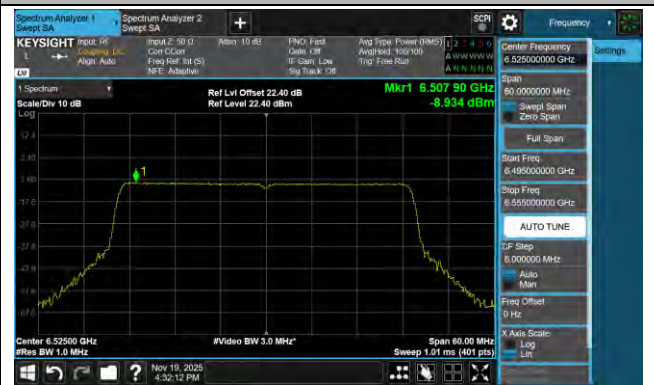


802.11be-EHT40 Power Spectral Density- Ant 8 (Nss = 1)


Channel 123 (6565 MHz)



Channel 147 (6685 MHz)

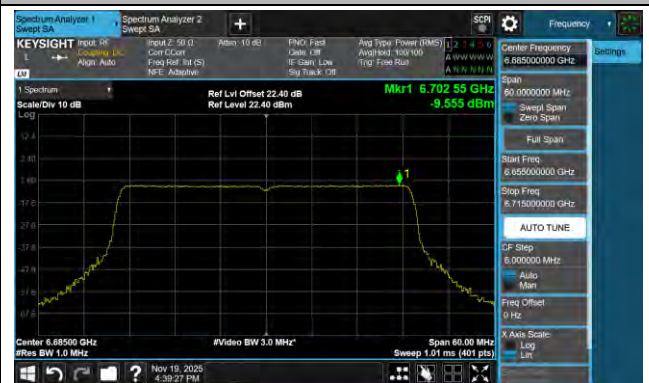

Channel 179 (6845 MHz)

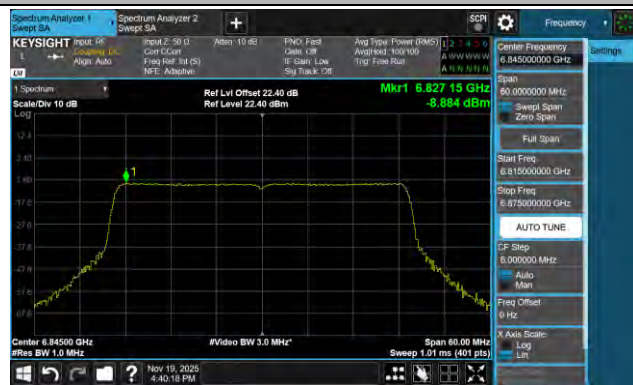

Channel 187 (6885 MHz)



Channel 195 (6925 MHz)




Channel 211 (7005 MHz)



802.11be-EHT40 Power Spectral Density- Ant 8 (Nss = 1)

Channel 227 (7085 MHz)

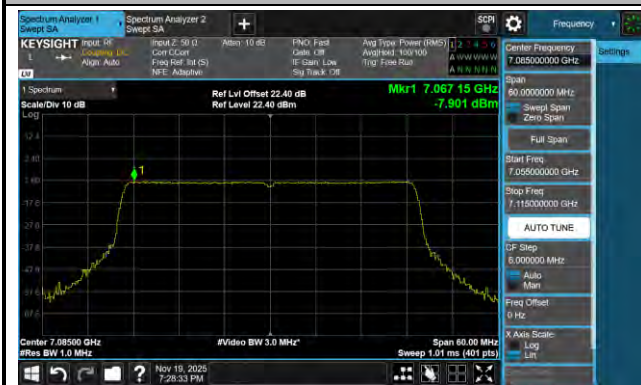

802.11be-EHT80 Power Spectral Density- Ant 8 (Nss = 1)


Channel 39 (6145 MHz)




Channel 55 (6225 MHz)




Channel 87 (6385 MHz)

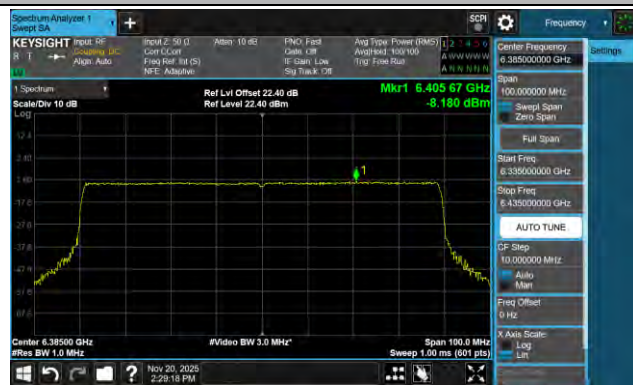

Channel 103 (6465 MHz)

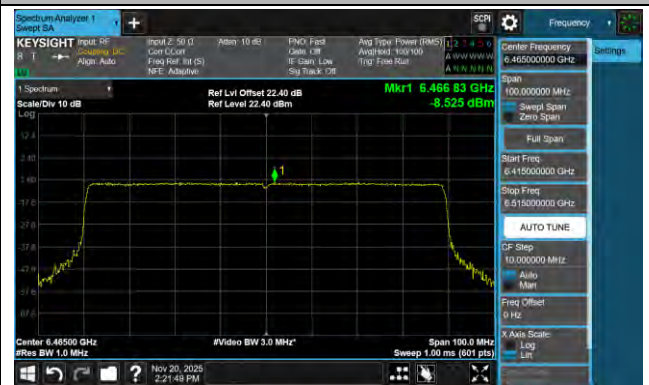

Channel 119 (6545 MHz)

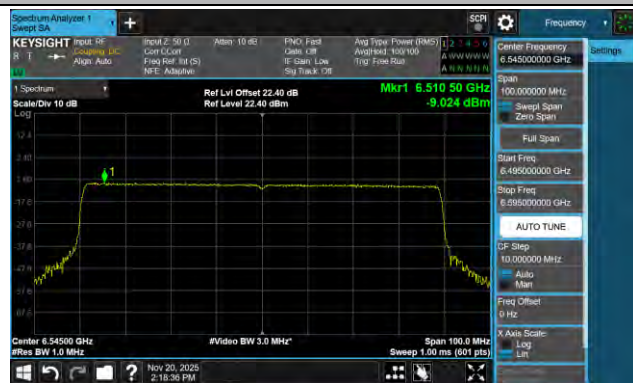

Channel 135 (6625 MHz)



802.11be-EHT80 Power Spectral Density- Ant 8 (Nss = 1)

Channel 151 (6705 MHz)



Channel 167 (6785 MHz)



Channel 183 (6865 MHz)



Channel 199 (6945 MHz)




Channel 215 (7025 MHz)




802.11be-EHT160 Power Spectral Density- Ant 8 (Nss = 1)


Channel 47 (6185 MHz)

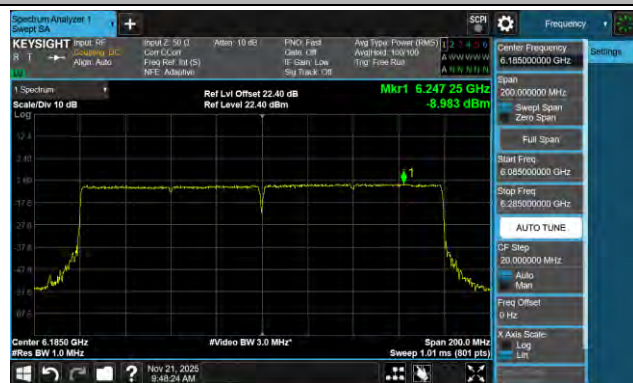


Channel 79 (6345 MHz)

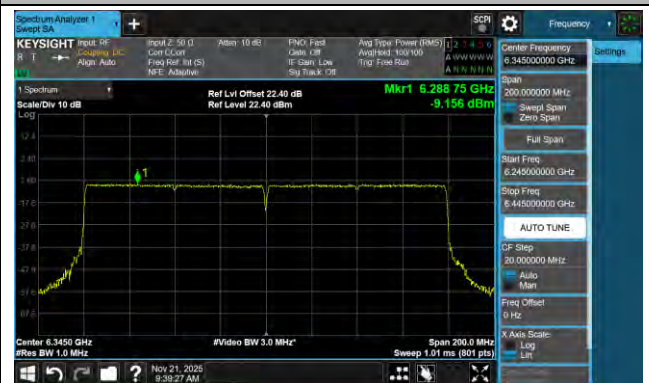


Channel 111 (6505 MHz)

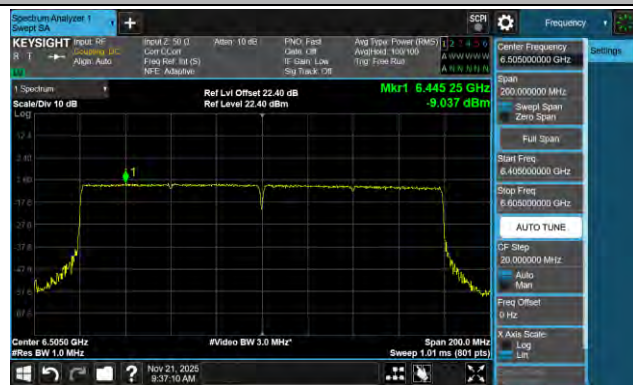


Channel 143 (6665 MHz)

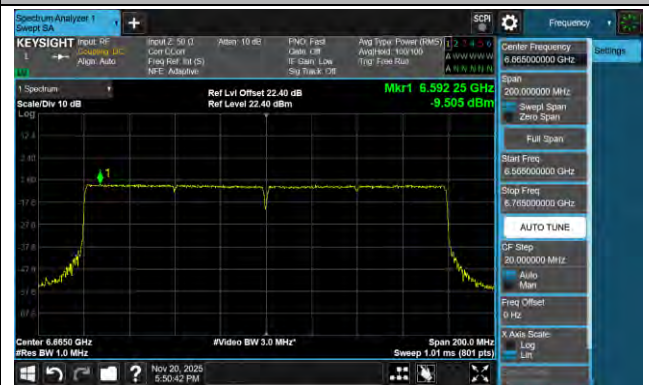

Channel 175 (6825 MHz)

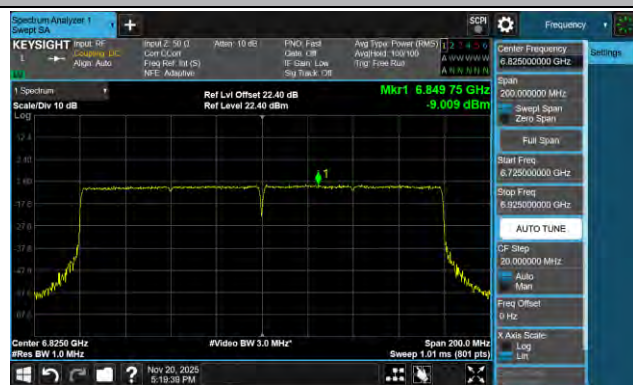

Channel 207 (6985 MHz)

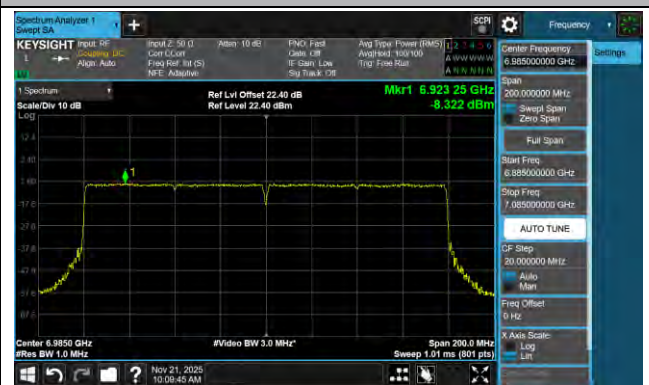


802.11be-EHT320 Power Spectral Density- Ant 8 (Nss = 1)

Channel 95 (6425 MHz)




Channel 159 (6745 MHz)

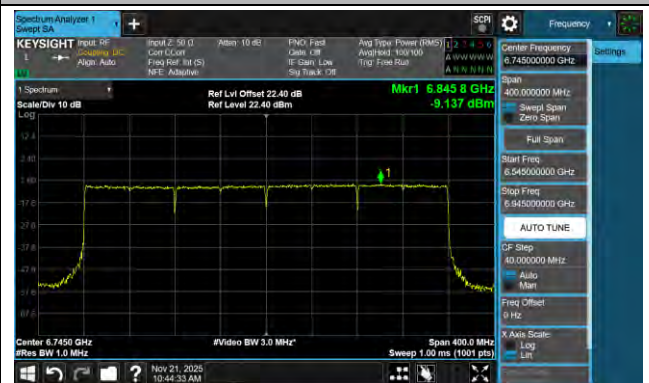


802.11be-EHT320 Power Spectral Density- Ant 8 (Nss = 1)


Channel 63 (6265 MHz)

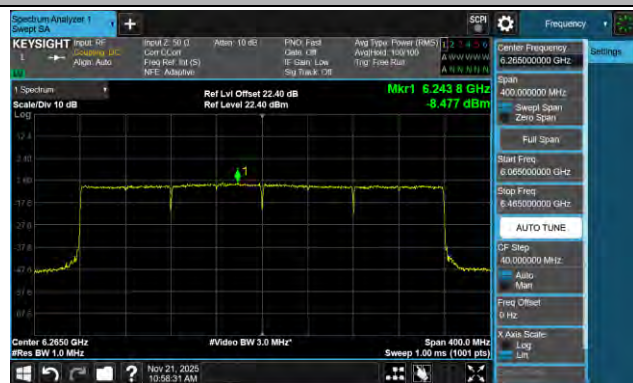

Channel 127 (6585 MHz)

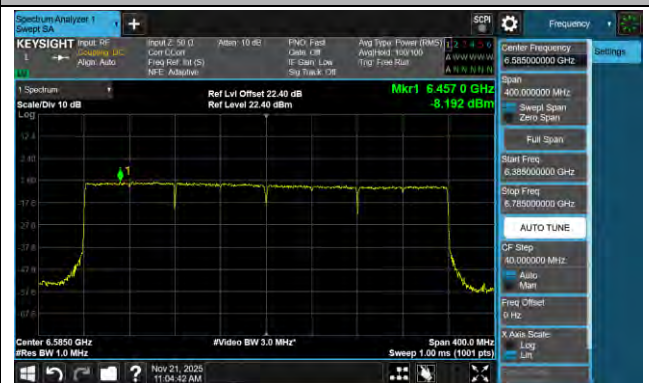

Channel 191 (6905 MHz)

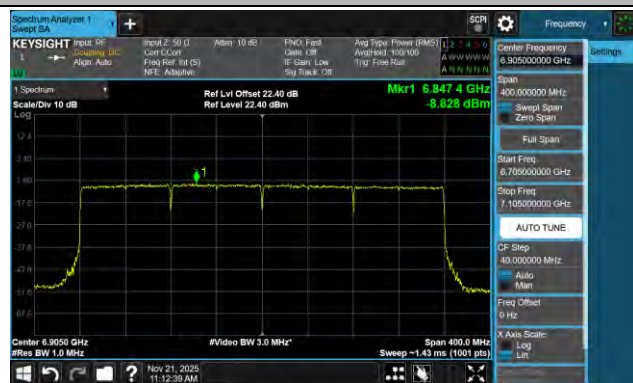

802.11ax-HE20 Power Spectral Density- Ant 9 (Nss = 1)


Channel 33 (6115 MHz)




Channel 61 (6255 MHz)



Channel 93 (6415 MHz)

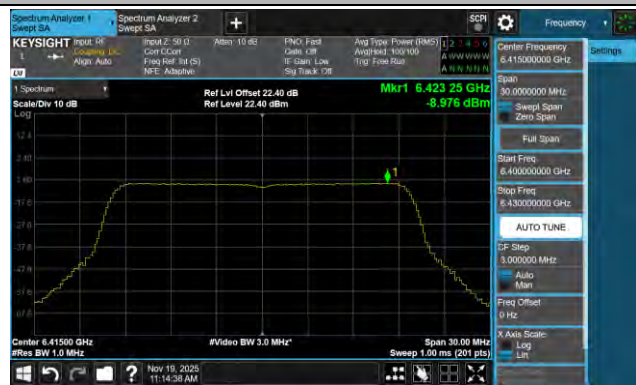

Channel 97 (6435 MHz)

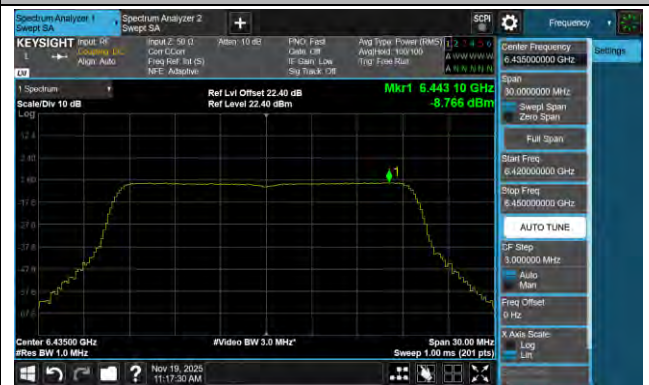

Channel 105 (6475 MHz)



Channel 113 (6515 MHz)

