


Restricted bands:

Test plot as follows:

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Remark:	\	Test_Date	2026/7/6


Test Graph

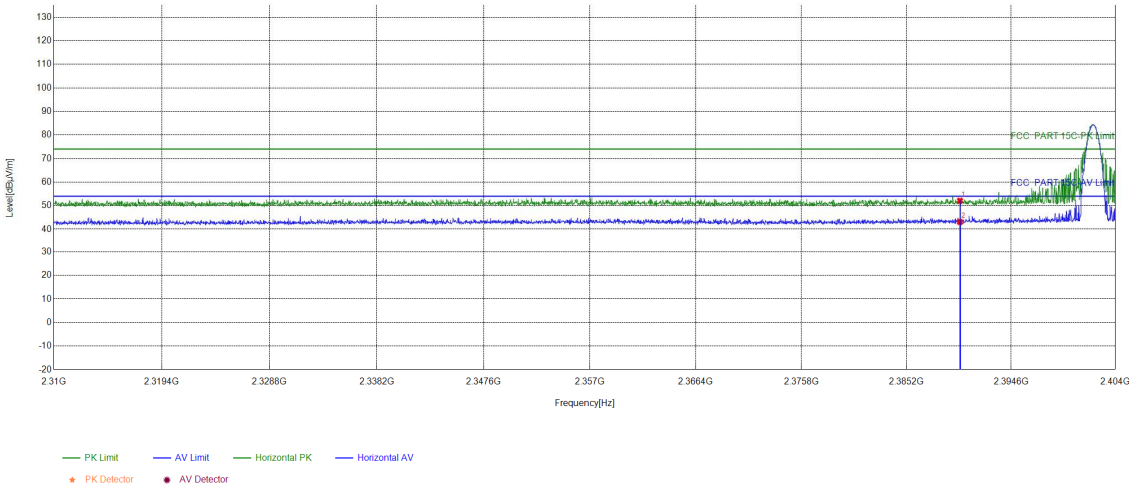

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.15	52.11	74.00	21.89	PASS	Horizontal	PK
2	2390	15.96	27.12	43.08	54.00	10.92	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Remark:	\	Test_Date	2026/7/6


Test Graph

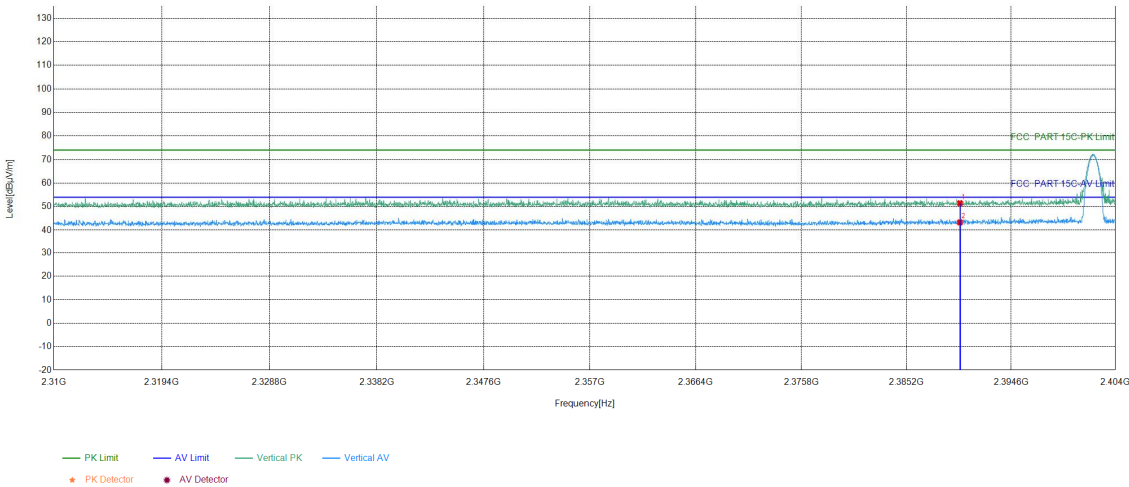

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.50	51.46	74.00	22.54	PASS	Vertical	PK
2	2390	15.96	27.38	43.34	54.00	10.66	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/6


Test Graph

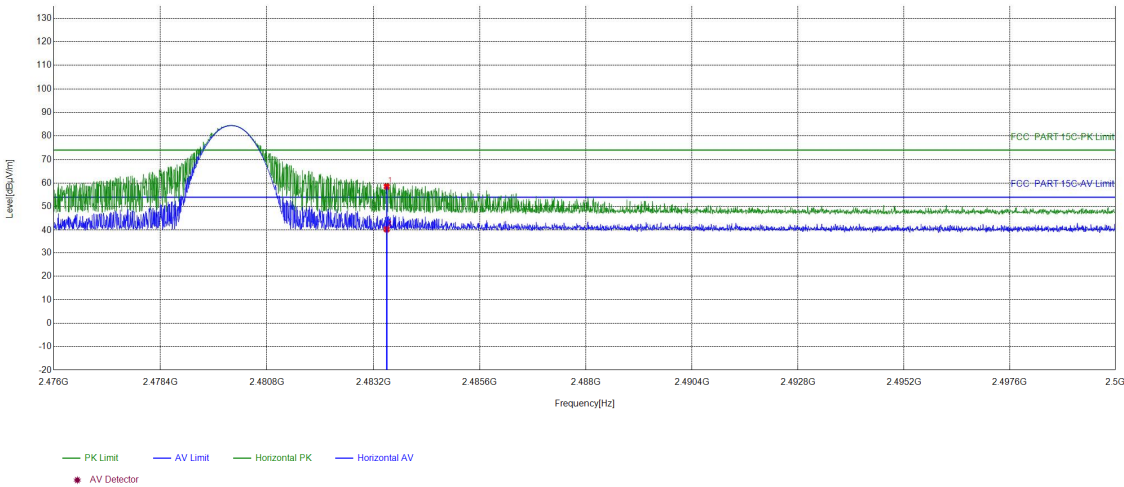

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	42.26	58.55	74.00	15.45	PASS	Horizontal	PK
2	2483.5	16.29	24.07	40.36	54.00	13.64	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/6


Test Graph

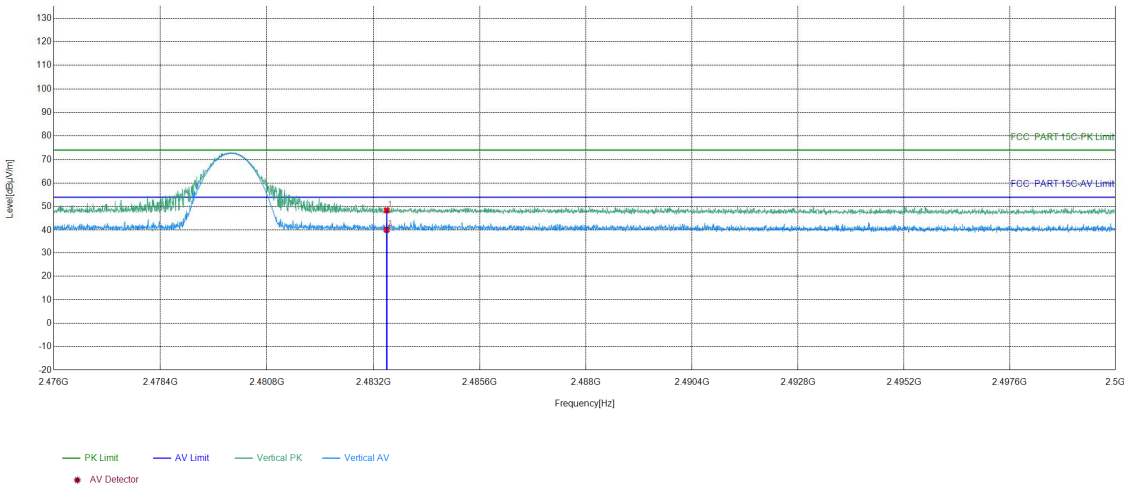

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.18	48.47	74.00	25.53	PASS	Vertical	PK
2	2483.5	16.29	23.89	40.18	54.00	13.82	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Remark:	\	Test_Date	2026/7/6


Test Graph

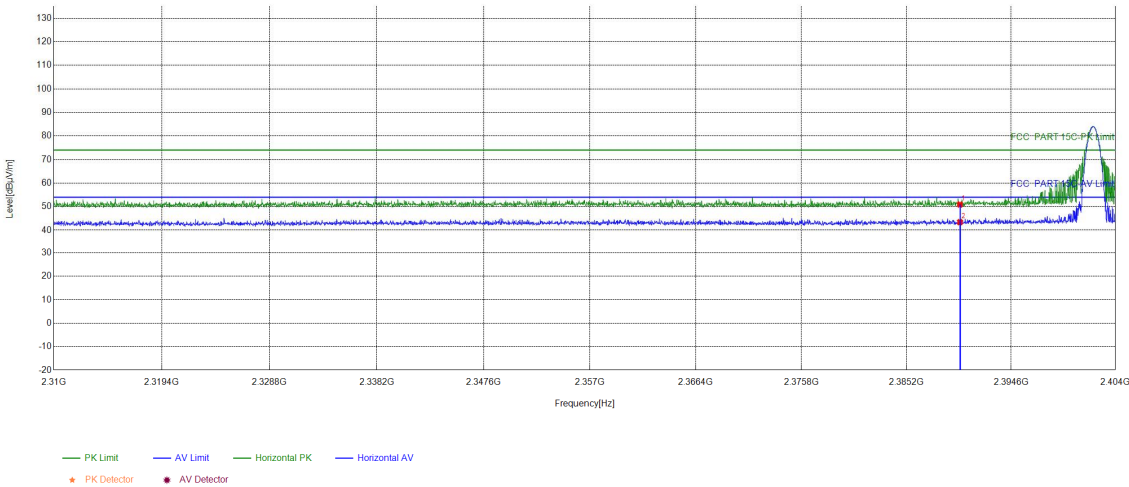

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.96	50.92	74.00	23.08	PASS	Horizontal	PK
2	2390	15.96	27.47	43.43	54.00	10.57	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Remark:	\	Test_Date	2026/7/6


Test Graph

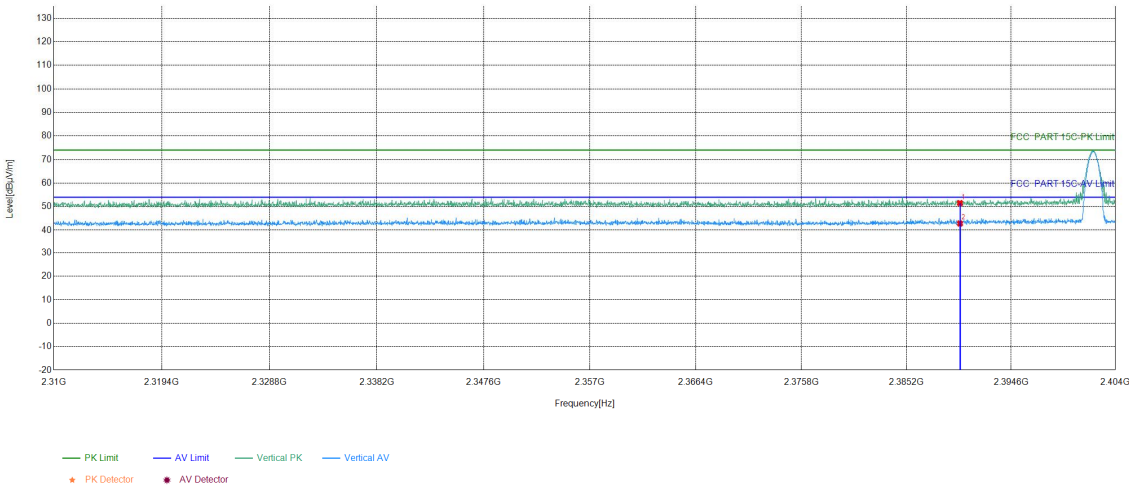

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.55	51.51	74.00	22.49	PASS	Vertical	PK
2	2390	15.96	26.89	42.85	54.00	11.15	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/6


Test Graph

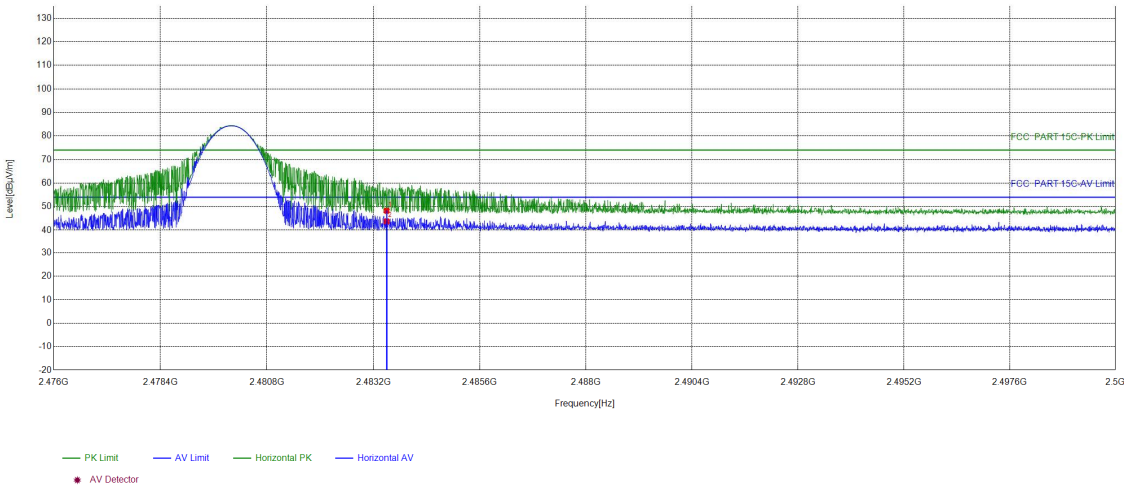

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.95	48.24	74.00	25.76	PASS	Horizontal	PK
2	2483.5	16.29	27.48	43.77	54.00	10.23	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/6

Test Graph

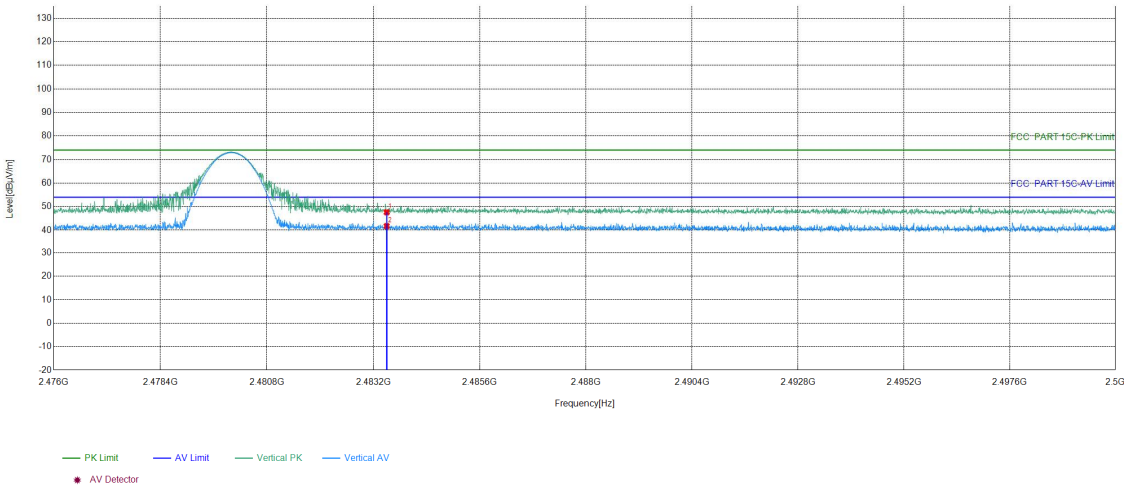

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.32	47.61	74.00	26.39	PASS	Vertical	PK
2	2483.5	16.29	25.47	41.76	54.00	12.24	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S813580

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S813580.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***