



FCC DFS TEST REPORT

FCC ID : 2BKSS-L1LA10
Equipment : Wireless Router
Model Name : L1LA10
Applicant : Kuiper Systems LLC
410 Terry Avenue North, Seattle, Washington, United States 98109
Manufacturer : Kuiper Systems LLC
410 Terry Avenue North, Seattle, Washington, United States 98109
Standard : FCC Part 15 Subpart E

The product was received on Jun. 07, 2024 and testing was performed from Jul. 02, 2024 to Jul. 10, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC Part 15 Subpart E and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Site	6
1.4 Applied Standards	6
1.5 Support Unit used in test configuration and system	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode	7
3 Requirements and Parameters for DFS Test.....	8
3.1 Summary of Dynamic Frequency Selection Test	8
3.2 Applicability of DFS Requirements	9
3.3 DFS Detection Thresholds.....	11
3.4 DFS Response requirement values.....	12
3.5 Short Pulse Radar Test Waveforms	13
3.6 Long Pulse Radar Test Waveform	15
3.7 Frequency Hopping Radar Test Waveform	17
4 Calibration Setup and DFS Test Results	18
4.1 Calibration of Radar Waveform	18
4.2 U-NII Detection Bandwidth	35
4.3 Channel Availability Check	46
4.4 In-Service Monitoring: Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period.....	52
4.5 Statistical Performance Check	64
5 List of Measuring Equipment.....	81
Appendix A. Radar Parameters	



History of this test report

Report No.	Version	Description	Issue Date
FZ452002	01	Initial issue of report	May 21, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	7.8.1	U-NII Detection Bandwidth	Pass	-
4.3	7.8.2	Channel Availability Check Time	Pass	-
4.4	7.8.3	Channel Move Time	Pass	-
		Channel Closing Transmission Time	Pass	-
		Non-Occupancy Period Test	Pass	-
4.5	7.8.4	Statistical Performance Check	Pass	-

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Alan Liu

Report Producer: Rebecca Wu

1 General Description

1.1 Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth-LE, IEEE 802.15.4, Wi-Fi 2.4GHz 802.11b/g/n/ax and Wi-Fi 5GHz 802.11a/n/ac/ax.	
Antenna Type WLAN: <Ant. 0>: Dipole Antenna <Ant. 1>: Dipole Antenna	

Antenna information		
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	<Ant. 0>: 4.88
		<Ant. 1>: 3.73
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	<Ant. 0>: 4.05
		<Ant. 1>: 4.32

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH19-HY

FCC designation No.: TW3786

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- ♦ FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

1.5 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	HW / FW Version	Power Cord
1.	Notebook	acer	N15C1	PPD-QCNFA435	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Test Configuration	
Mode 1	AP Mode
Mode 2	Mesh Mode (See Note)

Note: Networks Access Points with Bridge and/or MESH modes of operation are permitted to operate in the DFS bands but must employ a DFS function. The functionality of the Bridge mode as specified in §15.403(a) must be validated in the DFS test report. Devices operating as relays where they act as master and client must also employ DFS function for the master. The method used to validate the functionality must be documented and validation data must be documented. Bridge mode can be validated by performing a test statistical performance check (Section 7.8.4) on any one of the radar types. This is an abbreviated test to verify DFS functionality. MESH mode operational methodology must be submitted in the application for certification for evaluation by the FCC.

3 Requirements and Parameters for DFS Test

3.1 Summary of Dynamic Frequency Selection Test

UNII	Description	Limit
U-NII Band 2-A 5250-5350 MHz	Channel Availability Check Time	> 60sec
	U-NII Detection Bandwidth	> 100% of the U-NII 99% transmission power bandwidth
	Statistical Performance Check	Type 1,2,3,4 >= 60% Type 1~4 and 5 >= 80% Type 6 >= 70%
	Channel Move Time	< 10 sec
	Channel Closing Transmission Time	< 200 ms + aggregate of 60 ms over remaining 10 s period
	Non-Occupancy Period Test	> 30 minutes
U-NII Band 2-C 5470-5725 MHz	Channel Availability Check Time	> 60sec
	U-NII Detection Bandwidth	> 100% of the U-NII 99% transmission power bandwidth
	Statistical Performance Check	Type 1,2,3,4 >= 60% Type 1~4 and 5 >= 80% Type 6 >= 70%
	Channel Move Time	< 10 sec
	Channel Closing Transmission Time	< 200 ms + aggregate of 60 ms over remaining 10 s period
	Non-Occupancy Period Test	> 30 minutes

3.2 Applicability of DFS Requirements

EUT is considered as a master device.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note

Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

3.3 DFS Detection Thresholds

Table 3 below provides the DFS Detection Thresholds for Master Devices as well as Client Devices incorporating In-Service Monitoring.

Table 3: DFS Detection Thresholds for Master Devices

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

The radar *Detection Threshold* is $(-64\text{dBm}) + 1\text{ dB} = -63\text{ dBm}$

3.4 DFS Response requirement values

Table 4 provides the response requirements for Master and Client Devices incorporating DFS.

Table 4: DFS Response Requirement Values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the 99% power bandwidth See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate <i>Channel</i> changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.	



3.5 Short Pulse Radar Test Waveforms

Radar Type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1.	See Note 1.
1	1	Test A Test B	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.



Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355.0	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.5	858
19	1139.0	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

3.6 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms. Each waveform is defined as follows:

Note: The center frequency for each of the 30 trials of the Bin 5 radar shall be randomly selected within 80% of the Occupied Bandwidth.

- (1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- (2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- (3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- (4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- (5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a **transmission period** will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz
- (6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- (7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- (1) The total test signal length is 12 seconds.
- (2) 8 Bursts are randomly generated for the Burst_Count.
- (3) Burst 1 has 2 randomly generated pulses.
- (4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- (5) The PRI is randomly selected to be at 1213 microseconds.
- (6) Bursts 2 through 8 are generated using steps 3 – 5.
- (7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

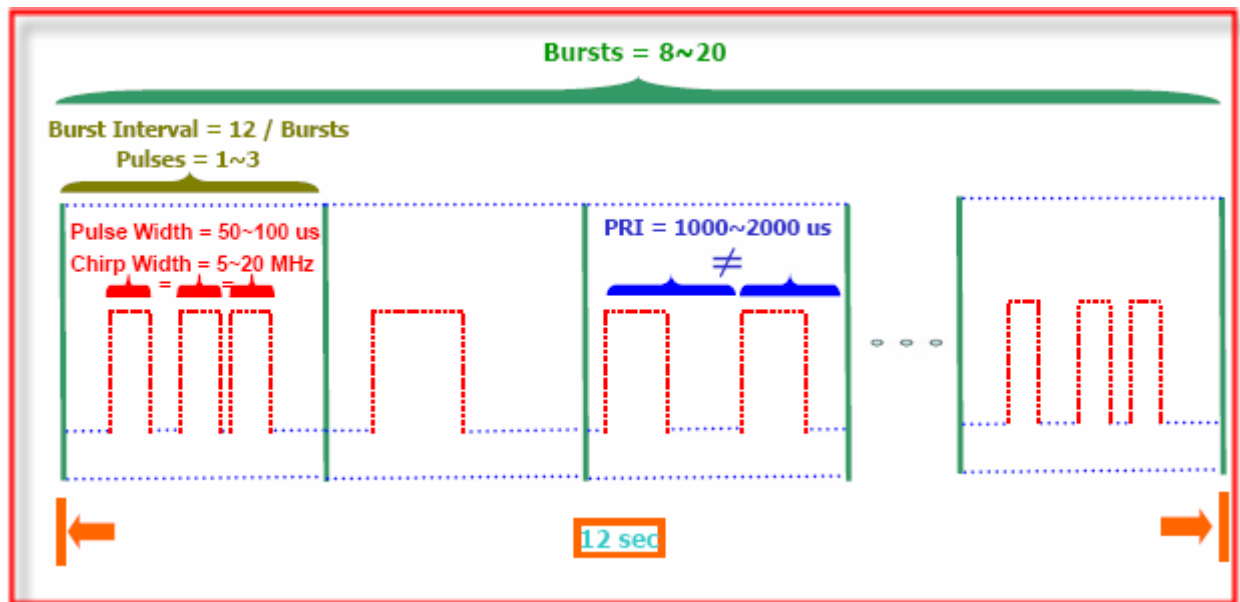


3.7 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

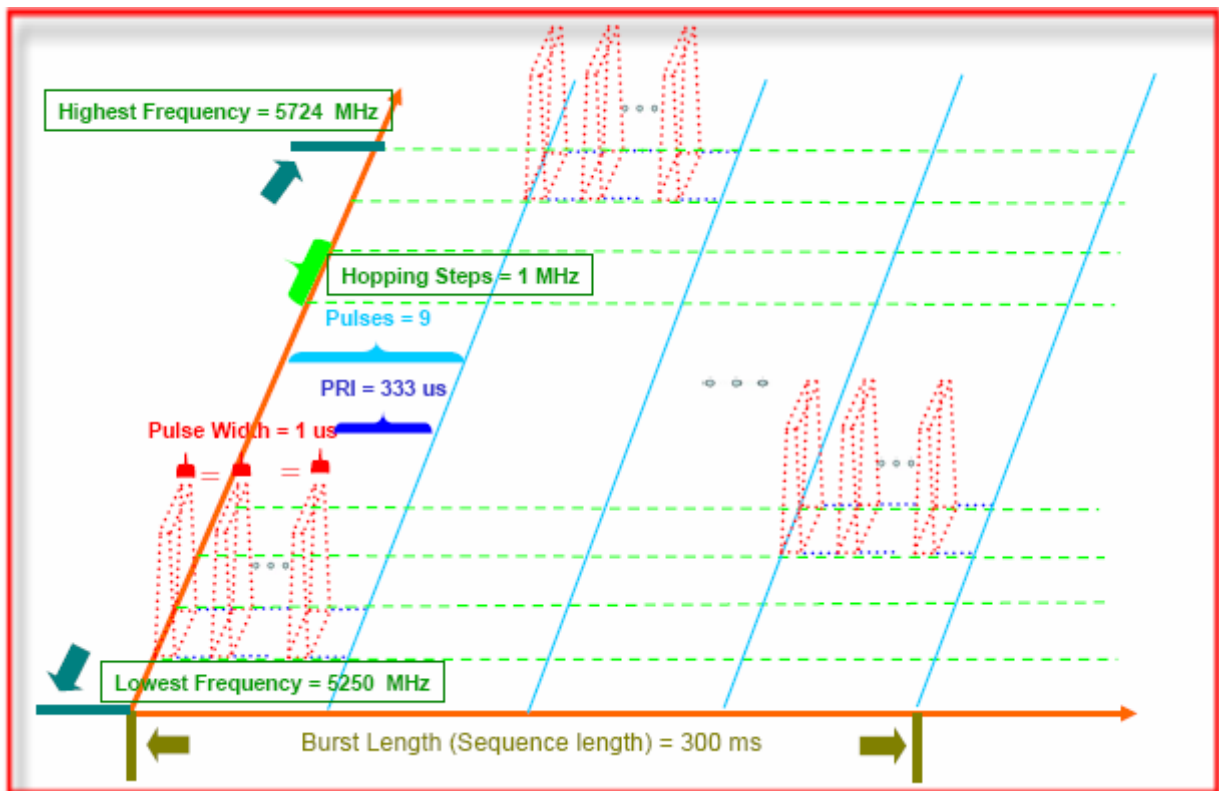


4 Calibration Setup and DFS Test Results

4.1 Calibration of Radar Waveform

4.1.1 Radar Waveform Calibration Procedure

The Interference Radar Detection Threshold Level is $(-64\text{dBm}) + 1\text{ dB} = -63\text{ dBm}$. The following equipment setup was used to calibrate the radiated radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0~6. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz to measure the radar waveform. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $(-64\text{dBm}) + 1\text{ dB} = -63\text{ dBm}$. Capture the spectrum analyzer plots on radar waveform. The spectrum offset has included the monitor antenna gain and path loss between monitor antenna and spectrum analyzer.

4.1.2 Radiated Calibration Setup

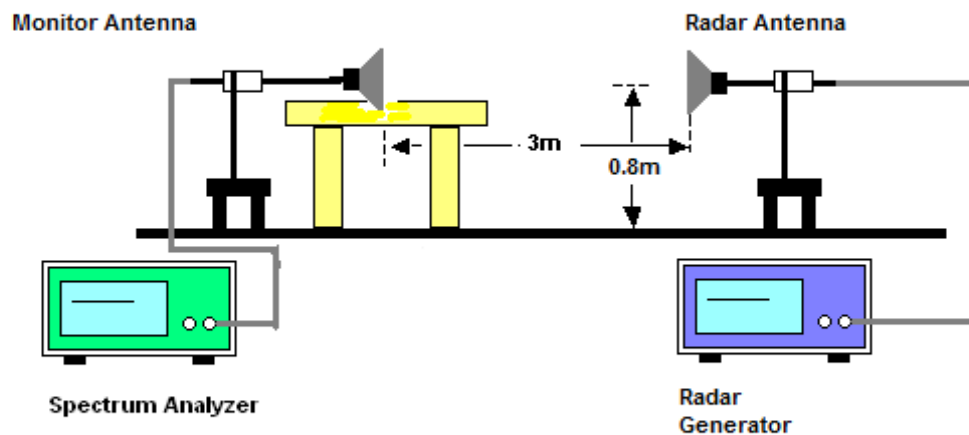


4.1.3 Calibration Deviation

There is no deviation with the original standard.




4.1.4 Radar Waveform Calibration Result

20MHz / 5300MHz>

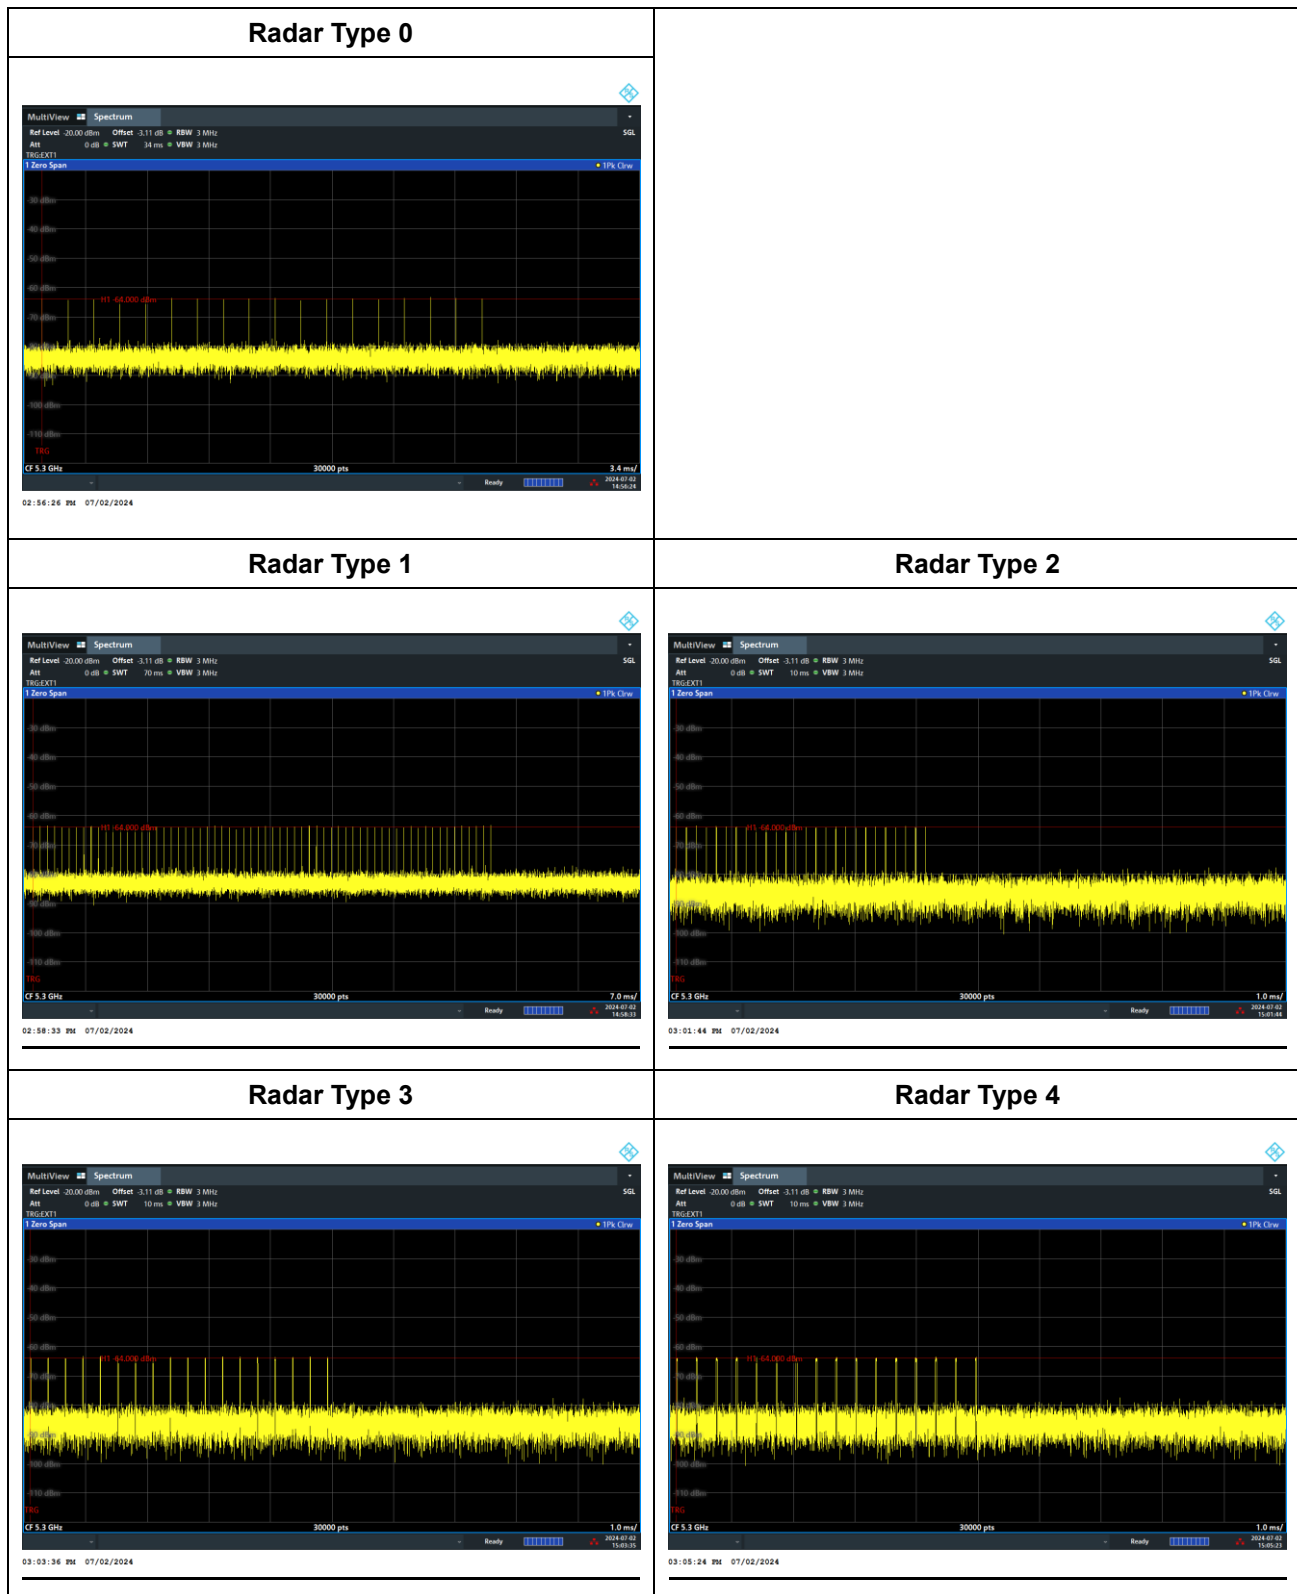




Single Burst of Radar Type 5

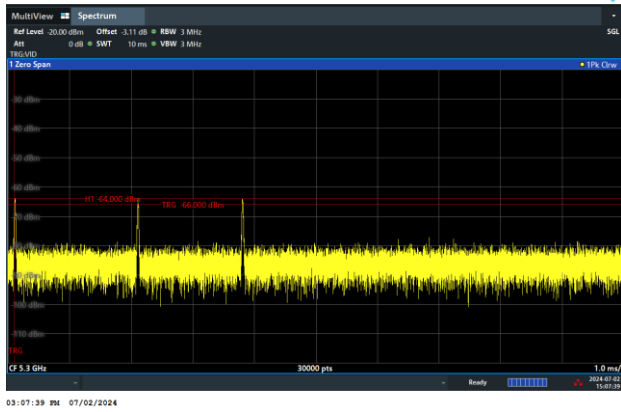


Single Burst of Radar Type 6

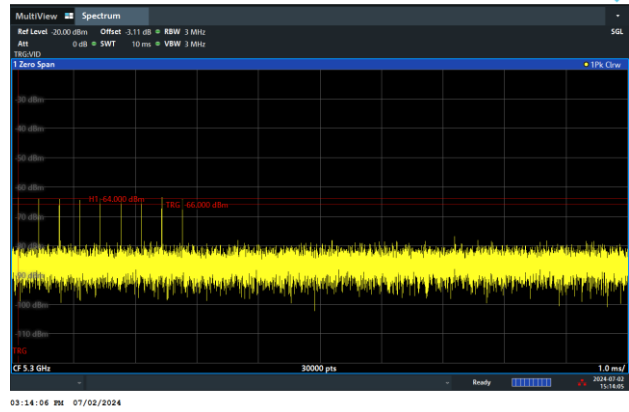




<40MHz / 5310MHz>


Radar Type 0

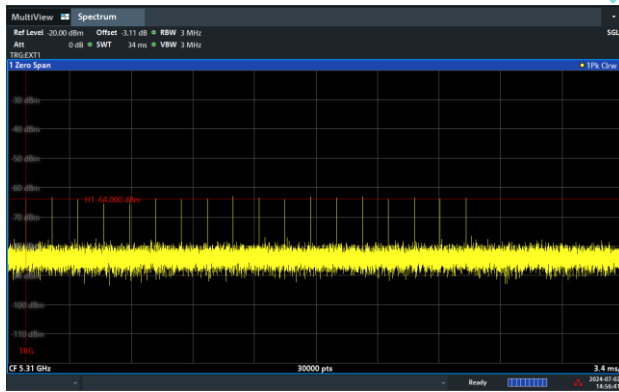


Radar Type 1

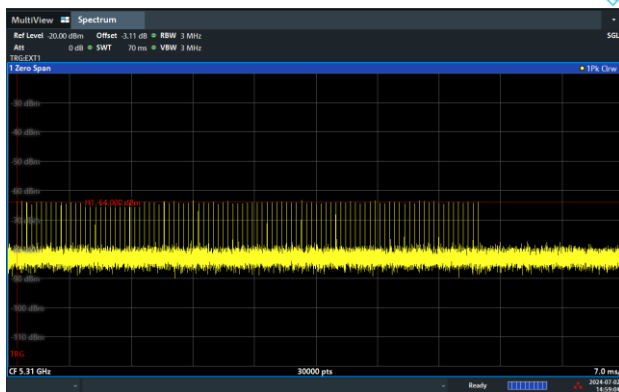


Radar Type 2

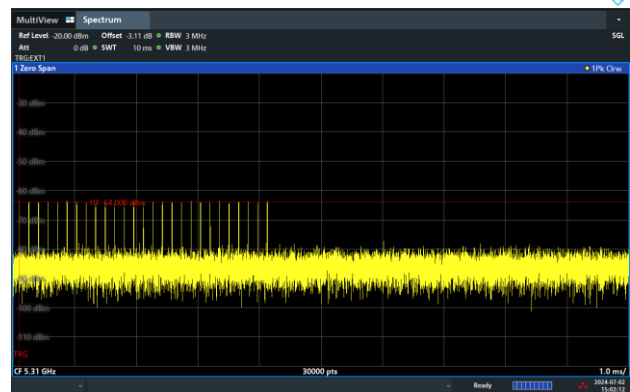

Radar Type 3

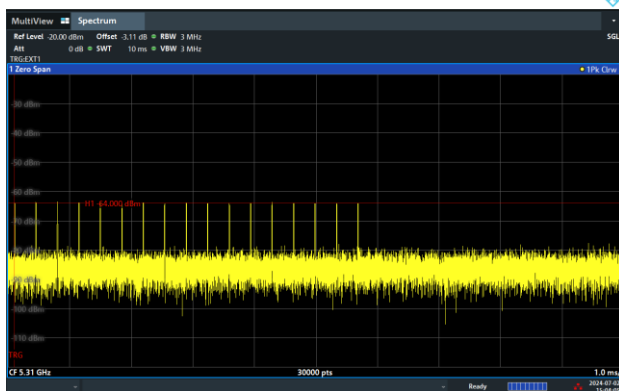


Radar Type 4

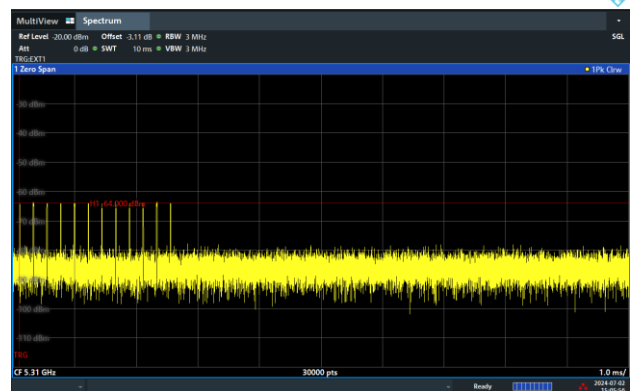




Single Burst of Radar Type 5

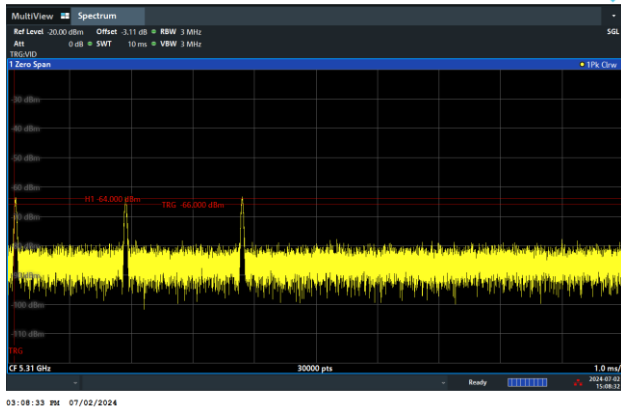


Single Burst of Radar Type 6

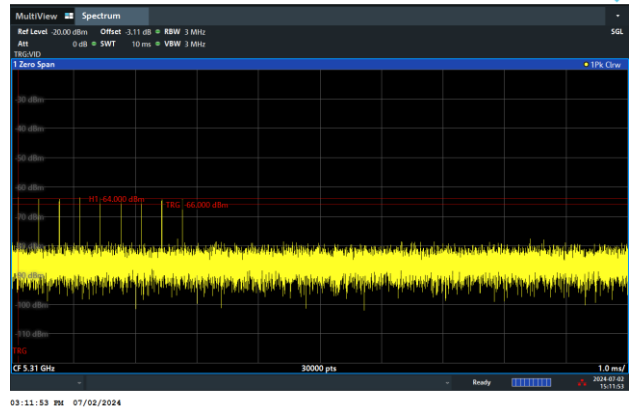




<80MHz / 5290MHz>


Radar Type 0

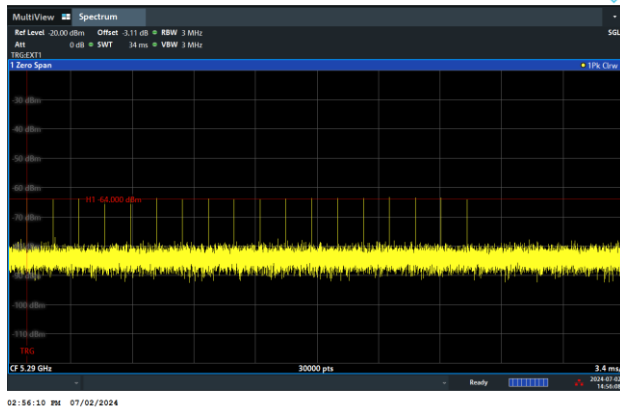


Radar Type 1

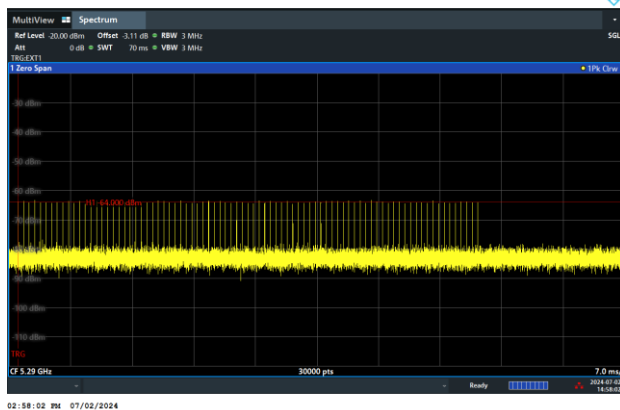


Radar Type 2

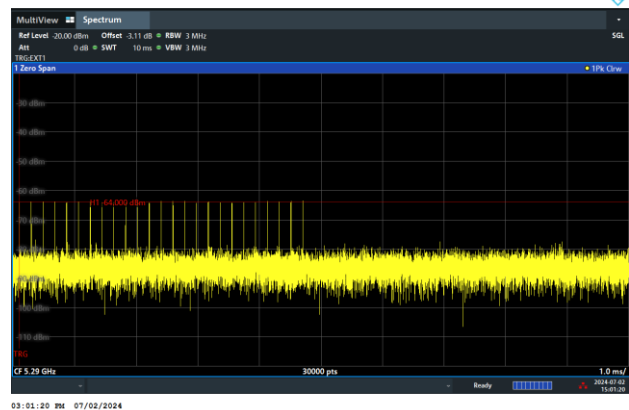

Radar Type 3

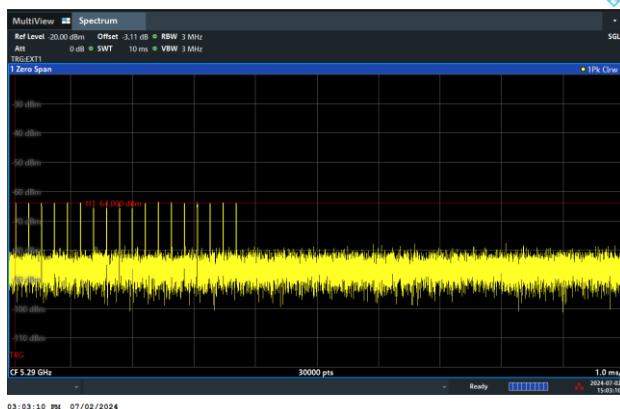


Radar Type 4

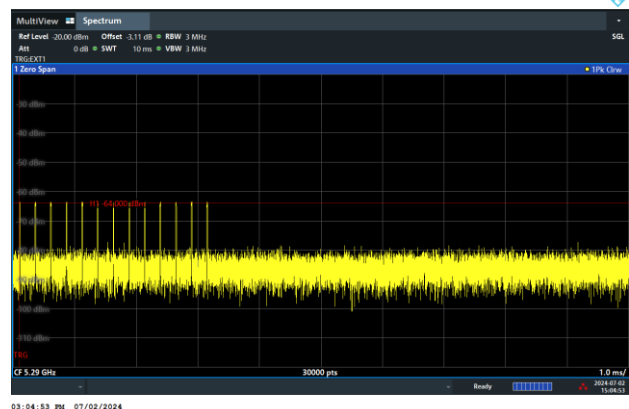




Single Burst of Radar Type 5

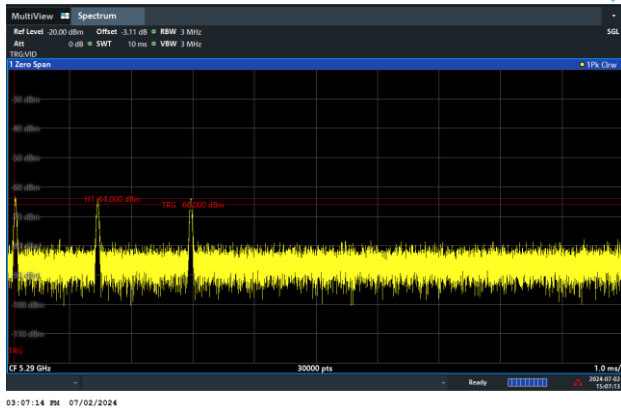


Single Burst of Radar Type 6

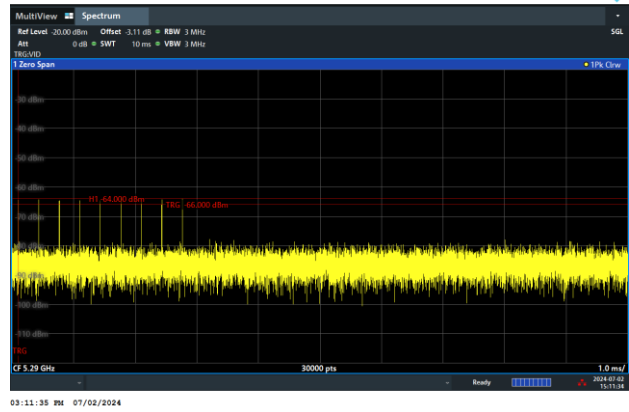




<160MHz / 5250MHz>


Radar Type 0

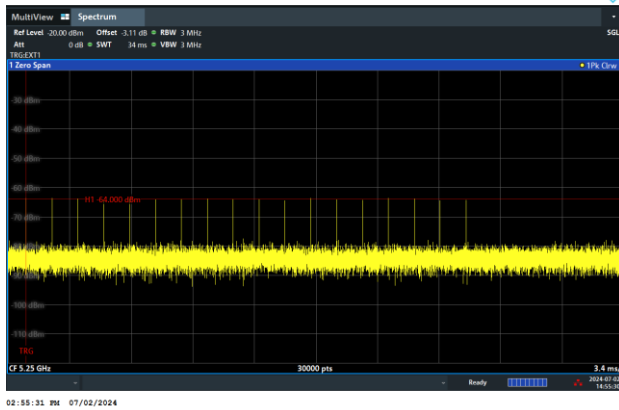


Radar Type 1

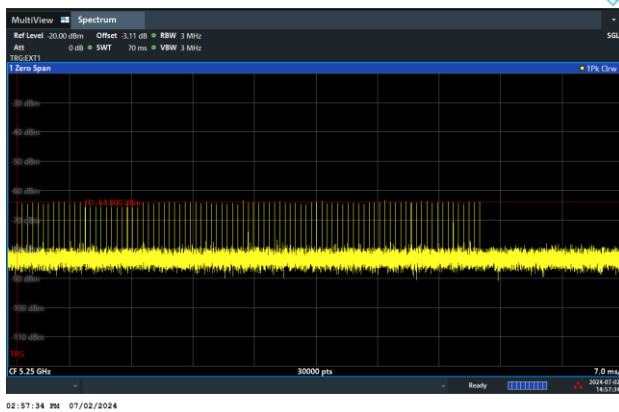


Radar Type 2

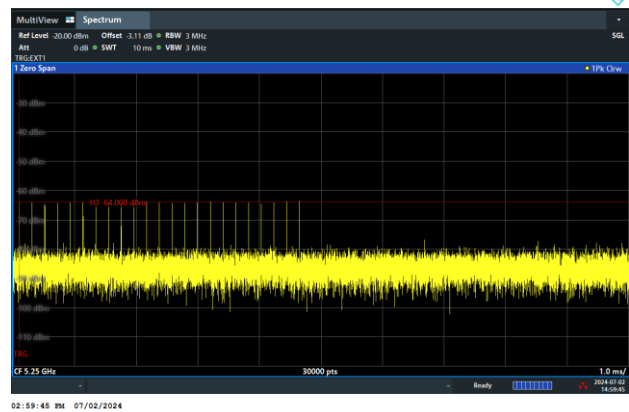

Radar Type 3

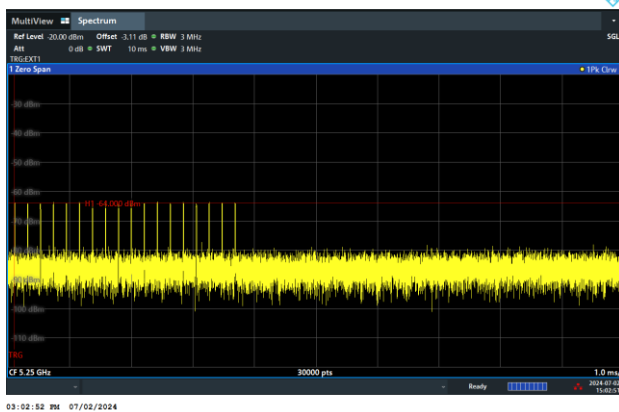


Radar Type 4

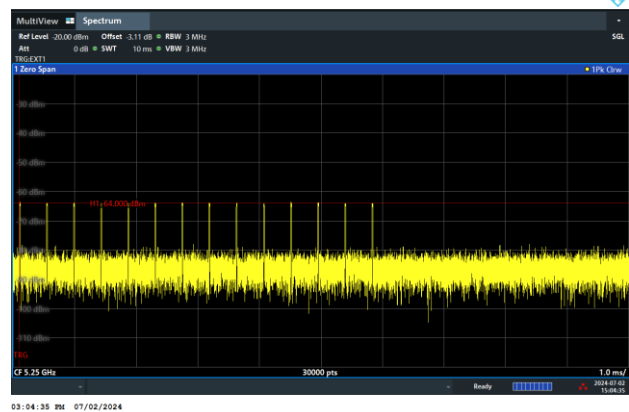




Single Burst of Radar Type 5

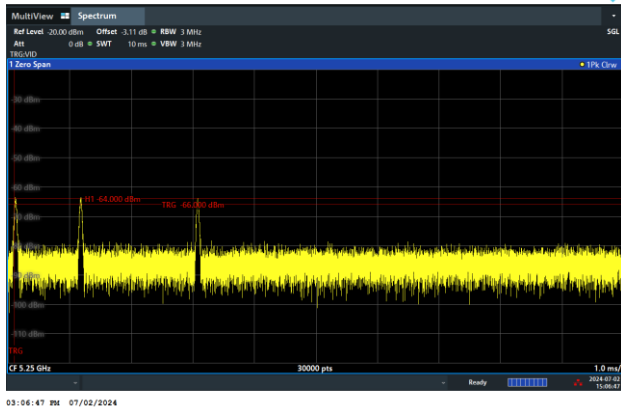


Single Burst of Radar Type 6

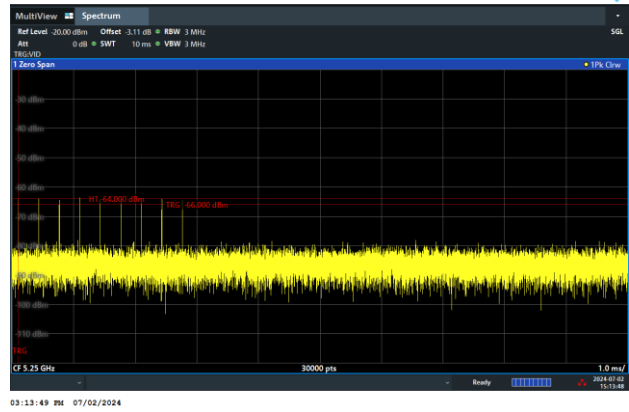




<20MHz / 5500MHz>


Radar Type 0

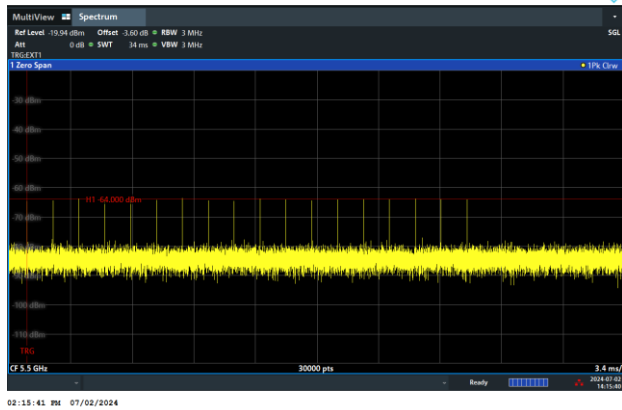


Radar Type 1

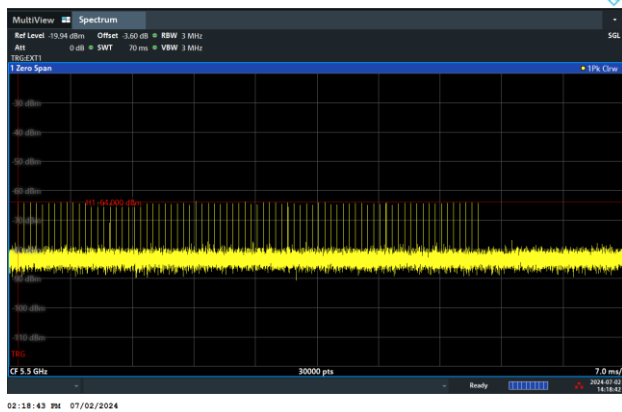


Radar Type 2

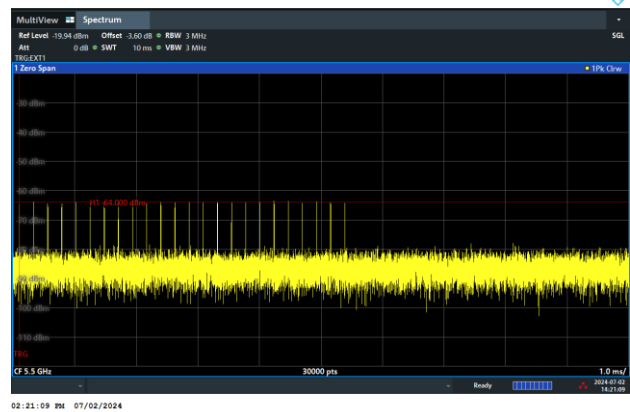

Radar Type 3

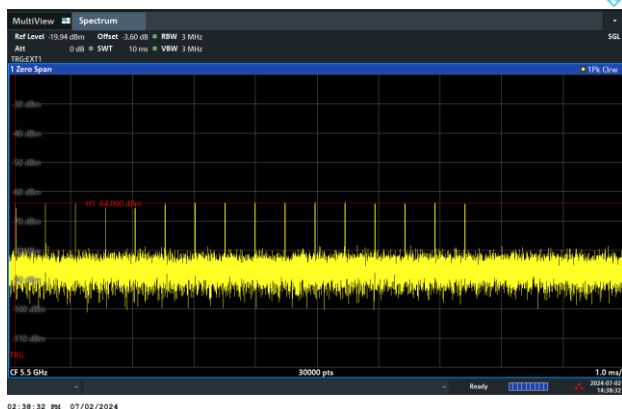


Radar Type 4

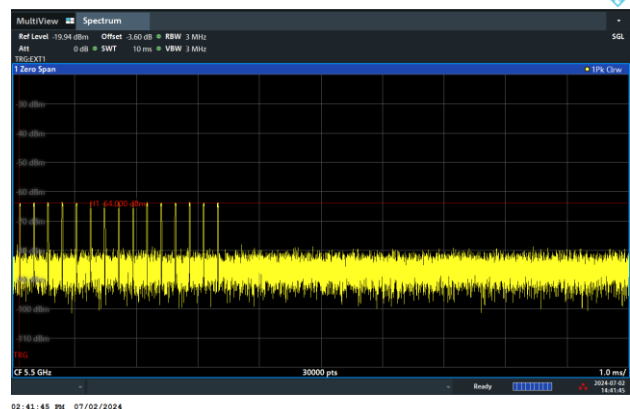




Single Burst of Radar Type 5

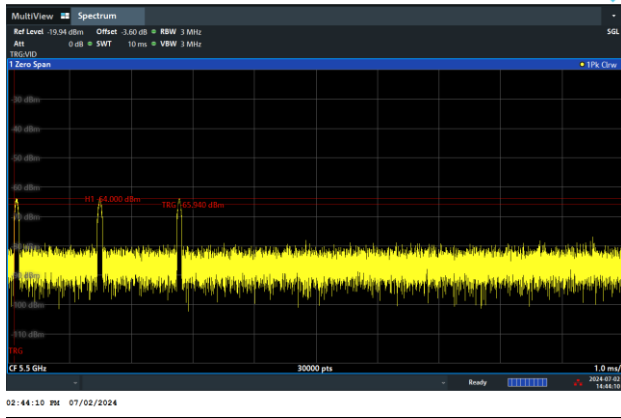


Single Burst of Radar Type 6

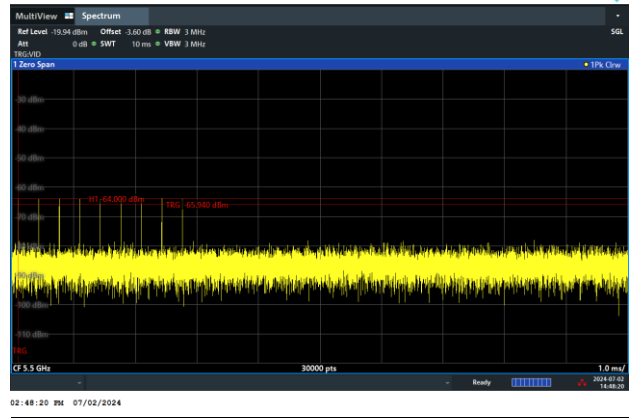




<40MHz / 5510MHz>

Radar Type 0

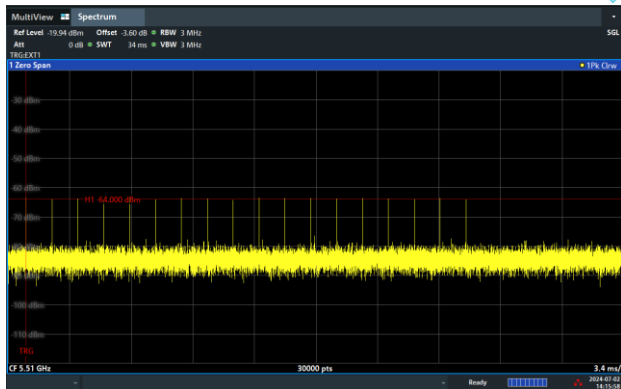


02:15:59 PM 07/02/2024

Radar Type 1

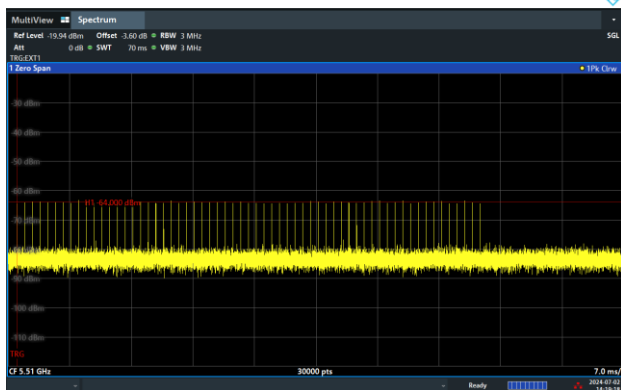


02:19:19 PM 07/02/2024

Radar Type 2

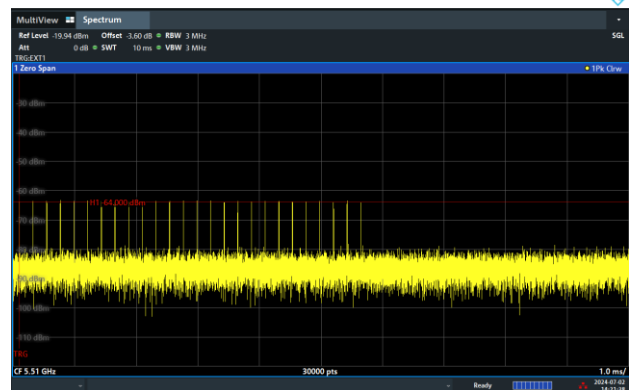


02:21:39 PM 07/02/2024

Radar Type 3

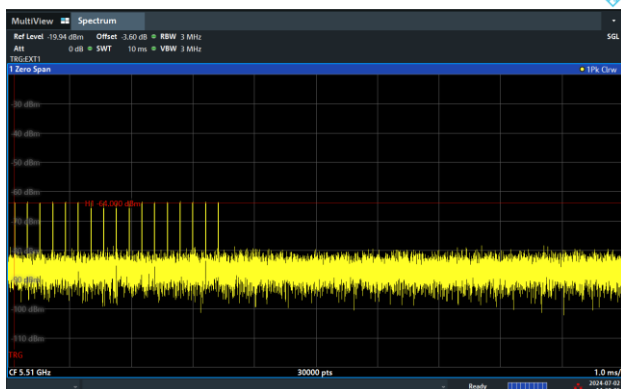

02:39:06 PM 07/02/2024


Radar Type 4

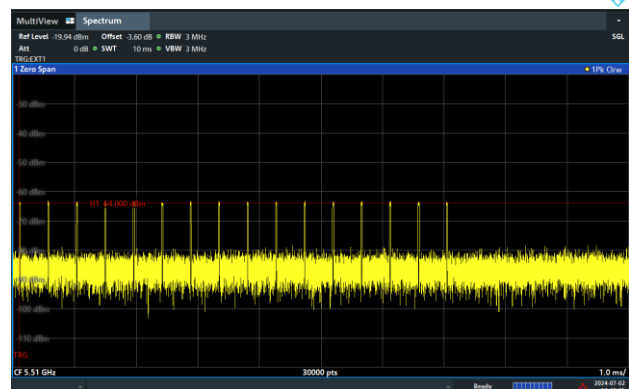


02:42:06 PM 07/02/2024



Single Burst of Radar Type 5

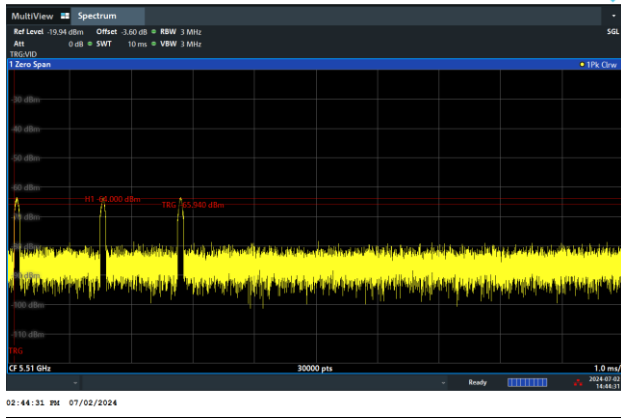


Single Burst of Radar Type 6

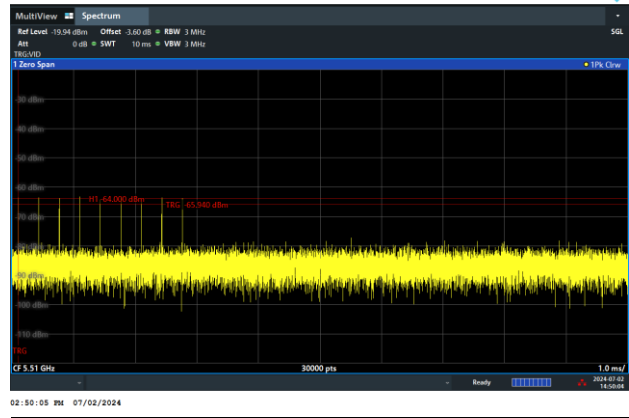




<80MHz / 5530MHz>


Radar Type 0

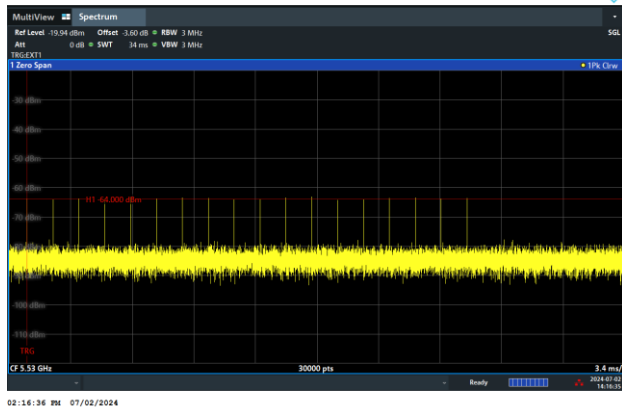


Radar Type 1

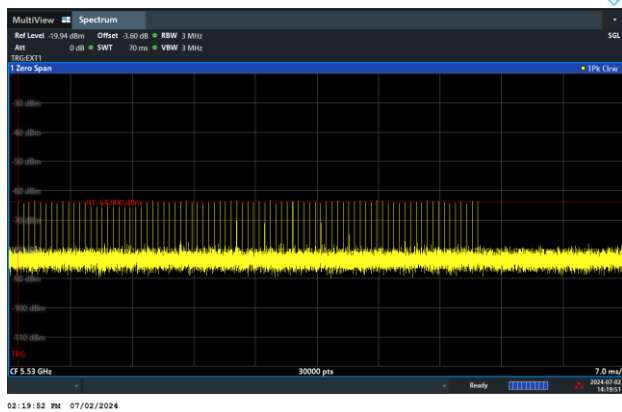


Radar Type 2

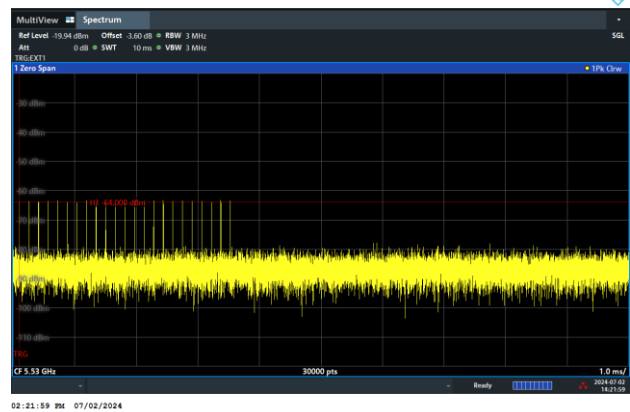

Radar Type 3

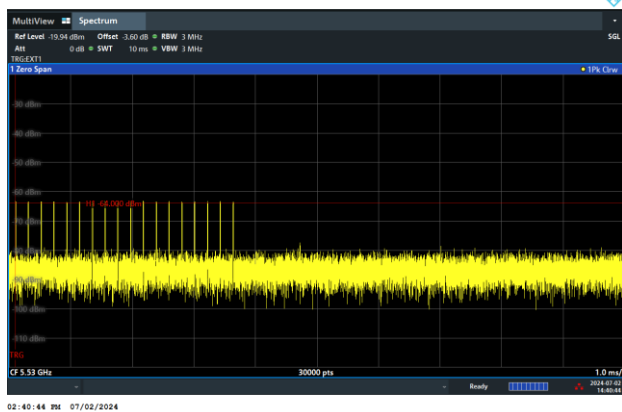


Radar Type 4

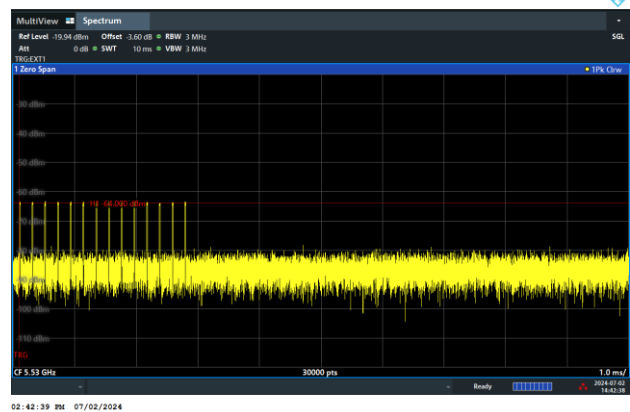




Single Burst of Radar Type 5

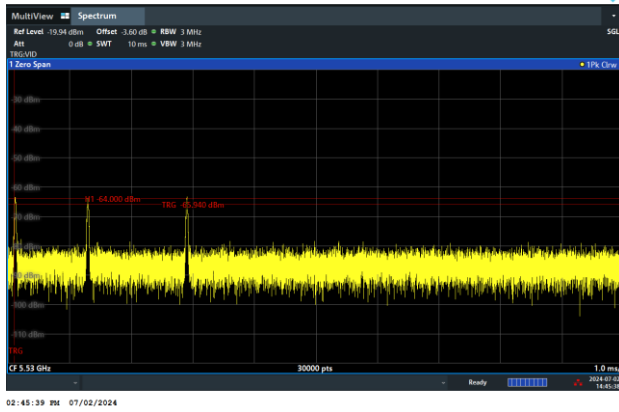


Single Burst of Radar Type 6

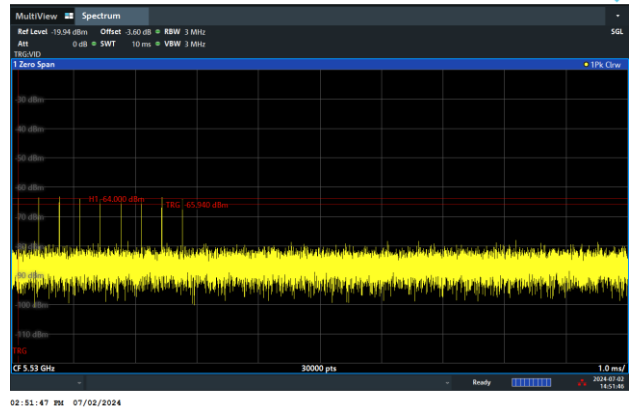




<160MHz / 5570MHz>


Radar Type 0

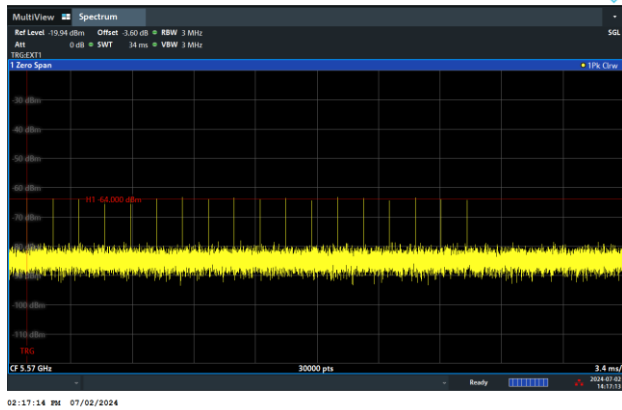


Radar Type 1

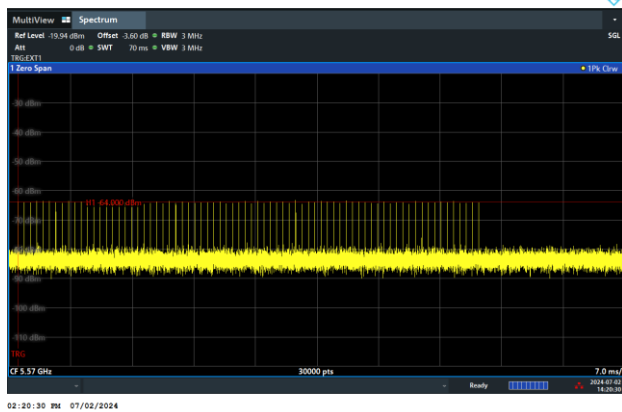


Radar Type 2

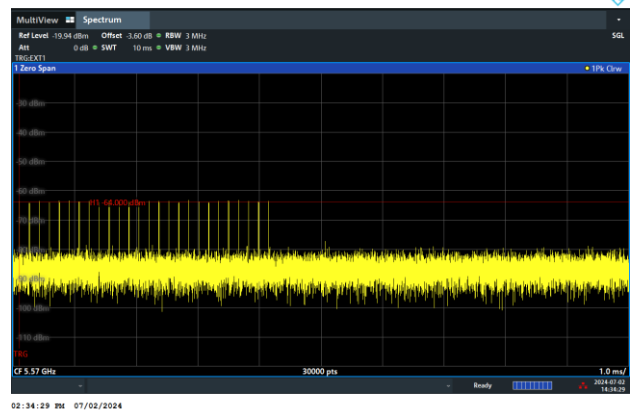

Radar Type 3

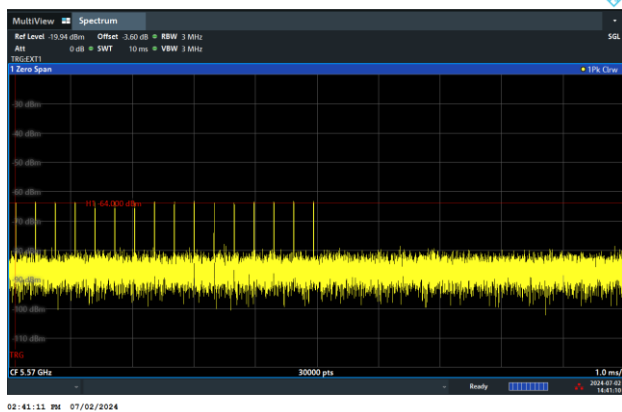


Radar Type 4

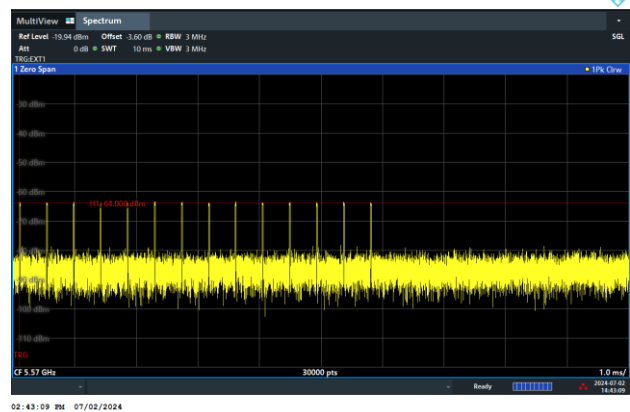




Single Burst of Radar Type 5

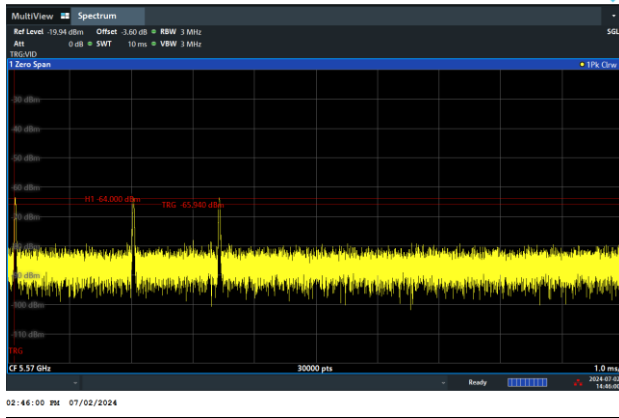

Single Burst of Radar Type 6

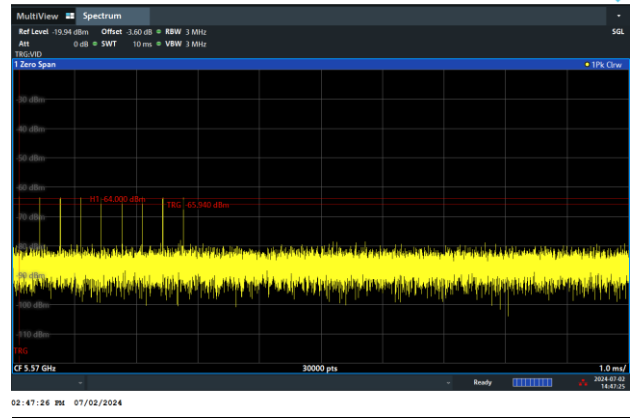

4.2 U-NII Detection Bandwidth

4.2.1 Limit of U-NII Detection Bandwidth

The U-NII Detection Bandwidth shall contain minimum 100% of the 99% power bandwidth.


During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

4.2.2 Test Procedures

- (1) Adjust the equipment to produce a single burst of the Short Pulse Radar Type 0 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
- (2) Set the EUT up as a standalone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio of 0%/100% during this test.
- (3) Generate a single radar burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion.
- (4) Starting at the center frequency of the EUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in report clause 2.3. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.
- (5) Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in report clause 2.3. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance.
- (6) The U-NII Detection Bandwidth is calculated as follows:
U-NII Detection Bandwidth = $F_H - F_L$

4.2.3 Test Setup

<AP Mode>

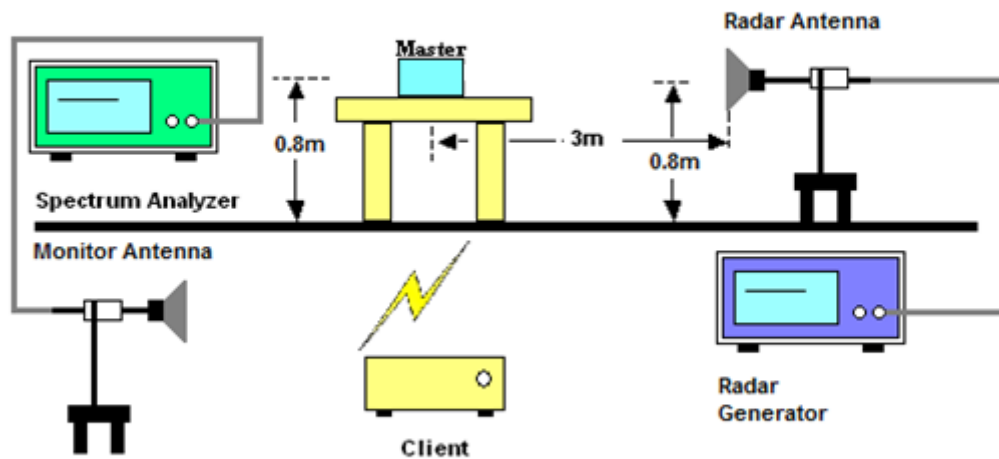

4.2.4 Test Deviation

There is no deviation with the original standard.

4.2.5 Result of U-NII Detection Bandwidth

<AP Mode>

<20MHz / 5300MHz>

Frequency (MHz)	Fc	Trial Number (Detection = Y, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5289	-11	N	N	N	N	N	N	N	N	N	N	0%	
5290	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	F _L
5291	-9	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5292	-8	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	90%	
5293	-7	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	90%	
5294	-6	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	90%	
5295	-5	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90%	
5300	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5305	+5	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	90%	
5306	+6	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	90%	
5307	+7	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5308	+8	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5309	+9	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5310	+10	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	90%	F _H
5311	+11	N	N	N	N	N	N	N	N	N	N	0%	
Detection Bandwidth = F _H – F _L = 5310 – 5290 = 20 MHz													
EUT 99% Bandwidth = 19.549 MHz (Refer to channel 60)													



<40MHz/ 5310MHz>

Frequency (MHz)	Fc	Trial Number (Detection = Y, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5289	-21	N	N	N	N	N	N	N	N	N	N	0%	
5290	-20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	F _L
5291	-19	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5292	-18	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5293	-17	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5294	-16	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5295	-15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5300	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5305	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5310	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5315	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5320	+10	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	90%	
5325	+15	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	90%	
5326	+16	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90%	
5327	+17	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90%	
5328	+18	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	90%	
5329	+19	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	90%	
5330	+20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	F _H
5331	+21	N	N	N	N	N	N	N	N	N	N	0%	
Detection Bandwidth = F _H – F _L = 5330 – 5290 = 40 MHz													
EUT 99% Bandwidth = 38.431 MHz (Refer to channel 62)													



<80MHz / 5290MHz>

Frequency (MHz)	Fc	Trial Number (Detection = Y, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5249	-41	N	N	N	N	N	N	N	N	N	N	0%	
5250	-40	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	90%	F _L
5251	-39	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	90%	
5252	-38	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	90%	
5253	-37	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5254	-36	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5255	-35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5260	-30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5265	-25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5270	-20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5275	-15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5380	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5285	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5290	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5295	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5300	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5305	+15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5310	+20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5315	+25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5320	+30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5325	+35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5326	+36	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5327	+37	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90%	
5328	+38	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5329	+39	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5330	+40	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	F _H
5331	+41	N	N	N	N	N	N	N	N	N	N	0%	
Detection Bandwidth = F _H – F _L = 5330 – 5250 = 80 MHz													
EUT 99% Bandwidth = 76.725 MHz (Refer to channel 58)													



<160MHz / 5250MHz>

Frequency (MHz)	Fc	Trial Number (Detection = Y, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5249	-1	N	N	N	N	N	N	N	N	N	N	0%	
5250	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	F _L
5255	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5260	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5265	+15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5270	+20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5275	+25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5280	+30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5285	+35	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	90%	
5290	+40	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	90%	
5295	+45	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5300	+50	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5305	+55	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5310	+60	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5315	+65	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	90%	
5320	+70	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5325	+75	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5326	+76	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5327	+77	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5328	+78	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5329	+79	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	
5330	+80	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100%	F _H
5331	+81	N	N	N	N	N	N	N	N	N	N	0%	
Detection Bandwidth = F _H – F _L = 5330 – 5250 = 80 MHz													
EUT 99% Bandwidth = 76.176 MHz (Refer to channel 106)													



<20MHz / 5500MHz>

Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5489	-11	N	N	N	N	N	N	N	N	N	N	0	
5490	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _L
5491	-9	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5492	-8	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5493	-7	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5494	-6	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5495	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5500	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5505	+5	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90	
5506	+6	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5507	+7	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	90	
5508	+8	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5509	+9	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5510	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _H
5511	+11	N	N	N	N	N	N	N	N	N	N	0	
Detection Bandwidth = F _H – F _L = 5510 – 5490 = 20 MHz													
EUT 99% Bandwidth = 19.215 MHz (Refer to channel 100)													



<40MHz / 5510MHz>

Frequency (MHz)	Fc	Trial Number (Detection = Y, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5489	-21	N	N	N	N	N	N	N	N	N	N	0	
5490	-20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _L
5491	-19	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90	
5492	-18	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5493	-17	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5494	-16	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5495	-15	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90	
5500	-10	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	90	
5505	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5510	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5515	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5520	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5525	+15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5526	+16	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5527	+17	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5528	+18	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5529	+19	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5530	+20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _H
5531	+21	N	N	N	N	N	N	N	N	N	N	0	
Detection Bandwidth = F _H – F _L = 5530 – 5490 = 40 MHz													
EUT 99% Bandwidth = 38.148 MHz (Refer to channel 102)													



<80MHz / 5530MHz>

Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5489	-41	N	N	N	N	N	N	N	N	N	N	0	
5490	-40	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _L
5491	-39	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5492	-38	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5493	-37	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5494	-36	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5495	-35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5500	-30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5505	-25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5510	-20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5515	-15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5520	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5525	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5530	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5535	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5540	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5545	+15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5550	+20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5555	+25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5560	+30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5565	+35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5566	+36	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5567	+37	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5568	+38	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5569	+39	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5570	+40	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	90	F _H
5571	+41	N	N	N	N	N	N	N	N	N	N	0	

Detection Bandwidth = F_H – F_L = 5570 – 5490 = 80 MHz

EUT 99% Bandwidth = 77.235 MHz (Refer to channel 106)



<160MHz / 5570MHz>

Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5489	-81	N	N	N	N	N	N	N	N	N	N	0	
5490	-80	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _L
5491	-79	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5492	-78	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5493	-77	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5494	-76	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5495	-75	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5500	-70	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5505	-65	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5510	-60	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5515	-55	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5520	-50	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5525	-45	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5530	-40	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5535	-35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5540	-30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5545	-25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5550	-20	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	90	
5555	-15	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90	
5560	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5565	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5570	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5575	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	90	
5580	+10	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	90	
5585	+15	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	90	
5590	+20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5595	+25	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	90	
5600	+30	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	90	
5605	+35	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	90	
5610	+40	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	90	



Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5615	+45	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5620	+50	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5625	+55	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5630	+60	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5635	+65	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5640	+70	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5645	+75	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5646	+76	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5647	+77	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5648	+78	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5649	+79	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5650	+80	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _H
5651	+81	N	N	N	N	N	N	N	N	N	N	0	
Detection Bandwidth = F _H – F _L = 5650 – 5490 = 160 MHz													
EUT 99% Bandwidth = 157.551 MHz (Refer to channel 114)													



4.3 Channel Availability Check

4.3.1 Limit of Channel Availability Check

The Initial Channel Availability Check Time tests that the EUT does not emit beacon, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for radar waveforms for **one minute** on the test Channel.

4.3.2 Test Procedures of Initial Channel Availability Check Time

This test does not use any radar waveforms and only needs to be performed one time.

- (1) The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the EUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
- (2) The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

4.3.3 Radar Burst at the Beginning of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time. This is illustrated in Figure 15.

- (1) The Radar Waveform generator and EUT are connected using the applicable test setup and the power of the EUT is switched off.
- (2) The EUT is powered on at T_0 . T_1 denotes the instant when the EUT has completed its power-up sequence ($T_{\text{power_up}}$). The Channel Availability Check Time commences on Chr at instant T_1 and will end no sooner than $T_1 + T_{\text{ch_avail_check}}$.
- (3) A single Burst of one of the Short Pulse Radar Types 1-4 will commence within a 6 second window starting at T_1 . An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (4) Visual indication or measured results on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for EUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- (5) Verify that during the 2.5 minute measurement window no EUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

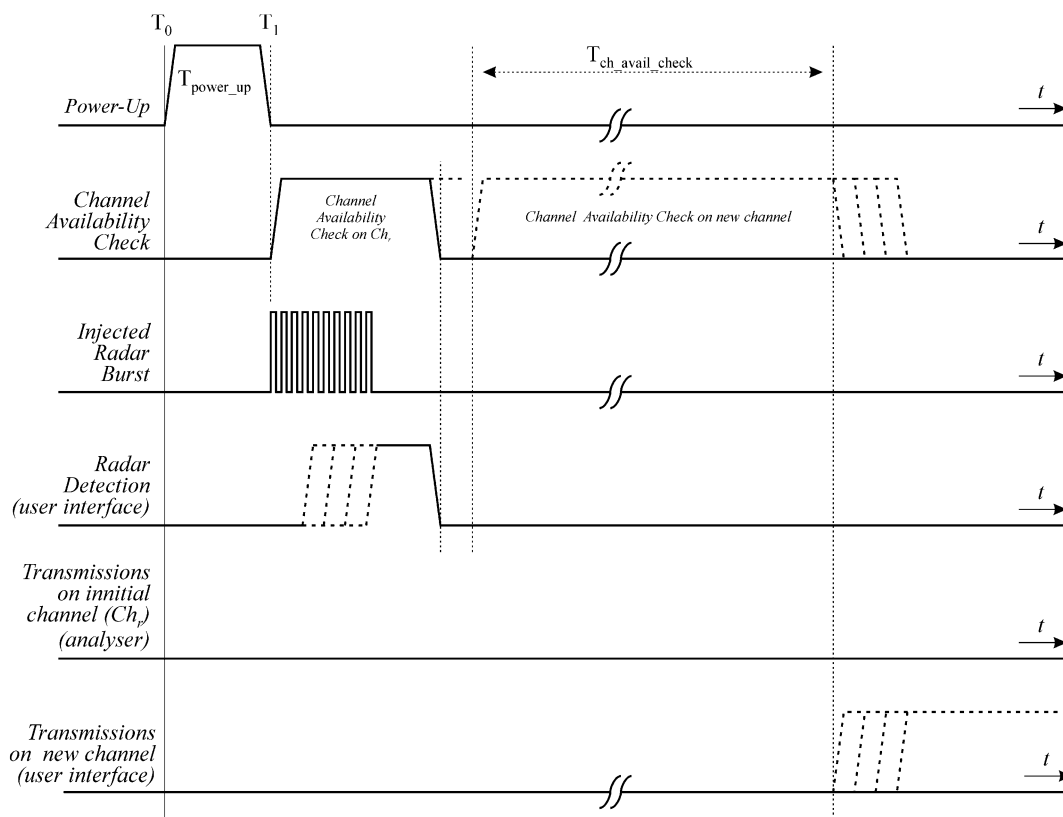


Figure 15: Example of timing for radar testing at the beginning of the Channel Availability Check Time

4.3.4 Radar Burst at the End of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1dB occurs at the end of the Channel Availability Check Time. This is illustrated in Figure 16.

- (1) The Radar Waveform generator and EUT are connected using the applicable test setup and the power of the EUT is switched off.
- (2) The EUT is powered on at T_0 . T_1 denotes the instant when the EUT has completed its power-up sequence ($T_{\text{power_up}}$). The Channel Availability Check Time commences on Chr at instant T_1 and will end no sooner than $T_1 + T_{\text{ch_avail_check}}$.
- (3) A single Burst of one of the Short Pulse Radar Types 1-4 will commence within a 6 second window starting at $T_1 + 54$ seconds. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (4) Visual indication or measured results on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for EUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- (5) Verify that during the 2.5 minute measurement window no EUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.


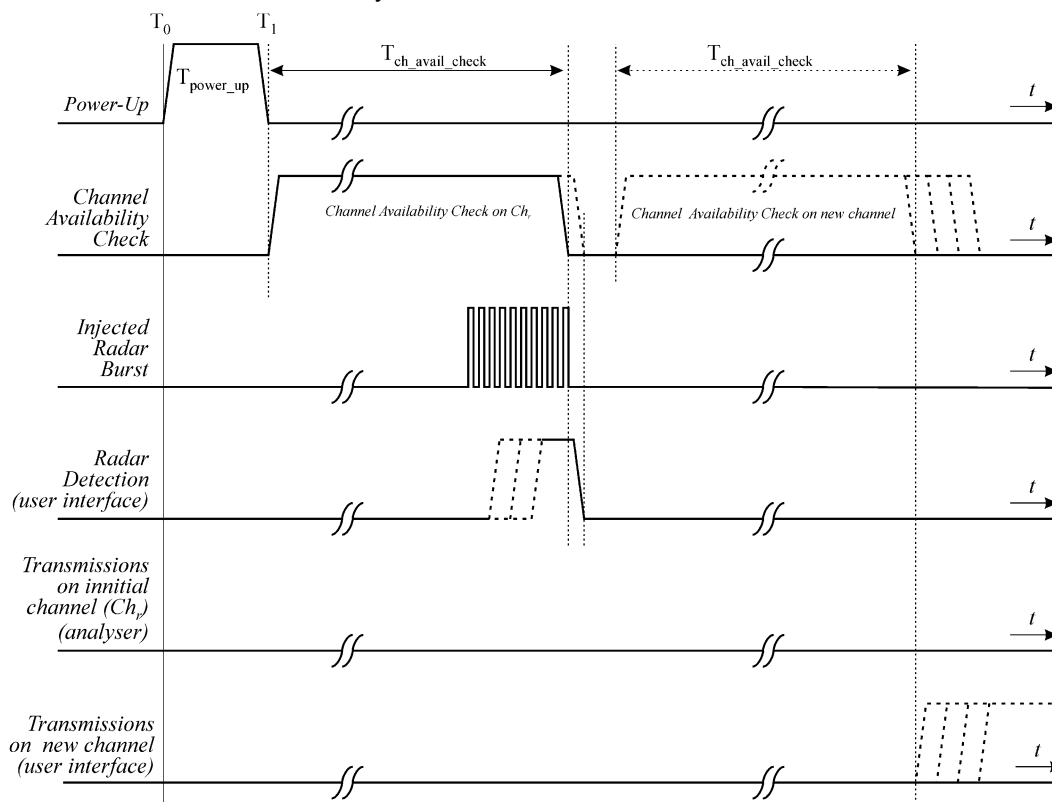


Figure 16: Example of timing for radar testing towards the end of the Channel Availability Check Time

4.3.5 Test Setup

<AP Mode>

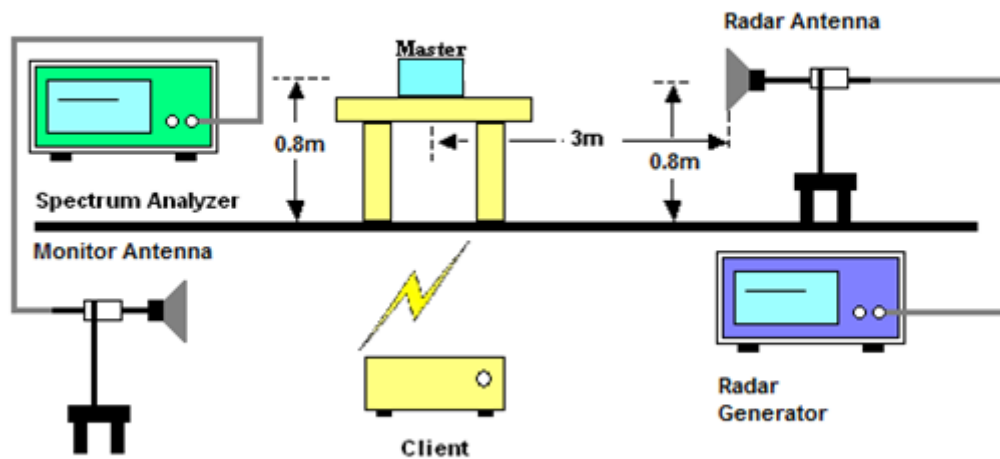

4.3.6 Test Deviation




There is no deviation with the original standard.



4.3.7 Result of Channel Availability Check Time

<AP Mode>

<160MHz / 5250MHz>

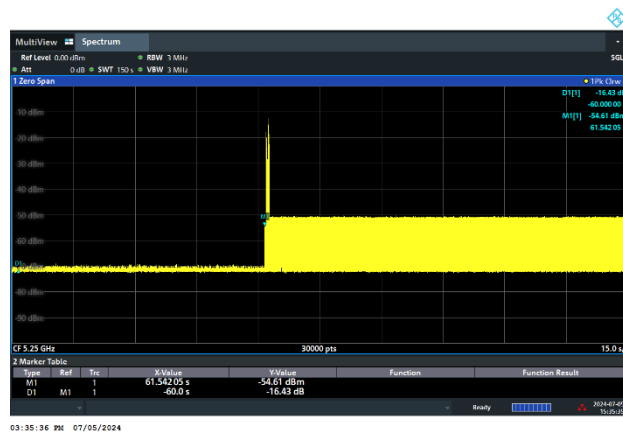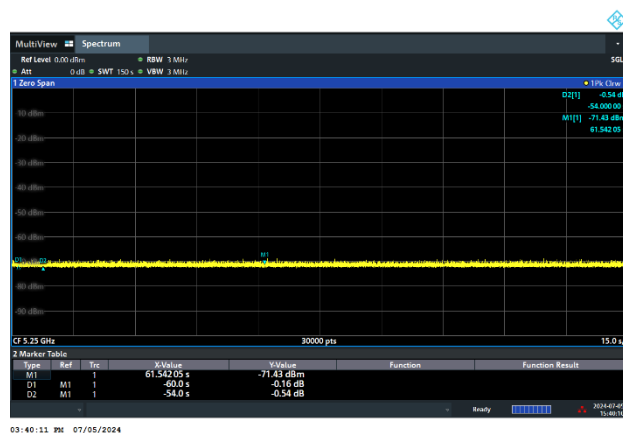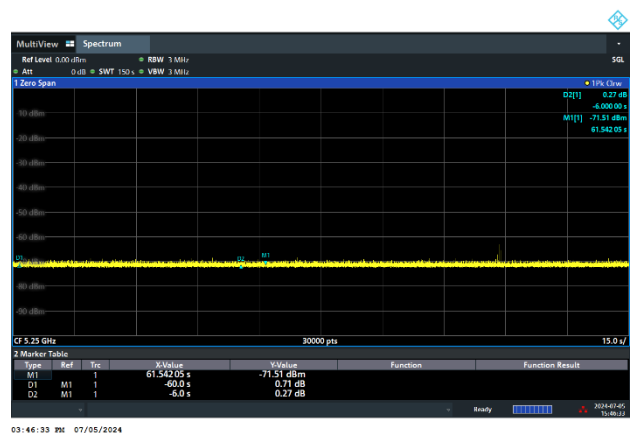EUT Power up and
Initial Channel Availability Check TimeRadar Burst at the Beginning of
the Channel Availability Check TimeRadar Burst at the End of
the Channel Availability Check Time




Marker 1 (Delta2): 60 seconds before End of Channel Availability Check

Marker 2: End of Channel Availability Check

Marker 3: 54 seconds or 6 seconds before End of Channel Availability Check



<160MHz / 5570MHz>

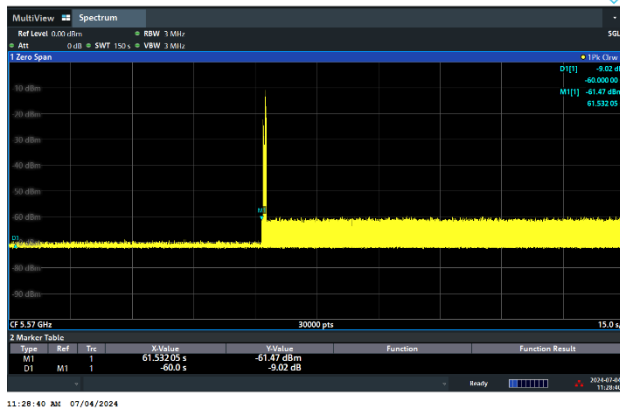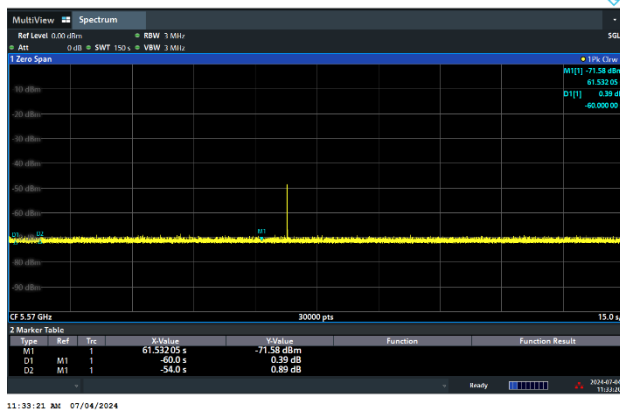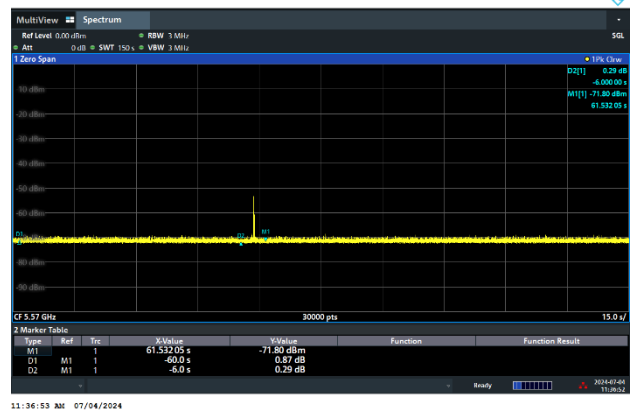**EUT Power up and
Initial Channel Availability Check Time****Radar Burst at the Beginning of
the Channel Availability Check Time****Radar Burst at the End of
the Channel Availability Check Time**

Marker 1 (Delta2): 60 seconds before End of Channel Availability Check

Marker 2: End of Channel Availability Check

Marker 3: 54 seconds or 6 seconds before End of Channel Availability Check

4.4 In-Service Monitoring: Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

4.4.1 Limit of In-Service Monitoring


The EUT has In-Service Monitoring function to continuously monitor the radar signals, If radar is detected, it must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current Channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

4.4.2 Test Procedures

- (1) One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
- (2) In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- (3) The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
- (4) Timing plots are reported with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time).
- (5) At time T0 the Radar Waveform generator sends a Burst of pulses for one of the Short Pulse Radar Types 1-4 at DFS Detection Threshold levels on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs.


- (7) When operating as a Master Device, monitor the EUT for more than 30 minutes following instant T2 to verify that the EUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.

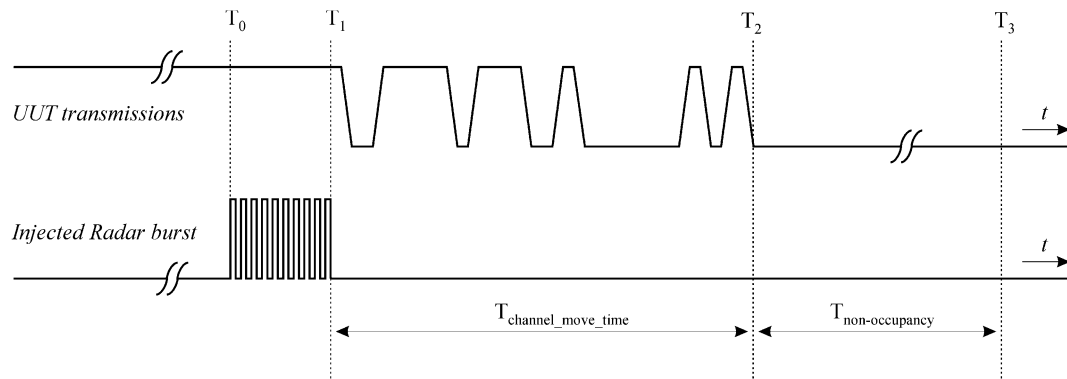


- (8) One 12 seconds plot is reported for the Short Pulse Radar Type 0.
- (9) Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.4ms) = S (12000ms) / B (30000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.4 ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

4.4.3 Test Setup

<AP Mode>

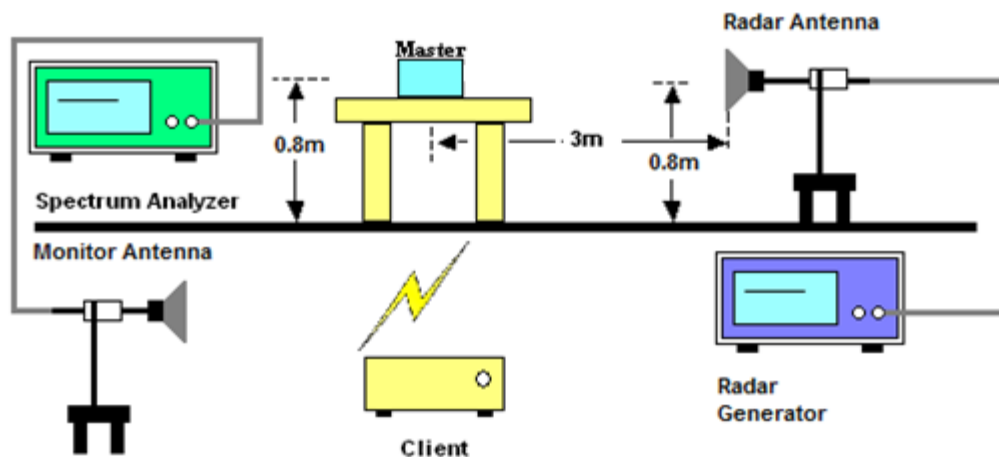

<Mesh Mode>

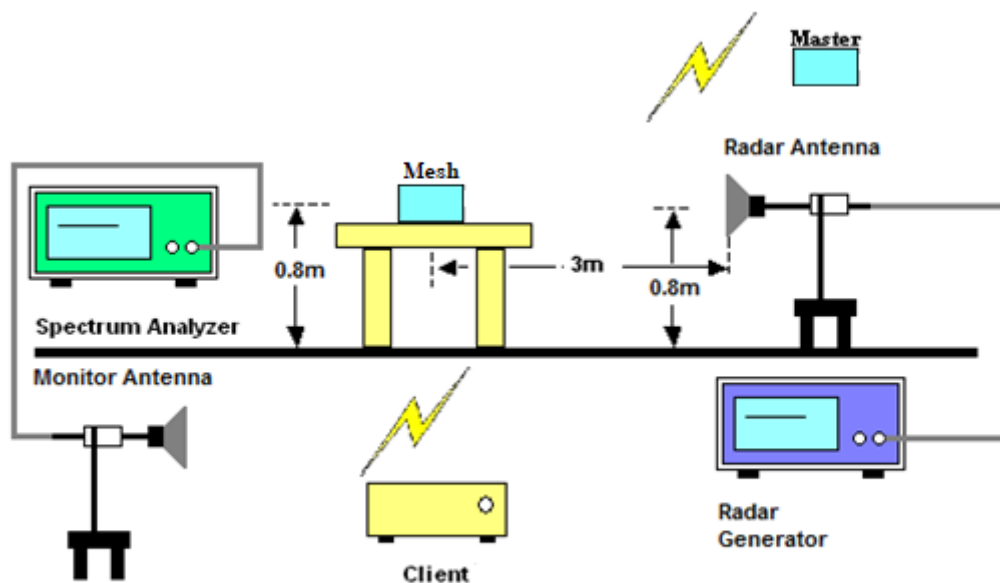

4.4.4 Test Deviation

There is no deviation with the original standard.

4.4.5 Result of Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test

Test Mode :	Master	Temperature :	22.9 ~25.3℃
Test Engineer :	Rebecca Li / Kai Liao	Relative Humidity :	43.2 ~53.9%

<AP Mode>

BW / Channel	Test Item	Test Result	Limit	Pass/Fail
<160MHz / 5250MHz>	Channel Move Time	0.505617 s	< 10s	Pass
	Channel Closing Transmission Time	200ms + 2.4 ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass
<160MHz / 5570MHz>	Channel Move Time	0.479209 s	< 10s	Pass
	Channel Closing Transmission Time	200ms + 2.4 ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass


<Mesh Mode>


BW / Channel	Test Item	Test Result	Limit	Pass/Fail
<160MHz / 5250MHz>	Channel Move Time	0.468816 s	< 10s	Pass
	Channel Closing Transmission Time	200ms + 4.8 ms	< 260ms	Pass

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

4.4.6 Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Plots


<AP Mode>


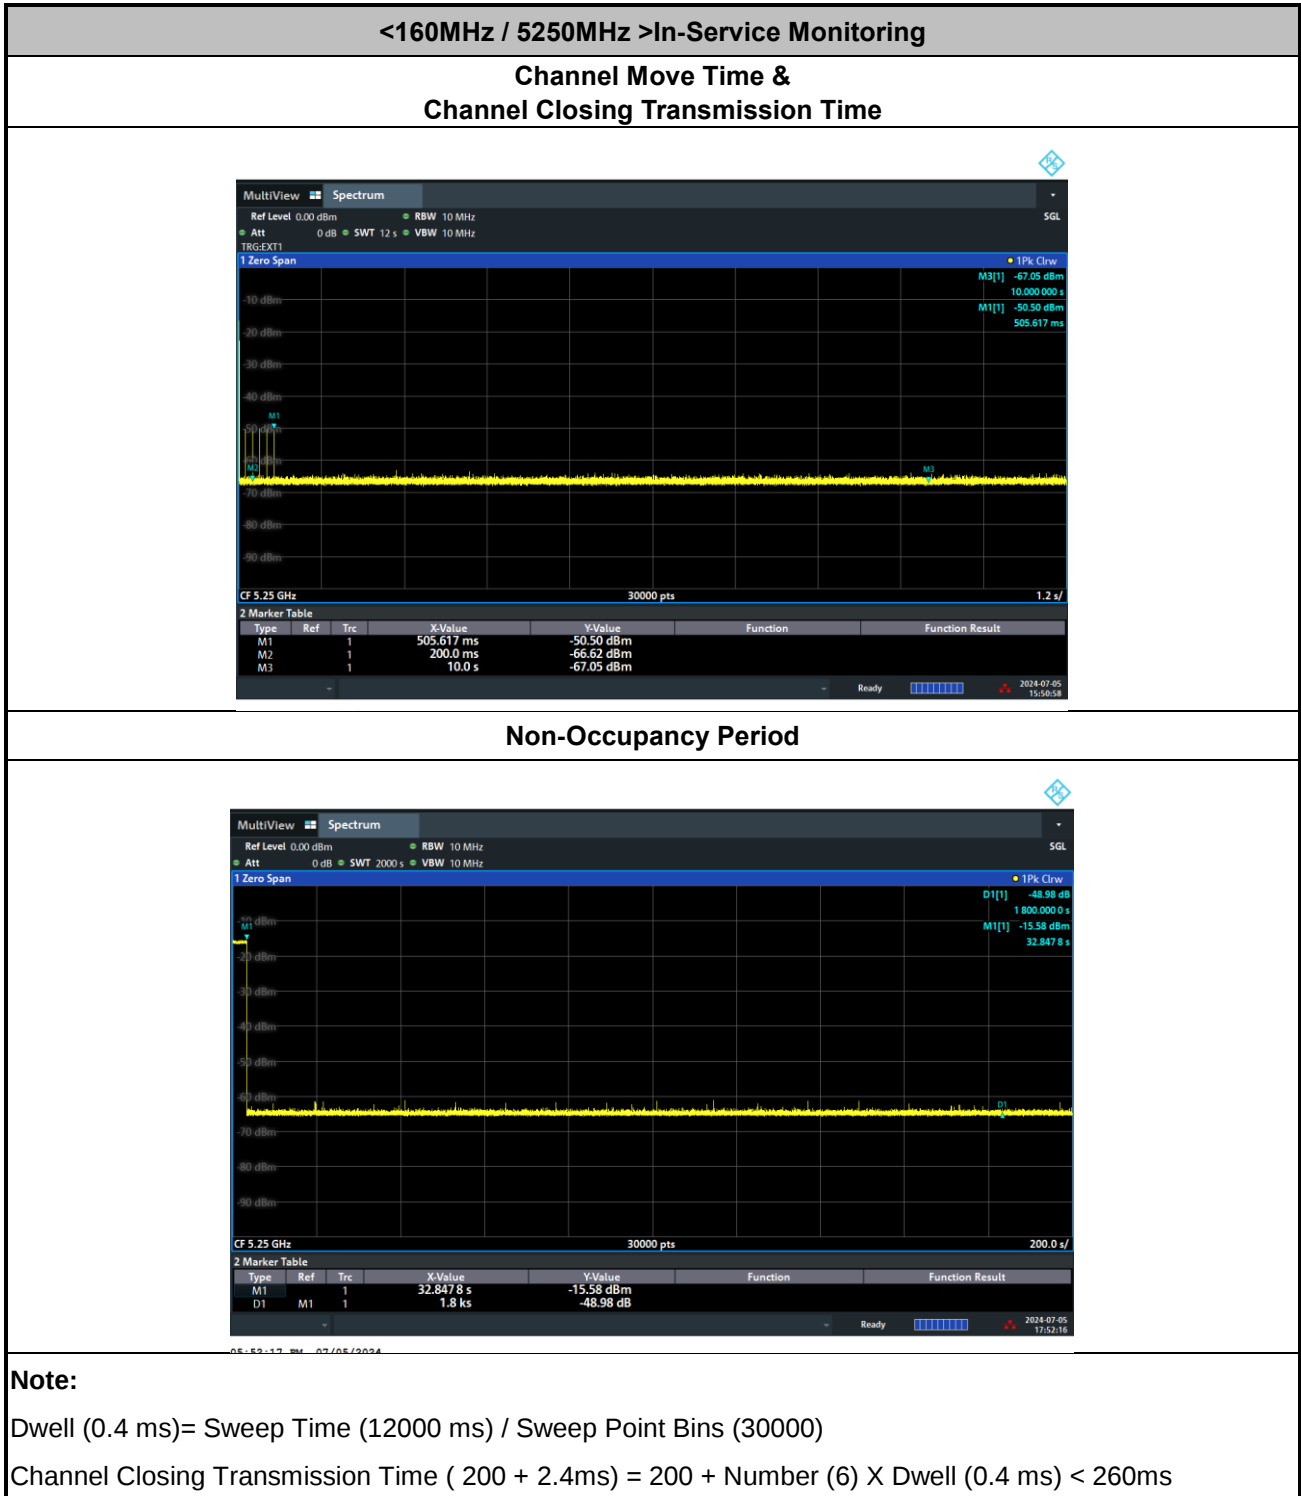


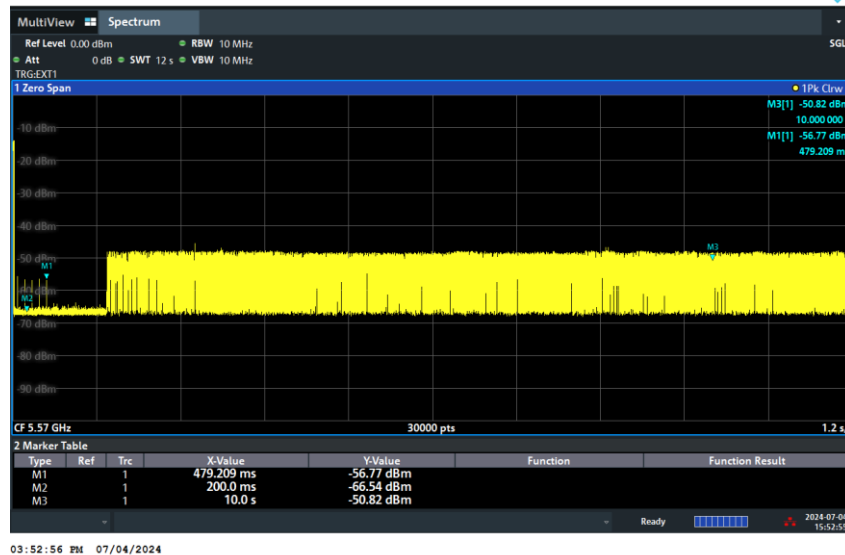
<160MHz / 5570MHz >In-Service Monitoring
**Channel Move Time &
Channel Closing Transmission Time**

Note:

Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)

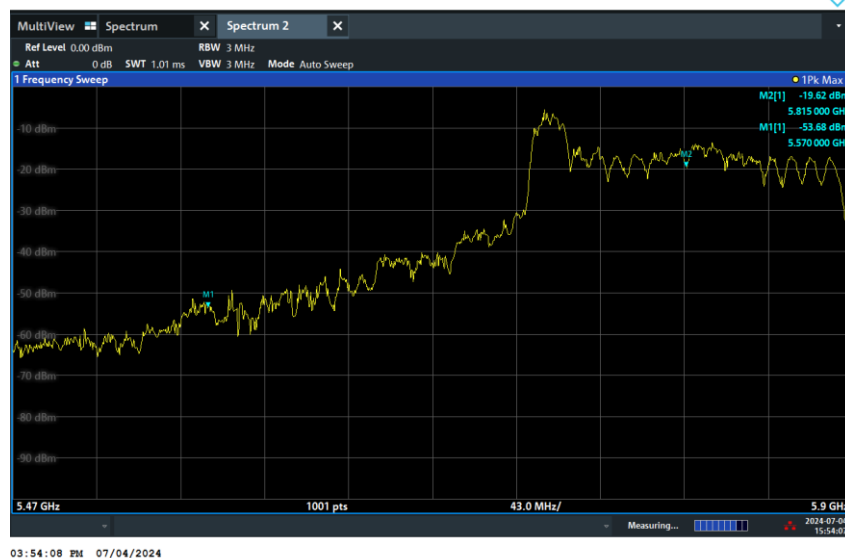Channel Closing Transmission Time (200 + 3.2 ms) = 200 + Number (8) X Dwell (0.4 ms) < 260ms

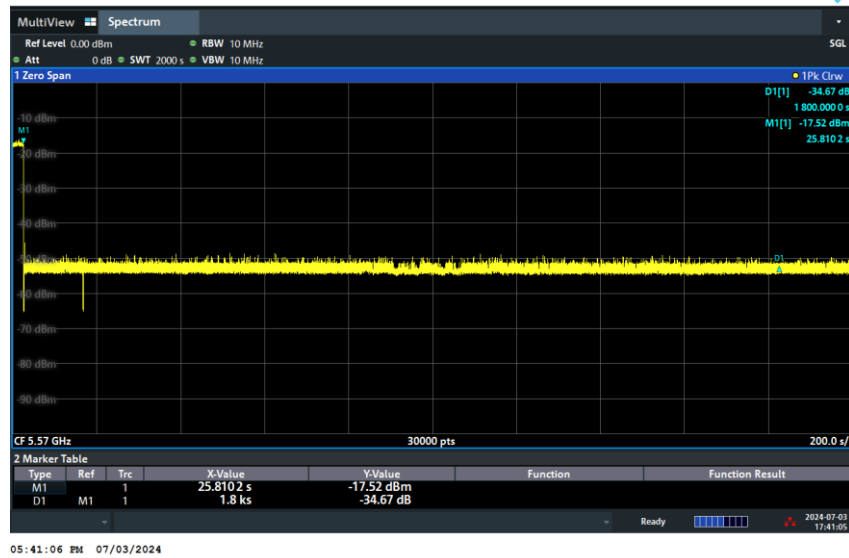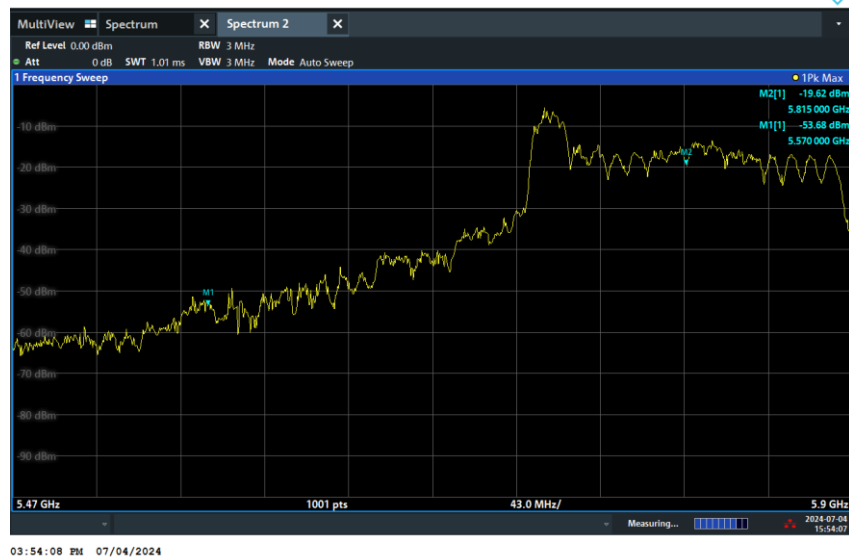Remaining active signal

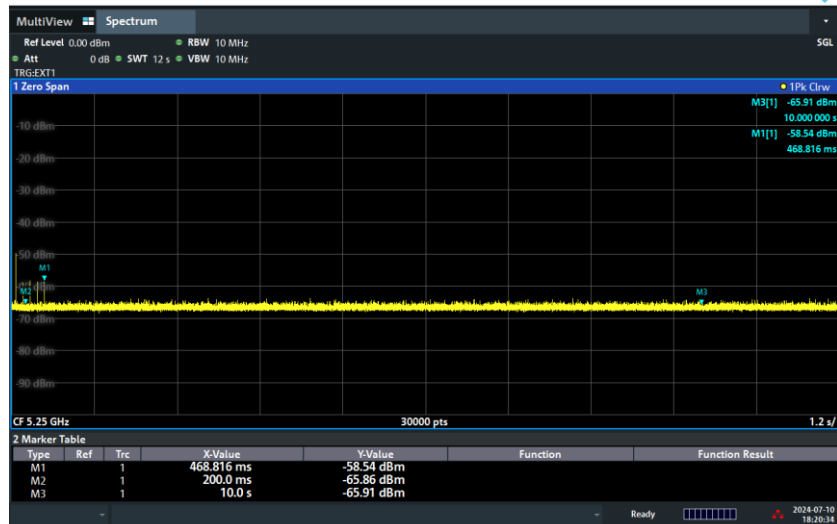
<160MHz / 5570MHz >In-Service Monitoring
Non-Occupancy Period

Remaining active signal


<Mesh Mode>
<160MHz / 5250MHz >In-Service Monitoring
**Channel Move Time &
Channel Closing Transmission Time**

Note:


Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)

Channel Closing Transmission Time (200 + 4.8ms) = 200 + Number (12) X Dwell (0.4 ms) < 260ms



4.4.7 Long Pulsed Radar Type Channel Move Time Test Plots (22second)

<AP Mode>

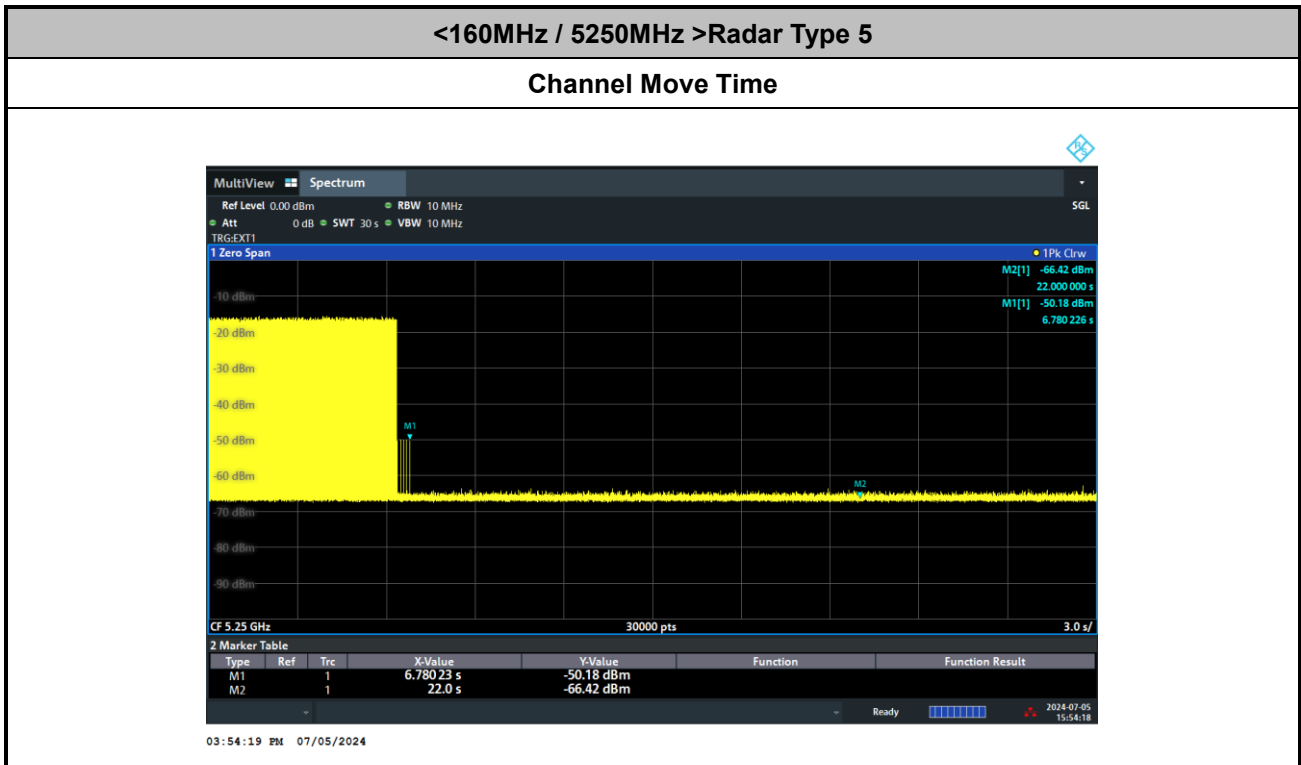

<160MHz / 5570MHz >Radar Type 5
Channel Move Time


12:11:50 AM 07/04/2024

Remaining active signal



03:54:08 PM 07/04/2024



<Mesh Mode>



<160MHz / 5250MHz >Radar Type 5

Channel Move Time

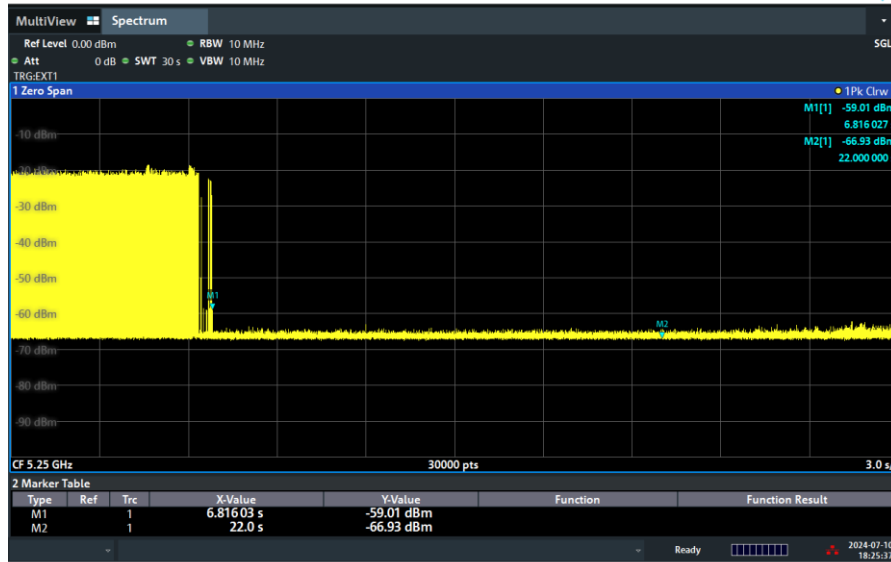

06:25:38 PM 07/10/2024

4.4.8 Data Traffic Channel Loading and Noise Floor Plots

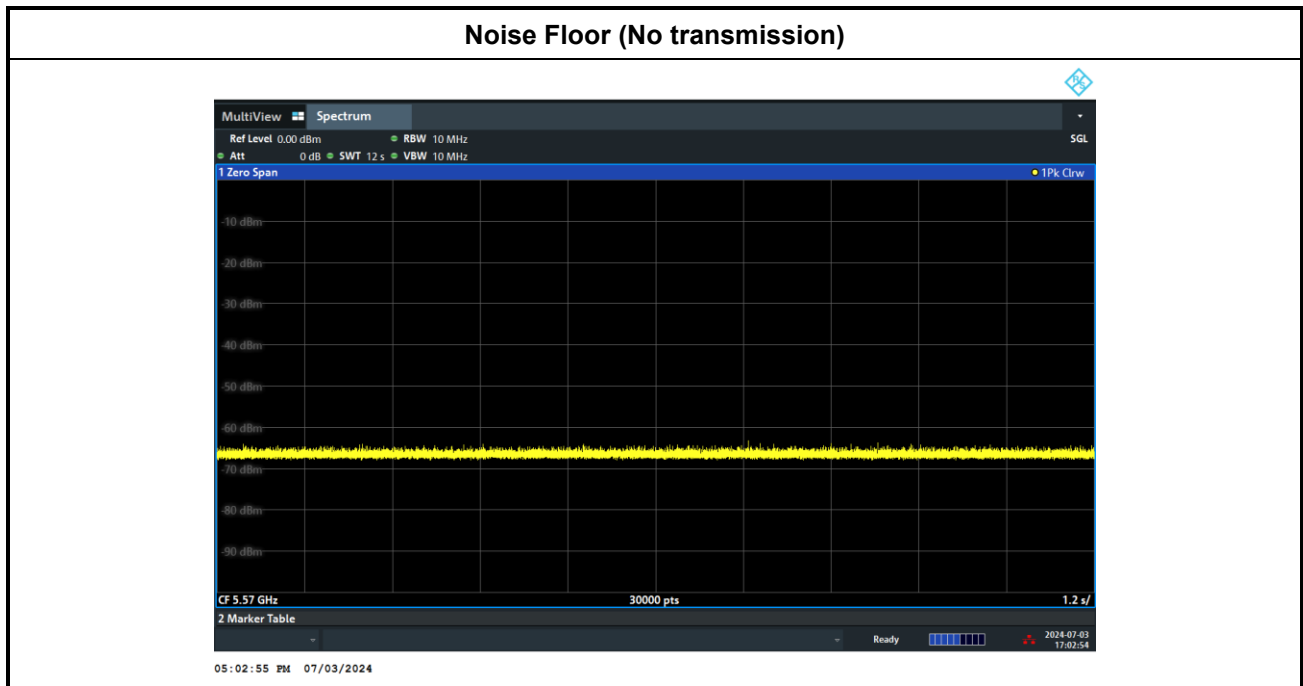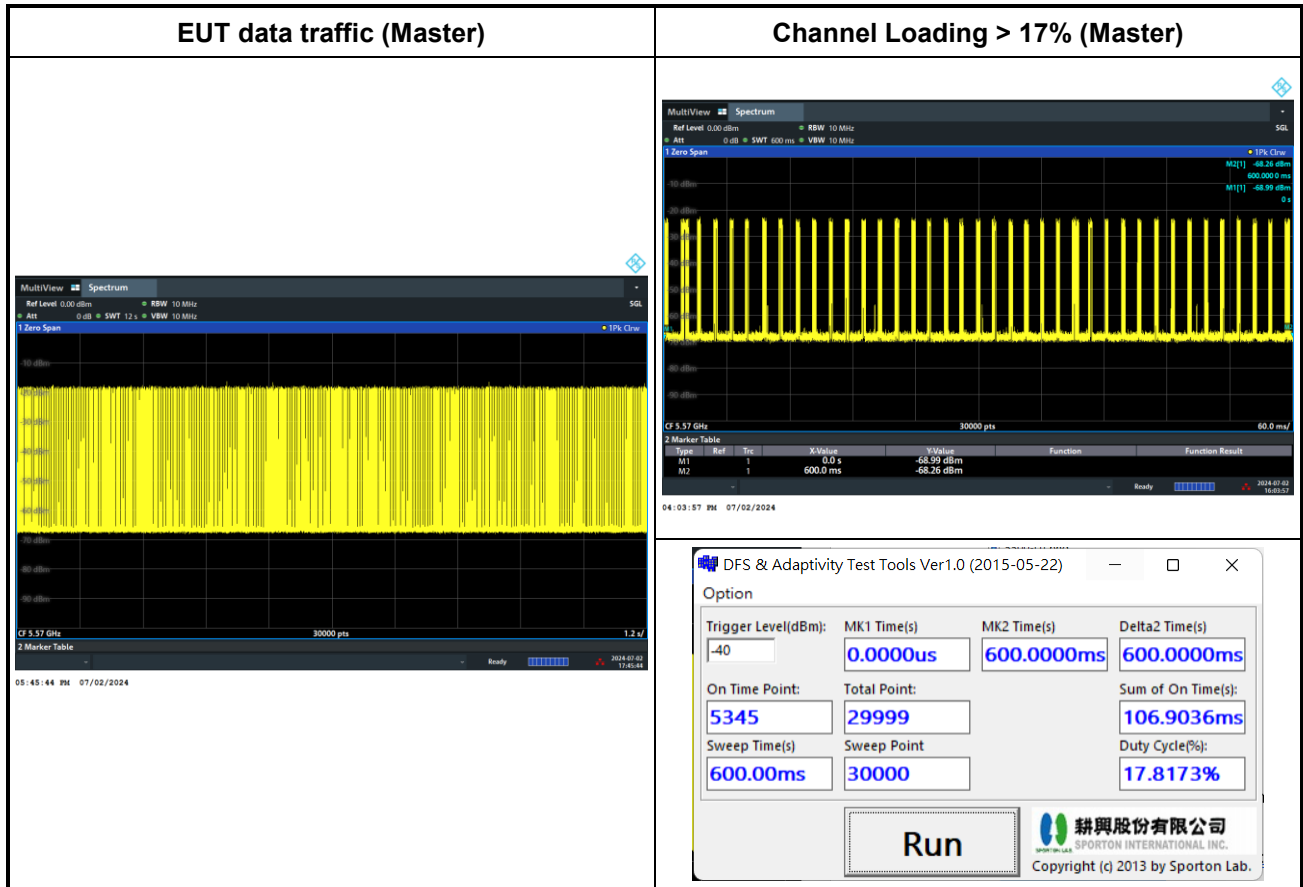



4.5 Statistical Performance Check

4.5.1 Limit of Statistical Performance Check

Short Pulse Radar Test

Once the performance requirements check is complete, statistical data will be gathered, to determine the ability of the device to detect the radar test waveforms (Short Pulse Radar Types 1-4) found in **Table 5**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trials. The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Percentage of Successful Detection Radar Waveform N} = P_d N$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

The minimum number of trails, minimum percentage of successful detection and the aggregate minimum percentage of successful detection are found in **Table 5**.

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120



A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 1 through 4. For Short Pulse Radar Type 0, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Types 1 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

Long Pulse Radar Test

Statistical data will be gathered to determine the ability of the device to detect the Long Pulse Radar Type 5 found in **Table 6**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trials.

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Three subsets of trials will be performed with a minimum of ten trials per subset.

The subset of trials differs in where the Long Pulse Type 5 Signal is tuned in frequency:

- The Channel center frequency (subset case 1).
- Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth (subset case 2).
- Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth (subset case 3).

For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel.


For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2.

The center frequency of the signal generator for each trial is calculated by: $FL + (0.4 * \text{Chirp Width [in MHz]})$


For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3.

The center frequency of the signal generator for each trial is calculated by: $FH - (0.4 * \text{Chirp Width [in MHz]})$


a) Channel center frequency (subset case 1)

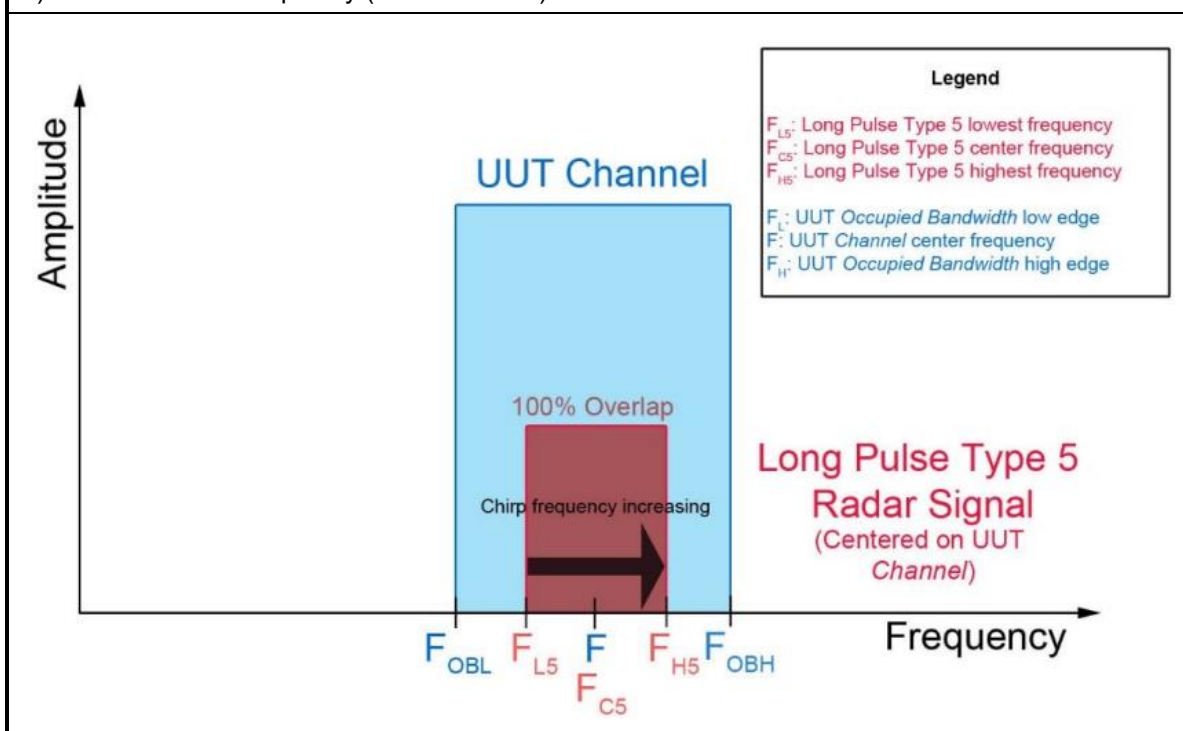

b) Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth. (subset case 2)

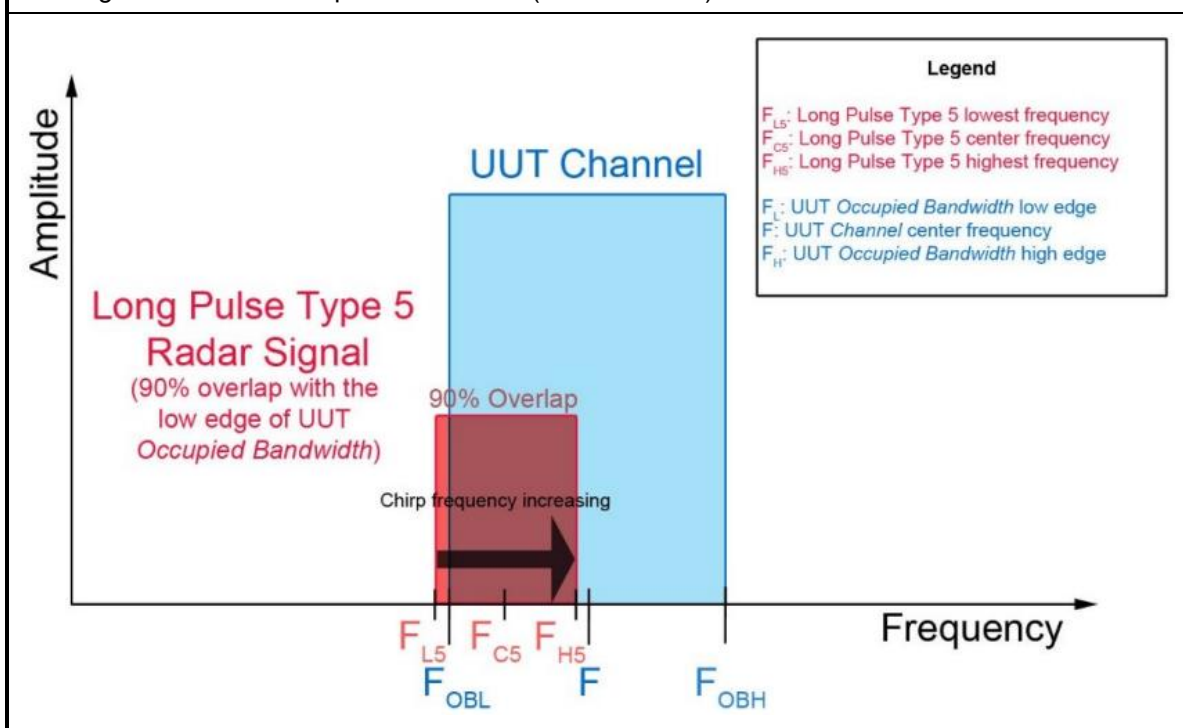

c) Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth. (subset case 3)

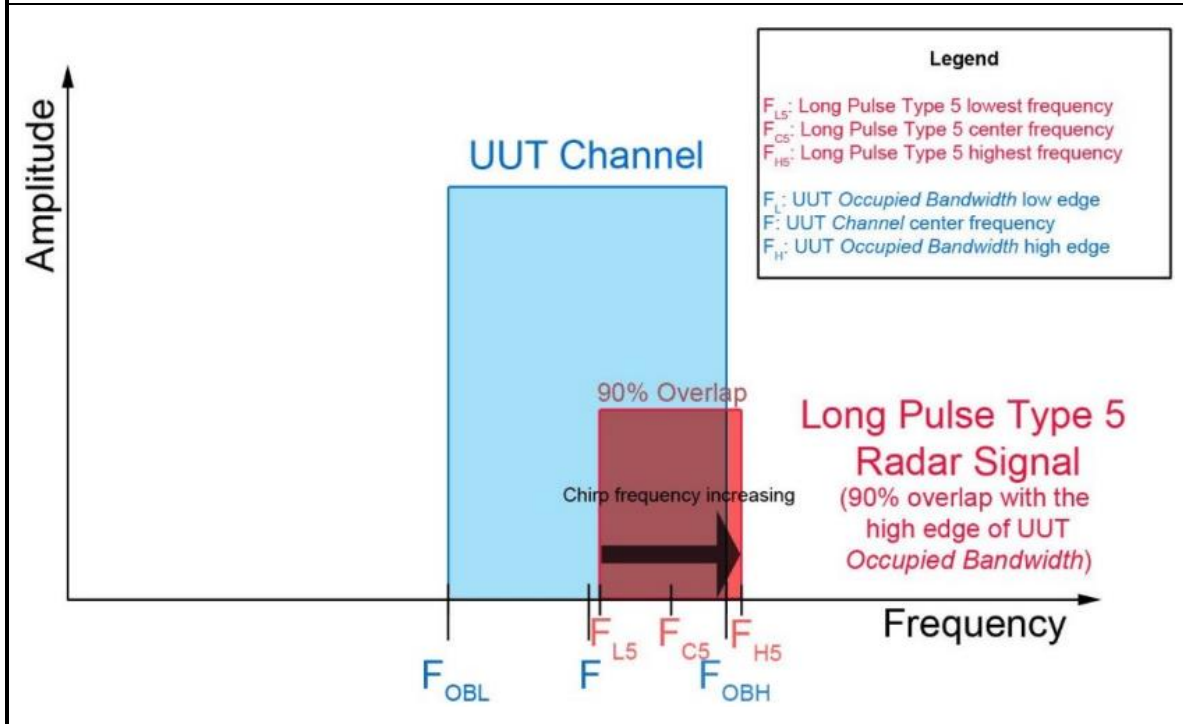

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100$$

Frequency Hopping Radar Test

Statistical data will be gathered to determine the ability of the device to detect the Frequency Hopping radar test signal (radar type 6) found in **Table 7**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The probability of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100$$

Table 7 – Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.


4.5.2 Test Procedures

- (1) One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands.
- (2) In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- (3) The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
- (4) At time T_0 the Radar Waveform generator sends a Burst of pulses for each of the Radar Types 1-6 at DFS Detection Threshold levels on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (5) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 1-4 and 6 to ensure detection occurs.
- (6) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.

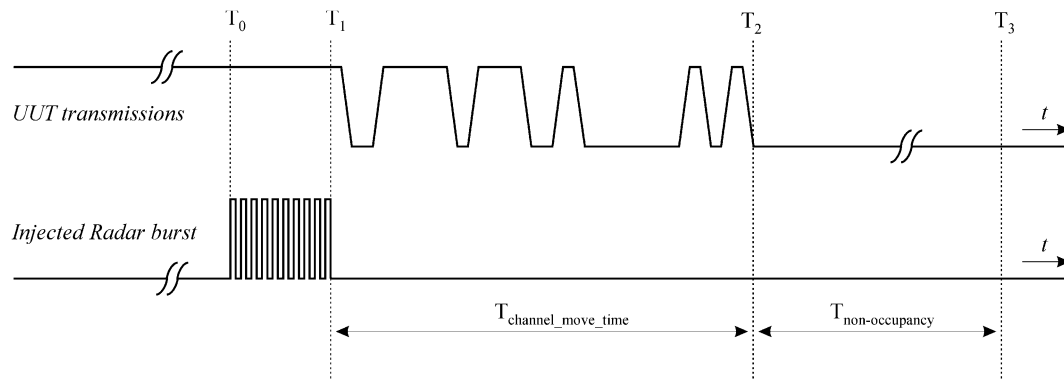


4.5.3 Test Setup

<AP Mode>

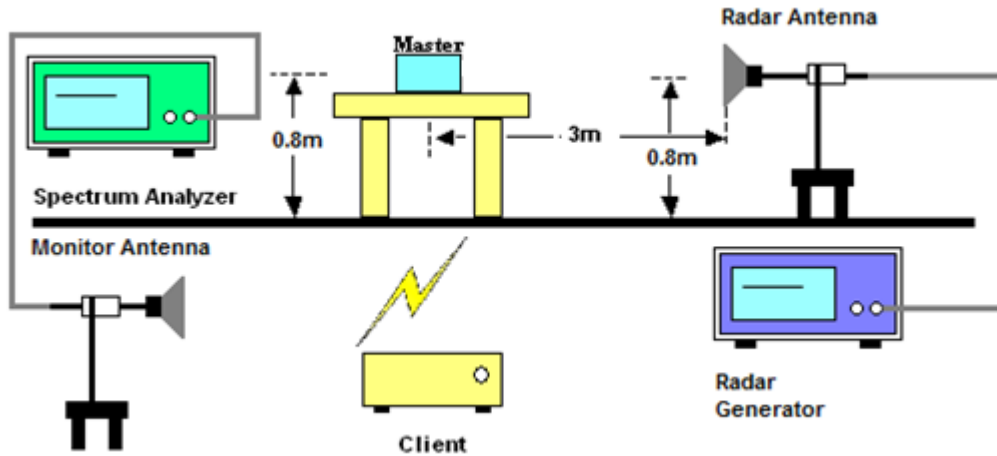

<Mesh Mode>

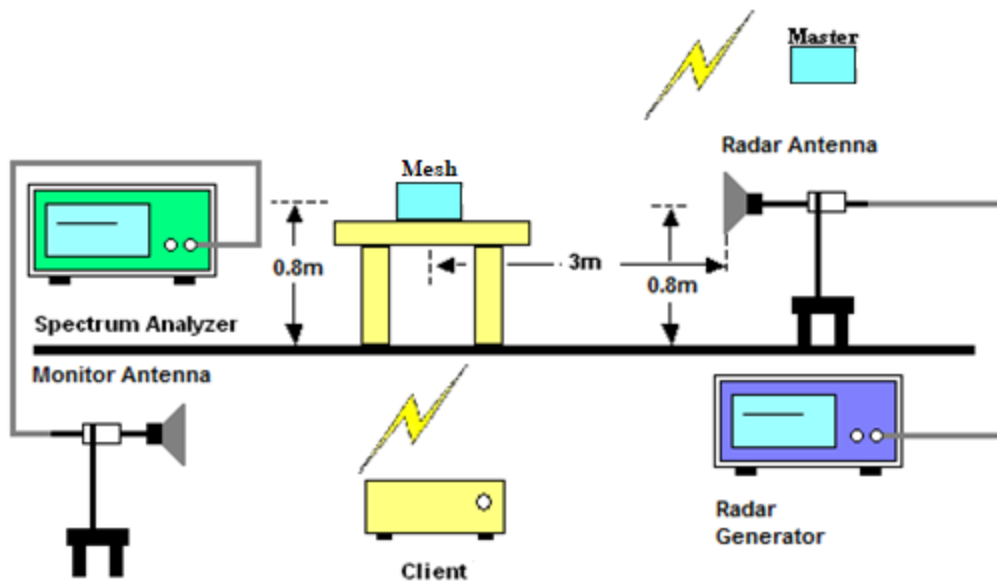

4.5.4 Test Deviation

There is no deviation with the original standard.

4.5.5 Result of Statistical Performance Check

<AP Mode>

<20MHz / 5300MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	N	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	N	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	N
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	N
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	N	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	N	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	28/30	28/30	30/30	28/30
Probability (%)	100%	100%	93.33%	93.33%	100%	93.33%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)			96.67% (>=80%)			



<40MHz / 5310MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	N	Y	Y	Y	Y	Y
2	N	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	N	Y	Y
6	N	Y	N	Y	Y	Y
7	Y	Y	Y	N	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	N	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	N	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	N	Y	Y	Y
26	Y	Y	Y	N	Y	Y
27	Y	Y	Y	N	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	N	N	Y	Y	Y
Trial of Detection	27/30	29/30	27/30	24/30	30/30	30/30
Probability (%)	90%	96.67%	90%	80%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)		89.17% (>=80%)				



<80MHz / 5290MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	N	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	N	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	N	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	N	Y	Y	Y	Y
16	N	Y	N	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	N	Y	Y	Y	Y	Y
20	Y	N	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	N	Y	Y
29	Y	Y	N	Y	Y	Y
30	N	Y	Y	Y	Y	Y
Trial of Detection	27/30	28/30	27/30	27/30	30/30	30/30
Probability (%)	90%	93.33%	90%	90%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)		90.83% (>=80%)				



<160MHz / 5250MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	N	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	N	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	N	Y	Y	N
8	Y	Y	Y	Y	Y	Y
9	Y	Y	N	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	N	Y	Y	Y
17	Y	Y	N	Y	N	Y
18	N	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	N	Y	N	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	N	Y	Y
24	Y	Y	Y	Y	N	Y
25	Y	N	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	N	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	N	Y	Y	Y
30	Y	N	Y	Y	Y	Y
Trial of Detection	29/30	26/30	25/30	27/30	27/30	29/30
Probability (%)	96.67%	86.67%	83.33%	90%	90%	96.67%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)		89.17% (>=80%)				



<20MHz /5500MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	N	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	N	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	29/30	30/30	29/30	30/30	30/30
Probability (%)	100%	96.67%	100%	96.67%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)		98.33% (>=80%)				



<40MHz /5510MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	N	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	N	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	N	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	N	Y	Y	N	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	N	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	N	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	N	Y	Y	N	Y	Y
19	Y	Y	N	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	N	N	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	28/30	29/30	26/30	26/30	29/30	30/30
Probability (%)	93.33%	96.67%	86.67%	86.67%	96.67%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)			90.83% (>=80%)			



<80MHz/ 5530MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	N	N	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	N	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	N	Y	Y	Y	Y
13	Y	N	N	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	N	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	N	Y	N	Y
20	Y	Y	Y	N	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	N	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	N	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	N	Y	Y	Y
Trial of Detection	30/30	27/30	25/30	26/30	29/30	30/30
Probability (%)	100%	90%	83.33%	86.67%	96.67%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)		90.00% (>=80%)				



<160MHz/ 5570MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	N	Y	Y
4	Y	Y	Y	N	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	N	Y	Y
10	Y	N	Y	Y	N	Y
11	Y	N	N	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	N	Y	Y	Y	Y	Y
17	Y	Y	Y	N	N	Y
18	N	N	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	N	Y	Y	Y
21	Y	Y	N	Y	Y	Y
22	Y	N	Y	Y	Y	Y
23	Y	Y	N	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	N	Y	N	Y	Y	Y
28	Y	N	N	Y	Y	Y
29	Y	Y	Y	N	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	27/30	25/30	24/30	25/30	28/30	30/30
Probability (%)	90%	83.33%	80%	83.33%	93.33%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)			84.17% (>=80%)			

**<Mesh Mode>****<160MHz/ 5250MHz>**

(Detection = Y, No Detection = N)	
Trial Number	Type 3
1	Y
2	Y
3	Y
4	Y
5	Y
6	Y
7	Y
8	Y
9	Y
10	Y
11	Y
12	Y
13	Y
14	Y
15	Y
16	N
17	N
18	Y
19	N
20	N
21	N
22	Y
23	N
24	N
25	Y
26	Y
27	Y
28	Y
29	Y
30	Y
Trial of Detection	23/30
Probability (%)	76.67%
Limit (%)	>= 60%



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Generator	Keysight	N5182B	MY56200377	9kHz~6GHz	Apr. 18, 2024	Jul. 02, 2024~ Jul. 10, 2024	Apr. 17, 2025	03CH19-HY
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101549	10Hz~13.6GHz	Jan. 30, 2024	Jul. 02, 2024~ Jul. 10, 2024	Jan. 29, 2025	03CH19-HY
Double Ridged Guide Horn Antenna	COM-POWER	AH-118	071027	1GHz~18GHz	Dec. 20, 2023	Jul. 02, 2024~ Jul. 10, 2024	Dec. 19, 2024	03CH19-HY
Double Ridged Guide Horn Antenna	COM-POWER	AH-118	071025	1GHz~18GHz	Nov. 27, 2023	Jul. 02, 2024~ Jul. 10, 2024	Nov. 26, 2024	03CH19-HY
Software 1	Sporton	DFS & AdaptivityTest Tools	N/A	Ver 1.0	NCR	Jul. 02, 2024~ Jul. 10, 2024	NCR	03CH19-HY
Software 2	Keysight	Keysight Signal Studio for DFS Radar Profiles	N/A	Ver 1.5.5.0	NCR	Jul. 02, 2024~ Jul. 10, 2024	NCR	03CH19-HY



Appendix A. Radar Parameters

<AP Mode>

Channel 50 Bandwidth 160MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 50 Bandwidth 160MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	1222.49	818	Yes
2	10	1432.66	698	Yes
3	18	1165.50	858	Yes
4	21	1089.32	918	Yes
5	9	1474.93	678	Yes
6	23	326.16	3066	Yes
7	5	1672.24	598	Yes
8	13	1319.26	758	Yes
9	2	1858.74	538	Yes
10	14	1285.35	778	Yes
11	4	1730.10	578	Yes
12	15	1253.13	798	Yes
13	12	1355.01	738	Yes
14	7	1567.40	638	Yes
15	20	1113.59	898	Yes
16		424.09	2358	Yes
17		496.28	2015	Yes
18		550.36	1817	No
19		411.52	2430	Yes
20		402.90	2482	Yes
21		381.24	2623	Yes
22		406.50	2460	Yes
23		399.84	2501	Yes
24		454.34	2201	Yes
25		1748.25	572	Yes
26		354.61	2820	Yes
27		331.02	3021	Yes
28		993.05	1007	Yes
29		607.53	1646	Yes
30		954.20	1048	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 50 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	23	1.00	224	Yes
2	27	3.50	175	Yes
3	28	4.00	203	Yes
4	24	1.70	206	Yes
5	27	3.70	172	No
6	23	1.40	223	Yes
7	26	2.70	208	Yes
8	28	4.20	225	Yes
9	24	1.70	153	Yes
10	26	3.00	160	Yes
11	29	4.90	187	Yes
12	29	4.90	158	Yes
13	29	4.60	174	Yes
14	29	4.60	186	Yes
15	27	3.70	188	Yes
16	28	3.90	178	Yes
17	23	1.00	210	Yes
18	29	4.80	191	Yes
19	26	3.20	168	Yes
20	27	3.80	201	No
21	26	3.30	212	Yes
22	26	3.10	197	Yes
23	27	3.40	177	Yes
24	23	1.20	229	Yes
25	26	2.90	209	No
26	26	3.10	228	Yes
27	25	2.70	180	Yes
28	28	3.90	218	Yes
29	25	2.50	198	Yes
30	24	1.90	222	No

DFS Radar Parameters
FCC Radar Type 3
Channel 50 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	6.00	490	Yes
2	17	8.50	272	Yes
3	18	9.00	252	Yes
4	16	6.70	256	Yes
5	17	8.70	229	Yes
6	16	6.40	287	Yes
7	17	7.70	355	No
8	18	9.20	450	Yes
9	16	6.70	332	No
10	17	8.00	205	Yes
11	18	9.90	336	Yes
12	18	9.90	282	Yes
13	18	9.60	493	Yes
14	18	9.60	268	Yes
15	17	8.70	262	Yes
16	18	8.90	455	No
17	16	6.00	463	No
18	18	9.80	298	Yes
19	17	8.20	266	Yes
20	18	8.80	319	Yes
21	17	8.30	259	Yes
22	17	8.10	207	Yes
23	17	8.40	235	Yes
24	16	6.20	250	Yes
25	17	7.90	200	Yes
26	17	8.10	478	Yes
27	17	7.70	306	Yes
28	18	8.90	339	Yes
29	17	7.50	351	No
30	16	6.90	353	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 50 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	11.10	490	Yes
2	15	16.60	272	Yes
3	15	17.70	252	Yes
4	12	12.70	256	Yes
5	15	17.00	229	Yes
6	12	12.00	287	Yes
7	14	14.90	355	Yes
8	15	18.20	450	Yes
9	12	12.50	332	Yes
10	14	15.60	205	Yes
11	16	19.70	336	Yes
12	16	19.70	282	Yes
13	16	19.00	493	Yes
14	16	19.10	268	Yes
15	15	17.00	262	Yes
16	15	17.50	455	Yes
17	12	11.00	463	Yes
18	16	19.40	298	Yes
19	14	15.90	266	Yes
20	15	17.30	319	No
21	14	16.10	259	Yes
22	14	15.70	207	Yes
23	14	16.40	235	No
24	12	11.60	250	Yes
25	14	15.30	200	Yes
26	14	15.80	478	Yes
27	14	14.70	306	No
28	15	17.50	339	Yes
29	13	14.30	351	Yes
30	13	13.00	353	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5290			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	5	-	-	383020
2	2	81	5	1908	-	745524
3	3	86.9	5	1229	1643	1107584
4	1	59.5	5	-	-	1472888
5	2	83.2	5	1414	-	337989
6	1	55.7	5	-	-	701641
7	2	71.5	5	1523	-	1064105
8	3	89.8	5	1219	1168	1426122
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.6	14	-	-	146711
2	2	75.4	14	1105	-	327586
3	3	98.2	14	1360	1687	507950
4	3	97.9	14	1887	1045	688117
5	3	94.3	14	1442	1824	123726
6	3	94.6	14	1587	1440	304766
7	2	83.3	14	1185	-	486713
8	3	86.2	14	1839	1158	666475
9	1	50.1	14	-	-	101868
10	3	96.6	14	1106	1490	282293
11	2	77.3	14	1299	-	463913
12	3	84.8	14	1895	1104	644223
13	2	78.3	14	1092	-	79401
14	2	76.3	14	1524	-	260377
15	2	79.7	14	1597	-	441885
16	1	53.4	14	-	-	624479
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.9	16	1596	-	53664
2	2	76.7	16	1032	-	224316
3	2	70.9	16	1021	-	394900
4	3	86.3	16	1763	1454	564116
5	2	68.7	16	1080	-	32721
6	1	61.3	16	-	-	203667
7	1	63.2	16	-	-	374588
8	3	93.2	16	1795	1382	542938
9	1	56.7	16	-	-	11733
10	3	98.1	16	1031	2000	181825
11	1	53.9	16	-	-	353381
12	2	81.7	16	1641	-	523041
13	2	78.7	16	1416	-	694118
14	1	60.5	16	-	-	161623
15	2	77.4	16	1376	-	331669
16	1	54.2	16	-	-	503033
17	2	80.4	16	1871	-	672180
18						
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	8	1340	-	238798
2	2	78.6	8	1844	-	528893
3	2	81.4	8	1058	-	819515
4	2	81.2	8	1988	-	1109056
5	3	90.4	8	1289	1733	202723
6	1	53	8	-	-	493761
7	2	73.6	8	1618	-	783617
8	3	95	8	1644	1552	1072015
9	1	52	8	-	-	167356
10	3	85.8	8	1082	1819	456965
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	61.2	15	-	-	467710
2	2	73.8	15	1140	-	648349
3	2	73	15	1242	-	82095
4	2	70.1	15	1989	-	263076
5	2	74.4	15	1640	-	444313
6	1	51.2	15	-	-	626379
7	3	83.5	15	1635	1939	59572
8	3	85.6	15	1496	1115	240677
9	1	56.5	15	-	-	422997
10	3	84.9	15	1569	1875	601557
11	3	85.3	15	1237	1978	37286
12	2	71.1	15	1727	-	218395
13	3	97.4	15	1400	1826	398650
14	1	62.1	15	-	-	581788
15	1	55	15	-	-	15110
16	3	91.2	15	1679	1239	195995
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.3	6	1704	1566	671418
2	3	90.7	6	1711	1960	992930
3	1	51.6	6	-	-	1318875
4	1	57.5	6	-	-	310077
5	3	89.7	6	1481	1681	631771
6	2	69.1	6	1148	-	955570
7	2	73.1	6	1529	-	1277486
8	1	54.4	6	-	-	270234
9	3	96	6	1946	1700	591695
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5290			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	97.8	11	1164	1517	632360
2	3	98.4	11	1842	1522	854168
3	2	72.3	11	1130	-	159265
4	3	83.6	11	1848	1413	381843
5	2	73.6	11	1551	-	605287
6	3	97.3	11	1823	1417	827124
7	3	91.3	11	1942	1371	131445
8	1	66.6	11	-	-	355425
9	2	75.5	11	1119	-	578464
10	1	51.9	11	-	-	802714
11	2	69.4	11	1389	-	104320
12	3	83.7	11	1395	1780	326803
13	2	77.9	11	1116	-	550632
14						
15						
16						
17						
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5290			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.6	17	1296	-	558239
2	2	80.4	17	1497	-	55390
3	3	95.3	17	1189	1144	216194
4	2	74.9	17	1773	-	377205
5	2	70.9	17	1983	-	538028
6	2	69.3	17	1139	-	35595
7	3	95.2	17	1694	1782	195919
8	1	61.2	17	-	-	358161
9	2	81.2	17	1841	-	518288
10	2	69.3	17	1685	-	15742
11	2	76.2	17	1987	-	176554
12	3	99.2	17	1255	1207	337168
13	1	56.7	17	-	-	500069
14	2	83	17	1228	-	659689
15	3	93.4	17	1178	1138	156658
16	3	94.6	17	1182	1250	317508
17	3	96.2	17	1086	1206	478536
18	3	92.2	17	1747	1457	638590
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.7	7	-	-	247537
2	2	68.6	7	1594	-	537645
3	2	74.2	7	1719	-	827337
4	2	76.6	7	1332	-	1117917
5	1	52.9	7	-	-	211687
6	1	61.2	7	-	-	502195
7	1	52	7	-	-	793317
8	2	82.9	7	1851	-	1081995
9	3	87.7	7	1760	1448	175355
10	3	94	7	1346	1561	465337
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.5	13	-	-	540653
2	2	71.8	13	1880	-	746721
3	1	60.1	13	-	-	100037
4	3	85.7	13	1865	1233	306422
5	1	57.4	13	-	-	514889
6	2	68.4	13	1177	-	721952
7	1	61	13	-	-	74465
8	2	71.2	13	1276	-	281602
9	1	62.3	13	-	-	489576
10	1	64.7	13	-	-	696988
11	3	98.3	13	1284	1316	48713
12	1	53.7	13	-	-	256341
13	1	59.2	13	-	-	464014
14	3	84.8	13	1753	1309	668947
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5258			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	66.5	20	-	-	16308
2	2	79.1	20	1163	-	161125
3	3	96.1	20	1278	1646	304876
4	3	84.4	20	1675	1212	449775
5	2	66.9	20	1342	-	595529
6	1	64.2	20	-	-	143494
7	3	98	20	1531	1198	287565
8	2	72.1	20	1110	-	432782
9	2	79.4	20	1863	-	577429
10	1	59.8	20	-	-	125642
11	2	68.6	20	1432	-	270110
12	1	65.1	20	-	-	415794
13	1	53.7	20	-	-	561161
14	1	52.9	20	-	-	107906
15	2	77.5	20	1493	-	252475
16	3	84.1	20	1052	1856	395948
17	2	72.9	20	1244	-	542258
18	3	88.1	20	1096	1253	89590
19	2	81.6	20	1876	-	234183
20	1	51.2	20	-	-	380019

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5258			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56.7	20	-	-	525163
2	1	59.4	20	-	-	72078
3	1	59.1	20	-	-	217232
4	3	90.6	20	1136	1836	360326
5	3	91.8	20	1701	1495	504522
6	3	88.4	20	1019	1652	53980
7	2	72	20	1862	-	198574
8	2	72.1	20	1453	-	343657
9	2	82.2	20	1720	-	488138
10	2	81.4	20	1446	-	36216
11	3	94	20	1630	1576	180542
12	3	97	20	1184	1020	325506
13	1	59.3	20	-	-	472161
14	3	89.4	20	1903	1112	18339
15	1	60	20	-	-	163511
16	2	73.9	20	1310	-	308082
17	1	65.1	20	-	-	453568
18	2	67.6	20	1016	-	548
19	1	66	20	-	-	145675
20	2	73.5	20	1952	-	289948

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96	19	1300	1378	457302
2	2	82.4	19	1662	-	610220
3	3	92.5	19	1390	1828	133894
4	1	50.3	19	-	-	287165
5	2	67	19	1678	-	438768
6	3	92.3	19	1697	1768	589760
7	1	64.7	19	-	-	115717
8	1	58	19	-	-	268383
9	3	93.7	19	1447	1809	419220
10	2	78.3	19	1792	-	572160
11	3	91.8	19	1059	1775	96467
12	1	60.1	19	-	-	249696
13	2	72.1	19	1314	-	401541
14	1	58	19	-	-	555636
15	2	78.1	19	1406	-	77949
16	1	57.1	19	-	-	230879
17	2	69.9	19	1805	-	382698
18	1	55.5	19	-	-	536391
19	3	92.7	19	1303	1482	59043
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	78.5	19	1601	-	211387
2	3	92.3	19	1969	1348	362938
3	2	75.8	19	1317	-	517038
4	3	89.9	19	1412	1837	40224
5	3	98	19	1980	1467	192076
6	1	65.9	19	-	-	346009
7	2	71.6	19	1240	-	497876
8	1	55.8	19	-	-	21615
9	1	64.3	19	-	-	174406
10	3	93	19	1834	1590	325499
11	1	53.6	19	-	-	480051
12	2	69	19	1976	-	2797
13	1	55.3	19	-	-	155641
14	2	72.1	19	1858	-	307531
15	1	58.1	19	-	-	461128
16	1	55.2	19	-	-	613994
17	2	74.3	19	1622	-	136383
18	2	67	19	1305	-	288894
19	1	58.7	19	-	-	442336
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5256			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.5	15	1151	-	705920
2	3	99.5	15	1033	1945	139561
3	2	73.6	15	1738	-	320787
4	1	63.9	15	-	-	502955
5	2	78.5	15	1916	-	682869
6	1	53.9	15	-	-	117748
7	3	89.6	15	1257	1786	298120
8	3	83.8	15	1214	1754	478734
9	2	74.9	15	1985	-	660773
10	1	51.3	15	-	-	95438
11	1	61.3	15	-	-	276822
12	1	52.9	15	-	-	458772
13	1	53.9	15	-	-	639736
14	1	59.5	15	-	-	73106
15	2	75	15	1169	-	254299
16	3	87.5	15	1149	1944	434466
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5256			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.3	16	1970	-	580047
2	2	70.1	16	1575	-	47641
3	3	92.6	16	1774	1651	217474
4	3	94.5	16	1312	1201	388052
5	3	84.5	16	1325	1002	558235
6	3	95.4	16	1001	1528	26570
7	3	86.5	16	1232	1265	196883
8	1	50.3	16	-	-	368137
9	1	65.1	16	-	-	539393
10	3	90.1	16	1330	1461	5608
11	1	59.3	16	-	-	176507
12	3	86.5	16	1422	1950	345702
13	3	88.1	16	1367	1741	515574
14	1	64	16	-	-	689122
15	1	52.8	16	-	-	155483
16	1	53.8	16	-	-	326211
17	3	90.2	16	1301	1061	495191
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5252			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	61.2	5	-	-	1421064
2	2	82.1	5	1433	-	285667
3	3	93.3	5	1190	1261	648291
4	1	54.9	5	-	-	1012657
5	2	78.4	5	1258	-	1374663
6	3	97.4	5	1263	1940	240566
7	3	86	5	1913	1408	603308
8	1	58.3	5	-	-	967736
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.1	19	1744	-	529770
2	3	96.8	19	1998	1486	77960
3	1	54.5	19	-	-	223394
4	1	53	19	-	-	368444
5	3	90	19	1128	1434	511862
6	3	99.8	19	1582	1645	60250
7	1	59.5	19	-	-	205612
8	2	80.4	19	1373	-	349878
9	3	84.6	19	1993	1740	493213
10	2	76.9	19	1337	-	42537
11	3	85.1	19	1327	1530	186808
12	2	81.8	19	1307	-	332044
13	2	72.5	19	1817	-	476900
14	2	74.3	19	1992	-	24714
15	2	78.1	19	1209	-	169606
16	1	62.9	19	-	-	314888
17	2	73.3	19	1961	-	458780
18	3	98.8	19	1750	1676	6855
19	3	88.5	19	1710	1280	151302
20	3	94.7	19	1193	1777	295858

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5255			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	53.1	13	-	-	590464
2	3	95.7	13	1127	1683	781088
3	1	60.9	13	-	-	179043
4	3	98.5	13	1483	1624	371002
5	1	57.4	13	-	-	566048
6	1	62.8	13	-	-	759526
7	3	92.8	13	1770	1840	154408
8	2	77.4	13	1443	-	348025
9	2	81.7	13	1485	-	541616
10	2	82.6	13	1421	-	734764
11	1	52.9	13	-	-	131271
12	2	72.8	13	1143	-	324314
13	1	56.5	13	-	-	518318
14	3	86.2	13	1718	1241	709339
15	1	52.3	13	-	-	107385
16						
17						
18						
19						
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5256			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.7	16	1649	1811	264299
2	2	82	16	1037	-	435698
3	3	97.4	16	1966	1536	604230
4	2	75.2	16	1173	-	73653
5	3	90.3	16	1027	1156	243791
6	3	99.9	16	1671	1781	413551
7	1	56.1	16	-	-	586253
8	1	53.4	16	-	-	52720
9	3	87.1	16	1807	1107	222720
10	2	67.7	16	1789	-	393311
11	2	72.1	16	1798	-	563709
12	2	67.6	16	1647	-	31567
13	3	86.9	16	1820	1137	201737
14	1	53.9	16	-	-	373166
15	2	80.4	16	1117	-	543394
16	2	81.7	16	1968	-	10585
17	2	79.6	16	1586	-	181077
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.9	14	-	-	399427
2	3	91.4	14	1755	1699	590714
3	1	55.2	14	-	-	786564
4	3	86.5	14	1176	1801	181115
5	3	85.9	14	1735	1471	374186
6	1	56	14	-	-	569145
7	3	95.6	14	1365	1749	759586
8	2	77.2	14	1363	-	157629
9	1	57	14	-	-	351845
10	2	82.1	14	1439	-	544401
11	3	98.7	14	1731	1437	736318
12	1	52	14	-	-	134055
13	2	73.9	14	1696	-	326911
14	1	62.3	14	-	-	521168
15	2	75.2	14	1623	-	713931
16						
17						
18						
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	86.4	13	1831	1066	117709
2	2	72	13	1079	-	325398
3	2	79.5	13	1205	-	532747
4	2	80.9	13	1391	-	739308
5	2	75.9	13	1036	-	92541
6	2	73.6	13	1921	-	299409
7	3	98.2	13	1653	1714	505910
8	3	94.8	13	1548	1336	713160
9	3	97	13	1008	1204	66875
10	3	92.2	13	1650	1147	273815
11	2	73.8	13	1088	-	481416
12	2	80.7	13	1041	-	688382
13	3	85.4	13	1977	1475	41289
14	3	95.2	13	1964	1029	248081
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.9	14	-	-	425970
2	2	73.4	14	1879	-	618395
3	1	51.3	14	-	-	14853
4	1	50.9	14	-	-	208389
5	2	73.3	14	1689	-	401392
6	1	63.8	14	-	-	595870
7	1	65.2	14	-	-	789805
8	2	80.9	14	1039	-	184396
9	1	65.8	14	-	-	378342
10	1	62.8	14	-	-	572241
11	2	76	14	1022	-	764908
12	1	51.8	14	-	-	160756
13	3	98.1	14	1183	1286	353572
14	2	83.3	14	1319	-	546992
15	2	67.7	14	1153	-	740392
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5328			No
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	57.4	6	-	-	256963
2	1	51.4	6	-	-	620418
3	1	63.1	6	-	-	983727
4	1	55.4	6	-	-	1347366
5	3	96.9	6	1905	1392	211833
6	2	81.2	6	1541	-	575167
7	1	64.8	6	-	-	938991
8	2	74.5	6	1713	-	1301037
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5325			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.5	12	1511	1203	95367
2	1	55.7	12	-	-	303260
3	1	56	12	-	-	510944
4	1	60.8	12	-	-	718075
5	3	96.6	12	1046	1379	69883
6	1	58.2	12	-	-	277672
7	3	94.3	12	1901	1516	483094
8	1	62.1	12	-	-	693018
9	2	75.3	12	1091	-	44439
10	1	60.1	12	-	-	251912
11	2	82	12	1044	-	459148
12	1	51.1	12	-	-	667161
13	1	58.6	12	-	-	18947
14	3	97.4	12	1366	1326	225688
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51.1	13	-	-	434021
2	1	50.6	13	-	-	641191
3	3	98.5	13	1532	1506	845540
4	1	60	13	-	-	200993
5	1	55.4	13	-	-	408606
6	1	56.1	13	-	-	615830
7	2	66.7	13	1024	-	822197
8	1	54.8	13	-	-	175347
9	2	74.1	13	1102	-	382267
10	2	75.5	13	1730	-	589463
11	1	64.8	13	-	-	798032
12	2	77.1	13	1469	-	149491
13	3	89.5	13	1860	1965	355817
14	3	90.8	13	1698	1150	562954
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	60.6	11	-	-	832206
2	2	75.3	11	1537	-	133554
3	3	88.6	11	1313	1154	356204
4	1	63.9	11	-	-	580771
5	3	91.1	11	1347	1627	801925
6	3	99	11	1723	1573	105855
7	1	51.8	11	-	-	329653
8	3	95.2	11	1175	1445	551489
9	2	67.3	11	1494	-	775723
10	1	53	11	-	-	78759
11	2	68.6	11	1712	-	301547
12	2	72.7	11	1542	-	525040
13	2	71.6	11	1165	-	747940
14						
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	16	-	-	39105
2	1	50.7	16	-	-	209902
3	3	91.7	16	1539	1788	379070
4	1	66	16	-	-	551614
5	2	82.2	16	1920	-	18032
6	1	59.1	16	-	-	188959
7	1	60.1	16	-	-	359795
8	1	50.3	16	-	-	530445
9	1	62.5	16	-	-	701269
10	1	57	16	-	-	167944
11	3	86.8	16	1071	1452	337393
12	2	75.8	16	1245	-	508615
13	1	58.6	16	-	-	680062
14	1	57.7	16	-	-	146811
15	3	94.7	16	1915	1991	316097
16	2	81.7	16	1912	-	487488
17	2	80.5	16	1361	-	658530
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 50 Bandwidth 160MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96	10	1793	1060	177811
2	2	69.5	10	1592	-	419725
3	2	68.7	10	1078	-	662015
4	1	53.5	10	-	-	905161
5	1	51.5	10	-	-	148470
6	1	50	10	-	-	390623
7	2	71.6	10	1668	-	631895
8	2	68	10	1907	-	873675
9	1	60	10	-	-	118606
10	1	59.6	10	-	-	360778
11	3	95.5	10	1090	1297	601504
12	1	55.9	10	-	-	845537
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5327			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	8	1790	1772	106347
2	3	95.5	8	1358	1584	396185
3	3	91.4	8	1935	1231	686202
4	2	82.8	8	1615	-	977559
5	3	84.5	8	1076	1355	70699
6	1	66	8	-	-	361390
7	1	54.1	8	-	-	652401
8	2	82.4	8	1562	-	941797
9	1	59.5	8	-	-	35009
10	2	82.6	8	1778	-	325274
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 58 Bandwidth 80MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 58 Bandwidth 80MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	1222.49	818	Yes
2	10	1432.66	698	Yes
3	18	1165.50	858	Yes
4	21	1089.32	918	Yes
5	9	1474.93	678	Yes
6	23	326.16	3066	Yes
7	5	1672.24	598	Yes
8	13	1319.26	758	Yes
9	2	1858.74	538	Yes
10	14	1285.35	778	Yes
11	4	1730.10	578	Yes
12	15	1253.13	798	Yes
13	12	1355.01	738	Yes
14	7	1567.40	638	Yes
15	20	1113.59	898	Yes
16		424.09	2358	No
17		496.28	2015	Yes
18		550.36	1817	Yes
19		411.52	2430	No
20		402.90	2482	Yes
21		381.24	2623	Yes
22		406.50	2460	Yes
23		399.84	2501	Yes
24		454.34	2201	Yes
25		1748.25	572	Yes
26		354.61	2820	Yes
27		331.02	3021	Yes
28		993.05	1007	Yes
29		607.53	1646	Yes
30		954.20	1048	No

DFS Radar Parameters
FCC Radar Type 2
Channel 58 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	23	1.00	224	Yes
2	27	3.50	175	Yes
3	28	4.00	203	Yes
4	24	1.70	206	Yes
5	27	3.70	172	Yes
6	23	1.40	223	Yes
7	26	2.70	208	Yes
8	28	4.20	225	Yes
9	24	1.70	153	Yes
10	26	3.00	160	Yes
11	29	4.90	187	Yes
12	29	4.90	158	Yes
13	29	4.60	174	Yes
14	29	4.60	186	Yes
15	27	3.70	188	No
16	28	3.90	178	Yes
17	23	1.00	210	Yes
18	29	4.80	191	Yes
19	26	3.20	168	Yes
20	27	3.80	201	No
21	26	3.30	212	Yes
22	26	3.10	197	Yes
23	27	3.40	177	Yes
24	23	1.20	229	Yes
25	26	2.90	209	Yes
26	26	3.10	228	Yes
27	25	2.70	180	Yes
28	28	3.90	218	Yes
29	25	2.50	198	Yes
30	24	1.90	222	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 58 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	6.00	490	Yes
2	17	8.50	272	Yes
3	18	9.00	252	Yes
4	16	6.70	256	Yes
5	17	8.70	229	Yes
6	16	6.40	287	Yes
7	17	7.70	355	No
8	18	9.20	450	Yes
9	16	6.70	332	Yes
10	17	8.00	205	Yes
11	18	9.90	336	Yes
12	18	9.90	282	Yes
13	18	9.60	493	Yes
14	18	9.60	268	Yes
15	17	8.70	262	Yes
16	18	8.90	455	No
17	16	6.00	463	Yes
18	18	9.80	298	Yes
19	17	8.20	266	Yes
20	18	8.80	319	Yes
21	17	8.30	259	Yes
22	17	8.10	207	Yes
23	17	8.40	235	Yes
24	16	6.20	250	Yes
25	17	7.90	200	Yes
26	17	8.10	478	Yes
27	17	7.70	306	Yes
28	18	8.90	339	Yes
29	17	7.50	351	No
30	16	6.90	353	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 58 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	11.10	490	No
2	15	16.60	272	Yes
3	15	17.70	252	Yes
4	12	12.70	256	Yes
5	15	17.00	229	Yes
6	12	12.00	287	Yes
7	14	14.90	355	Yes
8	15	18.20	450	Yes
9	12	12.50	332	No
10	14	15.60	205	Yes
11	16	19.70	336	Yes
12	16	19.70	282	Yes
13	16	19.00	493	Yes
14	16	19.10	268	Yes
15	15	17.00	262	Yes
16	15	17.50	455	Yes
17	12	11.00	463	Yes
18	16	19.40	298	Yes
19	14	15.90	266	Yes
20	15	17.30	319	Yes
21	14	16.10	259	Yes
22	14	15.70	207	Yes
23	14	16.40	235	Yes
24	12	11.60	250	Yes
25	14	15.30	200	Yes
26	14	15.80	478	Yes
27	14	14.70	306	Yes
28	15	17.50	339	No
29	13	14.30	351	Yes
30	13	13.00	353	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	5	-	-	383020
2	2	81	5	1908	-	745524
3	3	86.9	5	1229	1643	1107584
4	1	59.5	5	-	-	1472888
5	2	83.2	5	1414	-	337989
6	1	55.7	5	-	-	701641
7	2	71.5	5	1523	-	1064105
8	3	89.8	5	1219	1168	1426122
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.6	14	-	-	146711
2	2	75.4	14	1105	-	327586
3	3	98.2	14	1360	1687	507950
4	3	97.9	14	1887	1045	688117
5	3	94.3	14	1442	1824	123726
6	3	94.6	14	1587	1440	304766
7	2	83.3	14	1185	-	486713
8	3	86.2	14	1839	1158	666475
9	1	50.1	14	-	-	101868
10	3	96.6	14	1106	1490	282293
11	2	77.3	14	1299	-	463913
12	3	84.8	14	1895	1104	644223
13	2	78.3	14	1092	-	79401
14	2	76.3	14	1524	-	260377
15	2	79.7	14	1597	-	441885
16	1	53.4	14	-	-	624479
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.9	16	1596	-	53664
2	2	76.7	16	1032	-	224316
3	2	70.9	16	1021	-	394900
4	3	86.3	16	1763	1454	564116
5	2	68.7	16	1080	-	32721
6	1	61.3	16	-	-	203667
7	1	63.2	16	-	-	374588
8	3	93.2	16	1795	1382	542938
9	1	56.7	16	-	-	11733
10	3	98.1	16	1031	2000	181825
11	1	53.9	16	-	-	353381
12	2	81.7	16	1641	-	523041
13	2	78.7	16	1416	-	694118
14	1	60.5	16	-	-	161623
15	2	77.4	16	1376	-	331669
16	1	54.2	16	-	-	503033
17	2	80.4	16	1871	-	672180
18						
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	8	1340	-	238798
2	2	78.6	8	1844	-	528893
3	2	81.4	8	1058	-	819515
4	2	81.2	8	1988	-	1109056
5	3	90.4	8	1289	1733	202723
6	1	53	8	-	-	493761
7	2	73.6	8	1618	-	783617
8	3	95	8	1644	1552	1072015
9	1	52	8	-	-	167356
10	3	85.8	8	1082	1819	456965
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	61.2	15	-	-	467710
2	2	73.8	15	1140	-	648349
3	2	73	15	1242	-	82095
4	2	70.1	15	1989	-	263076
5	2	74.4	15	1640	-	444313
6	1	51.2	15	-	-	626379
7	3	83.5	15	1635	1939	59572
8	3	85.6	15	1496	1115	240677
9	1	56.5	15	-	-	422997
10	3	84.9	15	1569	1875	601557
11	3	85.3	15	1237	1978	37286
12	2	71.1	15	1727	-	218395
13	3	97.4	15	1400	1826	398650
14	1	62.1	15	-	-	581788
15	1	55	15	-	-	15110
16	3	91.2	15	1679	1239	195995
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.3	6	1704	1566	671418
2	3	90.7	6	1711	1960	992930
3	1	51.6	6	-	-	1318875
4	1	57.5	6	-	-	310077
5	3	89.7	6	1481	1681	631771
6	2	69.1	6	1148	-	955570
7	2	73.1	6	1529	-	1277486
8	1	54.4	6	-	-	270234
9	3	96	6	1946	1700	591695
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	97.8	11	1164	1517	632360
2	3	98.4	11	1842	1522	854168
3	2	72.3	11	1130	-	159265
4	3	83.6	11	1848	1413	381843
5	2	73.6	11	1551	-	605287
6	3	97.3	11	1823	1417	827124
7	3	91.3	11	1942	1371	131445
8	1	66.6	11	-	-	355425
9	2	75.5	11	1119	-	578464
10	1	51.9	11	-	-	802714
11	2	69.4	11	1389	-	104320
12	3	83.7	11	1395	1780	326803
13	2	77.9	11	1116	-	550632
14						
15						
16						
17						
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.6	17	1296	-	558239
2	2	80.4	17	1497	-	55390
3	3	95.3	17	1189	1144	216194
4	2	74.9	17	1773	-	377205
5	2	70.9	17	1983	-	538028
6	2	69.3	17	1139	-	35595
7	3	95.2	17	1694	1782	195919
8	1	61.2	17	-	-	358161
9	2	81.2	17	1841	-	518288
10	2	69.3	17	1685	-	15742
11	2	76.2	17	1987	-	176554
12	3	99.2	17	1255	1207	337168
13	1	56.7	17	-	-	500069
14	2	83	17	1228	-	659689
15	3	93.4	17	1178	1138	156658
16	3	94.6	17	1182	1250	317508
17	3	96.2	17	1086	1206	478536
18	3	92.2	17	1747	1457	638590
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.7	7	-	-	247537
2	2	68.6	7	1594	-	537645
3	2	74.2	7	1719	-	827337
4	2	76.6	7	1332	-	1117917
5	1	52.9	7	-	-	211687
6	1	61.2	7	-	-	502195
7	1	52	7	-	-	793317
8	2	82.9	7	1851	-	1081995
9	3	87.7	7	1760	1448	175355
10	3	94	7	1346	1561	465337
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5290			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.5	13	-	-	540653
2	2	71.8	13	1880	-	746721
3	1	60.1	13	-	-	100037
4	3	85.7	13	1865	1233	306422
5	1	57.4	13	-	-	514889
6	2	68.4	13	1177	-	721952
7	1	61	13	-	-	74465
8	2	71.2	13	1276	-	281602
9	1	62.3	13	-	-	489576
10	1	64.7	13	-	-	696988
11	3	98.3	13	1284	1316	48713
12	1	53.7	13	-	-	256341
13	1	59.2	13	-	-	464014
14	3	84.8	13	1753	1309	668947
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5260			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	66.5	20	-	-	16308
2	2	79.1	20	1163	-	161125
3	3	96.1	20	1278	1646	304876
4	3	84.4	20	1675	1212	449775
5	2	66.9	20	1342	-	595529
6	1	64.2	20	-	-	143494
7	3	98	20	1531	1198	287565
8	2	72.1	20	1110	-	432782
9	2	79.4	20	1863	-	577429
10	1	59.8	20	-	-	125642
11	2	68.6	20	1432	-	270110
12	1	65.1	20	-	-	415794
13	1	53.7	20	-	-	561161
14	1	52.9	20	-	-	107906
15	2	77.5	20	1493	-	252475
16	3	84.1	20	1052	1856	395948
17	2	72.9	20	1244	-	542258
18	3	88.1	20	1096	1253	89590
19	2	81.6	20	1876	-	234183
20	1	51.2	20	-	-	380019

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5260			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56.7	20	-	-	525163
2	1	59.4	20	-	-	72078
3	1	59.1	20	-	-	217232
4	3	90.6	20	1136	1836	360326
5	3	91.8	20	1701	1495	504522
6	3	88.4	20	1019	1652	53980
7	2	72	20	1862	-	198574
8	2	72.1	20	1453	-	343657
9	2	82.2	20	1720	-	488138
10	2	81.4	20	1446	-	36216
11	3	94	20	1630	1576	180542
12	3	97	20	1184	1020	325506
13	1	59.3	20	-	-	472161
14	3	89.4	20	1903	1112	18339
15	1	60	20	-	-	163511
16	2	73.9	20	1310	-	308082
17	1	65.1	20	-	-	453568
18	2	67.6	20	1016	-	548
19	1	66	20	-	-	145675
20	2	73.5	20	1952	-	289948

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5259			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96	19	1300	1378	457302
2	2	82.4	19	1662	-	610220
3	3	92.5	19	1390	1828	133894
4	1	50.3	19	-	-	287165
5	2	67	19	1678	-	438768
6	3	92.3	19	1697	1768	589760
7	1	64.7	19	-	-	115717
8	1	58	19	-	-	268383
9	3	93.7	19	1447	1809	419220
10	2	78.3	19	1792	-	572160
11	3	91.8	19	1059	1775	96467
12	1	60.1	19	-	-	249696
13	2	72.1	19	1314	-	401541
14	1	58	19	-	-	555636
15	2	78.1	19	1406	-	77949
16	1	57.1	19	-	-	230879
17	2	69.9	19	1805	-	382698
18	1	55.5	19	-	-	536391
19	3	92.7	19	1303	1482	59043
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5259			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	78.5	19	1601	-	211387
2	3	92.3	19	1969	1348	362938
3	2	75.8	19	1317	-	517038
4	3	89.9	19	1412	1837	40224
5	3	98	19	1980	1467	192076
6	1	65.9	19	-	-	346009
7	2	71.6	19	1240	-	497876
8	1	55.8	19	-	-	21615
9	1	64.3	19	-	-	174406
10	3	93	19	1834	1590	325499
11	1	53.6	19	-	-	480051
12	2	69	19	1976	-	2797
13	1	55.3	19	-	-	155641
14	2	72.1	19	1858	-	307531
15	1	58.1	19	-	-	461128
16	1	55.2	19	-	-	613994
17	2	74.3	19	1622	-	136383
18	2	67	19	1305	-	288894
19	1	58.7	19	-	-	442336
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.5	15	1151	-	705920
2	3	99.5	15	1033	1945	139561
3	2	73.6	15	1738	-	320787
4	1	63.9	15	-	-	502955
5	2	78.5	15	1916	-	682869
6	1	53.9	15	-	-	117748
7	3	89.6	15	1257	1786	298120
8	3	83.8	15	1214	1754	478734
9	2	74.9	15	1985	-	660773
10	1	51.3	15	-	-	95438
11	1	61.3	15	-	-	276822
12	1	52.9	15	-	-	458772
13	1	53.9	15	-	-	639736
14	1	59.5	15	-	-	73106
15	2	75	15	1169	-	254299
16	3	87.5	15	1149	1944	434466
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.3	16	1970	-	580047
2	2	70.1	16	1575	-	47641
3	3	92.6	16	1774	1651	217474
4	3	94.5	16	1312	1201	388052
5	3	84.5	16	1325	1002	558235
6	3	95.4	16	1001	1528	26570
7	3	86.5	16	1232	1265	196883
8	1	50.3	16	-	-	368137
9	1	65.1	16	-	-	539393
10	3	90.1	16	1330	1461	5608
11	1	59.3	16	-	-	176507
12	3	86.5	16	1422	1950	345702
13	3	88.1	16	1367	1741	515574
14	1	64	16	-	-	689122
15	1	52.8	16	-	-	155483
16	1	53.8	16	-	-	326211
17	3	90.2	16	1301	1061	495191
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5254			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	61.2	5	-	-	1421064
2	2	82.1	5	1433	-	285667
3	3	93.3	5	1190	1261	648291
4	1	54.9	5	-	-	1012657
5	2	78.4	5	1258	-	1374663
6	3	97.4	5	1263	1940	240566
7	3	86	5	1913	1408	603308
8	1	58.3	5	-	-	967736
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5259			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.1	19	1744	-	529770
2	3	96.8	19	1998	1486	77960
3	1	54.5	19	-	-	223394
4	1	53	19	-	-	368444
5	3	90	19	1128	1434	511862
6	3	99.8	19	1582	1645	60250
7	1	59.5	19	-	-	205612
8	2	80.4	19	1373	-	349878
9	3	84.6	19	1993	1740	493213
10	2	76.9	19	1337	-	42537
11	3	85.1	19	1327	1530	186808
12	2	81.8	19	1307	-	332044
13	2	72.5	19	1817	-	476900
14	2	74.3	19	1992	-	24714
15	2	78.1	19	1209	-	169606
16	1	62.9	19	-	-	314888
17	2	73.3	19	1961	-	458780
18	3	98.8	19	1750	1676	6855
19	3	88.5	19	1710	1280	151302
20	3	94.7	19	1193	1777	295858

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5257			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	53.1	13	-	-	590464
2	3	95.7	13	1127	1683	781088
3	1	60.9	13	-	-	179043
4	3	98.5	13	1483	1624	371002
5	1	57.4	13	-	-	566048
6	1	62.8	13	-	-	759526
7	3	92.8	13	1770	1840	154408
8	2	77.4	13	1443	-	348025
9	2	81.7	13	1485	-	541616
10	2	82.6	13	1421	-	734764
11	1	52.9	13	-	-	131271
12	2	72.8	13	1143	-	324314
13	1	56.5	13	-	-	518318
14	3	86.2	13	1718	1241	709339
15	1	52.3	13	-	-	107385
16						
17						
18						
19						
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5258			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.7	16	1649	1811	264299
2	2	82	16	1037	-	435698
3	3	97.4	16	1966	1536	604230
4	2	75.2	16	1173	-	73653
5	3	90.3	16	1027	1156	243791
6	3	99.9	16	1671	1781	413551
7	1	56.1	16	-	-	586253
8	1	53.4	16	-	-	52720
9	3	87.1	16	1807	1107	222720
10	2	67.7	16	1789	-	393311
11	2	72.1	16	1798	-	563709
12	2	67.6	16	1647	-	31567
13	3	86.9	16	1820	1137	201737
14	1	53.9	16	-	-	373166
15	2	80.4	16	1117	-	543394
16	2	81.7	16	1968	-	10585
17	2	79.6	16	1586	-	181077
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5323			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.9	14	-	-	399427
2	3	91.4	14	1755	1699	590714
3	1	55.2	14	-	-	786564
4	3	86.5	14	1176	1801	181115
5	3	85.9	14	1735	1471	374186
6	1	56	14	-	-	569145
7	3	95.6	14	1365	1749	759586
8	2	77.2	14	1363	-	157629
9	1	57	14	-	-	351845
10	2	82.1	14	1439	-	544401
11	3	98.7	14	1731	1437	736318
12	1	52	14	-	-	134055
13	2	73.9	14	1696	-	326911
14	1	62.3	14	-	-	521168
15	2	75.2	14	1623	-	713931
16						
17						
18						
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5323			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	86.4	13	1831	1066	117709
2	2	72	13	1079	-	325398
3	2	79.5	13	1205	-	532747
4	2	80.9	13	1391	-	739308
5	2	75.9	13	1036	-	92541
6	2	73.6	13	1921	-	299409
7	3	98.2	13	1653	1714	505910
8	3	94.8	13	1548	1336	713160
9	3	97	13	1008	1204	66875
10	3	92.2	13	1650	1147	273815
11	2	73.8	13	1088	-	481416
12	2	80.7	13	1041	-	688382
13	3	85.4	13	1977	1475	41289
14	3	95.2	13	1964	1029	248081
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5323			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.9	14	-	-	425970
2	2	73.4	14	1879	-	618395
3	1	51.3	14	-	-	14853
4	1	50.9	14	-	-	208389
5	2	73.3	14	1689	-	401392
6	1	63.8	14	-	-	595870
7	1	65.2	14	-	-	789805
8	2	80.9	14	1039	-	184396
9	1	65.8	14	-	-	378342
10	1	62.8	14	-	-	572241
11	2	76	14	1022	-	764908
12	1	51.8	14	-	-	160756
13	3	98.1	14	1183	1286	353572
14	2	83.3	14	1319	-	546992
15	2	67.7	14	1153	-	740392
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	57.4	6	-	-	256963
2	1	51.4	6	-	-	620418
3	1	63.1	6	-	-	983727
4	1	55.4	6	-	-	1347366
5	3	96.9	6	1905	1392	211833
6	2	81.2	6	1541	-	575167
7	1	64.8	6	-	-	938991
8	2	74.5	6	1713	-	1301037
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.5	12	1511	1203	95367
2	1	55.7	12	-	-	303260
3	1	56	12	-	-	510944
4	1	60.8	12	-	-	718075
5	3	96.6	12	1046	1379	69883
6	1	58.2	12	-	-	277672
7	3	94.3	12	1901	1516	483094
8	1	62.1	12	-	-	693018
9	2	75.3	12	1091	-	44439
10	1	60.1	12	-	-	251912
11	2	82	12	1044	-	459148
12	1	51.1	12	-	-	667161
13	1	58.6	12	-	-	18947
14	3	97.4	12	1366	1326	225688
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5323			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51.1	13	-	-	434021
2	1	50.6	13	-	-	641191
3	3	98.5	13	1532	1506	845540
4	1	60	13	-	-	200993
5	1	55.4	13	-	-	408606
6	1	56.1	13	-	-	615830
7	2	66.7	13	1024	-	822197
8	1	54.8	13	-	-	175347
9	2	74.1	13	1102	-	382267
10	2	75.5	13	1730	-	589463
11	1	64.8	13	-	-	798032
12	2	77.1	13	1469	-	149491
13	3	89.5	13	1860	1965	355817
14	3	90.8	13	1698	1150	562954
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	60.6	11	-	-	832206
2	2	75.3	11	1537	-	133554
3	3	88.6	11	1313	1154	356204
4	1	63.9	11	-	-	580771
5	3	91.1	11	1347	1627	801925
6	3	99	11	1723	1573	105855
7	1	51.8	11	-	-	329653
8	3	95.2	11	1175	1445	551489
9	2	67.3	11	1494	-	775723
10	1	53	11	-	-	78759
11	2	68.6	11	1712	-	301547
12	2	72.7	11	1542	-	525040
13	2	71.6	11	1165	-	747940
14						
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5322			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	16	-	-	39105
2	1	50.7	16	-	-	209902
3	3	91.7	16	1539	1788	379070
4	1	66	16	-	-	551614
5	2	82.2	16	1920	-	18032
6	1	59.1	16	-	-	188959
7	1	60.1	16	-	-	359795
8	1	50.3	16	-	-	530445
9	1	62.5	16	-	-	701269
10	1	57	16	-	-	167944
11	3	86.8	16	1071	1452	337393
12	2	75.8	16	1245	-	508615
13	1	58.6	16	-	-	680062
14	1	57.7	16	-	-	146811
15	3	94.7	16	1915	1991	316097
16	2	81.7	16	1912	-	487488
17	2	80.5	16	1361	-	658530
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 58 Bandwidth 80MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96	10	1793	1060	177811
2	2	69.5	10	1592	-	419725
3	2	68.7	10	1078	-	662015
4	1	53.5	10	-	-	905161
5	1	51.5	10	-	-	148470
6	1	50	10	-	-	390623
7	2	71.6	10	1668	-	631895
8	2	68	10	1907	-	873675
9	1	60	10	-	-	118606
10	1	59.6	10	-	-	360778
11	3	95.5	10	1090	1297	601504
12	1	55.9	10	-	-	845537
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	8	1790	1772	106347
2	3	95.5	8	1358	1584	396185
3	3	91.4	8	1935	1231	686202
4	2	82.8	8	1615	-	977559
5	3	84.5	8	1076	1355	70699
6	1	66	8	-	-	361390
7	1	54.1	8	-	-	652401
8	2	82.4	8	1562	-	941797
9	1	59.5	8	-	-	35009
10	2	82.6	8	1778	-	325274
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 60 Bandwidth 20MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 60 Bandwidth 20MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	1222.49	818	Yes
2	10	1432.66	698	Yes
3	18	1165.50	858	Yes
4	21	1089.32	918	Yes
5	9	1474.93	678	Yes
6	23	326.16	3066	Yes
7	5	1672.24	598	Yes
8	13	1319.26	758	Yes
9	2	1858.74	538	Yes
10	14	1285.35	778	Yes
11	4	1730.10	578	Yes
12	15	1253.13	798	Yes
13	12	1355.01	738	Yes
14	7	1567.40	638	Yes
15	20	1113.59	898	Yes
16		424.09	2358	Yes
17		496.28	2015	Yes
18		550.36	1817	Yes
19		411.52	2430	Yes
20		402.90	2482	Yes
21		381.24	2623	Yes
22		406.50	2460	Yes
23		399.84	2501	Yes
24		454.34	2201	Yes
25		1748.25	572	Yes
26		354.61	2820	Yes
27		331.02	3021	Yes
28		993.05	1007	Yes
29		607.53	1646	Yes
30		954.20	1048	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 60 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	23	1.00	224	Yes
2	27	3.50	175	Yes
3	28	4.00	203	Yes
4	24	1.70	206	Yes
5	27	3.70	172	Yes
6	23	1.40	223	Yes
7	26	2.70	208	Yes
8	28	4.20	225	Yes
9	24	1.70	153	Yes
10	26	3.00	160	Yes
11	29	4.90	187	Yes
12	29	4.90	158	Yes
13	29	4.60	174	Yes
14	29	4.60	186	Yes
15	27	3.70	188	Yes
16	28	3.90	178	Yes
17	23	1.00	210	Yes
18	29	4.80	191	Yes
19	26	3.20	168	Yes
20	27	3.80	201	Yes
21	26	3.30	212	Yes
22	26	3.10	197	Yes
23	27	3.40	177	Yes
24	23	1.20	229	Yes
25	26	2.90	209	Yes
26	26	3.10	228	Yes
27	25	2.70	180	Yes
28	28	3.90	218	Yes
29	25	2.50	198	Yes
30	24	1.90	222	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 60 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	6.00	490	Yes
2	17	8.50	272	Yes
3	18	9.00	252	Yes
4	16	6.70	256	Yes
5	17	8.70	229	No
6	16	6.40	287	Yes
7	17	7.70	355	Yes
8	18	9.20	450	Yes
9	16	6.70	332	Yes
10	17	8.00	205	Yes
11	18	9.90	336	Yes
12	18	9.90	282	Yes
13	18	9.60	493	Yes
14	18	9.60	268	Yes
15	17	8.70	262	Yes
16	18	8.90	455	Yes
17	16	6.00	463	No
18	18	9.80	298	Yes
19	17	8.20	266	Yes
20	18	8.80	319	Yes
21	17	8.30	259	Yes
22	17	8.10	207	Yes
23	17	8.40	235	Yes
24	16	6.20	250	Yes
25	17	7.90	200	Yes
26	17	8.10	478	Yes
27	17	7.70	306	Yes
28	18	8.90	339	Yes
29	17	7.50	351	Yes
30	16	6.90	353	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 60 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	11.10	490	Yes
2	15	16.60	272	Yes
3	15	17.70	252	Yes
4	12	12.70	256	Yes
5	15	17.00	229	Yes
6	12	12.00	287	Yes
7	14	14.90	355	Yes
8	15	18.20	450	Yes
9	12	12.50	332	Yes
10	14	15.60	205	Yes
11	16	19.70	336	Yes
12	16	19.70	282	Yes
13	16	19.00	493	Yes
14	16	19.10	268	Yes
15	15	17.00	262	Yes
16	15	17.50	455	Yes
17	12	11.00	463	Yes
18	16	19.40	298	Yes
19	14	15.90	266	Yes
20	15	17.30	319	Yes
21	14	16.10	259	Yes
22	14	15.70	207	Yes
23	14	16.40	235	Yes
24	12	11.60	250	Yes
25	14	15.30	200	No
26	14	15.80	478	Yes
27	14	14.70	306	No
28	15	17.50	339	Yes
29	13	14.30	351	Yes
30	13	13.00	353	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	5	-	-	383020
2	2	81	5	1908	-	745524
3	3	86.9	5	1229	1643	1107584
4	1	59.5	5	-	-	1472888
5	2	83.2	5	1414	-	337989
6	1	55.7	5	-	-	701641
7	2	71.5	5	1523	-	1064105
8	3	89.8	5	1219	1168	1426122
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.6	14	-	-	146711
2	2	75.4	14	1105	-	327586
3	3	98.2	14	1360	1687	507950
4	3	97.9	14	1887	1045	688117
5	3	94.3	14	1442	1824	123726
6	3	94.6	14	1587	1440	304766
7	2	83.3	14	1185	-	486713
8	3	86.2	14	1839	1158	666475
9	1	50.1	14	-	-	101868
10	3	96.6	14	1106	1490	282293
11	2	77.3	14	1299	-	463913
12	3	84.8	14	1895	1104	644223
13	2	78.3	14	1092	-	79401
14	2	76.3	14	1524	-	260377
15	2	79.7	14	1597	-	441885
16	1	53.4	14	-	-	624479
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.9	16	1596	-	53664
2	2	76.7	16	1032	-	224316
3	2	70.9	16	1021	-	394900
4	3	86.3	16	1763	1454	564116
5	2	68.7	16	1080	-	32721
6	1	61.3	16	-	-	203667
7	1	63.2	16	-	-	374588
8	3	93.2	16	1795	1382	542938
9	1	56.7	16	-	-	11733
10	3	98.1	16	1031	2000	181825
11	1	53.9	16	-	-	353381
12	2	81.7	16	1641	-	523041
13	2	78.7	16	1416	-	694118
14	1	60.5	16	-	-	161623
15	2	77.4	16	1376	-	331669
16	1	54.2	16	-	-	503033
17	2	80.4	16	1871	-	672180
18						
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	8	1340	-	238798
2	2	78.6	8	1844	-	528893
3	2	81.4	8	1058	-	819515
4	2	81.2	8	1988	-	1109056
5	3	90.4	8	1289	1733	202723
6	1	53	8	-	-	493761
7	2	73.6	8	1618	-	783617
8	3	95	8	1644	1552	1072015
9	1	52	8	-	-	167356
10	3	85.8	8	1082	1819	456965
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	61.2	15	-	-	467710
2	2	73.8	15	1140	-	648349
3	2	73	15	1242	-	82095
4	2	70.1	15	1989	-	263076
5	2	74.4	15	1640	-	444313
6	1	51.2	15	-	-	626379
7	3	83.5	15	1635	1939	59572
8	3	85.6	15	1496	1115	240677
9	1	56.5	15	-	-	422997
10	3	84.9	15	1569	1875	601557
11	3	85.3	15	1237	1978	37286
12	2	71.1	15	1727	-	218395
13	3	97.4	15	1400	1826	398650
14	1	62.1	15	-	-	581788
15	1	55	15	-	-	15110
16	3	91.2	15	1679	1239	195995
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.3	6	1704	1566	671418
2	3	90.7	6	1711	1960	992930
3	1	51.6	6	-	-	1318875
4	1	57.5	6	-	-	310077
5	3	89.7	6	1481	1681	631771
6	2	69.1	6	1148	-	955570
7	2	73.1	6	1529	-	1277486
8	1	54.4	6	-	-	270234
9	3	96	6	1946	1700	591695
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	97.8	11	1164	1517	632360
2	3	98.4	11	1842	1522	854168
3	2	72.3	11	1130	-	159265
4	3	83.6	11	1848	1413	381843
5	2	73.6	11	1551	-	605287
6	3	97.3	11	1823	1417	827124
7	3	91.3	11	1942	1371	131445
8	1	66.6	11	-	-	355425
9	2	75.5	11	1119	-	578464
10	1	51.9	11	-	-	802714
11	2	69.4	11	1389	-	104320
12	3	83.7	11	1395	1780	326803
13	2	77.9	11	1116	-	550632
14						
15						
16						
17						
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.6	17	1296	-	558239
2	2	80.4	17	1497	-	55390
3	3	95.3	17	1189	1144	216194
4	2	74.9	17	1773	-	377205
5	2	70.9	17	1983	-	538028
6	2	69.3	17	1139	-	35595
7	3	95.2	17	1694	1782	195919
8	1	61.2	17	-	-	358161
9	2	81.2	17	1841	-	518288
10	2	69.3	17	1685	-	15742
11	2	76.2	17	1987	-	176554
12	3	99.2	17	1255	1207	337168
13	1	56.7	17	-	-	500069
14	2	83	17	1228	-	659689
15	3	93.4	17	1178	1138	156658
16	3	94.6	17	1182	1250	317508
17	3	96.2	17	1086	1206	478536
18	3	92.2	17	1747	1457	638590
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.7	7	-	-	247537
2	2	68.6	7	1594	-	537645
3	2	74.2	7	1719	-	827337
4	2	76.6	7	1332	-	1117917
5	1	52.9	7	-	-	211687
6	1	61.2	7	-	-	502195
7	1	52	7	-	-	793317
8	2	82.9	7	1851	-	1081995
9	3	87.7	7	1760	1448	175355
10	3	94	7	1346	1561	465337
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5300			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.5	13	-	-	540653
2	2	71.8	13	1880	-	746721
3	1	60.1	13	-	-	100037
4	3	85.7	13	1865	1233	306422
5	1	57.4	13	-	-	514889
6	2	68.4	13	1177	-	721952
7	1	61	13	-	-	74465
8	2	71.2	13	1276	-	281602
9	1	62.3	13	-	-	489576
10	1	64.7	13	-	-	696988
11	3	98.3	13	1284	1316	48713
12	1	53.7	13	-	-	256341
13	1	59.2	13	-	-	464014
14	3	84.8	13	1753	1309	668947
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5298			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	66.5	20	-	-	16308
2	2	79.1	20	1163	-	161125
3	3	96.1	20	1278	1646	304876
4	3	84.4	20	1675	1212	449775
5	2	66.9	20	1342	-	595529
6	1	64.2	20	-	-	143494
7	3	98	20	1531	1198	287565
8	2	72.1	20	1110	-	432782
9	2	79.4	20	1863	-	577429
10	1	59.8	20	-	-	125642
11	2	68.6	20	1432	-	270110
12	1	65.1	20	-	-	415794
13	1	53.7	20	-	-	561161
14	1	52.9	20	-	-	107906
15	2	77.5	20	1493	-	252475
16	3	84.1	20	1052	1856	395948
17	2	72.9	20	1244	-	542258
18	3	88.1	20	1096	1253	89590
19	2	81.6	20	1876	-	234183
20	1	51.2	20	-	-	380019

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5298			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56.7	20	-	-	525163
2	1	59.4	20	-	-	72078
3	1	59.1	20	-	-	217232
4	3	90.6	20	1136	1836	360326
5	3	91.8	20	1701	1495	504522
6	3	88.4	20	1019	1652	53980
7	2	72	20	1862	-	198574
8	2	72.1	20	1453	-	343657
9	2	82.2	20	1720	-	488138
10	2	81.4	20	1446	-	36216
11	3	94	20	1630	1576	180542
12	3	97	20	1184	1020	325506
13	1	59.3	20	-	-	472161
14	3	89.4	20	1903	1112	18339
15	1	60	20	-	-	163511
16	2	73.9	20	1310	-	308082
17	1	65.1	20	-	-	453568
18	2	67.6	20	1016	-	548
19	1	66	20	-	-	145675
20	2	73.5	20	1952	-	289948

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5298			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	96	19	1300	1378	457302
2	2	82.4	19	1662	-	610220
3	3	92.5	19	1390	1828	133894
4	1	50.3	19	-	-	287165
5	2	67	19	1678	-	438768
6	3	92.3	19	1697	1768	589760
7	1	64.7	19	-	-	115717
8	1	58	19	-	-	268383
9	3	93.7	19	1447	1809	419220
10	2	78.3	19	1792	-	572160
11	3	91.8	19	1059	1775	96467
12	1	60.1	19	-	-	249696
13	2	72.1	19	1314	-	401541
14	1	58	19	-	-	555636
15	2	78.1	19	1406	-	77949
16	1	57.1	19	-	-	230879
17	2	69.9	19	1805	-	382698
18	1	55.5	19	-	-	536391
19	3	92.7	19	1303	1482	59043
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5298			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	78.5	19	1601	-	211387
2	3	92.3	19	1969	1348	362938
3	2	75.8	19	1317	-	517038
4	3	89.9	19	1412	1837	40224
5	3	98	19	1980	1467	192076
6	1	65.9	19	-	-	346009
7	2	71.6	19	1240	-	497876
8	1	55.8	19	-	-	21615
9	1	64.3	19	-	-	174406
10	3	93	19	1834	1590	325499
11	1	53.6	19	-	-	480051
12	2	69	19	1976	-	2797
13	1	55.3	19	-	-	155641
14	2	72.1	19	1858	-	307531
15	1	58.1	19	-	-	461128
16	1	55.2	19	-	-	613994
17	2	74.3	19	1622	-	136383
18	2	67	19	1305	-	288894
19	1	58.7	19	-	-	442336
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5296			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.5	15	1151	-	705920
2	3	99.5	15	1033	1945	139561
3	2	73.6	15	1738	-	320787
4	1	63.9	15	-	-	502955
5	2	78.5	15	1916	-	682869
6	1	53.9	15	-	-	117748
7	3	89.6	15	1257	1786	298120
8	3	83.8	15	1214	1754	478734
9	2	74.9	15	1985	-	660773
10	1	51.3	15	-	-	95438
11	1	61.3	15	-	-	276822
12	1	52.9	15	-	-	458772
13	1	53.9	15	-	-	639736
14	1	59.5	15	-	-	73106
15	2	75	15	1169	-	254299
16	3	87.5	15	1149	1944	434466
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5296			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.3	16	1970	-	580047
2	2	70.1	16	1575	-	47641
3	3	92.6	16	1774	1651	217474
4	3	94.5	16	1312	1201	388052
5	3	84.5	16	1325	1002	558235
6	3	95.4	16	1001	1528	26570
7	3	86.5	16	1232	1265	196883
8	1	50.3	16	-	-	368137
9	1	65.1	16	-	-	539393
10	3	90.1	16	1330	1461	5608
11	1	59.3	16	-	-	176507
12	3	86.5	16	1422	1950	345702
13	3	88.1	16	1367	1741	515574
14	1	64	16	-	-	689122
15	1	52.8	16	-	-	155483
16	1	53.8	16	-	-	326211
17	3	90.2	16	1301	1061	495191
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5292			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	61.2	5	-	-	1421064
2	2	82.1	5	1433	-	285667
3	3	93.3	5	1190	1261	648291
4	1	54.9	5	-	-	1012657
5	2	78.4	5	1258	-	1374663
6	3	97.4	5	1263	1940	240566
7	3	86	5	1913	1408	603308
8	1	58.3	5	-	-	967736
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5298			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.1	19	1744	-	529770
2	3	96.8	19	1998	1486	77960
3	1	54.5	19	-	-	223394
4	1	53	19	-	-	368444
5	3	90	19	1128	1434	511862
6	3	99.8	19	1582	1645	60250
7	1	59.5	19	-	-	205612
8	2	80.4	19	1373	-	349878
9	3	84.6	19	1993	1740	493213
10	2	76.9	19	1337	-	42537
11	3	85.1	19	1327	1530	186808
12	2	81.8	19	1307	-	332044
13	2	72.5	19	1817	-	476900
14	2	74.3	19	1992	-	24714
15	2	78.1	19	1209	-	169606
16	1	62.9	19	-	-	314888
17	2	73.3	19	1961	-	458780
18	3	98.8	19	1750	1676	6855
19	3	88.5	19	1710	1280	151302
20	3	94.7	19	1193	1777	295858

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5295			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	53.1	13	-	-	590464
2	3	95.7	13	1127	1683	781088
3	1	60.9	13	-	-	179043
4	3	98.5	13	1483	1624	371002
5	1	57.4	13	-	-	566048
6	1	62.8	13	-	-	759526
7	3	92.8	13	1770	1840	154408
8	2	77.4	13	1443	-	348025
9	2	81.7	13	1485	-	541616
10	2	82.6	13	1421	-	734764
11	1	52.9	13	-	-	131271
12	2	72.8	13	1143	-	324314
13	1	56.5	13	-	-	518318
14	3	86.2	13	1718	1241	709339
15	1	52.3	13	-	-	107385
16						
17						
18						
19						
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5296			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.7	16	1649	1811	264299
2	2	82	16	1037	-	435698
3	3	97.4	16	1966	1536	604230
4	2	75.2	16	1173	-	73653
5	3	90.3	16	1027	1156	243791
6	3	99.9	16	1671	1781	413551
7	1	56.1	16	-	-	586253
8	1	53.4	16	-	-	52720
9	3	87.1	16	1807	1107	222720
10	2	67.7	16	1789	-	393311
11	2	72.1	16	1798	-	563709
12	2	67.6	16	1647	-	31567
13	3	86.9	16	1820	1137	201737
14	1	53.9	16	-	-	373166
15	2	80.4	16	1117	-	543394
16	2	81.7	16	1968	-	10585
17	2	79.6	16	1586	-	181077
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5304			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.9	14	-	-	399427
2	3	91.4	14	1755	1699	590714
3	1	55.2	14	-	-	786564
4	3	86.5	14	1176	1801	181115
5	3	85.9	14	1735	1471	374186
6	1	56	14	-	-	569145
7	3	95.6	14	1365	1749	759586
8	2	77.2	14	1363	-	157629
9	1	57	14	-	-	351845
10	2	82.1	14	1439	-	544401
11	3	98.7	14	1731	1437	736318
12	1	52	14	-	-	134055
13	2	73.9	14	1696	-	326911
14	1	62.3	14	-	-	521168
15	2	75.2	14	1623	-	713931
16						
17						
18						
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5305			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	86.4	13	1831	1066	117709
2	2	72	13	1079	-	325398
3	2	79.5	13	1205	-	532747
4	2	80.9	13	1391	-	739308
5	2	75.9	13	1036	-	92541
6	2	73.6	13	1921	-	299409
7	3	98.2	13	1653	1714	505910
8	3	94.8	13	1548	1336	713160
9	3	97	13	1008	1204	66875
10	3	92.2	13	1650	1147	273815
11	2	73.8	13	1088	-	481416
12	2	80.7	13	1041	-	688382
13	3	85.4	13	1977	1475	41289
14	3	95.2	13	1964	1029	248081
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5304			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.9	14	-	-	425970
2	2	73.4	14	1879	-	618395
3	1	51.3	14	-	-	14853
4	1	50.9	14	-	-	208389
5	2	73.3	14	1689	-	401392
6	1	63.8	14	-	-	595870
7	1	65.2	14	-	-	789805
8	2	80.9	14	1039	-	184396
9	1	65.8	14	-	-	378342
10	1	62.8	14	-	-	572241
11	2	76	14	1022	-	764908
12	1	51.8	14	-	-	160756
13	3	98.1	14	1183	1286	353572
14	2	83.3	14	1319	-	546992
15	2	67.7	14	1153	-	740392
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5308			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	57.4	6	-	-	256963
2	1	51.4	6	-	-	620418
3	1	63.1	6	-	-	983727
4	1	55.4	6	-	-	1347366
5	3	96.9	6	1905	1392	211833
6	2	81.2	6	1541	-	575167
7	1	64.8	6	-	-	938991
8	2	74.5	6	1713	-	1301037
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5305			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.5	12	1511	1203	95367
2	1	55.7	12	-	-	303260
3	1	56	12	-	-	510944
4	1	60.8	12	-	-	718075
5	3	96.6	12	1046	1379	69883
6	1	58.2	12	-	-	277672
7	3	94.3	12	1901	1516	483094
8	1	62.1	12	-	-	693018
9	2	75.3	12	1091	-	44439
10	1	60.1	12	-	-	251912
11	2	82	12	1044	-	459148
12	1	51.1	12	-	-	667161
13	1	58.6	12	-	-	18947
14	3	97.4	12	1366	1326	225688
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5305			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51.1	13	-	-	434021
2	1	50.6	13	-	-	641191
3	3	98.5	13	1532	1506	845540
4	1	60	13	-	-	200993
5	1	55.4	13	-	-	408606
6	1	56.1	13	-	-	615830
7	2	66.7	13	1024	-	822197
8	1	54.8	13	-	-	175347
9	2	74.1	13	1102	-	382267
10	2	75.5	13	1730	-	589463
11	1	64.8	13	-	-	798032
12	2	77.1	13	1469	-	149491
13	3	89.5	13	1860	1965	355817
14	3	90.8	13	1698	1150	562954
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5306			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	60.6	11	-	-	832206
2	2	75.3	11	1537	-	133554
3	3	88.6	11	1313	1154	356204
4	1	63.9	11	-	-	580771
5	3	91.1	11	1347	1627	801925
6	3	99	11	1723	1573	105855
7	1	51.8	11	-	-	329653
8	3	95.2	11	1175	1445	551489
9	2	67.3	11	1494	-	775723
10	1	53	11	-	-	78759
11	2	68.6	11	1712	-	301547
12	2	72.7	11	1542	-	525040
13	2	71.6	11	1165	-	747940
14						
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5304			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	16	-	-	39105
2	1	50.7	16	-	-	209902
3	3	91.7	16	1539	1788	379070
4	1	66	16	-	-	551614
5	2	82.2	16	1920	-	18032
6	1	59.1	16	-	-	188959
7	1	60.1	16	-	-	359795
8	1	50.3	16	-	-	530445
9	1	62.5	16	-	-	701269
10	1	57	16	-	-	167944
11	3	86.8	16	1071	1452	337393
12	2	75.8	16	1245	-	508615
13	1	58.6	16	-	-	680062
14	1	57.7	16	-	-	146811
15	3	94.7	16	1915	1991	316097
16	2	81.7	16	1912	-	487488
17	2	80.5	16	1361	-	658530
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 60 Bandwidth 20MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5306			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96	10	1793	1060	177811
2	2	69.5	10	1592	-	419725
3	2	68.7	10	1078	-	662015
4	1	53.5	10	-	-	905161
5	1	51.5	10	-	-	148470
6	1	50	10	-	-	390623
7	2	71.6	10	1668	-	631895
8	2	68	10	1907	-	873675
9	1	60	10	-	-	118606
10	1	59.6	10	-	-	360778
11	3	95.5	10	1090	1297	601504
12	1	55.9	10	-	-	845537
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5307			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	8	1790	1772	106347
2	3	95.5	8	1358	1584	396185
3	3	91.4	8	1935	1231	686202
4	2	82.8	8	1615	-	977559
5	3	84.5	8	1076	1355	70699
6	1	66	8	-	-	361390
7	1	54.1	8	-	-	652401
8	2	82.4	8	1562	-	941797
9	1	59.5	8	-	-	35009
10	2	82.6	8	1778	-	325274
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 62 Bandwidth 40MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 62 Bandwidth 40MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	1222.49	818	No
2	10	1432.66	698	No
3	18	1165.50	858	Yes
4	21	1089.32	918	Yes
5	9	1474.93	678	Yes
6	23	326.16	3066	No
7	5	1672.24	598	Yes
8	13	1319.26	758	Yes
9	2	1858.74	538	Yes
10	14	1285.35	778	Yes
11	4	1730.10	578	Yes
12	15	1253.13	798	Yes
13	12	1355.01	738	Yes
14	7	1567.40	638	Yes
15	20	1113.59	898	Yes
16		424.09	2358	Yes
17		496.28	2015	Yes
18		550.36	1817	Yes
19		411.52	2430	Yes
20		402.90	2482	Yes
21		381.24	2623	Yes
22		406.50	2460	Yes
23		399.84	2501	Yes
24		454.34	2201	Yes
25		1748.25	572	Yes
26		354.61	2820	Yes
27		331.02	3021	Yes
28		993.05	1007	Yes
29		607.53	1646	Yes
30		954.20	1048	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 62 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	23	1.00	224	Yes
2	27	3.50	175	Yes
3	28	4.00	203	Yes
4	24	1.70	206	Yes
5	27	3.70	172	Yes
6	23	1.40	223	Yes
7	26	2.70	208	Yes
8	28	4.20	225	Yes
9	24	1.70	153	Yes
10	26	3.00	160	Yes
11	29	4.90	187	Yes
12	29	4.90	158	Yes
13	29	4.60	174	Yes
14	29	4.60	186	Yes
15	27	3.70	188	Yes
16	28	3.90	178	Yes
17	23	1.00	210	Yes
18	29	4.80	191	Yes
19	26	3.20	168	Yes
20	27	3.80	201	Yes
21	26	3.30	212	Yes
22	26	3.10	197	Yes
23	27	3.40	177	Yes
24	23	1.20	229	Yes
25	26	2.90	209	Yes
26	26	3.10	228	Yes
27	25	2.70	180	Yes
28	28	3.90	218	Yes
29	25	2.50	198	Yes
30	24	1.90	222	No

DFS Radar Parameters
FCC Radar Type 3
Channel 62 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	6.00	490	Yes
2	17	8.50	272	Yes
3	18	9.00	252	Yes
4	16	6.70	256	Yes
5	17	8.70	229	Yes
6	16	6.40	287	No
7	17	7.70	355	Yes
8	18	9.20	450	Yes
9	16	6.70	332	Yes
10	17	8.00	205	Yes
11	18	9.90	336	Yes
12	18	9.90	282	Yes
13	18	9.60	493	Yes
14	18	9.60	268	Yes
15	17	8.70	262	Yes
16	18	8.90	455	Yes
17	16	6.00	463	Yes
18	18	9.80	298	Yes
19	17	8.20	266	Yes
20	18	8.80	319	Yes
21	17	8.30	259	Yes
22	17	8.10	207	Yes
23	17	8.40	235	Yes
24	16	6.20	250	Yes
25	17	7.90	200	No
26	17	8.10	478	Yes
27	17	7.70	306	Yes
28	18	8.90	339	Yes
29	17	7.50	351	Yes
30	16	6.90	353	No

DFS Radar Parameters
FCC Radar Type 4
Channel 62 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	11.10	490	Yes
2	15	16.60	272	Yes
3	15	17.70	252	Yes
4	12	12.70	256	Yes
5	15	17.00	229	No
6	12	12.00	287	Yes
7	14	14.90	355	No
8	15	18.20	450	Yes
9	12	12.50	332	Yes
10	14	15.60	205	No
11	16	19.70	336	Yes
12	16	19.70	282	Yes
13	16	19.00	493	Yes
14	16	19.10	268	Yes
15	15	17.00	262	Yes
16	15	17.50	455	No
17	12	11.00	463	Yes
18	16	19.40	298	Yes
19	14	15.90	266	Yes
20	15	17.30	319	Yes
21	14	16.10	259	Yes
22	14	15.70	207	Yes
23	14	16.40	235	Yes
24	12	11.60	250	Yes
25	14	15.30	200	Yes
26	14	15.80	478	No
27	14	14.70	306	No
28	15	17.50	339	Yes
29	13	14.30	351	Yes
30	13	13.00	353	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	5	-	-	383020
2	2	81	5	1908	-	745524
3	3	86.9	5	1229	1643	1107584
4	1	59.5	5	-	-	1472888
5	2	83.2	5	1414	-	337989
6	1	55.7	5	-	-	701641
7	2	71.5	5	1523	-	1064105
8	3	89.8	5	1219	1168	1426122
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.6	14	-	-	146711
2	2	75.4	14	1105	-	327586
3	3	98.2	14	1360	1687	507950
4	3	97.9	14	1887	1045	688117
5	3	94.3	14	1442	1824	123726
6	3	94.6	14	1587	1440	304766
7	2	83.3	14	1185	-	486713
8	3	86.2	14	1839	1158	666475
9	1	50.1	14	-	-	101868
10	3	96.6	14	1106	1490	282293
11	2	77.3	14	1299	-	463913
12	3	84.8	14	1895	1104	644223
13	2	78.3	14	1092	-	79401
14	2	76.3	14	1524	-	260377
15	2	79.7	14	1597	-	441885
16	1	53.4	14	-	-	624479
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.9	16	1596	-	53664
2	2	76.7	16	1032	-	224316
3	2	70.9	16	1021	-	394900
4	3	86.3	16	1763	1454	564116
5	2	68.7	16	1080	-	32721
6	1	61.3	16	-	-	203667
7	1	63.2	16	-	-	374588
8	3	93.2	16	1795	1382	542938
9	1	56.7	16	-	-	11733
10	3	98.1	16	1031	2000	181825
11	1	53.9	16	-	-	353381
12	2	81.7	16	1641	-	523041
13	2	78.7	16	1416	-	694118
14	1	60.5	16	-	-	161623
15	2	77.4	16	1376	-	331669
16	1	54.2	16	-	-	503033
17	2	80.4	16	1871	-	672180
18						
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.3	8	1340	-	238798
2	2	78.6	8	1844	-	528893
3	2	81.4	8	1058	-	819515
4	2	81.2	8	1988	-	1109056
5	3	90.4	8	1289	1733	202723
6	1	53	8	-	-	493761
7	2	73.6	8	1618	-	783617
8	3	95	8	1644	1552	1072015
9	1	52	8	-	-	167356
10	3	85.8	8	1082	1819	456965
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	61.2	15	-	-	467710
2	2	73.8	15	1140	-	648349
3	2	73	15	1242	-	82095
4	2	70.1	15	1989	-	263076
5	2	74.4	15	1640	-	444313
6	1	51.2	15	-	-	626379
7	3	83.5	15	1635	1939	59572
8	3	85.6	15	1496	1115	240677
9	1	56.5	15	-	-	422997
10	3	84.9	15	1569	1875	601557
11	3	85.3	15	1237	1978	37286
12	2	71.1	15	1727	-	218395
13	3	97.4	15	1400	1826	398650
14	1	62.1	15	-	-	581788
15	1	55	15	-	-	15110
16	3	91.2	15	1679	1239	195995
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96.3	6	1704	1566	671418
2	3	90.7	6	1711	1960	992930
3	1	51.6	6	-	-	1318875
4	1	57.5	6	-	-	310077
5	3	89.7	6	1481	1681	631771
6	2	69.1	6	1148	-	955570
7	2	73.1	6	1529	-	1277486
8	1	54.4	6	-	-	270234
9	3	96	6	1946	1700	591695
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	97.8	11	1164	1517	632360
2	3	98.4	11	1842	1522	854168
3	2	72.3	11	1130	-	159265
4	3	83.6	11	1848	1413	381843
5	2	73.6	11	1551	-	605287
6	3	97.3	11	1823	1417	827124
7	3	91.3	11	1942	1371	131445
8	1	66.6	11	-	-	355425
9	2	75.5	11	1119	-	578464
10	1	51.9	11	-	-	802714
11	2	69.4	11	1389	-	104320
12	3	83.7	11	1395	1780	326803
13	2	77.9	11	1116	-	550632
14						
15						
16						
17						
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			18			
Chirp Center Frequency:			5310			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	79.6	17	1296	-	558239
2	2	80.4	17	1497	-	55390
3	3	95.3	17	1189	1144	216194
4	2	74.9	17	1773	-	377205
5	2	70.9	17	1983	-	538028
6	2	69.3	17	1139	-	35595
7	3	95.2	17	1694	1782	195919
8	1	61.2	17	-	-	358161
9	2	81.2	17	1841	-	518288
10	2	69.3	17	1685	-	15742
11	2	76.2	17	1987	-	176554
12	3	99.2	17	1255	1207	337168
13	1	56.7	17	-	-	500069
14	2	83	17	1228	-	659689
15	3	93.4	17	1178	1138	156658
16	3	94.6	17	1182	1250	317508
17	3	96.2	17	1086	1206	478536
18	3	92.2	17	1747	1457	638590
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5310			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.7	7	-	-	247537
2	2	68.6	7	1594	-	537645
3	2	74.2	7	1719	-	827337
4	2	76.6	7	1332	-	1117917
5	1	52.9	7	-	-	211687
6	1	61.2	7	-	-	502195
7	1	52	7	-	-	793317
8	2	82.9	7	1851	-	1081995
9	3	87.7	7	1760	1448	175355
10	3	94	7	1346	1561	465337
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5310			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	54.5	13	-	-	540653
2	2	71.8	13	1880	-	746721
3	1	60.1	13	-	-	100037
4	3	85.7	13	1865	1233	306422
5	1	57.4	13	-	-	514889
6	2	68.4	13	1177	-	721952
7	1	61	13	-	-	74465
8	2	71.2	13	1276	-	281602
9	1	62.3	13	-	-	489576
10	1	64.7	13	-	-	696988
11	3	98.3	13	1284	1316	48713
12	1	53.7	13	-	-	256341
13	1	59.2	13	-	-	464014
14	3	84.8	13	1753	1309	668947
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5298			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	66.5	20	-	-	16308
2	2	79.1	20	1163	-	161125
3	3	96.1	20	1278	1646	304876
4	3	84.4	20	1675	1212	449775
5	2	66.9	20	1342	-	595529
6	1	64.2	20	-	-	143494
7	3	98	20	1531	1198	287565
8	2	72.1	20	1110	-	432782
9	2	79.4	20	1863	-	577429
10	1	59.8	20	-	-	125642
11	2	68.6	20	1432	-	270110
12	1	65.1	20	-	-	415794
13	1	53.7	20	-	-	561161
14	1	52.9	20	-	-	107906
15	2	77.5	20	1493	-	252475
16	3	84.1	20	1052	1856	395948
17	2	72.9	20	1244	-	542258
18	3	88.1	20	1096	1253	89590
19	2	81.6	20	1876	-	234183
20	1	51.2	20	-	-	380019

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5298			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	56.7	20	-	-	525163
2	1	59.4	20	-	-	72078
3	1	59.1	20	-	-	217232
4	3	90.6	20	1136	1836	360326
5	3	91.8	20	1701	1495	504522
6	3	88.4	20	1019	1652	53980
7	2	72	20	1862	-	198574
8	2	72.1	20	1453	-	343657
9	2	82.2	20	1720	-	488138
10	2	81.4	20	1446	-	36216
11	3	94	20	1630	1576	180542
12	3	97	20	1184	1020	325506
13	1	59.3	20	-	-	472161
14	3	89.4	20	1903	1112	18339
15	1	60	20	-	-	163511
16	2	73.9	20	1310	-	308082
17	1	65.1	20	-	-	453568
18	2	67.6	20	1016	-	548
19	1	66	20	-	-	145675
20	2	73.5	20	1952	-	289948

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5298			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96	19	1300	1378	457302
2	2	82.4	19	1662	-	610220
3	3	92.5	19	1390	1828	133894
4	1	50.3	19	-	-	287165
5	2	67	19	1678	-	438768
6	3	92.3	19	1697	1768	589760
7	1	64.7	19	-	-	115717
8	1	58	19	-	-	268383
9	3	93.7	19	1447	1809	419220
10	2	78.3	19	1792	-	572160
11	3	91.8	19	1059	1775	96467
12	1	60.1	19	-	-	249696
13	2	72.1	19	1314	-	401541
14	1	58	19	-	-	555636
15	2	78.1	19	1406	-	77949
16	1	57.1	19	-	-	230879
17	2	69.9	19	1805	-	382698
18	1	55.5	19	-	-	536391
19	3	92.7	19	1303	1482	59043
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5298			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	78.5	19	1601	-	211387
2	3	92.3	19	1969	1348	362938
3	2	75.8	19	1317	-	517038
4	3	89.9	19	1412	1837	40224
5	3	98	19	1980	1467	192076
6	1	65.9	19	-	-	346009
7	2	71.6	19	1240	-	497876
8	1	55.8	19	-	-	21615
9	1	64.3	19	-	-	174406
10	3	93	19	1834	1590	325499
11	1	53.6	19	-	-	480051
12	2	69	19	1976	-	2797
13	1	55.3	19	-	-	155641
14	2	72.1	19	1858	-	307531
15	1	58.1	19	-	-	461128
16	1	55.2	19	-	-	613994
17	2	74.3	19	1622	-	136383
18	2	67	19	1305	-	288894
19	1	58.7	19	-	-	442336
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5296			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	73.5	15	1151	-	705920
2	3	99.5	15	1033	1945	139561
3	2	73.6	15	1738	-	320787
4	1	63.9	15	-	-	502955
5	2	78.5	15	1916	-	682869
6	1	53.9	15	-	-	117748
7	3	89.6	15	1257	1786	298120
8	3	83.8	15	1214	1754	478734
9	2	74.9	15	1985	-	660773
10	1	51.3	15	-	-	95438
11	1	61.3	15	-	-	276822
12	1	52.9	15	-	-	458772
13	1	53.9	15	-	-	639736
14	1	59.5	15	-	-	73106
15	2	75	15	1169	-	254299
16	3	87.5	15	1149	1944	434466
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	81.3	16	1970	-	580047
2	2	70.1	16	1575	-	47641
3	3	92.6	16	1774	1651	217474
4	3	94.5	16	1312	1201	388052
5	3	84.5	16	1325	1002	558235
6	3	95.4	16	1001	1528	26570
7	3	86.5	16	1232	1265	196883
8	1	50.3	16	-	-	368137
9	1	65.1	16	-	-	539393
10	3	90.1	16	1330	1461	5608
11	1	59.3	16	-	-	176507
12	3	86.5	16	1422	1950	345702
13	3	88.1	16	1367	1741	515574
14	1	64	16	-	-	689122
15	1	52.8	16	-	-	155483
16	1	53.8	16	-	-	326211
17	3	90.2	16	1301	1061	495191
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5292			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	61.2	5	-	-	1421064
2	2	82.1	5	1433	-	285667
3	3	93.3	5	1190	1261	648291
4	1	54.9	5	-	-	1012657
5	2	78.4	5	1258	-	1374663
6	3	97.4	5	1263	1940	240566
7	3	86	5	1913	1408	603308
8	1	58.3	5	-	-	967736
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5298			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	2	82.1	19	1744	-	529770
2	3	96.8	19	1998	1486	77960
3	1	54.5	19	-	-	223394
4	1	53	19	-	-	368444
5	3	90	19	1128	1434	511862
6	3	99.8	19	1582	1645	60250
7	1	59.5	19	-	-	205612
8	2	80.4	19	1373	-	349878
9	3	84.6	19	1993	1740	493213
10	2	76.9	19	1337	-	42537
11	3	85.1	19	1327	1530	186808
12	2	81.8	19	1307	-	332044
13	2	72.5	19	1817	-	476900
14	2	74.3	19	1992	-	24714
15	2	78.1	19	1209	-	169606
16	1	62.9	19	-	-	314888
17	2	73.3	19	1961	-	458780
18	3	98.8	19	1750	1676	6855
19	3	88.5	19	1710	1280	151302
20	3	94.7	19	1193	1777	295858

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5296			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	53.1	13	-	-	590464
2	3	95.7	13	1127	1683	781088
3	1	60.9	13	-	-	179043
4	3	98.5	13	1483	1624	371002
5	1	57.4	13	-	-	566048
6	1	62.8	13	-	-	759526
7	3	92.8	13	1770	1840	154408
8	2	77.4	13	1443	-	348025
9	2	81.7	13	1485	-	541616
10	2	82.6	13	1421	-	734764
11	1	52.9	13	-	-	131271
12	2	72.8	13	1143	-	324314
13	1	56.5	13	-	-	518318
14	3	86.2	13	1718	1241	709339
15	1	52.3	13	-	-	107385
16						
17						
18						
19						
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5297			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	98.7	16	1649	1811	264299
2	2	82	16	1037	-	435698
3	3	97.4	16	1966	1536	604230
4	2	75.2	16	1173	-	73653
5	3	90.3	16	1027	1156	243791
6	3	99.9	16	1671	1781	413551
7	1	56.1	16	-	-	586253
8	1	53.4	16	-	-	52720
9	3	87.1	16	1807	1107	222720
10	2	67.7	16	1789	-	393311
11	2	72.1	16	1798	-	563709
12	2	67.6	16	1647	-	31567
13	3	86.9	16	1820	1137	201737
14	1	53.9	16	-	-	373166
15	2	80.4	16	1117	-	543394
16	2	81.7	16	1968	-	10585
17	2	79.6	16	1586	-	181077
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5324			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	58.9	14	-	-	399427
2	3	91.4	14	1755	1699	590714
3	1	55.2	14	-	-	786564
4	3	86.5	14	1176	1801	181115
5	3	85.9	14	1735	1471	374186
6	1	56	14	-	-	569145
7	3	95.6	14	1365	1749	759586
8	2	77.2	14	1363	-	157629
9	1	57	14	-	-	351845
10	2	82.1	14	1439	-	544401
11	3	98.7	14	1731	1437	736318
12	1	52	14	-	-	134055
13	2	73.9	14	1696	-	326911
14	1	62.3	14	-	-	521168
15	2	75.2	14	1623	-	713931
16						
17						
18						
19						
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	86.4	13	1831	1066	117709
2	2	72	13	1079	-	325398
3	2	79.5	13	1205	-	532747
4	2	80.9	13	1391	-	739308
5	2	75.9	13	1036	-	92541
6	2	73.6	13	1921	-	299409
7	3	98.2	13	1653	1714	505910
8	3	94.8	13	1548	1336	713160
9	3	97	13	1008	1204	66875
10	3	92.2	13	1650	1147	273815
11	2	73.8	13	1088	-	481416
12	2	80.7	13	1041	-	688382
13	3	85.4	13	1977	1475	41289
14	3	95.2	13	1964	1029	248081
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	55.9	14	-	-	425970
2	2	73.4	14	1879	-	618395
3	1	51.3	14	-	-	14853
4	1	50.9	14	-	-	208389
5	2	73.3	14	1689	-	401392
6	1	63.8	14	-	-	595870
7	1	65.2	14	-	-	789805
8	2	80.9	14	1039	-	184396
9	1	65.8	14	-	-	378342
10	1	62.8	14	-	-	572241
11	2	76	14	1022	-	764908
12	1	51.8	14	-	-	160756
13	3	98.1	14	1183	1286	353572
14	2	83.3	14	1319	-	546992
15	2	67.7	14	1153	-	740392
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5327			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	57.4	6	-	-	256963
2	1	51.4	6	-	-	620418
3	1	63.1	6	-	-	983727
4	1	55.4	6	-	-	1347366
5	3	96.9	6	1905	1392	211833
6	2	81.2	6	1541	-	575167
7	1	64.8	6	-	-	938991
8	2	74.5	6	1713	-	1301037
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	99.5	12	1511	1203	95367
2	1	55.7	12	-	-	303260
3	1	56	12	-	-	510944
4	1	60.8	12	-	-	718075
5	3	96.6	12	1046	1379	69883
6	1	58.2	12	-	-	277672
7	3	94.3	12	1901	1516	483094
8	1	62.1	12	-	-	693018
9	2	75.3	12	1091	-	44439
10	1	60.1	12	-	-	251912
11	2	82	12	1044	-	459148
12	1	51.1	12	-	-	667161
13	1	58.6	12	-	-	18947
14	3	97.4	12	1366	1326	225688
15						
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5324			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	51.1	13	-	-	434021
2	1	50.6	13	-	-	641191
3	3	98.5	13	1532	1506	845540
4	1	60	13	-	-	200993
5	1	55.4	13	-	-	408606
6	1	56.1	13	-	-	615830
7	2	66.7	13	1024	-	822197
8	1	54.8	13	-	-	175347
9	2	74.1	13	1102	-	382267
10	2	75.5	13	1730	-	589463
11	1	64.8	13	-	-	798032
12	2	77.1	13	1469	-	149491
13	3	89.5	13	1860	1965	355817
14	3	90.8	13	1698	1150	562954
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5325			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	60.6	11	-	-	832206
2	2	75.3	11	1537	-	133554
3	3	88.6	11	1313	1154	356204
4	1	63.9	11	-	-	580771
5	3	91.1	11	1347	1627	801925
6	3	99	11	1723	1573	105855
7	1	51.8	11	-	-	329653
8	3	95.2	11	1175	1445	551489
9	2	67.3	11	1494	-	775723
10	1	53	11	-	-	78759
11	2	68.6	11	1712	-	301547
12	2	72.7	11	1542	-	525040
13	2	71.6	11	1165	-	747940
14						
15						
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5323			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	1	50.6	16	-	-	39105
2	1	50.7	16	-	-	209902
3	3	91.7	16	1539	1788	379070
4	1	66	16	-	-	551614
5	2	82.2	16	1920	-	18032
6	1	59.1	16	-	-	188959
7	1	60.1	16	-	-	359795
8	1	50.3	16	-	-	530445
9	1	62.5	16	-	-	701269
10	1	57	16	-	-	167944
11	3	86.8	16	1071	1452	337393
12	2	75.8	16	1245	-	508615
13	1	58.6	16	-	-	680062
14	1	57.7	16	-	-	146811
15	3	94.7	16	1915	1991	316097
16	2	81.7	16	1912	-	487488
17	2	80.5	16	1361	-	658530
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 62 Bandwidth 40MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	96	10	1793	1060	177811
2	2	69.5	10	1592	-	419725
3	2	68.7	10	1078	-	662015
4	1	53.5	10	-	-	905161
5	1	51.5	10	-	-	148470
6	1	50	10	-	-	390623
7	2	71.6	10	1668	-	631895
8	2	68	10	1907	-	873675
9	1	60	10	-	-	118606
10	1	59.6	10	-	-	360778
11	3	95.5	10	1090	1297	601504
12	1	55.9	10	-	-	845537
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5326			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Starting Location Within Interval (μsec)
1	3	83.4	8	1790	1772	106347
2	3	95.5	8	1358	1584	396185
3	3	91.4	8	1935	1231	686202
4	2	82.8	8	1615	-	977559
5	3	84.5	8	1076	1355	70699
6	1	66	8	-	-	361390
7	1	54.1	8	-	-	652401
8	2	82.4	8	1562	-	941797
9	1	59.5	8	-	-	35009
10	2	82.6	8	1778	-	325274
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Channel 100 Bandwidth 20MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 100 Bandwidth 20MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	1222.49	818	Yes
2	10	1432.66	698	Yes
3	18	1165.50	858	Yes
4	21	1089.32	918	Yes
5	9	1474.93	678	Yes
6	23	326.16	3066	Yes
7	5	1672.24	598	Yes
8	13	1319.26	758	Yes
9	2	1858.74	538	Yes
10	14	1285.35	778	Yes
11	4	1730.10	578	Yes
12	15	1253.13	798	Yes
13	12	1355.01	738	Yes
14	7	1567.40	638	Yes
15	20	1113.59	898	Yes
16		424.09	2358	Yes
17		496.28	2015	Yes
18		550.36	1817	Yes
19		411.52	2430	Yes
20		402.90	2482	Yes
21		381.24	2623	Yes
22		406.50	2460	Yes
23		399.84	2501	Yes
24		454.34	2201	Yes
25		1748.25	572	Yes
26		354.61	2820	Yes
27		331.02	3021	Yes
28		993.05	1007	Yes
29		607.53	1646	Yes
30		954.20	1048	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	23	1.00	224	Yes
2	27	3.50	175	Yes
3	28	4.00	203	Yes
4	24	1.70	206	Yes
5	27	3.70	172	Yes
6	23	1.40	223	Yes
7	26	2.70	208	Yes
8	28	4.20	225	No
9	24	1.70	153	Yes
10	26	3.00	160	Yes
11	29	4.90	187	Yes
12	29	4.90	158	Yes
13	29	4.60	174	Yes
14	29	4.60	186	Yes
15	27	3.70	188	Yes
16	28	3.90	178	Yes
17	23	1.00	210	Yes
18	29	4.80	191	Yes
19	26	3.20	168	Yes
20	27	3.80	201	Yes
21	26	3.30	212	Yes
22	26	3.10	197	Yes
23	27	3.40	177	Yes
24	23	1.20	229	Yes
25	26	2.90	209	Yes
26	26	3.10	228	Yes
27	25	2.70	180	Yes
28	28	3.90	218	Yes
29	25	2.50	198	Yes
30	24	1.90	222	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	16	6.00	490	Yes
2	17	8.50	272	Yes
3	18	9.00	252	Yes
4	16	6.70	256	Yes
5	17	8.70	229	Yes
6	16	6.40	287	Yes
7	17	7.70	355	Yes
8	18	9.20	450	Yes
9	16	6.70	332	Yes
10	17	8.00	205	Yes
11	18	9.90	336	Yes
12	18	9.90	282	Yes
13	18	9.60	493	Yes
14	18	9.60	268	Yes
15	17	8.70	262	Yes
16	18	8.90	455	Yes
17	16	6.00	463	Yes
18	18	9.80	298	Yes
19	17	8.20	266	Yes
20	18	8.80	319	Yes
21	17	8.30	259	Yes
22	17	8.10	207	Yes
23	17	8.40	235	Yes
24	16	6.20	250	Yes
25	17	7.90	200	Yes
26	17	8.10	478	Yes
27	17	7.70	306	Yes
28	18	8.90	339	Yes
29	17	7.50	351	Yes
30	16	6.90	353	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	11.10	490	Yes
2	15	16.60	272	Yes
3	15	17.70	252	Yes
4	12	12.70	256	Yes
5	15	17.00	229	Yes
6	12	12.00	287	Yes
7	14	14.90	355	Yes
8	15	18.20	450	Yes
9	12	12.50	332	Yes
10	14	15.60	205	Yes
11	16	19.70	336	Yes
12	16	19.70	282	Yes
13	16	19.00	493	Yes
14	16	19.10	268	Yes
15	15	17.00	262	Yes
16	15	17.50	455	Yes
17	12	11.00	463	Yes
18	16	19.40	298	Yes
19	14	15.90	266	Yes
20	15	17.30	319	Yes
21	14	16.10	259	Yes
22	14	15.70	207	Yes
23	14	16.40	235	Yes
24	12	11.60	250	Yes
25	14	15.30	200	Yes
26	14	15.80	478	Yes
27	14	14.70	306	No
28	15	17.50	339	Yes
29	13	14.30	351	Yes
30	13	13.00	353	Yes