

RF Test Data for 2.4G Wi-Fi (Conducted Measurements)

General Description of EUT	
EUT Name:	AI Digital Frame
Model:	ADF1001
Sample ID:	HC-C-202607-0310-01-01
Test Standard:	FCC Part 15.247
Environmental Conditions	
Ambient Temperature:	25.6℃
Ambient Humidity:	45.2%RH
Test Power Supply:	DC 12V
Test Engineer:	Lily zhang
Note: For a more detailed features description, please refer to the report TBR-C-202607-0310-12	

Contents



1: DTS Bandwidth.....	3
1.1 Test Result.....	3
1.2 Test Graphs	4
2: Occupied Channel Bandwidth	7
2.1 Test Result.....	7
2.2 Test Graphs	8
3: Maximum conducted output power.....	11
3.1 Test Result Average	11
4: Maximum power spectral density	12
4.1 Test Result.....	12
4.2 Test Graphs	13
5: Band edge measurements.....	16
5.1 Test Result.....	16
5.2 Test Graphs	17
6: Conducted Spurious Emission.....	19
6.1 Test Result.....	19
6.2 Test Graphs	21
7: Duty Cycle	30
7.1 Test Result.....	30
7.2 Test Graphs	31
8: Emissions in Restricted Bands.....	34
8.1 Test Result.....	34
8.2 Test Graphs	36

1: DTS Bandwidth


1.1 Test Result

TestMode	Ant.	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.08	2408.44	2415.52	0.5	PASS
11B	Ant1	2437	8.04	2432.48	2440.52	0.5	PASS
11B	Ant1	2462	8.12	2457.92	2466.04	0.5	PASS
11G	Ant1	2412	16.40	2403.76	2420.16	0.5	PASS
11G	Ant1	2437	16.32	2428.80	2445.12	0.5	PASS
11G	Ant1	2462	16.36	2453.80	2470.16	0.5	PASS
11N20SISO	Ant1	2412	17.56	2403.20	2420.76	0.5	PASS
11N20SISO	Ant1	2437	17.60	2428.16	2445.76	0.5	PASS
11N20SISO	Ant1	2462	17.60	2453.16	2470.76	0.5	PASS
11N40SISO	Ant1	2422	36.40	2403.76	2440.16	0.5	PASS
11N40SISO	Ant1	2437	33.76	2420.68	2454.44	0.5	PASS
11N40SISO	Ant1	2452	35.68	2433.84	2469.52	0.5	PASS
11AX20SISO	Ant1	2412	16.60	2402.92	2419.52	0.5	PASS
11AX20SISO	Ant1	2437	19.00	2427.44	2446.44	0.5	PASS
11AX20SISO	Ant1	2462	18.64	2452.60	2471.24	0.5	PASS
11AX40SISO	Ant1	2422	36.16	2403.36	2439.52	0.5	PASS
11AX40SISO	Ant1	2437	37.84	2417.96	2455.80	0.5	PASS
11AX40SISO	Ant1	2452	37.76	2432.96	2470.72	0.5	PASS


1.2 Test Graphs

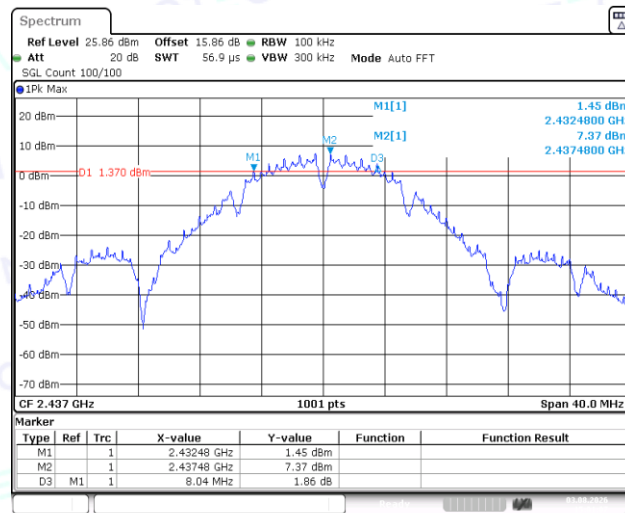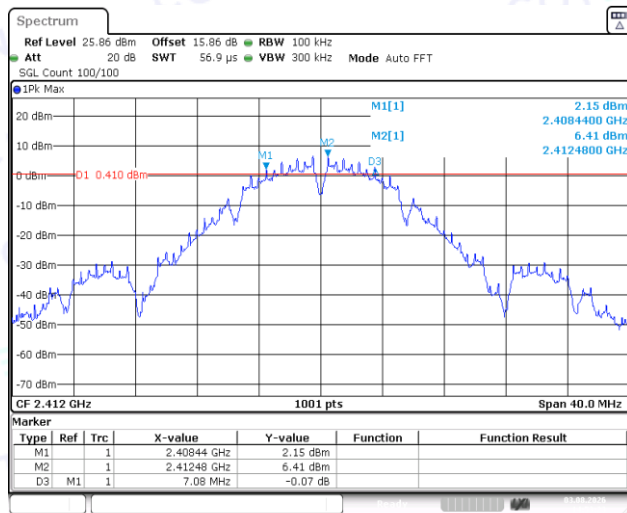


11B-Ant1-2412-PASS

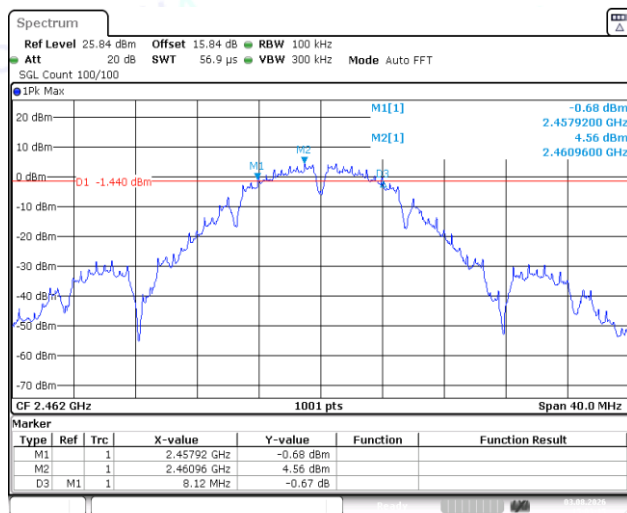


11B-Ant1-2437-PASS

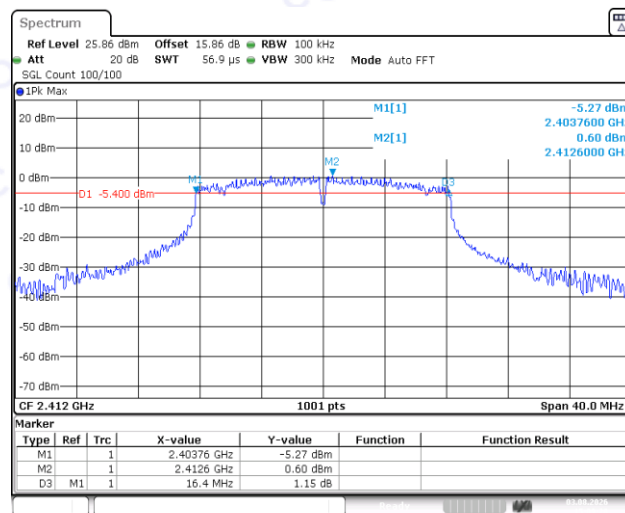

11B-Ant1-2462-PASS


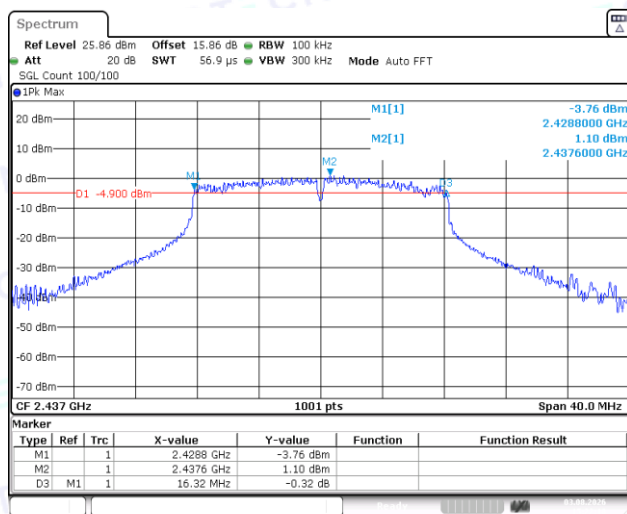


11G-Ant1-2412-PASS

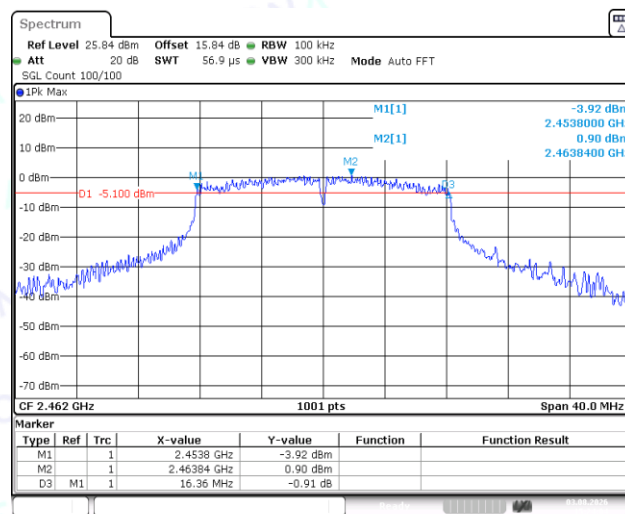



11G-Ant1-2437-PASS

11G-Ant1-2462-PASS

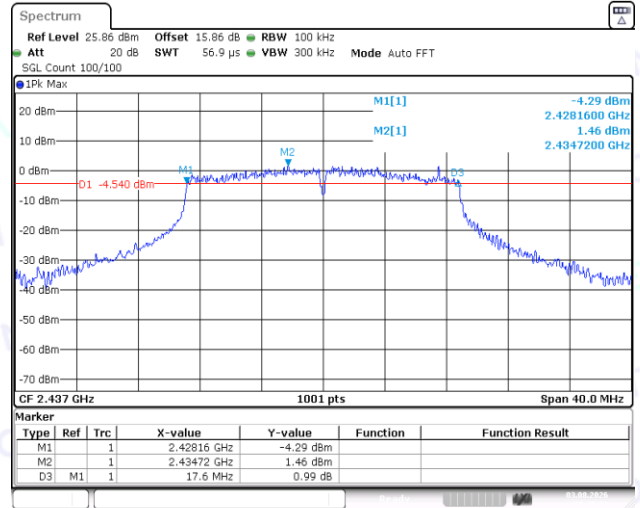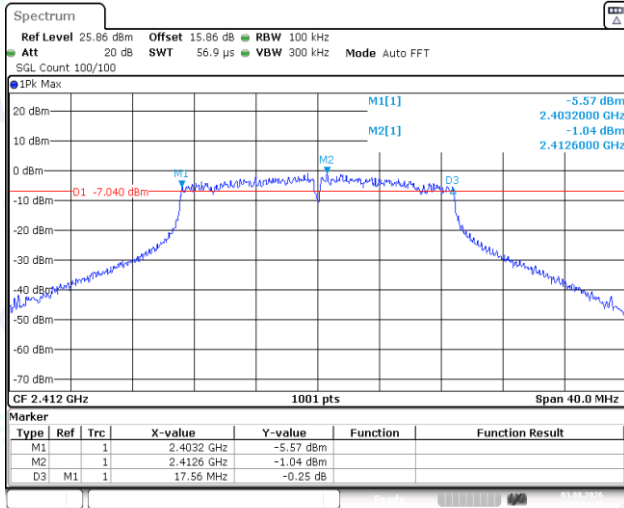



11N20SISO-Ant1-2412-PASS

11N20SISO-Ant1-2437-PASS

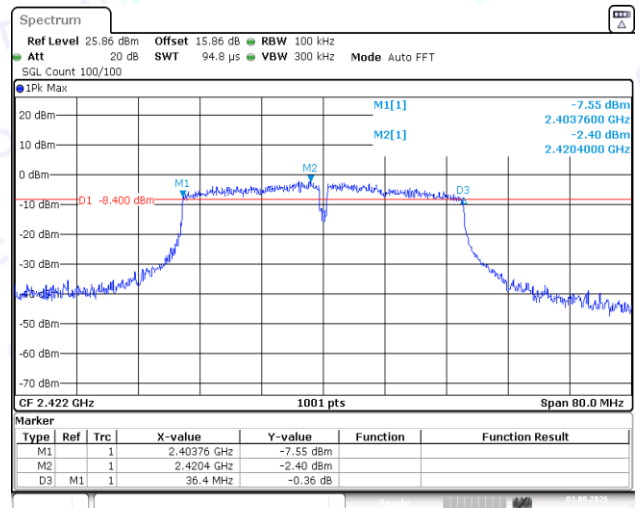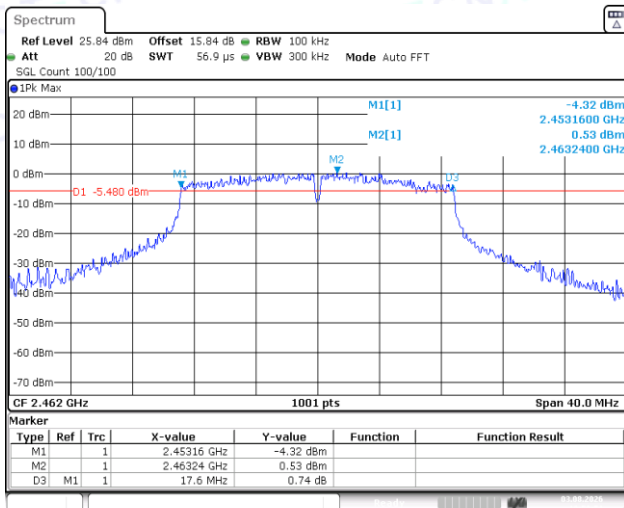



11N20SISO-Ant1-2462-PASS

11N40SISO-Ant1-2422-PASS

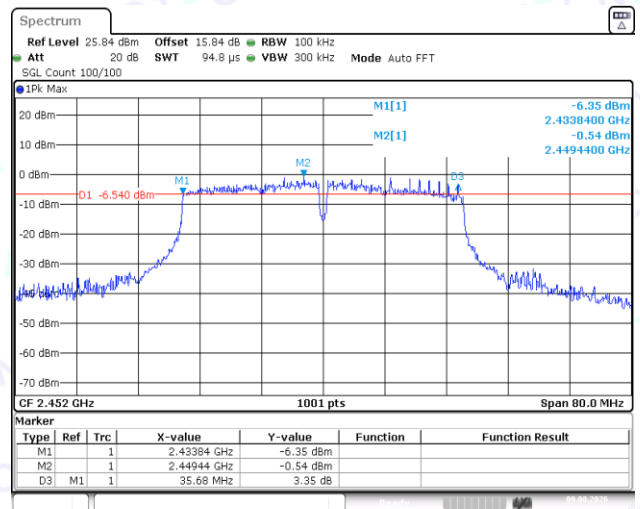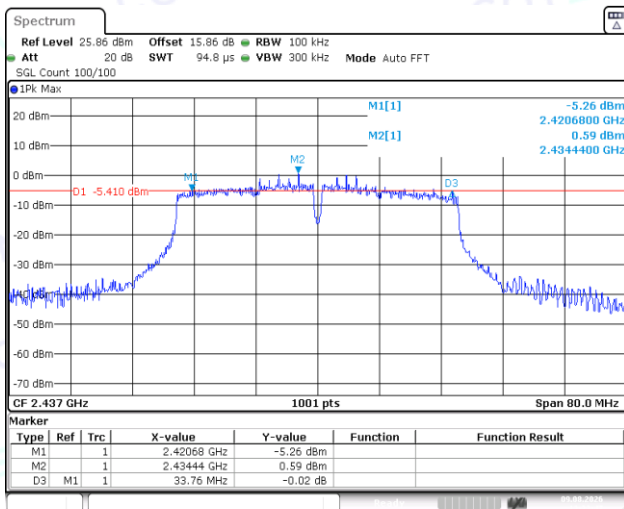


11N40SISO-Ant1-2437-PASS


11N40SISO-Ant1-2452-PASS

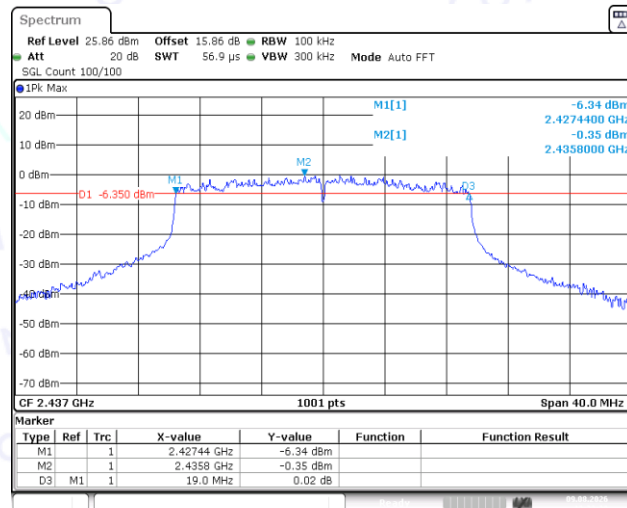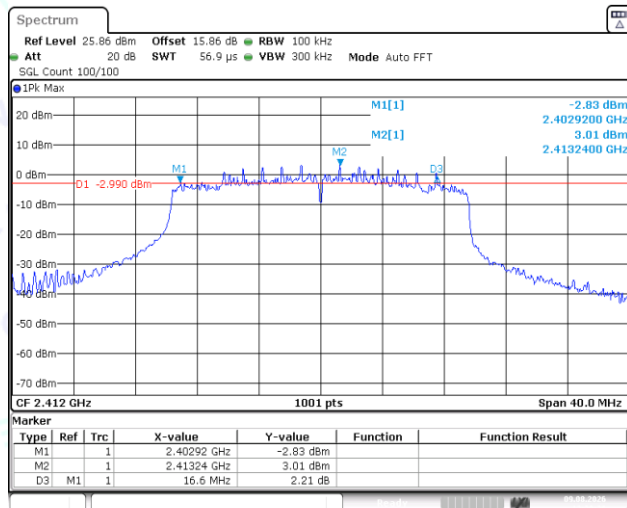


11AX20SISO-Ant1-2412-PASS

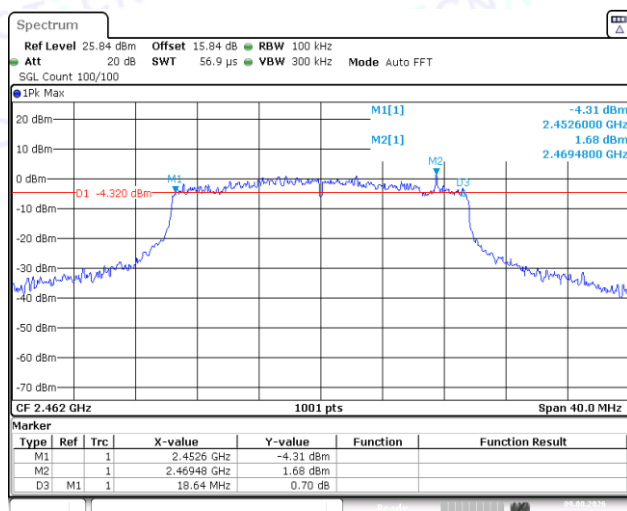


11AX20SISO-Ant1-2437-PASS

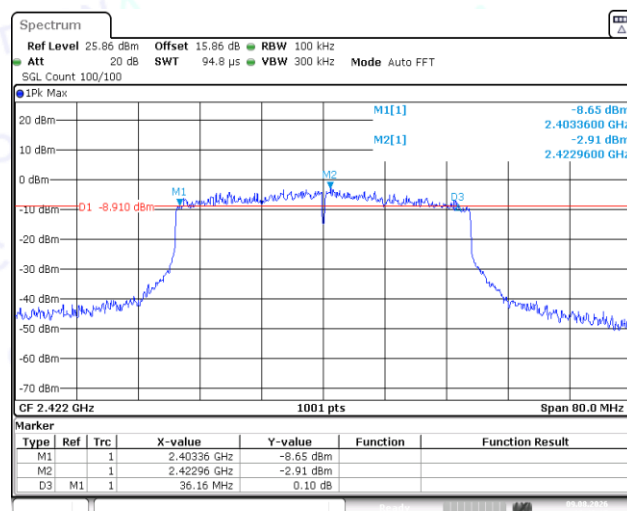

11AX20SISO-Ant1-2462-PASS

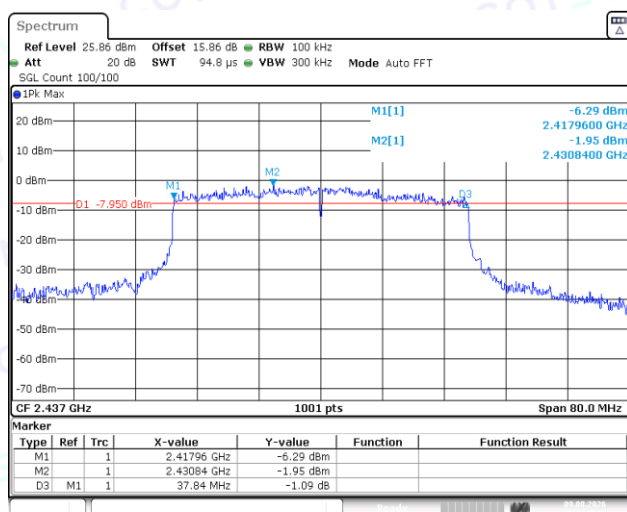

11AX40SISO-Ant1-2422-PASS

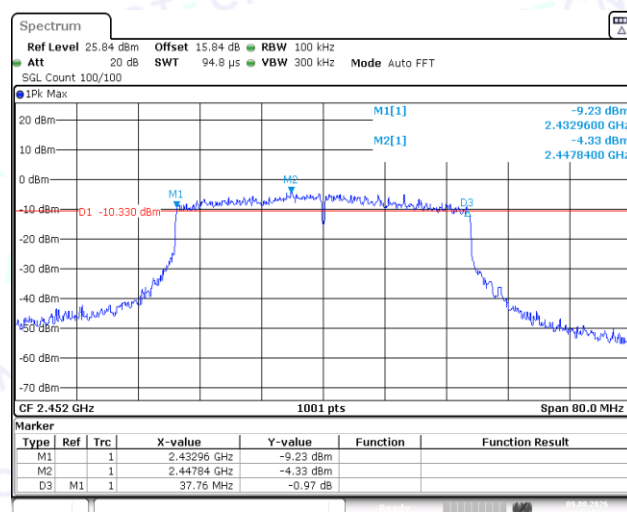

11AX40SISO-Ant1-2437-PASS



11AX40SISO-Ant1-2452-PASS

2: Occupied Channel Bandwidth


2.1 Test Result

TestMode	Ant.	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.747	2405.6464	2418.3936	---	---
11B	Ant1	2437	13.307	2430.2867	2443.5934	---	---
11B	Ant1	2462	12.867	2455.4865	2468.3536	---	---
11G	Ant1	2412	17.303	2403.1688	2420.4715	---	---
11G	Ant1	2437	17.263	2428.0889	2445.3516	---	---
11G	Ant1	2462	17.183	2453.4086	2470.5914	---	---
11N20SISO	Ant1	2412	17.982	2403.0490	2421.0310	---	---
11N20SISO	Ant1	2437	18.262	2427.7293	2445.9910	---	---
11N20SISO	Ant1	2462	18.741	2452.3297	2471.0709	---	---
11N40SISO	Ant1	2422	36.603	2403.6983	2440.3017	---	---
11N40SISO	Ant1	2437	36.284	2418.6983	2454.9820	---	---
11N40SISO	Ant1	2452	36.523	2433.7782	2470.3017	---	---
11AX20SISO	Ant1	2412	19.301	2402.3297	2421.6304	---	---
11AX20SISO	Ant1	2437	19.021	2427.4496	2446.4705	---	---
11AX20SISO	Ant1	2462	18.981	2452.5295	2471.5105	---	---
11AX40SISO	Ant1	2422	37.882	2402.9790	2440.8611	---	---
11AX40SISO	Ant1	2437	38.042	2417.6593	2455.7013	---	---
11AX40SISO	Ant1	2452	37.642	2433.0589	2470.7013	---	---


2.2 Test Graphs

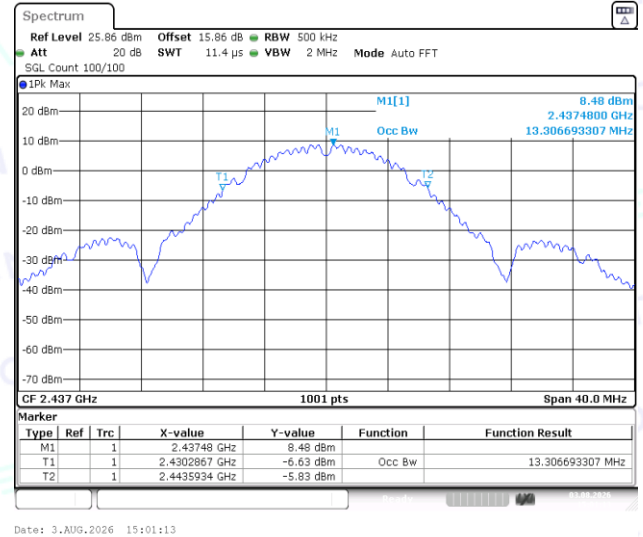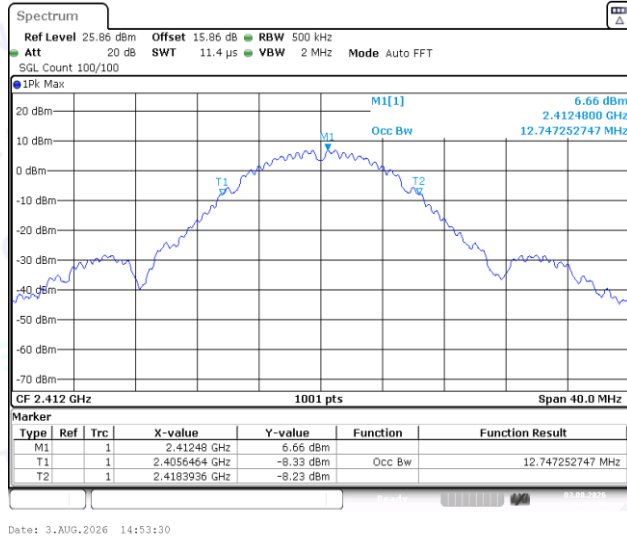


11B-Ant1-2412

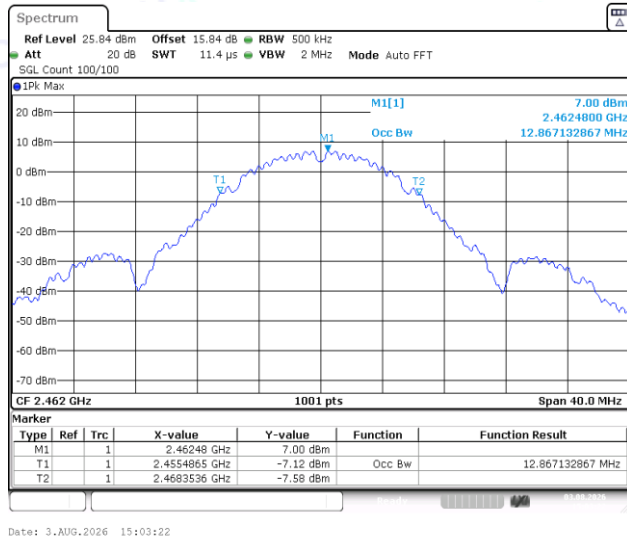


11B-Ant1-2437

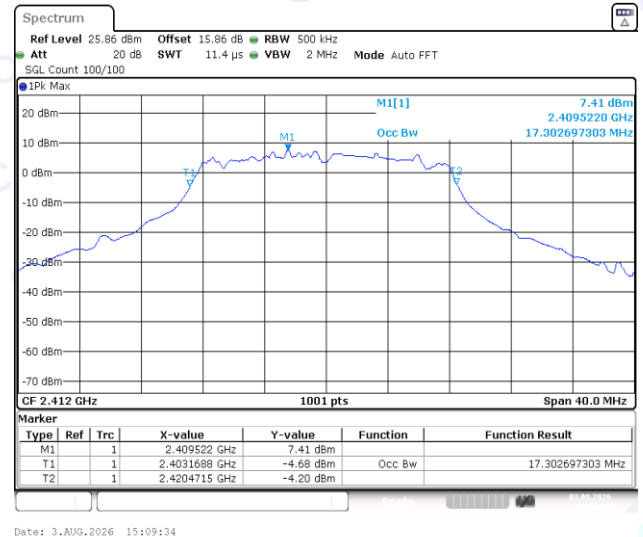

11B-Ant1-2462


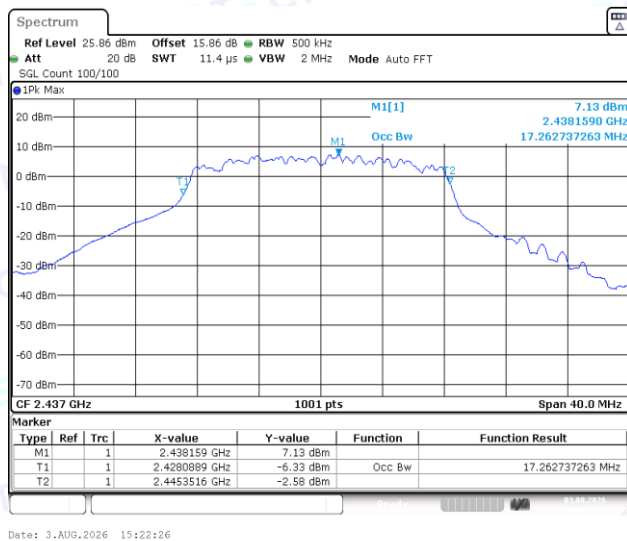


11G-Ant1-2412

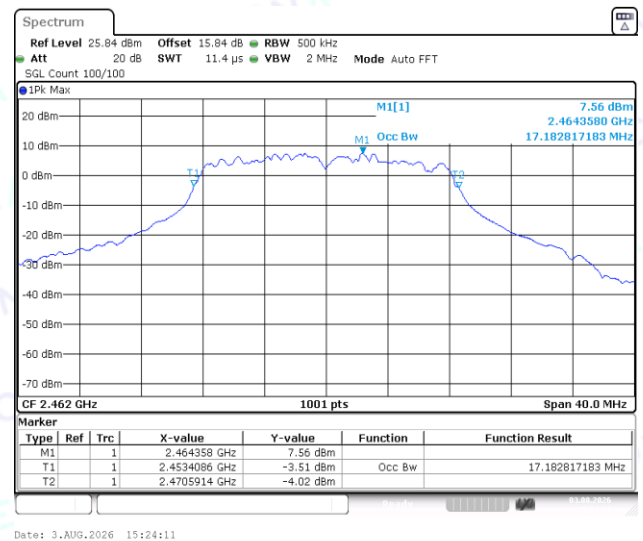


11G-Ant1-2437


11G-Ant1-2462

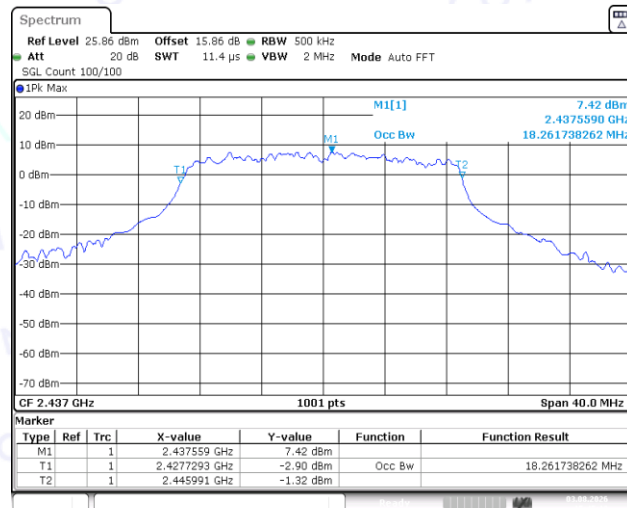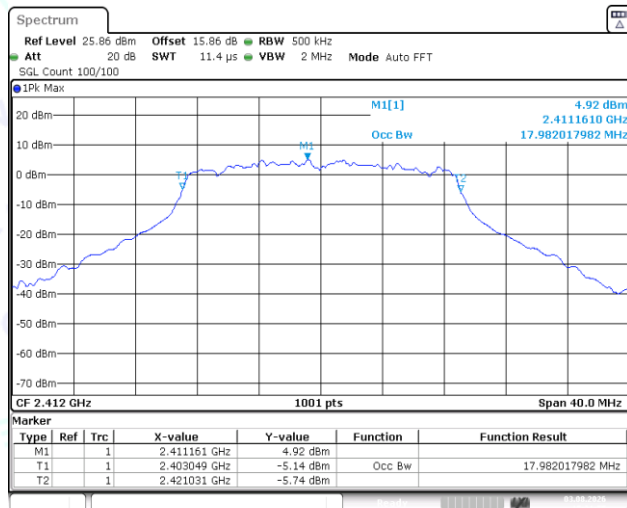


11N20SISO-Ant1-2412

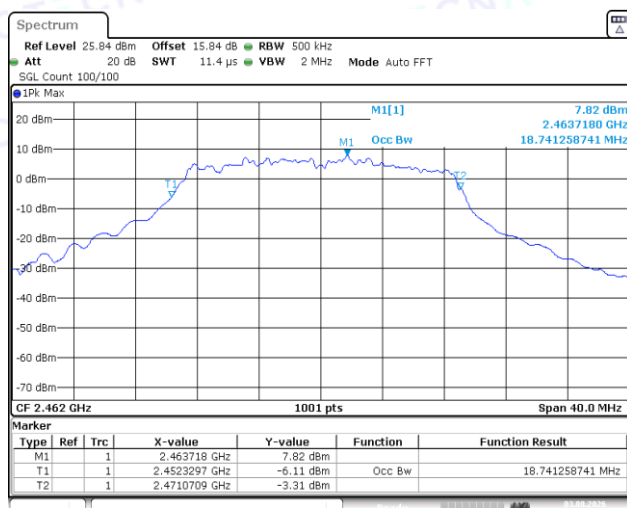


11N20SISO-Ant1-2437

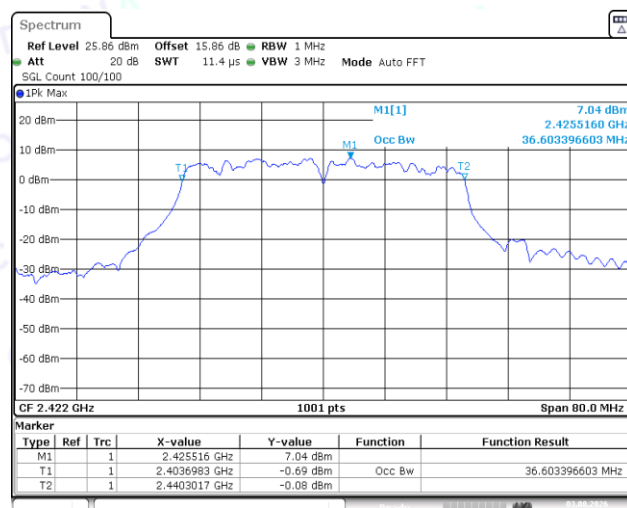

11N20SISO-Ant1-2462


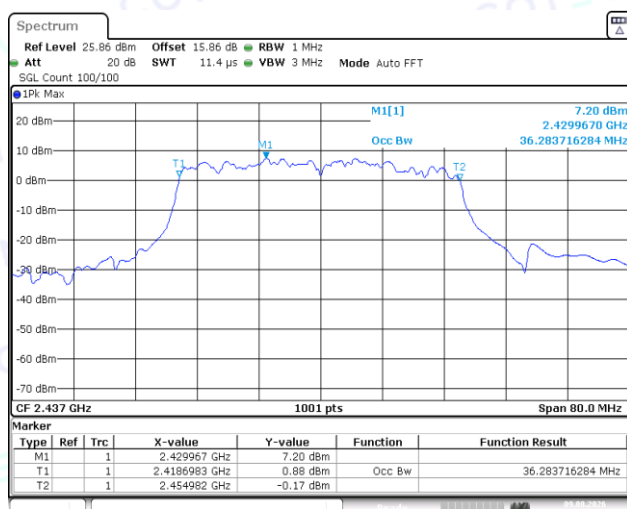


11N40SISO-Ant1-2422

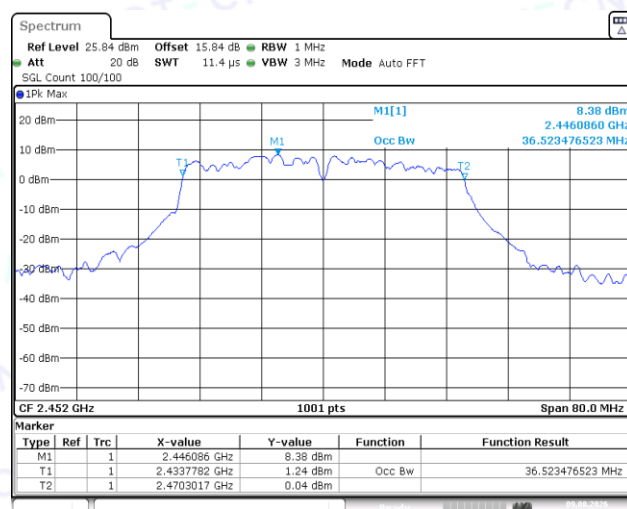



11N40SISO-Ant1-2437

11N40SISO-Ant1-2452

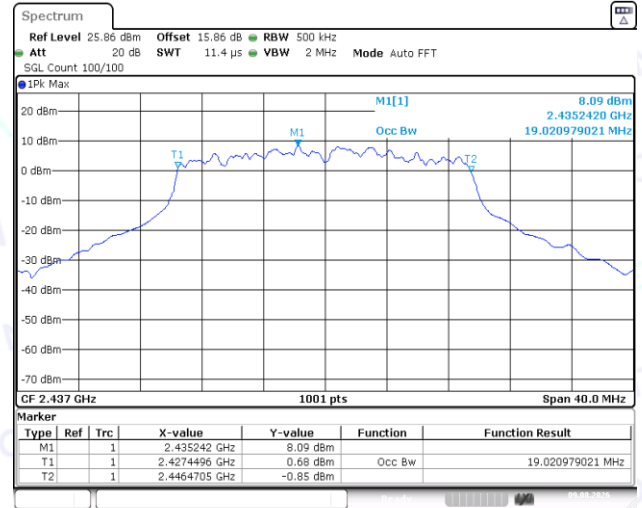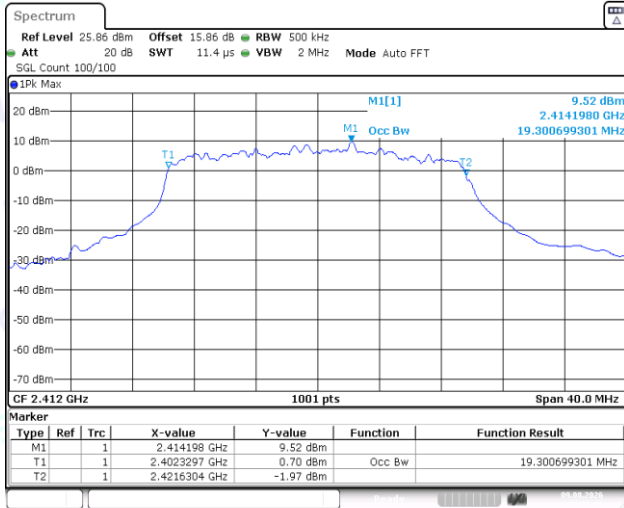



11AX20SISO-Ant1-2412

11AX20SISO-Ant1-2437

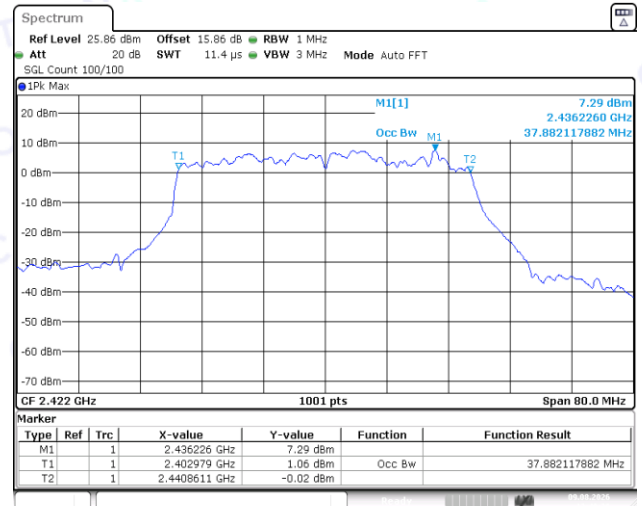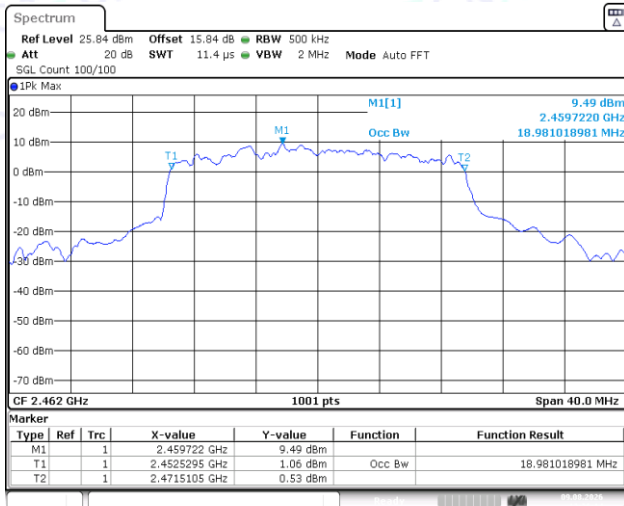

11AX20SISO-Ant1-2462

11AX40SISO-Ant1-2422

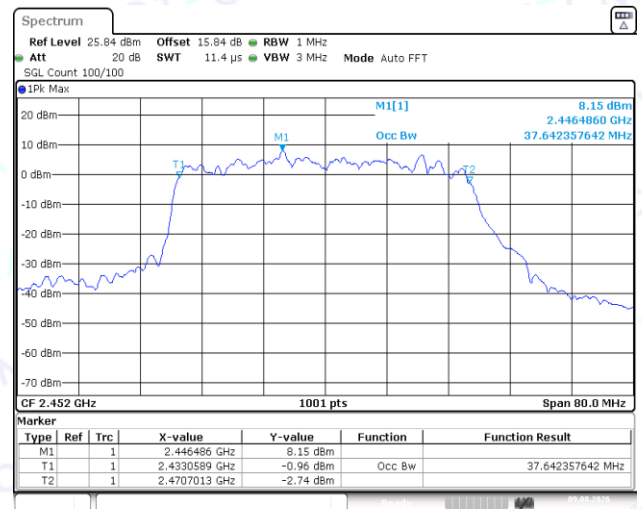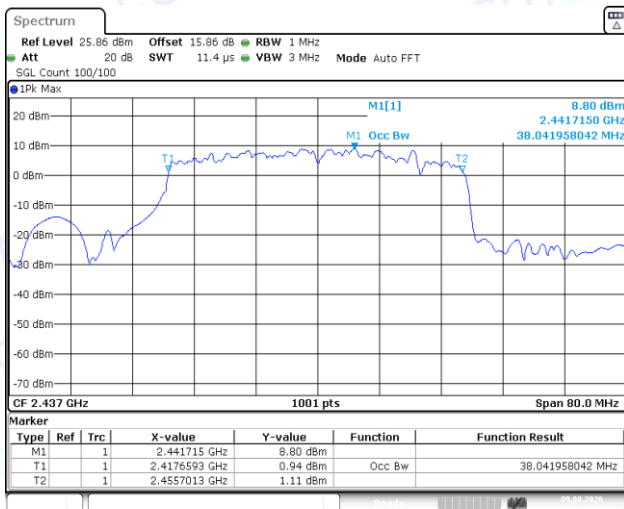

11AX40SISO-Ant1-2437

11AX40SISO-Ant1-2452

3: Maximum conducted output power

3.1 Test Result Average

Test Mode	Ant.	Frequency [MHz]	Raw Power [dBm]	DC Factor	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	13.30	0.37	13.67	≤30.00	PASS
11B	Ant1	2437	15.85	0.37	16.22	≤30.00	PASS
11B	Ant1	2462	15.86	0.37	16.23	≤30.00	PASS
11G	Ant1	2412	11.56	1.83	13.39	≤30.00	PASS
11G	Ant1	2437	13.23	1.83	15.06	≤30.00	PASS
11G	Ant1	2462	13.68	1.83	15.51	≤30.00	PASS
11N20SISO	Ant1	2412	13.10	0.79	13.89	≤30.00	PASS
11N20SISO	Ant1	2437	14.82	0.82	15.64	≤30.00	PASS
11N20SISO	Ant1	2462	14.24	0.79	15.03	≤30.00	PASS
11N40SISO	Ant1	2422	11.57	0.84	12.41	≤30.00	PASS
11N40SISO	Ant1	2437	14.20	0.82	15.02	≤30.00	PASS
11N40SISO	Ant1	2452	11.87	0.84	12.71	≤30.00	PASS
11AX20SISO	Ant1	2412	13.74	1.04	14.78	≤30.00	PASS
11AX20SISO	Ant1	2437	14.72	1.04	15.76	≤30.00	PASS
11AX20SISO	Ant1	2462	13.01	1.04	14.05	≤30.00	PASS
11AX40SISO	Ant1	2422	11.91	1.04	12.95	≤30.00	PASS
11AX40SISO	Ant1	2437	14.13	1.04	15.17	≤30.00	PASS
11AX40SISO	Ant1	2452	11.58	1.02	12.60	≤30.00	PASS


4: Maximum power spectral density

4.1 Test Result


TestMode	Ant.	Frequency[MHz]	RawData [dBm/3kHz]	DC Factor	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.49	0.37	-15.12	≤8.00	PASS
11B	Ant1	2437	-15.45	0.37	-15.08	≤8.00	PASS
11B	Ant1	2462	-15.7	0.37	-15.33	≤8.00	PASS
11G	Ant1	2412	-21.84	1.83	-20.01	≤8.00	PASS
11G	Ant1	2437	-20.57	1.83	-18.74	≤8.00	PASS
11G	Ant1	2462	-19.83	1.83	-18.00	≤8.00	PASS
11N20SISO	Ant1	2412	-20.04	0.79	-19.25	≤8.00	PASS
11N20SISO	Ant1	2437	-19.02	0.82	-18.20	≤8.00	PASS
11N20SISO	Ant1	2462	-19.83	0.79	-19.04	≤8.00	PASS
11N40SISO	Ant1	2422	-24.65	0.84	-23.81	≤8.00	PASS
11N40SISO	Ant1	2437	-21.75	0.82	-20.93	≤8.00	PASS
11N40SISO	Ant1	2452	-24.46	0.84	-23.62	≤8.00	PASS
11AX20SISO	Ant1	2412	-20.83	1.04	-19.79	≤8.00	PASS
11AX20SISO	Ant1	2437	-19.46	1.04	-18.42	≤8.00	PASS
11AX20SISO	Ant1	2462	-21.2	1.04	-20.16	≤8.00	PASS
11AX40SISO	Ant1	2422	-24.95	1.04	-23.91	≤8.00	PASS
11AX40SISO	Ant1	2437	-22.99	1.04	-21.95	≤8.00	PASS
11AX40SISO	Ant1	2452	-25.33	1.02	-24.31	≤8.00	PASS

Note: RF Conducted test Offset= cable loss+ Attenuator


4.2 Test Graphs

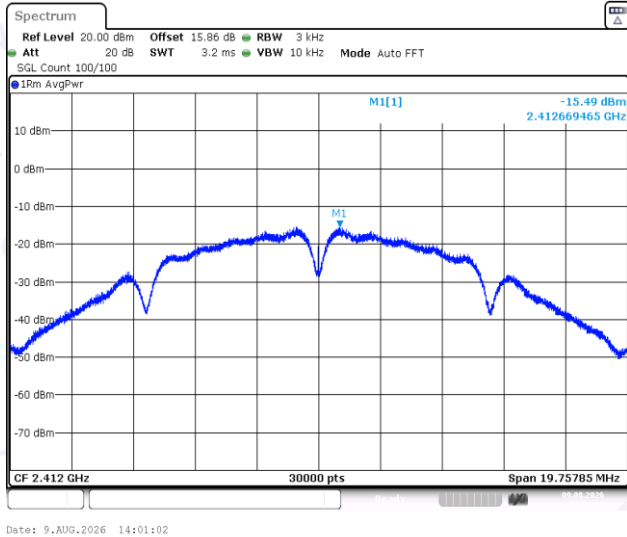


11B-Ant1-2412-PASS

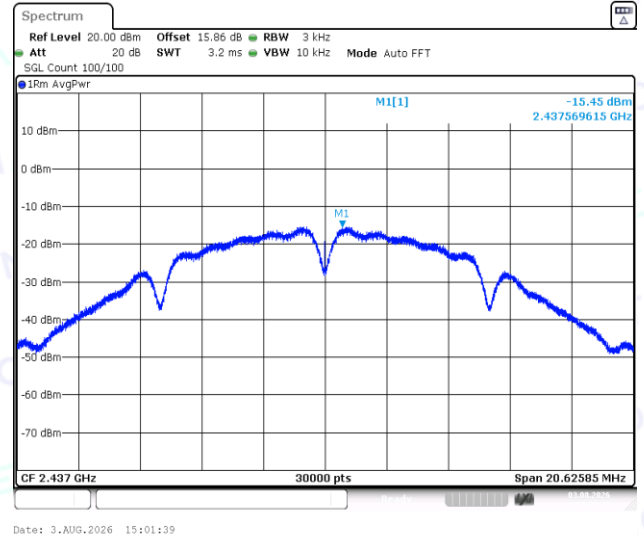


11B-Ant1-2437-PASS

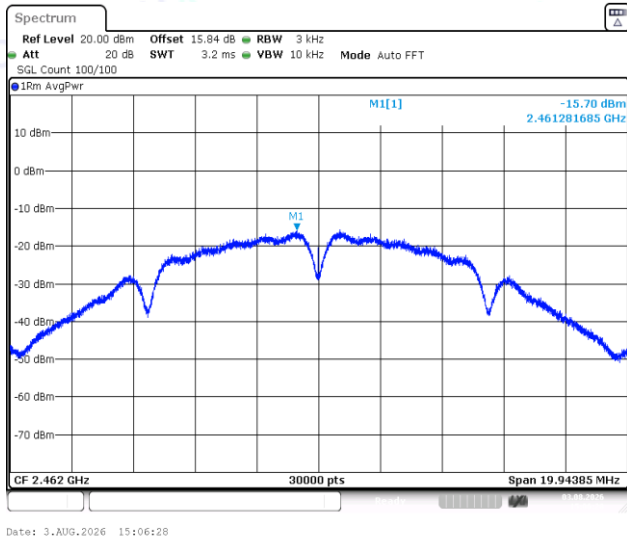


11B-Ant1-2462-PASS

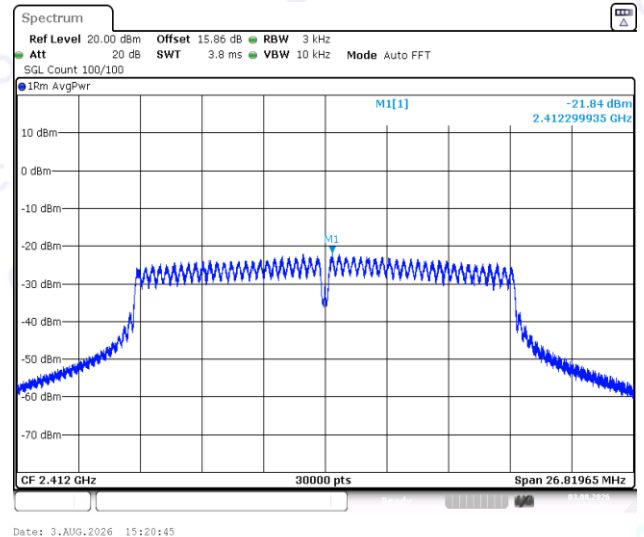



11G-Ant1-2412-PASS

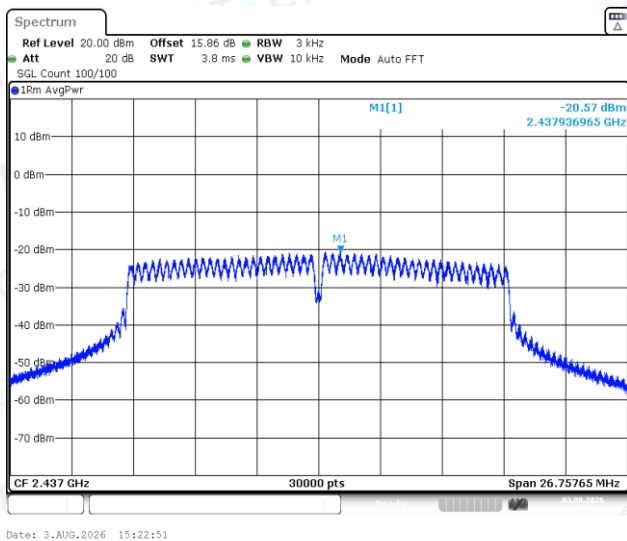

11G-Ant1-2437-PASS


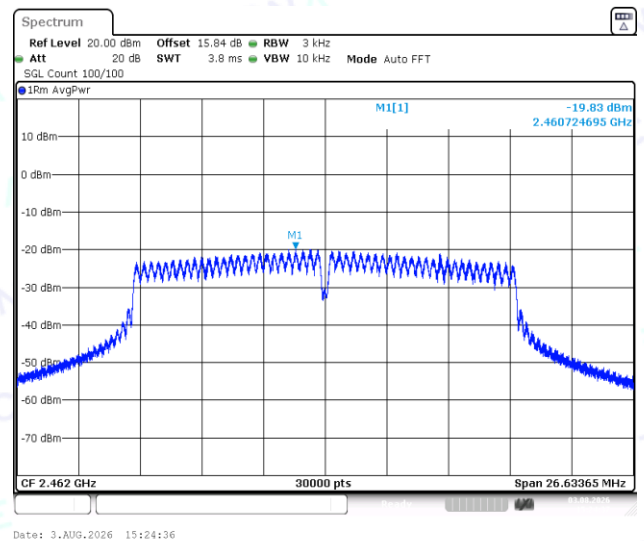


11G-Ant1-2462-PASS

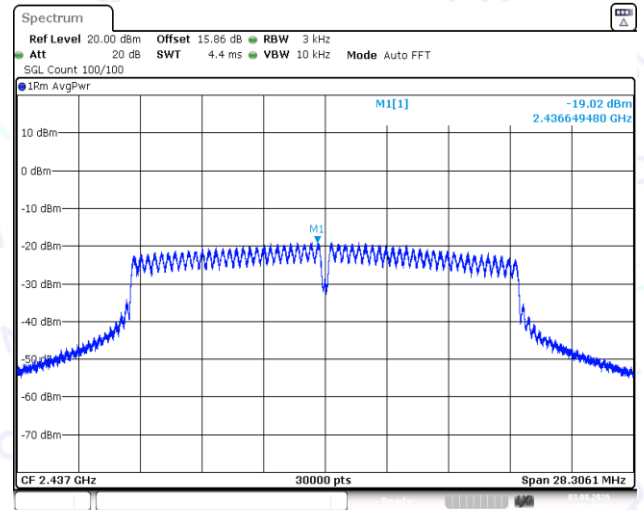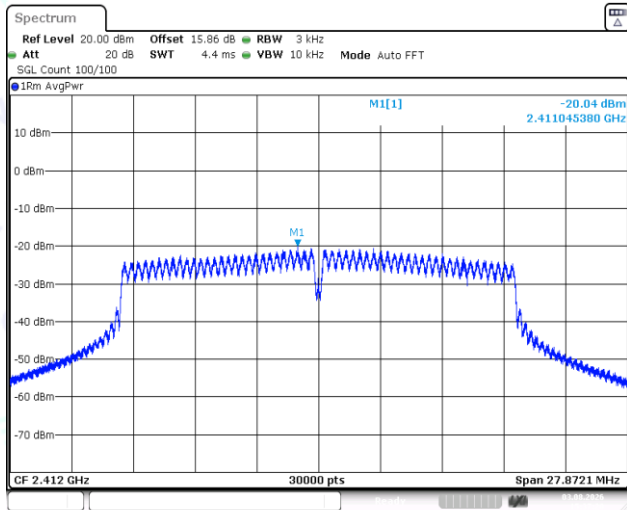



11N20SISO-Ant1-2412-PASS

11N20SISO-Ant1-2437-PASS

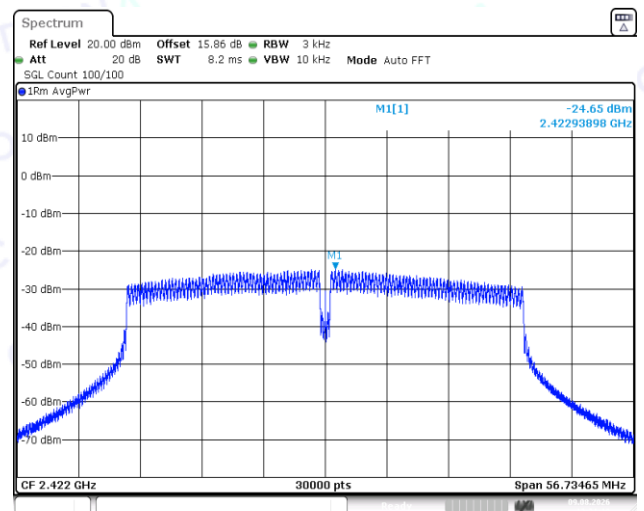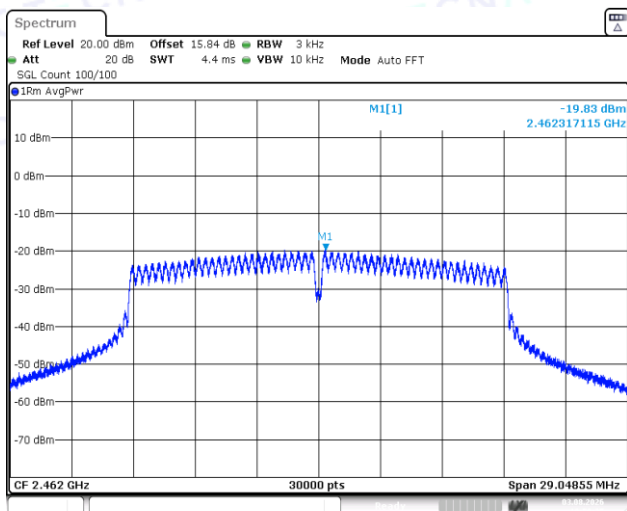


11N20SISO-Ant1-2462-PASS

11N40SISO-Ant1-2422-PASS

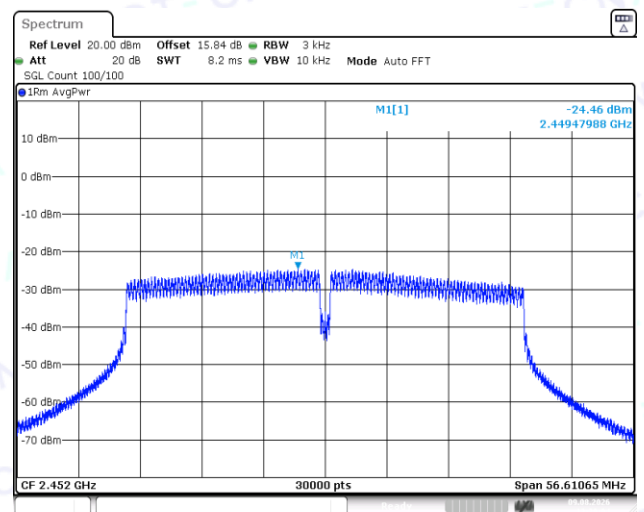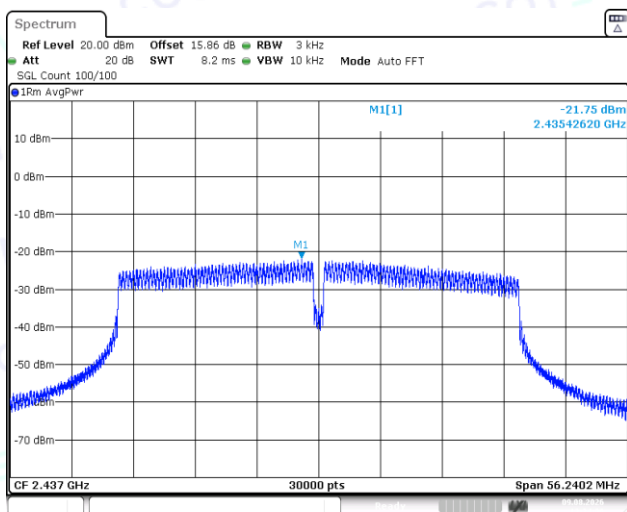


11N40SISO-Ant1-2437-PASS


11N40SISO-Ant1-2452-PASS

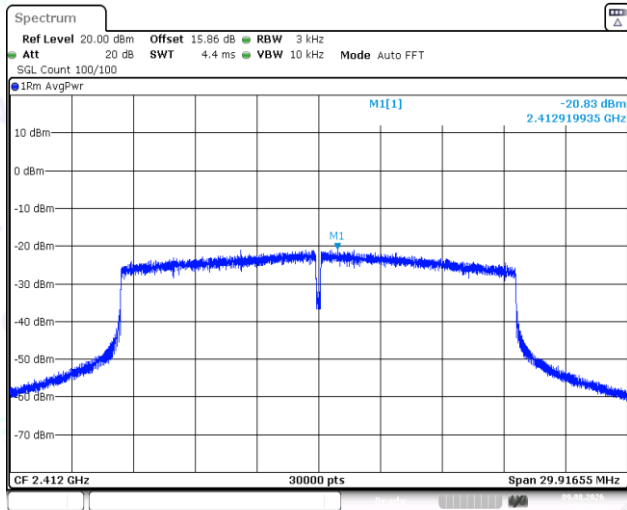


11AX20SISO-Ant1-2412-PASS

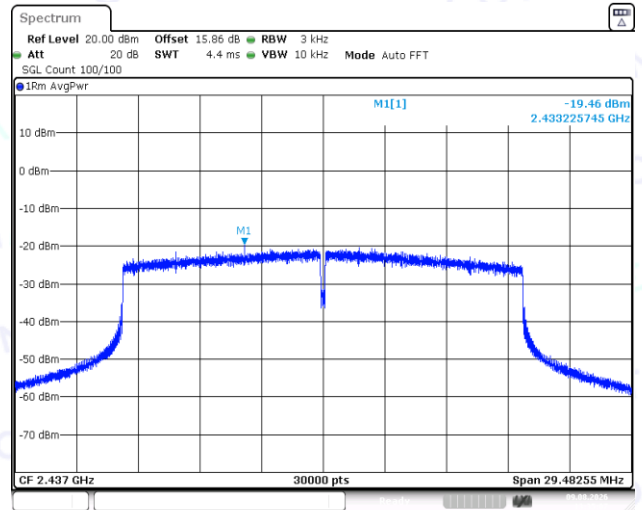


11AX20SISO-Ant1-2437-PASS

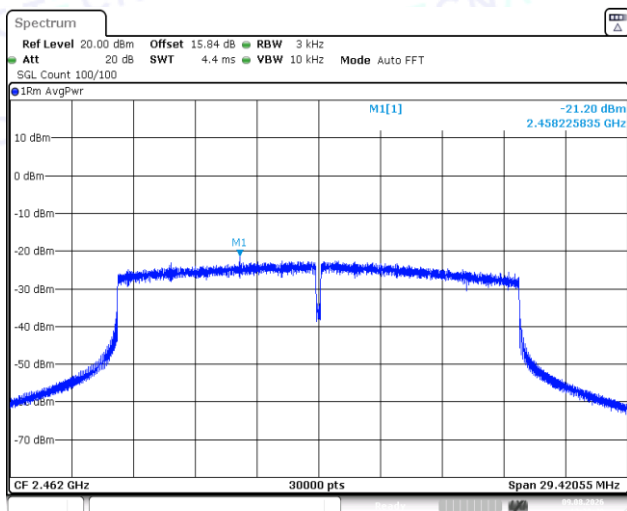


11AX20SISO-Ant1-2462-PASS

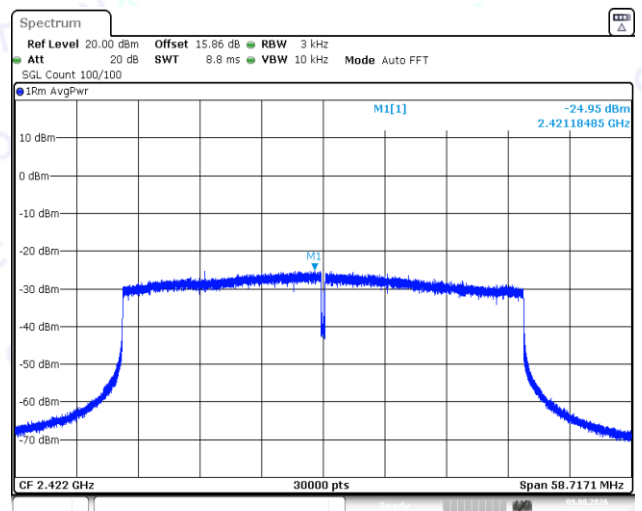

11AX40SISO-Ant1-2422-PASS

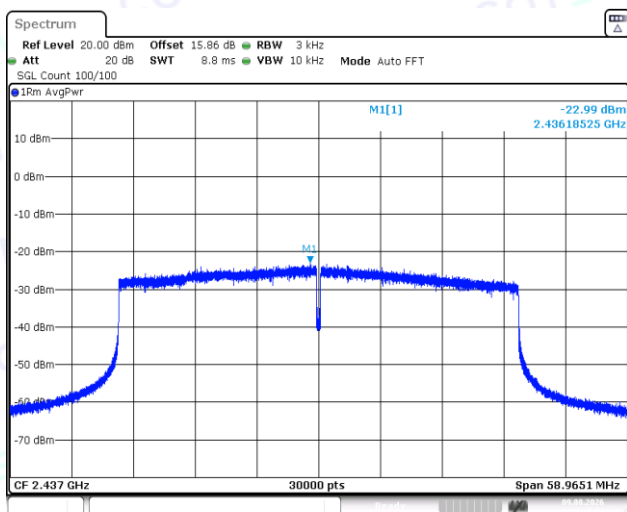

11AX40SISO-Ant1-2437-PASS

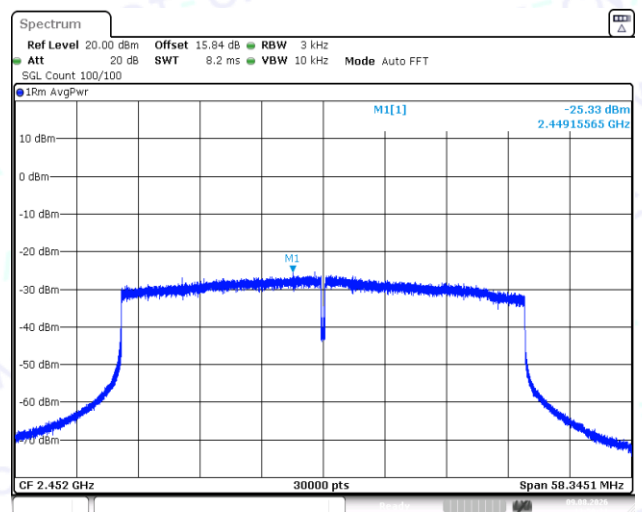


11AX40SISO-Ant1-2452-PASS

5: Band edge measurements


5.1 Test Result

TestMode	Ant.	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	6.54	-28.91	≤-23.46	PASS
11B	Ant1	High	2462	4.96	-49.51	≤-25.04	PASS
11G	Ant1	Low	2412	1.37	-29.57	≤-28.63	PASS
11G	Ant1	High	2462	1.80	-41.14	≤-28.2	PASS
11N20SISO	Ant1	Low	2412	3.97	-27.29	≤-26.03	PASS
11N20SISO	Ant1	High	2462	0.18	-40.5	≤-29.82	PASS
11N40SISO	Ant1	Low	2422	-4.09	-34.3	≤-34.09	PASS
11N40SISO	Ant1	High	2452	-4.11	-45.1	≤-34.11	PASS
11AX20SISO	Ant1	Low	2412	0.98	-29.98	≤-29.02	PASS
11AX20SISO	Ant1	High	2462	-0.80	-44.64	≤-30.8	PASS
11AX40SISO	Ant1	Low	2422	-0.01	-36.78	≤-30.01	PASS
11AX40SISO	Ant1	High	2452	-0.93	-47.53	≤-30.93	PASS

5.2 Test Graphs

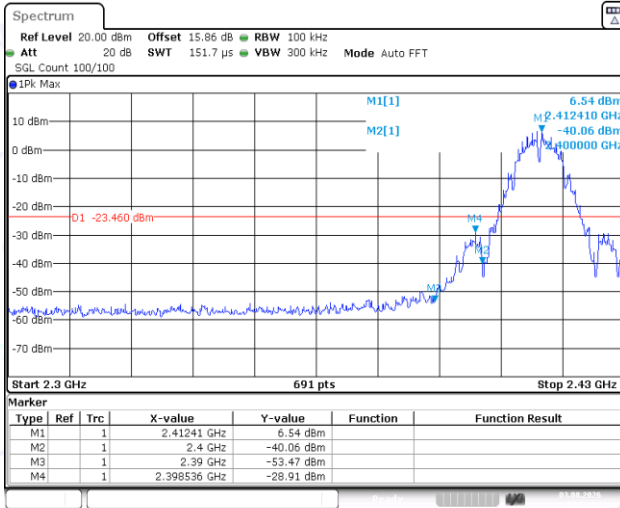


Date: 3.AUG.2026 14:54:04

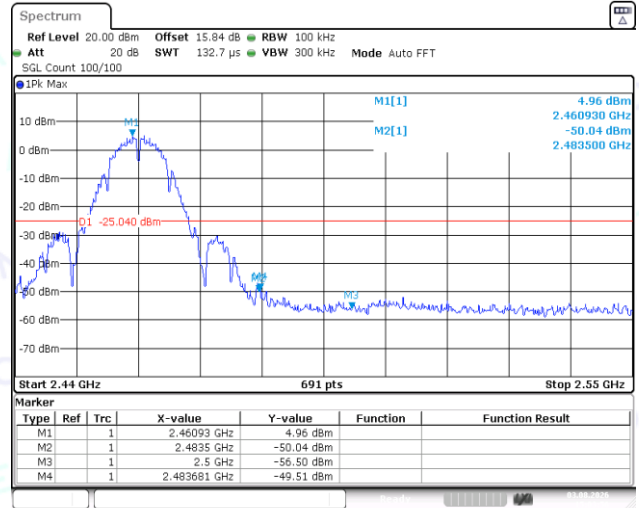


Date: 3.AUG.2026 15:03:56

11B-Ant1-2412-PASS

11B-Ant1-2462-PASS

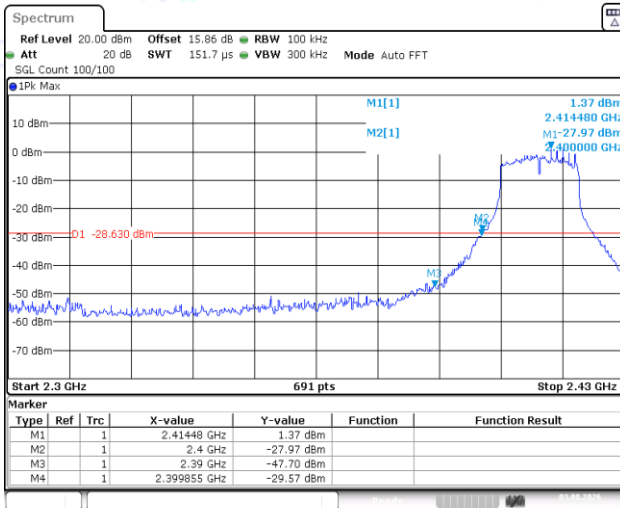


Date: 3.AUG.2026 15:19:11

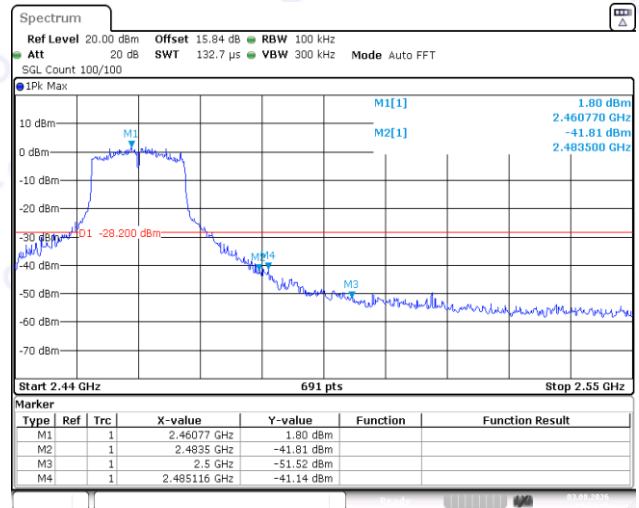


Date: 3.AUG.2026 15:24:45

11G-Ant1-2412-PASS

11G-Ant1-2462-PASS

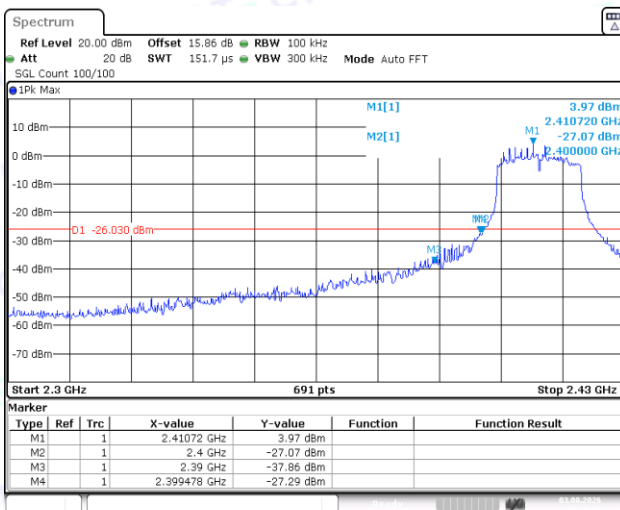



Date: 3.AUG.2026 15:36:25

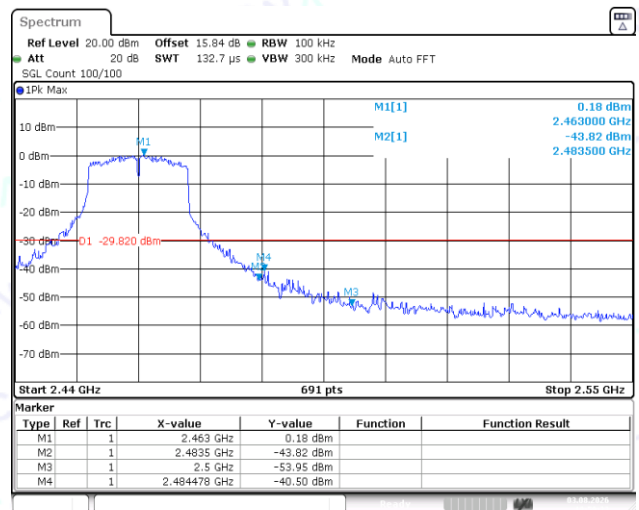


Date: 3.AUG.2026 18:59:33

11N20SISO-Ant1-2412-PASS


11N20SISO-Ant1-2462-PASS

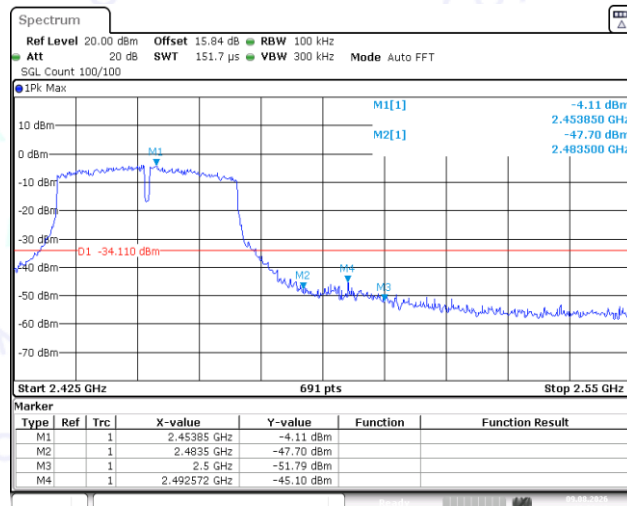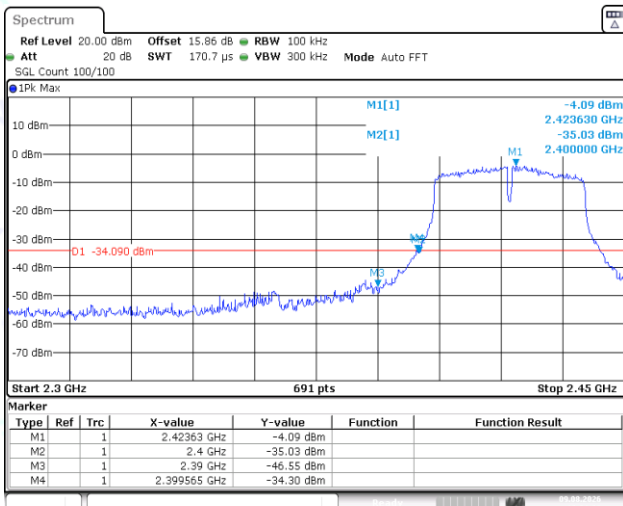


11N40SISO-Ant1-2422-PASS

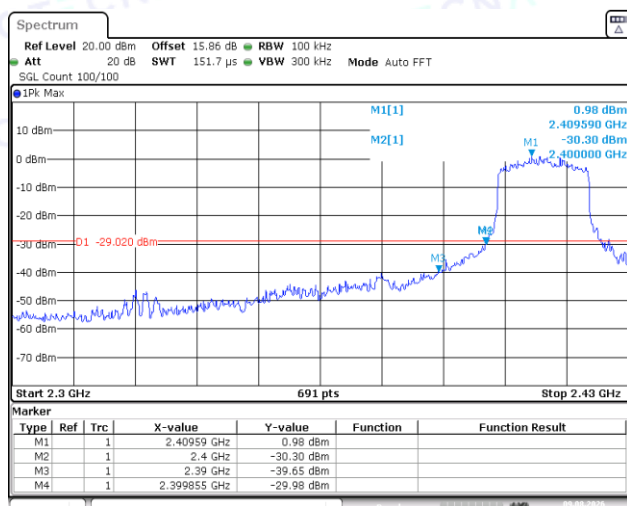


11N40SISO-Ant1-2452-PASS

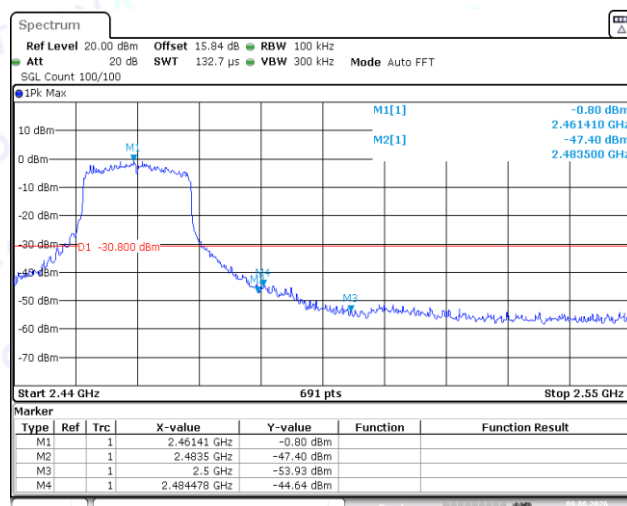

11AX20SISO-Ant1-2412-PASS

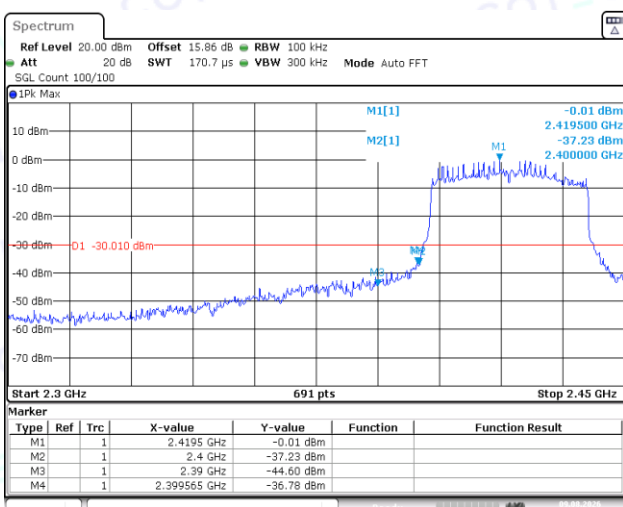

11AX20SISO-Ant1-2462-PASS

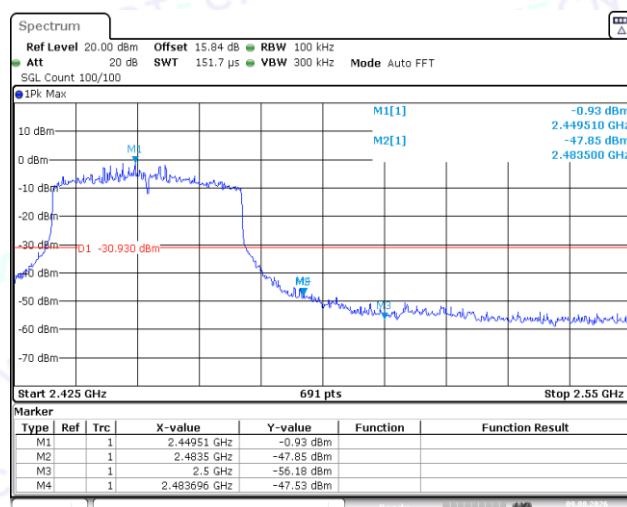

11AX40SISO-Ant1-2422-PASS

11AX40SISO-Ant1-2452-PASS


6: Conducted Spurious Emission

6.1 Test Result


TestMode	Ant.	Frequency [MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	3.76	3.76	---	PASS
11B	Ant1	2412	30~1000	3.76	-62.87	≤-26.24	PASS
11B	Ant1	2412	1000~26500	3.76	-37.19	≤-26.24	PASS
11B	Ant1	2437	0~Reference	5.51	5.51	---	PASS
11B	Ant1	2437	30~1000	5.51	-60.94	≤-24.49	PASS
11B	Ant1	2437	1000~26500	5.51	-37.42	≤-24.49	PASS
11B	Ant1	2462	0~Reference	5.37	5.37	---	PASS
11B	Ant1	2462	30~1000	5.37	-63.1	≤-24.63	PASS
11B	Ant1	2462	1000~26500	5.37	-36.67	≤-24.63	PASS
11G	Ant1	2412	0~Reference	-1.90	-1.90	---	PASS
11G	Ant1	2412	30~1000	-1.90	-63.6	≤-31.9	PASS
11G	Ant1	2412	1000~26500	-1.90	-37.18	≤-31.9	PASS
11G	Ant1	2437	0~Reference	0.24	0.24	---	PASS
11G	Ant1	2437	30~1000	0.24	-64.57	≤-29.76	PASS
11G	Ant1	2437	1000~26500	0.24	-37.05	≤-29.76	PASS
11G	Ant1	2462	0~Reference	0.05	0.05	---	PASS
11G	Ant1	2462	30~1000	0.05	-64.41	≤-29.95	PASS
11G	Ant1	2462	1000~26500	0.05	-36.46	≤-29.95	PASS
11N20SISO	Ant1	2412	0~Reference	-0.99	-0.99	---	PASS
11N20SISO	Ant1	2412	30~1000	-0.99	-64.38	≤-30.99	PASS
11N20SISO	Ant1	2412	1000~26500	-0.99	-37.48	≤-30.99	PASS
11N20SISO	Ant1	2437	0~Reference	0.28	0.28	---	PASS
11N20SISO	Ant1	2437	30~1000	0.28	-64.22	≤-29.72	PASS
11N20SISO	Ant1	2437	1000~26500	0.28	-37.38	≤-29.72	PASS
11N20SISO	Ant1	2462	0~Reference	-0.43	-0.43	---	PASS
11N20SISO	Ant1	2462	30~1000	-0.43	-63.95	≤-30.43	PASS
11N20SISO	Ant1	2462	1000~26500	-0.43	-36.95	≤-30.43	PASS
11N40SISO	Ant1	2422	0~Reference	-4.70	-4.70	---	PASS
11N40SISO	Ant1	2422	30~1000	-4.70	-64.64	≤-34.7	PASS
11N40SISO	Ant1	2422	1000~26500	-4.70	-36.97	≤-34.7	PASS
11N40SISO	Ant1	2437	0~Reference	-1.73	-1.73	---	PASS
11N40SISO	Ant1	2437	30~1000	-1.73	-62.39	≤-31.73	PASS
11N40SISO	Ant1	2437	1000~26500	-1.73	-36.01	≤-31.73	PASS
11N40SISO	Ant1	2452	0~Reference	-4.64	-4.64	---	PASS
11N40SISO	Ant1	2452	30~1000	-4.64	-62.78	≤-34.64	PASS
11N40SISO	Ant1	2452	1000~26500	-4.64	-37.49	≤-34.64	PASS
11AX20SISO	Ant1	2412	0~Reference	0.45	0.45	---	PASS
11AX20SISO	Ant1	2412	30~1000	0.45	-63.25	≤-29.55	PASS
11AX20SISO	Ant1	2412	1000~26500	0.45	-36.98	≤-29.55	PASS
11AX20SISO	Ant1	2437	0~Reference	0.05	0.05	---	PASS
11AX20SISO	Ant1	2437	30~1000	0.05	-64.16	≤-29.95	PASS

11AX20SISO	Ant1	2437	1000~26500	0.05	-37.32	≤ -29.95	PASS
11AX20SISO	Ant1	2462	0~Reference	-1.05	-1.05	---	PASS
11AX20SISO	Ant1	2462	30~1000	-1.05	-64.43	≤ -31.05	PASS
11AX20SISO	Ant1	2462	1000~26500	-1.05	-37.58	≤ -31.05	PASS
11AX40SISO	Ant1	2422	0~Reference	-3.27	-3.27	---	PASS
11AX40SISO	Ant1	2422	30~1000	-3.27	-63.3	≤ -33.27	PASS
11AX40SISO	Ant1	2422	1000~26500	-3.27	-37.41	≤ -33.27	PASS
11AX40SISO	Ant1	2437	0~Reference	-1.85	-1.85	---	PASS
11AX40SISO	Ant1	2437	30~1000	-1.85	-63.94	≤ -31.85	PASS
11AX40SISO	Ant1	2437	1000~26500	-1.85	-37.5	≤ -31.85	PASS
11AX40SISO	Ant1	2452	0~Reference	-4.42	-4.42	---	PASS
11AX40SISO	Ant1	2452	30~1000	-4.42	-63.86	≤ -34.42	PASS
11AX40SISO	Ant1	2452	1000~26500	-4.42	-37.34	≤ -34.42	PASS


6.2 Test Graphs

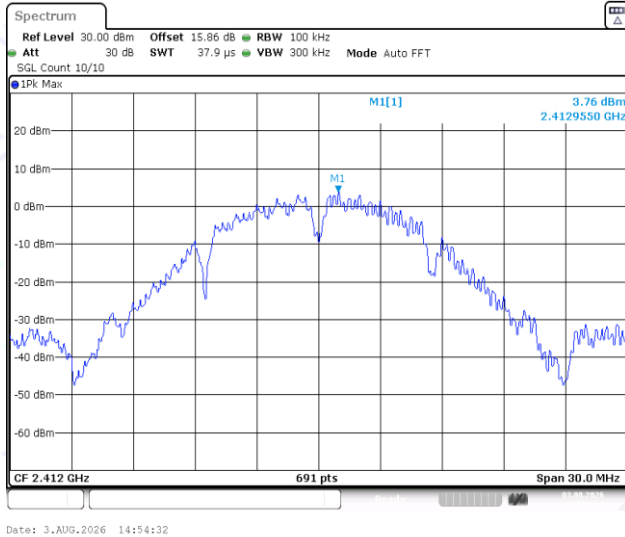


11B-Ant1-2412-0~Reference-PASS

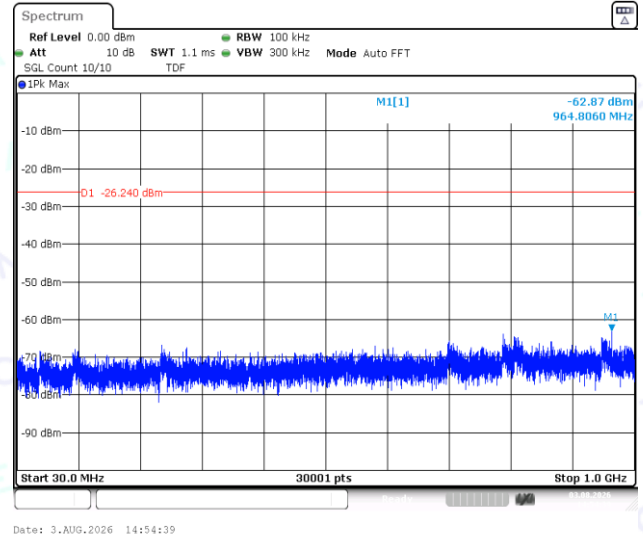


11B-Ant1-2412-30~1000-PASS

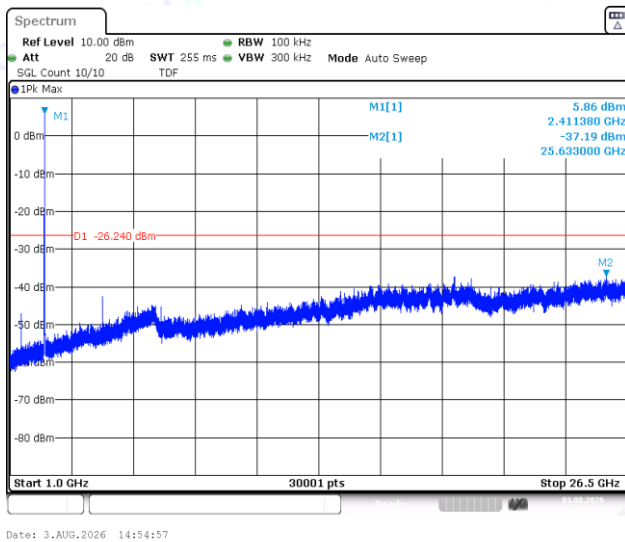


11B-Ant1-2412-1000~26500-PASS

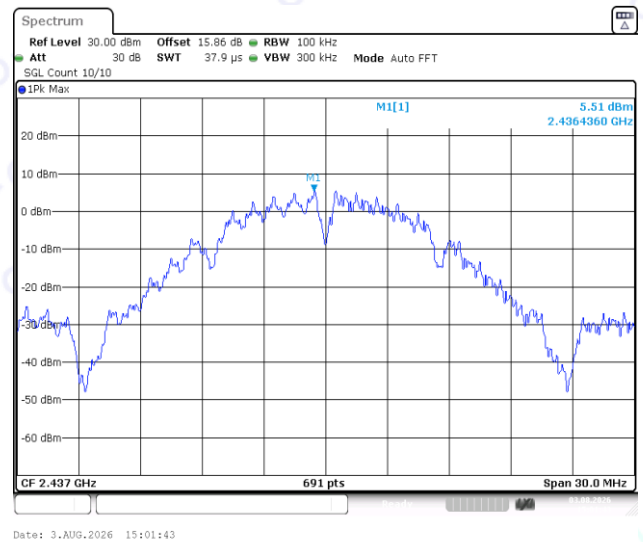


11B-Ant1-2437-0~Reference-PASS

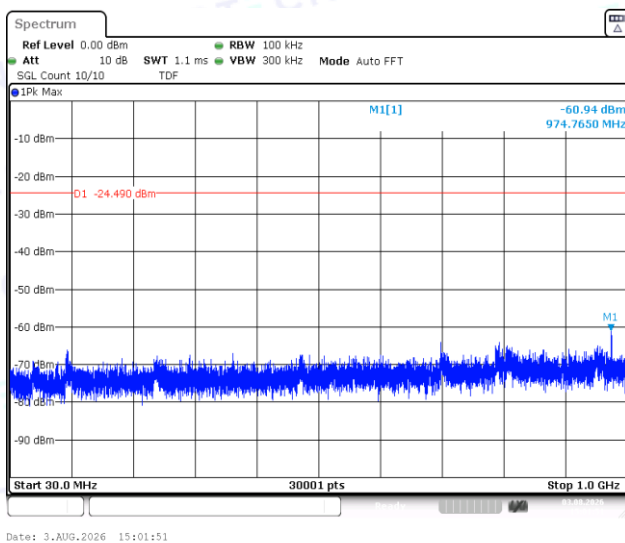

11B-Ant1-2437-30~1000-PASS

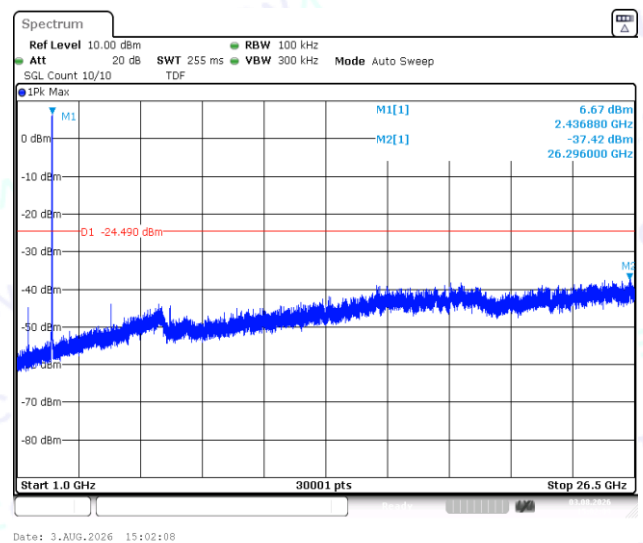


11B-Ant1-2437-1000~26500-PASS

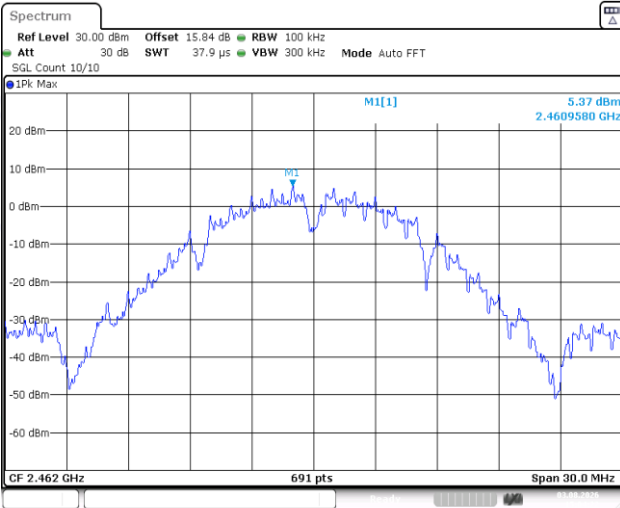


Date: 3.AUG.2026 15:04:21

11B-Ant1-2462-0~Reference-PASS

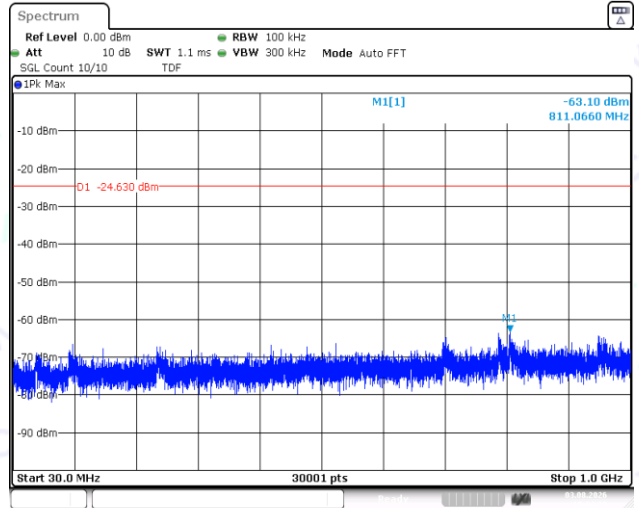


Date: 3.AUG.2026 15:04:29

11B-Ant1-2462-30~1000-PASS

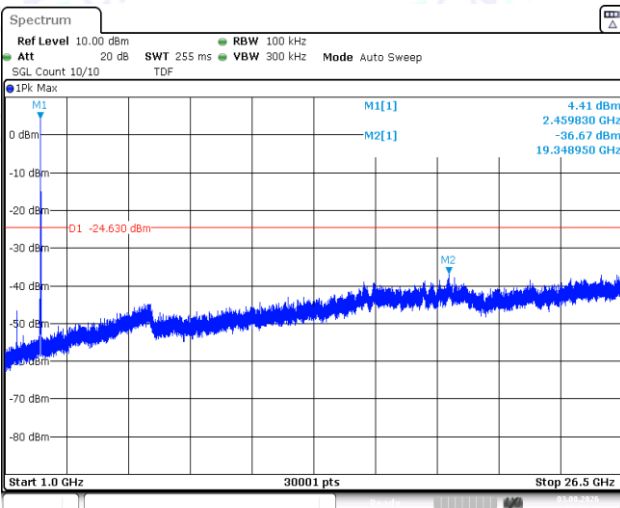


Date: 3.AUG.2026 15:04:47

11B-Ant1-2462-1000~26500-PASS

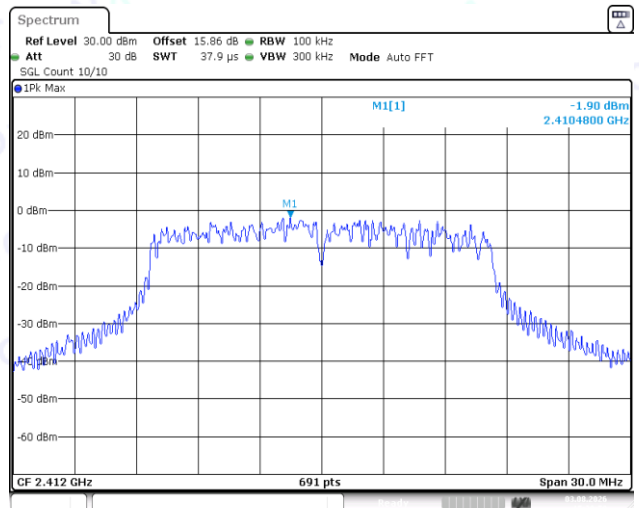


Date: 3.AUG.2026 15:20:49

11G-Ant1-2412-0~Reference-PASS

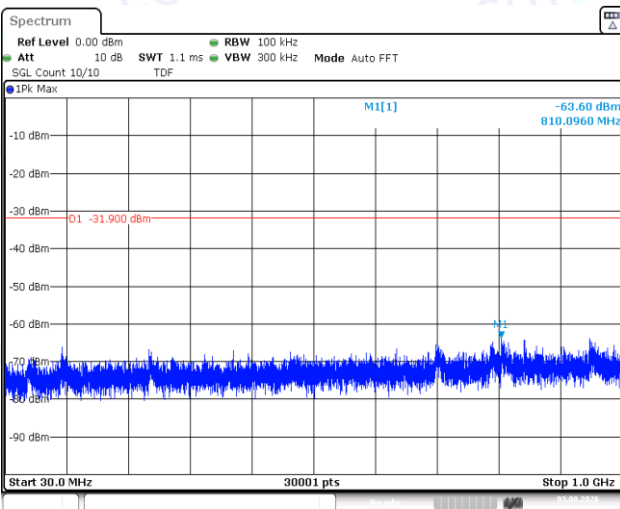


Date: 3.AUG.2026 15:20:57

11G-Ant1-2412-30~1000-PASS

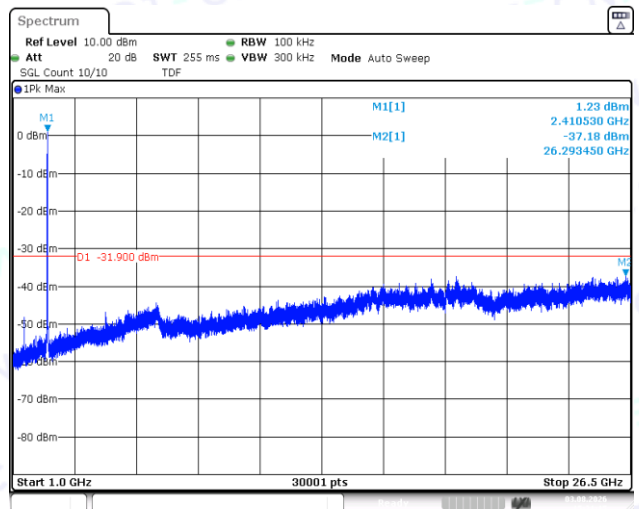


Date: 3.AUG.2026 15:21:15

11G-Ant1-2412-1000~26500-PASS

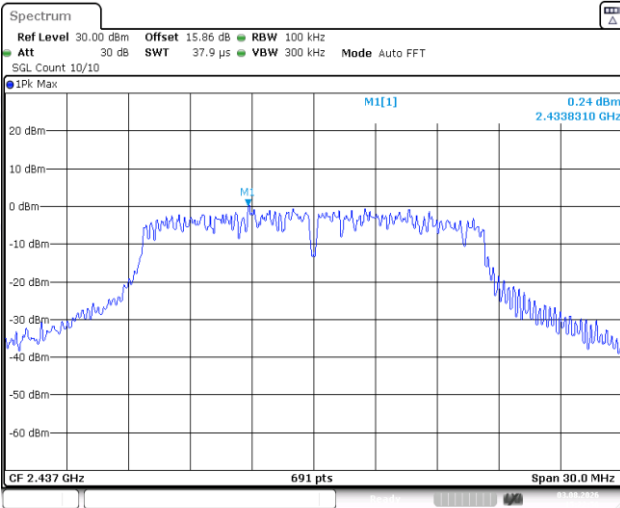


Date: 3.AUG.2026 15:22:56

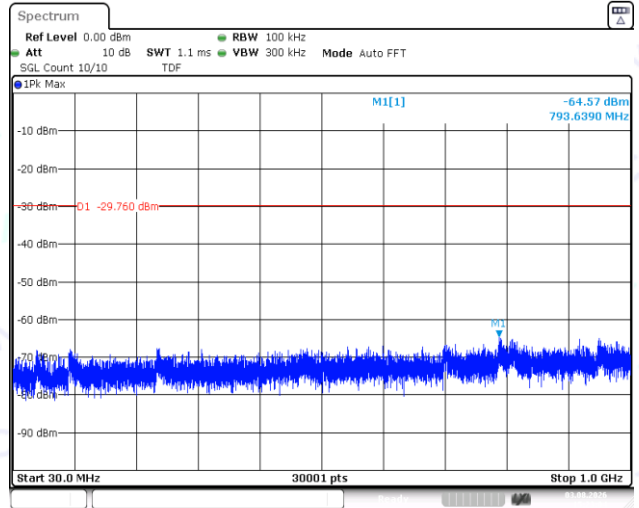


Date: 3.AUG.2026 15:23:04

11G-Ant1-2437-0~Reference-PASS

11G-Ant1-2437-30~1000-PASS

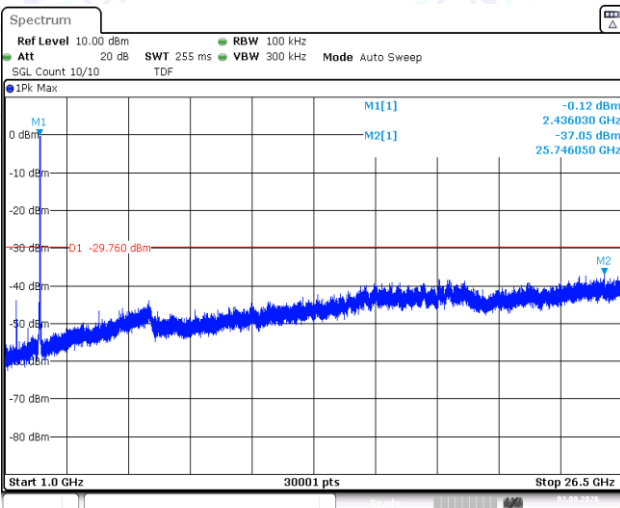


Date: 3.AUG.2026 15:23:21

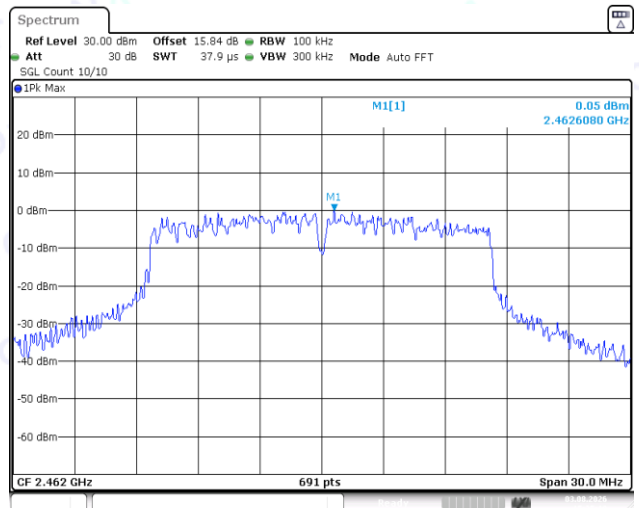


Date: 3.AUG.2026 15:25:11

11G-Ant1-2437-1000~26500-PASS

11G-Ant1-2462-0~Reference-PASS

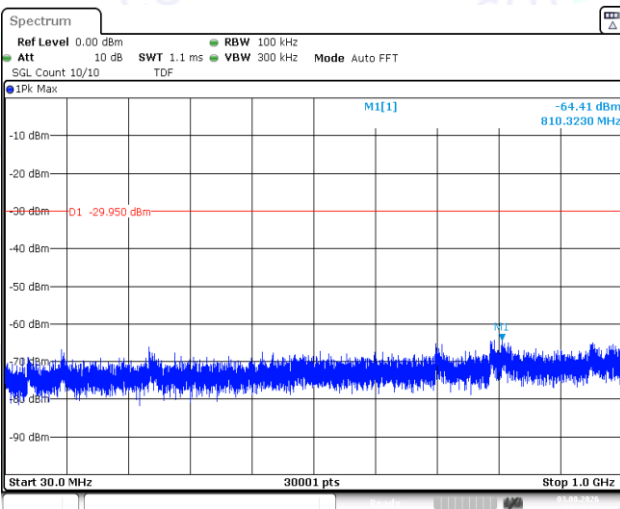


Date: 3.AUG.2026 15:25:18

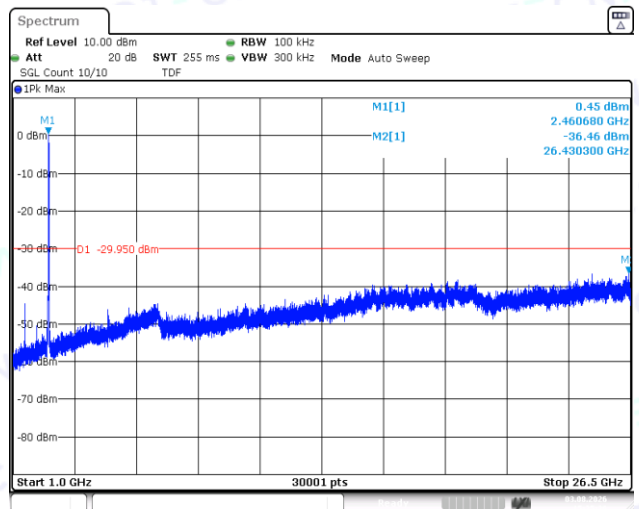


Date: 3.AUG.2026 15:25:36

11G-Ant1-2462-30~1000-PASS

11G-Ant1-2462-1000~26500-PASS

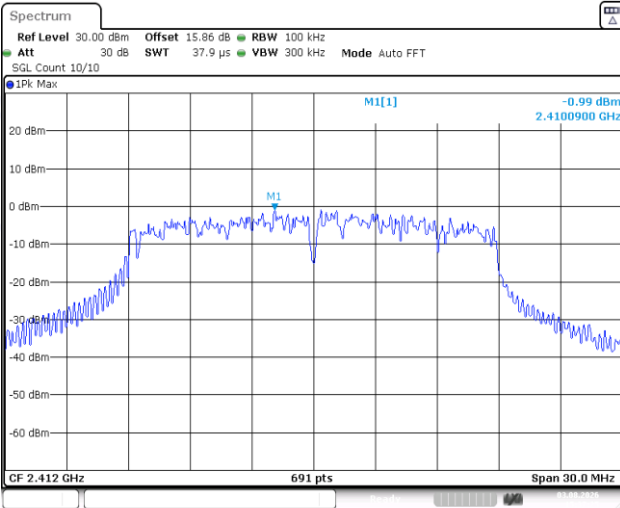


Date: 3.AUG.2026 15:37:24

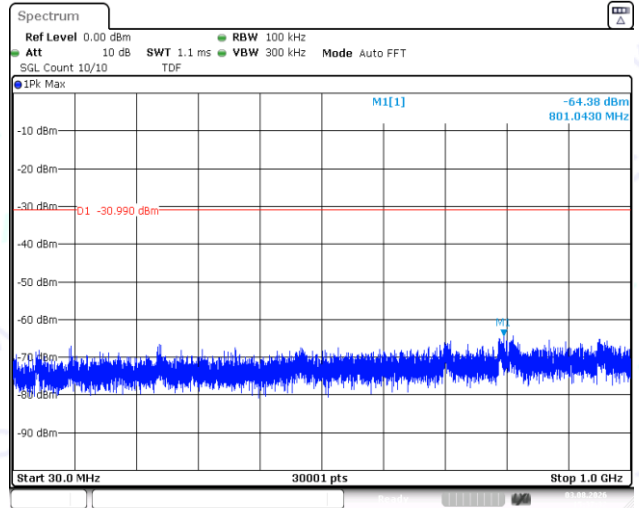


Date: 3.AUG.2026 15:37:32

11N20SISO-Ant1-2412-0~Reference-PASS

11N20SISO-Ant1-2412-30~1000-PASS

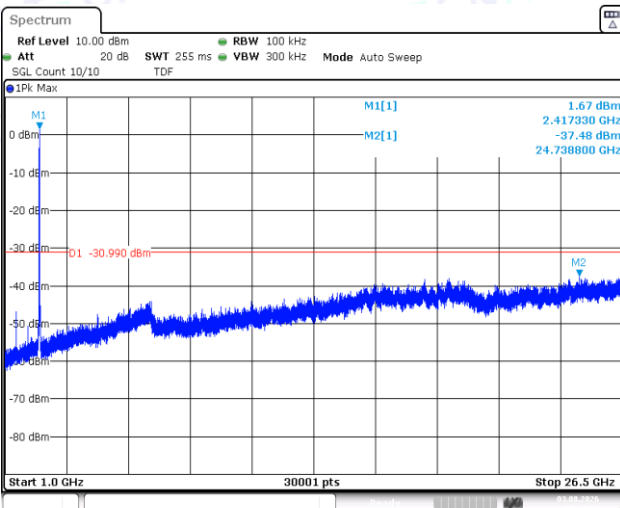


Date: 3.AUG.2026 15:37:50

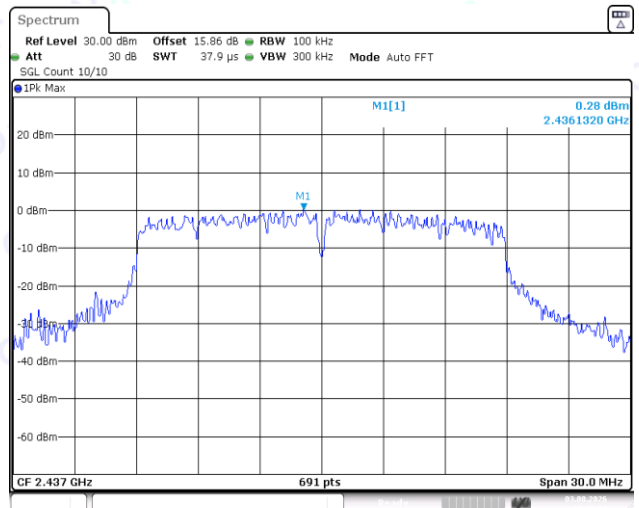


Date: 3.AUG.2026 15:45:50

11N20SISO-Ant1-2412-1000~26500-PASS

11N20SISO-Ant1-2437-0~Reference-PASS

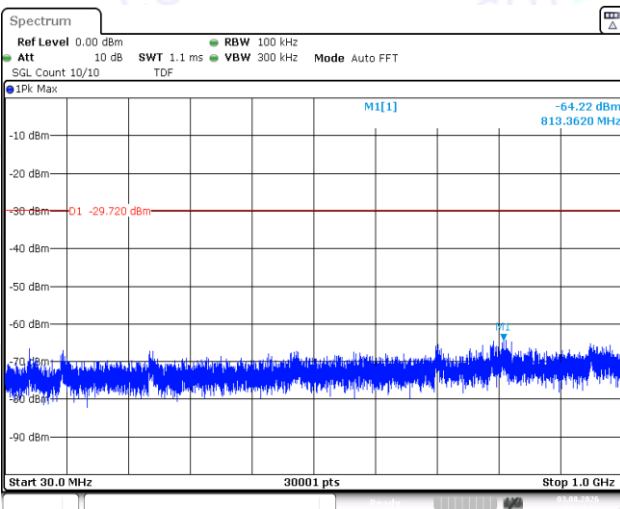


Date: 3.AUG.2026 15:45:58

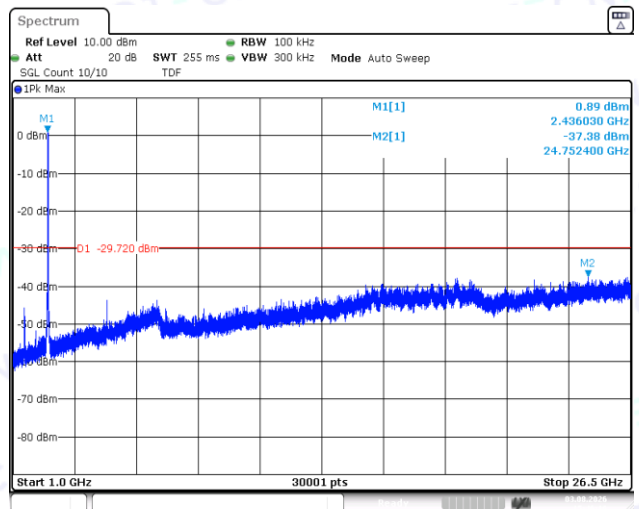


Date: 3.AUG.2026 15:46:15

11N20SISO-Ant1-2437-30~1000-PASS

11N20SISO-Ant1-2437-1000~26500-PASS

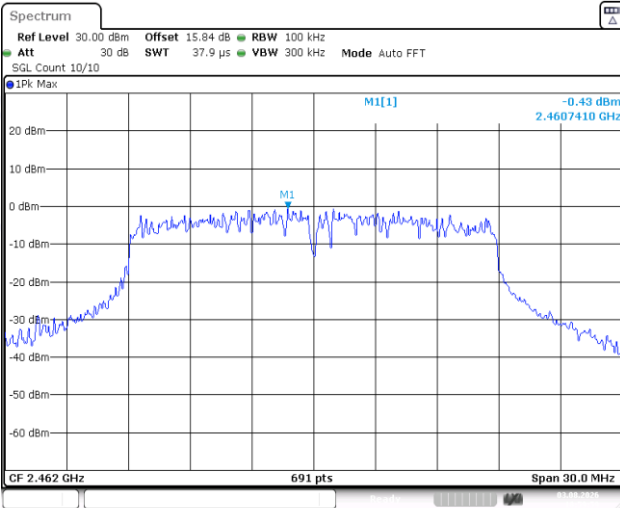


Date: 3.AUG.2026 18:59:59

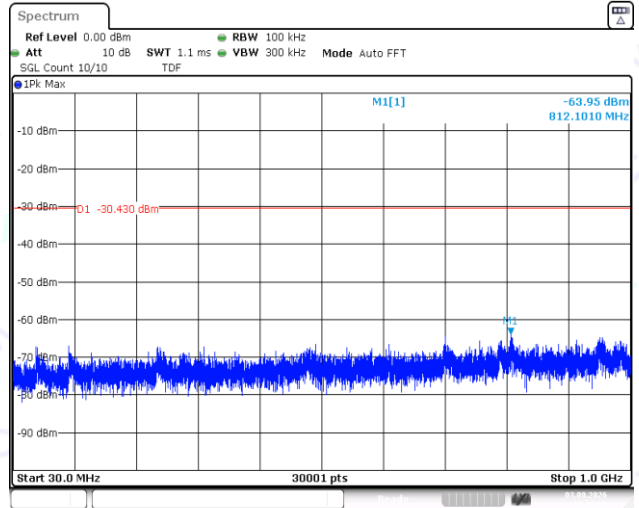


Date: 3.AUG.2026 19:00:07

11N20SISO-Ant1-2462-0~Reference-PASS

11N20SISO-Ant1-2462-30~1000-PASS

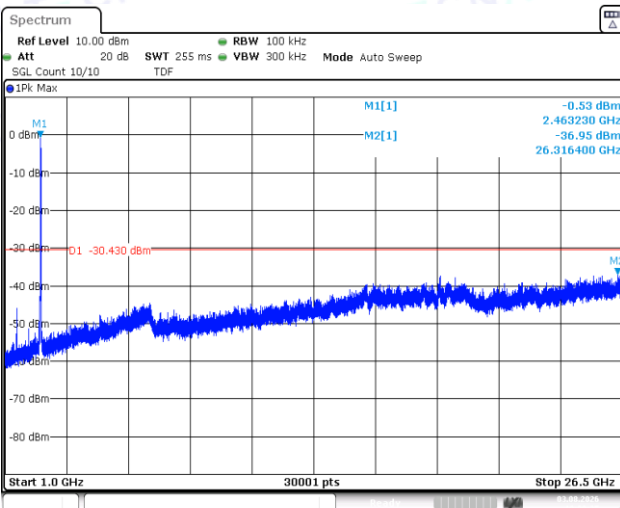


Date: 3.AUG.2026 19:00:25

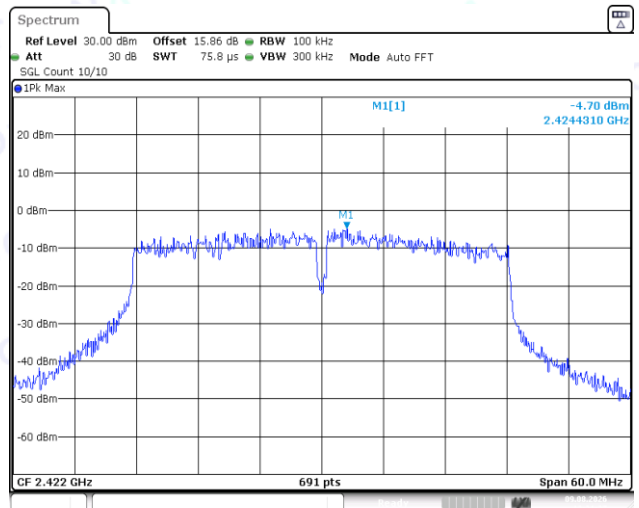


Date: 9.AUG.2026 13:21:37

11N20SISO-Ant1-2462-1000~26500-PASS

11N40SISO-Ant1-2422-0~Reference-PASS

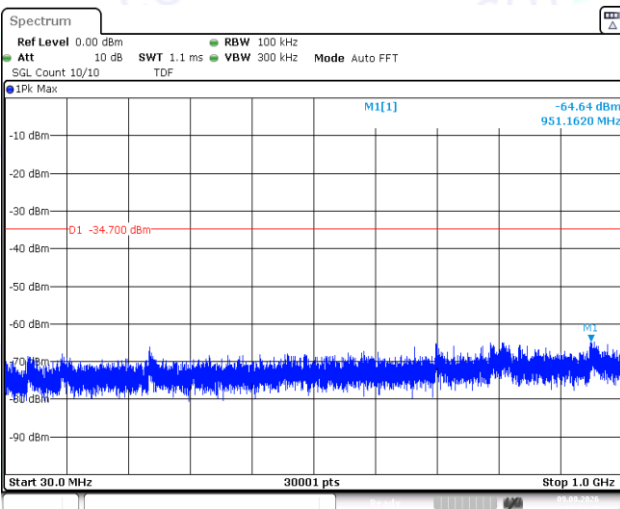


Date: 9.AUG.2026 13:21:45

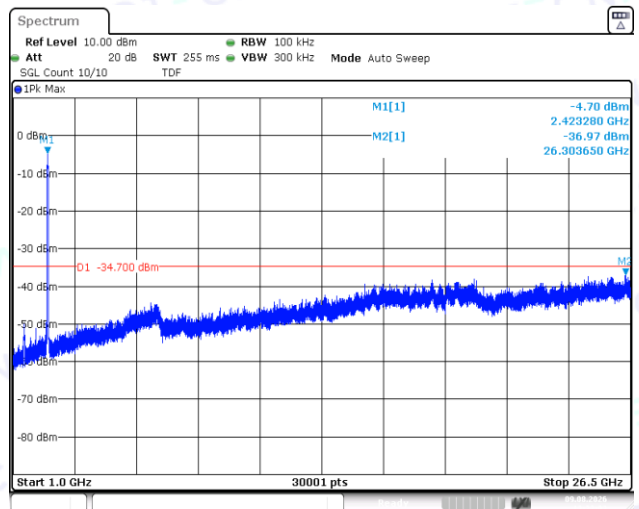


Date: 9.AUG.2026 13:22:02

11N40SISO-Ant1-2422-30~1000-PASS

11N40SISO-Ant1-2422-1000~26500-PASS

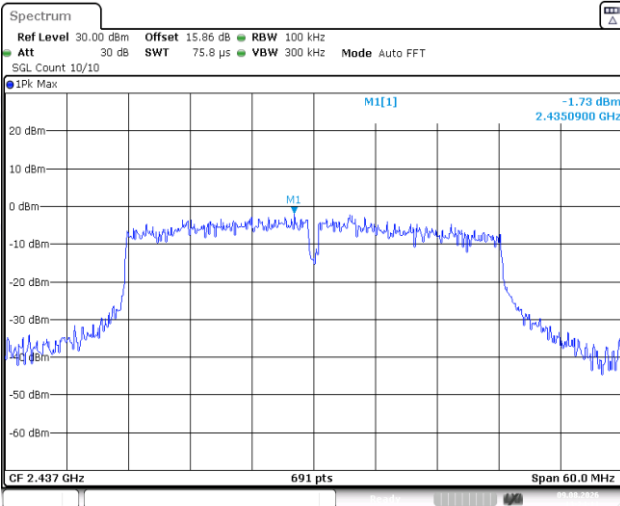


Date: 9.AUG.2026 13:24:11

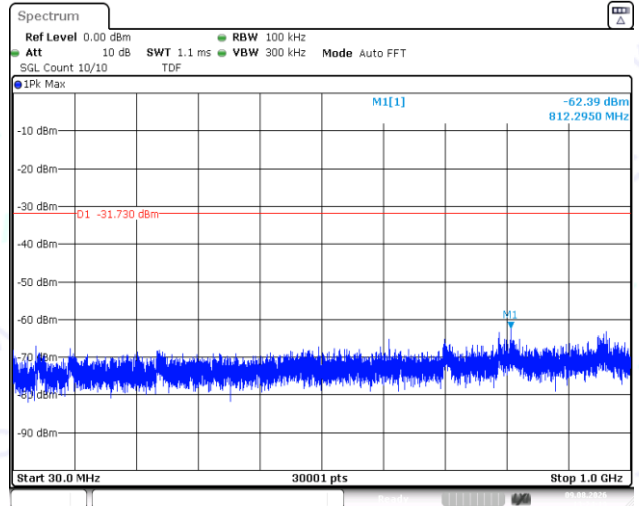


Date: 9.AUG.2026 13:24:19

11N40SISO-Ant1-2437-0~Reference-PASS

11N40SISO-Ant1-2437-30~1000-PASS

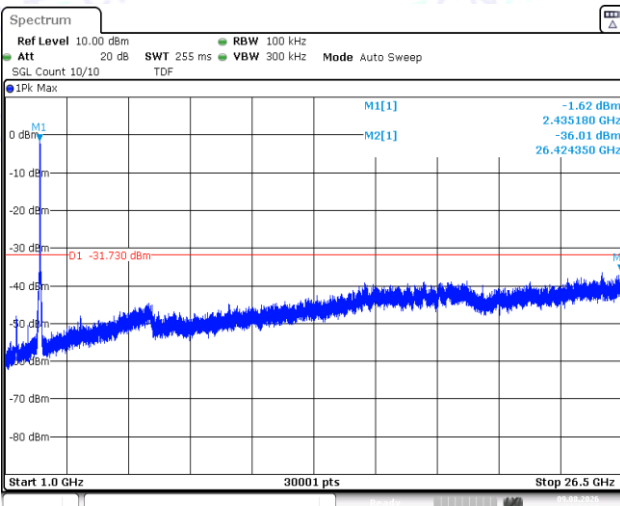


Date: 9.AUG.2026 13:24:36

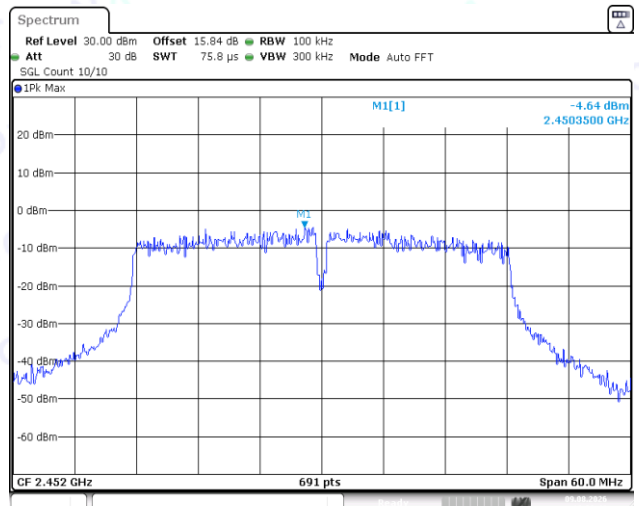


Date: 9.AUG.2026 13:29:40

11N40SISO-Ant1-2437-1000~26500-PASS

11N40SISO-Ant1-2452-0~Reference-PASS

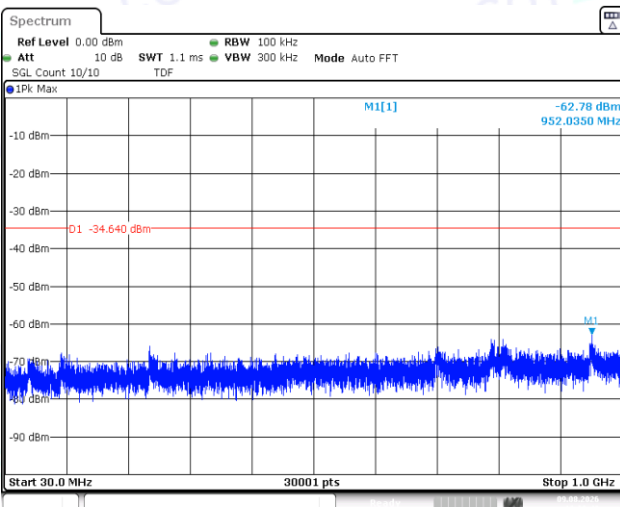


Date: 9.AUG.2026 13:29:48

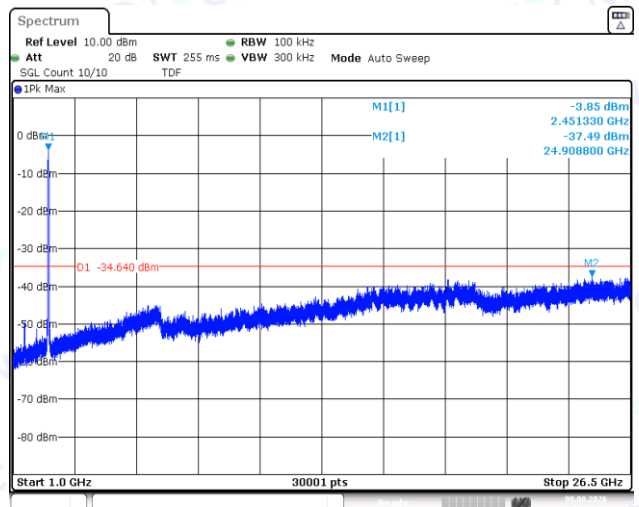


Date: 9.AUG.2026 13:30:06

11N40SISO-Ant1-2452-30~1000-PASS

11N40SISO-Ant1-2452-1000~26500-PASS

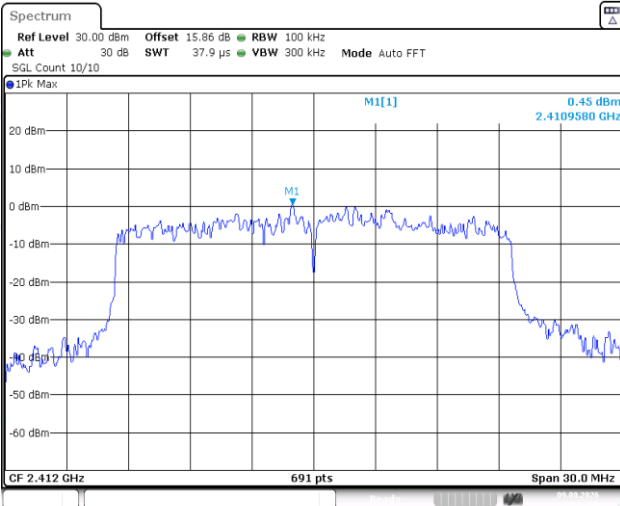


Date: 9.AUG.2026 13:31:47

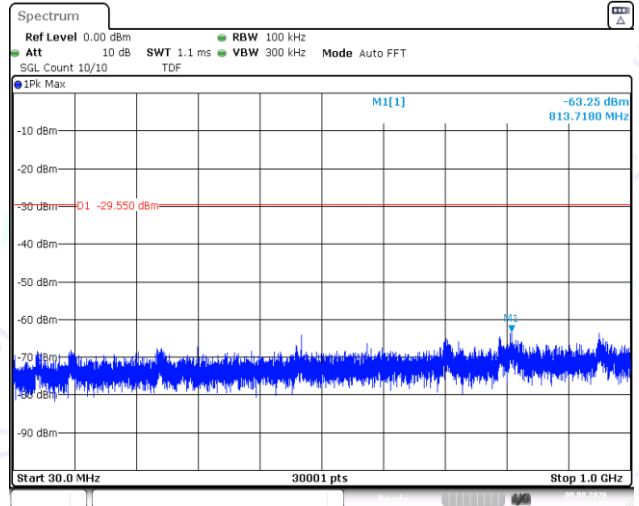


Date: 9.AUG.2026 13:31:55

11AX20SISO-Ant1-2412-0~Reference-PASS

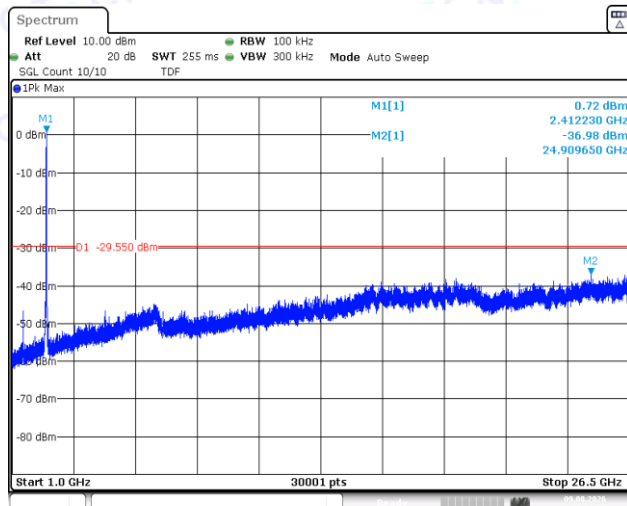


Date: 9.AUG.2026 13:32:13

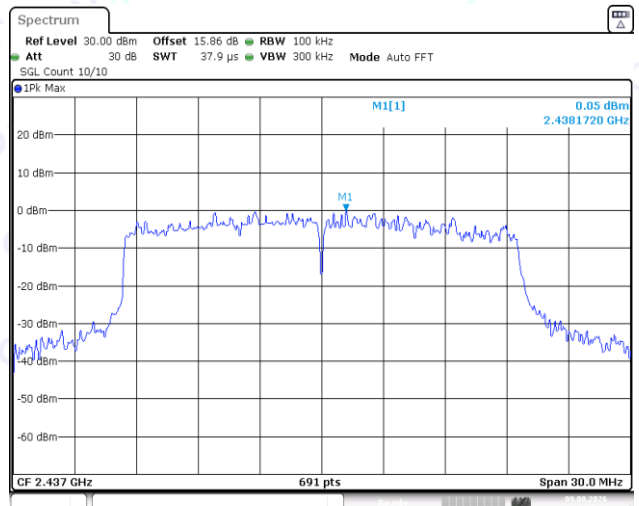


Date: 9.AUG.2026 13:35:12

11AX20SISO-Ant1-2412-1000~26500-PASS

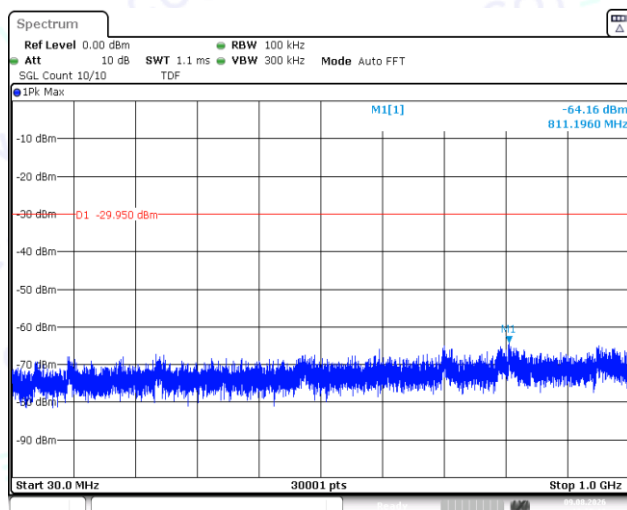

Date: 9.AUG.2026 13:35:20

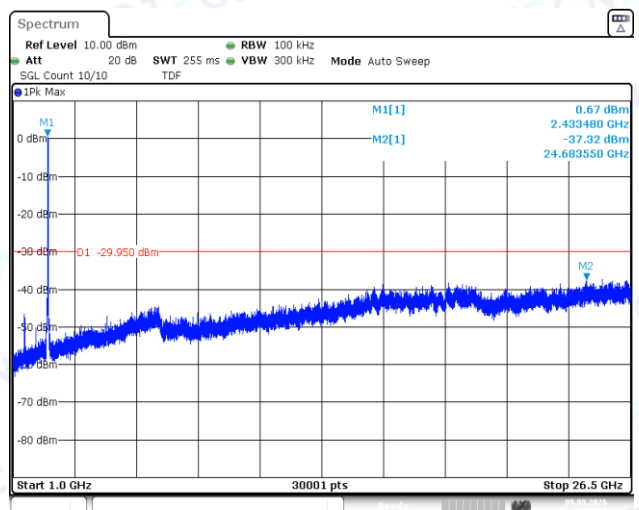

Date: 9.AUG.2026 13:35:37

11AX20SISO-Ant1-2437-30~1000-PASS

11AX20SISO-Ant1-2437-1000~26500-PASS