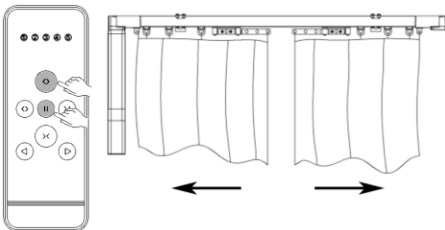
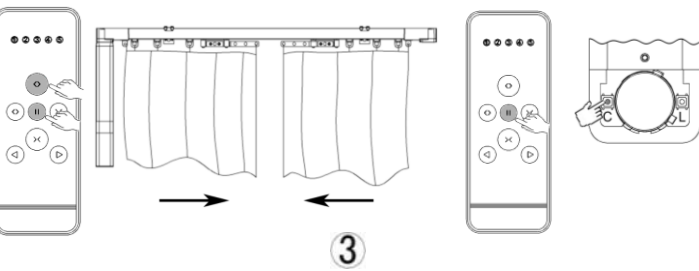


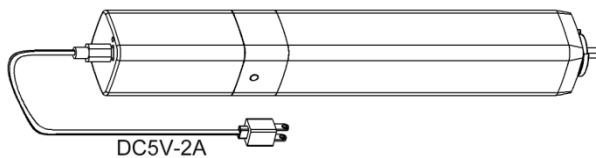


MCT-G2 Curtain Motor Instruction v1

Setting	Item	Operation	Result	Illustration
Technical Data	Motor Model#:MCT-G2 Remote Model#: ZN-105C Torque: 1NM Motor Speed: 80rpm Load: 50KG Curtain Running Speed: 20CM /1S (Two Sides Running in Opposite) Lithium Battery: 18650,11.1V, 2000mAh			
	Assembly Diagram Components: 1.Side Bracket 2.Top Bracket 3.Drive Housing 4.Hold-in Range 5.Dolly 6.Guide Rail 7. Motor 8.Battery ♦ Insert the corresponding end of the motor into the drive housing, and fix the motor well. ♦ Assemble the battery accordingly. NOTE: ♦ Side or Top assembled depending on the assembling spot case.			
Bluetooth Operation	1	Download APP	♦ Android Phone: Download and install the APP“3L SMART”from Google Play. ♦ IPHONE: Download and install the APP“3L SMART”from App Store. Detailed Instructions please refer to the APP's Instructions.	
	2	Short Press the “Setting” button at the bottom of the motor 3 times.	Motor Resetting successfully when Green LED light quickly flashes x 4 , can be found named as TS2900 in the APP.	
	3	Open the APP to add the motor accordingly.		
Program the remote with the motor				
Program the Remote with Cloth Curtain Motor	1	Long Press the “Setting” button 3S or so.	Release the button after the motor quickly beeps x 4, Red LED slowly flashes and motor continuously slowly beeps.	
	2	Press the “A-OPEN” button in 10S.	After Green LED quickly flashes x 4 , the program has been done.	
Program the Remote with Gauze Curtain Motor	1	Long Press the “Setting” button 3S or so.	Release the button after the motor quickly beeps x 4, Red LED slowly flashes and motor continuously slowly beeps.	
	2	Press the “B-OPEN” button in 10S.	After Green LED quickly flashes x 4 , the program has been done.	
There're two ways of limit setting. One is automatically generated. The other is manually generated. Instructions respectively as below (based on Cloth Curtain)				
Limit setting Automatically generated. (Generated by locked-rotor)	1	Press the “A-OPEN” button	Curtain automatically open in both direction till fully opened.	
	2	Motor drips once and Red LED flashes once.	Curtain's open limit setting has been automatically generated.	
	3	Curtain continue automatically close in both direction.	Till fully closed, Motor drips once and Red LED flashes once again. Both the open and close limit settings have been automatically generated.	

Setting	Item	Operation	Result	Illustration
Manual limit setting	1	Press and hold  +  3S or so.	Release both buttons after motor beeps x 4, Green LED quickly flashes x 4, and curtain automatically open in both direction.	  
	2	Press  till curtain opens to the wanted open limit position.	Curtain stops.	
	3	Press  +  to confirm the open limit position. Then curtain automatically closes in both direction.	Press  till curtain closes to the wanted close limit position. Then Press “C” confirm button on the back of the remote to confirm the close limit position. Then the manual limit setting has been done. NOTE: This step must press STOP  button, otherwise the limit to be automatically generated.	
Delete all other remotes	Long press “C” button 3S or so	Green LED quickly flashes x 4, the program has been done.		
Delete the remote itself from the motor.	Fastly and shortly Press “C” button 3 times.	Green LED quickly flashes x 4, the remote has been successfully deleted from the motor.		
Charging Instructions	● Charger Specification: DC5V-2A ● Please charge the motor when it alarm or can not work. ● Charging time is 8 hours or so. Red LED light while charging, Green light when full charged. ● Charge fault instructions: A. Please change another charger or charging cable when red LED light is not on while starting to charge. B. If green and red LED light flashes alternately while charging, please check the battery fault or open circuit in the motor. NOTE: After full charged, the charger must be unplugged.			
FAQ	1. If dolly stuck in a position, please check the rail. 2. If motor cannot run to the wanted position, please reset the limit positions. 3. If the motor suddenly loses power during running, please pull the curtain in the opposite direction once to ensure the curtain can be normally used in the case of sudden power failure. 4. If APP cannot successfully control the curtain's position, please reset both open and close limit position. 5. After the battery taken off and re-insert into the motor, please reset both open and close limit position. (Limit positions cannot be saved under power off state.)			

This device complies with Part 15 of the FCC rules. Operation is subjected to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

The distance between user and products should be no less than 20cm.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development (ISED) Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

The device has been evaluated to meet general RF exposure requirement.

The distance between user and products should be no less than 20cm.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF.

la distance entre l'utilisateur et les produits devraient être au moins 20 cm.