



RF TEST REPORT

Product Name: Tablet PC

Model Number: L1108, WP103, 863B, L863B, 863B-NFC, 1083D, WP32, L1208, 1083D-NFC, 1008, WP30, 763M, WP31, WP105, WP803, 1301, EP11, P308, 1108, L1008, P80, L871, L1083D, P15, 863L-NFC, S1401, WP95, 1101, 1083R, 763C, 1107, WP106, POE10, WP801, L1107, WP101, P105, 1108 NFC, 1102, OF3576S-8, 1163, L1401, 1037, L1083D-NFC, 2105, 1094, PT5010, 1032, TM140, F1150ZI-5, L1022IS, 1104, 1073, F716XM, 1019B, L1201D, 1040, 763B, 1105, 763, 863, 1150, 1108-NFC, smart vehicle infotainment, SH1, 763, 763KNX, L1301, WP80, 1083DD-NFC, WP20, 1038, 863A, N104, WL1895 NX, L1166IX, 1166, CP4-V88, 700, 1050, 863, 100, 400, 500, 600, 700, 800, 140, BF763A, 1091, PH55, 763, 863, 1063, 1071, F1030GR, 1083, 1410, F400, OF3576-11, 863L, P801-PoE, L870, WP70, L1030IS, GPS, G710, WL1863-4, 863C, 1063, H3576-32, S1201, 766, smart vehicle, F1150ZI-4, 1083P, H3576-21.5, 1007, NF400, WP102, OF3588S-8, 1093, L863L, 1019C, L1105, AP55A, OP110, 720, 1101IX, WP1095, 695, 702, L867P, 651G, F505P, 40P, F1560PM, P55M, 763/863/1063, PF1006, F763, 768B, L708XM-3D, F1071YI, AP55, 1401, F1063, 768, 1019, PH70/80, 1095, TOF, 707, 1098P, 1036, OF3576S-11, 619, 1260, W706XM, 1068, 768, 868, L1090EM, 1052, 1208, DC763C, DC863A, 1108Car, SoD3566-M, SoD3576-M, SoD3588S-M, H3576, H3588S, M3576S, M3562, BF763C, BF863A, BF863B, BF1008, BF1108

FCC ID: 2A2J4-L1108

Issued For : Shenzhen Pretech Industrial Co., Ltd
808,8F,Qiancheng Commercial center,5 Haicheng
Road,Bao'an District, Shenzhen, China

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT26I143RF02
Sample Received Date: Sep. 17, 2026
Date of Test: Sep. 17, 2026 ~ Sep. 24, 2026
Date of Issue: Sep. 24, 2026

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Shenzhen Pretech Industrial Co., Ltd
Address: 808,8F,Qiancheng Commercial center,5 Haicheng Road,Bao'an District, Shenzhen, China

Manufacturer: Shenzhen Pretech Industrial Co., Ltd
Address: 808,8F,Qiancheng Commercial center,5 Haicheng Road,Bao'an District, Shenzhen, China

Product Name: Tablet PC

Trademark: Pretech

Model Number: L1108, WP103, 863B, L863B, 863B-NFC, 1083D, WP32, L1208, 1083D-NFC, 1008, WP30, 763M, WP31, WP105, WP803, 1301, EP11, P308, 1108, L1008, P80, L871, L1083D, P15, 863L-NFC, S1401, WP95, 1101, 1083R, 763C, 1107, WP106, POE10, WP801, L1107, WP101, P105, 1108 NFC, 1102, OF3576S-8, 1163, L1401, 1037, L1083D-NFC, 2105, 1094, PT5010, 1032, TM140, F1150ZI-5, L1022IS, 1104, 1073, F716XM, 1019B, L1201D, 1040, 763B, 1105, 763, 863, 1150, 1108-NFC, smart vehicle infotainment, SH1, 763, 763KNX, L1301, WP80, 1083DD-NFC, WP20, 1038, 863A, N104, WL1895 NX, L1166IX, 1166, CP4-V88, 700, 1050, 863, 100, 400, 500, 600, 700, 800, 140, BF763A, 1091, PH55, 763, 863, 1063, 1071, F1030GR, 1083, 1410, F400, OF3576-11, 863L, P801-PoE, L870, WP70, L1030IS, GPS, G710, WL1863-4, 863C, 1063, H3576-32, S1201, 766, smart vehicle, F1150ZI-4, 1083P, H3576-21.5, 1007, NF400, WP102, OF3588S-8, 1093, L863L, 1019C, L1105, AP55A, OP110, 720, 1101IX, WP1095, 695, 702, L867P, 651G, F505P, 40P, F1560PM, P55M, 763/863/1063, PF1006, F763, 768B, L708XM-3D, F1071YI, AP55, 1401, F1063, 768, 1019, PH70/80, 1095, TOF, 707, 1098P, 1036, OF3576S-11, 619, 1260, W706XM, 1068, 768, 868, L1090EM, 1052, 1208, DC763C, DC863A, 1108Car, SoD3566-M, SoD3576-M, SoD3588S-M, H3576, H3588S, M3576S, M3562, BF763C, BF863A, BF863B, BF1008, BF1108

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS

Prepared by:

chris chen

Chris Chen
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.5 EQUIPMENTS LIST	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 EUT OPERATING CONDITIONS	13
3.5 TEST RESULTS	14
APPENDIX I - MEASUREMENT PHOTOS	16



Revision History

Rev.	Issue Date	Revisions
00	Sep. 24, 2026	Initial Issue

Note: Added the series of models, Change the base adapter, but all other aspects are the same.
The EMC CE and RE, and RF CE test data has been retested.



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 Part 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46\%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57\text{dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.61\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

GENERAL DESCRIPTION OF THE EQUIPMENT

Product Name:	Tablet PC															
Test Model Number:	L1108															
Model Numbers:	WP103, 863B, L863B, 863B-NFC, 1083D, WP32, L1208, 1083D-NFC, 1008, WP30, 763M, WP31, WP105, WP803, 1301, EP11, P308, 1108, L1008, P80, L871, L1083D, P15, 863L-NFC, S1401, WP95, 1101, 1083R, 763C, 1107, WP106, POE10, WP801, L1107, WP101, P105, 1108 NFC, 1102, OF3576S-8, 1163, L1401, 1037, L1083D-NFC, 2105, 1094, PT5010, 1032, TM140, F1150ZI-5, L1022IS, 1104, 1073, F716XM, 1019B, L1201D, 1040, 763B, 1105, 763, 863, 1150, 1108-NFC, smart vehicle infotainment, SH1, 763, 763KNX, L1301, WP80, 1083DD-NFC, WP20, 1038, 863A, N104, WL1895 NX, L1166IX, 1166, CP4-V88, 700, 1050, 863, 100, 400, 500, 600, 700, 800, 140, BF763A, 1091, PH55, 763, 863, 1063, 1071, F1030GR, 1083, 1410, F400, OF3576-11, 863L, P801-PoE, L870, WP70, L1030IS, GPS, G710, WL1863-4, 863C, 1063, H3576-32, S1201, 766, smart vehicle, F1150ZI-4, 1083P, H3576-21.5, 1007, NF400, WP102, OF3588S-8, 1093, L863L, 1019C, L1105, AP55A, OP110, 720, 1101IX, WP1095, 695, 702, L867P, 651G, F505P, 40P, F1560PM, P55M, 763/863/1063, PF1006, F763, 768B, L708XM-3D, F1071YI, AP55, 1401, F1063, 768, 1019, PH70/80, 1095, TOF, 707, 1098P, 1036, OF3576S-11, 619, 1260, W706XM, 1068, 768, 868, L1090EM, 1052, 1208, DC763C, DC863A, 1108Car, SoD3566-M, SoD3576-M, SoD3588S-M, H3576, H3588S, M3576S, M3562, BF763C, BF863A, BF863B, BF1008, BF1108															
Model Difference:	It's just the difference in sales regions and models.															
Product Description:	<table><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Radio Technology:</td><td>BLE</td></tr><tr><td>Bluetooth Configuration:</td><td>BLE (1M PHY, 2M PHY)</td></tr><tr><td>Number Of Channel:</td><td>40</td></tr><tr><td>Antenna Designation:</td><td>PIFA Antenna</td></tr><tr><td>Antenna Gain (dBi)</td><td>0dBi</td></tr></table>		Operation Frequency:	2402~2480 MHz	Modulation Type:	GFSK	Radio Technology:	BLE	Bluetooth Configuration:	BLE (1M PHY, 2M PHY)	Number Of Channel:	40	Antenna Designation:	PIFA Antenna	Antenna Gain (dBi)	0dBi
Operation Frequency:	2402~2480 MHz															
Modulation Type:	GFSK															
Radio Technology:	BLE															
Bluetooth Configuration:	BLE (1M PHY, 2M PHY)															
Number Of Channel:	40															
Antenna Designation:	PIFA Antenna															
Antenna Gain (dBi)	0dBi															
Channel List:	Please refer to the Note 3.															
Adapter:	Input: AC 100-240V 50/60Hz 0.8A Output: DC 12V 3A															
Battery:	Capacity: 8000mAh Rated Voltage: 3.8V															
Hardware Version:	P301-MB-V1.0.1															
Software Version:	N/A															
Connecting I/O Port(s):	Please refer to the Note 1.															

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1 MHz/GFSK
Mode 2	TX CH19(2440MHz)	1 MHz/GFSK
Mode 3	TX CH39(2480MHz)	1 MHz/GFSK

Worst Mode	Description	Data/Modulation
Mode 4	TX CH00(2402MHz)	2 MHz/GFSK
Mode 5	TX CH19(2440MHz)	2 MHz/GFSK
Mode 6	TX CH39(2480MHz)	2 MHz/GFSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We have be tested for all avaiable U.S. voltage and frequency (For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.

(3) The battery is fully-charged during the radited and RF conducted test.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 7: Keeping BLE TX

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: BLE	
Engineering Mode	Mode Or Modulation type	Power setting
	1M	Default
	2M	Default



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Charger base	Dongguan Bestgk Smark Technology Co.,Ltd	K-A141203000U	N/A	Input: 100-240V 50/60Hz Output: 12V, 3A
Adapter	Dongguan Bestgk Smark Technology Co.,Ltd	K-A141203000U	N/A	Input: 100-240V 50/60Hz Output: 12V, 3A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	ASUS	UX3407Q	N/A	N/A
USB-A to USB-C Cable	UGREEN	US287	N/A	1m, shielded, without ferrite core
Earphone	VESAFE	39630078	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESCI	100458	2026-04-21	2027-04-20
LISN	COM-POWER	LI-115	02032	2026-03-03	2027-03-02
LISN	SCHWARZBECK	NNLK 8122	00160	2026-03-03	2027-03-02
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2026-03-03	2027-03-02
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600-NMNM-2M	N.A	2026-03-03	2027-03-02
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2026-03-05	2027-03-04
Testing Software	EMC-I_V1.5.0.16_SKET				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

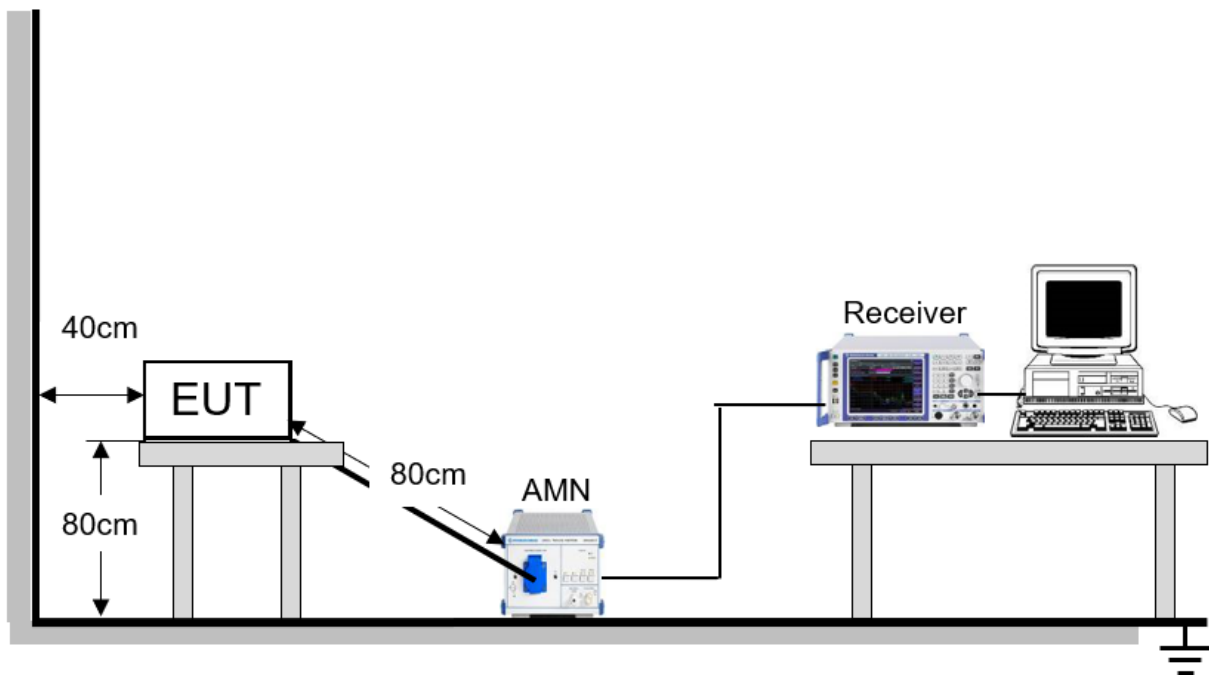

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.5 TEST RESULTS

Note: Level = Reading + Factor

Margin = Level – Limit


Project: LGT26I143	Test Engineer: Bill Chen
EUT: Tablet PC	Temperature: 25.4°C
M/N: L1108	Humidity: 47%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-08-27
Test Mode: TX BLE 2402	
Note: AC Mains port	

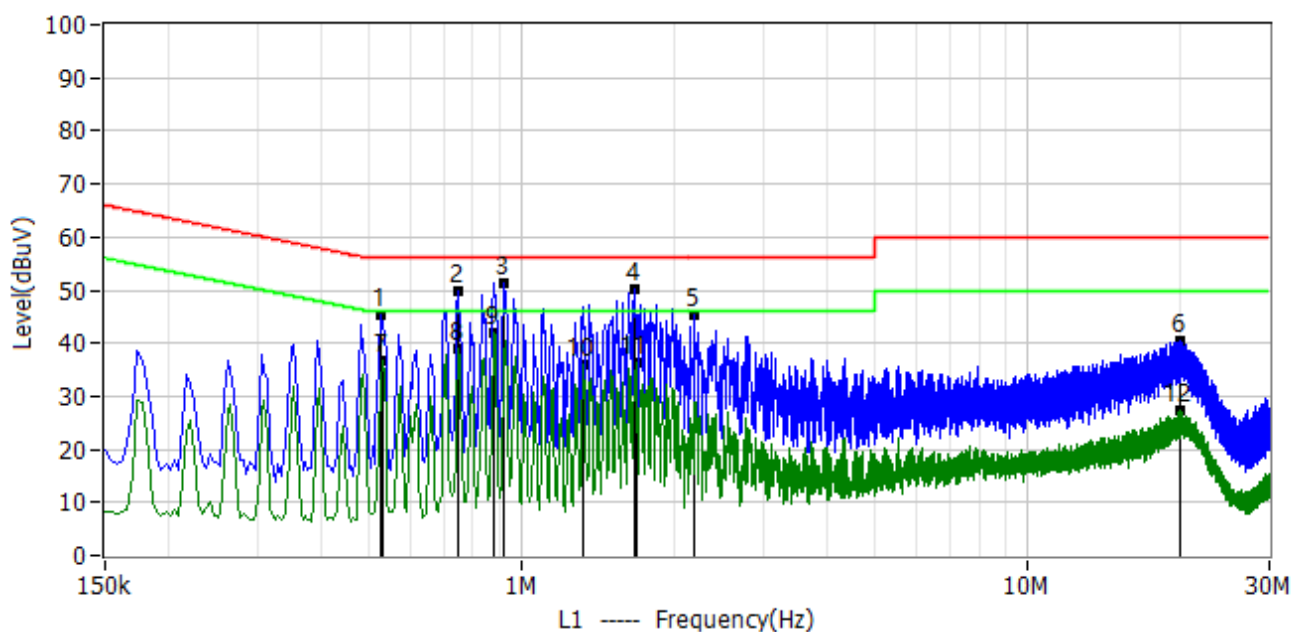

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.526	34.63	10.63	45.26	56.00	-10.74	QP	L1
2*	0.746	39.21	10.64	49.85	56.00	-6.15	QP	L1
3*	0.922	40.69	10.66	51.35	56.00	-4.65	QP	L1
4*	1.666	39.36	10.80	50.16	56.00	-5.84	QP	L1
5*	2.190	34.53	10.89	45.42	56.00	-10.58	QP	L1
6*	19.998	28.81	11.54	40.35	60.00	-19.65	QP	L1
7*	0.530	25.94	10.63	36.57	46.00	-9.43	AV	L1
8*	0.750	28.25	10.64	38.89	46.00	-7.11	AV	L1
9*	0.882	31.26	10.66	41.92	46.00	-4.08	AV	L1
10*	1.322	25.20	10.73	35.93	46.00	-10.07	AV	L1
11*	1.682	25.48	10.81	36.29	46.00	-9.71	AV	L1
12*	19.902	15.62	11.54	27.16	50.00	-22.84	AV	L1



Project: LGT26I143	Test Engineer: Bill Chen
EUT: Tablet PC	Temperature: 25.4°C
M/N: L1108	Humidity: 47%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-08-27
Test Mode: TX BLE 2402	
Note: AC Mains port	

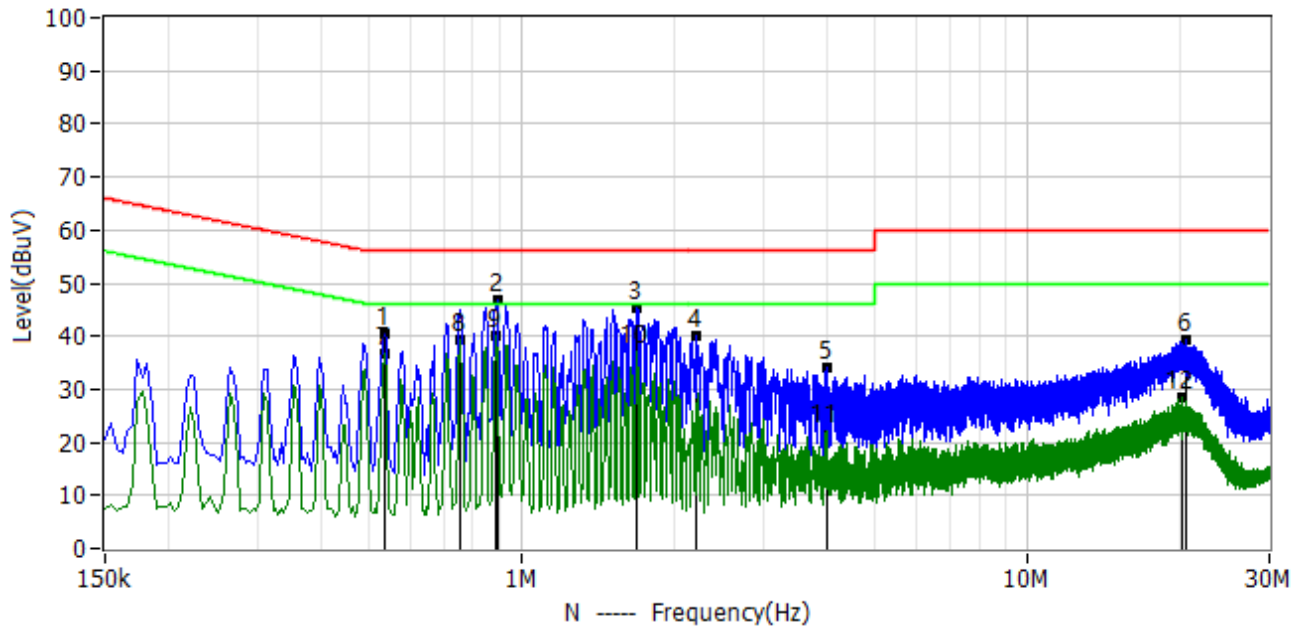

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.534	29.83	10.65	40.48	56.00	-15.52	QP	N
2*	0.894	36.16	10.67	46.83	56.00	-9.17	QP	N
3*	1.690	34.49	10.81	45.30	56.00	-10.70	QP	N
4*	2.214	29.17	10.89	40.06	56.00	-15.94	QP	N
5*	4.022	23.14	10.97	34.11	56.00	-21.89	QP	N
6*	20.530	27.59	11.61	39.20	60.00	-20.80	QP	N
7*	0.534	25.87	10.65	36.52	46.00	-9.48	AV	N
8*	0.758	28.82	10.66	39.48	46.00	-6.52	AV	N
9*	0.890	29.25	10.67	39.92	46.00	-6.08	AV	N
10*	1.686	26.09	10.81	36.90	46.00	-9.10	AV	N
11*	4.018	11.20	10.97	22.17	46.00	-23.83	AV	N
12*	20.190	16.75	11.60	28.35	50.00	-21.65	AV	N



APPENDIX I - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID.

※※※※※END OF THE REPORT※※※※※