



RF TEST REPORT

Product Name: Tablet PC

Model Number: L1108, WP103, 863B, L863B, 863B-NFC, 1083D, WP32, L1208, 1083D-NFC, 1008, WP30, 763M, WP31, WP105, WP803, 1301, EP11, P308, 1108, L1008, P80, L871, L1083D, P15, 863L-NFC, S1401, WP95, 1101, 1083R, 763C, 1107, WP106, POE10, WP801, L1107, WP101, P105, 1108 NFC, 1102, OF3576S-8, 1163, L1401, 1037, L1083D-NFC, 2105, 1094, PT5010, 1032, TM140, F1150ZI-5, L1022IS, 1104, 1073, F716XM, 1019B, L1201D, 1040, 763B, 1105, 763, 863, 1150, 1108-NFC, smart vehicle infotainment, SH1, 763, 763KNX, L1301, WP80, 1083DD-NFC, WP20, 1038, 863A, N104, WL1895 NX, L1166IX, 1166, CP4-V88, 700, 1050, 863, 100, 400, 500, 600, 700, 800, 140, BF763A, 1091, PH55, 763, 863, 1063, 1071, F1030GR, 1083, 1410, F400, OF3576-11, 863L, P801-PoE, L870, WP70, L1030IS, GPS, G710, WL1863-4, 863C, 1063, H3576-32, S1201, 766, smart vehicle, F1150ZI-4, 1083P, H3576-21.5, 1007, NF400, WP102, OF3588S-8, 1093, L863L, 1019C, L1105, AP55A, OP110, 720, 1101IX, WP1095, 695, 702, L867P, 651G, F505P, 40P, F1560PM, P55M, 763/863/1063, PF1006, F763, 768B, L708XM-3D, F1071YI, AP55, 1401, F1063, 768, 1019, PH70/80, 1095, TOF, 707, 1098P, 1036, OF3576S-11, 619, 1260, W706XM, 1068, 768, 868, L1090EM, 1052, 1208, DC763C, DC863A, 1108Car, SoD3566-M, SoD3576-M, SoD3588S-M, H3576, H3588S, M3576S, M3562, BF763C, BF863A, BF863B, BF1008, BF1108

FCC ID: 2A2J4-L1108

Issued For : Shenzhen Pretech Industrial Co., Ltd
808,8F,Qiancheng Commercial center,5 Haicheng
Road,Bao'an District, Shenzhen, China

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT26I143RF01
Sample Received Date: Sep. 17, 2026
Date of Test: Sep. 17, 2026 ~ Sep. 24, 2026
Date of Issue: Sep. 24, 2026

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Shenzhen Pretech Industrial Co., Ltd
Address: 808,8F,Qiancheng Commercial center,5 Haicheng Road,Bao'an District, Shenzhen, China

Manufacturer: Shenzhen Pretech Industrial Co., Ltd
Address: 808,8F,Qiancheng Commercial center,5 Haicheng Road,Bao'an District, Shenzhen, China

Product Name: Tablet PC

Trademark: Pretech

Model Number: L1108, WP103, 863B, L863B, 863B-NFC, 1083D, WP32, L1208, 1083D-NFC, 1008, WP30, 763M, WP31, WP105, WP803, 1301, EP11, P308, 1108, L1008, P80, L871, L1083D, P15, 863L-NFC, S1401, WP95, 1101, 1083R, 763C, 1107, WP106, POE10, WP801, L1107, WP101, P105, 1108 NFC, 1102, OF3576S-8, 1163, L1401, 1037, L1083D-NFC, 2105, 1094, PT5010, 1032, TM140, F1150ZI-5, L1022IS, 1104, 1073, F716XM, 1019B, L1201D, 1040, 763B, 1105, 763, 863, 1150, 1108-NFC, smart vehicle infotainment, SH1, 763, 763KNX, L1301, WP80, 1083DD-NFC, WP20, 1038, 863A, N104, WL1895 NX, L1166IX, 1166, CP4-V88, 700, 1050, 863, 100, 400, 500, 600, 700, 800, 140, BF763A, 1091, PH55, 763, 863, 1063, 1071, F1030GR, 1083, 1410, F400, OF3576-11, 863L, P801-PoE, L870, WP70, L1030IS, GPS, G710, WL1863-4, 863C, 1063, H3576-32, S1201, 766, smart vehicle, F1150ZI-4, 1083P, H3576-21.5, 1007, NF400, WP102, OF3588S-8, 1093, L863L, 1019C, L1105, AP55A, OP110, 720, 1101IX, WP1095, 695, 702, L867P, 651G, F505P, 40P, F1560PM, P55M, 763/863/1063, PF1006, F763, 768B, L708XM-3D, F1071YI, AP55, 1401, F1063, 768, 1019, PH70/80, 1095, TOF, 707, 1098P, 1036, OF3576S-11, 619, 1260, W706XM, 1068, 768, 868, L1090EM, 1052, 1208, DC763C, DC863A, 1108Car, SoD3566-M, SoD3576-M, SoD3588S-M, H3576, H3588S, M3576S, M3562, BF763C, BF863A, BF863B, BF1008, BF1108

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.407, Subpart E ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS

Prepared by:

chris chen

Chris Chen
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
APPENDIX I - MEASUREMENT PHOTOS	18



Revision History

Rev.	Issue Date	Revisions
00	Sep. 24, 2026	Initial Issue

Note: Added the series of models, Change the base adapter, but all other aspects are the same.
The EMC CE and RE, and RF CE test data has been retested.



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Part 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024..
- (3) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46\%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57\text{dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.61\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Tablet PC								
Test Model Number:	L1108								
Model Numbers:	WP103, 863B, L863B, 863B-NFC, 1083D, WP32, L1208, 1083D-NFC, 1008, WP30, 763M, WP31, WP105, WP803, 1301, EP11, P308, 1108, L1008, P80, L871, L1083D, P15, 863L-NFC, S1401, WP95, 1101, 1083R, 763C, 1107, WP106, POE10, WP801, L1107, WP101, P105, 1108 NFC, 1102, OF3576S-8, 1163, L1401, 1037, L1083D-NFC, 2105, 1094, PT5010, 1032, TM140, F1150ZI-5, L1022IS, 1104, 1073, F716XM, 1019B, L1201D, 1040, 763B, 1105, 763, 863, 1150, 1108-NFC, smart vehicle infotainment, SH1, 763, 763KNX, L1301, WP80, 1083DD-NFC, WP20, 1038, 863A, N104, WL1895 NX, L1166IX, 1166, CP4-V88, 700, 1050, 863, 100, 400, 500, 600, 700, 800, 140, BF763A, 1091, PH55, 763, 863, 1063, 1071, F1030GR, 1083, 1410, F400, OF3576-11, 863L, P801-PoE, L870, WP70, L1030IS, GPS, G710, WL1863-4, 863C, 1063, H3576-32, S1201, 766, smart vehicle, F1150ZI-4, 1083P, H3576-21.5, 1007, NF400, WP102, OF3588S-8, 1093, L863L, 1019C, L1105, AP55A, OP110, 720, 1101IX, WP1095, 695, 702, L867P, 651G, F505P, 40P, F1560PM, P55M, 763/863/1063, PF1006, F763, 768B, L708XM-3D, F1071YI, AP55, 1401, F1063, 768, 1019, PH70/80, 1095, TOF, 707, 1098P, 1036, OF3576S-11, 619, 1260, W706XM, 1068, 768, 868, L1090EM, 1052, 1208, DC763C, DC863A, 1108Car, SoD3566-M, SoD3576-M, SoD3588S-M, H3576, H3588S, M3576S, M3562, BF763C, BF863A, BF863B, BF1008, BF1108								
Model Difference:	It's just the difference in sales regions and models.								
Product Description:	<table border="1"> <tr> <td>Operation Frequency:</td><td> IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz </td></tr> <tr> <td>Modulation Type:</td><td> 802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac(OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM </td></tr> <tr> <td>Antenna Designation:</td><td>PIFA Antenna</td></tr> <tr> <td>Antenna Gain(dBi)</td><td>0</td></tr> </table> More details of EUT technical specification, please refer to the User Manual.	Operation Frequency:	IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz	Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac(OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM	Antenna Designation:	PIFA Antenna	Antenna Gain(dBi)	0
Operation Frequency:	IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz								
Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac(OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM								
Antenna Designation:	PIFA Antenna								
Antenna Gain(dBi)	0								
Test Channel:	Please refer to the Note 3.								



Adapter:	Input: AC 100-240V 50/60Hz 0.8A Output: DC 12V 3A
Battery:	Capacity: 8000mAh Rated Voltage: 3.8V
Hardware Version:	P301-MB-V1.0.1
Software Version:	N/A
Connecting I/O Port(s):	Please refer to the Note 1.

Note

- For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.

3. Operation Frequency of channel			
5.180GHz-5.240GHz		5.260GHz-5.320GHz	
Channel	Frequency	Channel	Frequency
36	5180	52	5260
38	5190	54	5270
40	5200	56	5280
42	5210	58	5290
44	5220	60	5300
46	5230	62	5310
48	5240	64	5320
		5.745GHz-5.825GHz	
		Channel	Frequency
		149	5745
		151	5755
		153	5765
		157	5785
		159	5795
		161	5805
		165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

Channel List for 802.11a/n/ac(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	149	5745	--	--
40	5200	60	5300	157	5785	--	--
48	5240	64	5320	165	5825	--	--

Channel List for 802.11n/ac(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	151	5755	--	--
46	5230	62	5310	159	5795	--	--
--	--	--	--	--	--	--	--



Channel List for 802.11ac(80MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	155	5775	--	--
--	--	--	--	--	--	--	--



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH52&CH60&CH64	6 Mbps
Mode 3	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 4	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 5	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 6	TX IEEE 802.11n HT20 CH52&CH60&CH64	MCS 0
Mode 7	TX IEEE 802.11ac VHT20 CH52&CH60&CH64	NSS1 MCS0
Mode 8	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 9	TX IEEE 802.11ac VHT20 CH149&CH157&CH165	NSS1 MCS0
Mode 10	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 11	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 12	TX IEEE 802.11n HT40 CH54 &CH62	MCS 0
Mode 13	TX IEEE 802.11ac VHT40 CH54 &CH62	NSS1 MCS0
Mode 14	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 15	TX IEEE 802.11ac VHT40 CH151&CH159	NSS1 MCS0
Mode 16	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 17	TX IEEE 802.11ac VHT80 CH58	NSS1 MCS0
Mode 18	TX IEEE 802.11ac VHT80 CH155	NSS1 MCS0

- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
 (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
 (3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
 (4) The battery is fully-charged during the radiated and RF conducted test.
 (5) All bandwidth modes have been tested, and the report only shown the worst mode data.
 (6) The 802.11ax mode is investigated among different tones (26/52/106/242-tone RU channel), full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 19: TX Mode



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 5G WIFI U-NII-1	
Engineering Mode	Mode Or Modulation type	Power setting
	a	Default
	n20	Default
	n40	Default
	ac20	Default
	ac40	Default
	ac80	Default
Test software Version	Test program: 5G WIFI U-NII-2A	
Engineering Mode	Mode Or Modulation type	Power setting
	a	Default
	n20	Default
	n40	Default
	ac20	Default
	ac40	Default
	ac80	Default
Test software Version	Test program: 5G WIFI U-NII-3	
Engineering Mode	Mode Or Modulation type	Power setting
	a	Default
	n20	Default
	n40	Default
	ac20	Default
	ac40	Default
	ac80	Default



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Charger base	Dongguan Bestgk Smark Technology Co.,Ltd	K-A141203000U	N/A	Input: 100-240V 50/60Hz Output: 12V, 3A
Adapter	Dongguan Bestgk Smark Technology Co.,Ltd	K-A141203000U	N/A	Input: 100-240V 50/60Hz Output: 12V, 3A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	ASUS	UX3407Q	N/A	N/A
USB-A to USB-C Cable	UGREEN	US287	N/A	1m, shielded, without ferrite core
Earphone	VESAFE	39630078	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESCI	100458	2026-04-21	2027-04-20
LISN	COM-POWER	LI-115	02032	2026-03-03	2027-03-02
LISN	SCHWARZBECK	NNLK 8122	00160	2026-03-03	2027-03-02
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2026-03-03	2027-03-02
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600- NMNM-2M	N.A	2026-03-03	2027-03-02
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2026-03-05	2027-03-04
Testing Software	EMC-I_V1.5.0.16_SKET				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

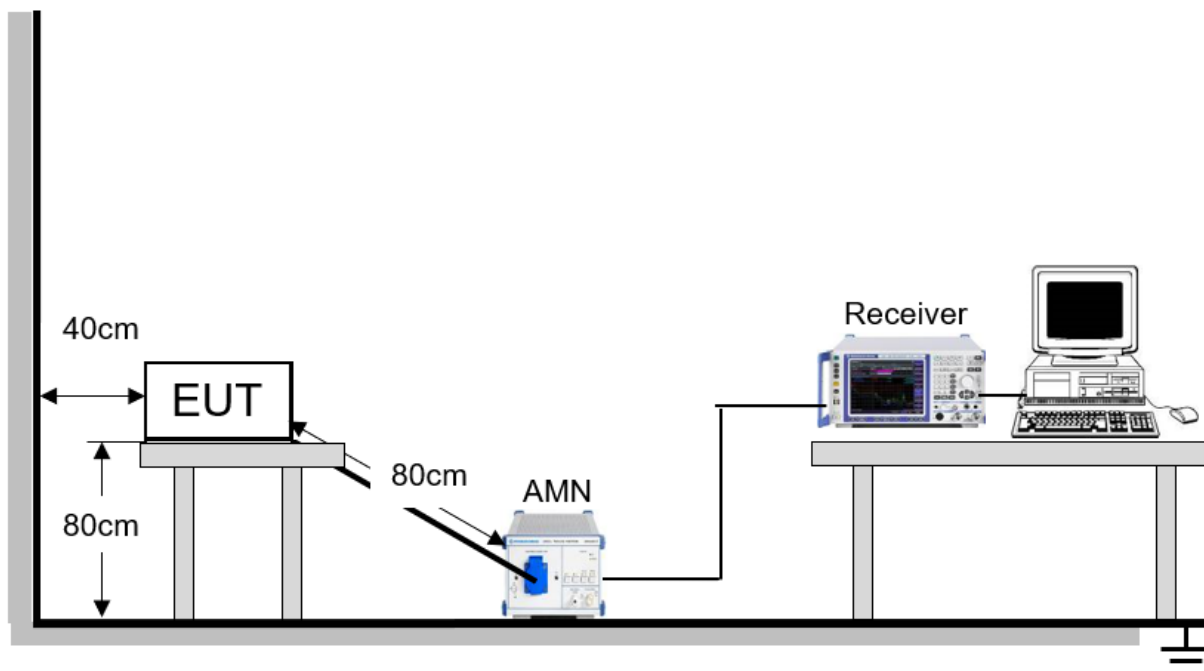

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

Note: Level = Reading + Factor

Margin = Level – Limit


Project: LGT26I143	Test Engineer: Bill Chen
EUT: Tablet PC	Temperature: 25.4°C
M/N: L1108	Humidity: 47%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-08-27
Test Mode: TX 802.11a 5180	
Note: AC Mains port	

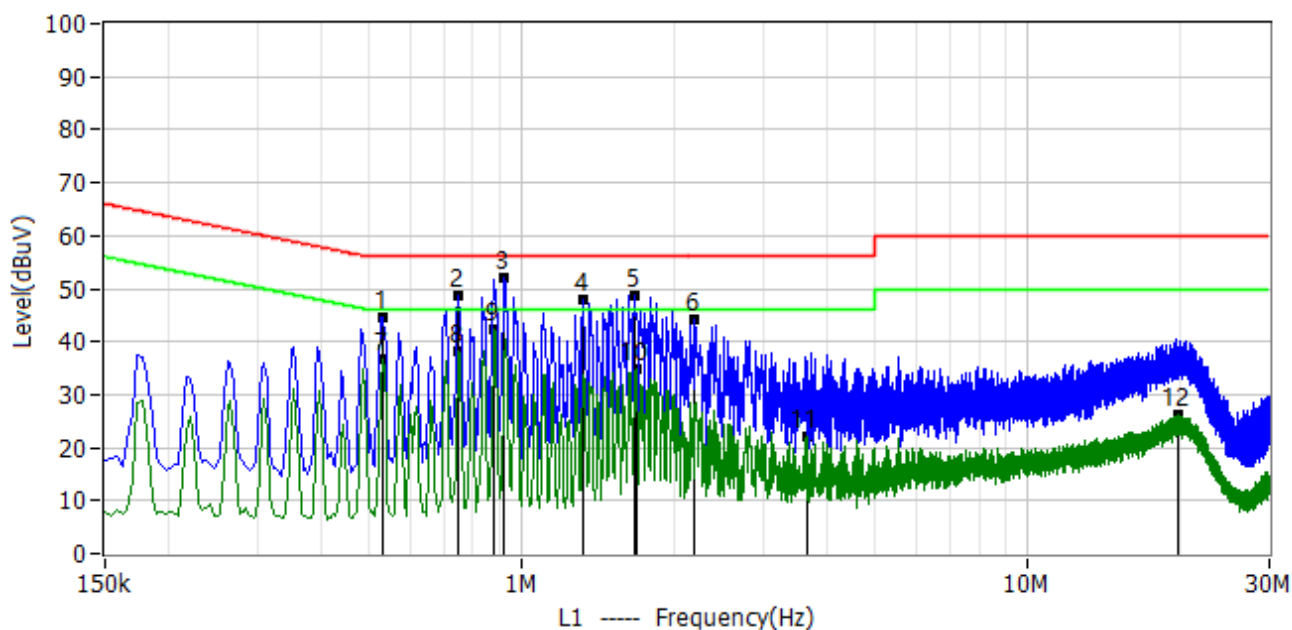

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.530	33.99	10.63	44.62	56.00	-11.38	QP	L1
2*	0.746	37.93	10.64	48.57	56.00	-7.43	QP	L1
3*	0.922	41.45	10.66	52.11	56.00	-3.89	QP	L1
4*	1.318	37.12	10.72	47.84	56.00	-8.16	QP	L1
5*	1.666	38.01	10.80	48.81	56.00	-7.19	QP	L1
6*	2.198	33.17	10.89	44.06	56.00	-11.94	QP	L1
7*	0.530	26.03	10.63	36.66	46.00	-9.34	AV	L1
8*	0.750	27.52	10.64	38.16	46.00	-7.84	AV	L1
9*	0.882	31.65	10.66	42.31	46.00	-3.69	AV	L1
10*	1.682	24.05	10.81	34.86	46.00	-11.14	AV	L1
11*	3.646	11.29	10.95	22.24	46.00	-23.76	AV	L1
12*	19.758	14.49	11.54	26.03	50.00	-23.97	AV	L1



Project: LGT26I143	Test Engineer: Bill Chen
EUT: Tablet PC	Temperature: 25.4°C
M/N: L1108	Humidity: 47%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-08-27
Test Mode: TX 802.11a 5180	
Note: AC Mains port	

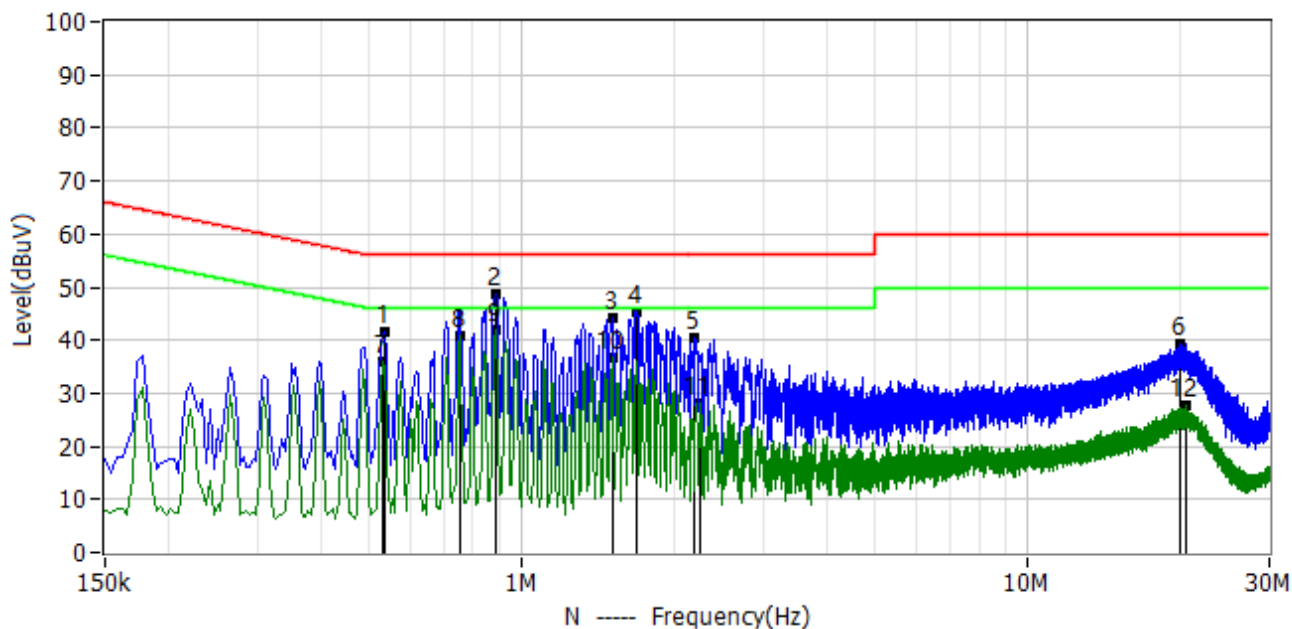

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.534	30.93	10.65	41.58	56.00	-14.42	QP	N
2*	0.886	38.15	10.67	48.82	56.00	-7.18	QP	N
3*	1.510	33.40	10.78	44.18	56.00	-11.82	QP	N
4*	1.690	34.49	10.81	45.30	56.00	-10.70	QP	N
5*	2.198	29.72	10.88	40.60	56.00	-15.40	QP	N
6*	19.910	27.80	11.59	39.39	60.00	-20.61	QP	N
7*	0.530	25.26	10.65	35.91	46.00	-10.09	AV	N
8*	0.754	30.14	10.66	40.80	46.00	-5.20	AV	N
9*	0.886	31.37	10.67	42.04	46.00	-3.96	AV	N
10*	1.506	25.82	10.78	36.60	46.00	-9.40	AV	N
11*	2.258	17.22	10.89	28.11	46.00	-17.89	AV	N
12*	20.534	16.21	11.61	27.82	50.00	-22.18	AV	N



APPENDIX I - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID.

※※※※※END OF THE REPORT※※※※※