


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	95.92	0.18	0.08
NVNT	b	2437	Ant1	95.92	0.18	0.08
NVNT	b	2462	Ant1	95.92	0.18	0.08
NVNT	g	2412	Ant1	79.3	1.01	0.49
NVNT	g	2437	Ant1	79.3	1.01	0.49
NVNT	g	2462	Ant1	74.36	1.29	0.49
NVNT	n20	2412	Ant1	78.51	1.05	0.53
NVNT	n20	2437	Ant1	78.1	1.07	0.53
NVNT	n20	2462	Ant1	78.1	1.07	0.53
NVNT	n40	2422	Ant1	63.7	1.96	1.08
NVNT	n40	2437	Ant1	64.38	1.91	1.06
NVNT	n40	2452	Ant1	63.7	1.96	1.08
NVNT	ax20	2412	Ant1	73.23	1.35	0.69
NVNT	ax20	2437	Ant1	73.37	1.35	0.68
NVNT	ax20	2462	Ant1	73.37	1.35	0.68
NVNT	ax40	2422	Ant1	58.91	2.3	1.32
NVNT	ax40	2437	Ant1	58.91	2.3	1.32
NVNT	ax40	2452	Ant1	59.38	2.26	1.32

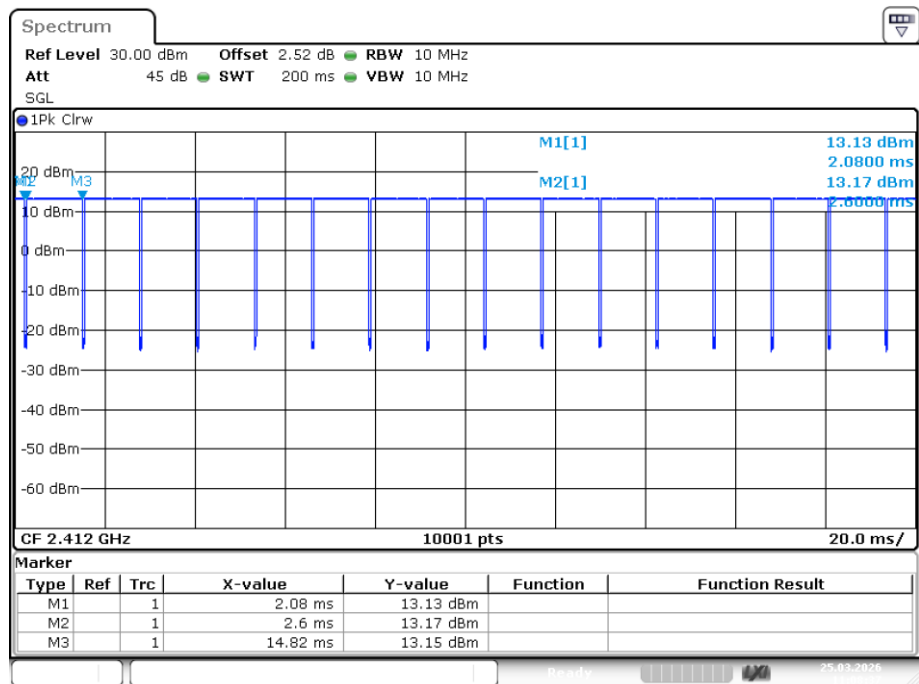


Date: 25.MAR.2026 11:08:37

Duty Cycle NVNT b 2412MHz Ant1

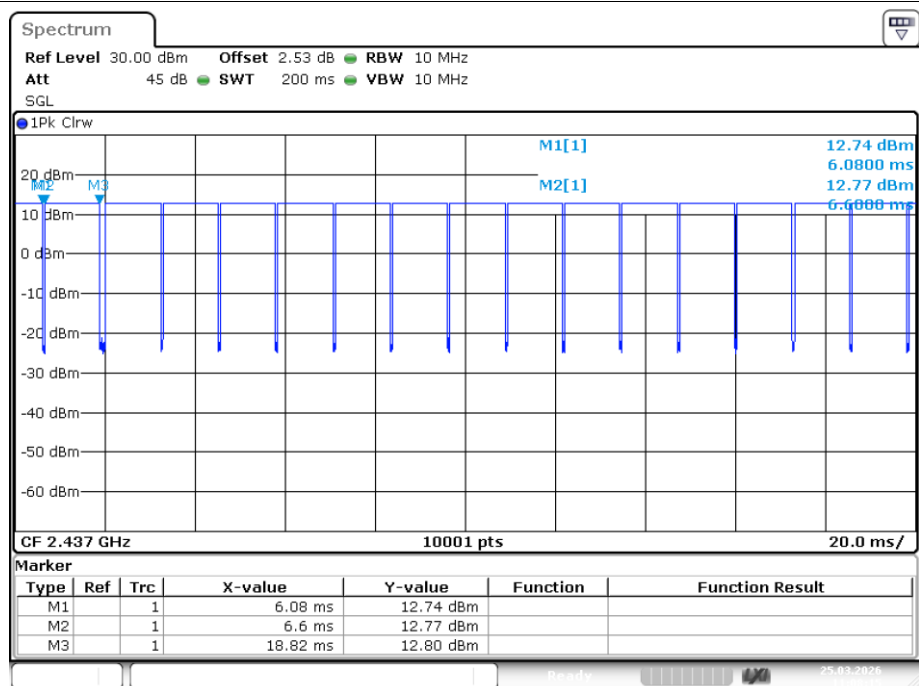


Date: 25.MAR.2026 11:08:15


Duty Cycle NVNT b 2437MHz Ant1

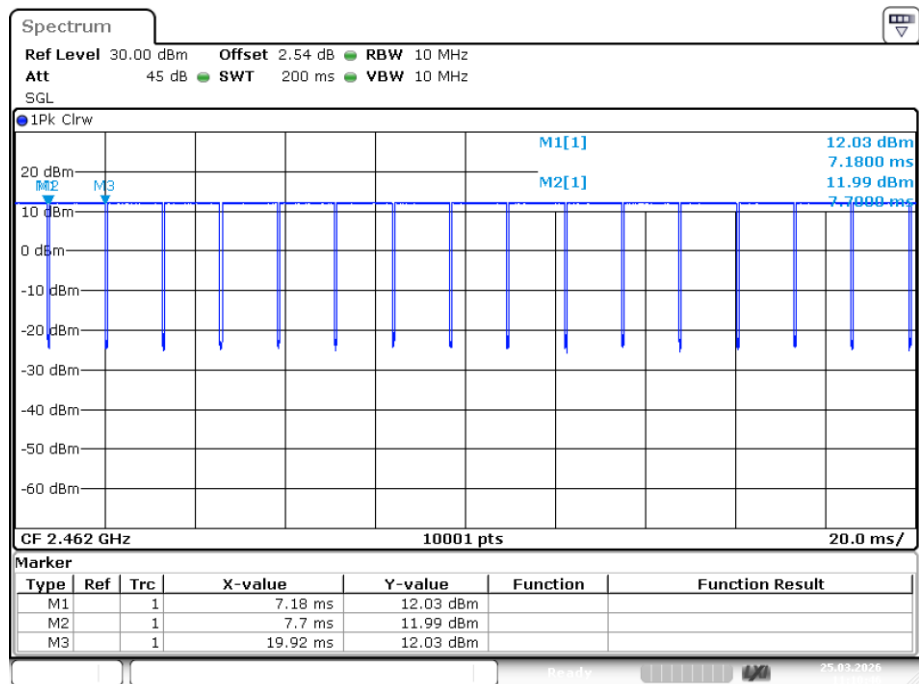

Duty Cycle NVNT b 2462MHz Ant1

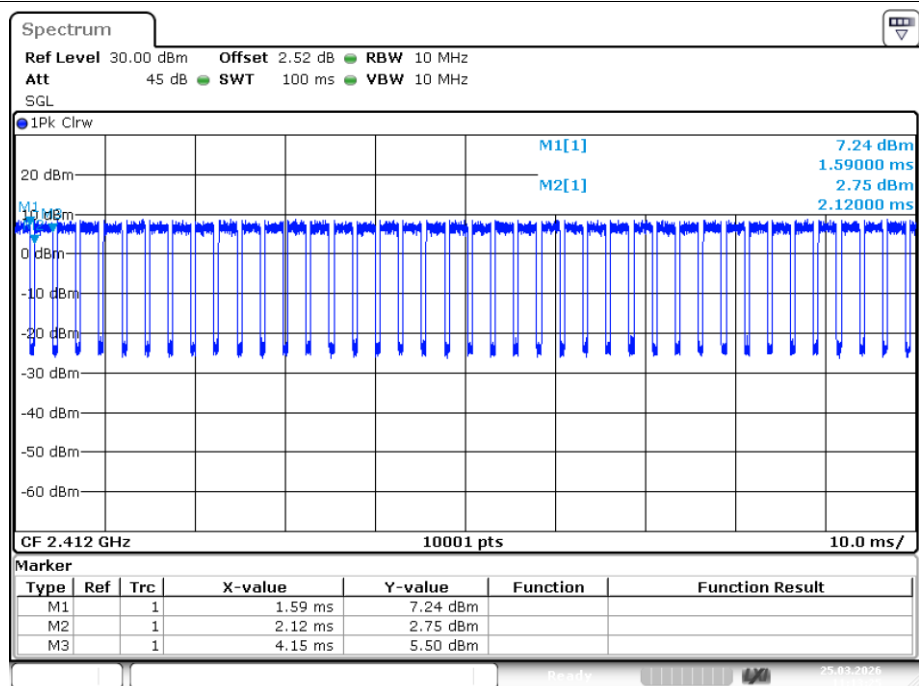


Duty Cycle NVNT g 2412MHz Ant1

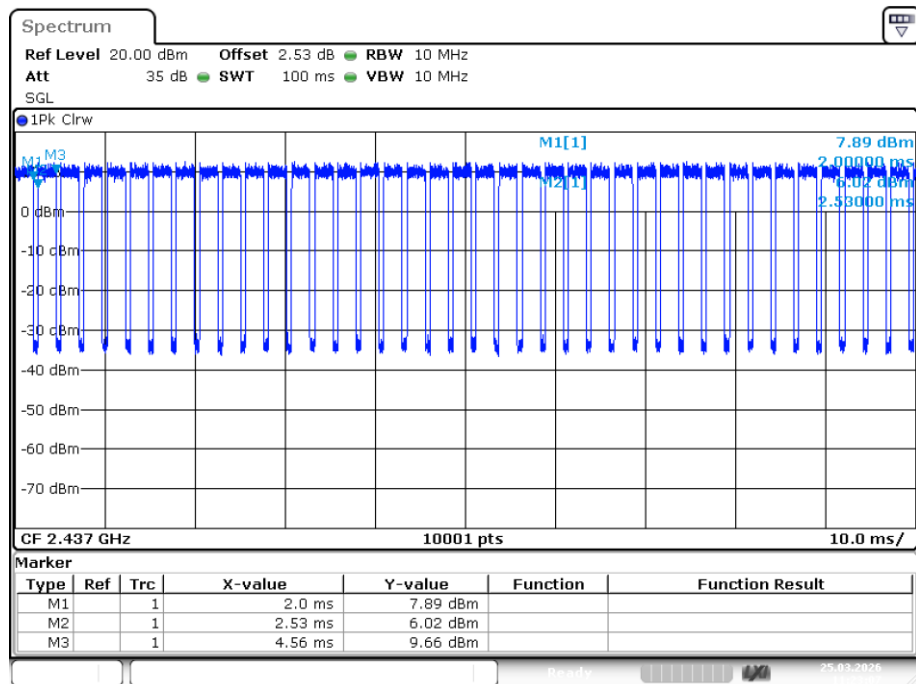


Date: 25.MAR.2026 11:23:07

Duty Cycle NVNT g 2437MHz Ant1

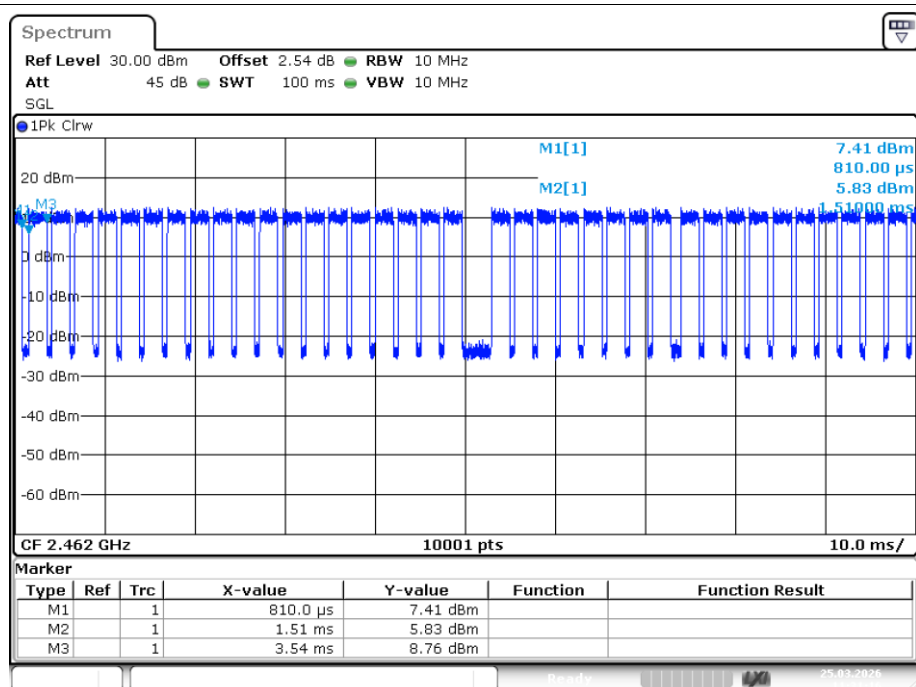


Date: 25.MAR.2026 11:31:16

Duty Cycle NVNT g 2462MHz Ant1

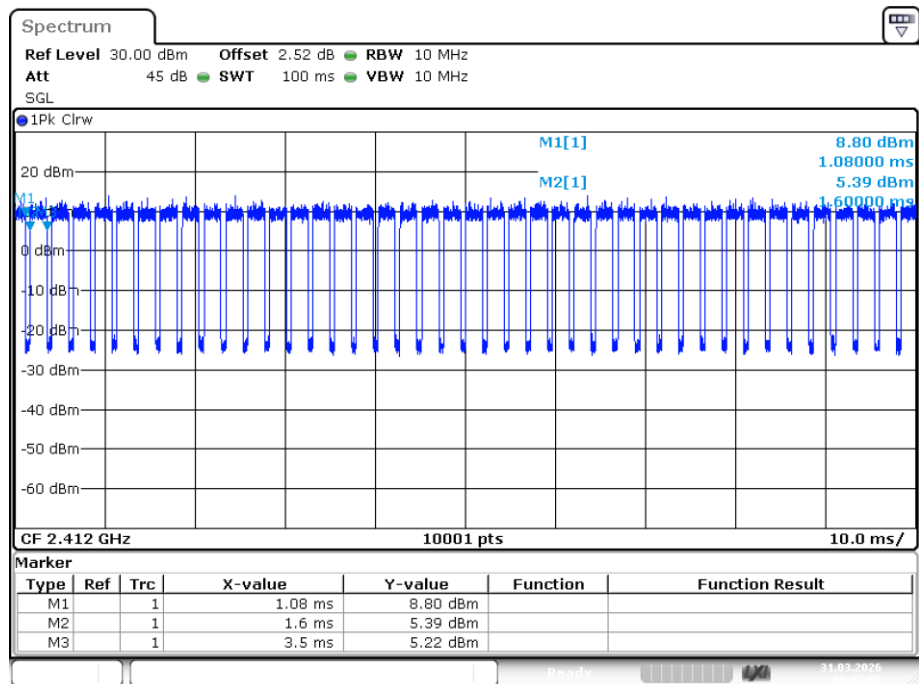


Date: 31.MAR.2026 16:42:58

Duty Cycle NVNT n20 2412MHz Ant1

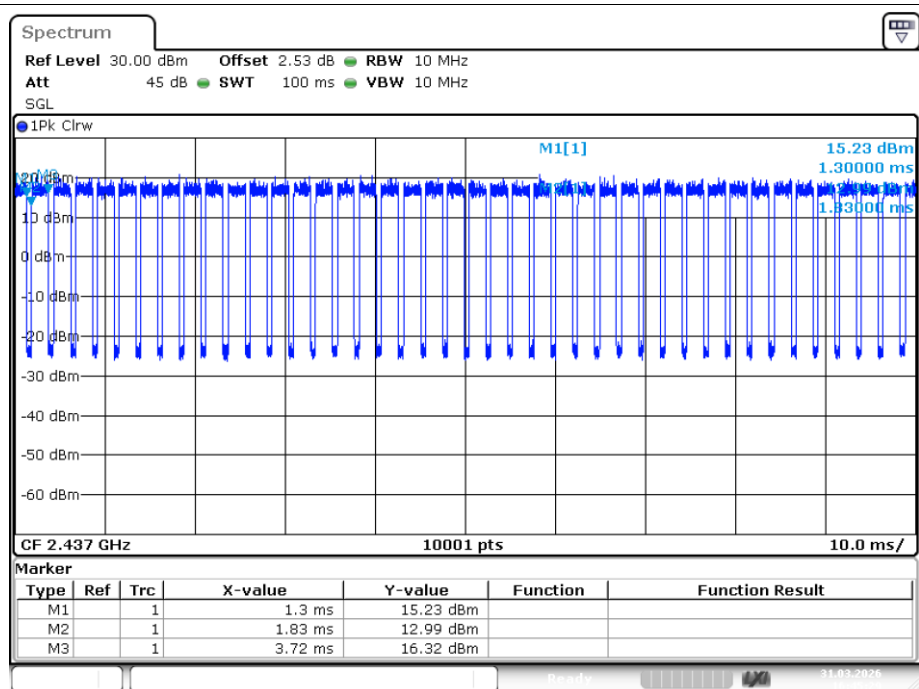


Date: 31.MAR.2026 16:45:29

Duty Cycle NVNT n20 2437MHz Ant1

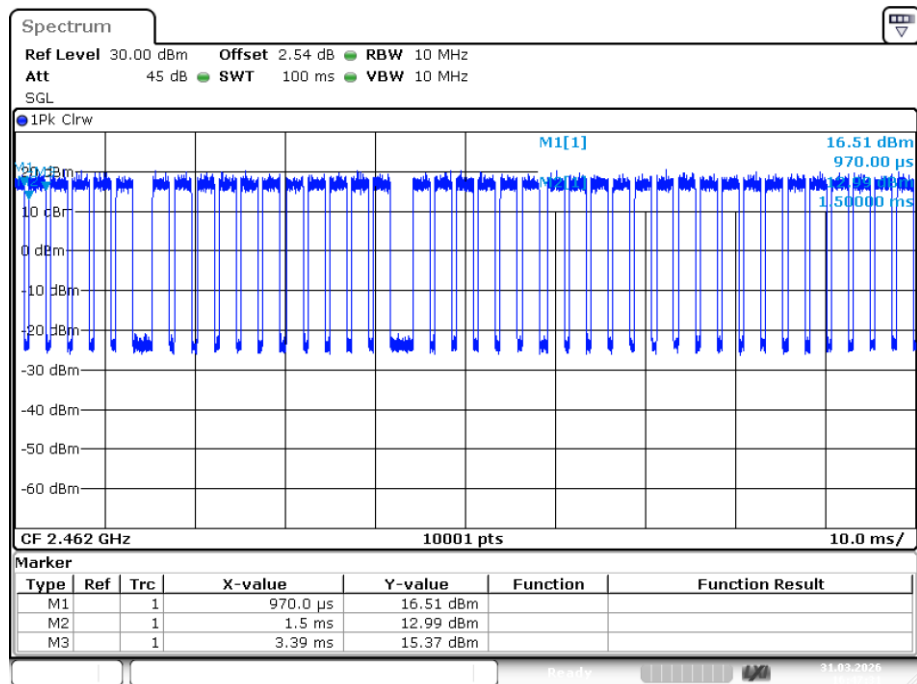


Date: 31.MAR.2026 16:47:31

Duty Cycle NVNT n20 2462MHz Ant1

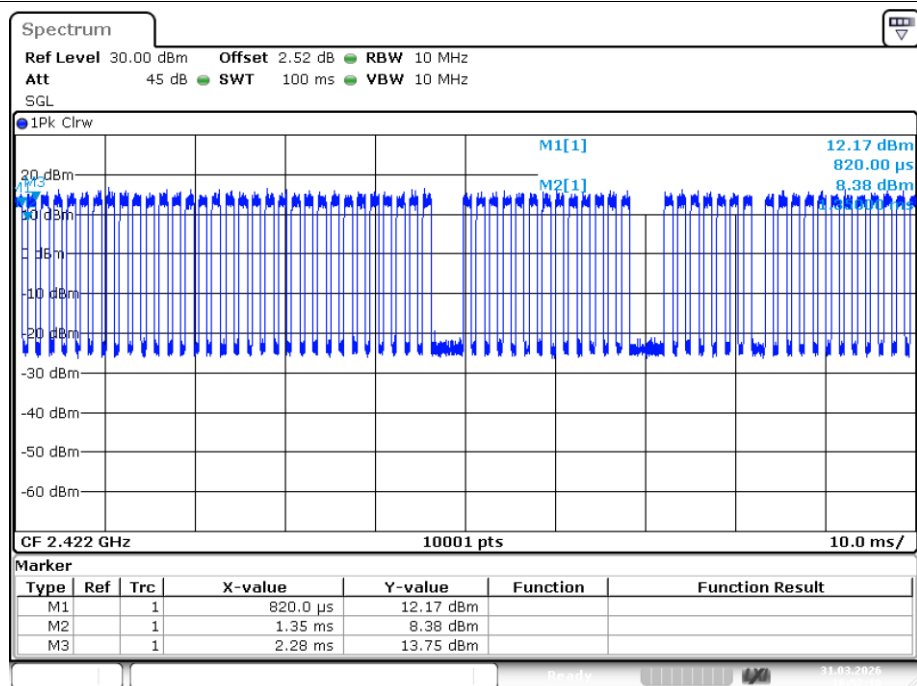


Date: 31.MAR.2026 16:52:10

Duty Cycle NVNT n40 2422MHz Ant1

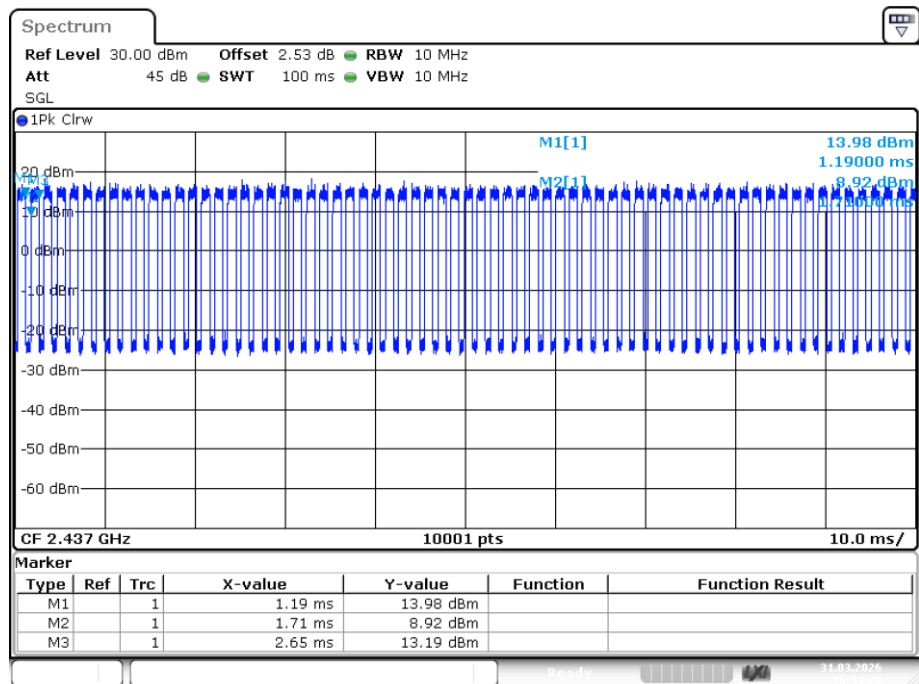


Date: 31.MAR.2026 16:54:19

Duty Cycle NVNT n40 2437MHz Ant1

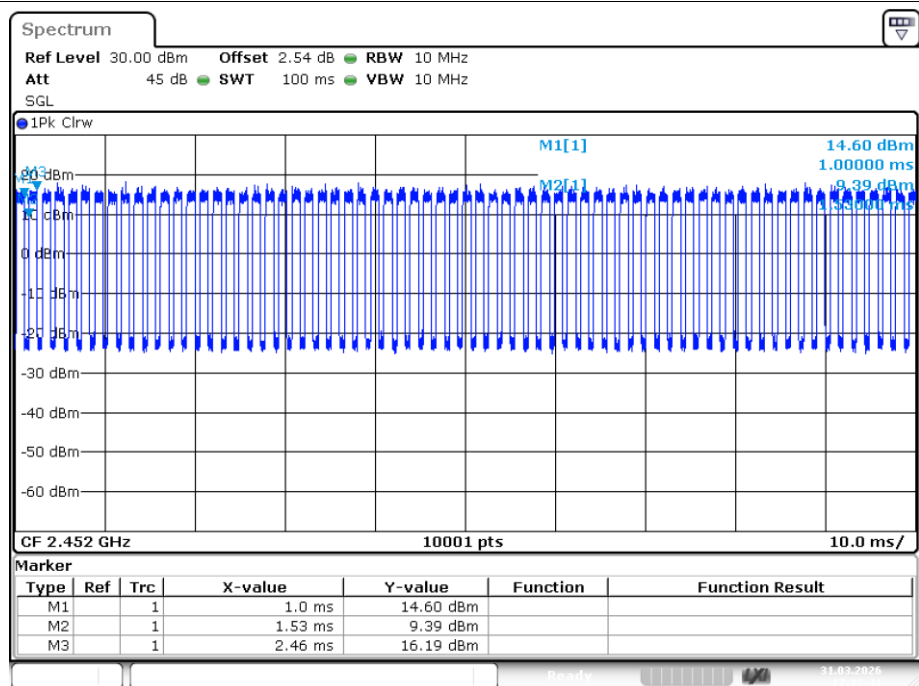


Date: 31.MAR.2026 17:12:40

Duty Cycle NVNT n40 2452MHz Ant1

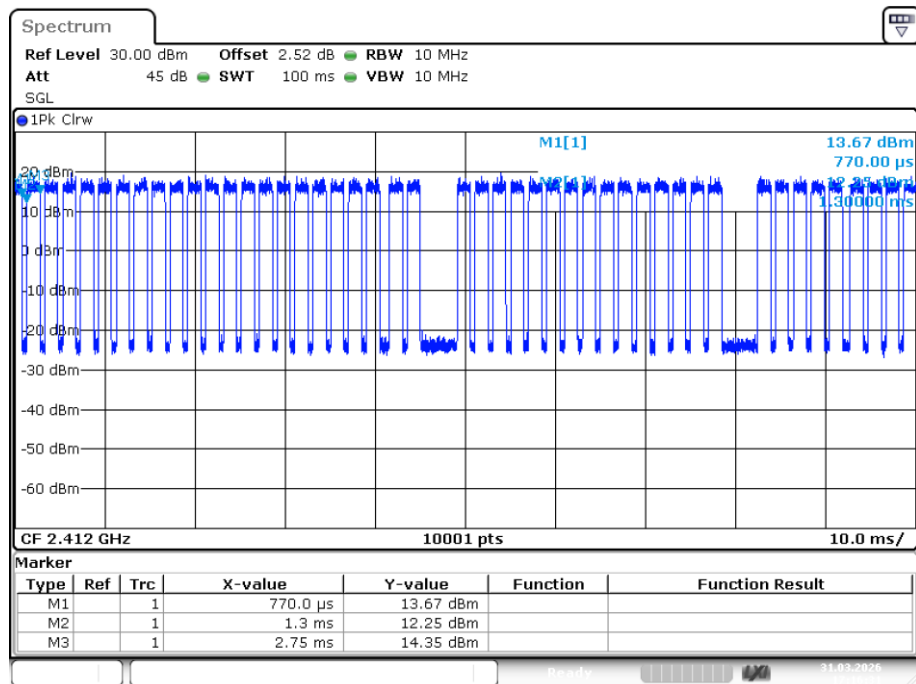


Date: 31.MAR.2026 17:16:32

Duty Cycle NVNT ax20 2412MHz Ant1

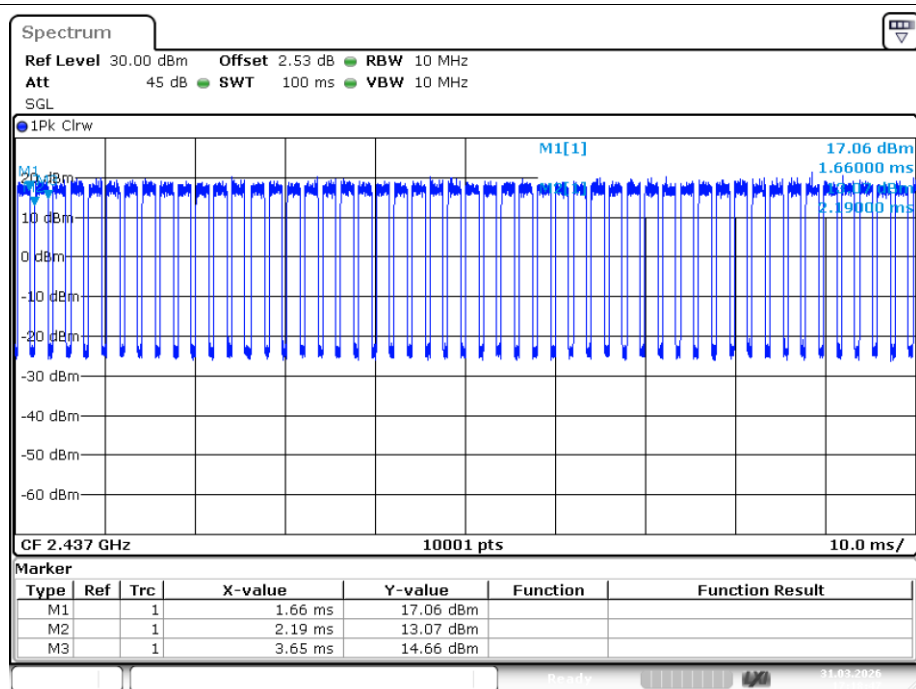


Date: 31.MAR.2026 17:18:47

Duty Cycle NVNT ax20 2437MHz Ant1

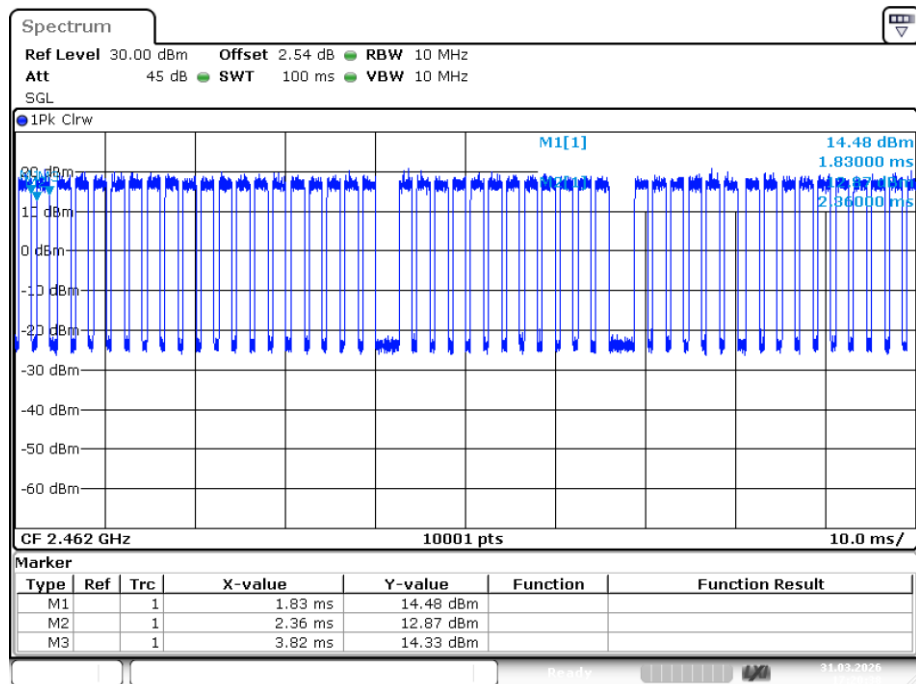


Date: 31.MAR.2026 17:20:37

Duty Cycle NVNT ax20 2462MHz Ant1

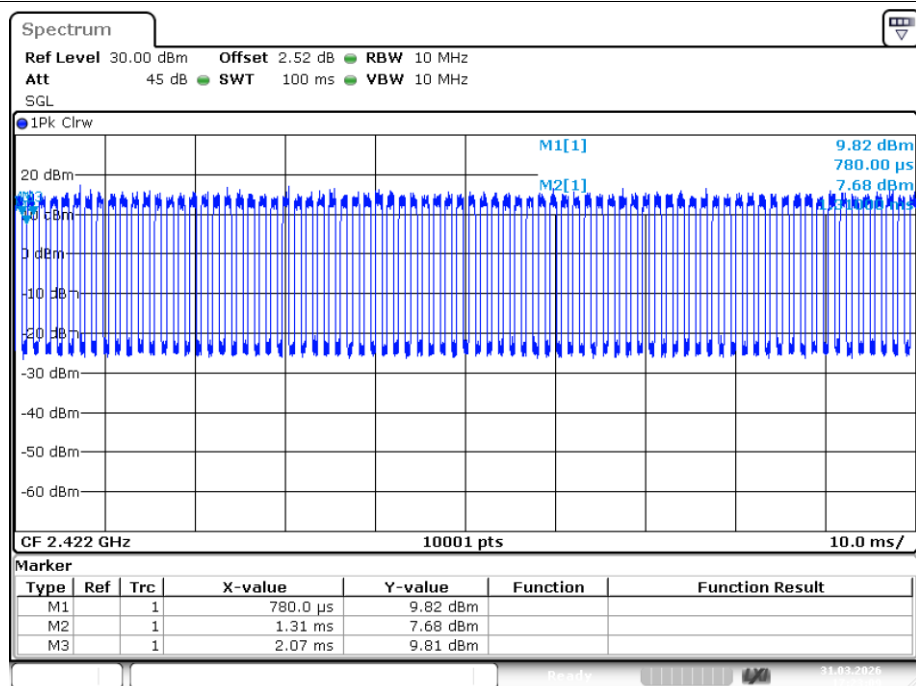


Date: 31.MAR.2026 17:23:09

Duty Cycle NVNT ax40 2422MHz Ant1

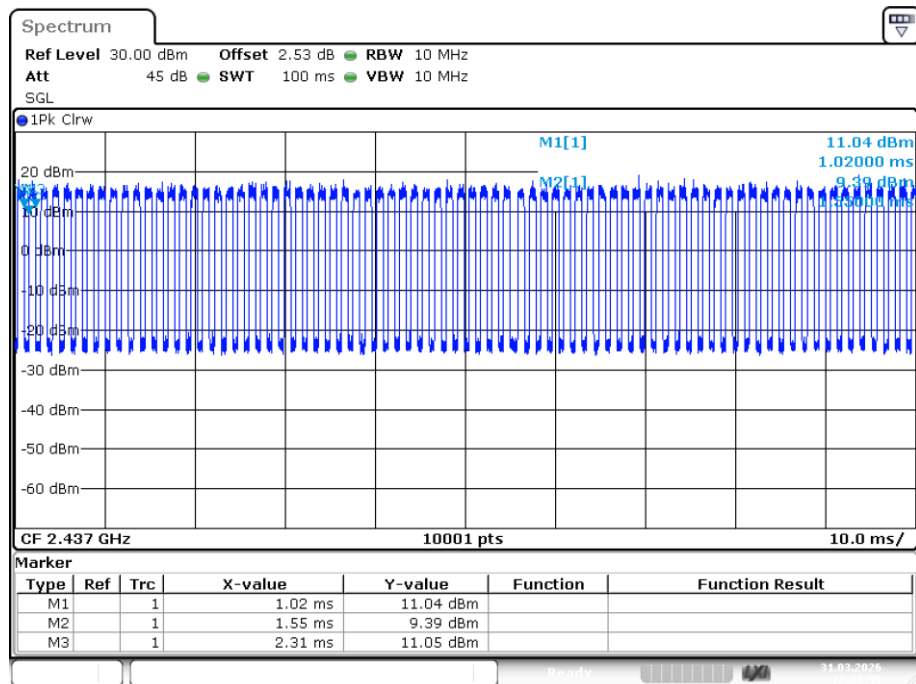

Date: 31.MAR.2026 17:25:59

Duty Cycle NVNT ax40 2437MHz Ant1

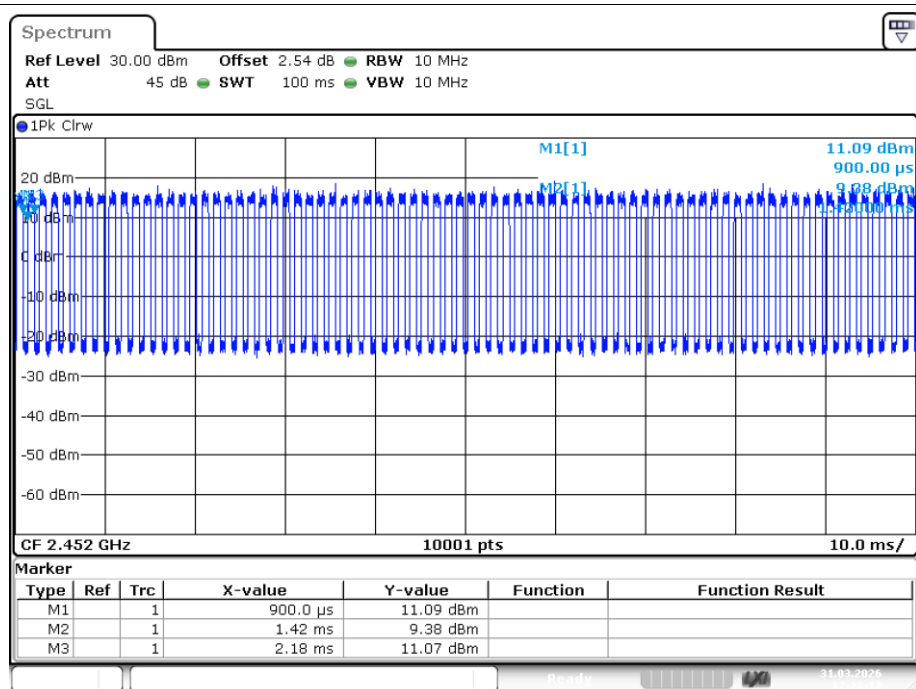

Date: 31.MAR.2026 17:28:17

Duty Cycle NVNT ax40 2452MHz Ant1


Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	14.92	30	Pass
NVNT	b	2437	Ant1	15.27	30	Pass
NVNT	b	2462	Ant1	15.48	30	Pass
NVNT	g	2412	Ant1	11.01	30	Pass
NVNT	g	2437	Ant1	11	30	Pass
NVNT	g	2462	Ant1	11.77	30	Pass
NVNT	n20	2412	Ant1	10.94	30	Pass
NVNT	n20	2437	Ant1	12.01	30	Pass
NVNT	n20	2462	Ant1	11.84	30	Pass
NVNT	n40	2422	Ant1	10.87	30	Pass
NVNT	n40	2437	Ant1	11.91	30	Pass
NVNT	n40	2452	Ant1	11.85	30	Pass
NVNT	ax20	2412	Ant1	10.84	30	Pass
NVNT	ax20	2437	Ant1	11.93	30	Pass
NVNT	ax20	2462	Ant1	11.62	30	Pass
NVNT	ax40	2422	Ant1	10.7	30	Pass
NVNT	ax40	2437	Ant1	11.77	30	Pass
NVNT	ax40	2452	Ant1	11.8	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit Conducted(dBm)	Verdict
NVNT	b	2412	Ant1	14.92	2.47	17.39	36.02	Pass
NVNT	b	2437	Ant1	15.27	2.47	17.74	36.02	Pass
NVNT	b	2462	Ant1	15.48	2.47	17.95	36.02	Pass
NVNT	g	2412	Ant1	11.01	2.47	13.48	36.02	Pass
NVNT	g	2437	Ant1	11	2.47	13.47	36.02	Pass
NVNT	g	2462	Ant1	11.77	2.47	14.24	36.02	Pass
NVNT	n20	2412	Ant1	10.94	2.47	13.41	36.02	Pass
NVNT	n20	2437	Ant1	12.01	2.47	14.48	36.02	Pass
NVNT	n20	2462	Ant1	11.84	2.47	14.31	36.02	Pass
NVNT	n40	2422	Ant1	10.87	2.47	13.34	36.02	Pass
NVNT	n40	2437	Ant1	11.91	2.47	14.38	36.02	Pass
NVNT	n40	2452	Ant1	11.85	2.47	14.32	36.02	Pass
NVNT	ax20	2412	Ant1	10.84	2.47	13.31	36.02	Pass
NVNT	ax20	2437	Ant1	11.93	2.47	14.4	36.02	Pass
NVNT	ax20	2462	Ant1	11.62	2.47	14.09	36.02	Pass
NVNT	ax40	2422	Ant1	10.7	2.47	13.17	36.02	Pass
NVNT	ax40	2437	Ant1	11.77	2.47	14.24	36.02	Pass
NVNT	ax40	2452	Ant1	11.8	2.47	14.27	36.02	Pass


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.568	0.5	Pass
NVNT	b	2437	Ant1	9.048	0.5	Pass
NVNT	b	2462	Ant1	8.568	0.5	Pass
NVNT	g	2412	Ant1	16.047	0.5	Pass
NVNT	g	2437	Ant1	16.029	0.5	Pass
NVNT	g	2462	Ant1	16.293	0.5	Pass
NVNT	n20	2412	Ant1	16.29	0.5	Pass
NVNT	n20	2437	Ant1	16.659	0.5	Pass
NVNT	n20	2462	Ant1	17.601	0.5	Pass
NVNT	n40	2422	Ant1	35.052	0.5	Pass
NVNT	n40	2437	Ant1	32.82	0.5	Pass
NVNT	n40	2452	Ant1	35.31	0.5	Pass
NVNT	ax20	2412	Ant1	16.005	0.5	Pass
NVNT	ax20	2437	Ant1	18.102	0.5	Pass
NVNT	ax20	2462	Ant1	18.9	0.5	Pass
NVNT	ax40	2422	Ant1	37.278	0.5	Pass
NVNT	ax40	2437	Ant1	35.082	0.5	Pass
NVNT	ax40	2452	Ant1	35.238	0.5	Pass

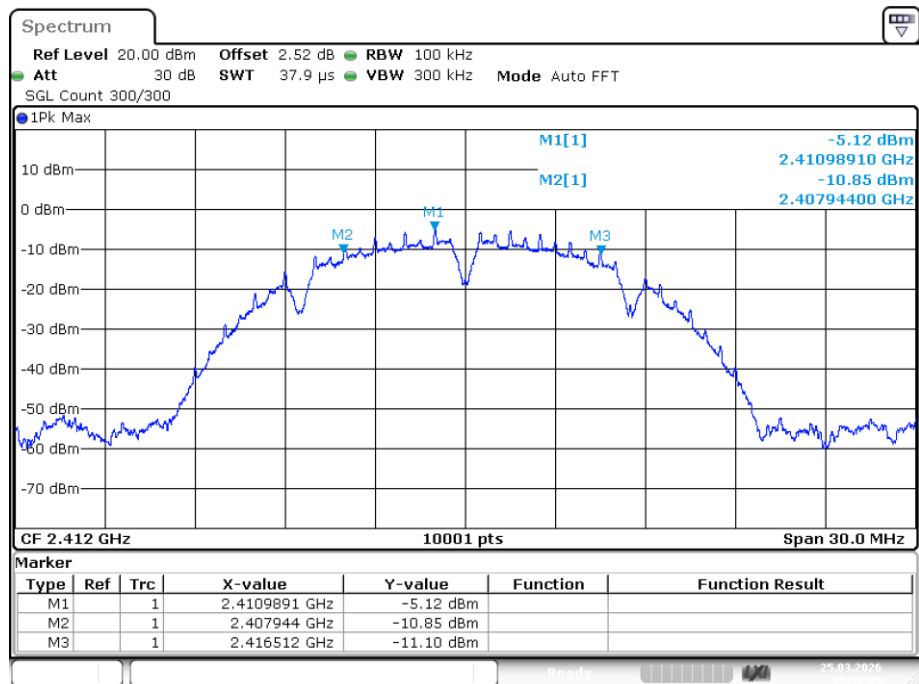


Date: 25.MAR.2026 10:52:29

-6dB Bandwidth NVNT b 2412MHz Ant1

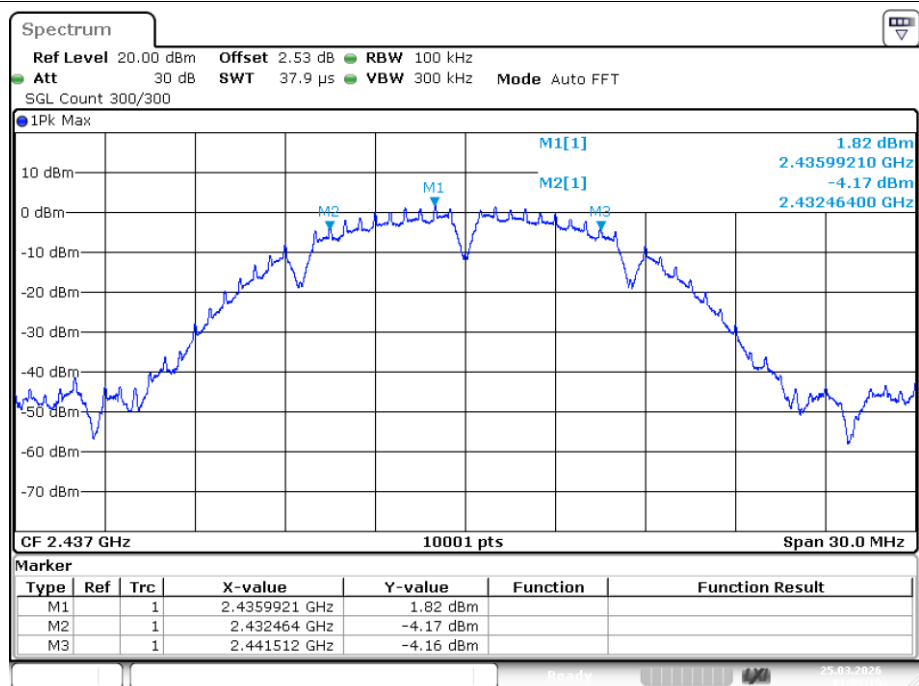


Date: 25.MAR.2026 11:09:19


-6dB Bandwidth NVNT b 2437MHz Ant1

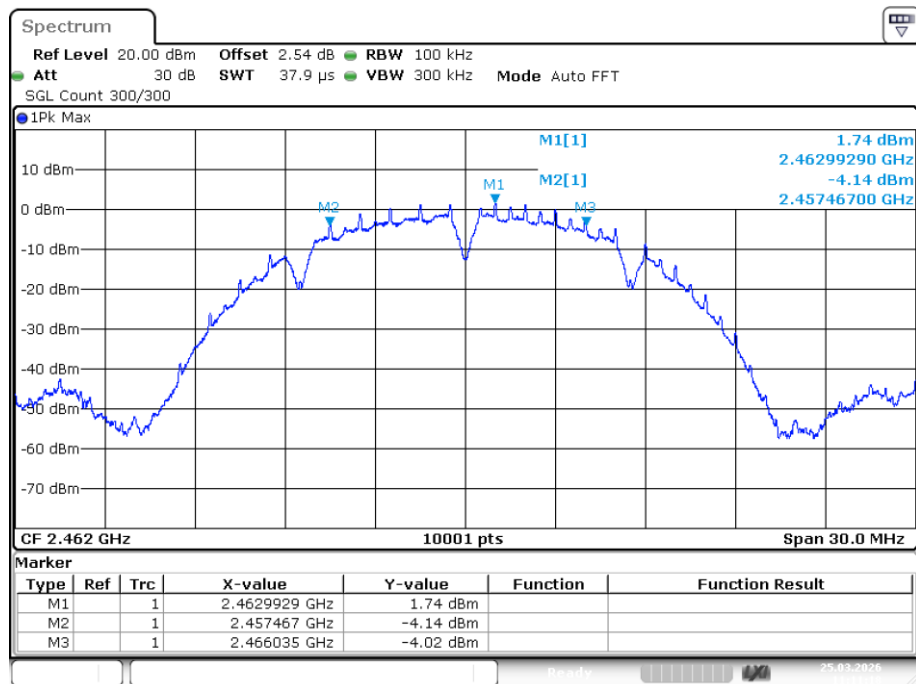


-6dB Bandwidth NVNT b 2462MHz Ant1

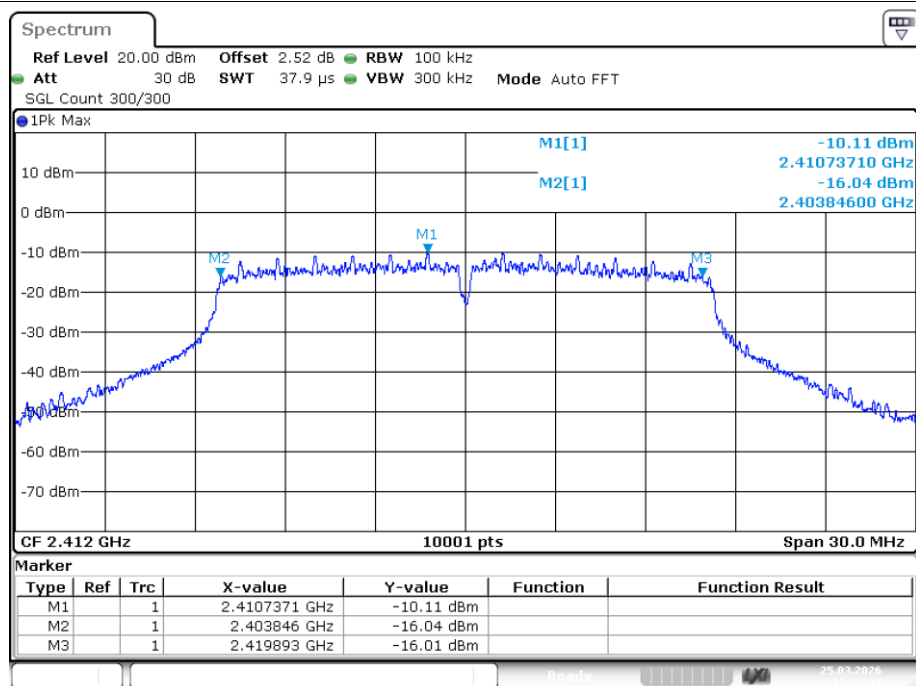


-6dB Bandwidth NVNT g 2412MHz Ant1

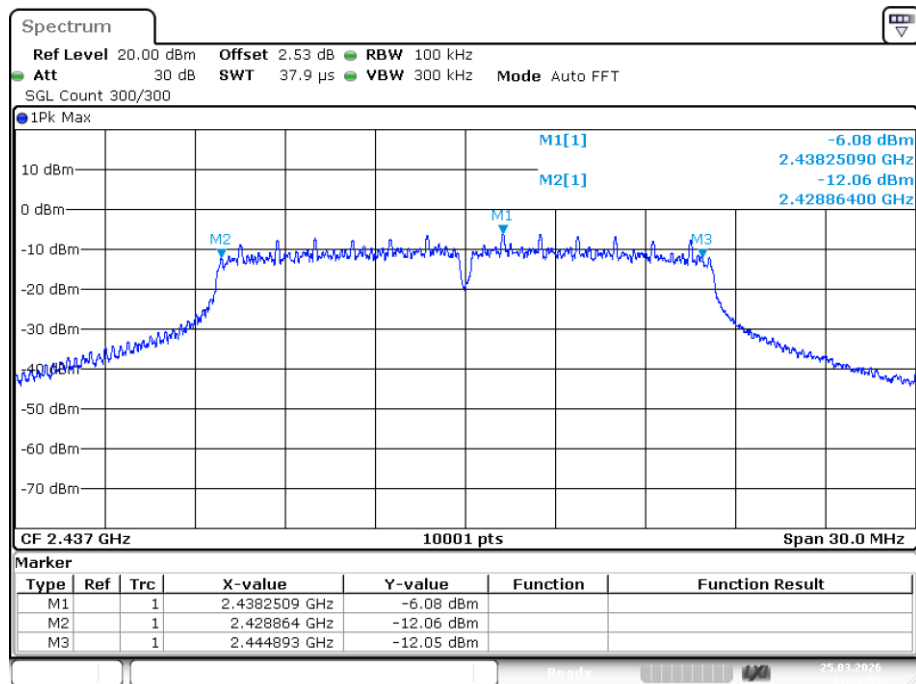

-6dB Bandwidth NVNT g 2437MHz Ant1

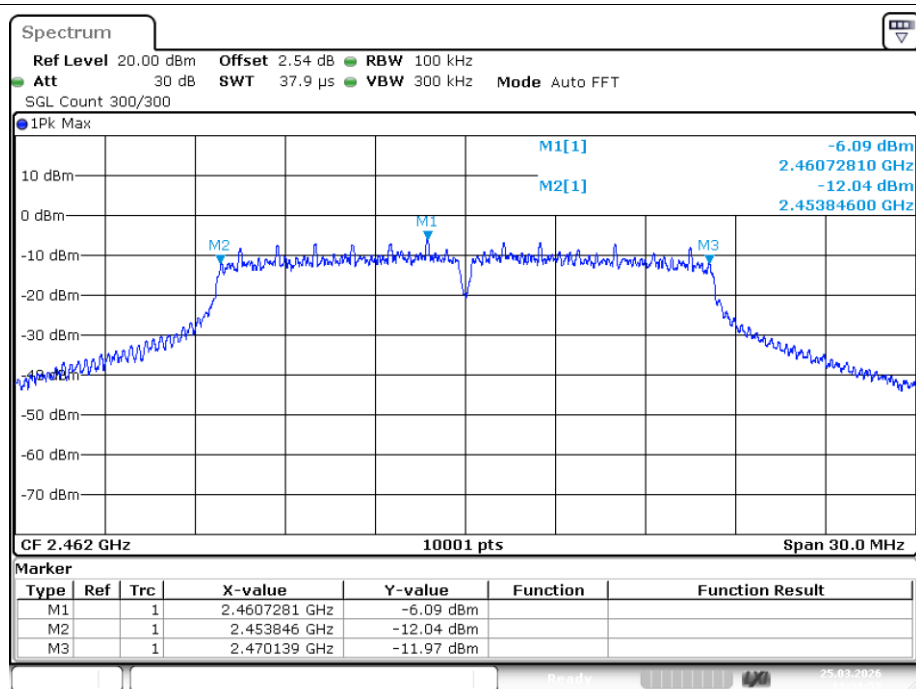


-6dB Bandwidth NVNT g 2462MHz Ant1

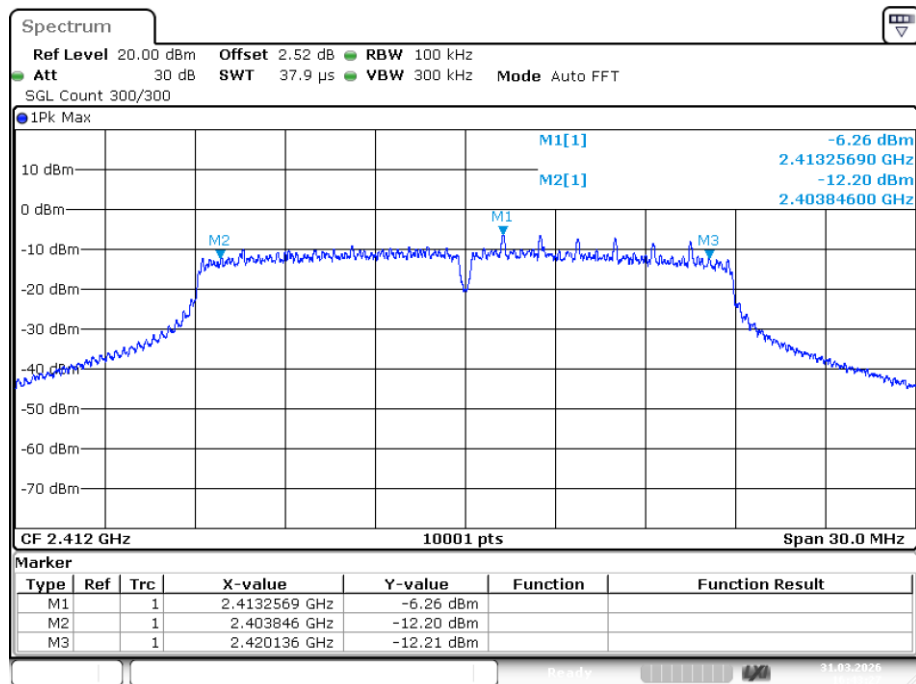


Date: 31.MAR.2026 16:43:27

-6dB Bandwidth NVNT n20 2412MHz Ant1

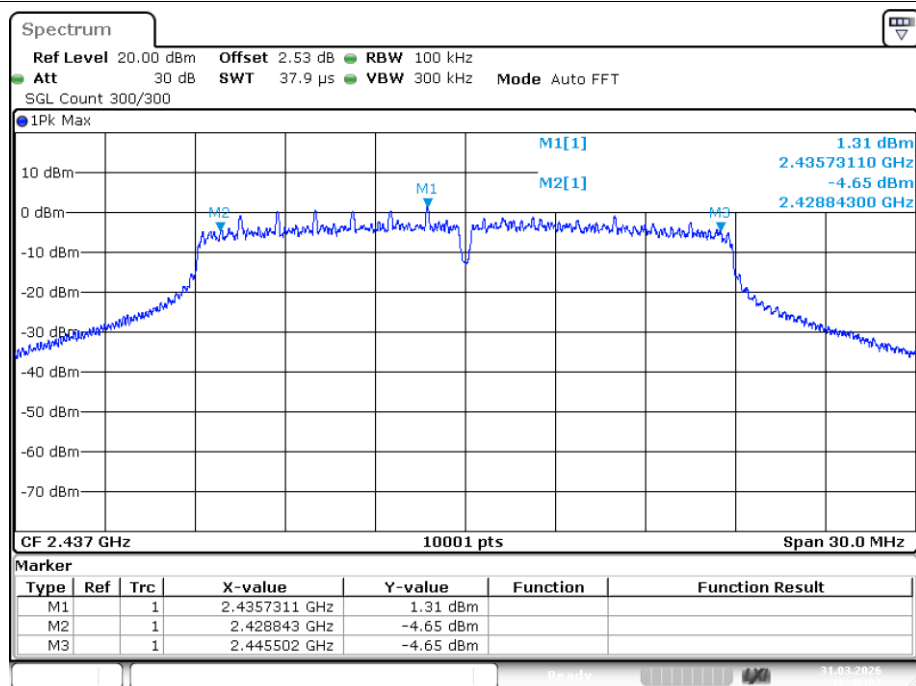


Date: 31.MAR.2026 16:46:02

-6dB Bandwidth NVNT n20 2437MHz Ant1

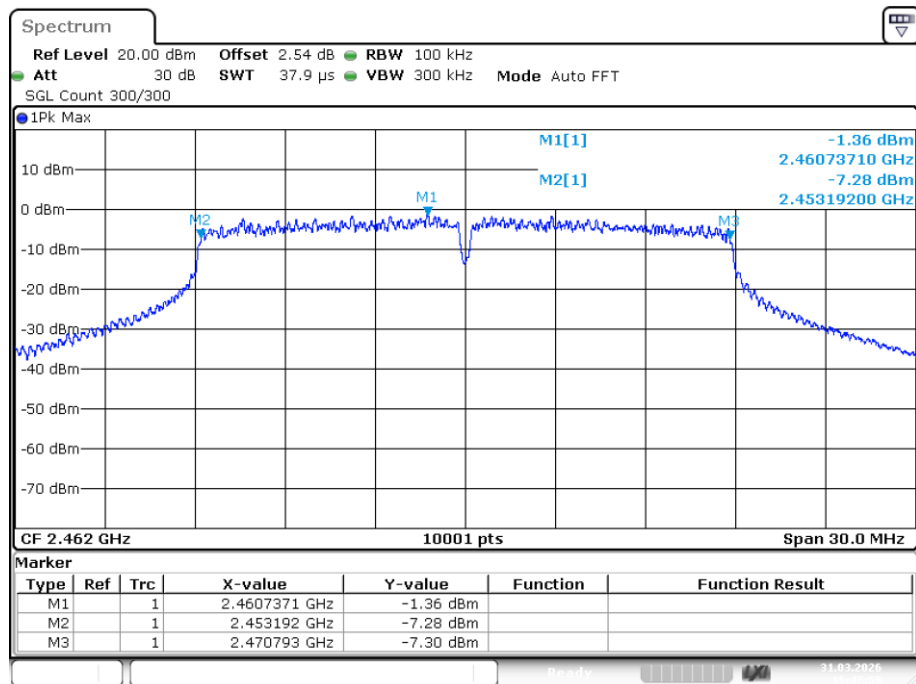


Date: 31.MAR.2026 16:47:59

-6dB Bandwidth NVNT n20 2462MHz Ant1

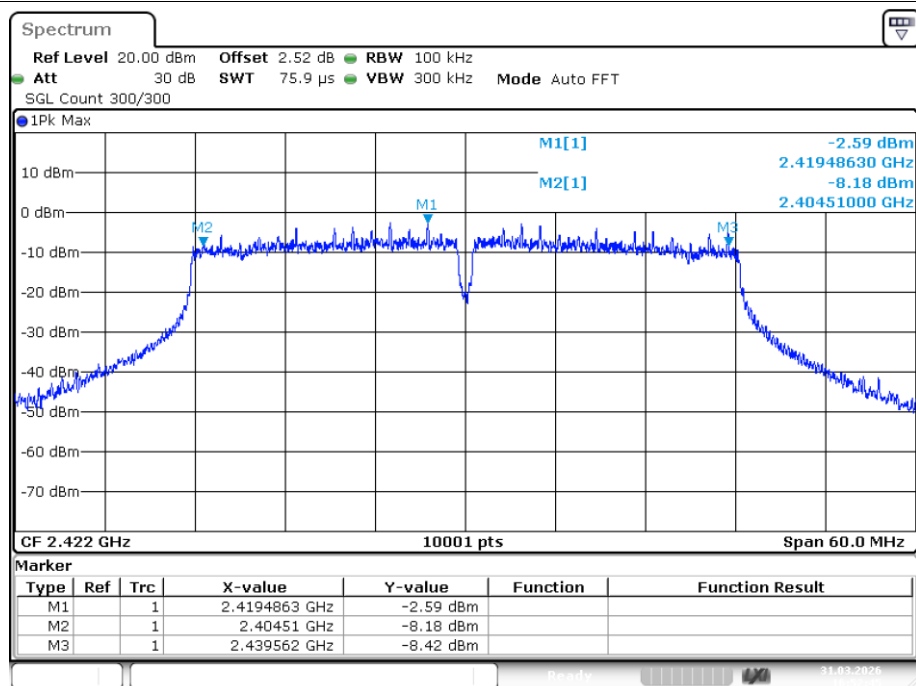


Date: 31.MAR.2026 16:52:45

-6dB Bandwidth NVNT n40 2422MHz Ant1

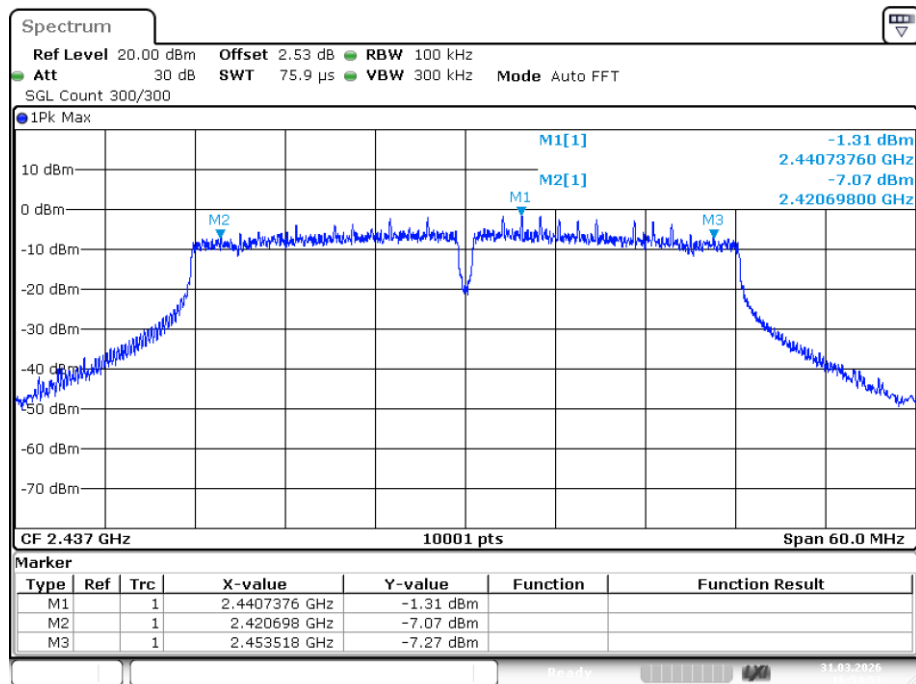


Date: 31.MAR.2026 16:54:53

-6dB Bandwidth NVNT n40 2437MHz Ant1

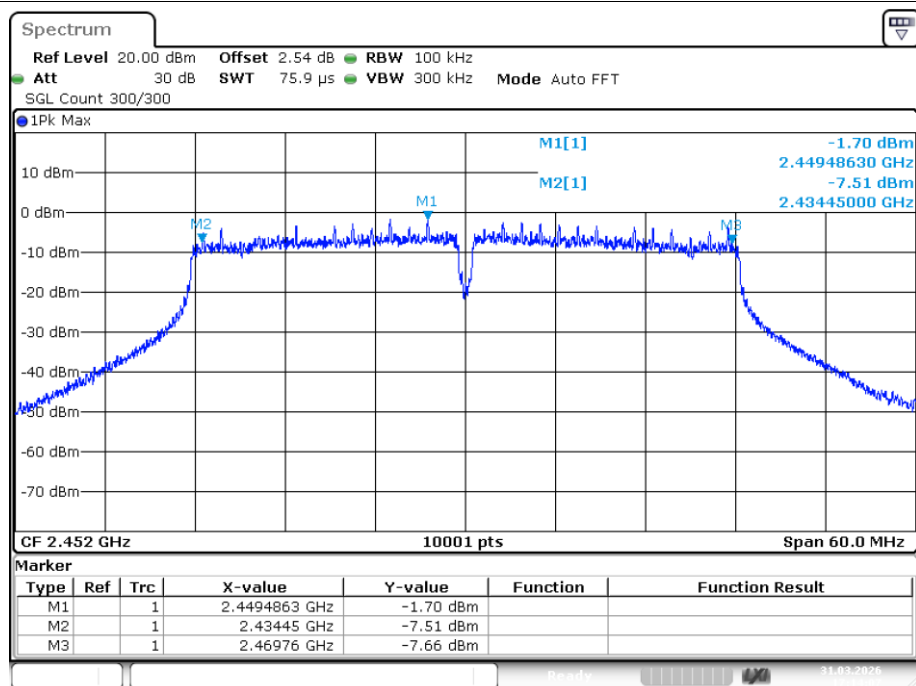


Date: 31.MAR.2026 17:14:07

-6dB Bandwidth NVNT n40 2452MHz Ant1

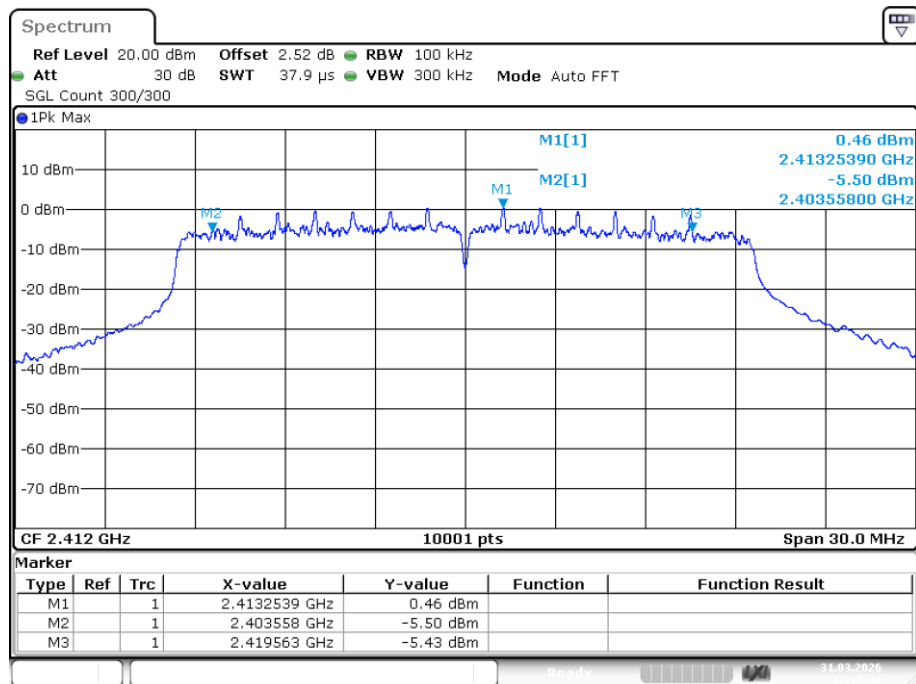


Date: 31.MAR.2026 17:17:02

-6dB Bandwidth NVNT ax20 2412MHz Ant1

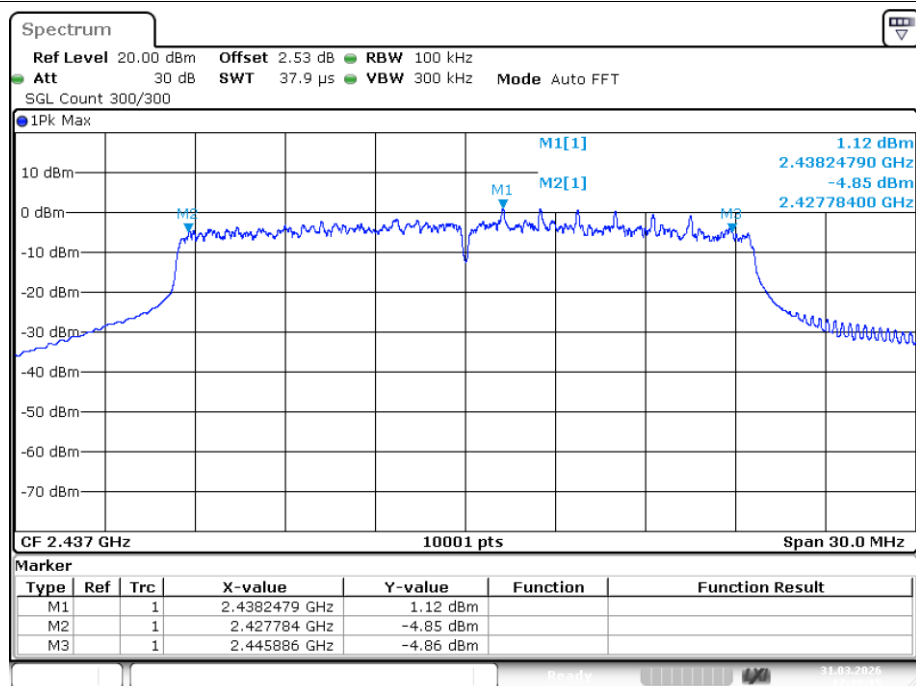


Date: 31.MAR.2026 17:19:15


-6dB Bandwidth NVNT ax20 2437MHz Ant1

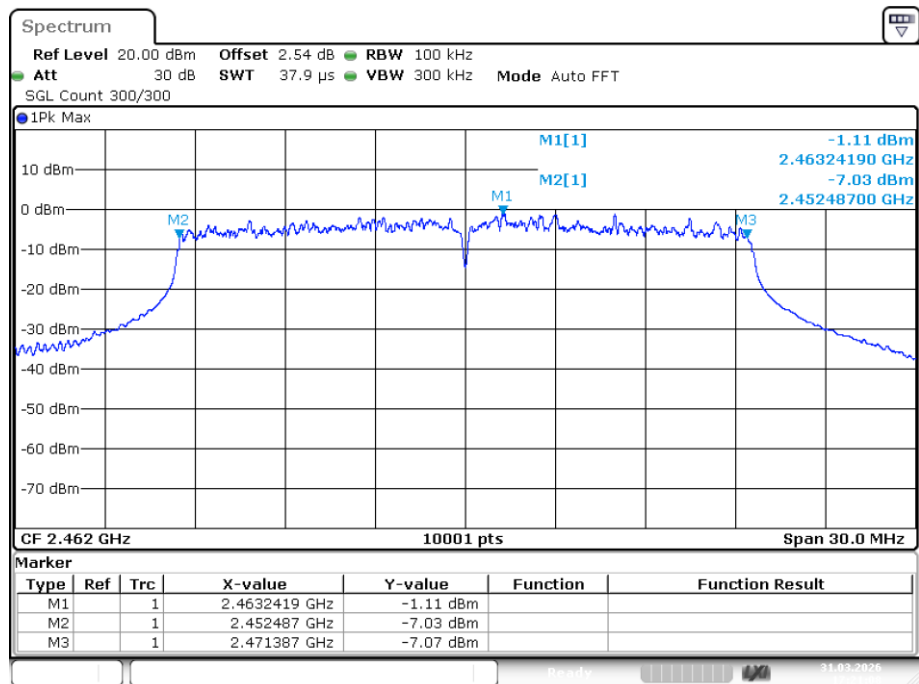

-6dB Bandwidth NVNT ax20 2462MHz Ant1

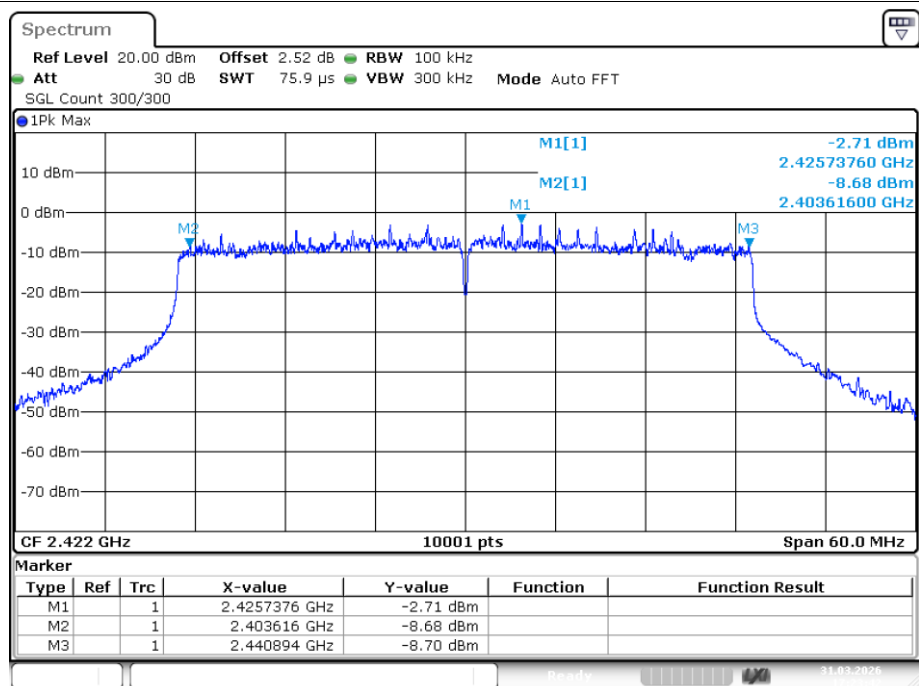


-6dB Bandwidth NVNT ax40 2422MHz Ant1

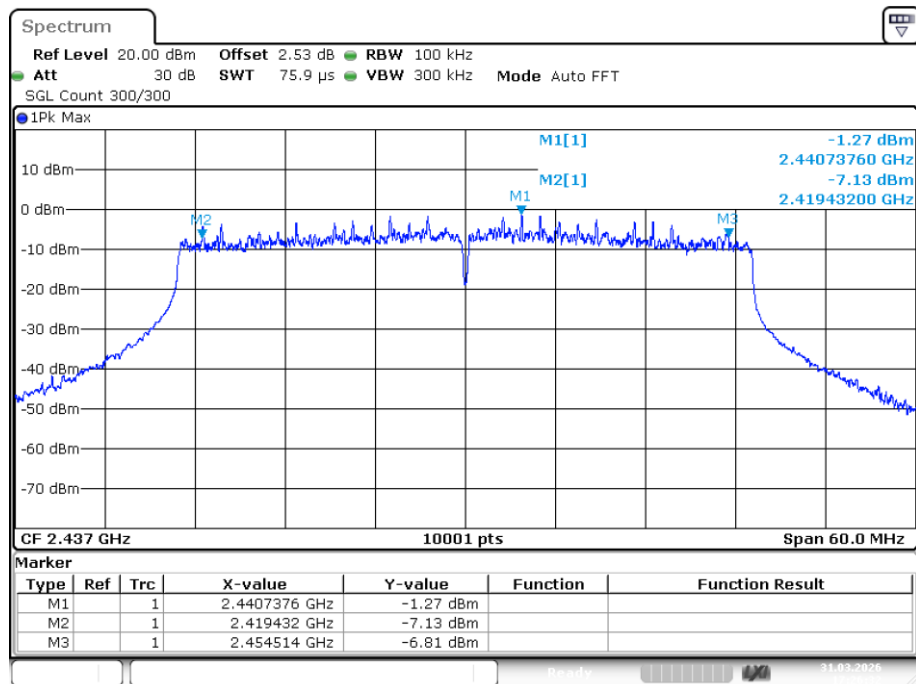

Date: 31.MAR.2026 17:26:32

-6dB Bandwidth NVNT ax40 2437MHz Ant1

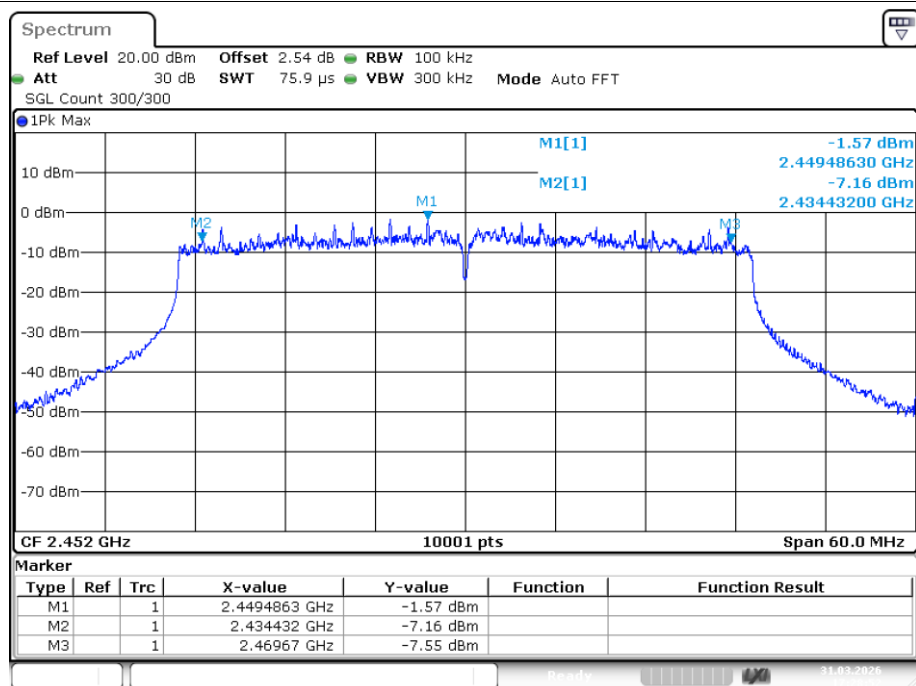


Date: 31.MAR.2026 17:28:52

-6dB Bandwidth NVNT ax40 2452MHz Ant1


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.917
NVNT	b	2437	Ant1	13.208
NVNT	b	2462	Ant1	12.989
NVNT	g	2412	Ant1	16.495
NVNT	g	2437	Ant1	16.684
NVNT	g	2462	Ant1	16.618
NVNT	n20	2412	Ant1	17.911
NVNT	n20	2437	Ant1	17.752
NVNT	n20	2462	Ant1	17.728
NVNT	n40	2422	Ant1	36.518
NVNT	n40	2437	Ant1	36.518
NVNT	n40	2452	Ant1	36.254
NVNT	ax20	2412	Ant1	19.102
NVNT	ax20	2437	Ant1	19.039
NVNT	ax20	2462	Ant1	19.075
NVNT	ax40	2422	Ant1	37.91
NVNT	ax40	2437	Ant1	37.808
NVNT	ax40	2452	Ant1	38.108

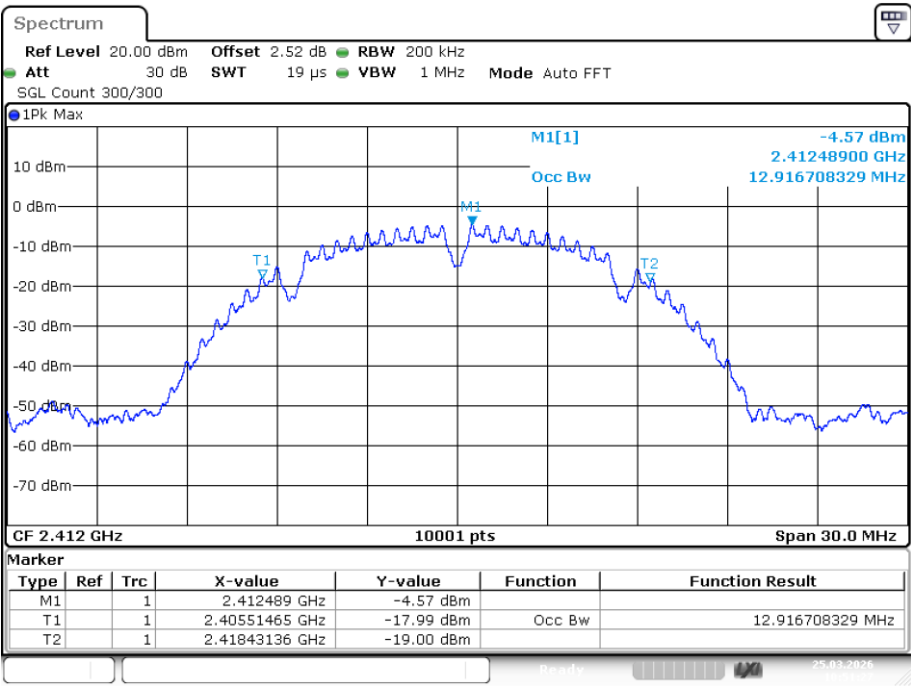


Date: 25.MAR.2026 10:51:27

OBW NVNT b 2412MHz Ant1

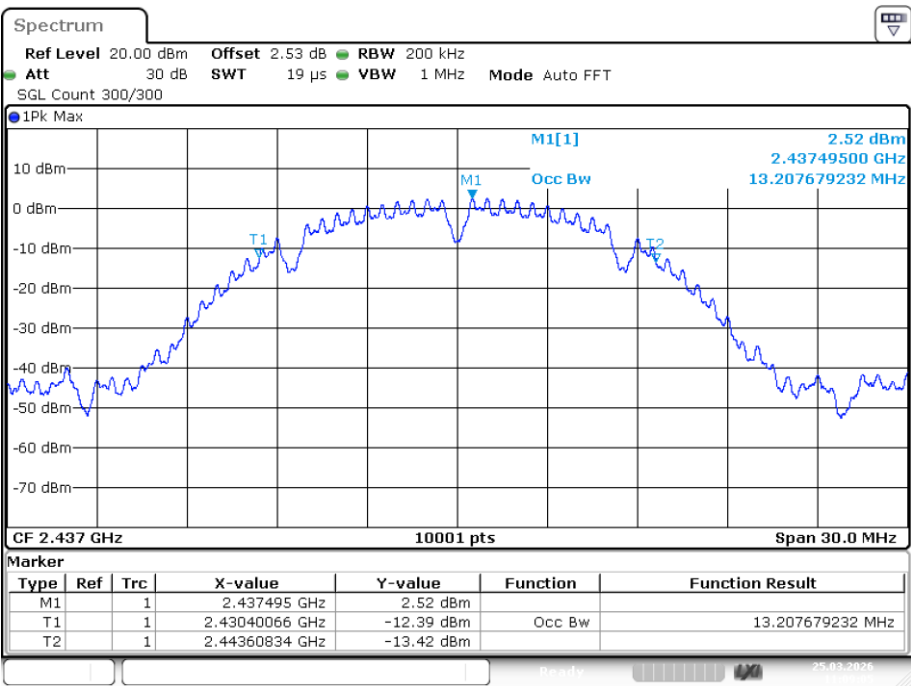


Date: 25.MAR.2026 11:09:05

OBW NVNT b 2437MHz Ant1

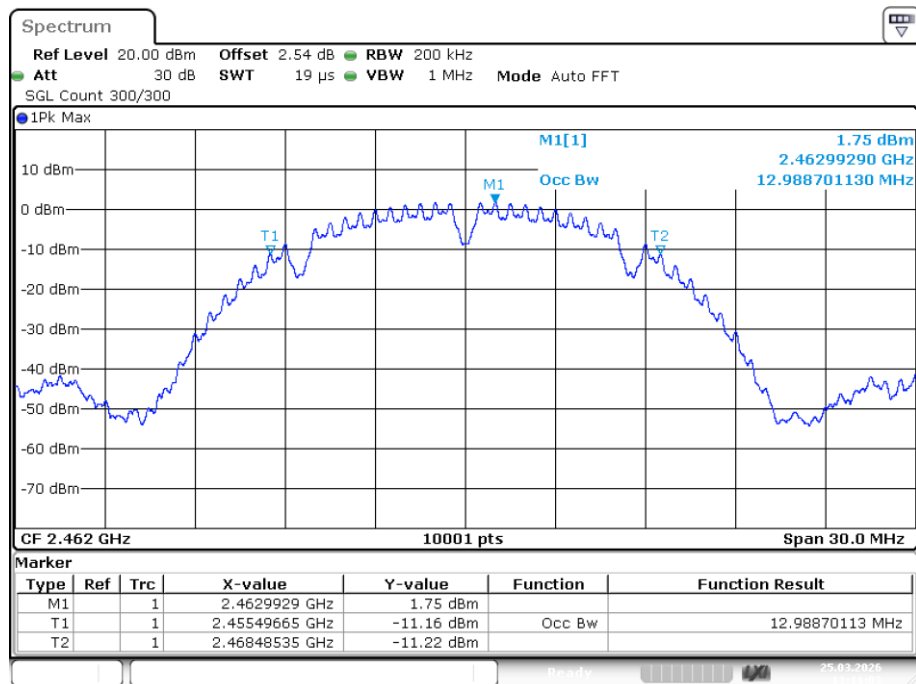


Date: 25.MAR.2026 11:11:02

OBW NVNT b 2462MHz Ant1

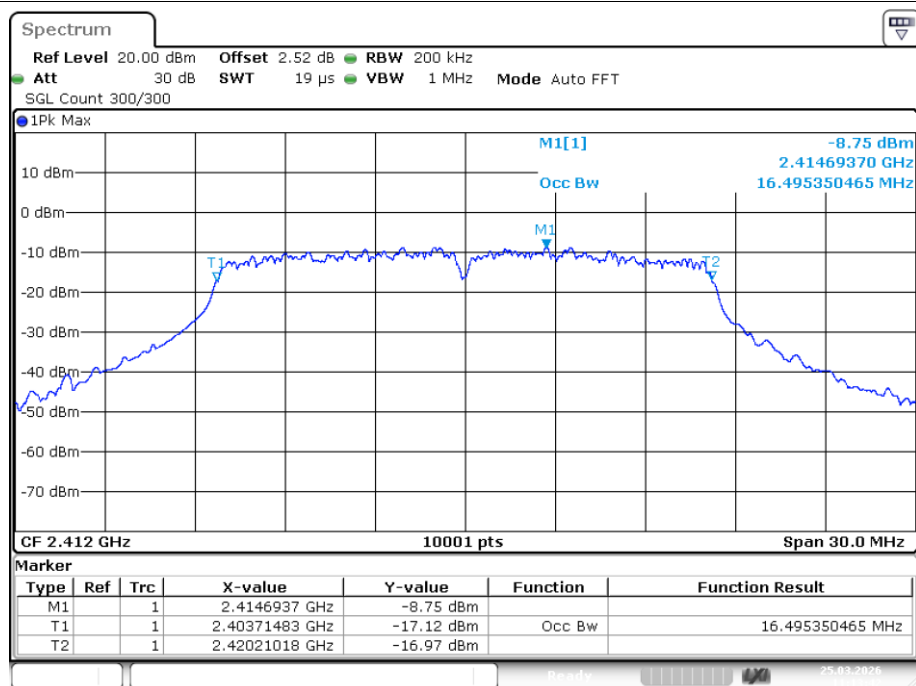


Date: 25.MAR.2026 11:13:42

OBW NVNT g 2412MHz Ant1

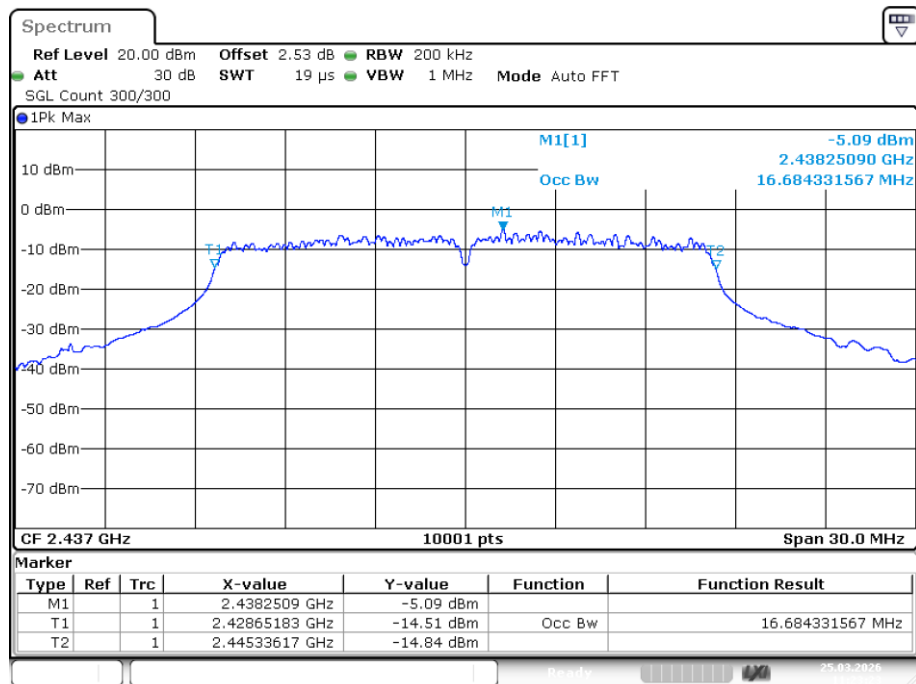


Date: 25.MAR.2026 11:23:24

OBW NVNT g 2437MHz Ant1

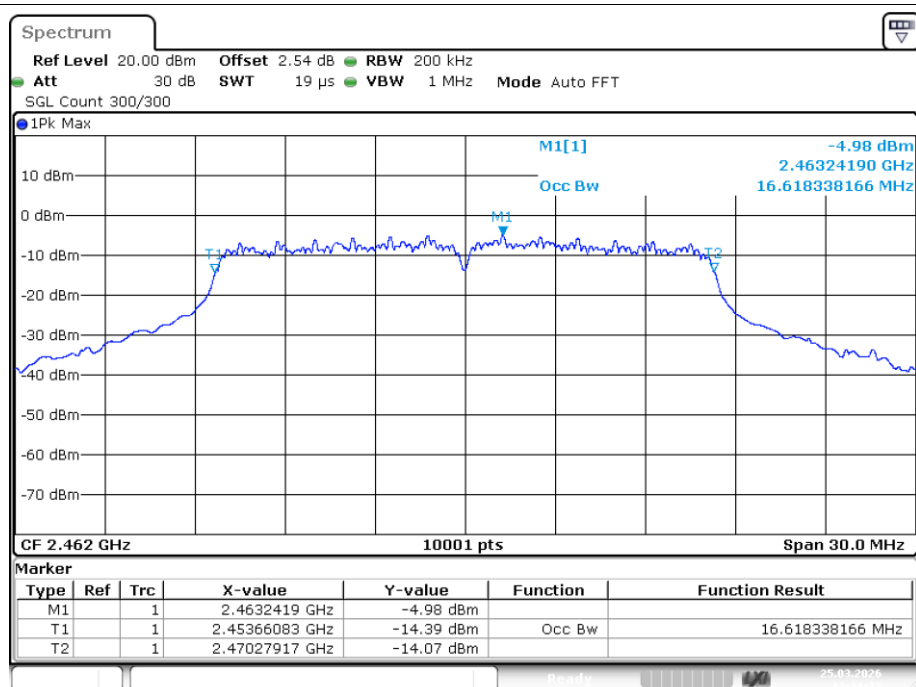


Date: 25.MAR.2026 11:31:33

OBW NVNT g 2462MHz Ant1

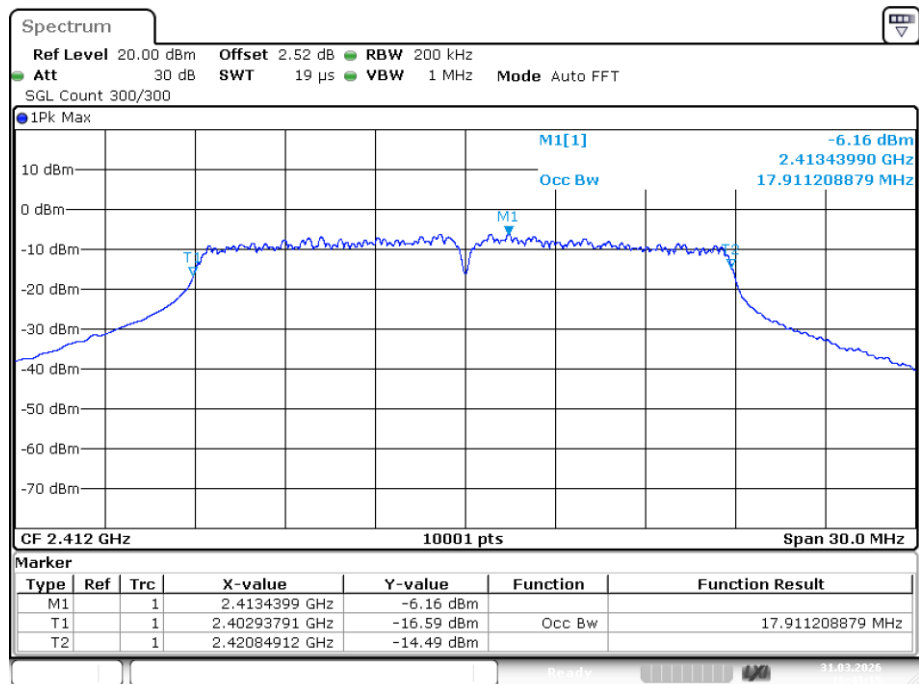


Date: 31.MAR.2026 16:43:15

OBW NVNT n20 2412MHz Ant1

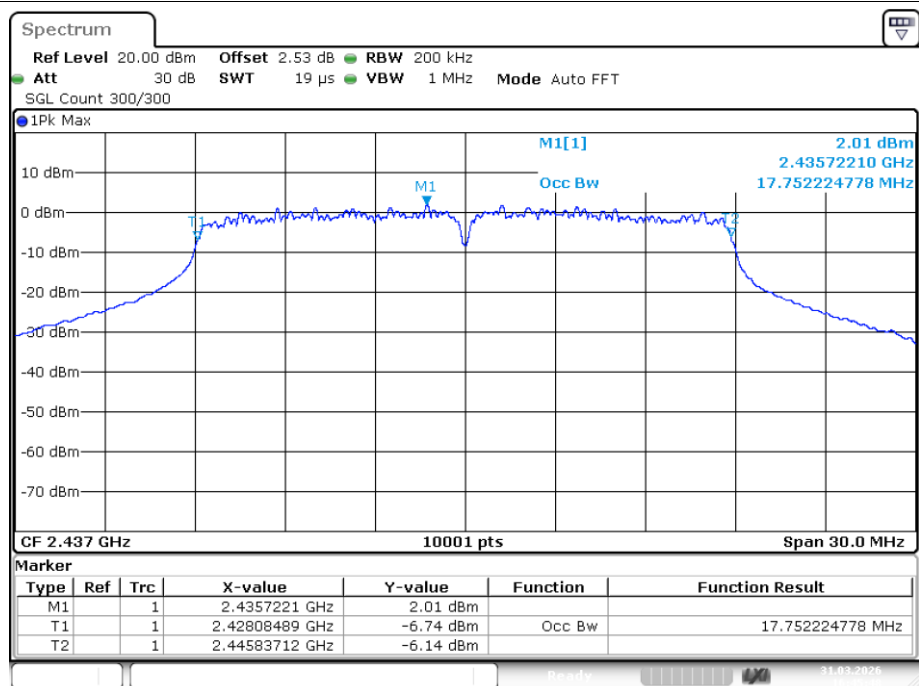


Date: 31.MAR.2026 16:45:47

OBW NVNT n20 2437MHz Ant1

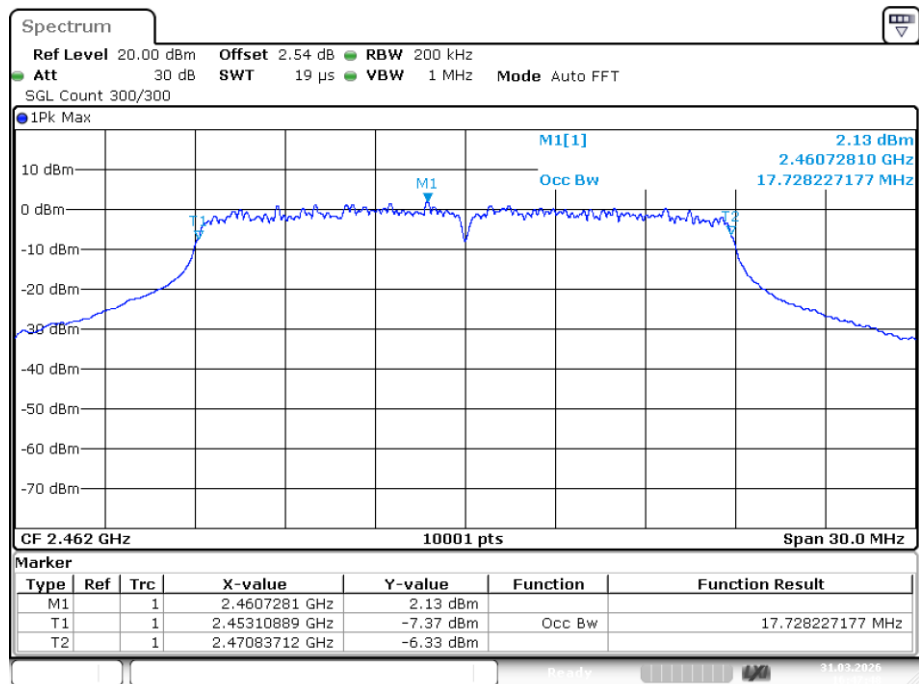


Date: 31.MAR.2026 16:47:48

OBW NVNT n20 2462MHz Ant1

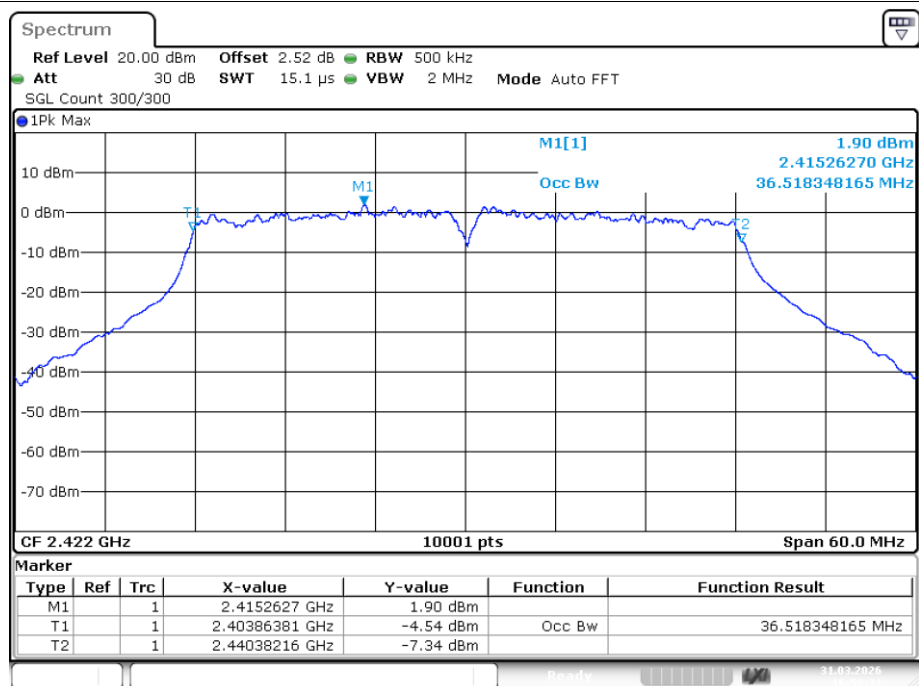


Date: 31.MAR.2026 16:52:31

OBW NVNT n40 2422MHz Ant1

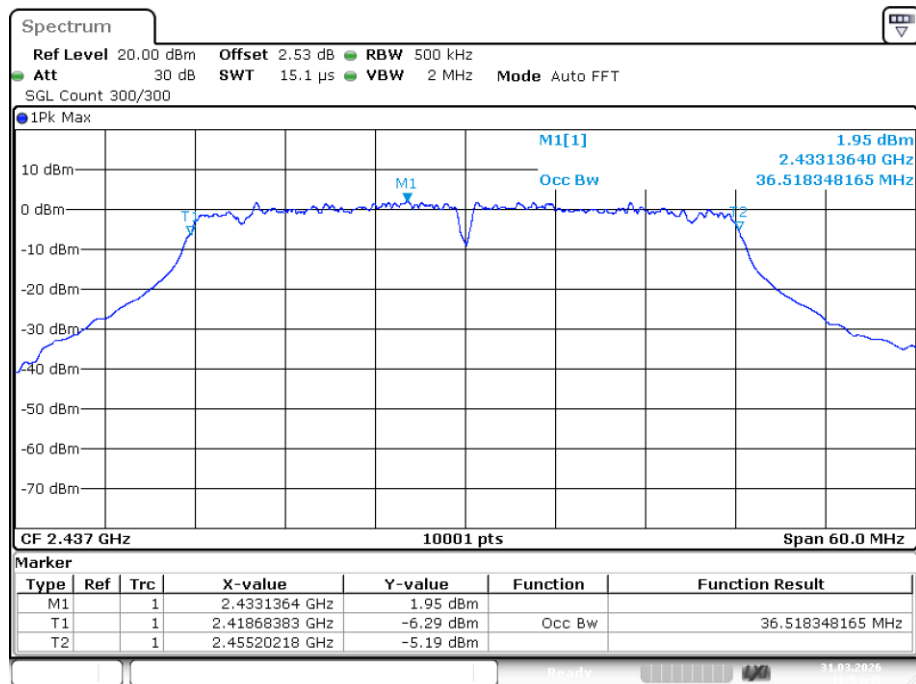


Date: 31.MAR.2026 16:54:40

OBW NVNT n40 2437MHz Ant1

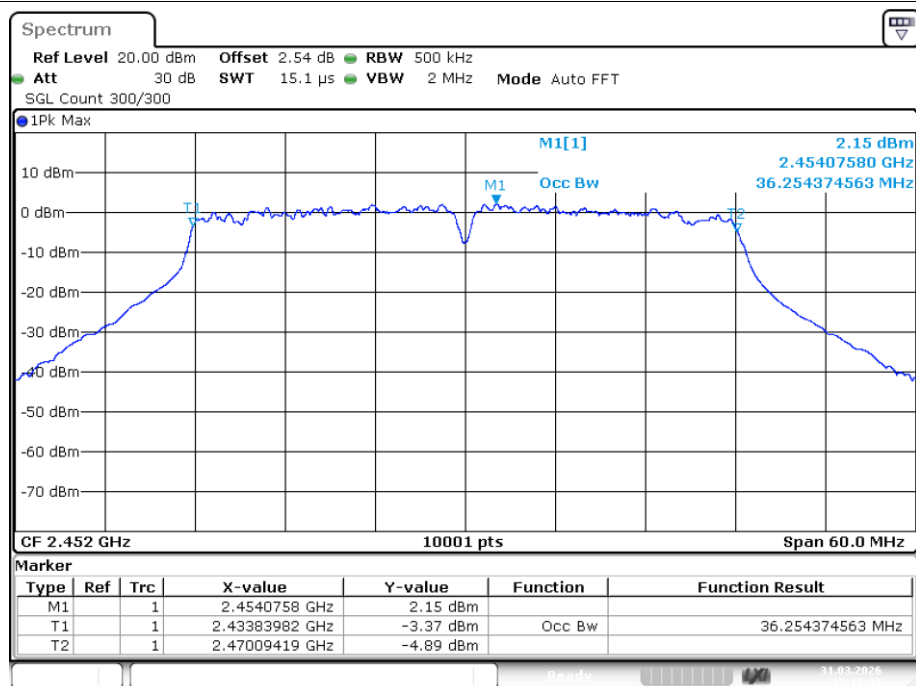


Date: 31.MAR.2026 17:13:01

OBW NVNT n40 2452MHz Ant1

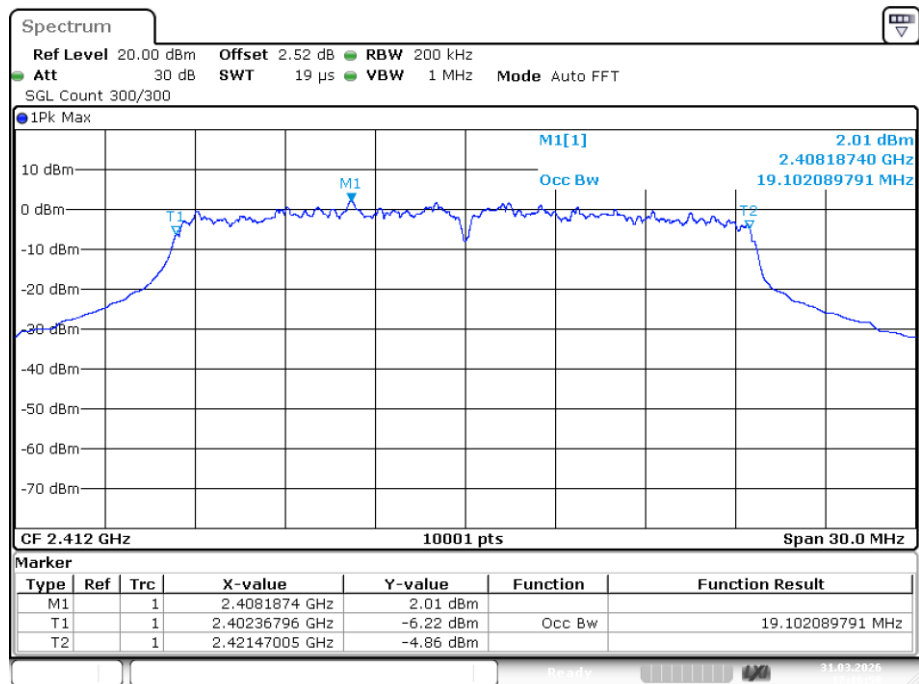


Date: 31.MAR.2026 17:16:51

OBW NVNT ax20 2412MHz Ant1

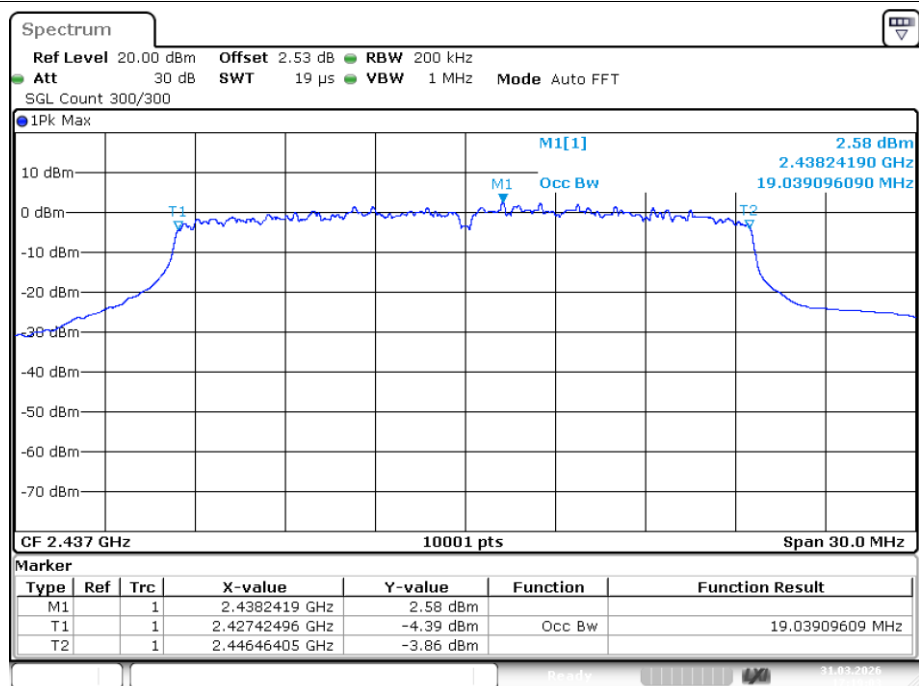


Date: 31.MAR.2026 17:19:03

OBW NVNT ax20 2437MHz Ant1

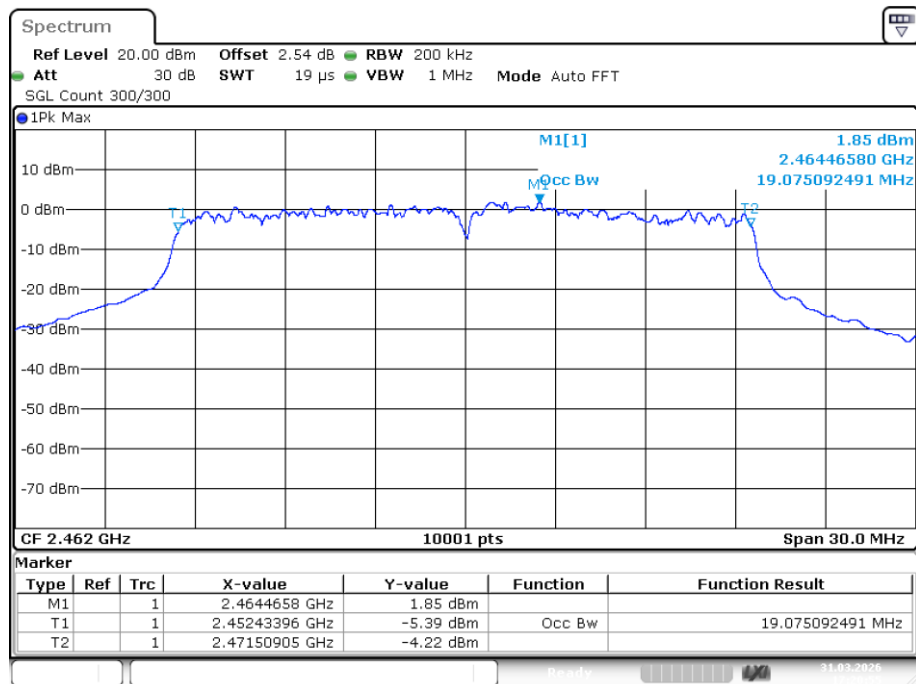


Date: 31.MAR.2026 17:20:55

OBW NVNT ax20 2462MHz Ant1

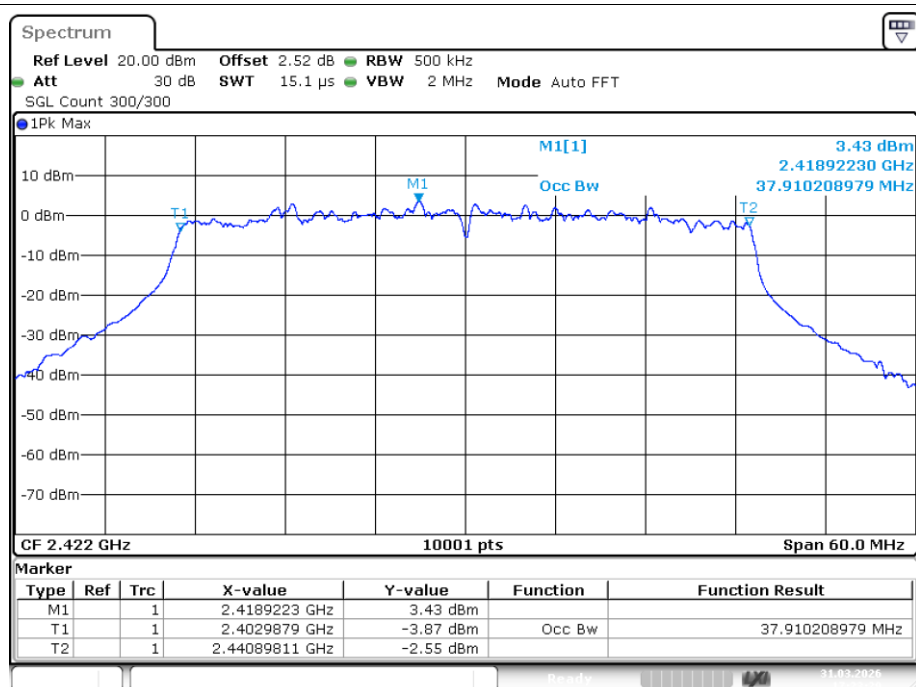


Date: 31.MAR.2026 17:23:29

OBW NVNT ax40 2422MHz Ant1

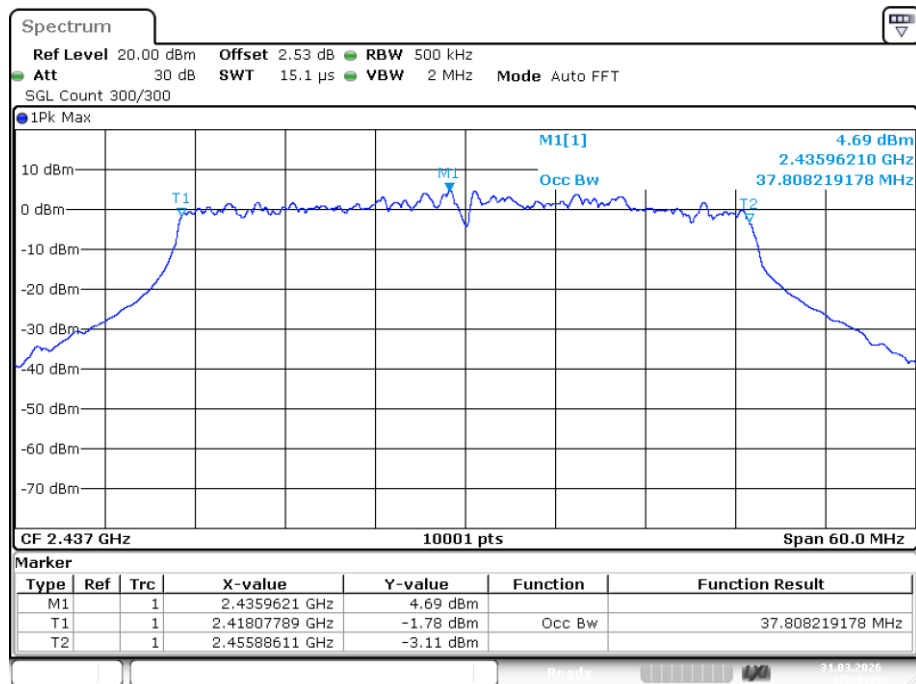

Date: 31.MAR.2026 17:26:18

OBW NVNT ax40 2437MHz Ant1

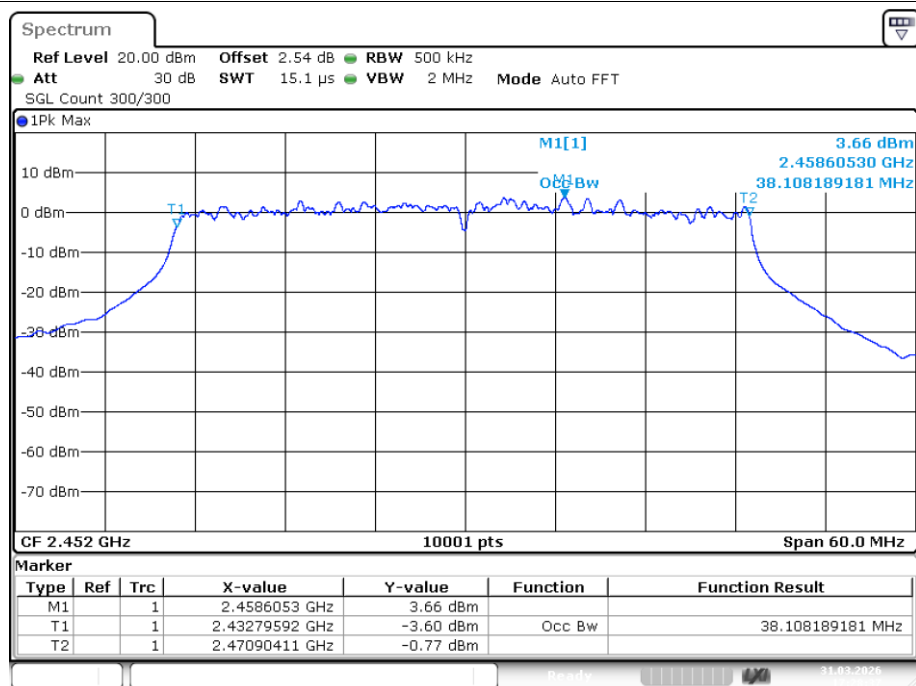


Date: 31.MAR.2026 17:28:37

OBW NVNT ax40 2452MHz Ant1


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-16.48	0.18	-16.3	8	Pass
NVNT	b	2437	Ant1	-16.13	0.18	-15.95	8	Pass
NVNT	b	2462	Ant1	-17.02	0.18	-16.84	8	Pass
NVNT	g	2412	Ant1	-19.43	1.01	-18.42	8	Pass
NVNT	g	2437	Ant1	-23.4	1.01	-22.39	8	Pass
NVNT	g	2462	Ant1	-23.06	1.29	-21.77	8	Pass
NVNT	n20	2412	Ant1	-23.3	1.05	-22.25	8	Pass
NVNT	n20	2437	Ant1	-22.88	1.07	-21.81	8	Pass
NVNT	n20	2462	Ant1	-22.75	1.07	-21.68	8	Pass
NVNT	n40	2422	Ant1	-26.96	1.96	-25	8	Pass
NVNT	n40	2437	Ant1	-26.38	1.91	-24.47	8	Pass
NVNT	n40	2452	Ant1	-26.73	1.96	-24.77	8	Pass
NVNT	ax20	2412	Ant1	-25.4	1.35	-24.05	8	Pass
NVNT	ax20	2437	Ant1	-24.05	1.35	-22.7	8	Pass
NVNT	ax20	2462	Ant1	-24.95	1.35	-23.6	8	Pass
NVNT	ax40	2422	Ant1	-28.81	2.3	-26.51	8	Pass
NVNT	ax40	2437	Ant1	-27.85	2.3	-25.55	8	Pass
NVNT	ax40	2452	Ant1	-26.95	2.26	-24.69	8	Pass

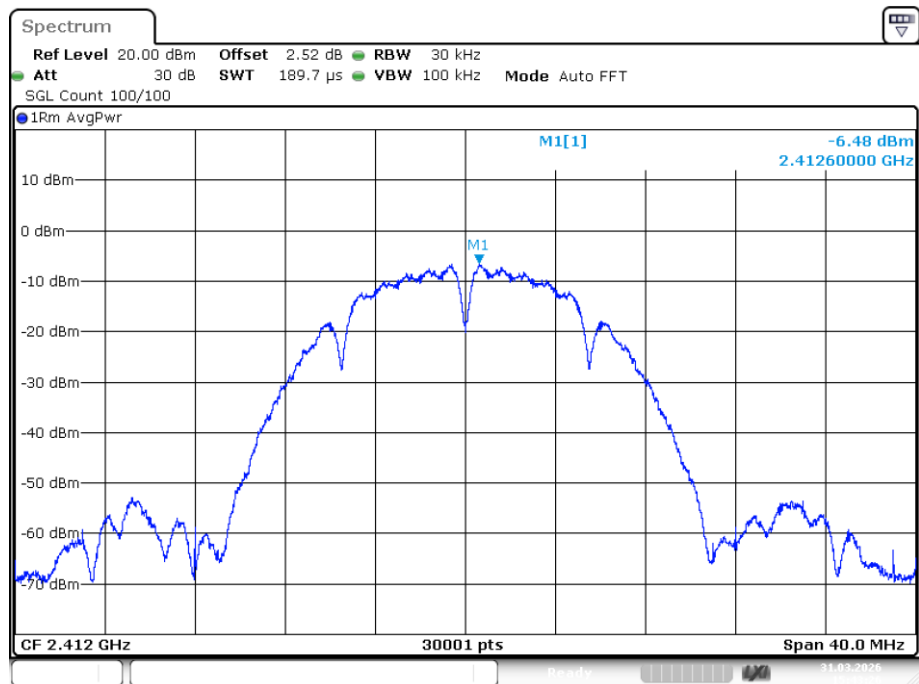


Date: 31.MAR.2026 15:43:26

PSD NVNT b 2412MHz Ant1

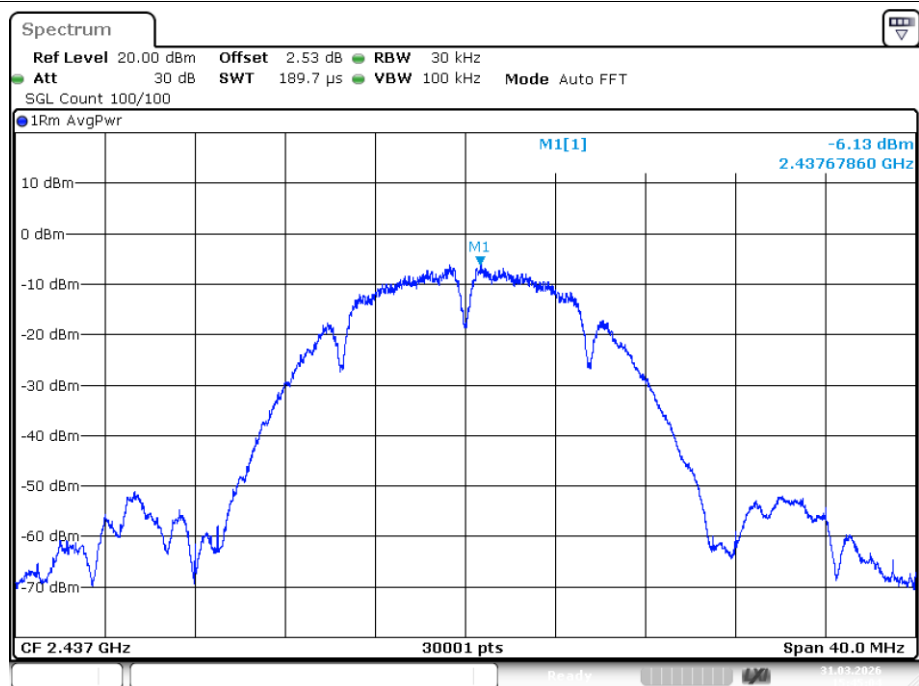


Date: 31.MAR.2026 15:45:04

PSD NVNT b 2437MHz Ant1

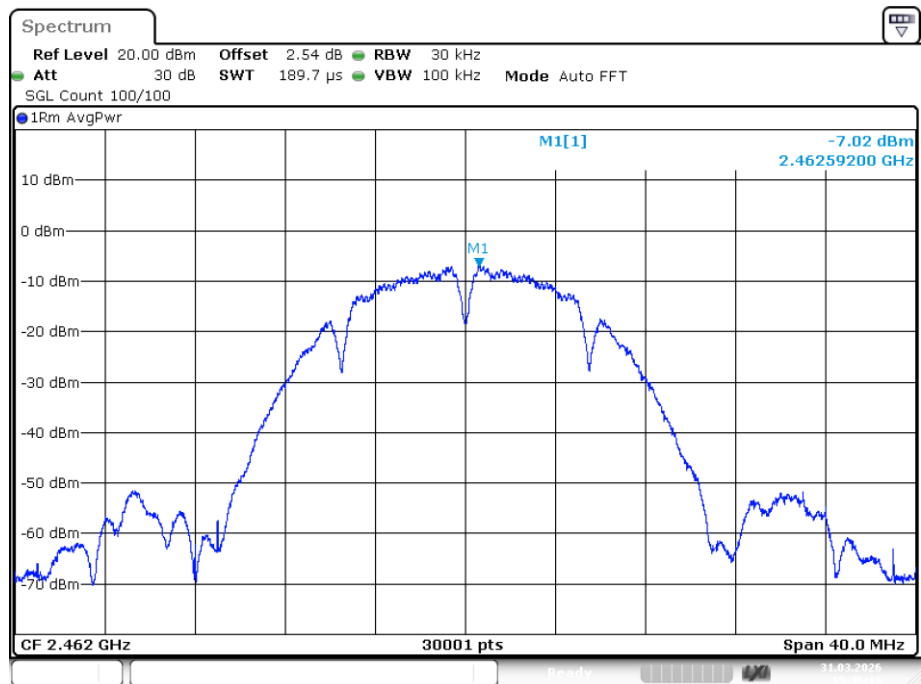


Date: 31.MAR.2026 15:46:10

PSD NVNT b 2462MHz Ant1

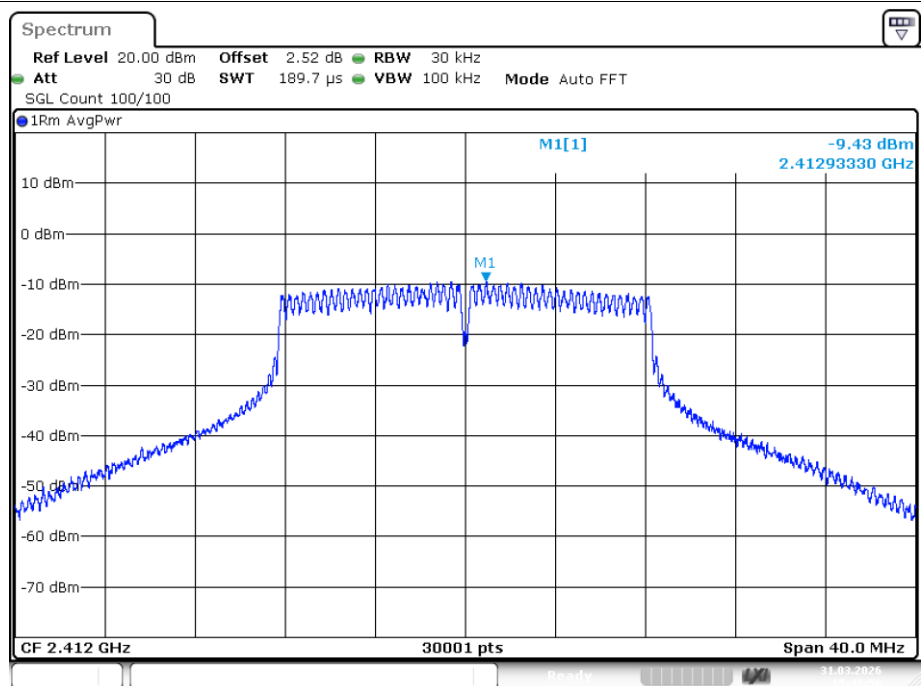


Date: 31.MAR.2026 15:47:56


PSD NVNT g 2412MHz Ant1

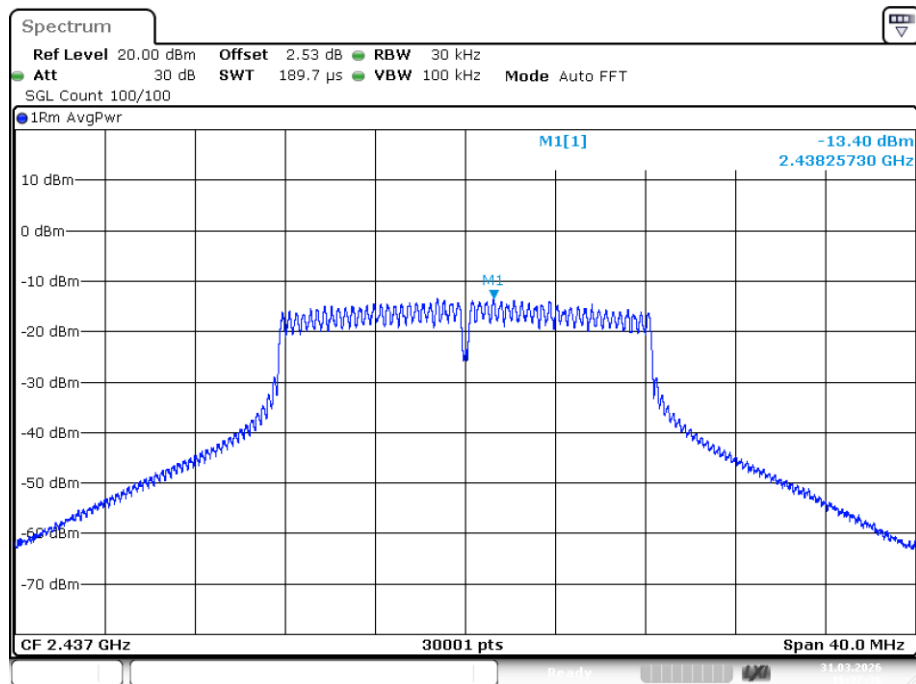

PSD NVNT g 2437MHz Ant1

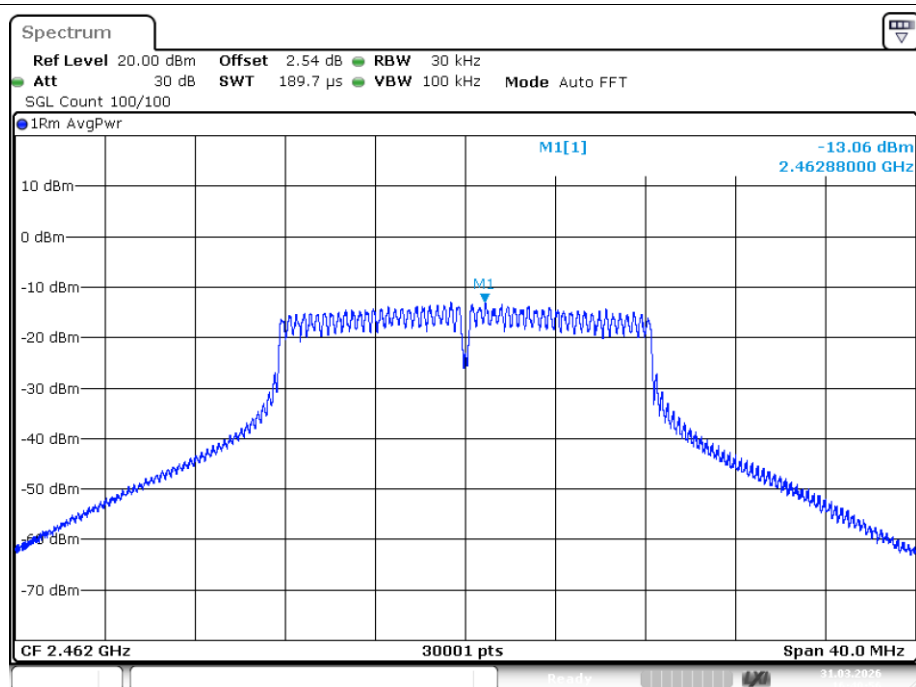


PSD NVNT g 2462MHz Ant1

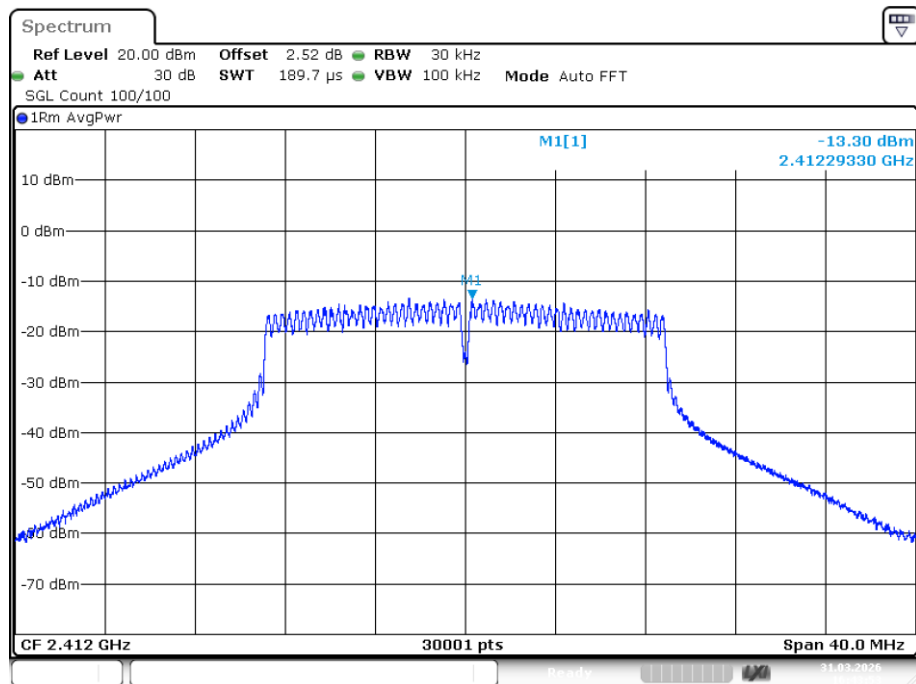


Date: 31.MAR.2026 16:43:53

PSD NVNT n20 2412MHz Ant1

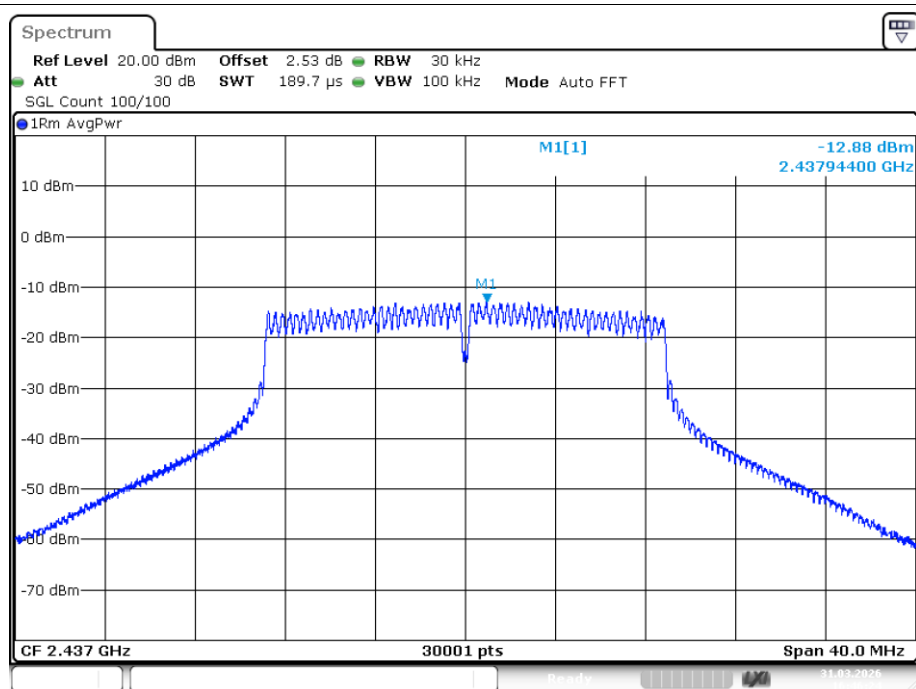


Date: 31.MAR.2026 16:46:24

PSD NVNT n20 2437MHz Ant1

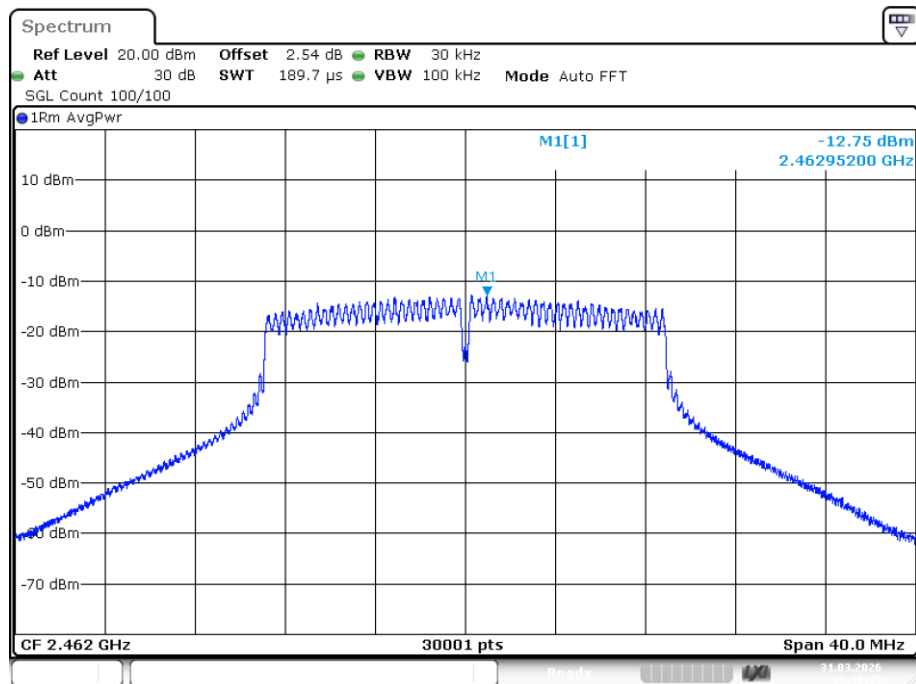


Date: 31.MAR.2026 16:48:16

PSD NVNT n20 2462MHz Ant1

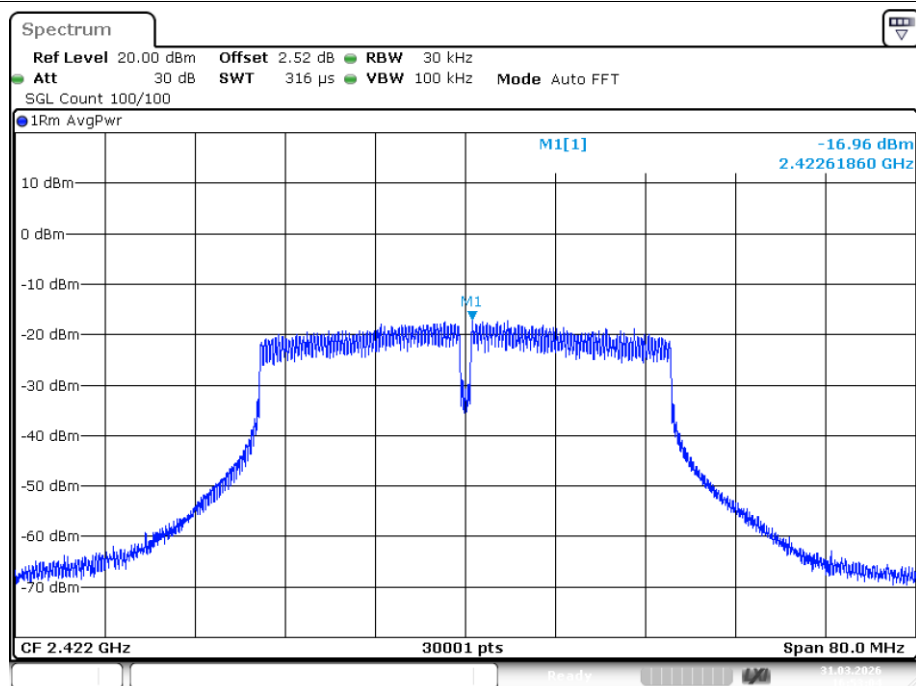


Date: 31.MAR.2026 16:53:04

PSD NVNT n40 2422MHz Ant1

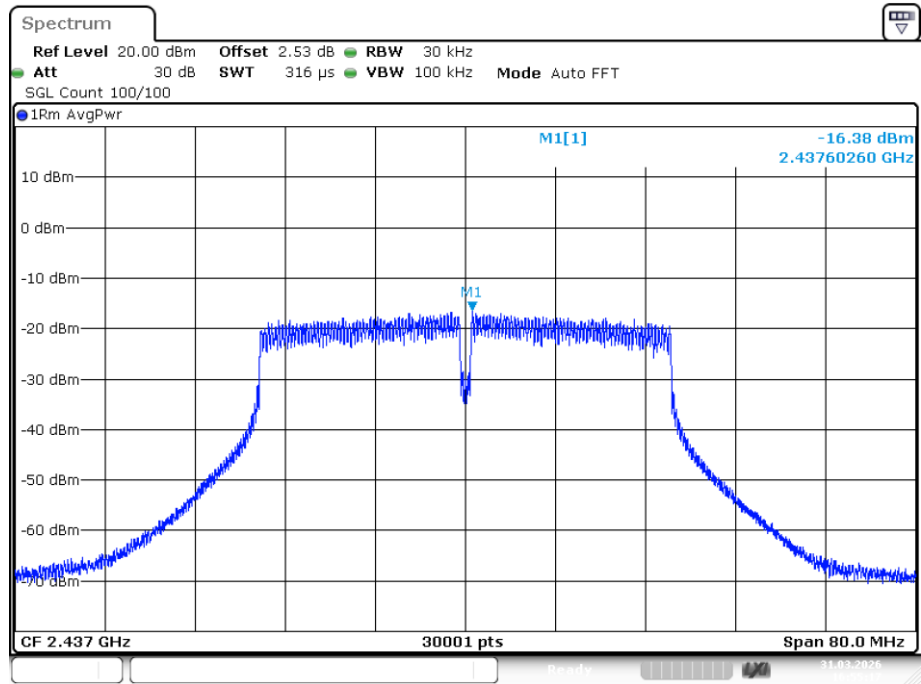


Date: 31.MAR.2026 16:55:17

PSD NVNT n40 2437MHz Ant1

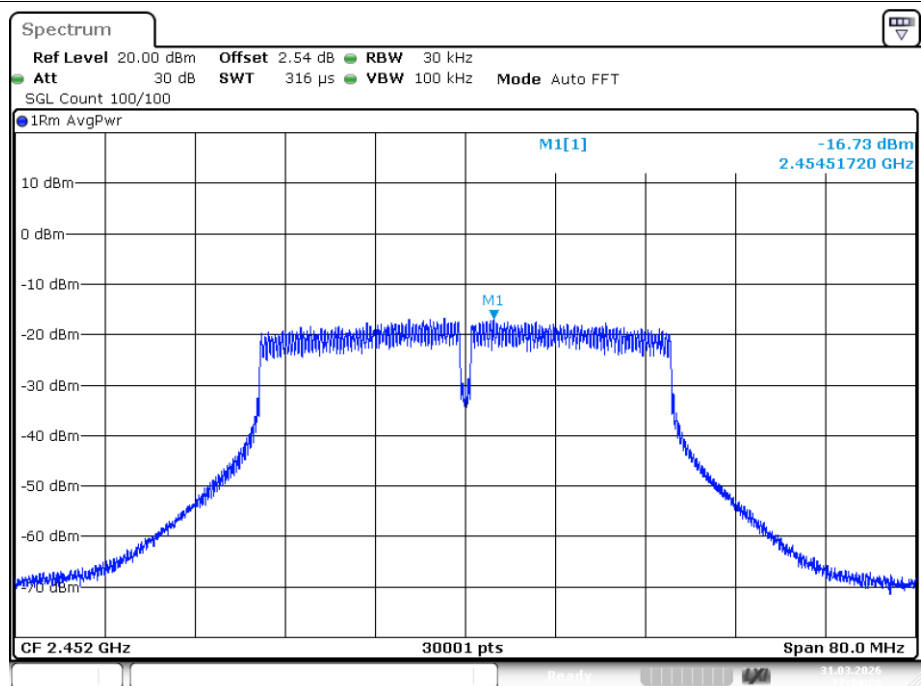


Date: 31.MAR.2026 17:14:29

PSD NVNT n40 2452MHz Ant1

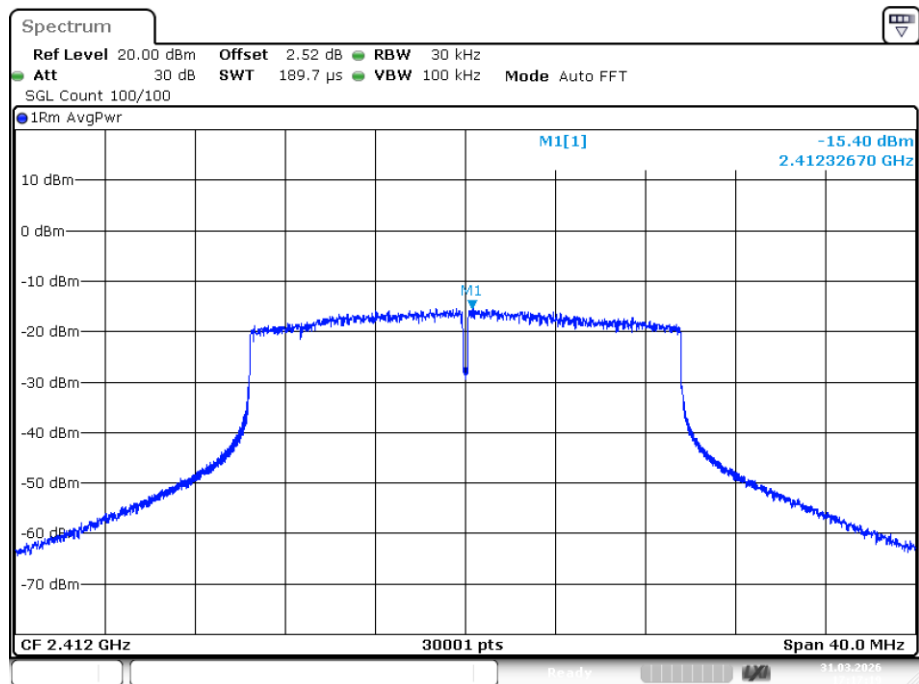


Date: 31.MAR.2026 17:17:19

PSD NVNT ax20 2412MHz Ant1

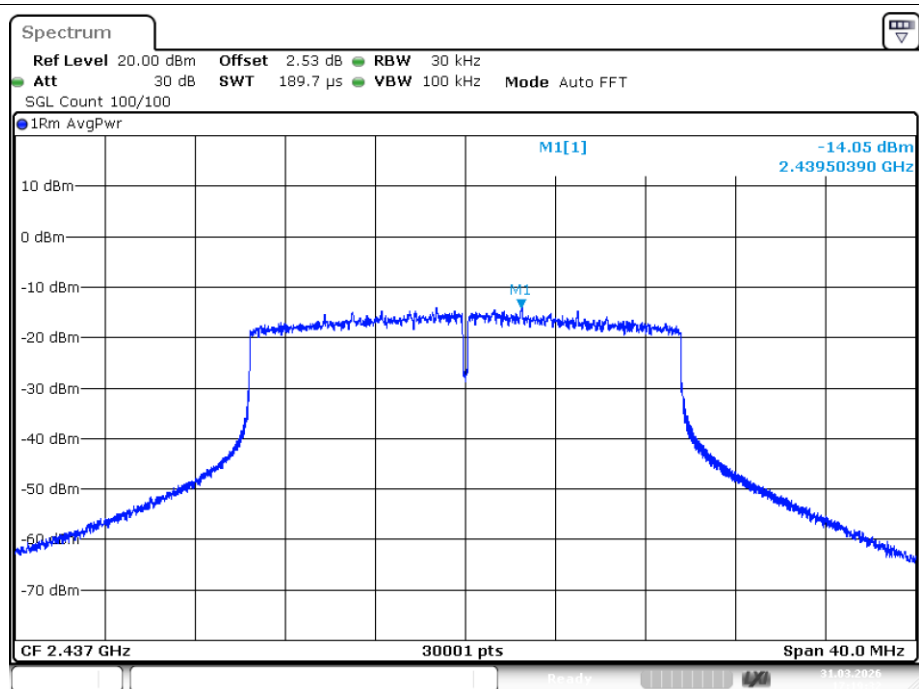


Date: 31.MAR.2026 17:19:33

PSD NVNT ax20 2437MHz Ant1

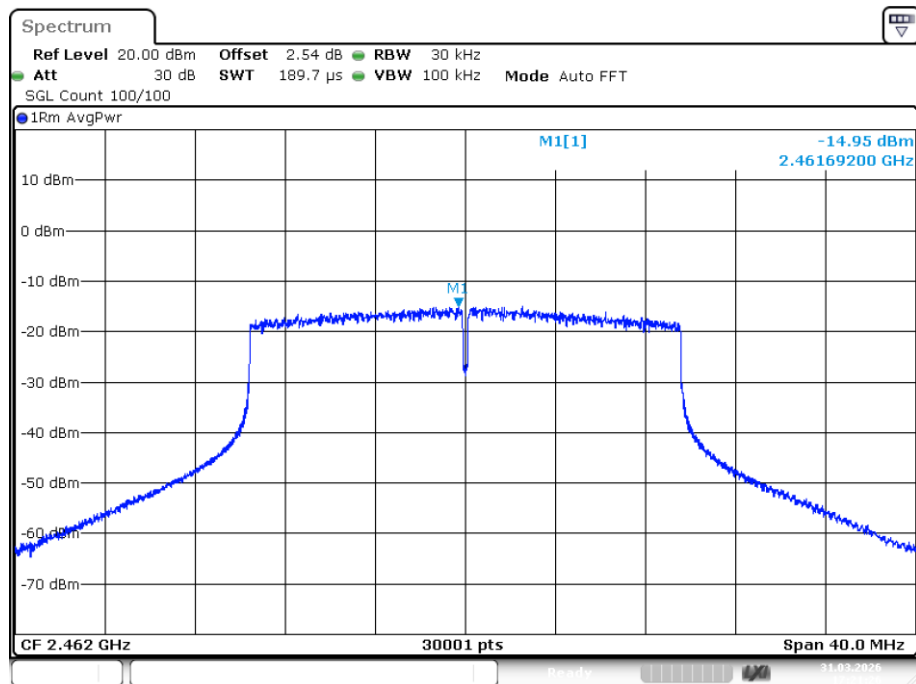

Date: 31.MAR.2026 17:21:27

PSD NVNT ax20 2462MHz Ant1

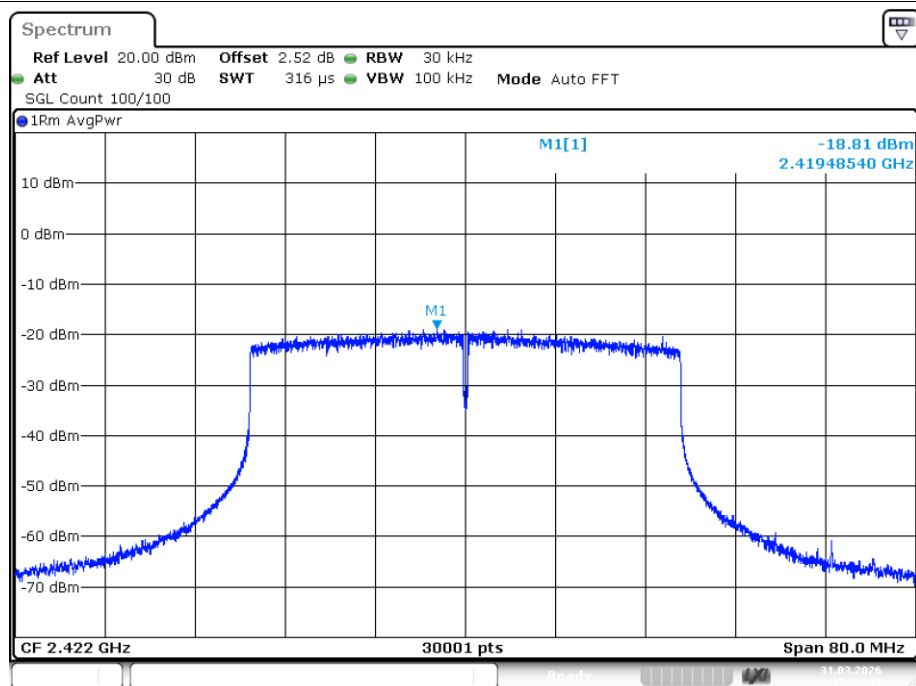

Date: 31.MAR.2026 17:24:00

PSD NVNT ax40 2422MHz Ant1