


Product specification

Quick Reference Date

TYPE/MODEL	PCB-ANT/ XHL-RF	
Frequenc Range	2402 ~ 2480MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.35 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.35	
Directivity (dBi)	1 (all directi on antenna)	
Efficiency (%)	60.2 %	
Gain (dBi)	-0.48 (Avg Gain XY-plane)	
Maximum Gain (dBi)	1.68 (XZ-plane)	
Minimum Gain (dBi)	-3.83 (XZ-plane)	
Avg. Gain (dBi)	-0.48 (XY-plane)	
Input Impedence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V .S .W .R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

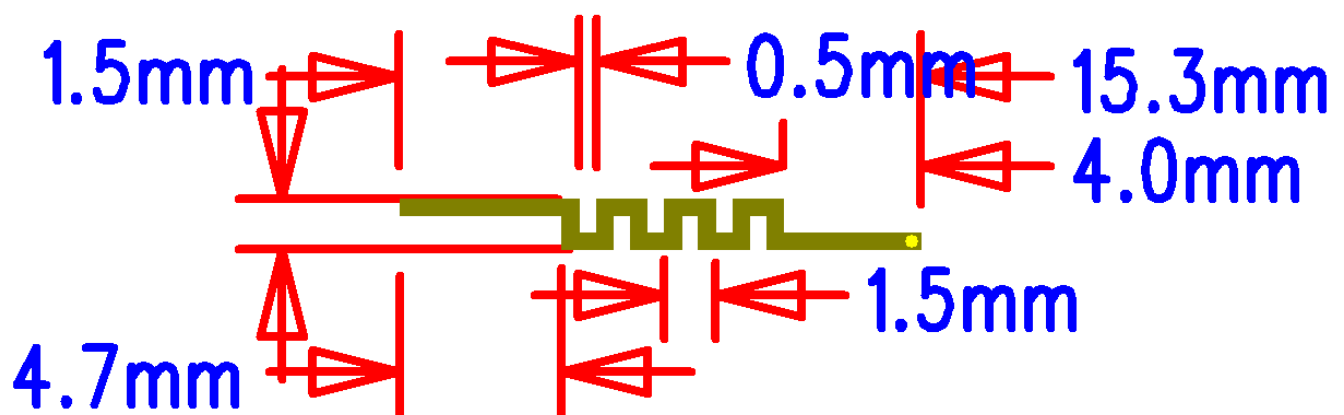


Antenna Gain

Gain Table



Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	60.2 %

测试人员: *Willow*


Return Loss

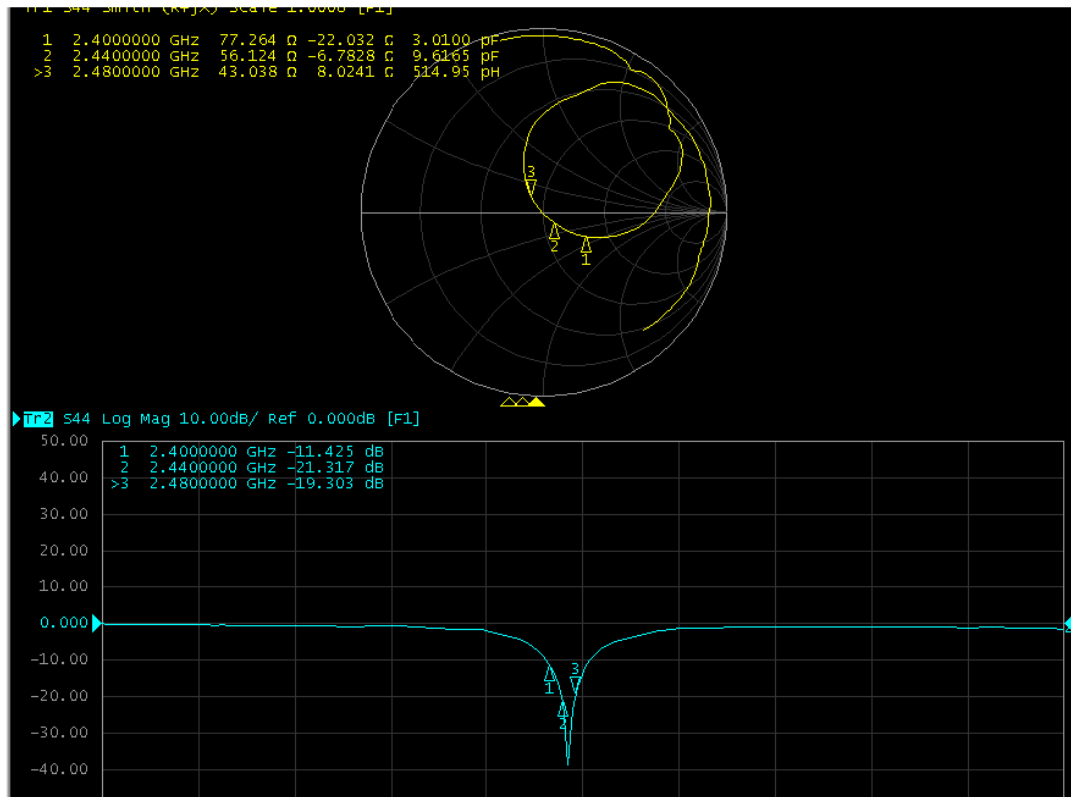

The Environment of Antenna Radiation Pattern

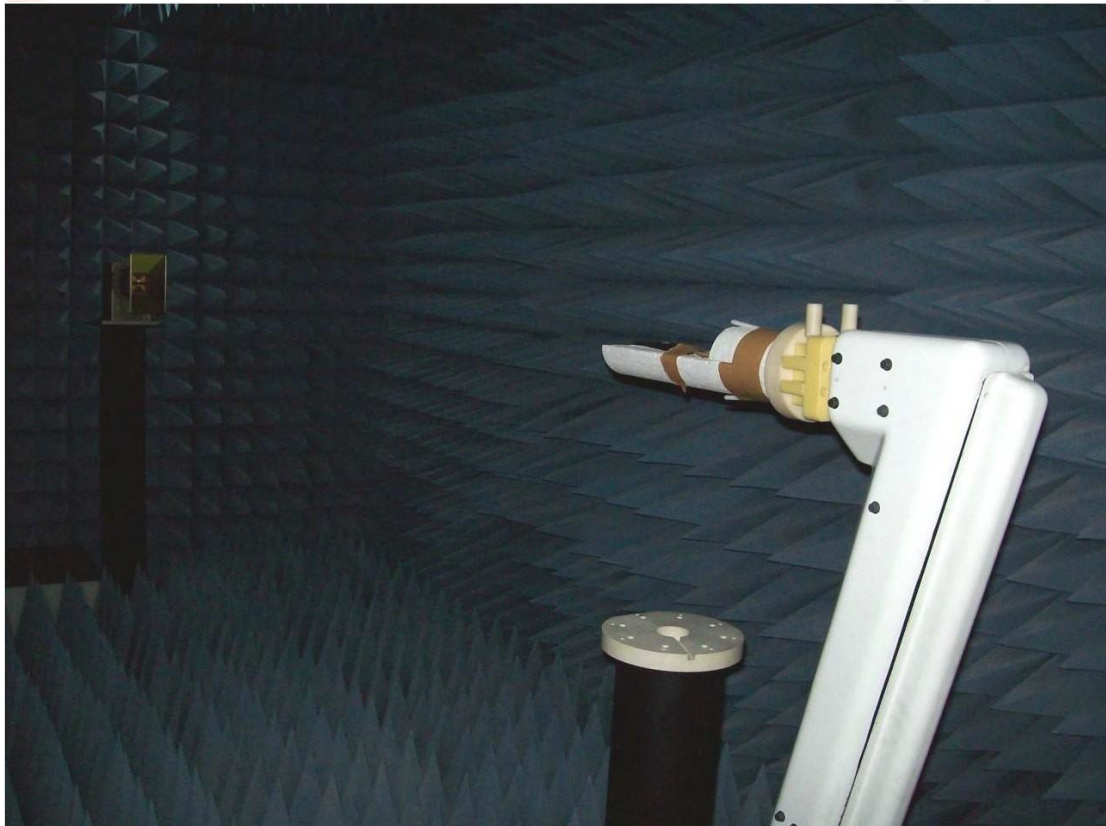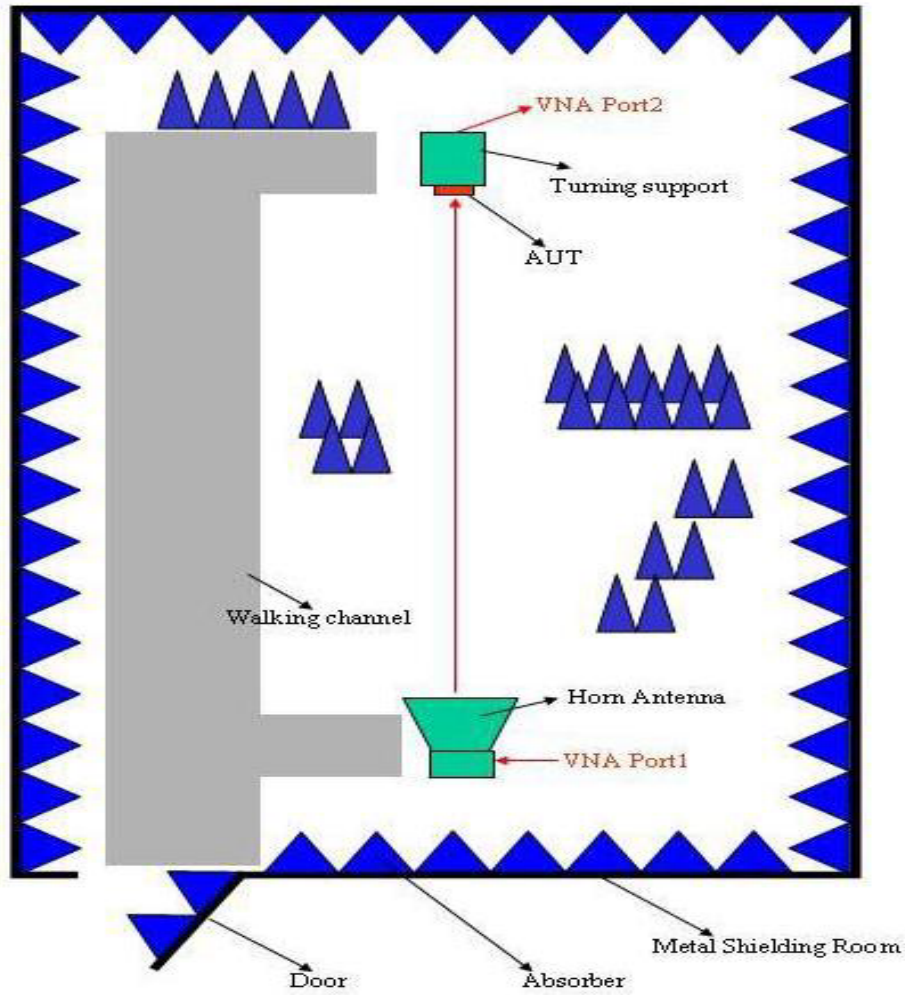


3D radiation pattern diagram

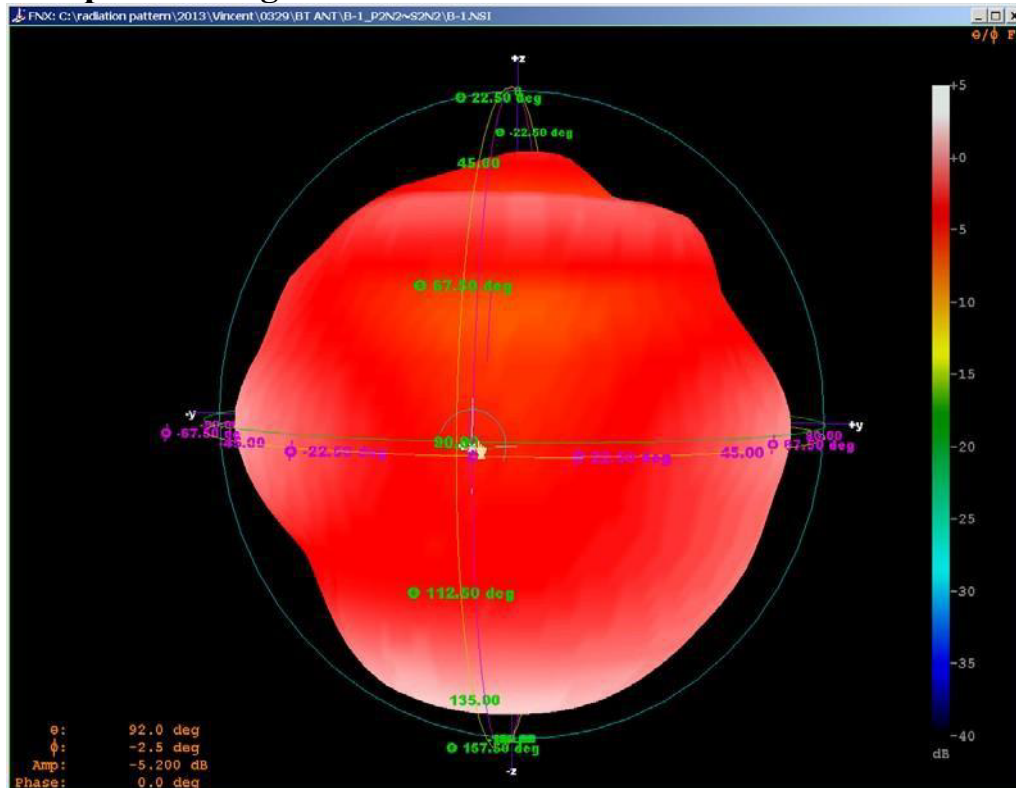


XY-plane

Far-field Power Distribution(H+V) on X-Y Plane
Plot Peak Gain(H+V)= 1.35 dB; Plot AvgGain(H+V)= -0.48dB @2.44000 GHz

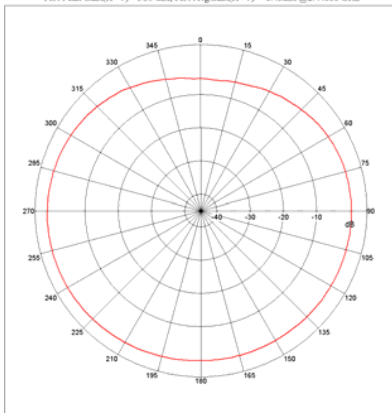

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane
Plot Peak Gain(H+V)= 1.68 dB; Plot AvgGain(H+V)= -3.83dB @2.44000 GHz

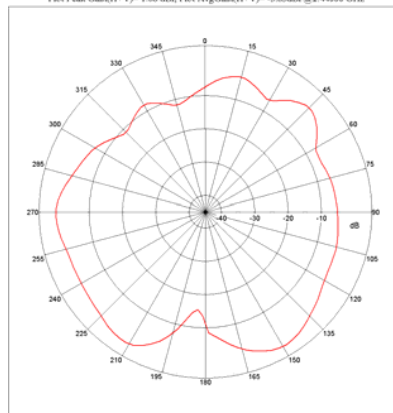

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dB; Plot AvgGain(H+V)= -2.99dB @2.44000 GHz

