




LinkPower 2

Power Bank for Starlink® Mini

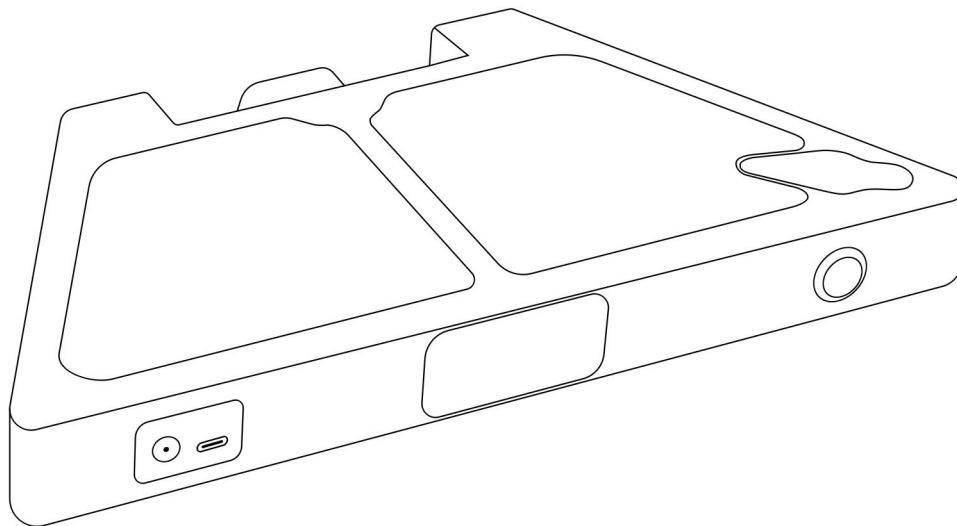

Quick Start

V 2

Introduction

Meet the LinkPower 2 power solution!

The LinkPower 2 power bank is a compact, high-efficiency power solution designed exclusively for the Starlink® Mini.

With a 99Wh battery capacity, LinkPower 2 provides over 4 hours of continuous runtime, keeping your internet connection alive - even in remote locations.

LinkPower 2 supports USB-C bidirectional power delivery. With 100W^{1,2} USB-C input, it charges from 20% to 80% in just 45 minutes. The USB-C port also can deliver 65W^{1,2} output, perfect for powering your phone, laptop, and other USB-C devices.

Best of all, LinkPower 2 can power the Starlink® Mini while charging itself via the USB-C port - ensuring uninterrupted operation when you need it most.

With a simple long press of the power button, you can turn the DC output on or off to control the Starlink® Mini.


NOTE: Before using LinkPower 2 for the first time, you must activate it. Please refer to the "[Setup](#)" section for activation methods.

1. Input (Charging) and Output (Discharging) Power Limit can be set via Web App. The max power limit is 100W.

2. Warning: Charging or discharging the battery at high power levels may significantly reduce its lifespan. For optimal battery health, avoid excessive power usage unless necessary.

What's In the Box

Magnetic adapter head

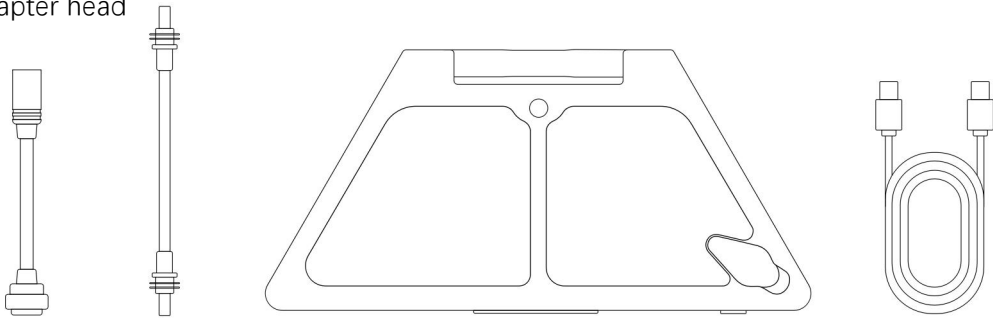


DC-to-DC Cable

LinkPower 2

Type-C-to-Type-C cable

Device Overview

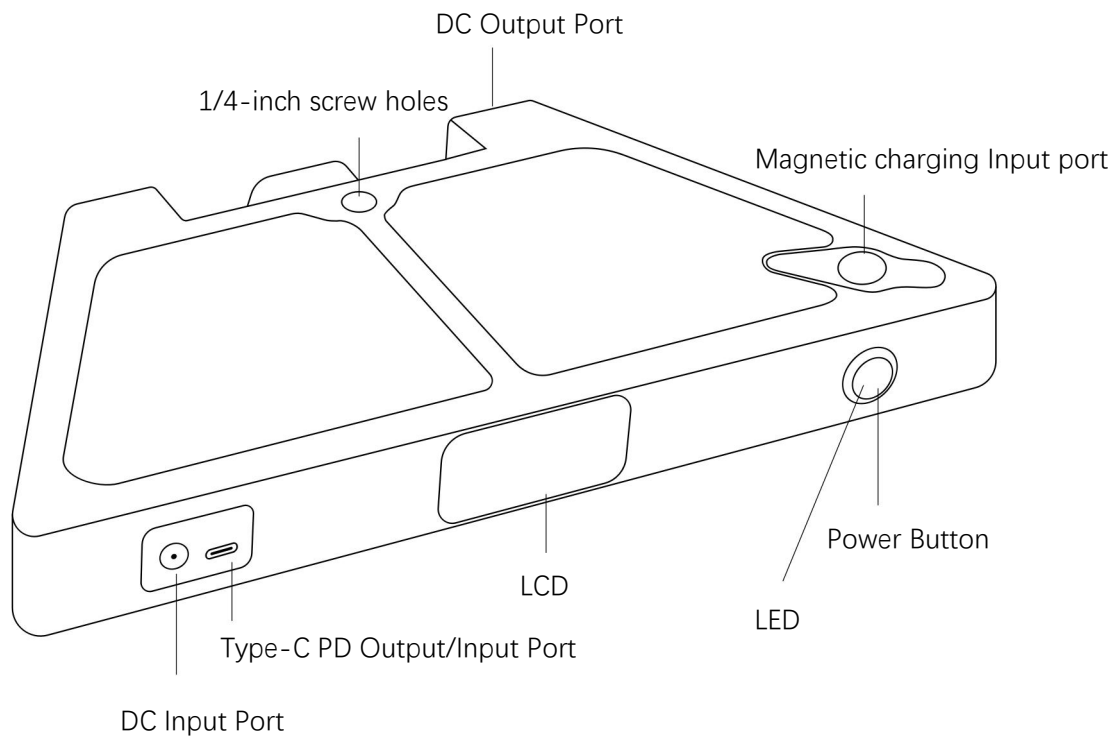


WARNING: The DC port is for output only. Do not connect any DC power adapters, as it may damage the device.


Setup

WARNING: The DC port is for output only. Do not connect any DC power adapters, as it may damage the device.

1. Place the Starlink® Mini face down on a table or other flat surface. Be careful not to scratch the face of the Starlink® Mini. Remove the kickstand if used.
2. Unpack the LinkPower 2 and plug the included DC-to-DC cable into the DC port on the LinkPower 2.

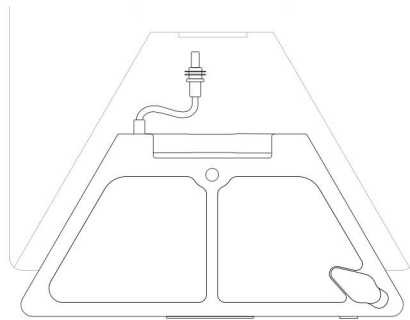


3. Plug the other end of the DC cable into the DC port on the Starlink® Mini. Ensure the plug is fully inserted such that the plug face is flush with the DC port surface to guarantee a secure connection.

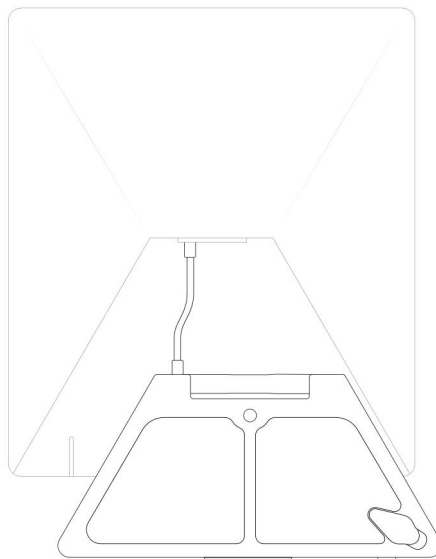


LinkPower 2 Quick Start

4. Plug in an external PD power supply to **activate** the LinkPower 2. When the LinkPower 2 powered on, the LED indicator on the power button will light up. The Starlink® Mini will automatically power on, and its LED indicator will begin flashing.

NOTE: After LinkPower 2 has been activated, you can remove the external PD power supply.

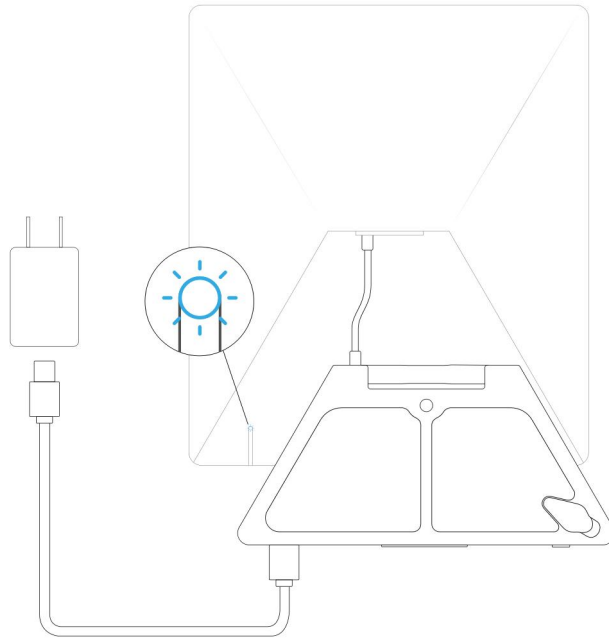

5. Gently slide the LinkPower 2 toward the Starlink® Mini until you hear a clicking sound. This indicates that the LinkPower 2 is securely attached to the Starlink® Mini.

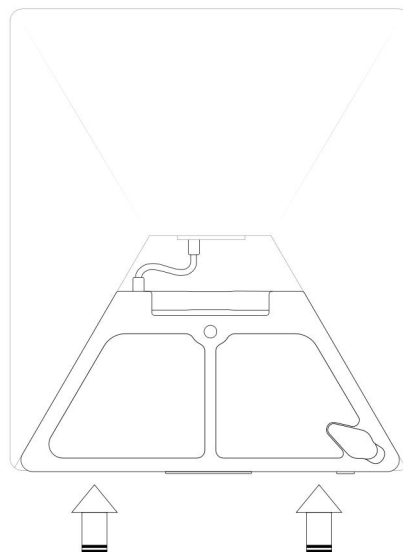


6. Setup is complete. You can now use your Starlink® Mini as normal, powered by the attached LinkPower 2.

Usage


Charging

To charge LinkPower 2 and simultaneously power the Starlink® Mini, connect an external USB Type-C PD power supply to LinkPower 2.

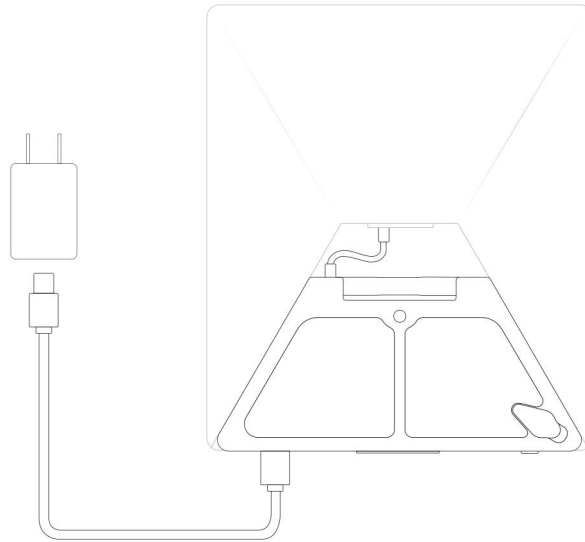


Works as a normal power bank

When needed, LinkPower 2 can also be used to charge other devices through its USB Type-C PD port.

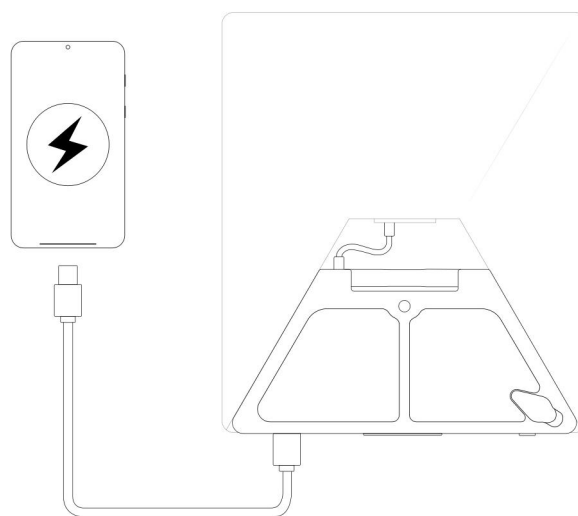

Check the status

To check the status of LinkPower 2, press Power Button once to turn on the LCD screen.

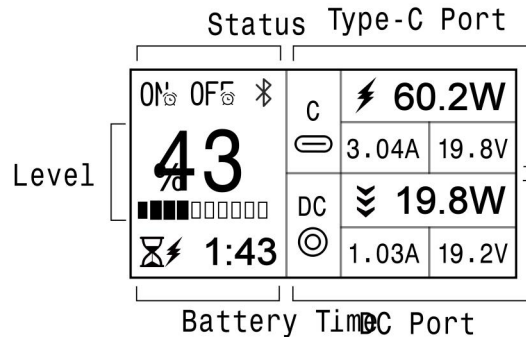

Following is the layout of the full UI:

Level	Displays Battery Level
Battery Time	Displays the estimated time until LinkPower 2 is fully charged. Displays the estimated time until LinkPower 2 is fully discharged.
Status	ON Indicate a timer is active for turning on the DC port OFF Indicate a timer is active for turning off the DC port Indicate work status of Bluetooth
DC Port	Displays the power, current, voltage and work status of the DC port Indicate DC port is discharging
Type-C Port	Displays the power, current, voltage and work status of the Type-C port Indicate Type-C port is charging Indicate Type-C port is discharging

When the DC port is enabled, the LED indicator will gently pulse.

Manually Controlling the DC Port

You can manually enable or disable the LinkPower 2's DC port, which in turn powers your Starlink® Mini on or off.

To do this, press and hold the Power Button for at least 2 seconds. The LED indicator will quickly flash twice to confirm this action.

- When the DC port is enabled, the LED indicator will gently pulse.
- When the DC port is disabled, the LED indicator will turn off.

Shutting Down LinkPower 2

If you don't plan to use LinkPower 2 for an extended period, you can shut it down completely. This helps to preserve battery life and health.

To do so, press and hold the Power Button for at least 10 seconds. Once LinkPower 2 is fully shut down, the Power Button will become unresponsive.

To restart LinkPower 2 from a complete shutdown, simply plug in an external power supply.

Using Web App

NOTE: The Web App currently only works on following browsers:

- Windows/macOS: Chrome, Edge, Opera
- Android: Chrome, Edge, Opera, Samsung Internet
- iOS: [Bluefy](#)

NOTE: The Web App can function offline after your initial visit.

Access Web App



Scan the following QR code, or the one on the back of the LinkPower 2.

Or type in the URL <https://pwa.peakdo.ca/link-power-1/> manually.


(Optional) Install Web App

NOTE: You may need to grant your browser 'Home screen shortcuts' permission.


LinkPower 2 Quick Start

You can access the Web App directly in your browser. For a more integrated experience, you can also install it like a native app, which provides a launch icon on your desktop or allows it to be pinned to your Windows Taskbar.

When you visit the Web App for the first time, your browser may prompt you to install it.

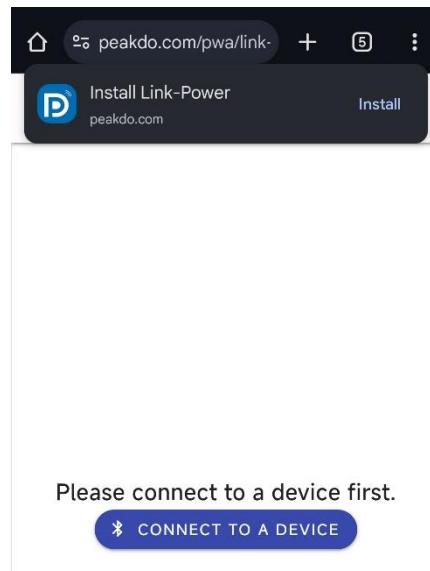


If not, you can typically find the installation option via your browser's "Add to Home screen"

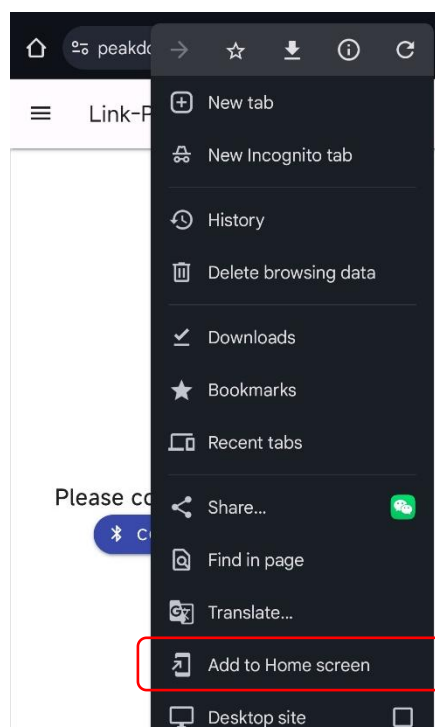

or similar menu.


LinkPower 2 Quick Start

Follow the on-screen guide to install the Web App:

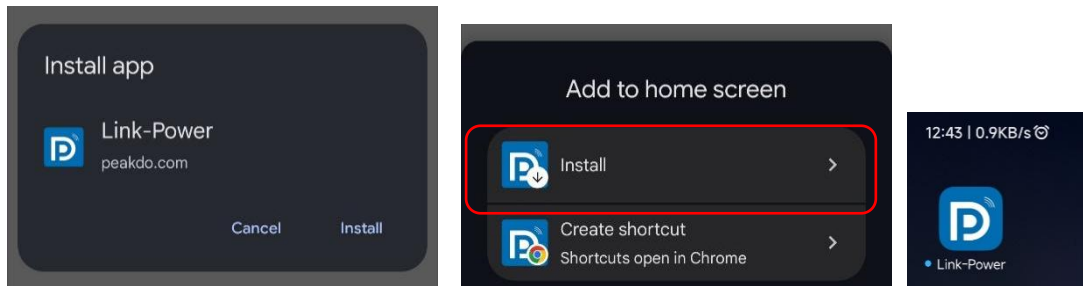

Connect to LinkPower 2

The Web App communicates with LinkPower 2 via Bluetooth.

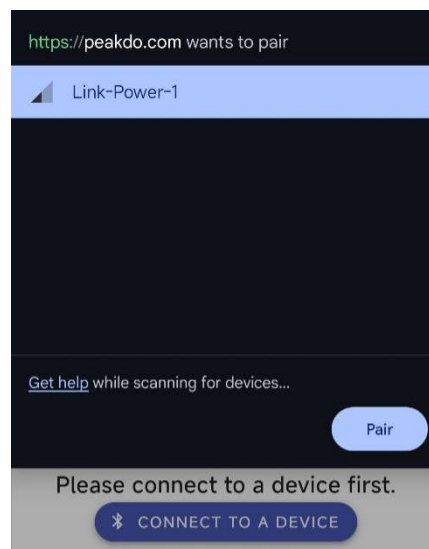

You can connect to your LinkPower 2 by tap the “Connect to a device” button.


Your browser will scan for all nearby LinkPower 2 devices and display them in a list, allowing you to select one to pair.

NOTE: In some situations, a previously paired or bonded device may not show up in the list. You can unpair or remove the bond from your system and try again.


Grant permission to Browser

If your browser lacks Bluetooth access permission, it may prompt you to grant it.

Follow the on-screen guide to allow access:

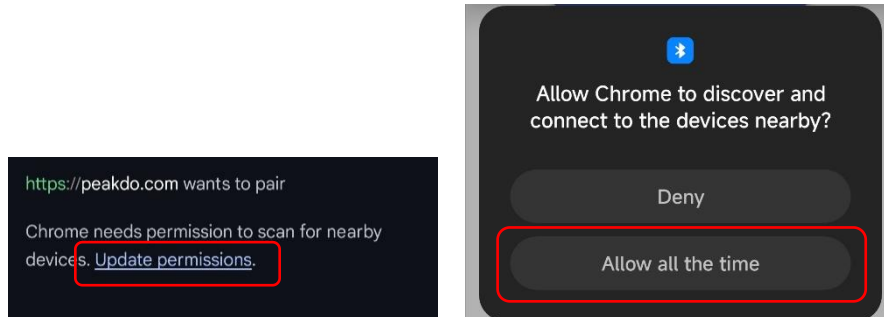

The UI

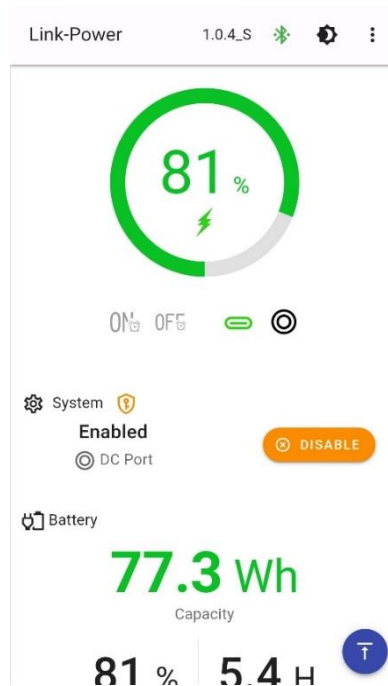

Following is the UI of the Web App, it's pretty straightforward.

Some advance actions hidden by default. You can show them by check the "Expert Mode" menu in the three dots menu:



Pair with LinkPower 2

Some actions are marked with the  icon because they require authentication. These are often advanced or sensitive actions.

When you perform one of these actions, your operating system (OS) will prompt you to enter a PIN to pair with the LinkPower 2 device. You'll only need to do this once, unless you delete the LinkPower 2 bond from your OS settings.

NOTE: A random six- digit PIN will be displayed on the LCD screen. If not, use the default PIN 020555.

Troubleshooting

Our Web App has been successfully tested with the following browsers:

- Windows/macOS: Chrome, Edge
- Android: Chrome, Edge, Samsung Internet
- iOS: [Bluefy](#) (not on the list, but has been confirmed on iOS 18.5)

1. Activate LinkPower 2, and make sure Bluetooth is turned on: the Bluetooth icon should be highlighted white (not green or dim grey) on top of the screen.
2. Make sure your system has Bluetooth hardware and it is turned on:
 - For Windows
 - Go to `Settings` → `Bluetooth & devices`. Make sure Bluetooth is turned on
 - In `Bluetooth & devices`, click `Add device`
 - Choose `Bluetooth`
 - Wait for Windows to discover your BLE device, you should see the device named `Link-Power-2` in the list
 - For Android
 - Make sure Bluetooth is turned on
 - you should see the device named `Link-Power-2` in the `Available devices` list
3. Install and launch a supported browser

Specifications

Product Name	LinkPower 2
Battery Capacity	99Wh, 27500mAh(3.6v)
Battery Runtime	~4Hours for Starlink® Mini
Battery Type	21700 Lithium Battery
Ports	PD/USB-C; DC 5.5 x 2.1
DC Output	DC 15-21V. 65W Max.
PD/USB-C Input	5V-3A; 9V-3A; 12V-3A; 15V-5A; 20V-5A; Default 65W Max ^{1,2} .
PD/USB-C Output	5V-3A; 9V-3A; 12V-3A; 15V-5A; 20V-5A; Default 65W Max ^{1,2} .
Screen	1.47" LCD
Control	Power Button / Bluetooth Low Energy
Others	LED Indicator; Three standard 1/4-inch screw holes.
Dimensions	243mm x 115mm x 27 mm
Weight	~645g
Working Temperature	-20°C ~ 60°C
Waterproof Rating	IPX4

1. Input (Charging) and Output (Discharging) Power Limit can be set via Web App. The max power limit is 140W.

2. Warning: Charging or discharging the battery at high power levels may significantly reduce its lifespan. For optimal battery health, avoid excessive power usage unless necessary.

FCC Warning Statement: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.