


Base Station & Doorbell Camera



Scan the code
to view the user manual - G60 & M52

Base Station Buttons

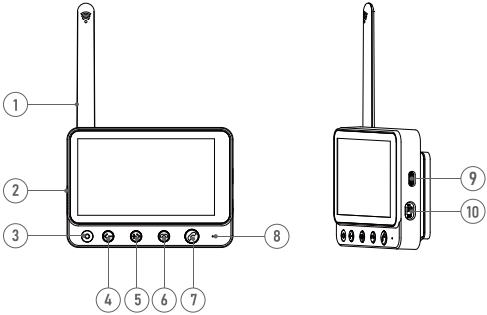

1. Antenna
2. Speaker
3. Indicator Light
4. Adjust - Button: Volume Down / Brightness Down
5. Adjust + Button: Volume Up / Brightness Up
6. Hang Up Doorbell / Settings / Back Button
7. Answer Doorbell / Enter Button
8. Microphone
9. Type-C Charging Port
10. Power Switch


Base Station Indicator Light

Flashing BLUE



The device is disconnected from Wi-Fi. It will attempt to reconnect automatically. If it fails, please reset the pairing in the app.

BLUE Light Turns OFF

The device is successfully connected to Wi-Fi.



Doorbell Features



- | | | |
|--------------------|-------------------------|--------------------|
| 1. Motion Sensor | 2. Wide-angle Lens | 3. Indicator Light |
| 4. Speaker | 5. Microphone | 6. Infrared Lights |
| 7. Doorbell Button | 8. Type-C Charging Port | 9. Power Button |

Doorbell Indicator Light

Flashing RED

The device is disconnected from Wi-Fi. It will attempt to reconnect automatically. If it fails, please reset the device and pair it again in the app.

Flashing RED and BLUE Alternately

Low battery. Please recharge the device.

Flashing BLUE


The device is recording.

Solid RED

The device is charging.

RED Light Turns OFF


When the device is fully charged.



Recharge Your Doorbell


1. Remove the Mounting Bracket

To do this, press the button on the top of the doorbell as shown below.



2. Recharge Your Doorbell Before First

Use the provided Type-C Cable to charge your doorbell. It takes approximately 10 hours to fully charge, depending on the power source. Please note that you should use a power source of at least 5V1A.



A solid RED light indicates that the doorbell is charging. When the doorbell is fully charged, the RED light will turn off.

Create an Account in the App

1. Scan the QR code below or search for app in the Apple App Store or Google Play. Then download and install the app.




Aiwit




Android/iOS App
Download

2. Open the app on your cellphone and tap Sign up.

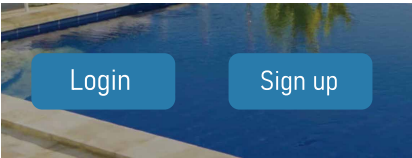


3. Enter your email address, set a password, and tap Sign up.



The image shows a mobile app screen titled "Welcome Sign up" for the "Aiwit" app. The Aiwit logo, which consists of a stylized blue and orange sun-like icon above the word "Aiwit", is in the top right corner. Below the title, there are three white input fields with rounded corners, each with a light gray placeholder text: "Email Address", "Confirm Email Address", and "Password". Below these fields is a large, dark blue rounded rectangular button with the text "Sign up" in white. At the bottom center, there is a smaller white rounded rectangular button with the text "Login" in dark blue.

4. After activating your account with the email link, log in to the app using your email and password.



The image shows a mobile app screen with a blue gradient background. At the top, there is a blue bell icon with a white checkmark inside, surrounded by small white stars. Below this is a white circular icon containing a blue envelope. The main text on the screen reads: "We have sent an email to xxxxxxxx@xxx.com. Open your email and tap the link to verify." followed by "If you don't see the email, check your spam, or tap 'Resend email' below." At the bottom, there are two buttons: a white rounded rectangular button on the left with the text "Resend email(55 s)" in dark blue, and a dark blue rounded rectangular button on the right with the text "Please Log in" in white.

5. Re-open the app, enter your email address and password, and tap Log in.

Connect Your Base Station with the Doorbell Camera

1. Set the Base Station to Pairing Mode


- Plug the included Type-C charging cable into the base station, then slide the power switch **up to the ON position**.
- A **QR code** will appear on the screen.

2. Activate the Doorbell Pairing Mode

- Press the power button on the back of the doorbell. You will hear the voice prompt: **"Power on, entering Pairing Mode."** This indicates the doorbell is ready to pair.

3. Pair the Base Station with the Doorbell

- Aim the doorbell camera at the QR code displayed on the base station screen to scan it.



- When you hear **"Device registration successful,"** the pairing is complete.
- Press the doorbell button to confirm that the base station responds properly.

Create an Account in the App

1. Prepare Your Phone

- Ensure your phone is connected to a **2.4GHz or 5GHz Wi-Fi network**.
- Turn on **Bluetooth**.
- Open the Aiwit App and sign in to your account.

2. Set Up Your Base Station in the App

- Tap the **QR code scanner** icon in the upper-right corner of the app.
- Scan the QR code displayed on your base station's screen to start pairing.

3. Connect to Wi-Fi

- Open your phone's Wi-Fi settings and connect to a **2.4GHz or 5GHz Wi-Fi network**.
- Return to the app and tap **"Next."** The app will begin searching for the Bluetooth device.

4. Set Up Wi-Fi Connection

- Select your Wi-Fi network from the list or enter it manually.
- Enter your **Wi-Fi password**, then tap **"Next."**

5. Confirm Connection

- Double-check that your Wi-Fi name and password are correct.
- Tap **"Confirm."**


6. Complete Setup

- When you hear the voice prompt **"Device registration successful,"** your setup is complete.
- Tap **"Confirm"** to finish.

Install Your Base Station


Step 1: Prepare the Wall

Mark the drill holes on the wall using the mounting base as a guide. Drill the marked holes, insert the wall anchors, and secure the mounting base with screws.

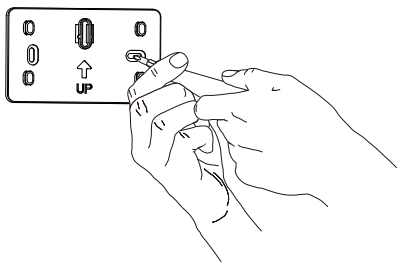


Step 2: Attach the Base Station

Insert the base station arm into the mounting base.

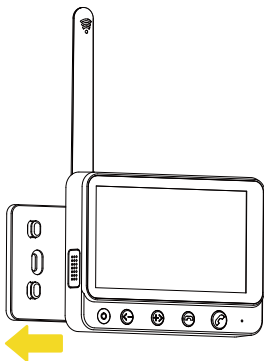

Step 3: Secure the Base Station


Slide the arm downward to securely lock it into the base.

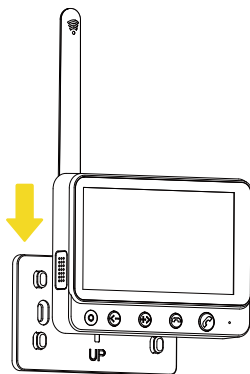

Install Your Doorbell


Step 1: Remove the mounting bracket

To do this, press the button on the top of the doorbell as shown below.




Step 2: Prepare for mounting

Mark the drill holes and use a bit to drill into your wall. Insert the anchors and secure your back plate with the provided mounting screws.

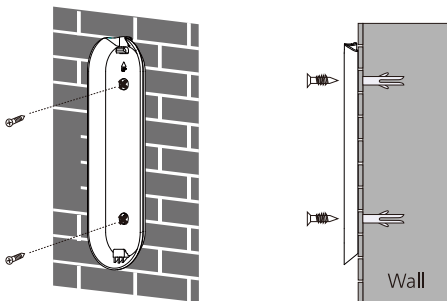

Step 3: Reattach the doorbell

Position the doorbell back on by slotting it in at the bottom and clicking it into Position.

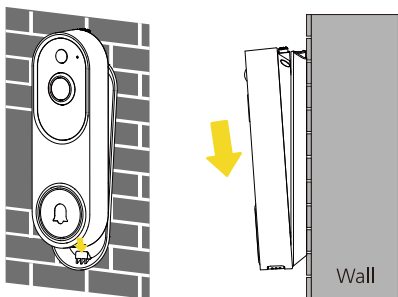

Frequently Asked Questions

1. How can I share the device with family members?

Open the app and tap on Settings. From there, you can share the device via QR code or email, and even transfer ownership of the device. The new user must first download the app and create their own account.

2. Why can't I change the settings?

Only the owner account can change settings, delete videos, and share the device. Shared accounts do not have these options.

3. How many users can view the device at the same time?

The owner account can share the device with up to 8 other accounts. Up to 3 users may view the video feed at once, but only 1 user can use the intercom.

4. Base Station is 5GHz Wi-Fi supported?

Yes, the base station supports both 2.4GHz and 5GHz Wi-Fi networks.

5. Doorbell is the 5GHz Wi-Fi supported?

No, the camera only works with 2.4GHz Wi-Fi. Please separate two Wi-Fi bands by giving the 2.4GHz and 5GHz networks each a unique separate SSID (network name). Then connect your device to the 2.4GHz Wi-Fi.

6. Why is my Wi-Fi signal weak?

Your camera may be too far from your wireless router, or there may be obstructions reducing signal strength. You might want to reposition your router or get a signal extender/repeater.

7. Why is the camera offline?

The camera being offline means it is disconnected. There could be a few reasons for this:

- 1) If the camera has run out of power, you will need to recharge it.
- 2) The Wi-Fi signal is weak, causing disconnection. Please improve your Wi-Fi signal and reconnect the device.

- 3) If the Wi-Fi is unstable, the device might go offline or experience interruptions frequently. You can try restarting the router and reconnecting the Wi-Fi to see if it helps. A good Wi-Fi connection is essential since the device is outside the house.

8. How can I adjust the human detection accuracy?

Open the app and tap on Settings. Then tap on Motion Settings. Here, you can select the desired human detection accuracy from three options: low, medium, and high. We recommend choosing medium. The high setting provides the strictest detection level, meaning the device will be triggered only when it is entirely certain that the moving object is a human. However, this stringent setting might cause the device to overlook a human figure, resulting in a missed notification.

High Accuracy - The device will record videos less frequently, ensuring maximum battery life.

Medium Accuracy - Medium battery life.

Low Accuracy - The device will record videos more frequently, leading to the shortest battery life.


If the areas you're monitoring experience excessive or repetitive motions, like children playing in the yard, you may receive numerous alerts, which can rapidly deplete the battery of devices. The human detection accuracy settings are designed to help you receive the notifications you want while preserving battery life.

9. How can I enable notifications on my phone?

- 1) Open the app. From the Device page, tap the Settings icon, then tap the Motion Detection icon. Here, you can choose whether to turn Motion Alerts on or off.
- 2) Open your phone's settings. Navigate to "App Management" and "Notification Settings," then locate the app. Ensure all permissions and notifications are enabled for the app.

Contact Us

If you require further assistance, feel free to reach out to our support team. Email us at service@aiwit.cc or use the app's support feature. Please include your product's model and the retailer's name. Thank you.

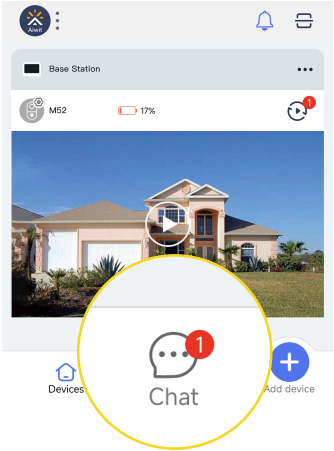

FCC Statement



Product Name: Doorbell Camera

Model: M52

FCC ID: 2BR3K-DOORBELL-M52

Power supply: Rechargeable Li-ion Battery DC 3.7V

Product Name: Base Station

Model: G60

FCC ID: 2BR3K-STATION-G60

Power supply: DC 5V

Manufacturer: HK EKO ELECTRONICS LIMITED

Address: FLAT/RM 114/F HENLEY INDUSTRIAL CENTRE, 9-15 BUTTE STREET, MONG KOK KL, HONGKONG, China

Information to User

Important: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

EU & UK Compliance Notice



CE Simplified EU Declaration of Conformity

This device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU.

Test standards:

EN IEC 62311:2020

EN IEC 62368-1:2024+A11:2024

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 300 328 V2.2.2 (2019-07)



UKCA Simplified UK Declaration of Conformity

This device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations (S.I. 2017 No. 1206).

Test standards:

BS EN IEC 62311:2020

BS EN IEC 62368-1:2024+A11:2024

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 300 328 V2.2.2 (2019-07)

EC REP

Company Name: E-CrossStu GmbH

Address: Mainzer Landstr. 69, 60329 Frankfurt am Main

UK REP

Company Name: YH Consulting Limited

Address: C/O YH Consulting Limited Office 147 Centurion House
London Road Staines-upon-Thames Surrey TW18 4AX



This device is in compliance with the Directive (EU) 2015/863 – Amendment of EU RoHS Directive 2011/65/EU Annex II.

Test standards:

IEC 62321-3-1:2013

IEC 62321-4:2013+AMD1:2017

IEC 62321-5:2013

IEC 62321-6:2015

IEC 62321-7-1:2015

IEC 62321-7-2:2017

IEC 62321-8:2017

Proper Disposal Instructions



Old electrical appliances must not be disposed of together with the residual waste, but have to be disposed of separately. The disposal at the communal collecting point via private persons is for free. The owner of old appliances is responsible to bring the appliances to these collecting points or to similar collection points. With this little personal effort, you contribute to recycle valuable raw materials and the treatment of toxic substances.