100.00 mm

125.00 mm

HOMELIST

Homelist LX1 EYE-PROTECTION FLUSH MOUNT CEILING LIGHT
Homelist LX2 EYE-PROTECTION FLUSH MOUNT CEILING LIGHT
Homelist LX3 EYE-PROTECTION FLUSH MOUNT CEILING LIGHT

USER MANUAL

Product Number

M580XD048W2BX-KJ
M580XD058W2BX-KJ
M580XD068W2BX-KJ

Please read this manual carefully before use and keep the product properly
The pictures are for reference only, please refer to the actual product

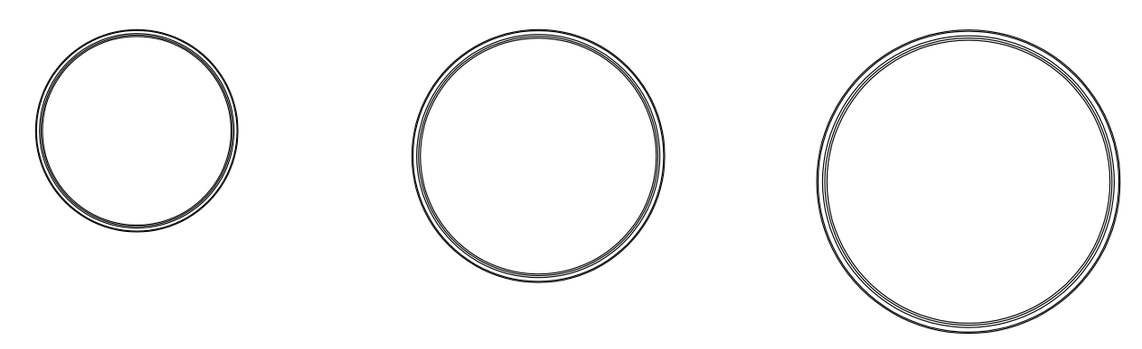

The pictures are for reference onlypleaserefer to the actual product

Basic Product Parameters

Product Name: LX1 LX2 LX3 EYE-PROTECTION FLUSH MOUNT CEILING LIGHT
Brand: Homelist
Product Number: M580XD048W2BX-KJ / M580XD058W2BX-KJ / M580XD068W2BX-KJ
Rated input: 110V~50Hz
Rated Power: 48W / 58W / 68W
Rated Current: 0.48A / 0.59A / 0.69A
Power Factor: 0.9

Assembly Accessories

M580XD048W2BX-KJ Flush Mount Ceiling Light



M580XD058W2BX-KJ Flush Mount Ceiling Light
M580XD068W2BX-KJ Flush Mount Ceiling Light



Packing List: Mounting Bracket, Lamp Head Body, Instruction Manual, Accessory Pack

Installation Steps (M580XD048W2BX-KJ)

①



Remove the mounting bracket from the backplate of the light fixture. Secure the bracket to the desired location on the ceiling using the anchor bolts.

②



Fix the mounting bracket to the ceiling using the provided screws. Then, attach the safety clip from the light body to the secured bracket.

③



Wiring: Connect the wires accordingly: Live (L) to Live (L), Neutral (N) to Neutral (N), and Earth (Ground) to Earth (Ground).
Mounting: Align the light body with the mounted bracket, matching the 4 screw holes/slots. Lift the fixture up into position and then turn it clockwise to lock and secure it in place.

④



Rotate the fixture clockwise until it is fully seated and secure, confirming the installation is firm and stable. The installation is now complete. Restore power and test the light.
Once the fixture is confirmed to be operating normally and is securely fixed, use the wall control switch to adjust the brightness and color temperature to your preference.

Installation Steps (M580XD058W2BX-KJ/M580XD068W2BX-KJ)

①



Remove the mounting bracket from the backplate of the light fixture. Secure the bracket to the desired location on the ceiling using the anchor bolts.

②



Fix the mounting bracket to the ceiling using the provided screws. Then, attach the safety clip from the light body to the secured bracket.

③



Wiring: Connect the wires accordingly: Live (L) to Live (L), Neutral (N) to Neutral (N), and Earth (Ground) to Earth (Ground).
Mounting: Align the light body with the mounted bracket, matching the 4 screw holes/slots. Lift the fixture up into position and then turn it clockwise to lock and secure it in place.

④



Rotate the fixture clockwise until it is fully seated and secure, confirming the installation is firm and stable. The installation is now complete. Restore power and test the light.
Once the fixture is confirmed to be operating normally and is securely fixed, use the wall control switch to adjust the brightness and color temperature to your preference.

HOMELIST

Technological innovation brings natural light home

MADE IN CHINA

EU REP **SUCCESS COURIER SL**
CALLE RIO TORMES NUM.1,PLANTA 1,DERECHA, OFICINA3,Fuenlabrada, Madrid,28947 spain
EU0017204195241I2XJNs **successservice2@hotmail.com**

UK REP **EVATOST CONSULTING LTD**
Office 101 32 Threadneedle Street, London, United Kingdom,EC2R 8AY
OST_EU_20230214000003 **contact@evatost.com**

Manufacturer:
MoonShadow Innovative Technology(Guangdong) co., Ltd.
Address: Building B,No.16, Fuheng North Road, Henglan Town, Zhongshan City, china
Email: info@homelist.com

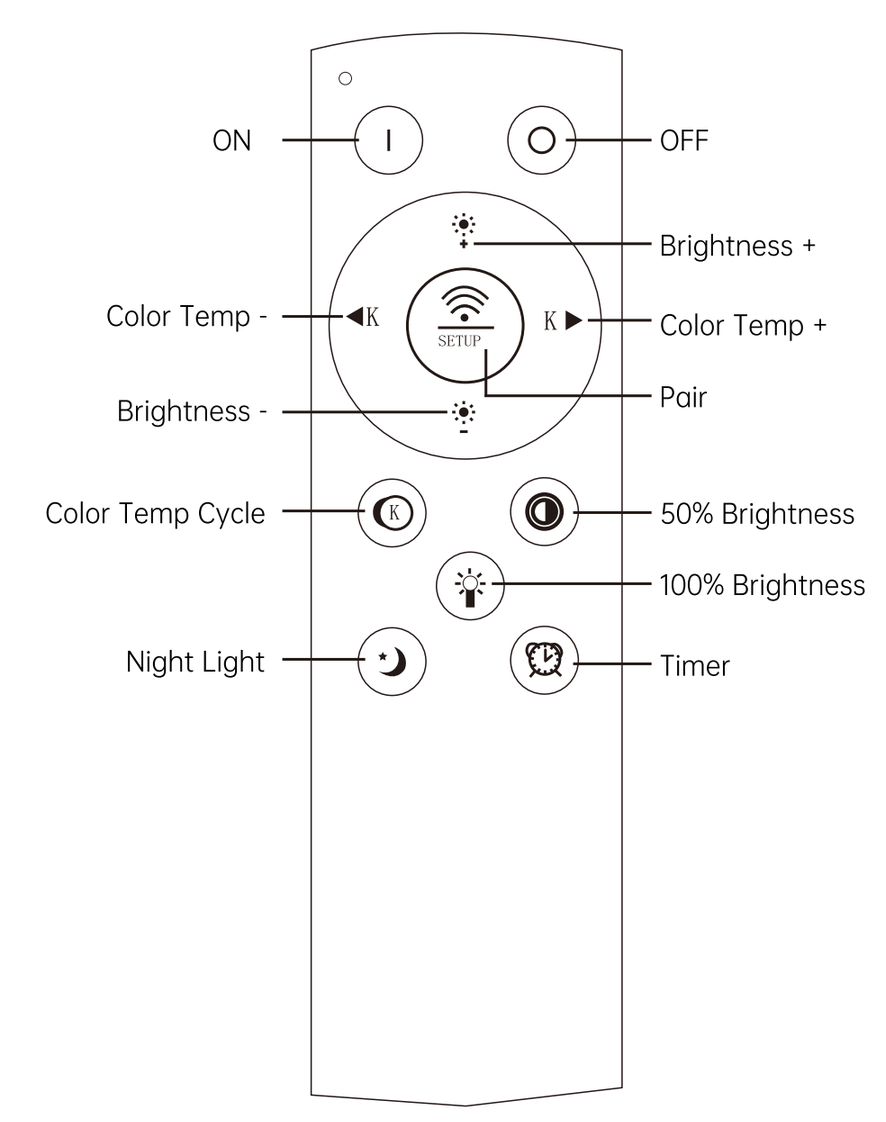

Remote Control Instructions:
1. Uses two AAA batteries.
2. Pairing: Within 5 seconds of powering on the light, press and hold "Pair" or press it five times in a row.
Pairing is successful when the "Pair" button flashes.
3. Clear Pairing: Within 5 seconds of powering on the light, press and hold "On" for approximately 5 seconds to clear the pairing on the remote.

Safety Precautions

1. The light source of this product cannot be directly replaced by the user. Oncethe light source needs to be replaced (such as when the light source reachesthe end of its life), please contact the manufacturer or its service agent forreplacement; please be sure to cut off the power supply before installation.
2. Please be sure to cut off the power supply before installation.
3. The ceiling used to install the lamp must be able to withstand more than fourtimes the weight of the lamp before installation. The lamp cannot be installedon a thin and soft ceiling that cannot bear weight.
4. The lamp cannot be installed above high-temperature objects or in humid andwet places. This product is not waterproof (it cannot be installed above stoves.gas and exhaust pipes to prevent damage to the environment).
5. The lamp must not be connected in series with other electrical appliances, andcannot be used in parallel with dimmers.
6. When checking and repairing the lamps, please entrust professionals to operate.
7. When the lamp is abnoma, cut off the power supply immediately and contact us.
8. If the external soft cable or soft wire of this lamp is damaged, contact us forreplacement to avoid danger.
9. Do not test the light source alone. Connect the whole lamp before testing toavoid burning the light source!

WARNING!

Before maintenance of the lamp, the power must be turned off to prevent electric shock.

In order to prevent accidents that threaten personal safety, such as breakage, falling, electric shockfire, etc. Please confirm the following important matters before starting any operations, and installand use them in strict accordance with the instructions. Do not to modify the lamps or replace partsby yourself, and it is also recommended to keep them properly for reference!Improper power connection, there is a possibility of electric shock, resulting in fatal risk. Make sure thethe connected power supply has grounding protection!Exposed electrical parts, risk of electric shock, fatal risk!

Warranty and Maintenance

1. Please clean and check the lamp regularly. Before maintenance, turn off thelamp and remove prevent electric shock.
2. When cleaning the lamp, use a soft, lint-free cloth with a little dilutedneutral detergent to wipe the lamp body. Do not use alcohol or any othertype of chemical solvents, such as kerosene, stain remover. etc..otherwise it may damage the lamp shell.
3. It is strictly forbidden to use water or any liquid to directly rinse the lampbody and parts.

Name and content of harmful substances in the product

Part name	Harmful substances					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (VI)	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)
Lampshade	○	○	○	○	○	○
Plastic parts	○	○	○	○	○	○
Metal shell	○	○	○	○	○	○
Circuit board	×	○	○	○	○	○
LED light-emitting parts	○	○	○	○	○	○
Adapter	×	○	○	○	○	○

This table is prepared according to the provisions of S/TI1364-2014.
O: indicates that the content of the harmful substances in all homogeneous materials of the component is below thelimit requirements specified in GB/T26572-2011.
X: lindicates that the content of the harmful sulbstances in at least one homogeneous material of the componentexceeds the limit requirements specified in GB/T26572-2011.
Note: some of the above "X" components contain harmful substances exceeding the limit requirements due tothe current industry technology level, and replacement or reduction cannot be achieved for the time being.

FCC

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

IC

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:
1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.
Cet appareil contient un ou des émetteurs/récepteurs exempts de licence qui sont conformes au(x) RSS exempts de licence d'Innovation, Science et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :
1. Cet appareil ne doit pas causer d'interférences.
2. Cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un fonctionnement non désiré de l'appareil.