


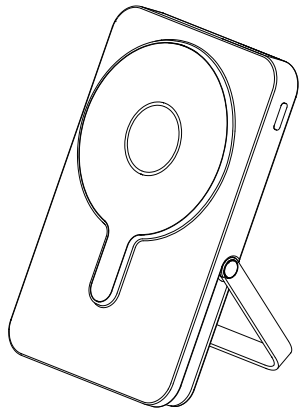

Magnetic Fast Charge Mobile
Power Supply 10000mAh

User Manual

Please read this user manual carefully before use and keep it for future reference.

1.Product Specifications


Product Name	Magnetic fast charge mobile power supply
Model No.	PY018
Capacity	10000mAh 3.85V (38.5Wh)
Battery	Polymer Lithium-ion Battery
Energy Conversion Rate	Conversion Rate: ≥75%
Product Size	110.2*70.8*20.5mm
Product Weight	About 211.7g
Type-C Input	5V=3A 9V=2A 12V=1.5A 18W(max)
Type-C Cable Input	5V=3A 9V=2A 12V=1.5A 18W(max)
USB-A Output	5V=3A 9V=2A 12V=1.5A 10V=2.25A 22.5W (max)
Lightning Cable Output	5V=2.4A
Type-C Cable Output	5V=3A 9V=2.22A 12V=1.67A 10V=2.25A 22.5W(max)
Type-C Output	5V=3A 9V=2.22A 12V=1.67A 20W(max)
Wireless Output	5W 7.5W 10W 15W

2.Package Including

Power Bank x1
User Manual x1

3.Product Description

This is a portable power bank with two built-in charging cables and one stand. It is capable of charging up to 5 devices at the same time and has a digital display indicator. The mobile treasure supports bi-directional C-type charging, has strong portability, and is equipped with over current, over voltage, over temperature, short circuit and other safety protection circuits.

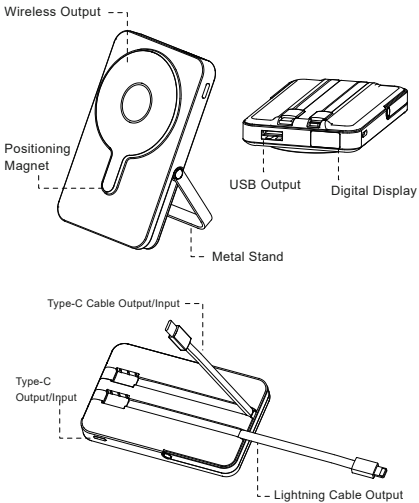


4.Magnetic wireless charging

(Go for iPhone series mobile phones that support magnetic wireless charging function)When the phone is turned on, magnetically attach the mobile phone to the wireless charging area of the power bank, and the wireless charging mode is started. The power indicator will display the current battery level.


5.Regular wireless charging

(Go for non-iPhone mobile phones that support wireless charging) When the phone is turned on, put the phone that supports wireless charging face up on the power bank, align it with the wireless charging area, and the charging symbol will light up to start wireless charging. The power indicator will display the current battery level.



6.Wired charging

Use the Type-C cable or lightning cable connect the device to the power bank, then you can charge the phone. The power indicator will display the current battery level.

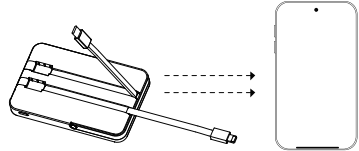


7.Charge the Power Bank

Plug one end of the Type -C port of the power bank, and then connect the other end to a charger to charge the power bank. When charging, the power indicator light displays the remaining battery level. When fully charged, the power indicator display 100%.

Notes:

- When it is charging and fully charged, the wireless charging indicator light does not light up.
- In order to guarantee the normal service life of the battery, please use and charge it at least once every five months.

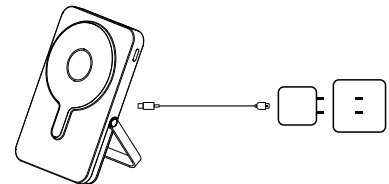

8.Use Environment

Use ambient temperature: non-tropical area below 0°C to 35°C
Storage ambient temperatures: 0 °C to 40 °C degrees Celsius.

9.Safety Warnings

- Due to the existence of conversion efficiency, so rated output capacity is less than battery capacity.
- When you need to check the power, press the power button once and the LED indicator lights up to show the current power. In the connectionless state, the power will automatically sleep after about 30 seconds.
- Please charge your power bank periodically (at least one time with 5 months recommended) in order to maintain its long service life.
- Improper use of the product can easily cause damage to the product or may endanger personal and property safety.
- Consumer shall be liable for any personal and property damage resulted from their improper use against the user manual or ignoring the warning, to which our company will not bear any legal liability.
- Disintegration of this product by non-professionals is strictly prohibited.
- Use of household appliances or loads in excess of the output current of this product shall be avoided (no output due to circuit protection).
- Intense physical actions including bashing, throwing, trampling on and squeezing, etc. shall be avoided.
- If you use a power adapter to charge, you should purchase a power adapter that is certified by CCC and meets the requirements of the standard.
- Note: There is a risk of fire or explosion if the battery pack is replaced with the wrong model.

10.Statement on Toxic and Hazardous Substances in Electronic Information Products

Part Description	Toxic or hazardous substances and elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (CrV)	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
PCB	○	○	○	○	○	○
Electrode	○	○	○	○	○	○
Battery	○	○	○	○	○	○
Casing	○	○	○	○	○	○

This form is compiled in accordance with SJ/T 11364.
O : It indicates that the content of the toxic and harmful substance in all homogeneous materials of the component is below the limit specified in GB/T 26572 standard.

X: The content of toxic and harmful substances in at least one homogeneous material of this part exceeds the limit stipulated in GB/T 26572 standard.

The information provided in this form is based on the data provided by the supplier and in line with the detection result of ROHS environmental requirements.

Warning Please follow the above safety instructions otherwise it will cause fire, electronic shock, damage or other damage.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used inportable exposure condition without restriction

