


Sound card User's guidance

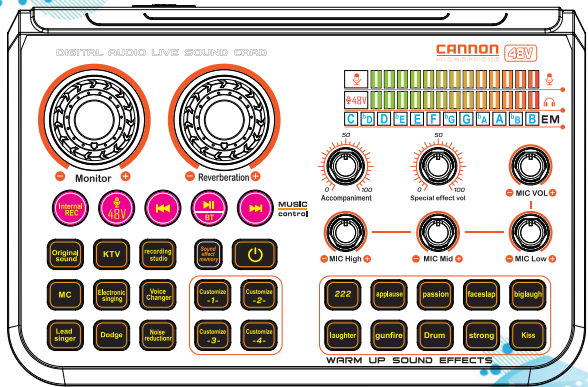

Support major live broadcast apps

Compatible with computer and mobile phone
Multi-function mixer soundcard


To respected user:

This product is a professional recording live broadcast equipment that is very popular nowadays for web live broadcast, mobile K song and other platforms. The product with a built-in dual-core DSP digital chip can switch multiple scene modes arbitrarily and supports dual microphones, dual live broadcasts, dual headphones. Also, it has adjustable treble and bass, one-key dodge, one-key elimination of original sound, one-key noise reduction, multiple groups of sound change fine-tuning and other functions. It supports most live broadcast software, such as TikTok, Zynn, Singha, Wesing, Love Sing, Yingke, Huajiao, Nonolive and other live platforms.

About the usage guide

Our company has conducted a strict and careful check of the usage guide, but we cannot guarantee that the usage guide is completely free of errors and omissions. The pictures in this user guide are for reference only. If any individual pictures do not match the actual display of the product, please refer to the actual product. In order to provide better services, the company reserves the right to modify the products and content described in this user guide at any time without notice.

Hardware introduction

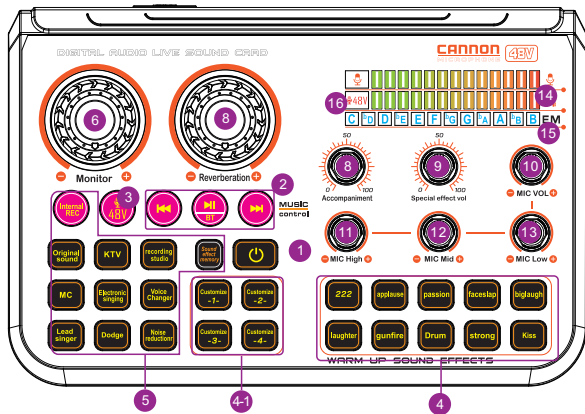

I. Key Introduction

1. Power on/off: Press and hold for 2 seconds to release and enter the power on mode. At the same time, the machine will perform a self check and all indicator lights will light up; The on/off button is on for a long time, and the machine is working normally (with voice prompts); Press and hold for another 2 seconds to shut down (with voice prompts).
2. Up and down, play/pause buttons: This group of buttons is used in Bluetooth mode; Short press the corresponding button to switch songs up and down and play/pause.
- Bluetooth: The default on light is flashing, and the Bluetooth name T600 is connected. After successful connection, there will be a prompt sound and the light will remain on; Long press the play/pause button to turn off the connected Bluetooth phone; At this point, another phone opens and searches for Bluetooth. You can click on pairing to connect.
3. 48V: Press this button lightly to turn on 48V, and the button indicator light will flash; Press lightly again to turn off 48V.
4. Special effects button: Short press one of the buttons to output the corresponding atmosphere sound effect during live streaming, with the light flashing; Short press this button again to turn off the special effects at any time.

Hardware introduction

4-1. Long press one of the buttons, and when you hear a prompt, you can enter the custom recording mode. Release the button to automatically save the recording. (When you press and hold this button again and hear a prompt, the previous recording content will be automatically deleted and re-recorded.)

5. Singing mode: Short press the corresponding mode key to switch to the corresponding mode, and the indicator light will flash

- 1). Internal REC: The internal amplifier is turned off by default. To turn on the "internal amplifier" and long press the power button (with voice prompts); Long press and hold again to close the inset. When the playback is turned on, the music in the OTG downlink is like Bluetooth music, with the cancellation of the original sound, the volume of the accompaniment, and the cancellation of the original sound having an effect. When the playback is turned off, it is treated as a connected voice operation. Dodging, accompaniment adjustment, cancellation of the original sound, etc. do not work, and it is not uploaded to the live broadcast room (even the 3.5 live broadcast port does not upload)
- 2). Original sound: Highlighting human voice, suitable for interactive chatting, dialogue and other scenes with the audience during live streaming, as well as promoting products. Long press this key to enter the custom deletion mode, and all custom lights will flash. After the deletion is completed, the lights will turn to a constant on state.
- 3). KTV: Powerful vocals, full recorded vocals, clean sound quality, and high fidelity.
- 4). Recording studio: It is a professional recording mode with low reverberation and high microphone gain, aiming to restore one's own voice as much as possible, making the recording effect more realistic, full, and the sound more delicate.
- 5). Sound effect memory: Memory mode. Long press this button to save the high, medium, low, and reverb effects of debugging and provide voice prompts; Short press to recall the saved effect, the light flashes.
- 6). MC: Shouting mode, with full and magnetic vocals, suitable for shouting (MC) scenes.
- 7). Electronic singing: suitable for singing electronic songs. Pressing this button in electronic mode can adjust 12 electronic tone tones, and the corresponding "tone indicator light" will flash.
- 8). Voice Change: Switch the voice change mode and the indicator light flashes; And there are corresponding voice prompts.
- 9). Lead singer: The lead singer function switch is turned off by default; When the lead singer is turned on, the light will flash, and at this time, the human voice in the dual channel stereo song will be eliminated in the live broadcast room, and the original song will be converted into accompaniment.

Hardware introduction

- 10). Dodge: The dodge function is disabled by default. Supports the use of this switch to "turn on/off" the dodge function as needed in any sound mode. When the dodge function is turned on and there is audio input to the microphone, the accompaniment sound will fade out; When there is no audio input to the microphone, the accompaniment sound will fade in and return to normal. Suitable for chatting, hosting, and other scenarios.
- 11). Noise reducer: Turn on noise reduction to reduce microphone ambient noise, improve recording sound quality, and flash the light.


II. Adjustment Introduction:

6. Monitor: Adjust between "0" and "100", and monitor the output volume as the number increases (the minimum volume can be adjusted to monitor mute).
7. Reverberation: Adjust between "0" and "100" to increase the reverberation intensity as the number increases.
8. Accommodation: Rotate in the "+" direction to increase the music volume, and rotate in the "-" direction to decrease the music volume. The indicator light will change accordingly.
9. Special effect vol: Rotate in the "+" direction to increase the effect volume, and rotate in the "-" direction to decrease the effect volume. The indicator light will change accordingly.
10. MIC VOL: Rotate in the "+" direction to increase the microphone volume input, and rotate in the "-" direction to decrease the microphone volume input. The indicator light will change accordingly.
11. MIC High: Rotate in the "+" direction to increase the volume of the microphone's treble, and rotate in the "-" direction to decrease the volume of the microphone's treble. The indicator light will change accordingly.
12. MIC Mid: Rotate in the "+" direction to increase the mid tone volume of the microphone, and rotate in the "-" direction to decrease the mid tone volume of the microphone. The indicator light will change accordingly.
13. MIC Low: Rotate in the "+" direction to increase the bass volume of the microphone, and rotate in the "-" direction to decrease the bass volume of the microphone. The indicator light will change accordingly.

III. Introduction to indicator lights:

14. Horse running indicator lights: microphone, monitoring, and accompaniment indicator lights. The corresponding potentiometer indicator lights will change accordingly. When the microphone or accompaniment is input, the indicator lights will jump with time and frequency.
15. Tone indicator light: The corresponding indicator light flashes in electric sound mode.
16. 48V indicator light: When the 48V indicator light is turned on, it will remain on and turn off.
17. Charging indicator light: On the power button (red light on during charging, fully charged light off).

Interface Description

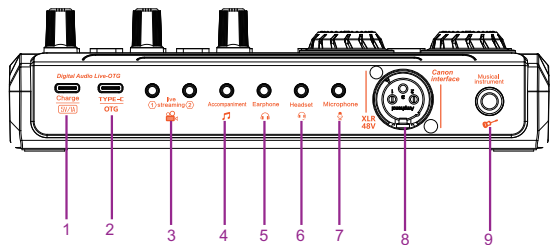

IV. Interface Introduction:

1. Charge: Supports Type-C interface charging.
2. Type-C OTG interface: Supports USB data cable connection to 5V/1A power supply for charging, and connecting to a computer or phone via USB while charging and live streaming.
3. Live streaming: Connect your phone and sound card for live streaming and recording through a 3.5mm audio cable.
4. Accommodation: Connect the phone to a 3.5mm audio cable as music accompaniment input.
5. Earphone: Connect headphones with a 3.5mm jack or connect to the AUX jack of other playback devices through a 3.5mm cable to provide output to other playback devices.
6. Headset: Connect headphones with a 3.5mm jack or AUX jack to other playback devices through a 3.5mm cable for output.
7. Microphone: can be inserted into a 3.5mm microphone.
8. 48V XLR interface: Connect the microphone through a 48V 3-core cable.
9. Musical instrument: an instrument connected to the 6.35 interface.

Product specification

V. Product parameter

Signal to noise ratio: 106dB
Output Power: 600mW
hole machine power consumption: 5W
Rated input: 5V/1A
Recording: 16bit/48KHz, 90dB signal to noise ratio
Replay: 16bit/48KHz, 100dB signal to noise ratio
Distortion: 0.1% (recording), 0.005% (replay)
Battery capacity: 3000MA

VI. Interface Types

Mic interface: 3.5mm	XLR-48 interface: 3-Core Canon seat	Live interface: 3.5mm
Line interface: 3.5mm	Earphone interface: 3.5mm	Instrument interface: 6.35mm
Musical instrument interface: 3.5mm	Digital Audio OTG interface: Type-C	Charging interface: Type-C

1. This product is suitable for use in tropical climates.
2. The altitude area applicable to this product is determined by the power adapter finally selected.
3. If consumers use a power adapter to supply power, they should purchase a power adapter that has obtained CCC certification and meets the standard requirements.

Common problem troubleshooting

- [1] The device does not work when it is turned on.
1) Please check if all cables are connected correctly
2) Please check if the device has enough power, please charge it and try again [with battery version]
- [2] There is noise or no sound when using the headset.
1) Please try to re-plug the headset, and plug the headset before turning on the sound card.
2) Please check if the monitor switch is on.
3) Please use the original headset of the phone.
- [3] Noise is heard during live broadcast.
1) Turn down the microphone volume appropriately.
2) Check if the microphone and headset are fully inserted into the opposite position.
- [4] No accompaniment can be heard during live broadcast.
1) Turn up the accompaniment volume.
2) Check if the accompaniment cable is fully inserted into the device and the accompaniment phone.
- [5] They cannot hear the reverb and accompaniment during the live broadcast.
1) Turn up the accompaniment volume
2) Check if the accompaniment cable is fully inserted into the device and the accompaniment phone.
- [6] The sound of the microphone cannot be monitored
1) Check if the microphone or headphones are connected properly
2) Please check if the monitor switch is on.
- [7] The computer cannot recognize the sound card
1) First connect the sound card to the computer, then restart the computer.
2) Change another USB interface connection.

After purchasing this product, please read the following three guarantees regulations carefully to ensure that the product is effectively protected.
• Unless otherwise noted, the user can enjoy a warranty period of 12 months for the purchased product due to its own quality problems (not product software failure) from the date of purchase.
• If users encounter product quality problems, they can request three guarantees from the designated service department of our company. If they need to be shipped, the user must bear the related costs of transportation.
• User must take the initiative to provide this valid warranty service certificate when requesting the three guarantees service.
• Additional services beyond the three-guarantee service of the product shall be charged in accordance with relevant regulations. The product warranty period after repair is three months from the date of pickup.
• The three-guarantee service provided by our company is limited to products with quality problems, and does not include compensation for losses caused by user accidents and any other indirect or direct losses.
• The user should take the initiative to fill in this voucher as required by the seller of purchase and keep it properly. Our company does not assume the consequences of not filling in this voucher as required, nor does it assume the seller's commitment to users beyond the warranty service regulations.
The following situations do not belong to the scope of the three guarantees. Our company reserves the right to provide services for products outside the scope of the three guarantees.

- The product's valid warranty certificate, original purchase certificate cannot be presented, or beyond the specified warranty period.
- The random information of the product is missing, such as the use guide, warranty card, data cable, product packaging and other accessories.
- Product failure or damage caused by operation that does not follow the instructions. Repair, disassemble, add or replace the original components without permission.
- The original serial number label is altered, worn, replaced, torn, etc.
- Product hardware damage, wear, and indirect software failure caused by the transportation process.
- Compatibility issues with current and future operating systems or product malfunctions or damage caused by this.
- Product performance failures and damages caused by force majeure such as normal wear, aging, improper placement, humidity, wrong connection, unstable voltage, external force, etc.
- The user personally has subjective requirements or objections to the quality, performance, function, feature, etc. listed or not in the user guide.

Warranty information

Dealer information

- ◆ Dealer's signature: *
- ◆ Selling price: *
- ◆ Sale date: *

User information

- ◆ Customer's name: Tel: *
- ◆ Address: *

Repair record

- ◆ Fault description: *

Note: Please fill in in detail, * is required, missing or false information will be deemed invalid
This certificate is only used as a basis for providing three guarantees of services and does not have other legal effects. The maintenance record shall be subject to the maintenance certificate of the authorized service organization.

FCC Warning Statement: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.