60.00 mm

80.00 mm

MANUAL S5

Please read the manual carefully before using the device.
Pictures and products in the manual for reference only.

1.Before starting

1. Check if the watch is the correct model and has complete accessories in the package.

2. Prepare a 4G LTE SIM card, can ask for your dealer if have any questions.(Please turn off the power before installing the SIM Card)

3. It is necessary to activate data flow, and caller display functions .

4.Download the mobile client APP in your cell phone and if you can’t find it please ask the seller for the way of downloading.

2.Install the Nano-SIM card

1.Make sure the device is off the power.

2.Take off the SIM card protective cover.

3.Place a Nano-SIM card into the SIM tray and make sure that the card's chip part is on the up side.Then put the tray back in and install the protective cover.(If the model does not have a SIM tray, just directly insert the Nano-SIM card into the slot and make sure that the card's chip part is on the up side.)

3.Switch on and off

Switch on:
If the device is off the power, long press the power button to turn on the device.
Shut down:
1: Enter the settings, choose the power off option.
2: When the device is crashed, you can use remote shut down on the PC or Mobile client.
3: When there is not a SIM card,long press the power button to turn the device.

Functional area details
:

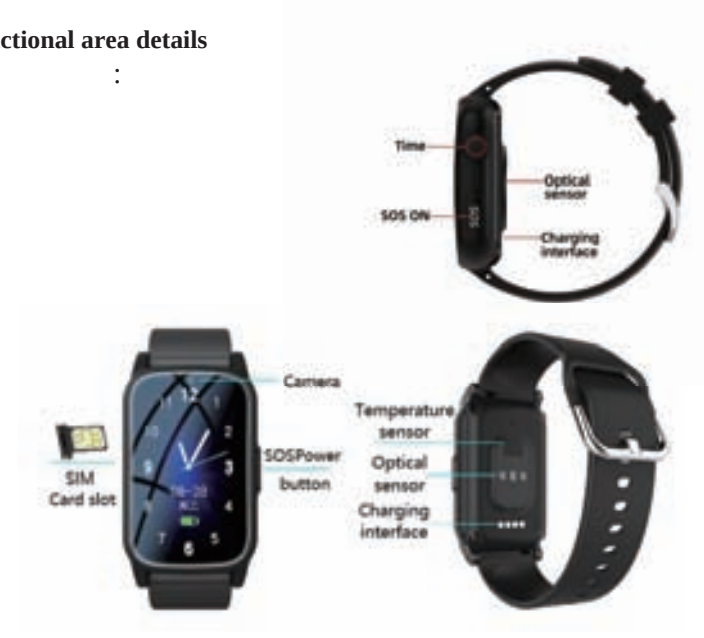

Button style:



The registration code for the button type machine is on the tag.

Power button

When the wristband is turned off, long press the power button on the side to turn it on.
Press briefly once to announce the time and battery status.

Button (1) represents the SOS function key

Speed dial: Long press SOS to dial the first SOS number, press twice quickly then call the contact 2, and three times quick press to dial he number of contact 3(who you added into the SOS contacts before)

Button (2)chat button

Voice chat: hold to record voice message and release to send to the receiver on app
Answer: press this button when call is incoming
Health monitor: Quickly,two times press the button into heart rate and blood pressure monitor.Three times press the button into SPO2. Four times rapid press to launch temperature monitor.

Indicator status

1. Green light: When there is a voice message, the green light flashes. After being fully charged, the green light is still on.
2. Red light: When the card is not inserted and the machine is turned on, the red light flashes and remains on all the time.
3. Traffic lights: Alternating flashing of traffic lights indicates no network connection or being connected to the Internet. After that, the light stopped flashing and the Internet connection was successful.

5.Download the APP

5.1

1:IOS just search“SeTracker”Or“SeTracker2”in app store , Android search “SeTracker”Or“SeTracker2”in Google Play Store and just download it
2: Scan the QR code below to download the APP and install directly.
3: Enter the device information option in the watch and find the QR code to scan and download.

5.2 Register and login in.

Please follow the steps in the APP to register and login in.

5.3Bind with the device.

Login in the APP and find the correct device.The correct device type is SMART WATCH.Enter the registration code to bind with device.
About the registration code:
Enter the watches QR code information page and find the registration code option,scan or manual input.
（The watch requires a card to connect to the internet in order to have a registration code）

6.Functions

Location: GPS +AGPS+ LBS + Location real time on Map.
Trace: Find the trace in APP.
Safety area: Set fence(safety area) in the device(Max 3 fences),And notify you in APP when watch wearer reach or out of the appointed area.
Contact: Setting up maximum 15 members of your friends or relative in APP.
Dial interface: Dial interface is supported.You can turn on or off this function in switch settings of APP.
SOS: 3 emergency contacts can be set. Press the SOS BUTTON(The button on some models is the power button) for 3 more seconds and it will make an emergency call to the appointed contacts in turns.If there is no one answering, it will continue to dial twice in turns and stop.
Message notification: Notify you when the device turn on or off the SOS function in SMS.(The fees of SMS are calculated according to your local carrier)
White list: Turn on this function and the watch only receives the call from the contacts.It will block all other calls.
Alarms: Set 3 alarm clocks
Micro chat: Real time chat between the device and the APP. APP can text or send 15s voice message to the device.And device can read one unread message each time and only send voice message.
Video call: Make a video call with the bind account on Mobile or other device.
Do not disturb: Set 4 periods in one time.Block all calls and keep silent mode in this appointed period.
Setting: Change UI(Some model is not adapted), Volume(Medium, Ringtone, Alarms, Power on and off), Brightness, Date and tine, Volte, Power off, About device(Model, Version, IMEI)
What is in Device Information:
1.Registration code: Scan it to register device.
2.Official account: Scan it to follow us to get more information.
3.APP download: Download the Setracker APP
Stopwatch: For time measuring
Calculator: For usual math calculating
Members: Show the account of family members who is bind with with the device.
Scenarios: 3 modes（Normal, Battery saving, Follow）, the default is Normal mode.
Love heart: You can set this in the APP.And the Love heart can be only shown on the interface of watch.
Remote shut down: Remote shutting down order to the watch when it is power on.
Remote restart: Send a remote restarting message to the watch.And restart the device.

7.Problems fixing

If the device can not connect to the server in your first time of using, and on the APP shows the device is out off line.Please check the following conditions:
1)Your SIM card is 4G and network is normal or not.
2)Data flow service is turned on and normal or not.
3)The ip and port,or the IMEI code is correct or not.The IMEI code on the device shall be same as the factory code.You can get the code by send message **pw,123456**,ts# to the watch.(The watch has a SIM card.And the message is texted **in ENGLISH**).
4)If there is still not working, please ask the seller for more details and help.
5)If you can not register, there are 2 problems usual:
1. The code of device does not exist or it has registered before, under this condition you must ask for your seller for help.
2.Account has registered before.Under this condition, you just change this account is OK.

AFTER-SALES WARRANTY CARD

Name ________ Tel ________
Add ________
Purchase a shop ________
Device IMEI ________
warranty record ________

Certificate of Conformity
This product has been inspected and qualified
Inspector: 06

Special Statement

1. The warranty regulations only apply to products sold.
2. If there are changes in technical parameters and patterns of the product, no further notice will be given.
3. The final interpretation of the product belongs to the manufacturer.

60.00 mm

80.00 mm

FCC Compliance Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.
This equipment generates, uses instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Information (SAR)

This device meets the government's requirements for exposure to radio waves.
This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the US Government.
The exposure standard for wireless device employs a unit of measurement known as the Specific Absorption Rate,or SAR.
This device should be considered in two cases, one is used in front to face. the limit of 1.6W/Kg. and the other is worn on the wrist. The limit of 4.0W/Kg.
Tests for SAR are conducted using standard operating positions accepted by the FCC with the device transmit-ting at its highest certified power level. the actual SAR level of the device while operating can be well below the maximum value.This is because the device is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna.the lower the power output. The highest SAR value for the model device as reported to the FCC when tested is head sar 0.803w/Kg and hand sar 1.478W/Kg as described in this user guide. While there may be differences between the SAR levels of various devices and at various positions, they all meet the government requirement.The FCC has granted an Equipment Authorization for this model device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this model device is on file with the FCC and can be found under the Display Grant section of www.fcc.gov/oet/ea/fccid.
For body worn operation, this device has been tested and meets the FCC RF exposure guidelines for use with an accessory that contains no metal and be positioned a minimum of 5 mm from the head and 0 mm form the hand.
Use of other accessories may not ensure compliance with FCC RF exposure guidelines.