

TEST REPORT

Applicant: FJ Dynamics Co.,Ltd

Address: Floor 21, Das Tower, No.28, 1st South Keji Road, High-tech Zone, Yuehai Subdistrict, Nanshan District, Shenzhen, China

Product Name: GNSS Receiver

FCC ID: 2A2LL-V10L

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2020
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

Report Number: 2602P06299E-RF-00E

Report Date: 2026/7/2

The above device has been tested and found compliant with the requirement of the relevant standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Alice Tan

Pedro Yun

Reviewed By: Alice Tan

Title: RF Engineer

Approved By: Pedro Yun

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baelcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL ▲	6
1.4 EQUIPMENT MODIFICATIONS	6
2. SUMMARY OF TEST RESULTS	7
3. DESCRIPTION OF TEST CONFIGURATION	8
3.1 OPERATION FREQUENCY DETAIL	8
3.2 EUT OPERATION CONDITION	9
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	11
3.4 SUPPORT CABLE LIST AND DETAILS	11
3.5 BLOCK DIAGRAM OF TEST SETUP	11
3.6 TEST FACILITY	13
3.7 MEASUREMENT UNCERTAINTY	13
4. REQUIREMENTS AND TEST PROCEDURES	14
4.1 AC LINE CONDUCTED EMISSIONS	14
4.1.1 Applicable Standard	14
4.1.2 EUT Setup	15
4.1.3 EMI Test Receiver Setup	15
4.1.4 Test Procedure	16
4.1.5 Corrected Amplitude & Margin Calculation	16
4.1.6 Test Result	16
4.2 RADIATION SPURIOUS EMISSIONS	17
4.2.1 Applicable Standard	17
4.2.2 EUT Setup	18
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	20
4.2.4 Test Procedure	20
4.2.5 Corrected Result & Margin Calculation	21
4.2.6 Test Result	21
4.3 MAXIMUM CONDUCTED OUTPUT POWER	22
4.3.1 Applicable Standard	22
4.3.2 EUT Setup	22
4.3.3 Test Procedure	22
4.3.4 Test Result	23
4.4 DUTY CYCLE	24
4.4.1 EUT Setup	24
4.4.2 Test Procedure	24
4.4.3 Judgment	24
4.5 ANTENNA REQUIREMENT	25
4.5.1 Applicable Standard	25
4.5.2 Judgment	25

5. Test DATA AND RESULTS..... 26

5.1 AC LINE CONDUCTED EMISSIONS 26

5.2 RADIATION SPURIOUS EMISSIONS 29

5.3 SPOT CHECK WITH MAXIMUM CONDUCTED OUTPUT POWER.....131

5.4 DUTY CYCLE133

EXHIBIT A - EUT PHOTOGRAPHS..... 135

EXHIBIT B - TEST SETUP PHOTOGRAPHS 136

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2602P06299E-RF-00E	Original Report	2026/7/2

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	GNSS Receiver
EUT Model:	V10L
Operation Frequency:	5150-5250MHz: 5180-5240 MHz(802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5250-5350MHz: 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5290 MHz(802.11ac vht80) 5470-5725MHz: 5500-5700 MHz (802.11a/n ht20/ac vht20) 5510-5670 MHz(802.11n ht40/ac vht40) 5530-5610MHz(802.11ac vht80) 5725-5850MHz: 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Average Conducted Output Power:	15.59dBm(5150-5250MHz)
	15.66dBm(5250-5350MHz)
	15.88dBm(5470-5725MHz)
	15.98dBm(5725-5850MHz)
Modulation Type:	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
Rated Input Voltage:	DC 9~32V, Typical: DC 12V from AC/DC Adapter; or DC 7.27V from Built-in Battery
Serial Number:	CE&RE Test:3GPB-3 RF Conducted Test:3GPB-2
EUT Received Date:	2026/2/2
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	HUIZHOU FUJIA APPLIANCE TECH CO., LTD.	FJ-GN236CN	Input: 100-240Vac 50/60Hz ,1.2A Max Output: DC 5V/3.0A,9V/3.0A,12V/3.0A,15V/2.4A, 20V/1.8A 36.0W MAX

1.3 Antenna Information Detail ▲

Antenna Type	input impedance (Ohm)	Frequency Range (MHz)	Antenna Gain (dBi)
PIFA	50	5150-5250	-1.85
		5250-5350	-1.80
		5470-5725	-0.33
		5725-5850	0.37
The design of compliance with §15.203:			
☒ Unit uses a permanently attached antenna.			
☐ Unit uses a unique coupling to the intentional radiator.			
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result	Note
FCC§15.207(a)	AC line conducted emissions	Compliant	/
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant	/
FCC§15.407(a) (e)	Emission Bandwidth	Note*	The test result please refer to report SEWA2307000102RG05 [▲] page37-55
FCC§15.407(a)	Maximum Conducted Output Power	Reporting	The test result please refer to report SEWA2307000102RG05 [▲] page58-59
FCC§15.407 (a)	Power Spectral Density	Note*	The test result please refer to report SEWA2307000102RG05 [▲] page60-67
§15.407(h)(2)	Dynamic Frequency Selection(DFS)	Note*	The test result please refer to report SEWA2307000102RG05 [▲] page68-71
FCC§15.203	Antenna Requirement	Compliant	/

Note*: The device built in a certified module, model: SC206E-GL, FCC ID: XMR2023SC206EGL, the certified module base on an original module, FCC ID: XMR2023SC200EGL, per spot check, the RF parameters are identical with the original module report, therefore, the RF conducted test items please refer to the module report: SEWA2307000102RG05[▲], which was issued by SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. on 2023/10/26. (according to KDB 996369 D02 Module Q&A v02r02, Answer 1 b))

The Bay Area Compliance Laboratories Corp.(Dongguan) is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report.

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/

For 802.11n ht40/ac vht40:

5150-5250MHz		5250-5350 MHz		5470-5725 MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/

For 802.11ac vht80:

5150-5250MHz		5250-5350 MHz		5470-5725 MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/

Note 1: The above frequencies in bold were performed the test.

Note 2: For AC line conducted emissions, the maximum output power channel was tested.

Note 3: For Radiated Spurious Emissions 9kHz~1GHz and 18~40GHz, the maximum output power channel was tested.

3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The EUT configuration is below:

EUT Exercise Software:		QRCT		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	default
	Middle	5220	6Mbps	default
	Highest	5240	6Mbps	default
802.11n ht20	Lowest	5180	MCS0	default
	Middle	5220	MCS0	default
	Highest	5240	MCS0	default
802.11n ht40	Lowest	5190	MCS0	default
	Highest	5230	MCS0	default
802.11ac vht20	Lowest	5180	MCS0	default
	Middle	5220	MCS0	default
	Highest	5240	MCS0	default
802.11ac vht40	Lowest	5190	MCS0	default
	Highest	5230	MCS0	default
802.11ac vht80	Middle	5210	MCS0	default
5250-5350 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5260	6Mbps	default
	Middle	5300	6Mbps	default
	Highest	5320	6Mbps	default
802.11n ht20	Lowest	5260	MCS0	default
	Middle	5300	MCS0	default
	Highest	5320	MCS0	default
802.11n ht40	Lowest	5270	MCS0	default
	Highest	5310	MCS0	default
802.11ac vht20	Lowest	5260	MCS0	default
	Middle	5300	MCS0	default
	Highest	5320	MCS0	default
802.11ac vht40	Lowest	5270	MCS0	default
	Highest	5310	MCS0	default
802.11ac vht80	Middle	5290	MCS0	default

5470-5725 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5500	6Mbps	default
	Middle	5580	6Mbps	default
	Highest	5700	6Mbps	default
802.11n ht20	Lowest	5500	MCS0	default
	Middle	5580	MCS0	default
	Highest	5700	MCS0	default
802.11n ht40	Lowest	5510	MCS0	default
	Middle	5550	MCS0	default
	Highest	5670	MCS0	default
802.11ac vht20	Lowest	5500	MCS0	default
	Middle	5580	MCS0	default
	Highest	5700	MCS0	default
802.11ac vht40	Lowest	5510	MCS0	default
	Middle	5550	MCS0	default
	Highest	5670	MCS0	default
802.11ac vht80	Lowest	5530	MCS0	default
	Highest	5610	MCS0	default
5725-5850 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	default
	Middle	5785	6Mbps	default
	Highest	5825	6Mbps	default
802.11n ht20	Lowest	5745	MCS0	default
	Middle	5785	MCS0	default
	Highest	5825	MCS0	default
802.11n ht40	Lowest	5755	MCS0	default
	Highest	5795	MCS0	default
802.11ac vht20	Lowest	5745	MCS0	default
	Middle	5785	MCS0	default
	Highest	5825	MCS0	default
802.11ac vht40	Lowest	5755	MCS0	default
	Highest	5795	MCS0	default
802.11ac vht80	Middle	5775	MCS0	default

Note: The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

3.4 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	no	no	1.5	Adapter	EUT

3.5 Block Diagram of Test Setup


AC line conducted emissions:

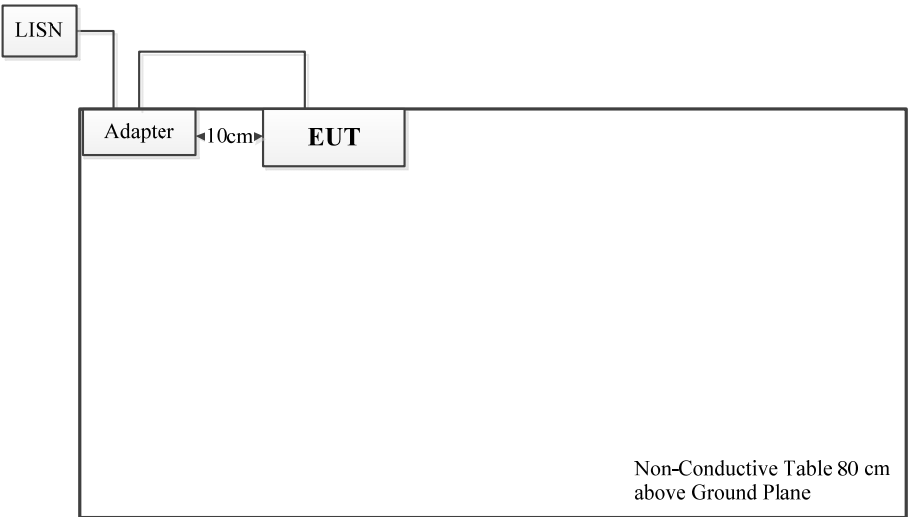

Spurious Emissions:
Below 1GHz:

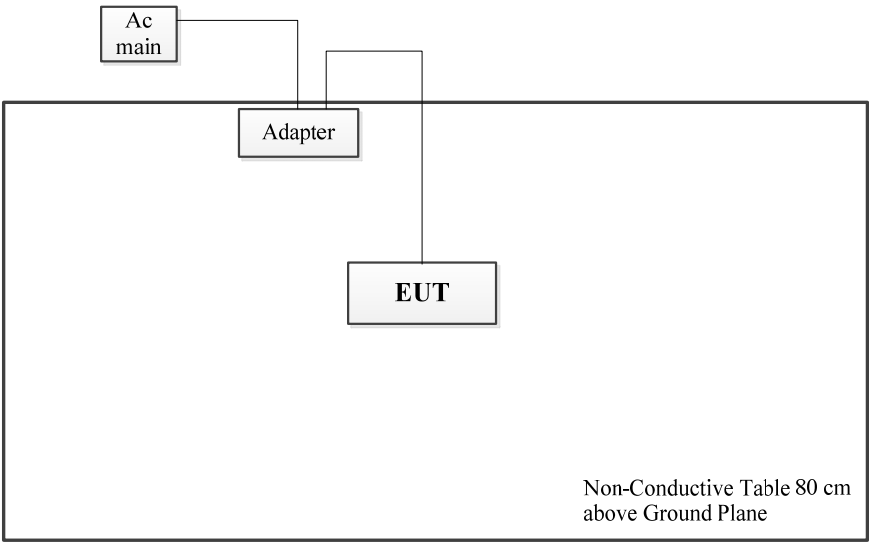

Above 1GHz:

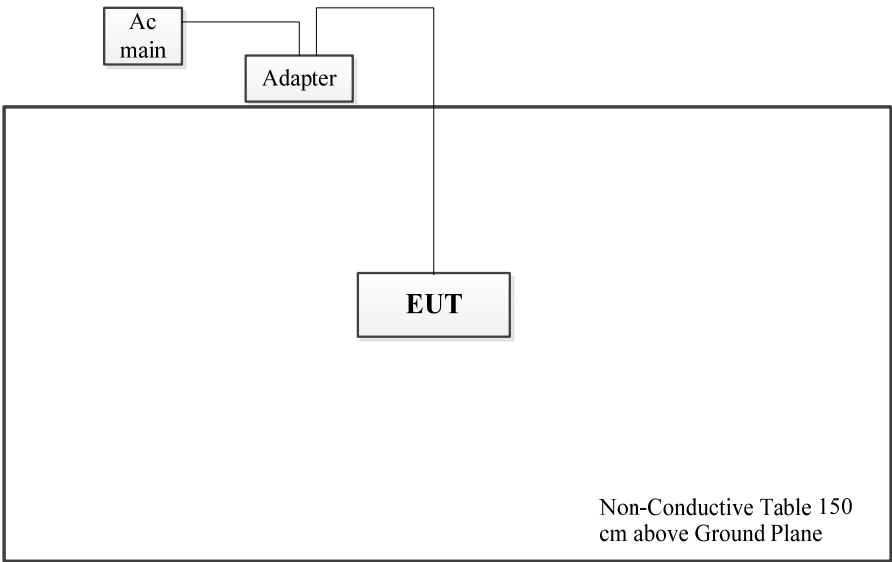

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.55 dB
Power Spectral Density, conducted	±0.55 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.06dB, 30MHz~1GHz: 6.13 dB, 1GHz~6GHz: 4.79 dB, 6GHz~18GHz: 4.63 dB, 18GHz~26.5GHz: 4.79 dB, 26.5GHz~40GHz: 4.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.83 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

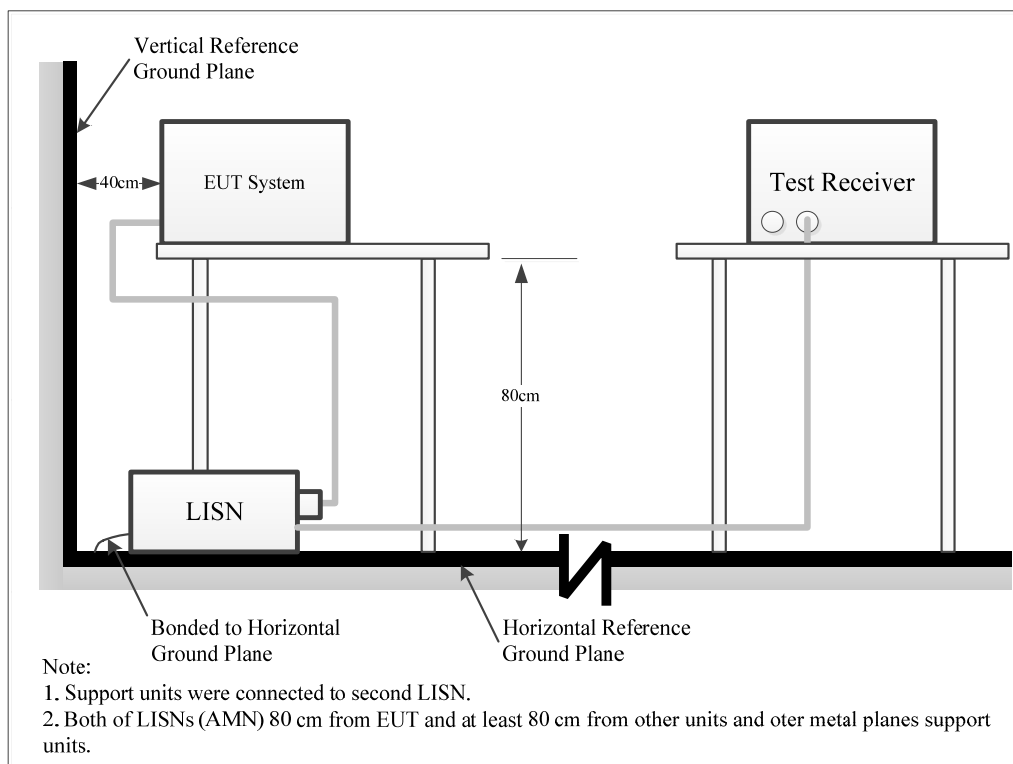

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.


(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

4.2.2 EUT Setup


9kHz~30MHz:

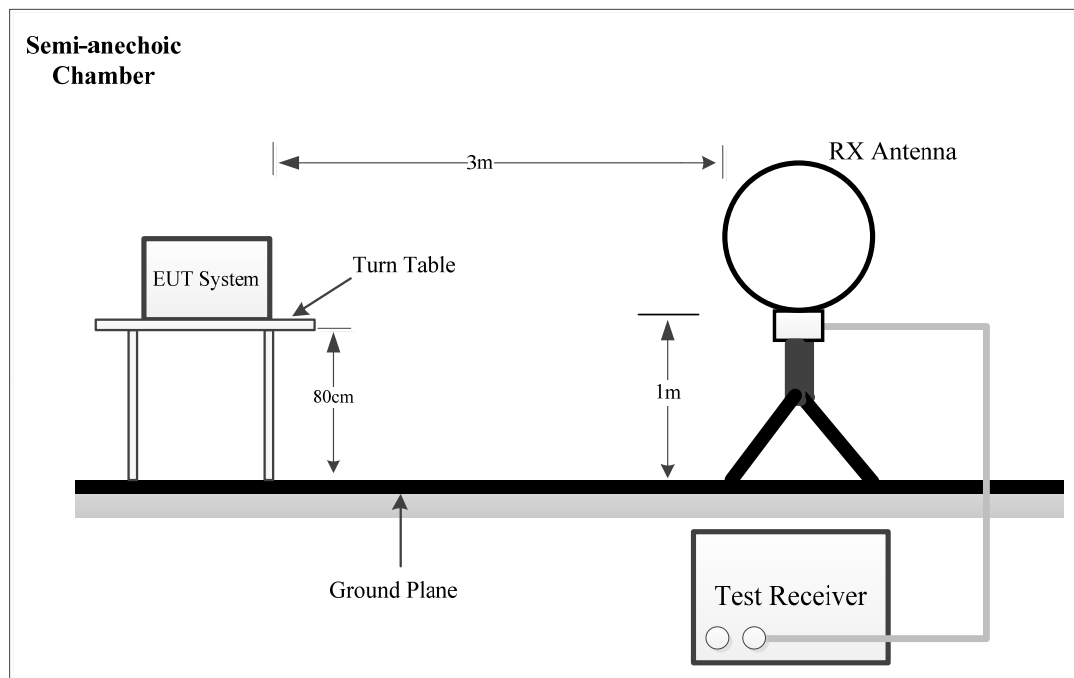


30MHz~1GHz:

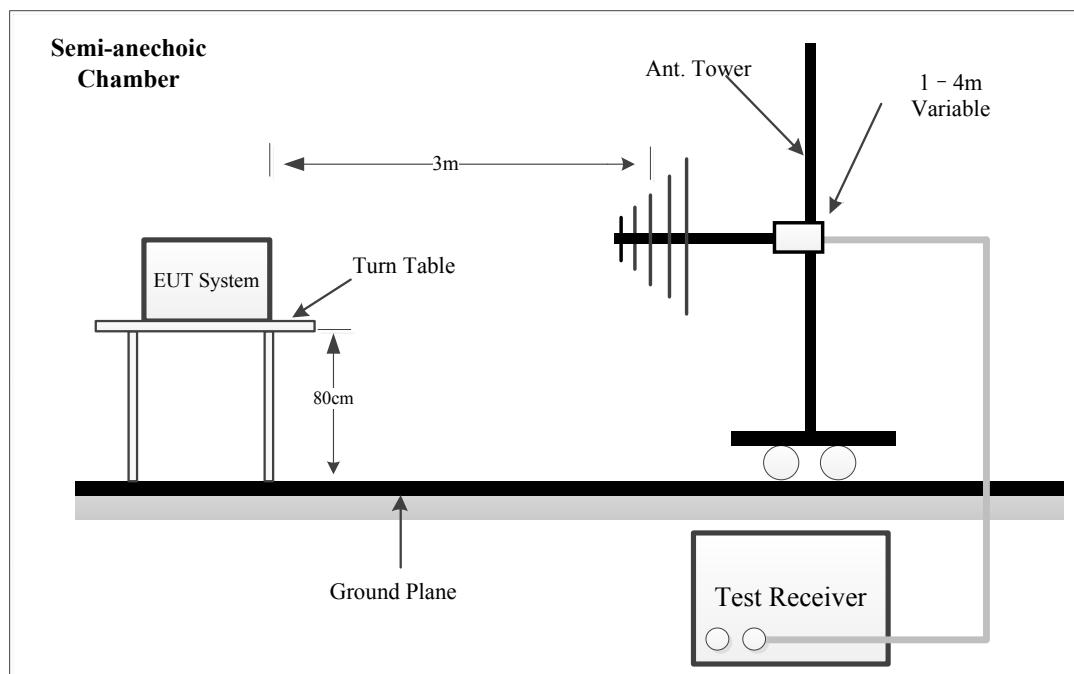

1-18GHz:

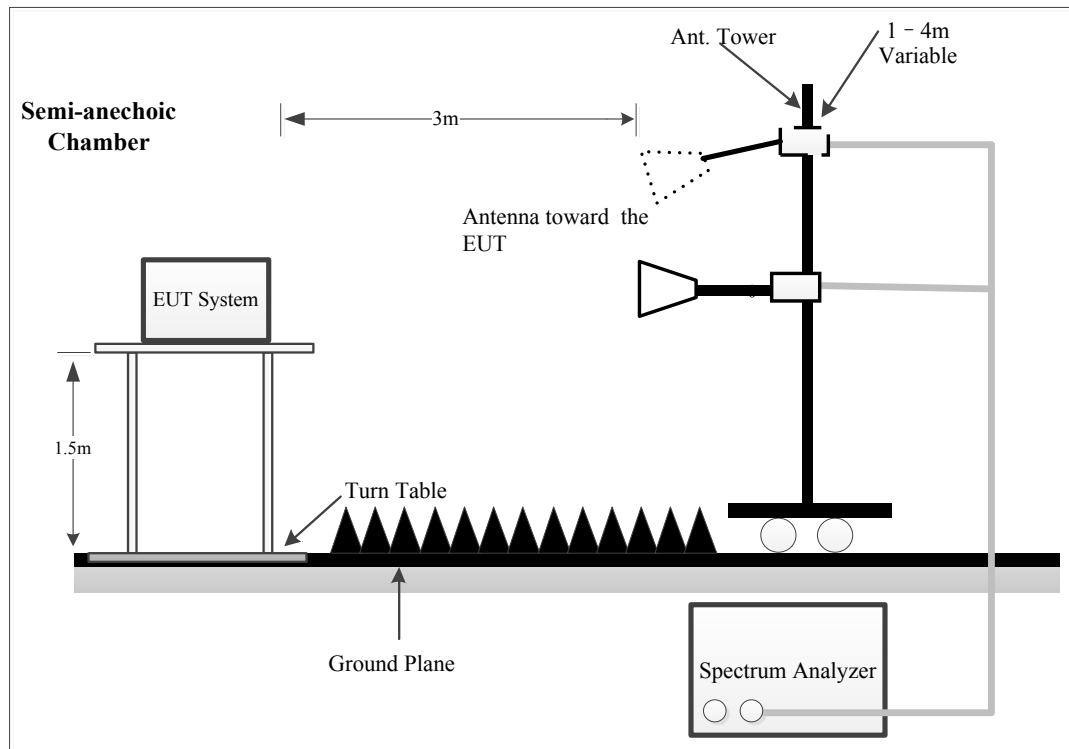

18-40GHz:

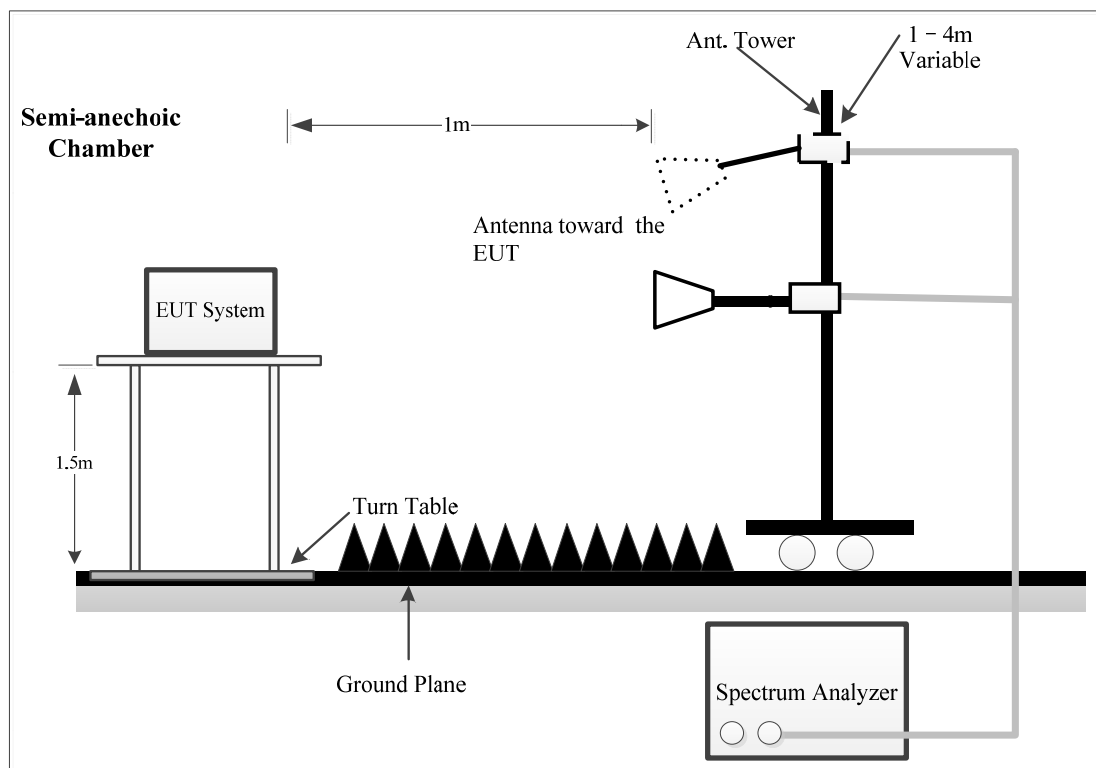

The radiated emission tests were performed in the semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2020. The specification used was FCC 15.209, FCC 15.407 limits.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	200 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	120 kHz	500 kHz	/	PK
	QP	/	/	120kHz	QP

1GHz- 40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	PK	Any	1MHz	3 MHz
Ave.	PK	>98%	1MHz	10 Hz
		<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

4.2.4 Test Procedure

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

For Radiated 18-40GHz test, which was performed at 1.0 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.0m
Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.0m])$ dB = 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

4.2.5 Corrected Result & Margin Calculation

$$E_{Log} = 20 \times \log_{10}(E_{Linear})$$

E_{Linear} is the field strength of the emission, in $\mu\text{V/m}$

E_{Log} is the field strength of the emission, in $\text{dB}\mu\text{V/m}$

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10} (d_{\text{standard}}/d_{\text{measure}})$$

The basic equation except 18-40GHz test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For Radiated 18-40GHz test:

Factor = Antenna Factor + Cable Loss- Distance extrapolation Factor- Amplifier Gain

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.

4.3 Maximum Conducted Output Power

4.3.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.3.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.3.3 Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control

level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.3.4 Test Result

Please refer to section 5.3.

4.4 Duty Cycle

4.4.1 EUT Setup



4.4.2 Test Procedure

According to ANSI C63.10-2020 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.4.3 Judgment

Report Only. Please refer to section 5.4.

4.5 Antenna Requirement

4.5.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.5.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	3GPB-3	Test Date:	2026/02/25
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yolo Fan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	56	ATM Pressure: (kPa)	100.8
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2025/6/25	2026/6/24
Unknown	Coaxial Cable	RG 142	C-0200-05	2025/5/6	2026/5/5
Audix	Test Software	E3	191218 V9	N/A	N/A
R&S	EMI Test Receiver	ESCI	100224	2025/6/25	2026/6/24


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note:802.11a 5745MHz was tested.

Project No.: 2602P06299E-RF
 Port: Line
 Test Mode: Transmitting
 IF B/W 9kHz PK/AV


Serial No.: 3GPB-3
 Tester: Yolo Fan
 Note: Part 15.407_5G WIFI

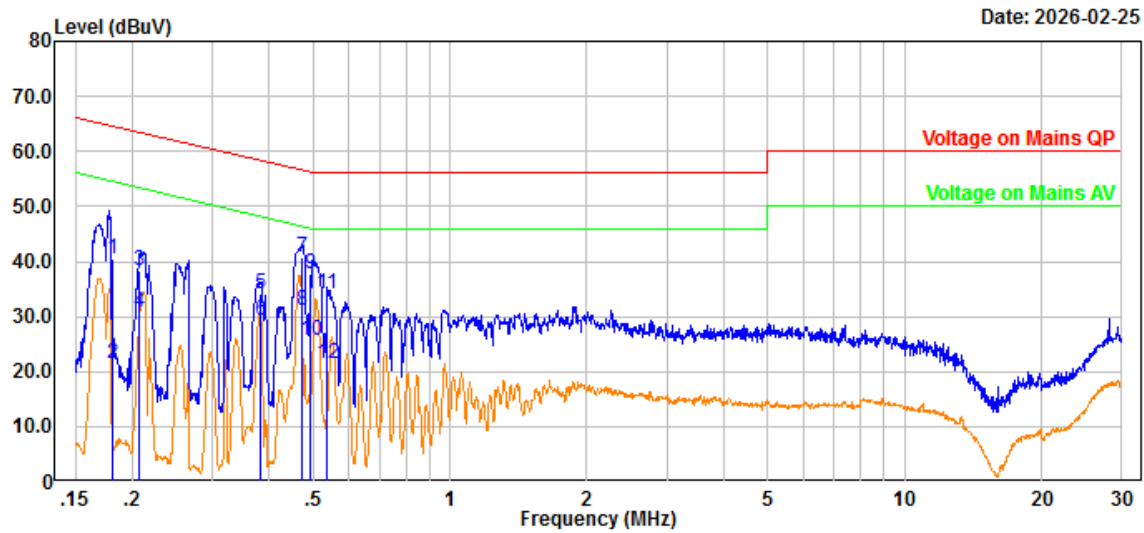

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.182	29.40	10.95	40.35	64.41	24.06	QP
2	0.182	10.50	10.95	21.45	54.41	32.96	Average
3	0.208	27.52	10.79	38.31	63.28	24.97	QP
4	0.208	20.07	10.79	30.86	53.28	22.42	Average
5	0.383	23.47	10.69	34.16	58.21	24.05	QP
6	0.383	18.71	10.69	29.40	48.21	18.81	Average
7	0.474	30.26	10.63	40.89	56.45	15.56	QP
8	0.474	20.32	10.63	30.95	46.45	15.50	Average
9	0.493	27.22	10.61	37.83	56.11	18.28	QP
10	0.493	15.04	10.61	25.65	46.11	20.46	Average
11	0.535	23.62	10.57	34.19	56.00	21.81	QP
12	0.535	10.76	10.57	21.33	46.00	24.67	Average

Project No.: 2602P06299E-RF
 Port: neutral
 Test Mode: Transmitting
 IF B/W 9kHz PK/AV

Serial No.: 3GPB-3
 Tester: Yolo Fan
 Note: Part 15.407_5G WIFI

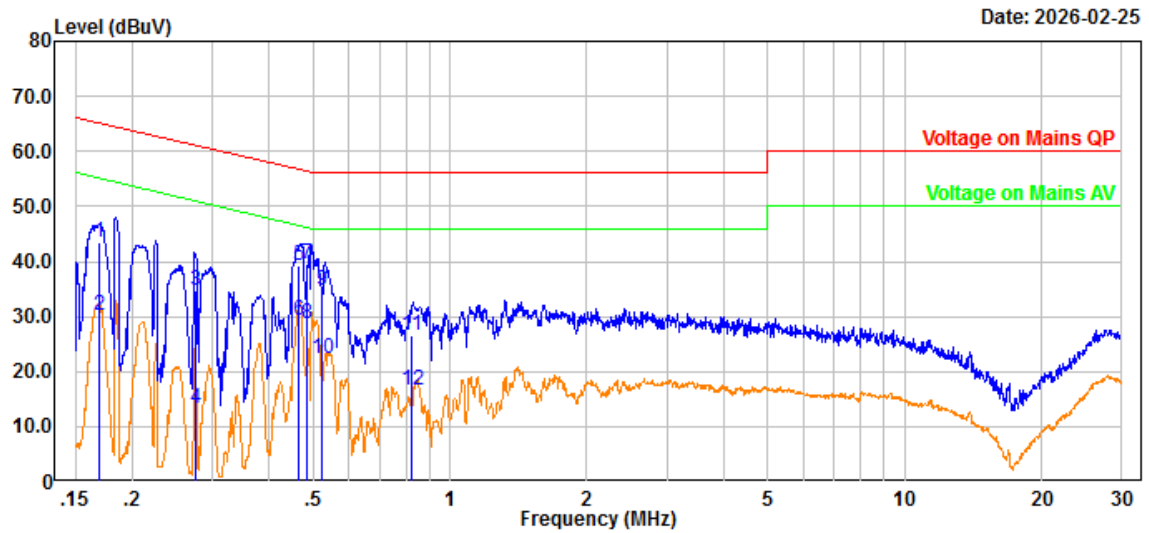

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.170	32.74	10.78	43.52	64.98	21.46	QP
2	0.170	19.48	10.78	30.26	54.98	24.72	Average
3	0.277	23.97	10.80	34.77	60.91	26.14	QP
4	0.277	2.45	10.80	13.25	50.91	37.66	Average
5	0.464	28.61	10.56	39.17	56.63	17.46	QP
6	0.464	18.86	10.56	29.42	46.63	17.21	Average
7	0.484	28.87	10.53	39.40	56.27	16.87	QP
8	0.484	18.16	10.53	28.69	46.27	17.58	Average
9	0.522	24.15	10.50	34.65	56.00	21.35	QP
10	0.522	11.92	10.50	22.42	46.00	23.58	Average
11	0.821	15.85	10.61	26.46	56.00	29.54	QP
12	0.821	5.95	10.61	16.56	46.00	29.44	Average

5.2 Radiation Spurious Emissions

1) 9kHz - 1GHz

Serial Number:	3GPB-3	Test Date:	2026/2/14
Test Site:	Chamber10m	Test Mode:	Transmitting
Tester:	Mikey Lin	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21	Relative Humidity: (%)	47	ATM Pressure: (kPa)	101.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GLOBAL	Active Loop Antenna	1313-1A	4060411	2025/6/26	2028/6/25
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2025/7/1	2026/6/30
Sonoma	Amplifier	310N	185914	2025/8/25	2026/8/24
R&S	EMI Test Receiver	ESR3	102453	2025/6/25	2026/6/24
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below plots.


9kHz~30MHz

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

5150-5250MHz(802.11a 5180MHz):

Project No.: 2602P06299E-RF
Polarization: Parallel
Test Mode: Transmitting 5G WIFI
Note: 5150-5250
: RBW:200Hz VBW:1kHz


Serial No.: 3GPB-3
Tester: Mikey Lin

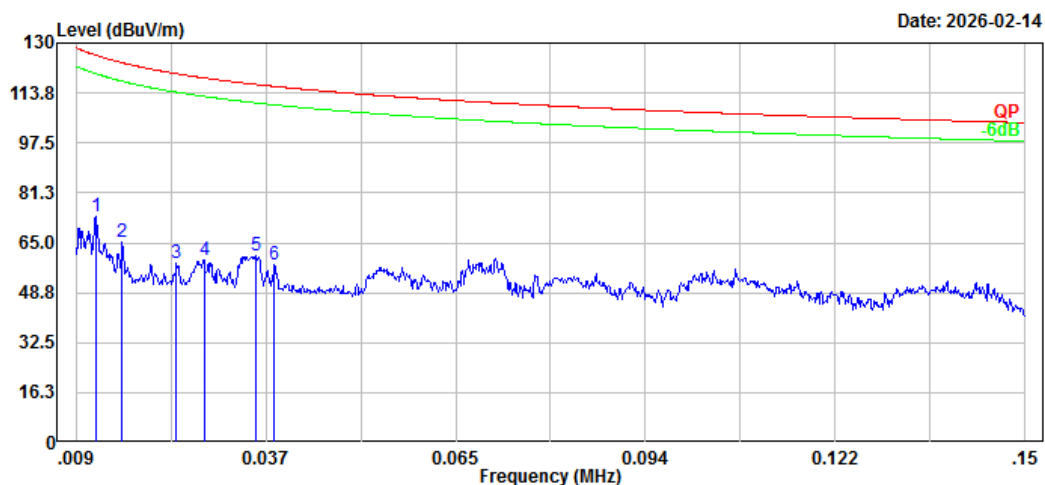

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.012	68.66	4.94	73.60	126.05	52.45	Peak
2	0.016	60.94	4.17	65.11	123.57	58.46	Peak
3	0.024	55.34	2.86	58.20	120.02	61.82	Peak
4	0.028	57.10	2.31	59.41	118.65	59.24	Peak
5	0.036	59.44	1.17	60.61	116.56	55.95	Peak
6	0.038	57.23	0.74	57.97	115.90	57.93	Peak

Project No.: 2602P06299E-RF
Polarization: Parallel
Test Mode: Transmitting 5G WIFI
Note: 5150-5250
: RBW:9kHz VBW:30kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

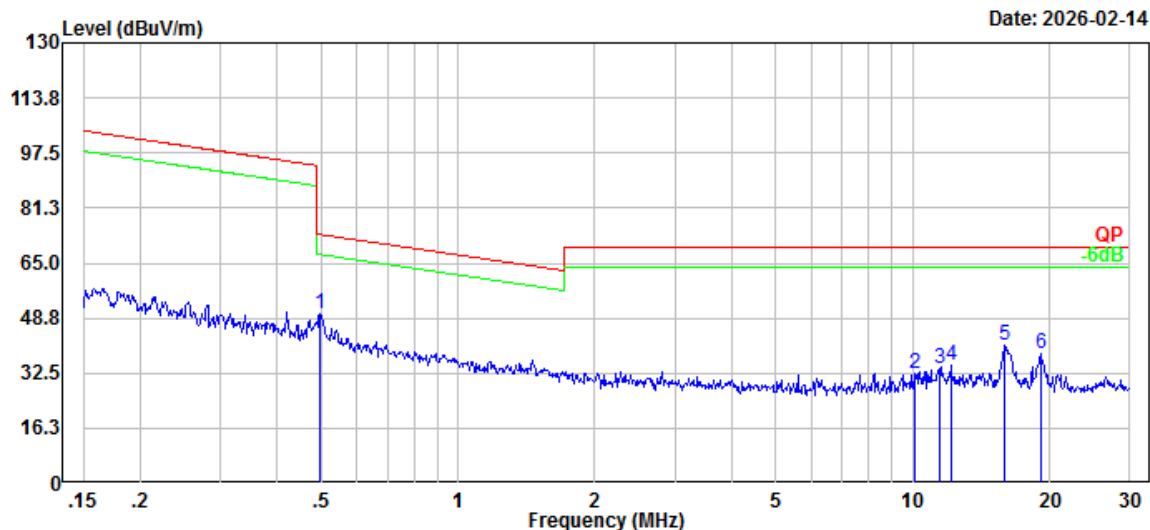


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.497	70.66	-20.51	50.15	73.68	23.53	Peak
2	10.072	62.64	-30.07	32.57	69.54	36.97	Peak
3	11.438	64.05	-30.08	33.97	69.54	35.57	Peak
4	12.124	65.12	-30.17	34.95	69.54	34.59	Peak
5	15.885	71.09	-30.30	40.79	69.54	28.75	Peak
6	19.224	68.50	-30.42	38.08	69.54	31.46	Peak

5250-5350MHz(802.11a 5260MHz):

Project No.: 2602P06299E-RF
Polarization: Parallel
Test Mode: Transmitting 5G WIFI
Note: 5250-5350
: RBW:200Hz VBW:1kHz


Serial No.: 3GPB-3
Tester: Mikey Lin

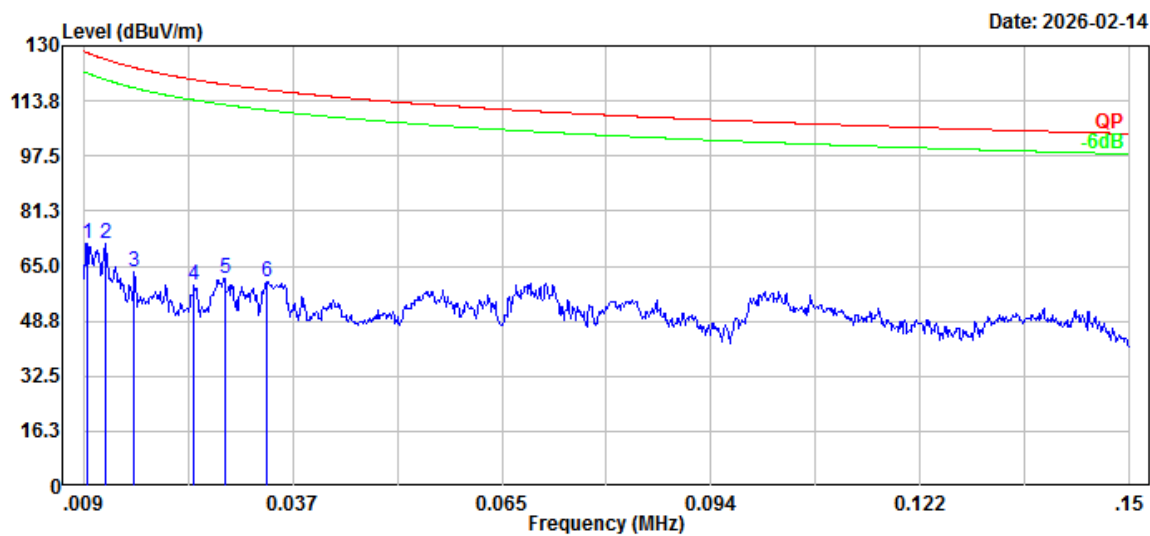

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.010	66.62	5.19	71.81	127.99	56.18	Peak
2	0.012	66.49	4.91	71.40	125.95	54.55	Peak
3	0.016	58.94	4.17	63.11	123.57	60.46	Peak
4	0.024	56.34	2.86	59.20	120.02	60.82	Peak
5	0.028	59.10	2.31	61.41	118.65	57.24	Peak
6	0.034	58.83	1.48	60.31	117.06	56.75	Peak

Project No.: 2602P06299E-RF
Polarization: Parallel
Test Mode: Transmitting 5G WIFI
Note: 5250-5350
: RBW:9kHz VBW:30kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

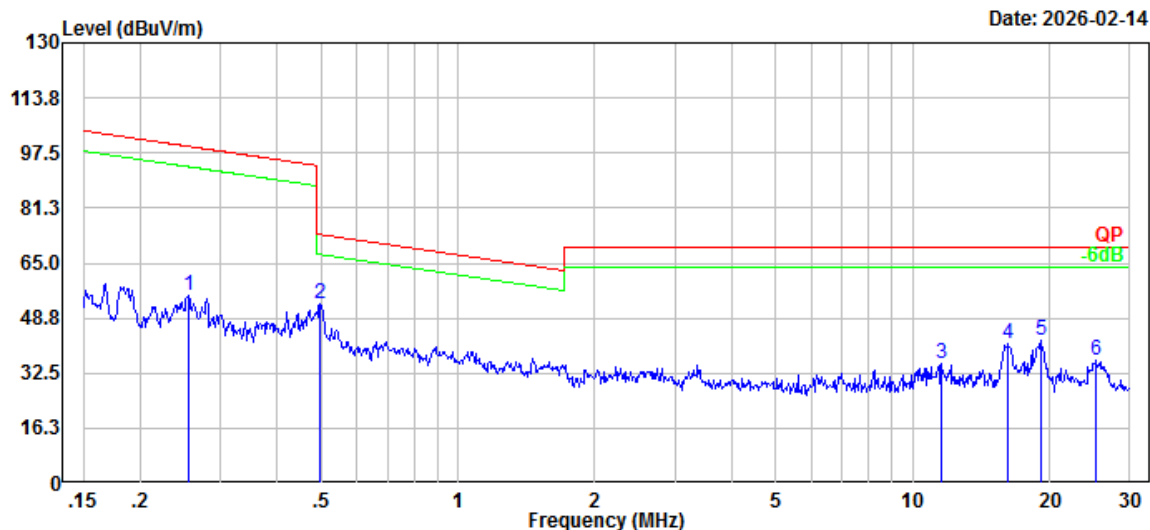


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.256	69.77	-14.22	55.55	99.43	43.88	Peak
2	0.497	73.66	-20.51	53.15	73.68	20.53	Peak
3	11.559	65.42	-30.10	35.32	69.54	34.22	Peak
4	16.226	71.53	-30.31	41.22	69.54	28.32	Peak
5	19.224	72.50	-30.42	42.08	69.54	27.46	Peak
6	25.321	66.94	-30.68	36.26	69.54	33.28	Peak

5470-5725MHz(802.11a 5700MHz):

Project No.: 2602P06299E-RF
Polarization: Parallel
Test Mode: Transmitting 5G WIFI
Note: 5470-5725
: RBW:200Hz VBW:1kHz


Serial No.: 3GPB-3
Tester: Mikey Lin

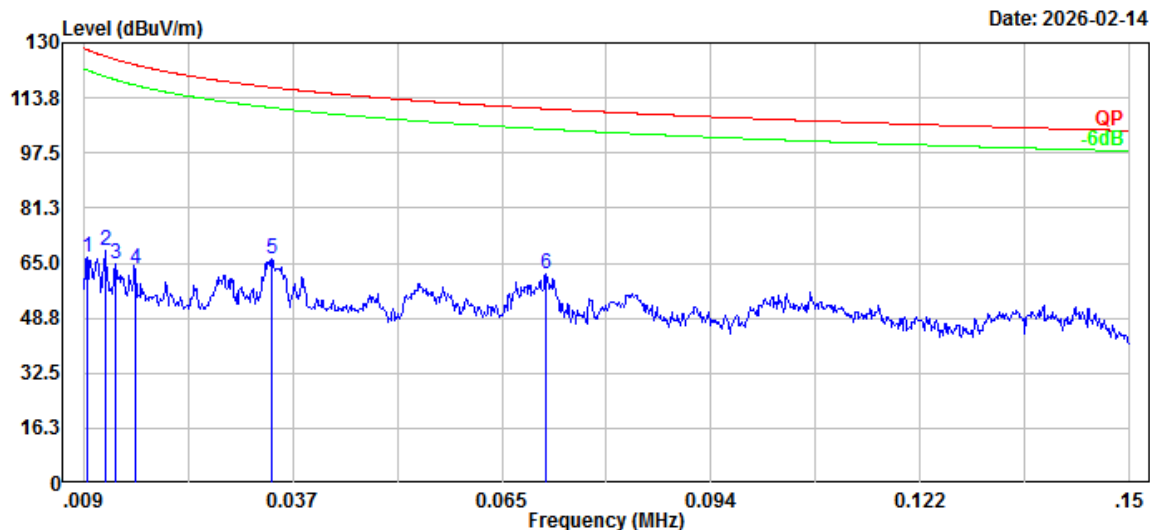

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.010	61.62	5.19	66.81	127.99	61.18	Peak
2	0.012	63.66	4.94	68.60	126.05	57.45	Peak
3	0.013	60.03	4.67	64.70	125.08	60.38	Peak
4	0.016	59.34	4.14	63.48	123.50	60.02	Peak
5	0.034	65.02	1.37	66.39	116.88	50.49	Peak
6	0.071	64.85	-2.99	61.86	110.54	48.68	Peak

Project No.: 2602P06299E-RF
Polarization: Parallel
Test Mode: Transmitting 5G WIFI
Note: 5470-5725
: RBW:9kHz VBW:30kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

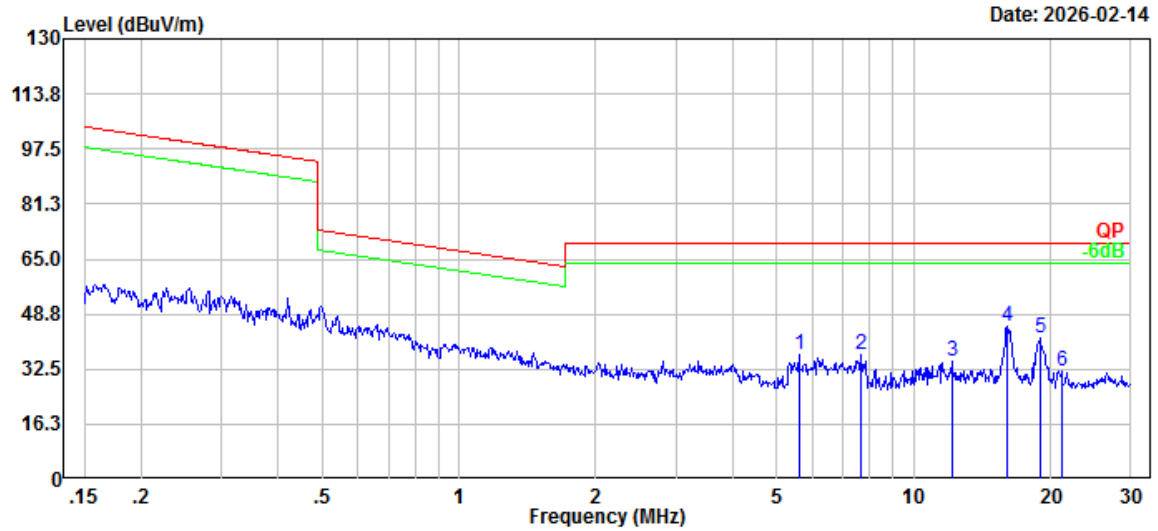


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	5.594	67.44	-30.64	36.80	69.54	32.74	Peak
2	7.646	67.68	-30.99	36.69	69.54	32.85	Peak
3	12.124	65.12	-30.17	34.95	69.54	34.59	Peak
4	16.055	75.56	-30.31	45.25	69.54	24.29	Peak
5	18.920	72.08	-30.40	41.68	69.54	27.86	Peak
6	21.147	62.61	-30.54	32.07	69.54	37.47	Peak

5725-5850MHz(802.11a 5745MHz):

Project No.: 2602P06299E-RF
Polarization: Parallel
Test Mode: Transmitting 5G WIFI
Note: 5725-5850
: RBW:200Hz VBW:1kHz


Serial No.: 3GPB-3
Tester: Mikey Lin

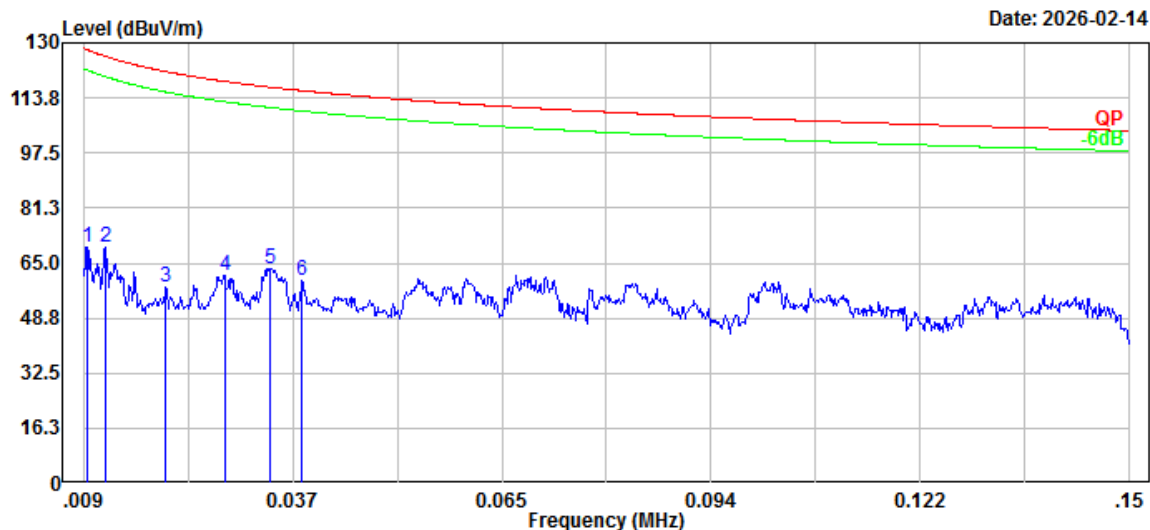

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.010	64.62	5.19	69.81	127.99	58.18	Peak
2	0.012	64.66	4.94	69.60	126.05	56.45	Peak
3	0.020	54.75	3.37	58.12	121.52	63.40	Peak
4	0.028	59.10	2.31	61.41	118.65	57.24	Peak
5	0.034	62.01	1.39	63.40	116.91	53.51	Peak
6	0.038	59.23	0.74	59.97	115.90	55.93	Peak

Project No.: 2602P06299E-RF
Polarization: Parallel
Test Mode: Transmitting 5G WIFI
Note: 5725-5850
: RBW:9kHz VBW:30kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

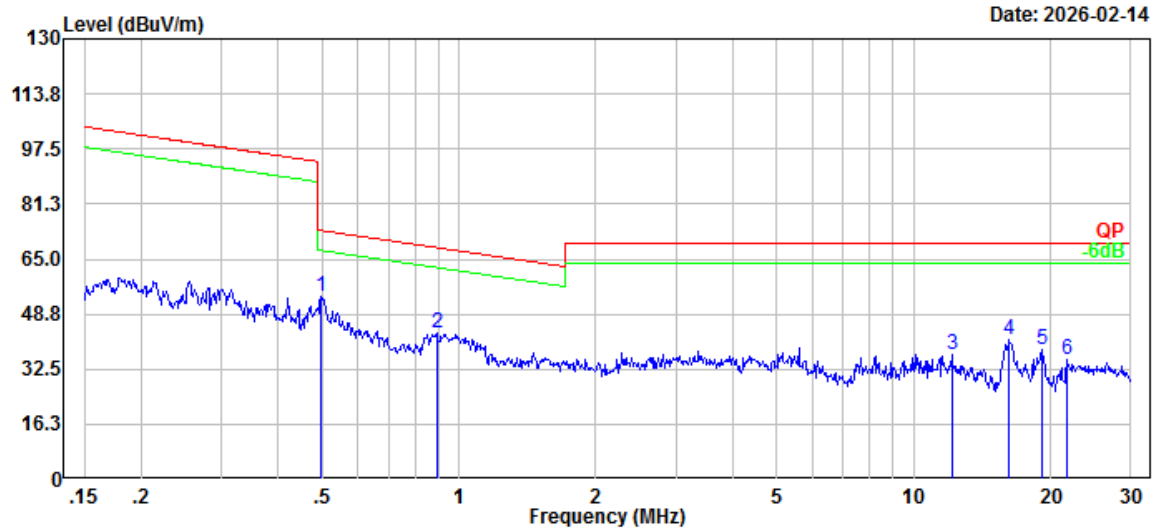

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.497	74.66	-20.51	54.15	73.68	19.53	Peak
2	0.894	68.39	-25.30	43.09	68.46	25.37	Peak
3	12.124	67.12	-30.17	36.95	69.54	32.59	Peak
4	16.226	71.53	-30.31	41.22	69.54	28.32	Peak
5	19.224	68.50	-30.42	38.08	69.54	31.46	Peak
6	21.715	65.79	-30.54	35.25	69.54	34.29	Peak

30MHz-1GHz

5150-5250MHz(802.11a 5180MHz):

Project No.: 2602P06299E-RF

Serial No.: 3GPB-3


Polarization: Horizontal

Tester: Mikey Lin

Test Mode: Transmitting 5G WIFI


Note: 5150-5250

: RBW:120kHz VBW:500kHz

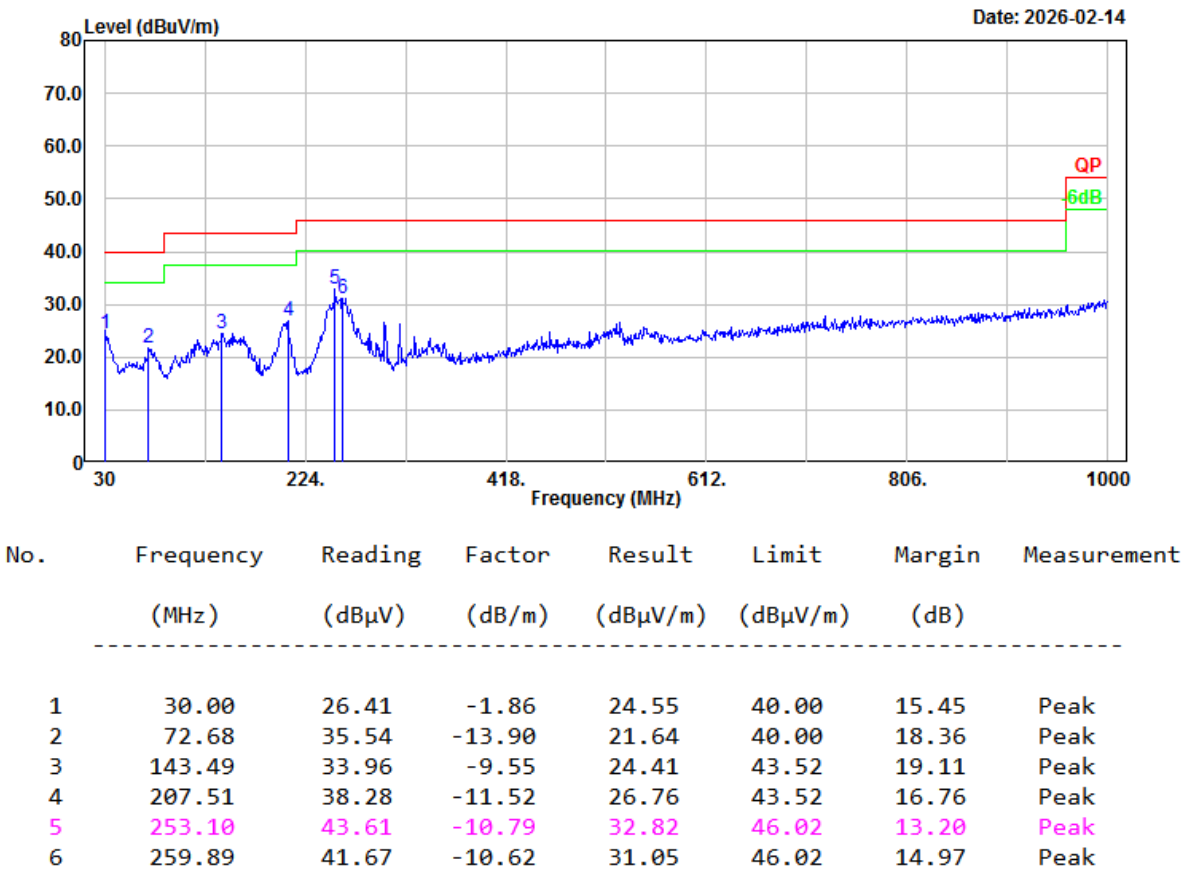

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting 5G WIFI
Note: 5150-5250
: RBW:120kHz VBW:500kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

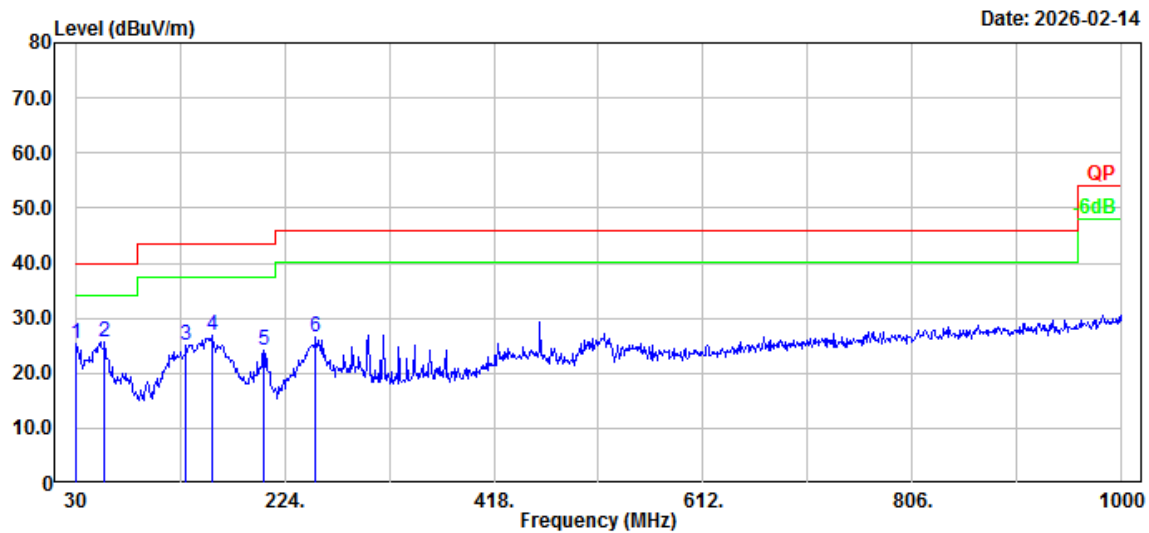


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	30.00	27.28	-1.86	25.42	40.00	14.58	Peak
2	57.16	39.61	-13.91	25.70	40.00	14.30	Peak
3	132.82	33.71	-8.51	25.20	43.52	18.32	Peak
4	157.07	36.50	-9.71	26.79	43.52	16.73	Peak
5	204.60	35.11	-11.08	24.03	43.52	19.49	Peak
6	253.10	37.29	-10.79	26.50	46.02	19.52	Peak

5250-5350MHz(802.11a 5260MHz):


Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting 5G WIFI
Note: 5250-5350
: RBW:120kHz VBW:500kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

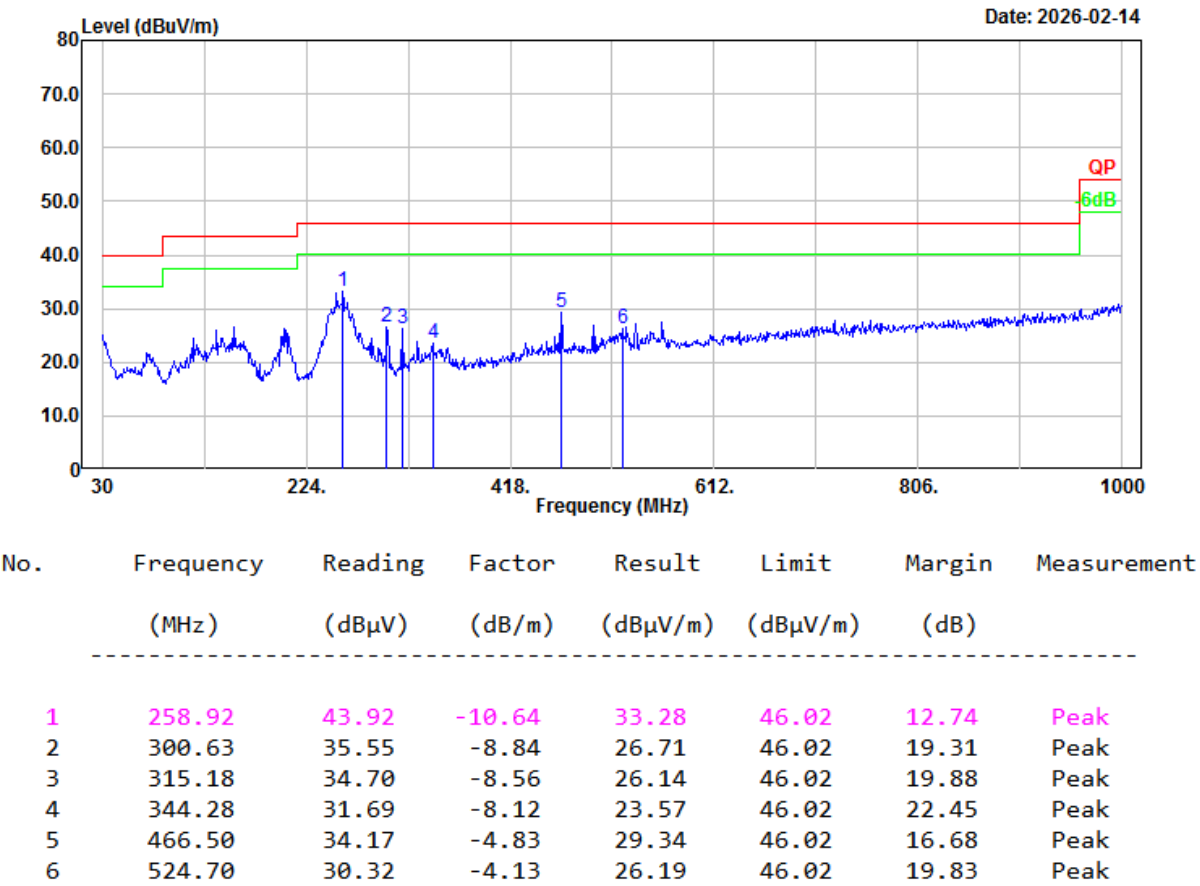

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting 5G WIFI
Note: 5250-5350
: RBW:120kHz VBW:500kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

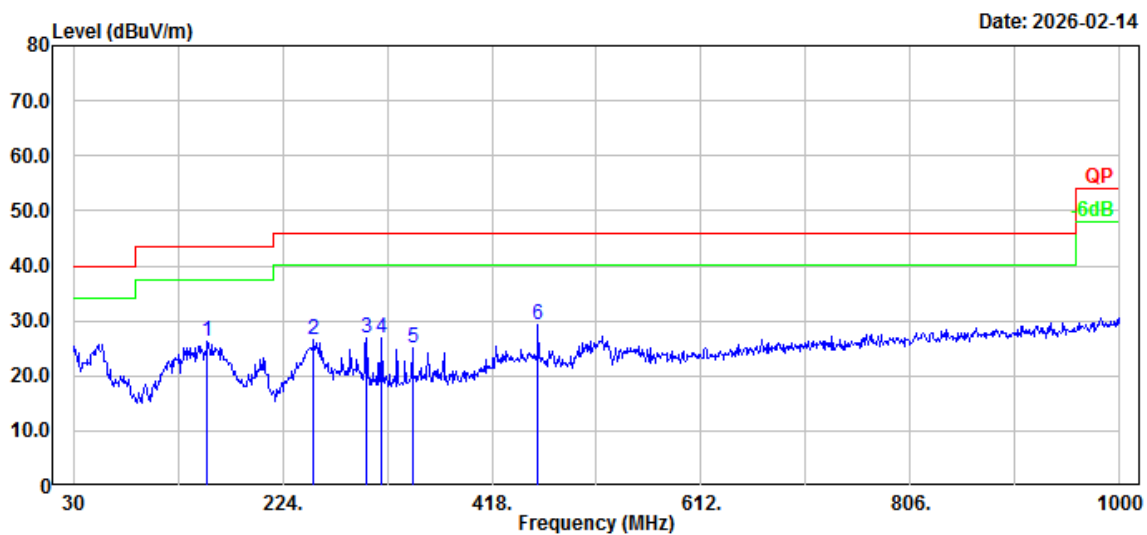


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	154.16	36.02	-9.82	26.20	43.52	17.32	Peak
2	253.10	37.29	-10.79	26.50	46.02	19.52	Peak
3	301.60	35.69	-8.81	26.88	46.02	19.14	Peak
4	316.15	35.35	-8.53	26.82	46.02	19.20	Peak
5	344.28	33.31	-8.12	25.19	46.02	20.83	Peak
6	460.68	34.24	-4.90	29.34	46.02	16.68	Peak

5470-5725MHz(802.11a 5700MHz):


Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting 5G WIFI
Note: 5470-5725
: RBW:120kHz VBW:500kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

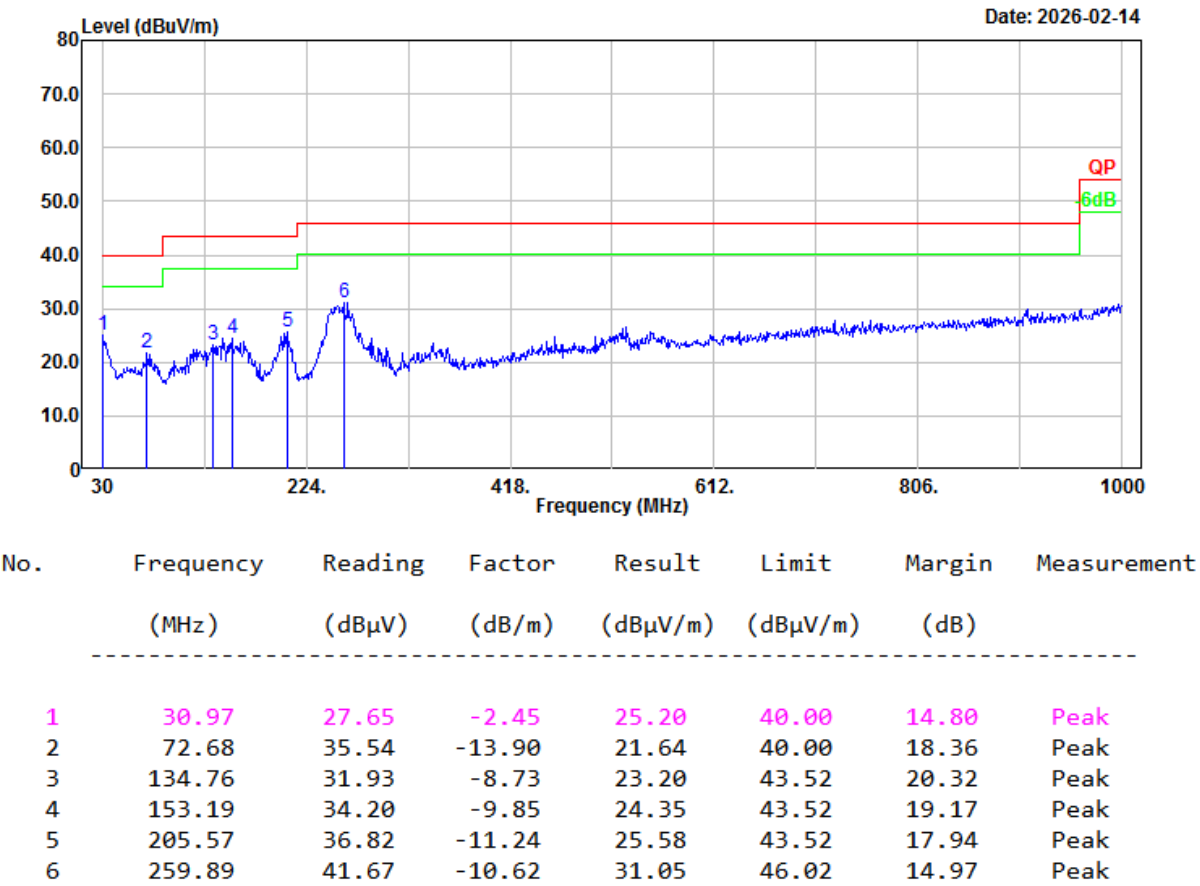

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting 5G WIFI
Note: 5470-5725
: RBW:120kHz VBW:500kHz


Serial No.: 3GPB-3
Tester: Mikey Lin

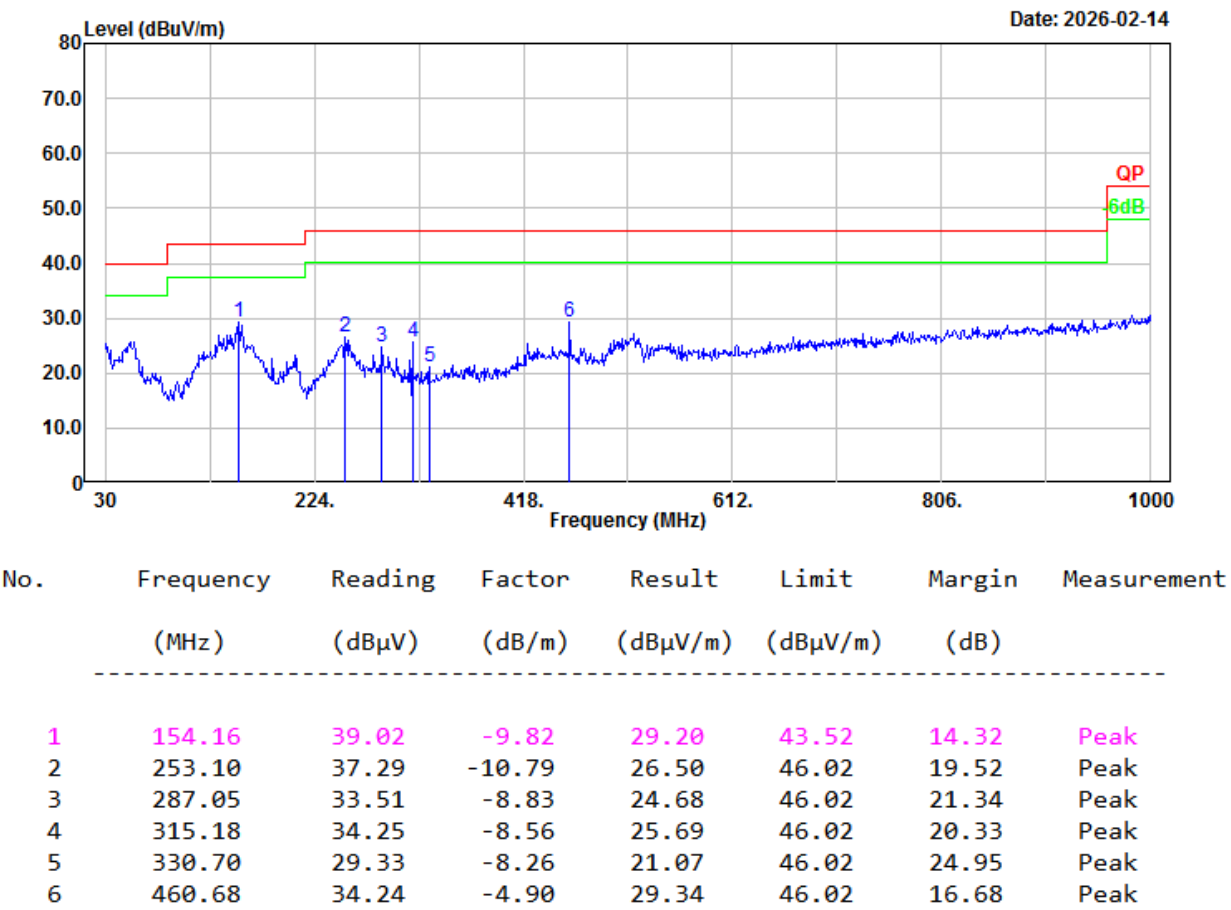

5725-5850MHz(802.11a 5745MHz):


Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting 5G WIFI
Note: 5725-5850
: RBW:120kHz VBW:500kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

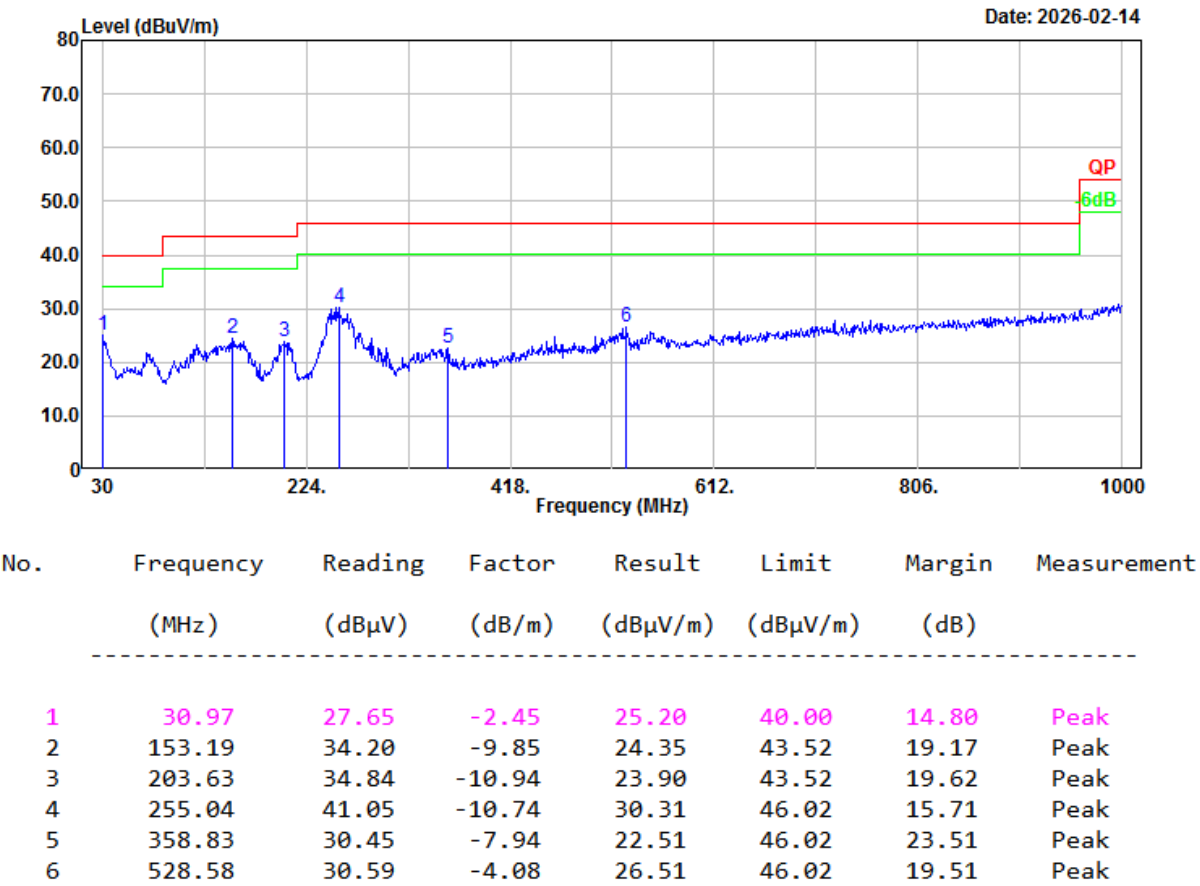

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting 5G WIFI
Note: 5725-5850
: RBW:120kHz VBW:500kHz

Serial No.: 3GPB-3
Tester: Mikey Lin

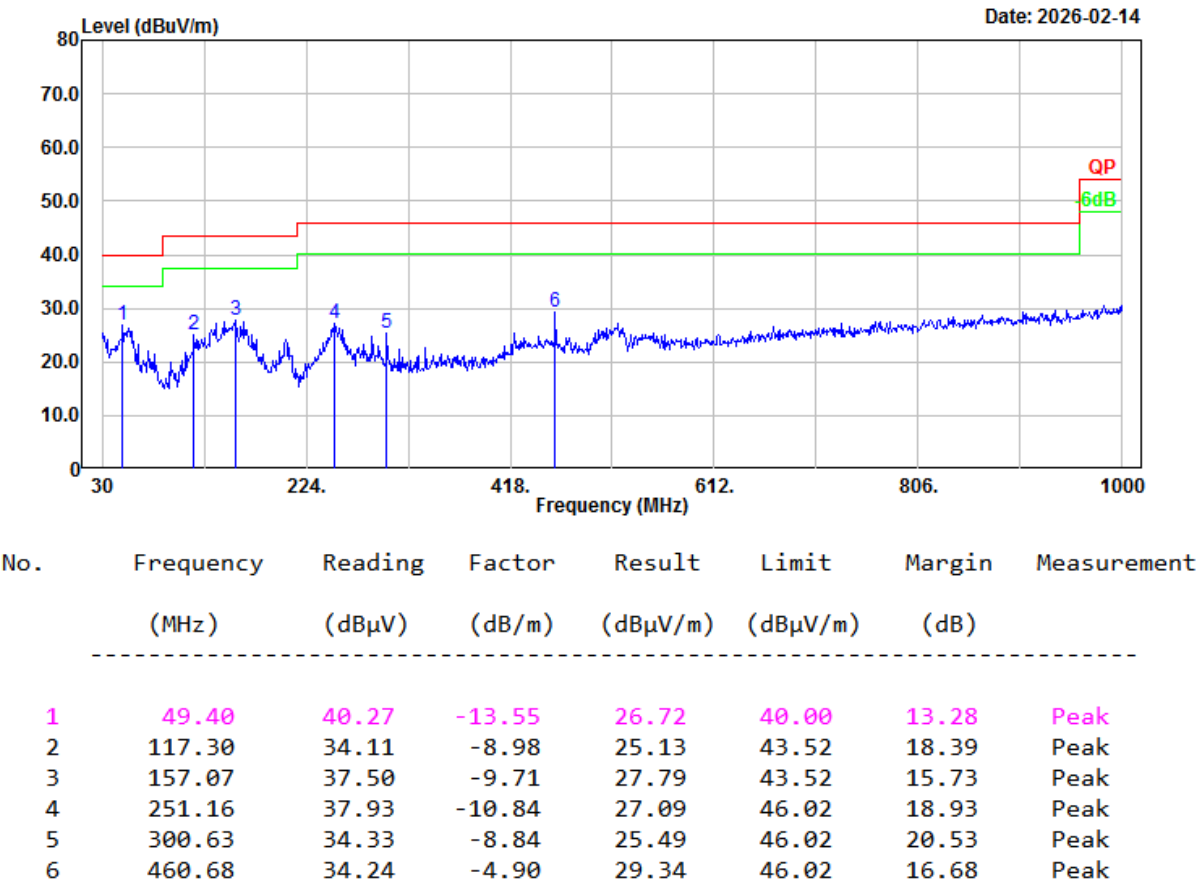

2) 1-40GHz:

Serial Number:	3GPB-3	Test Date:	2026/2/24~2026/2/25
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Willem Qiu, Alan Xie, Leo Xiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2-24.4	Relative Humidity: (%)	52-54	ATM Pressure: (kPa)	100.8
----------------------	-----------	---------------------------	-------	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2026/2/21	2029/2/20
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2026/2/6	2029/2/5
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2025/11/17	2026/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2025/11/14	2026/11/13
AH	Preamplifier	PAM-0118P	469	2025/4/11	2026/4/10
AH	Preamplifier	PAM-1840VH	191	2025/9/4	2026/9/3
R&S	Spectrum Analyzer	FSV40	101944	2025/8/8	2026/8/7
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2025/8/25	2026/8/24


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:




Please refer to the below plots.

1-18GHz:
5150-5250MHz:

802.11a, Low Channel, 5180MHz, Horizontal

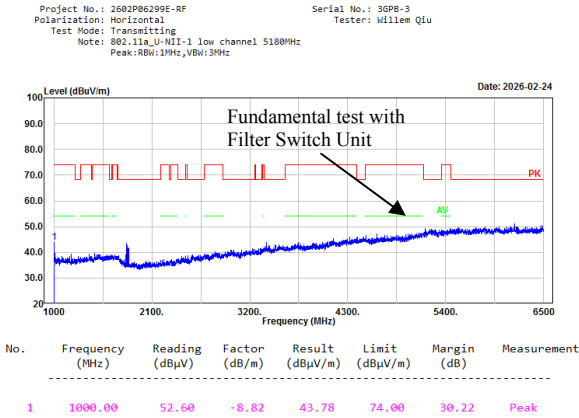


802.11a, Low Channel, 5180MHz, Vertical

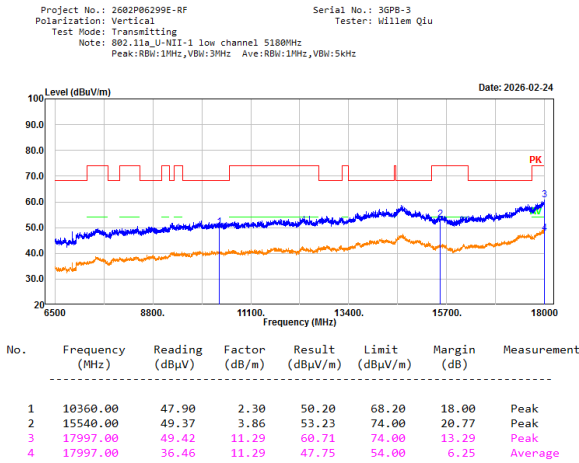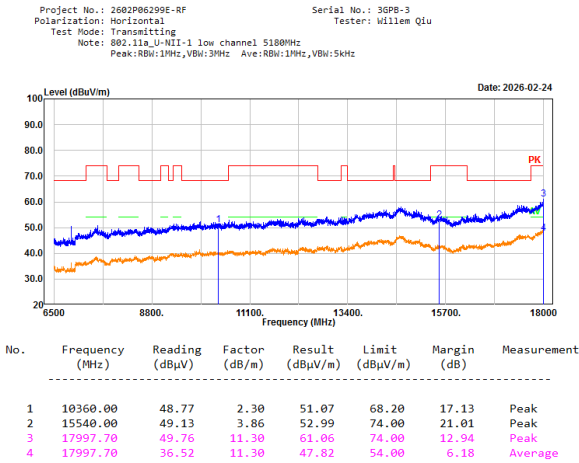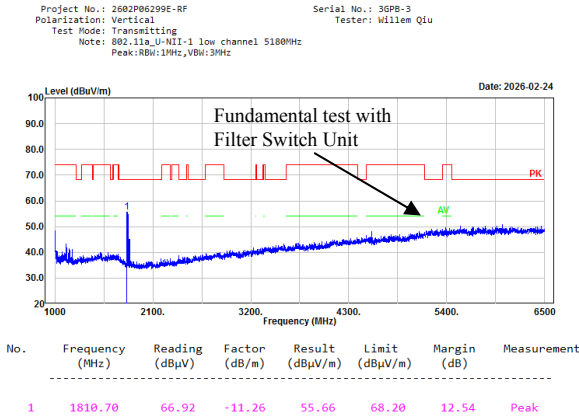

802.11a, Middle Channel, 5220MHz, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1 middle channel 5220MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPH-3
Tester: Willem Qiu

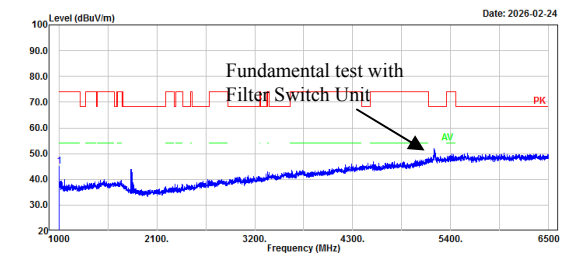


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1000.00	53.86	-8.82	45.04	74.00	28.96	Peak

802.11a, Middle Channel, 5220MHz, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1 middle channel 5220MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3GPH-3
Tester: Willem Qiu

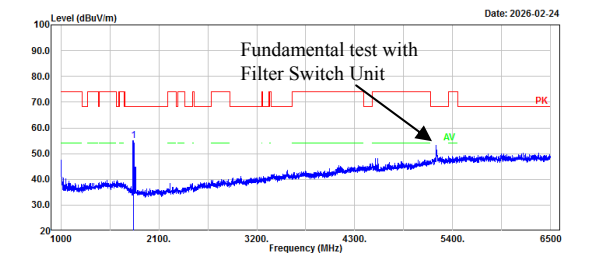

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1811.80	66.43	-11.26	55.17	68.20	13.03	Peak

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1 middle channel 5220MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 3GPH-3
Tester: Willem Qiu

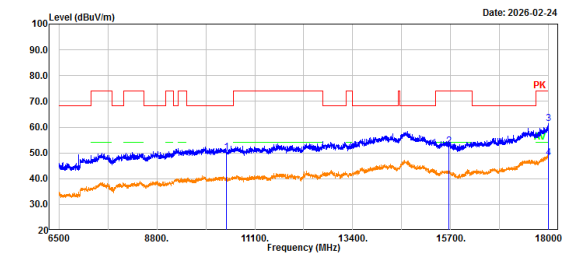

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10440.00	47.83	2.35	50.18	68.20	18.02	Peak
2	15660.00	48.84	3.67	52.51	74.00	21.49	Peak
3	17997.70	50.04	11.30	61.34	74.00	12.66	Peak
4	17997.70	36.65	11.30	47.95	54.00	6.05	Average

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1 middle channel 5220MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

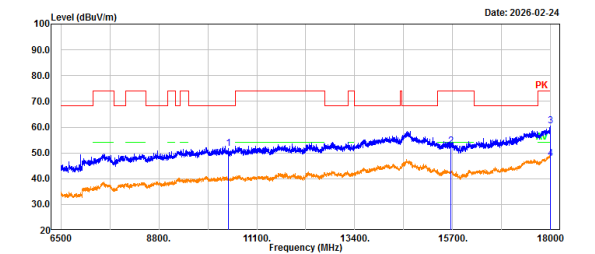


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10440.00	49.30	2.35	51.65	68.20	16.55	Peak
2	15660.00	48.87	3.67	52.54	74.00	21.46	Peak
3	17997.70	49.28	11.30	60.58	74.00	13.42	Peak
4	17997.70	36.59	11.30	47.89	54.00	6.11	Average

802.11a, High Channel, 5240MHz, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1 high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 36PB-3
Tester: Willem Qiu

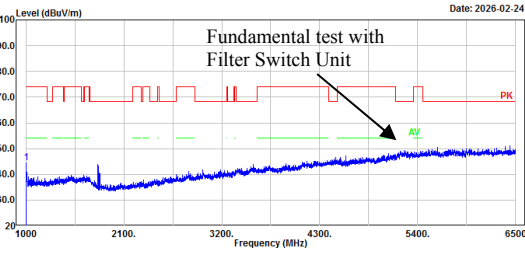


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1001.10	53.15	-8.82	44.33	74.00	29.67	Peak

802.11a, High Channel, 5240MHz, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1 high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 36PB-3
Tester: Willem Qiu

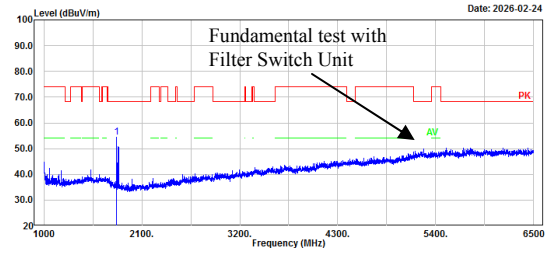

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1817.30	65.69	-11.27	54.42	68.20	13.78	Peak

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1 high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 36PB-3
Tester: Willem Qiu

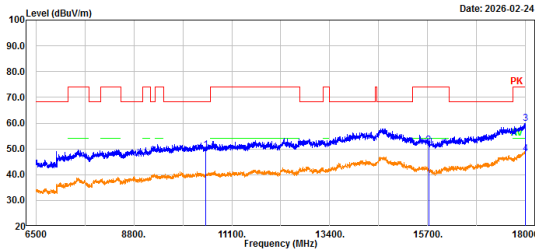

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10480.00	47.30	2.33	49.63	68.20	18.57	Peak
2	15720.00	47.89	3.59	51.48	74.00	22.52	Peak
3	17995.40	48.68	11.28	59.96	74.00	14.04	Peak
4	17995.40	36.68	11.28	47.96	54.00	6.04	Average


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1 high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 36PB-3
Tester: Willem Qiu



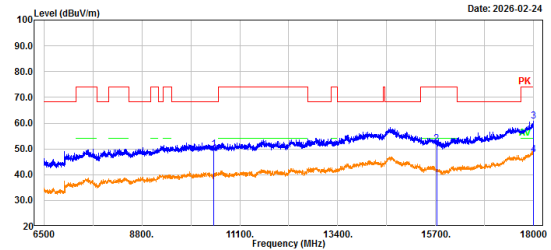


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10480.00	47.48	2.33	49.81	68.20	18.39	Peak
2	15720.00	48.52	3.59	52.11	74.00	21.89	Peak
3	17988.50	49.40	11.23	60.63	74.00	13.37	Peak
4	17988.50	36.65	11.23	47.88	54.00	6.12	Average


802.11 n20, Low Channel, 5180MHz, Horizontal

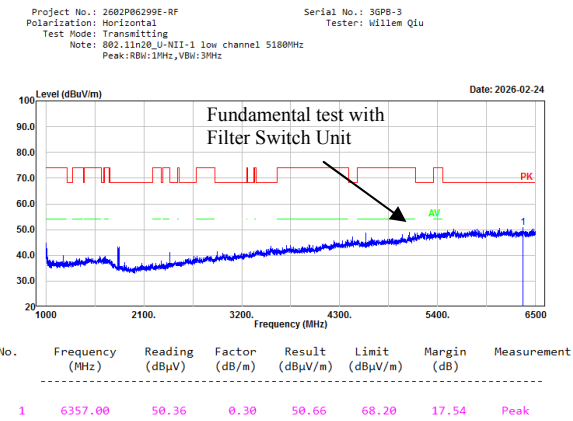




802.11 n20, Low Channel, 5180MHz, Vertical

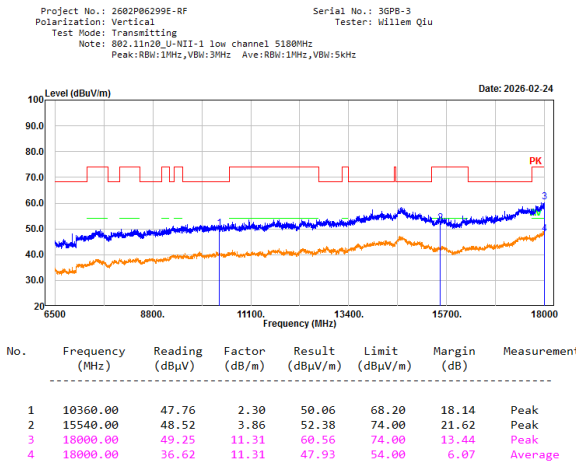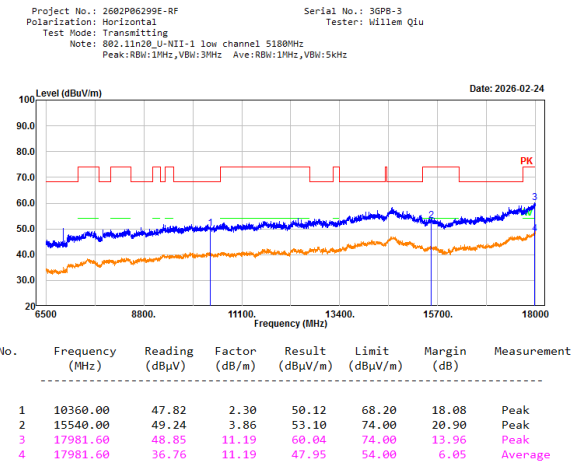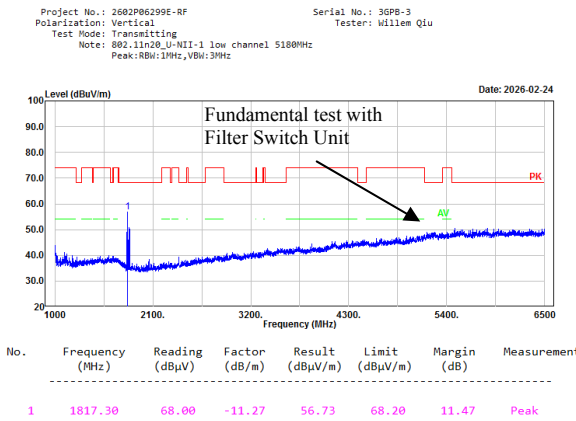


802.11 n20, Middle Channel, 5220MHz,Horizontal

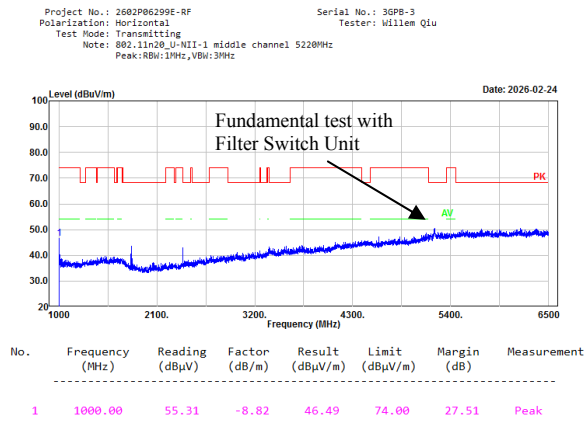




802.11 n20, Middle Channel, 5220MHz, Vertical

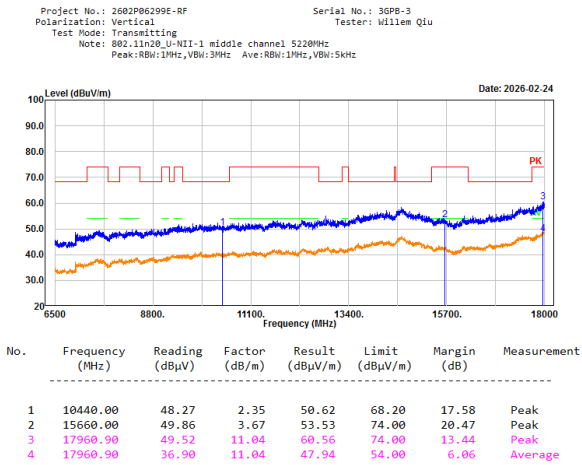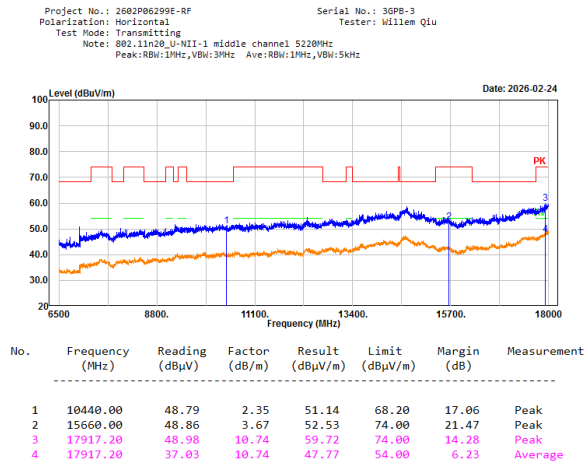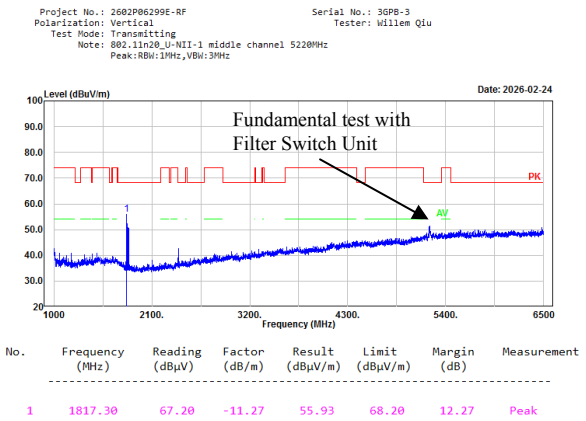


802.11 n20, High Channel, 5240MHz, Horizontal

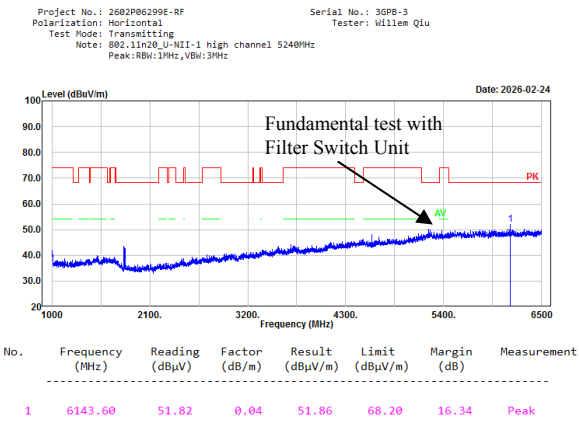




802.11 n20, High Channel, 5240MHz, Vertical

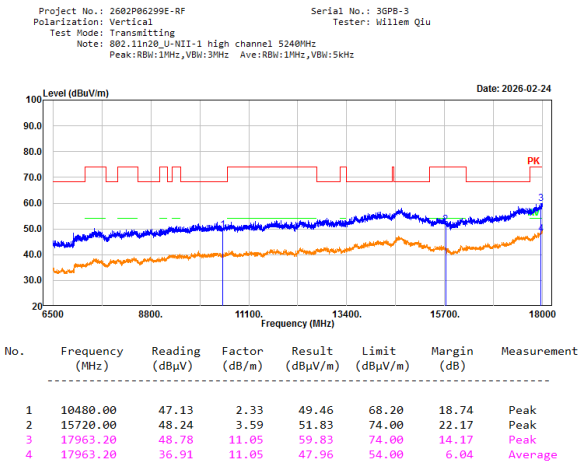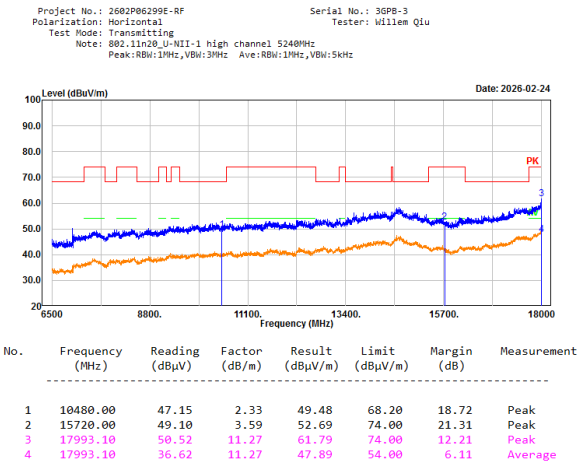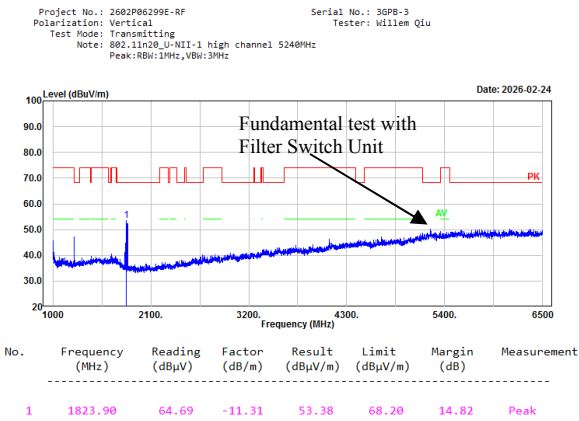


802.11 n40, Low Channel, 5190MHz, Horizontal

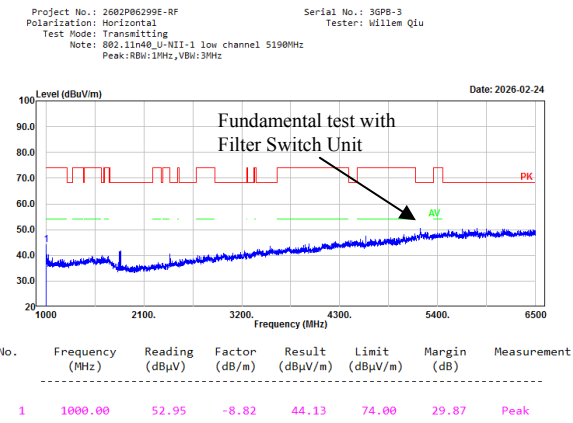




802.11 n40, Low Channel, 5190MHz,Vertical

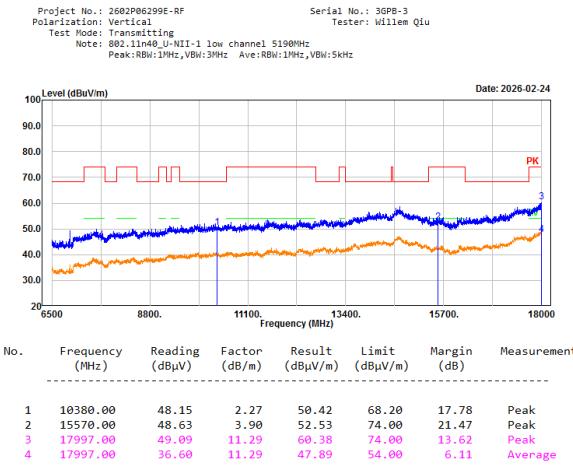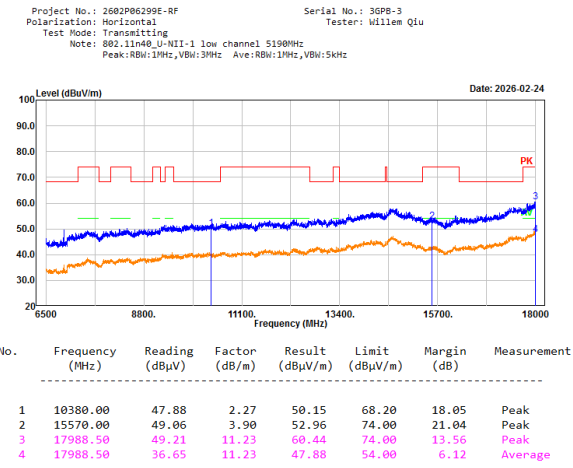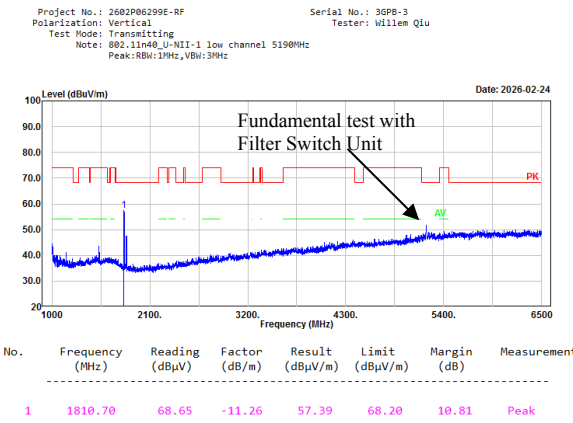


802.11 n40, High Channel, 5230MHz, Horizontal

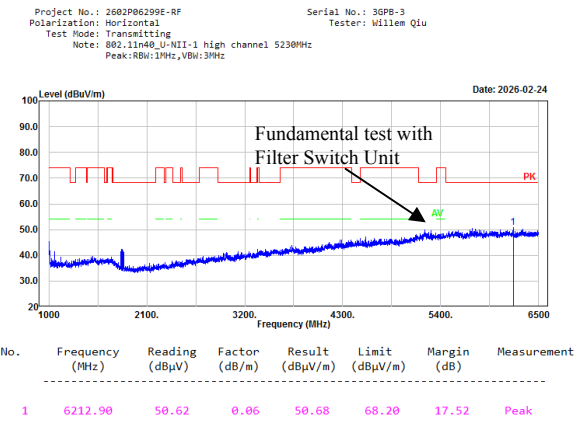




802.11 n40, High Channel, 5230MHz, Vertical

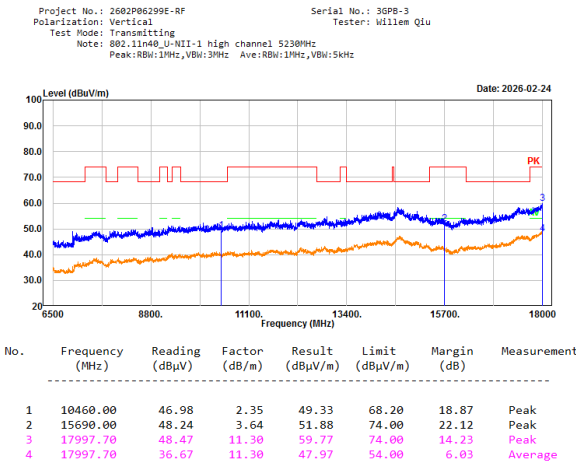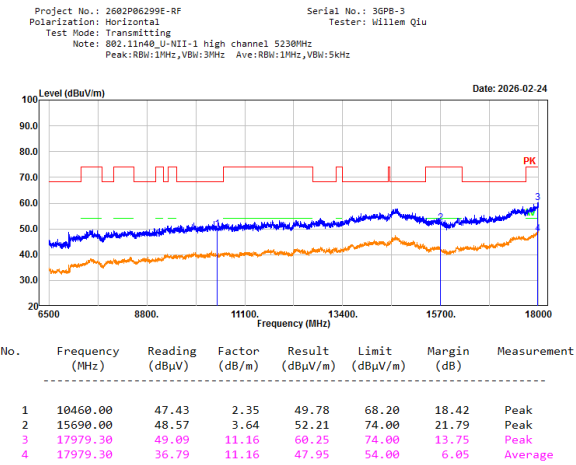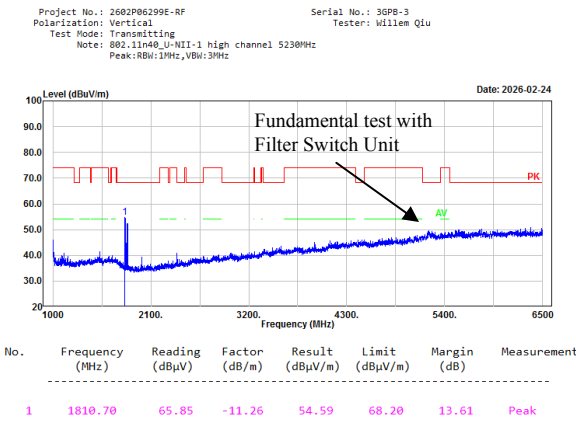


802.11 ac20, Low Channel, 5180MHz, Horizontal

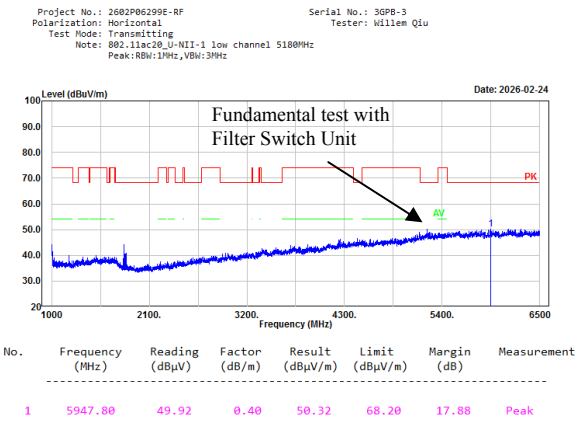




802.11 ac20, Low Channel, 5180MHz, Vertical

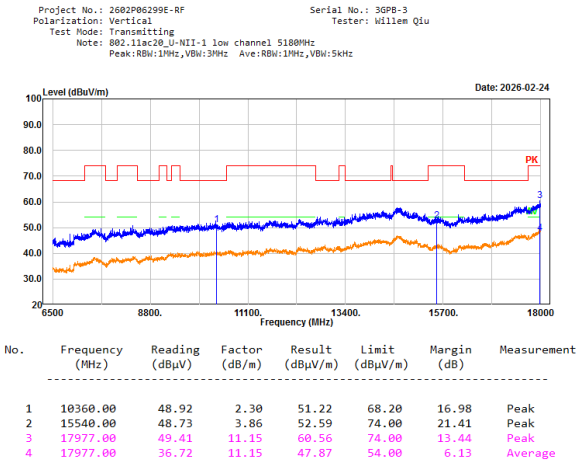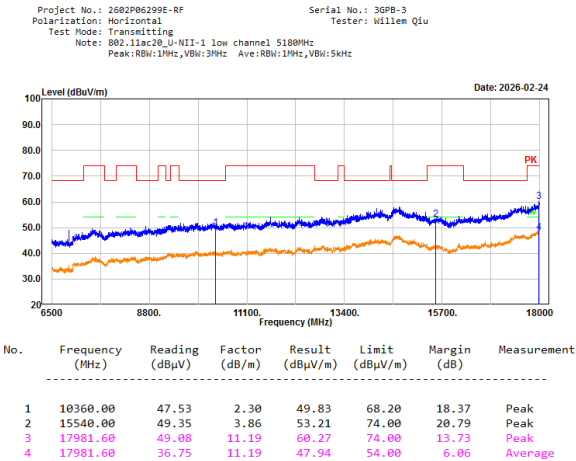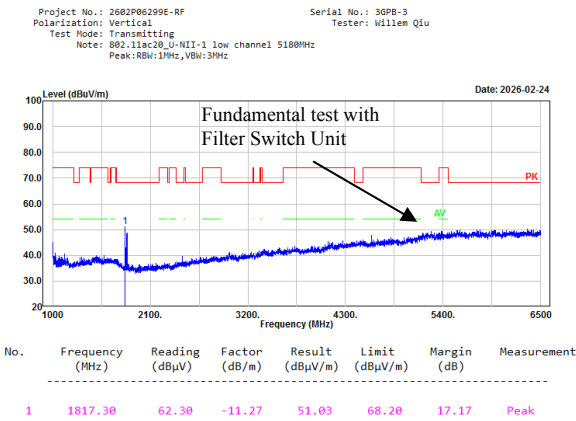


802.11 ac20, Middle Channel, 5220MHz,Horizontal

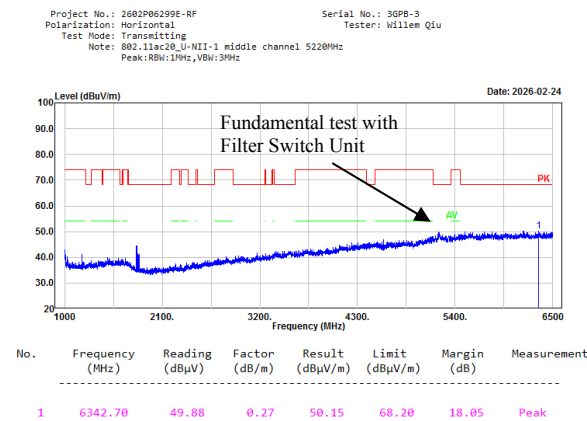




802.11 ac20, Middle Channel, 5220MHz, Vertical

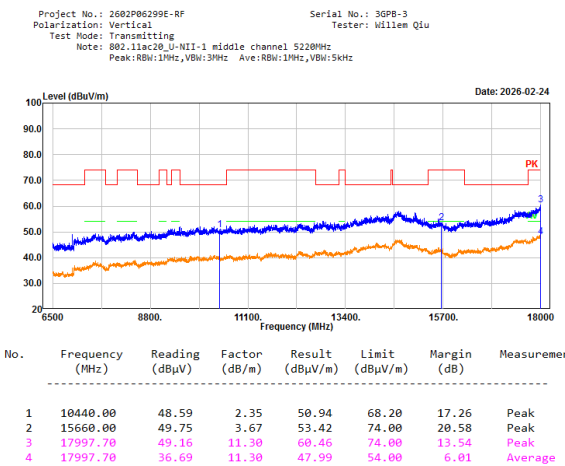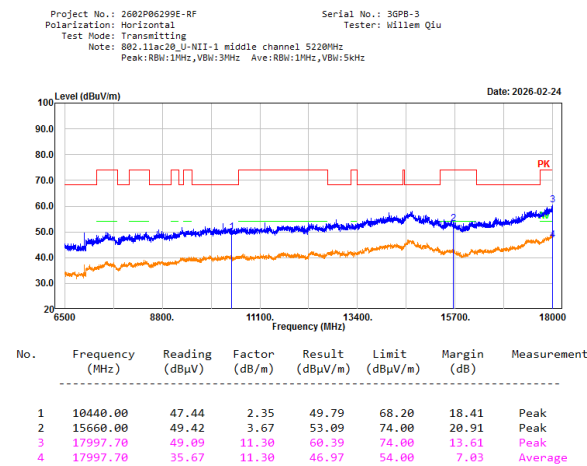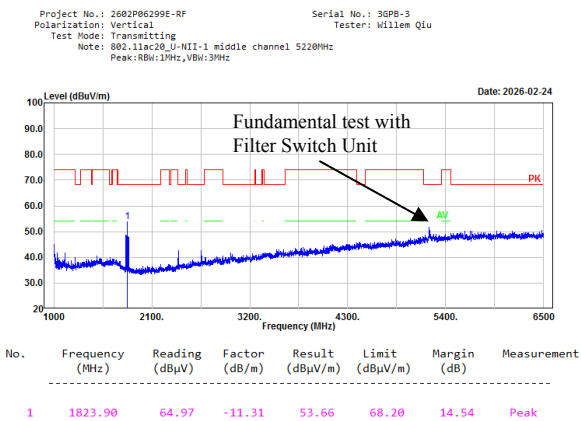

802.11 ac20, High Channel, 5240MHz, Horizontal

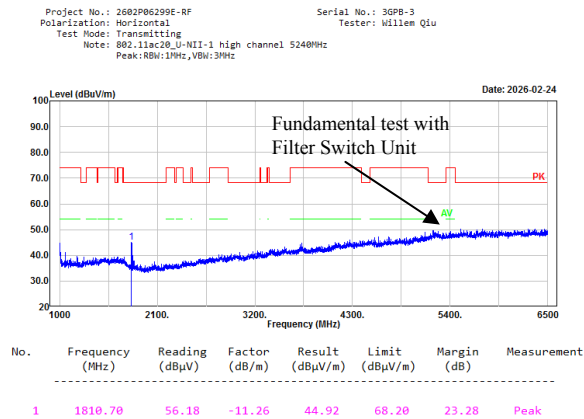

802.11 ac20, High Channel, 5240MHz, Vertical

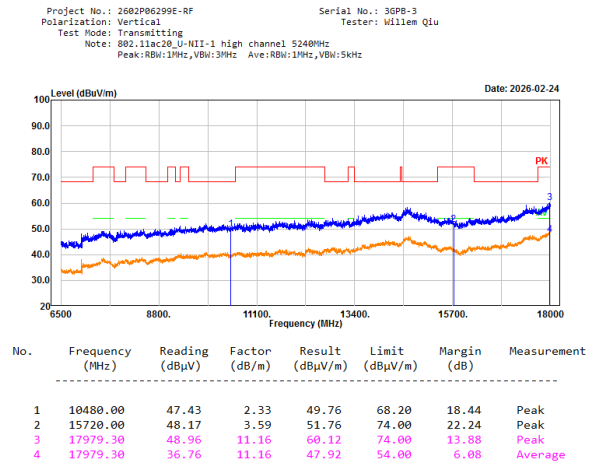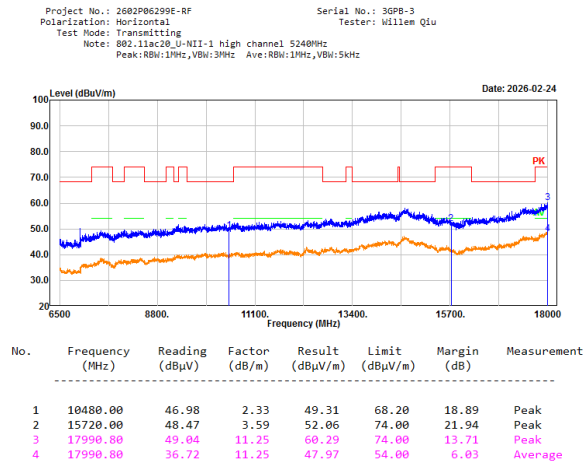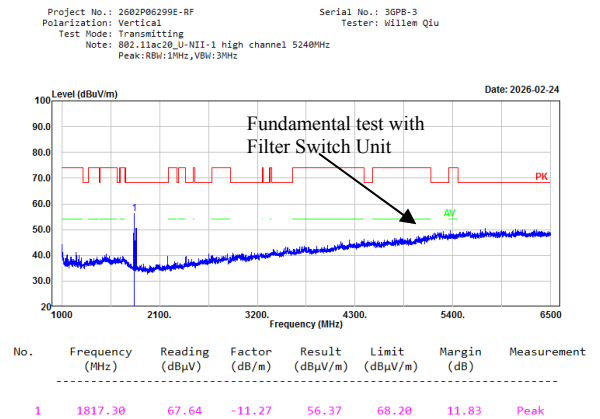


802.11 ac40, Low Channel, 5190MHz, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1 low channel 5190MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Willem Qiu

Date: 2026-02-24

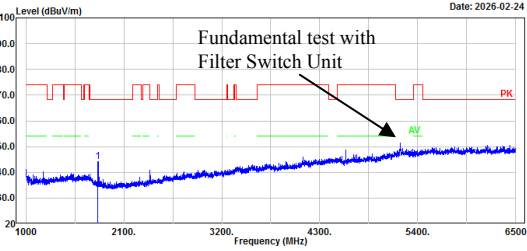


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1810.70	55.46	-11.26	44.20	68.20	24.00	Peak

802.11 ac40, Low Channel, 5190MHz, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1 low channel 5190MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Willem Qiu

Date: 2026-02-24

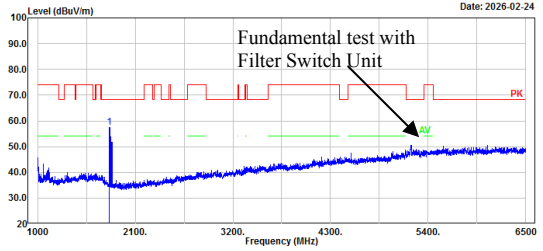


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1810.70	68.76	-11.26	57.50	68.20	10.70	Peak

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1 low channel 5190MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

Date: 2026-02-24

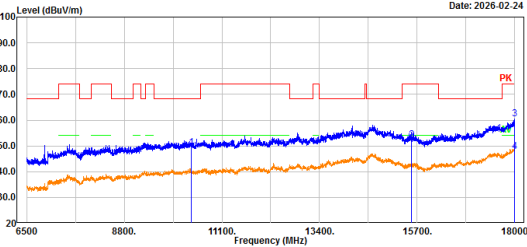


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10380.00	47.10	2.27	49.37	68.20	18.83	Peak
2	15570.00	48.39	3.90	52.29	74.00	21.71	Peak
3	17995.40	49.10	11.28	60.38	74.00	13.62	Peak
4	17995.40	36.58	11.28	47.86	54.00	6.14	Average

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1 low channel 5190MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 3GPB-3
Tester: Willem Qiu

Date: 2026-02-24



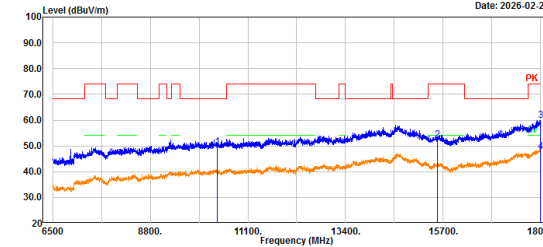


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10380.00	47.39	2.27	49.66	68.20	18.54	Peak
2	15570.00	48.49	3.90	52.39	74.00	21.61	Peak
3	17995.40	48.70	11.28	59.98	74.00	14.02	Peak
4	17995.40	36.64	11.28	47.92	54.00	6.08	Average


802.11 ac40, High Channel, 5230MHz, Horizontal

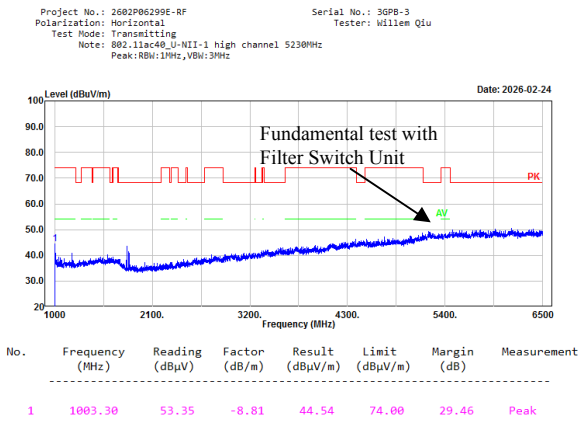




802.11 ac40, High Channel, 5230MHz, Vertical

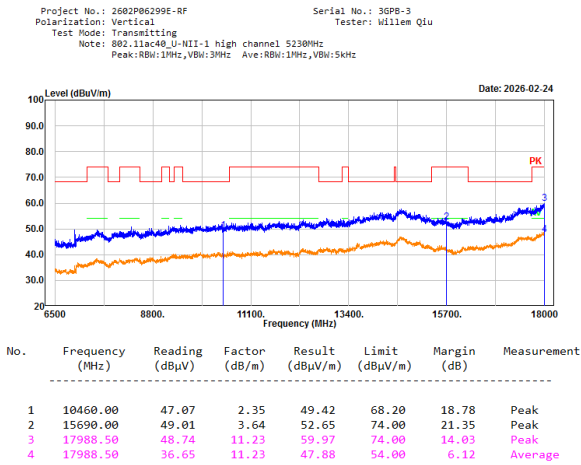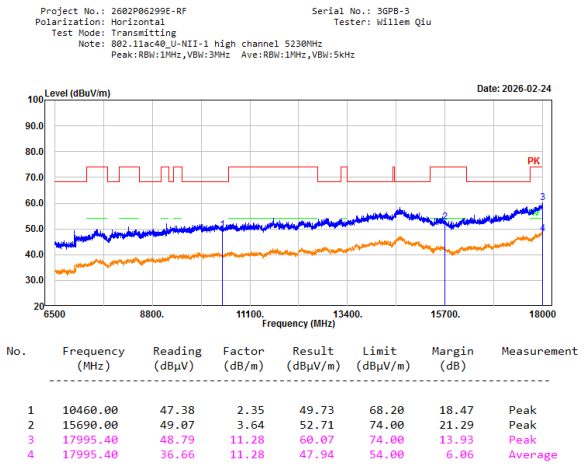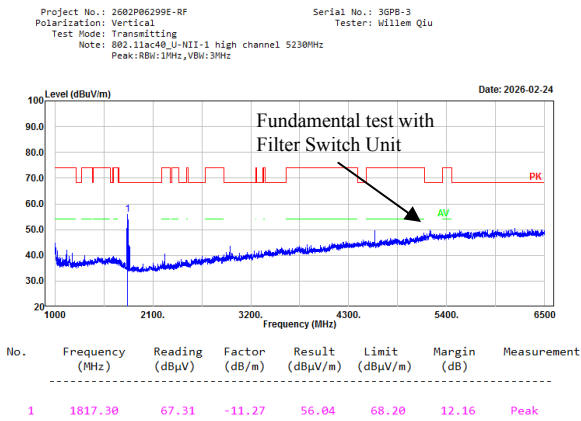

**802.11ac80, Middle Channel, 5210MHz,
Horizontal**

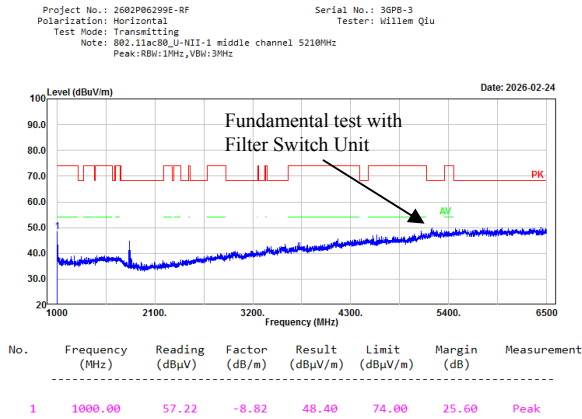


**802.11ac80, Middle Channel, 5210MHz,
Vertical**

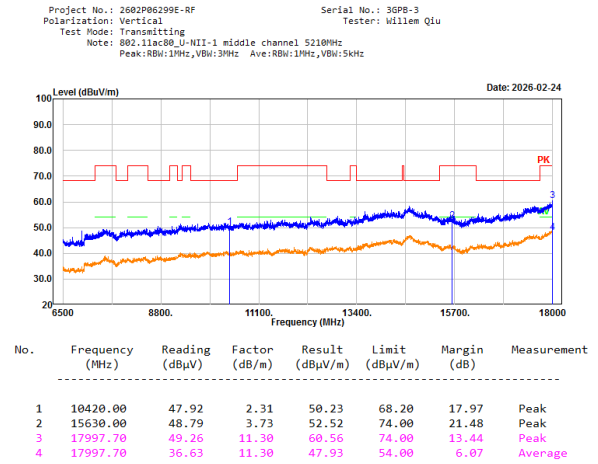
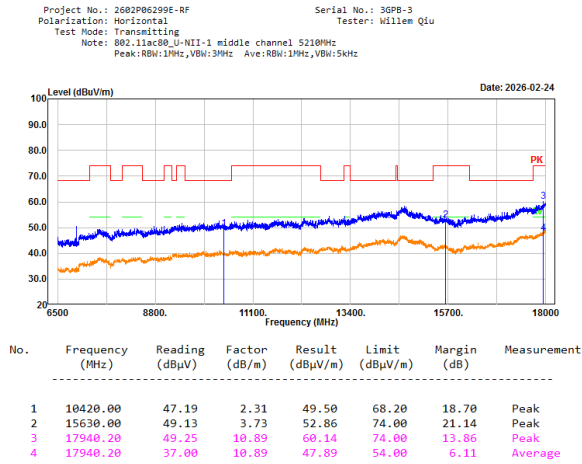
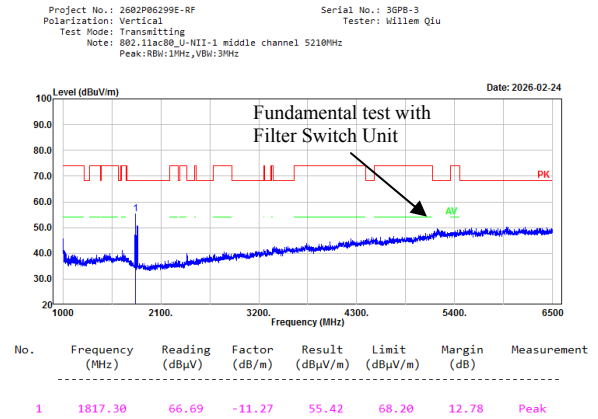


5250-5350MHz:


802.11a, Low Channel, 5260MHz, Horizontal

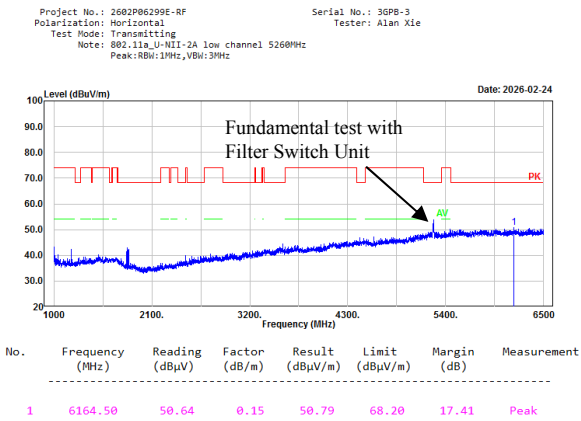




802.11a, Low Channel, 5260MHz, Vertical

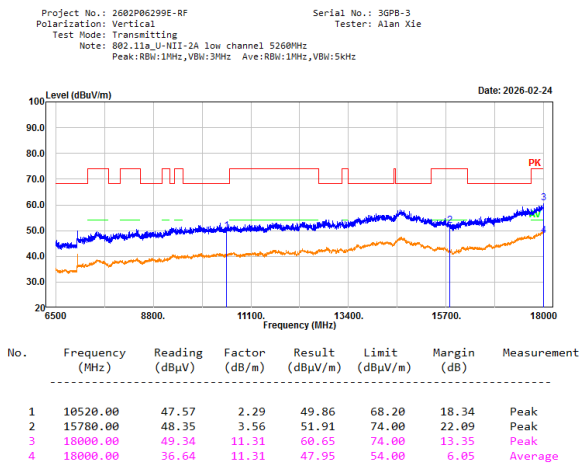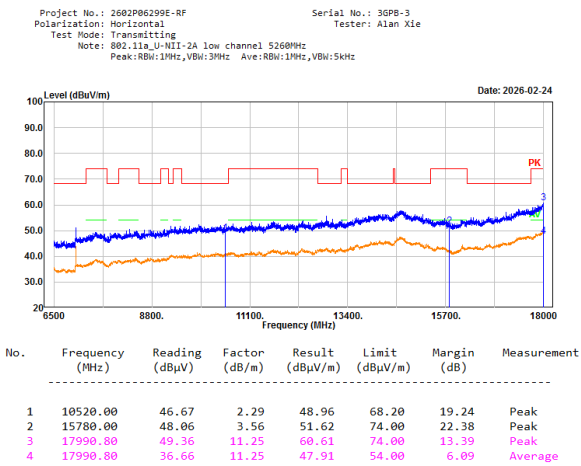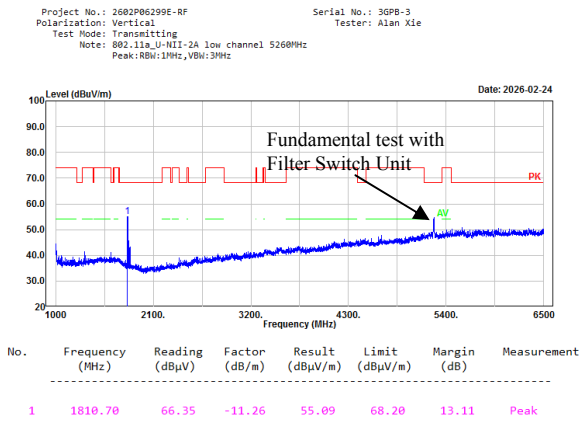


802.11a, Middle Channel, 5300MHz, Horizontal

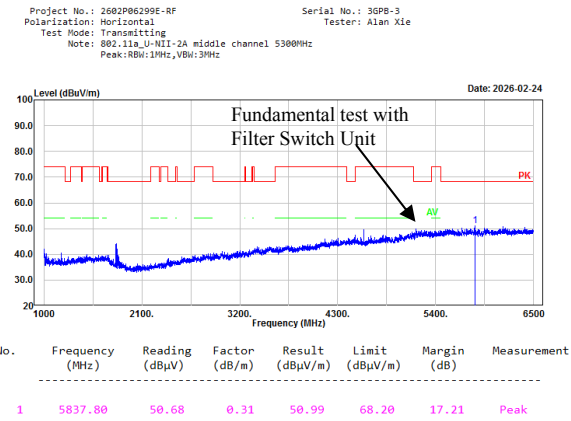




802.11a, Middle Channel, 5300MHz, Vertical

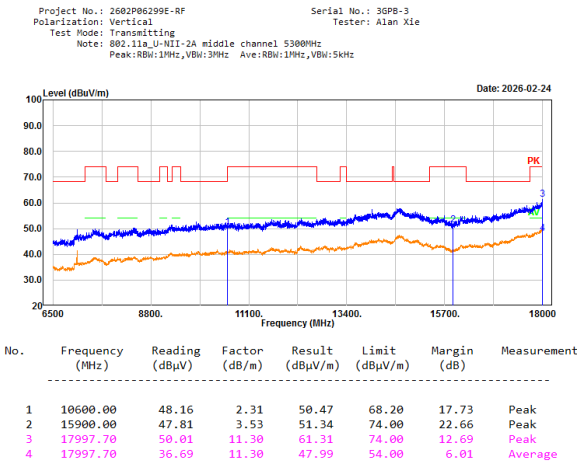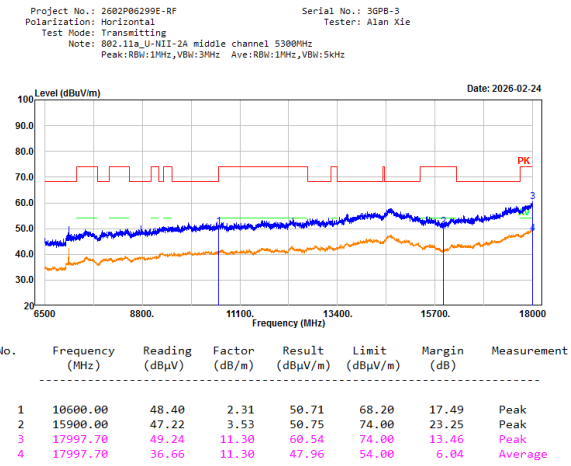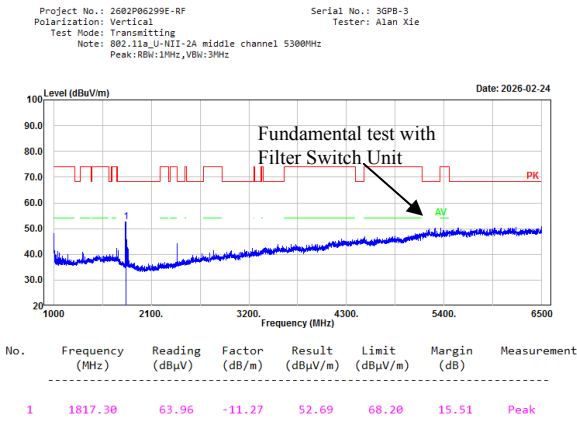


802.11a, High Channel, 5320MHz, Horizontal

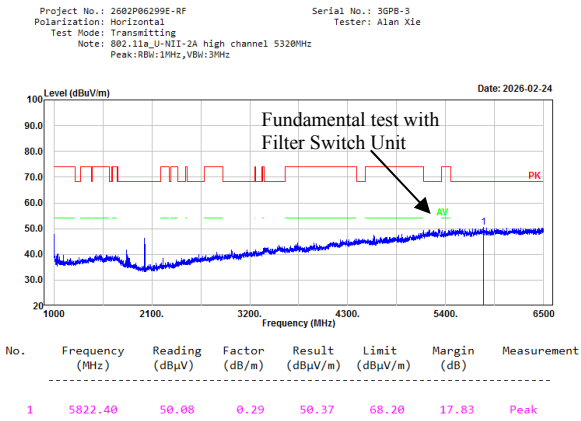




802.11a, High Channel, 5320MHz, Vertical

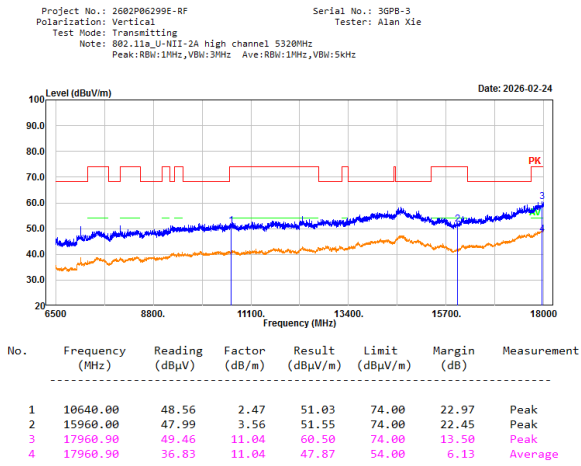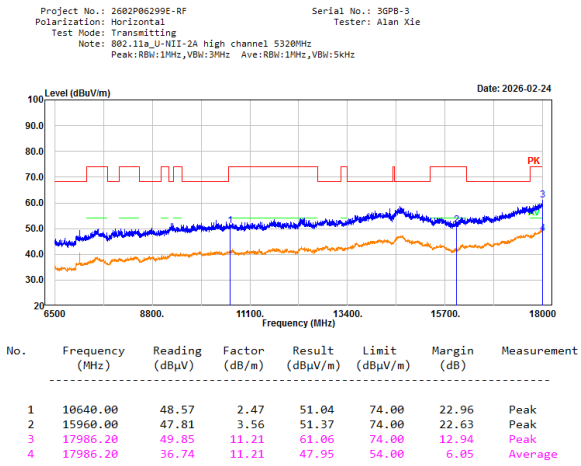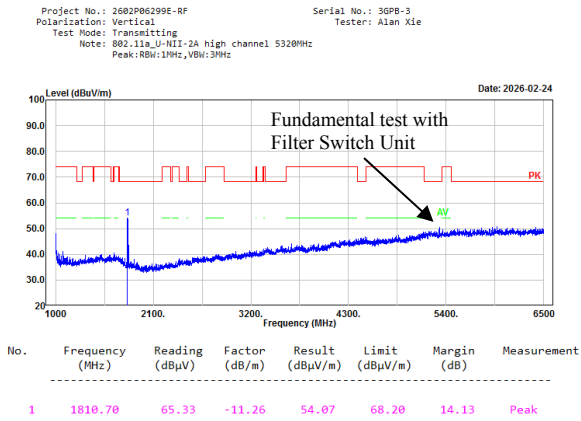


802.11 n20, Low Channel, 5260MHz, Horizontal

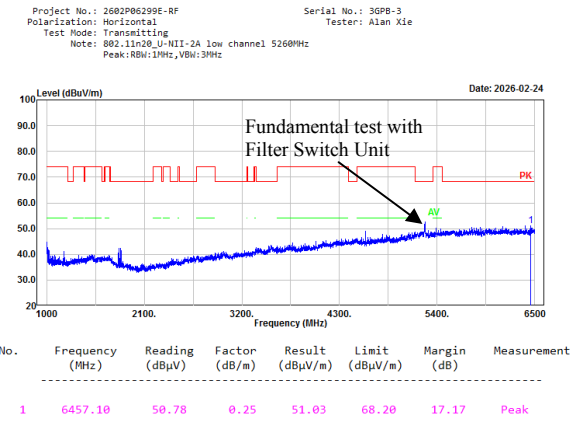




802.11 n20, Low Channel, 5260MHz, Vertical

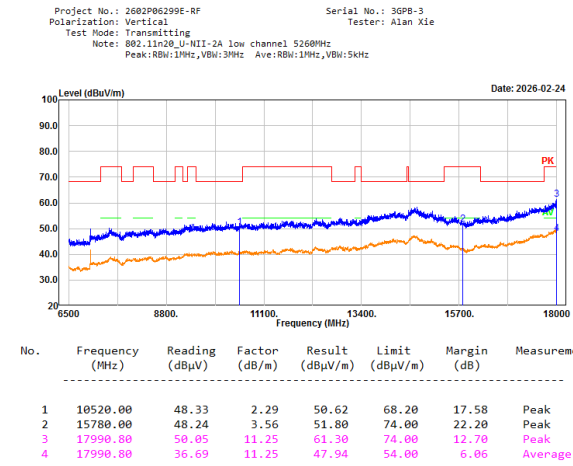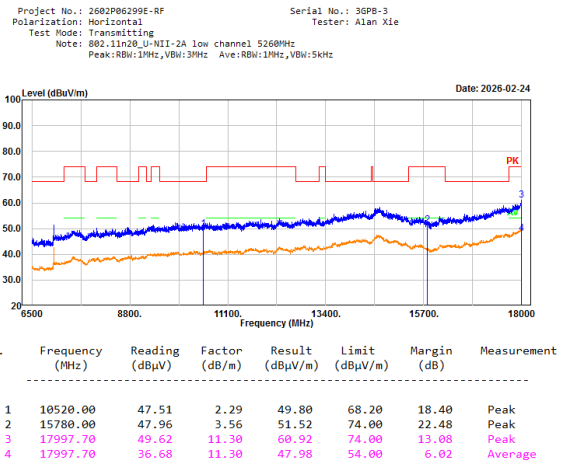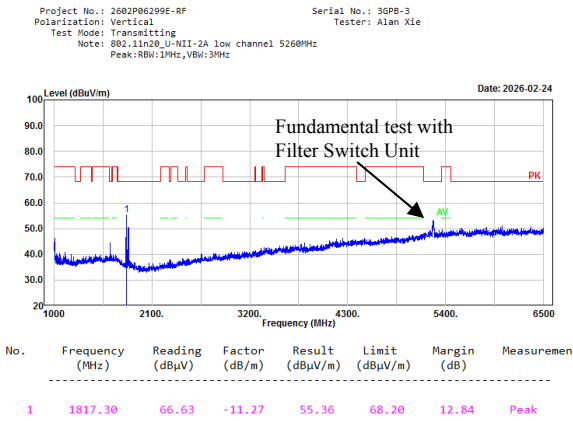


802.11 n20, Middle Channel, 5300MHz,Horizontal

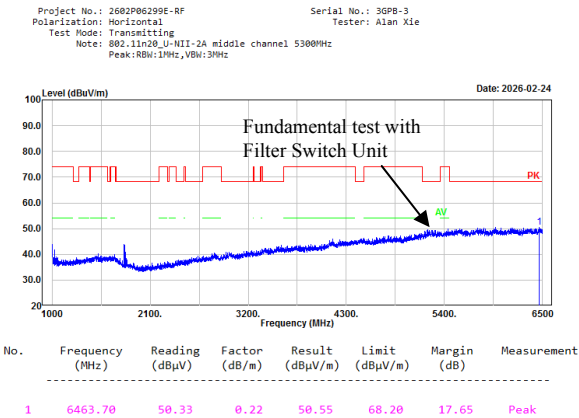




802.11 n20, Middle Channel, 5300MHz, Vertical

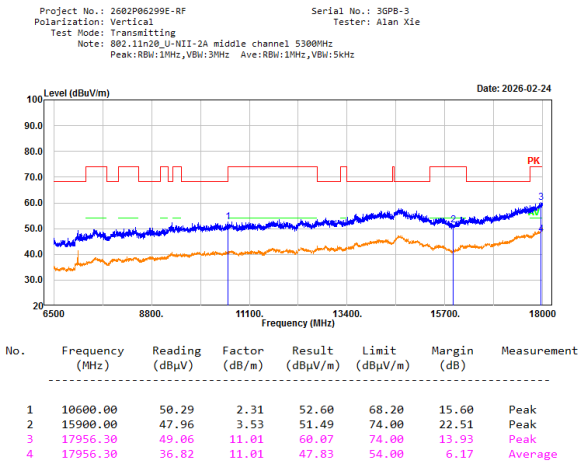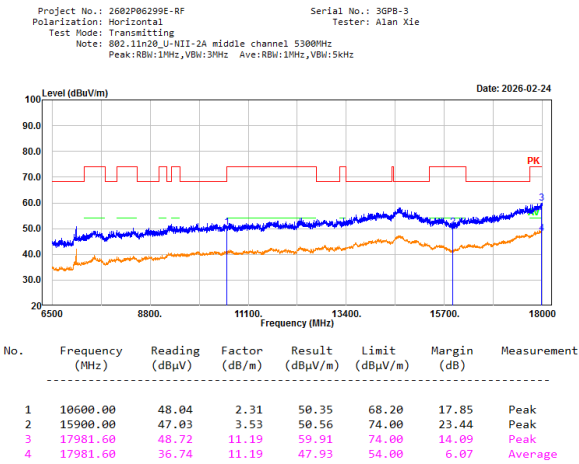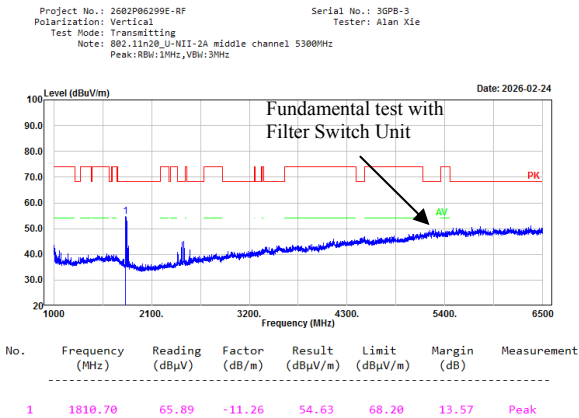


802.11 n20, High Channel, 5320MHz, Horizontal

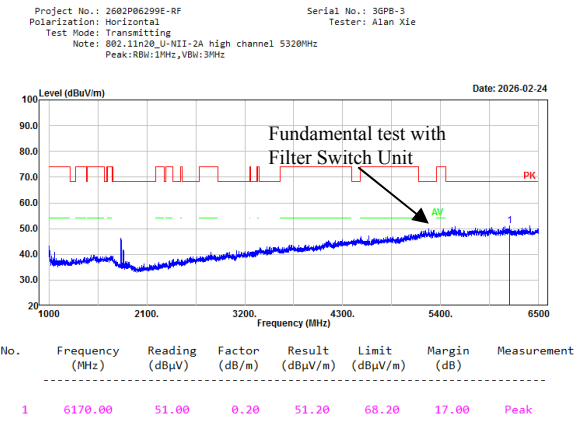




802.11 n20, High Channel, 5320MHz, Vertical

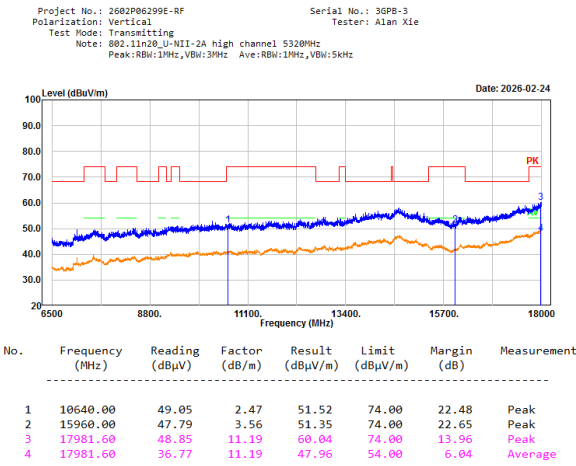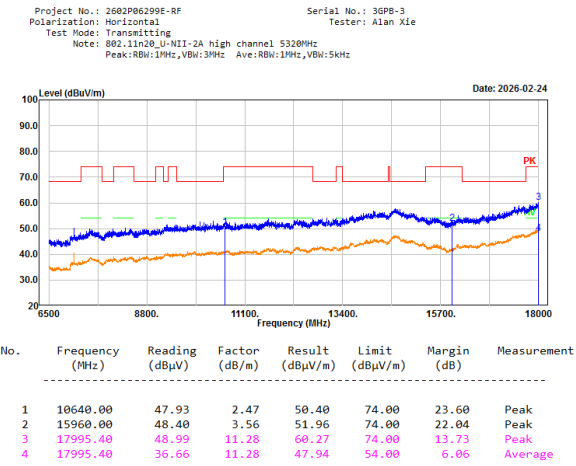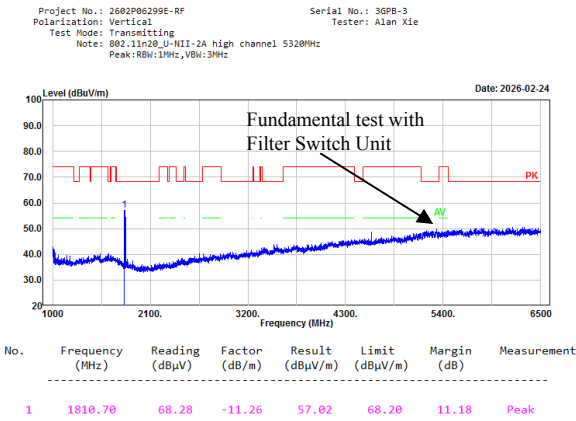


802.11 n40, Low Channel, 5270MHz, Horizontal

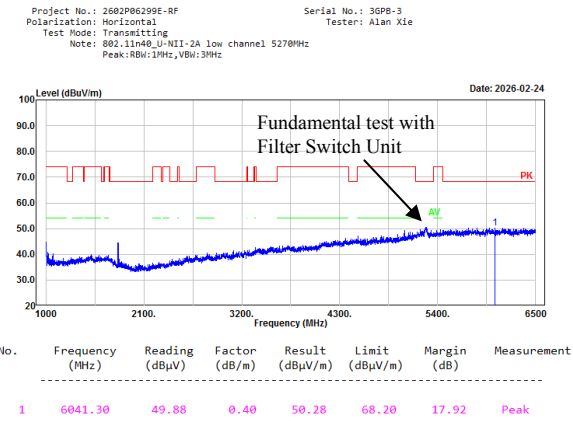




802.11 n40, Low Channel, 5270MHz, Vertical

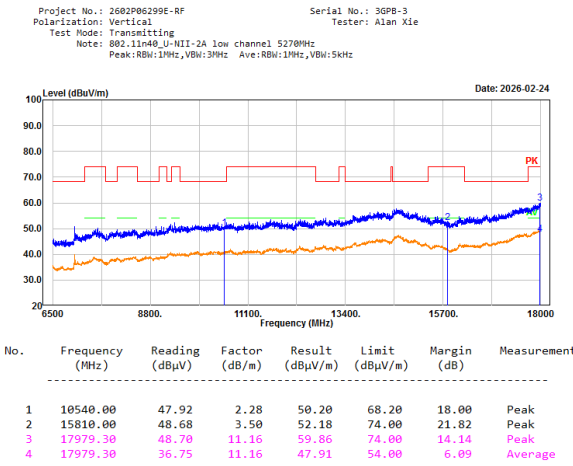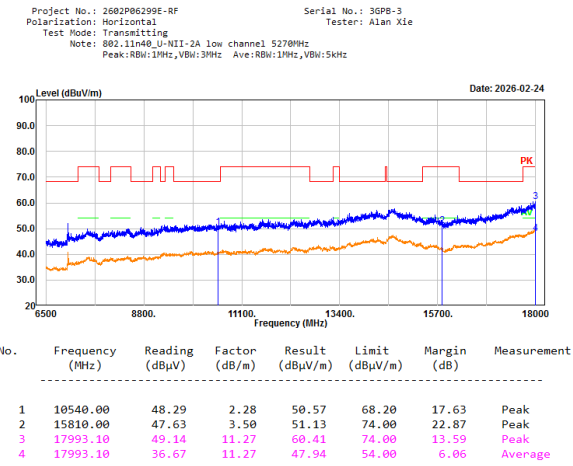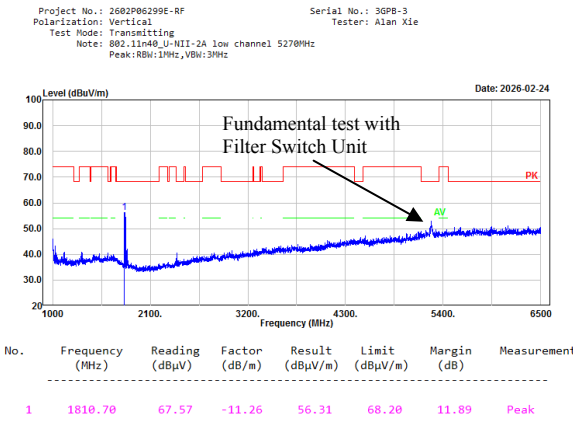


802.11 n40, High Channel, 5310MHz, Horizontal

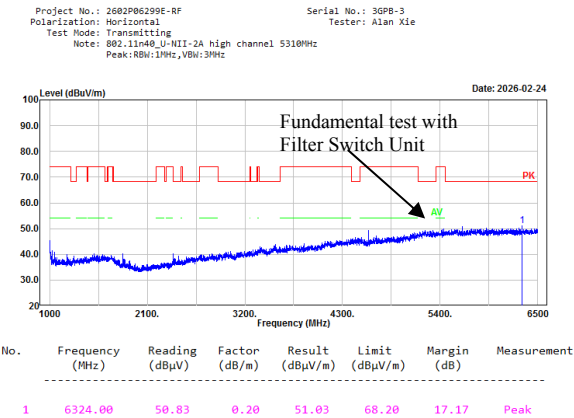




802.11 n40, High Channel, 5310MHz, Vertical

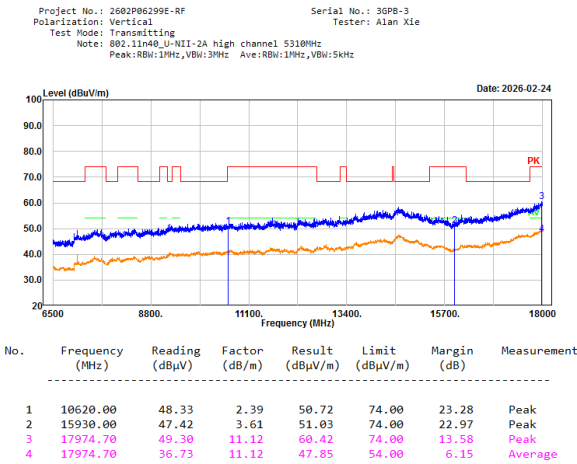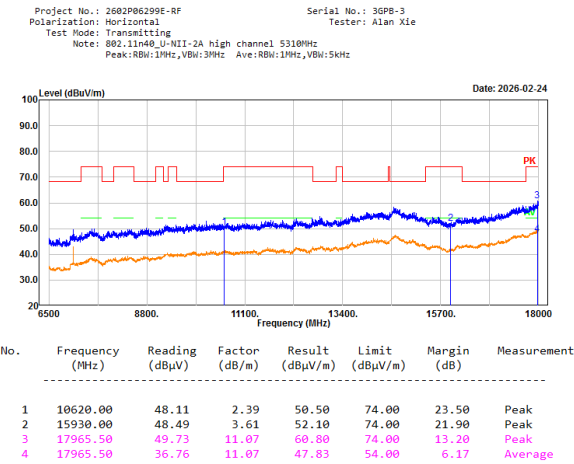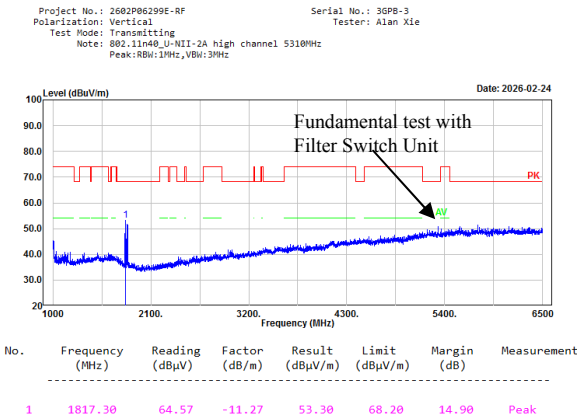

802.11 ac20, Low Channel, 5260MHz, Horizontal

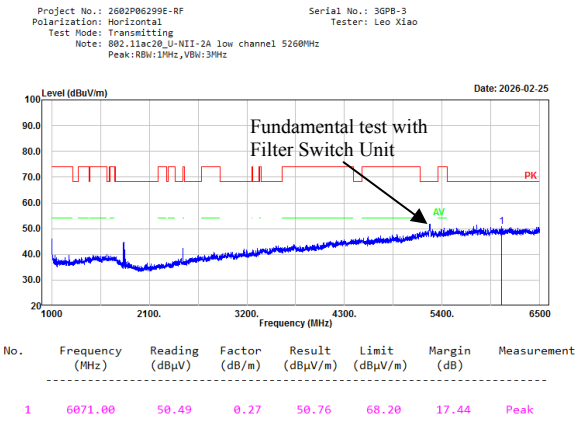


802.11 ac20, Low Channel, 5260MHz, Vertical

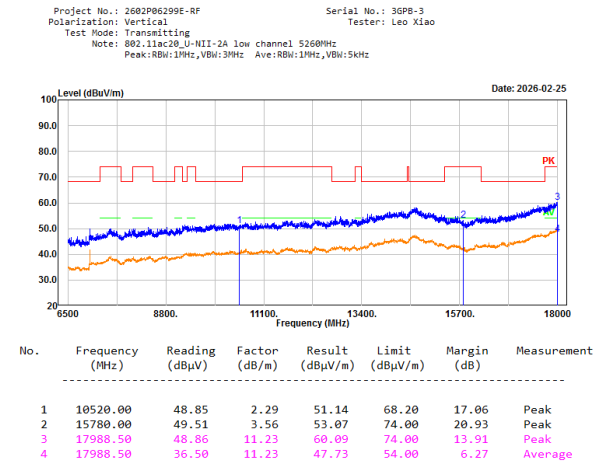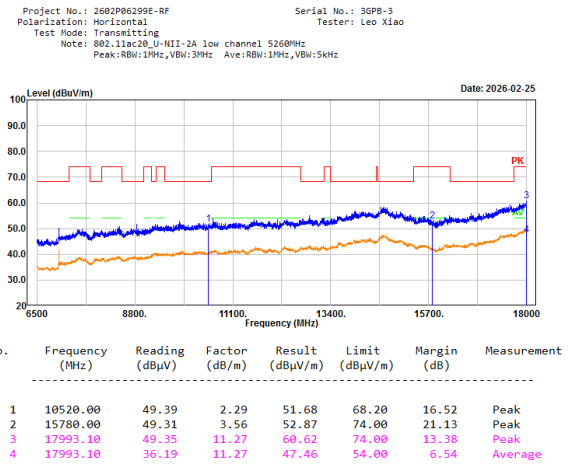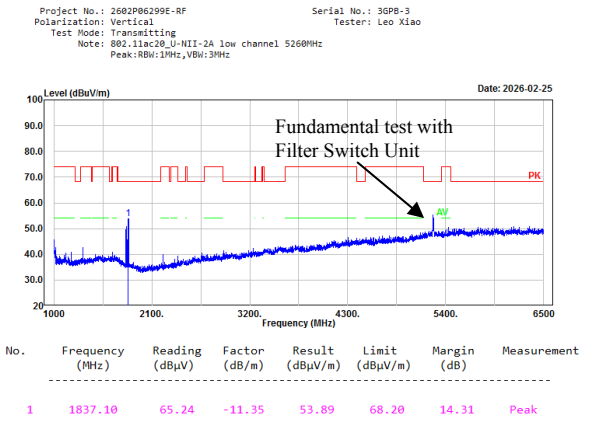

802.11 ac20, Middle Channel, 5300MHz,Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A middle channel 5300MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3GPH-3
Tester: Leo Xiao

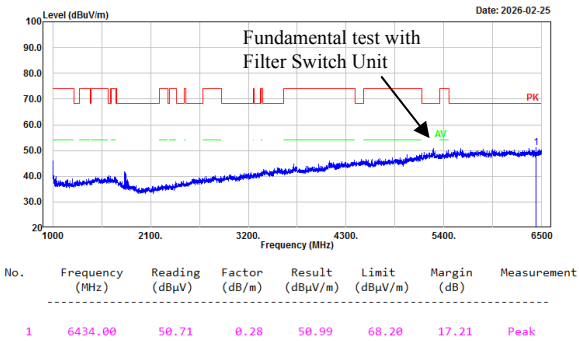

802.11 ac20, Middle Channel, 5300MHz, Vertical


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A middle channel 5300MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPH-3
Tester: Leo Xiao

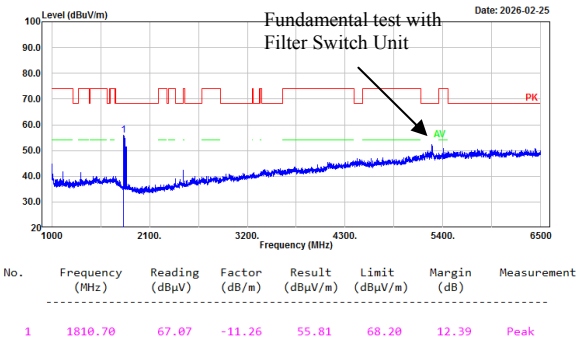


Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A middle channel 5300MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPH-3
Tester: Leo Xiao

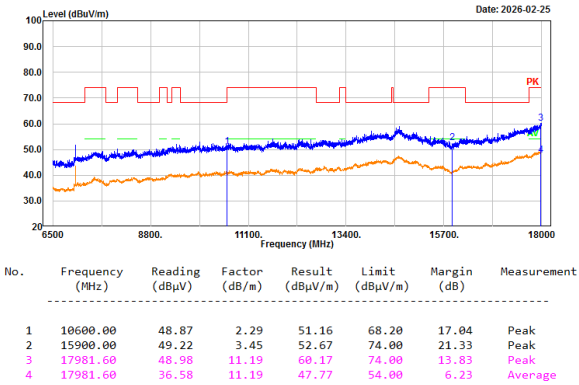


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A middle channel 5300MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz




Serial No.: 3GPH-3
Tester: Leo Xiao

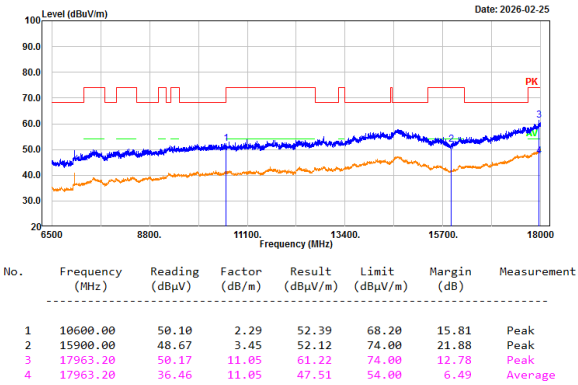


802.11 ac20, High Channel, 5320MHz, Horizontal

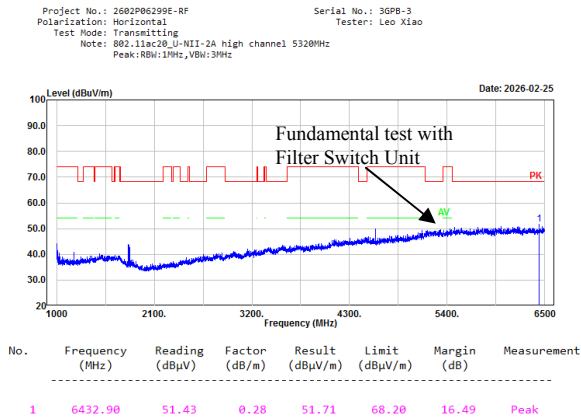




802.11 ac20, High Channel, 5320MHz, Vertical

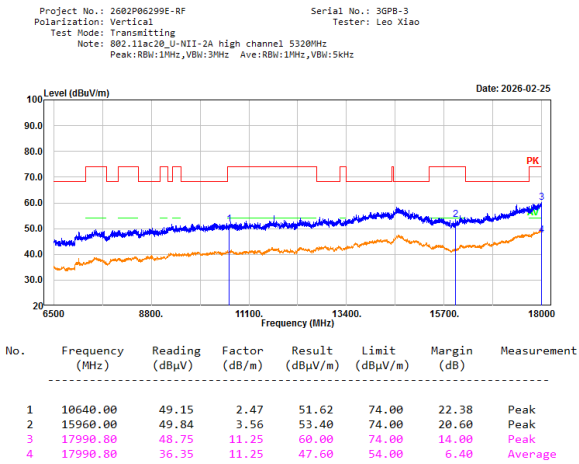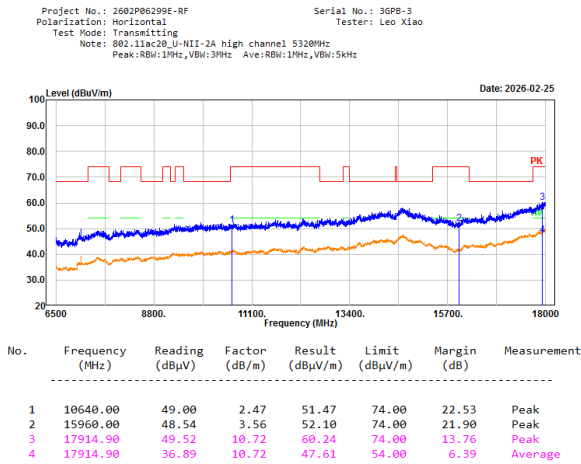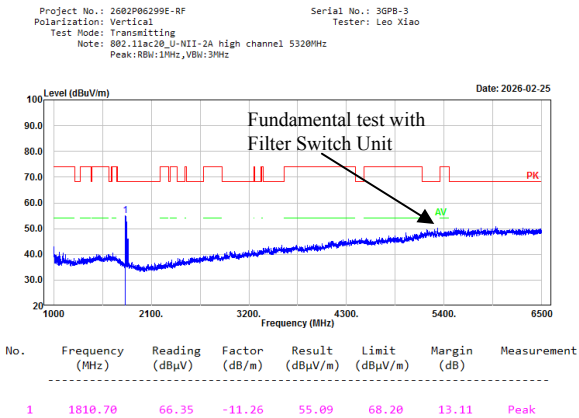

802.11 ac40, Low Channel, 5270MHz, Horizontal

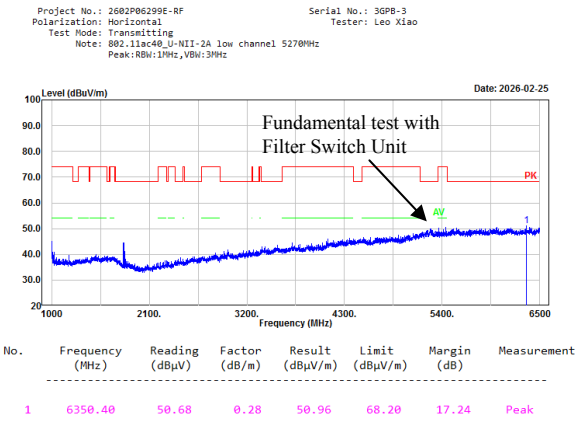

802.11 ac40, Low Channel, 5270MHz,Vertical

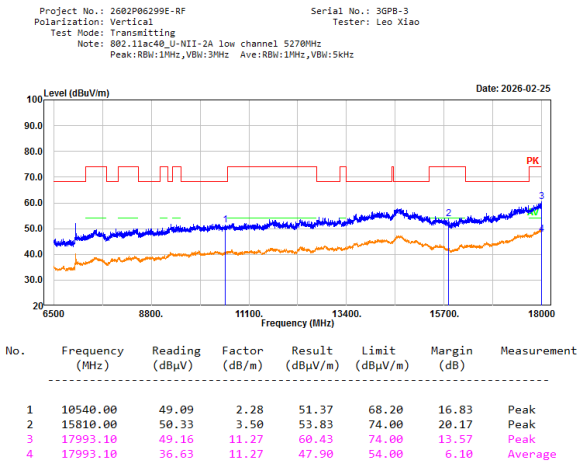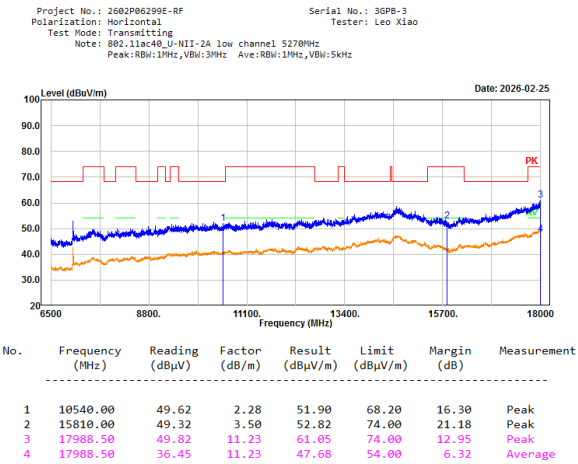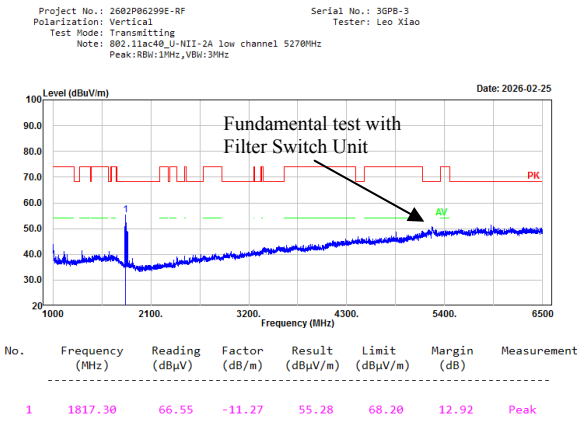


802.11 ac40, High Channel, 5310MHz, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-2A high channel 5310MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

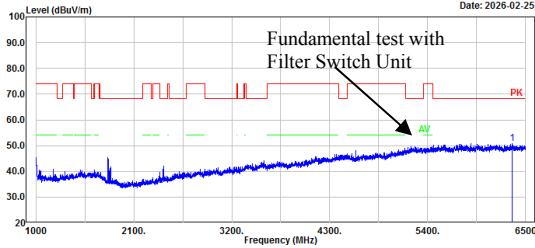


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6351.50	50.38	0.28	50.66	68.20	17.54	Peak

802.11 ac40, High Channel, 5310MHz, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-2A high channel 5310MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

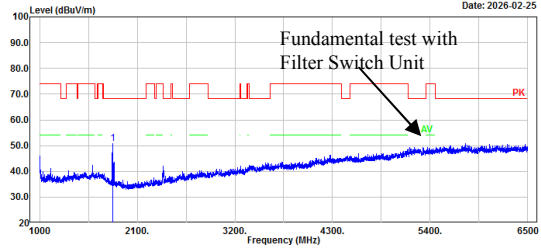


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1823.90	62.21	-11.31	50.90	68.20	17.30	Peak

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-2A high channel 5310MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

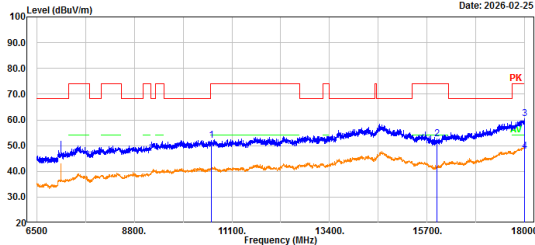


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10620.00	49.66	2.39	52.05	74.00	21.95	Peak
2	15930.00	49.04	3.61	52.65	74.00	21.35	Peak
3	17988.50	49.23	11.23	60.46	74.00	13.54	Peak
4	17988.50	36.65	11.23	47.88	54.00	6.12	Average

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-2A high channel 5310MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25



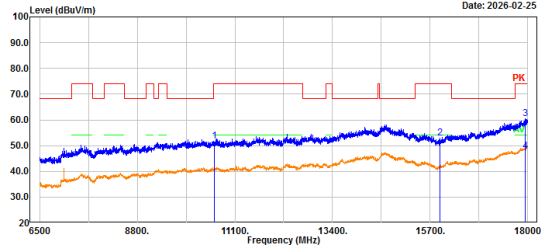


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10620.00	49.23	2.39	51.62	74.00	22.38	Peak
2	15930.00	49.23	3.61	52.84	74.00	21.16	Peak
3	17931.00	49.72	10.83	60.55	74.00	13.45	Peak
4	17931.00	37.01	10.83	47.84	54.00	6.16	Average

802.11ac80, Middle Channel, 5290MHz,
Horizontal

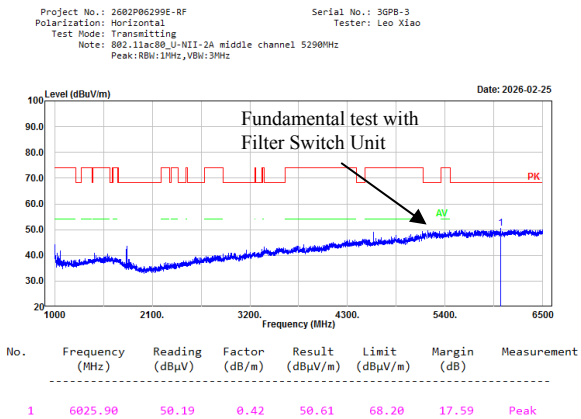


802.11ac80, Middle Channel, 5290MHz,
Vertical

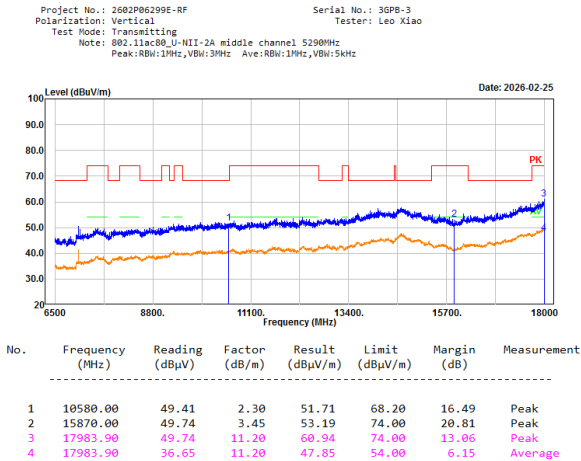
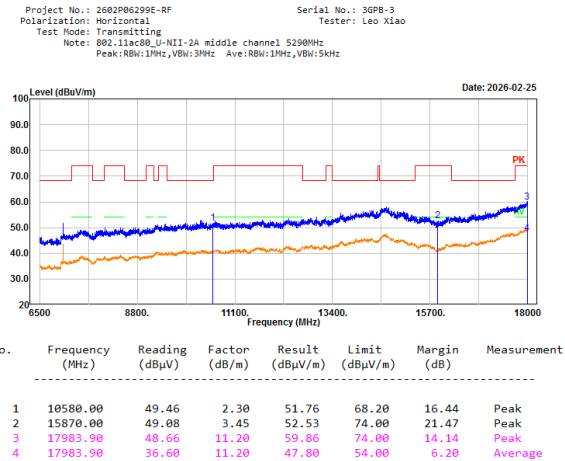
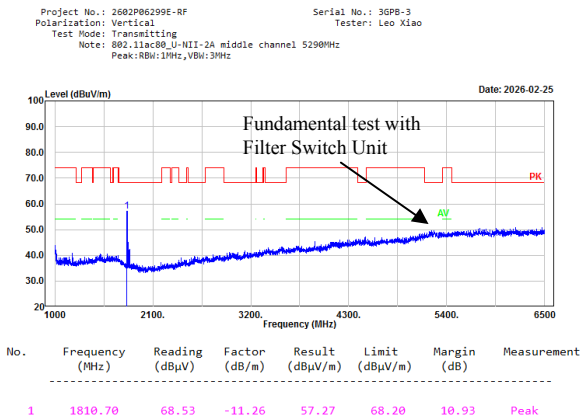


5470-5725MHz:


802.11a, Low Channel, 5500MHz, Horizontal

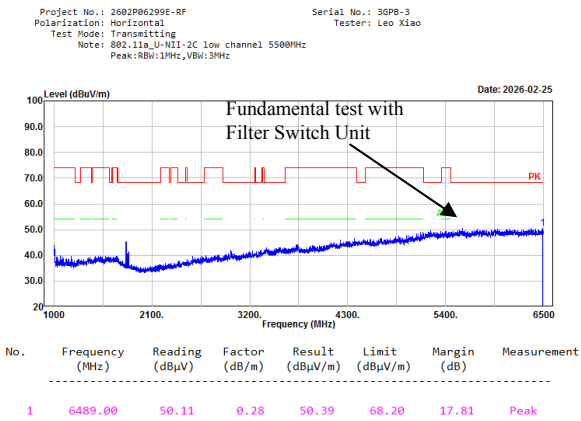




802.11a, Low Channel, 5500MHz, Vertical

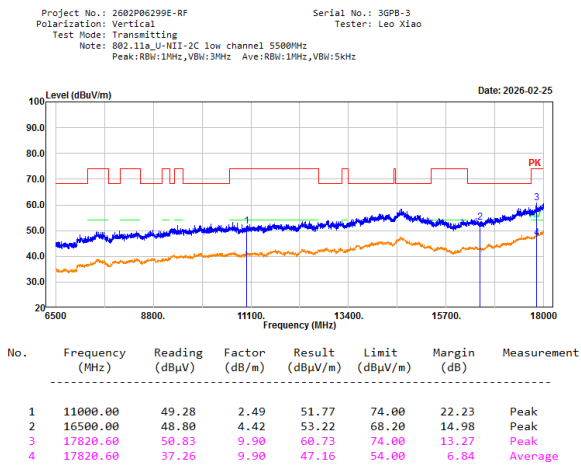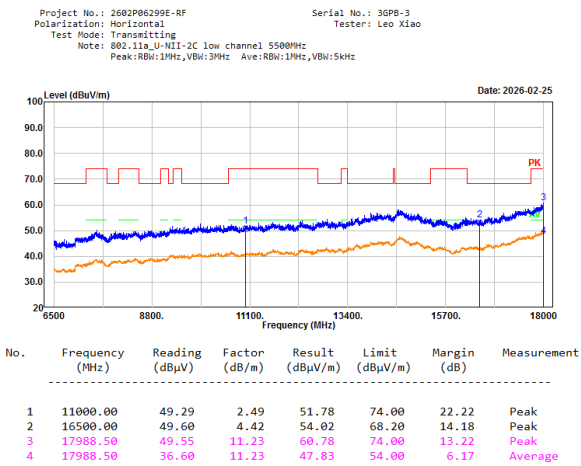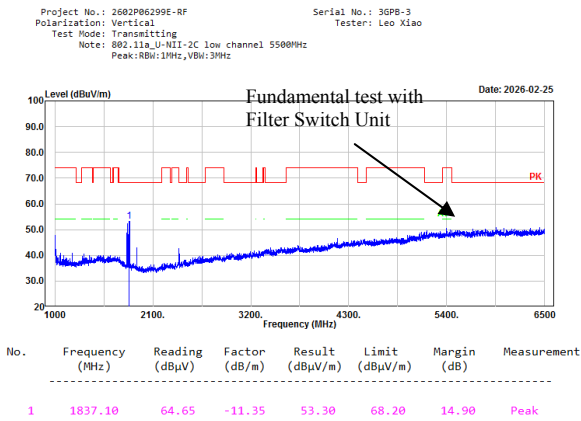


802.11a, Middle Channel, 5580MHz, Horizontal

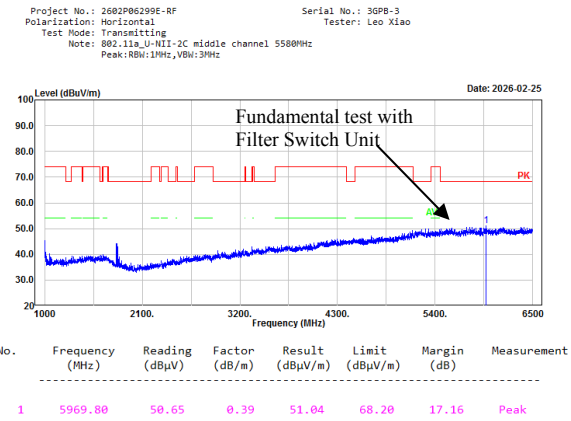




802.11a, Middle Channel, 5580MHz, Vertical

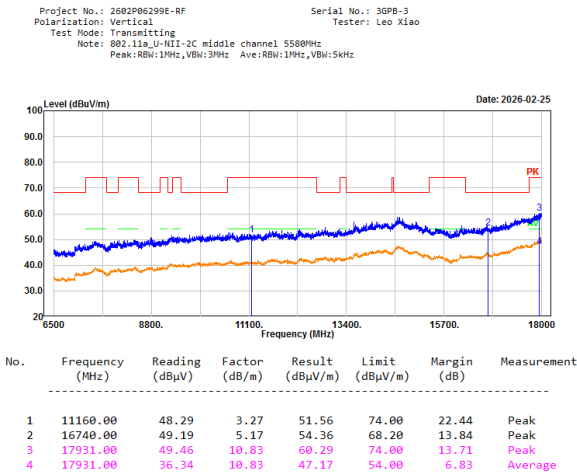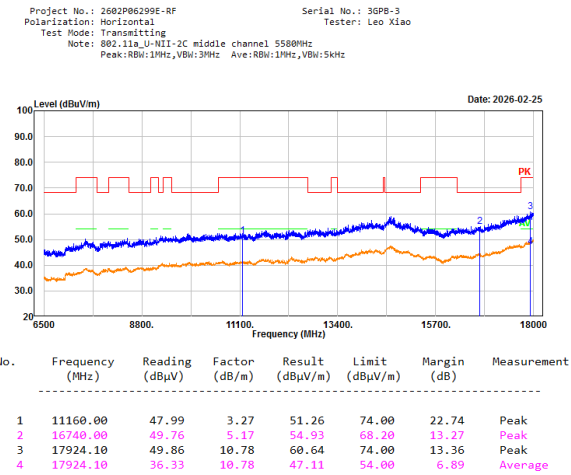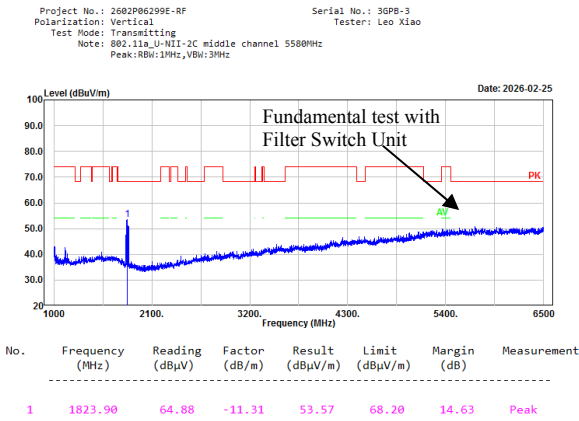


802.11a, High Channel, 5700MHz, Horizontal

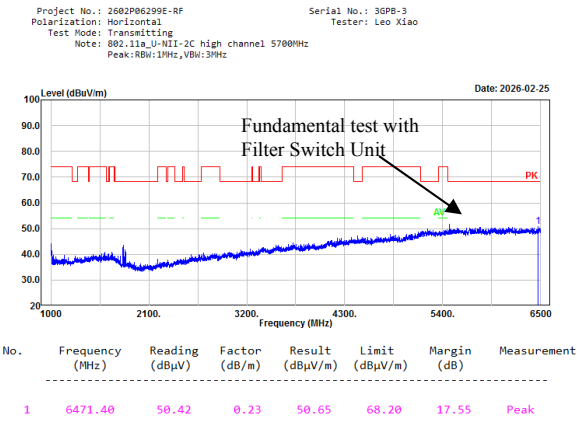




802.11a, High Channel, 5700MHz, Vertical

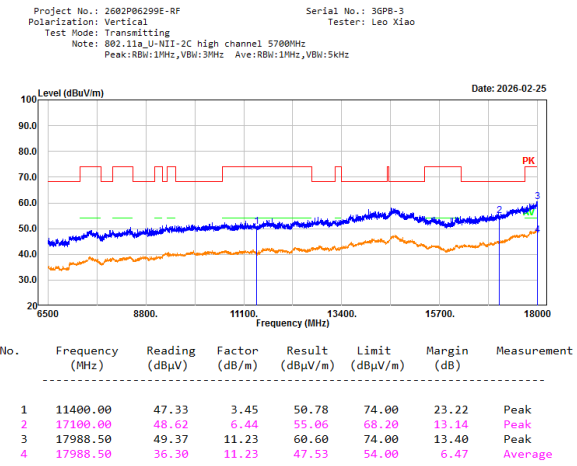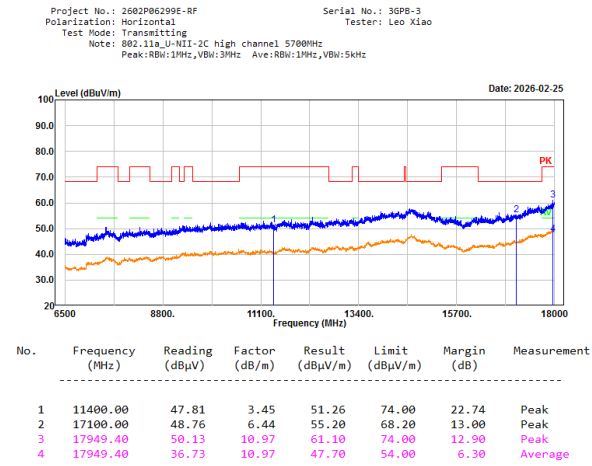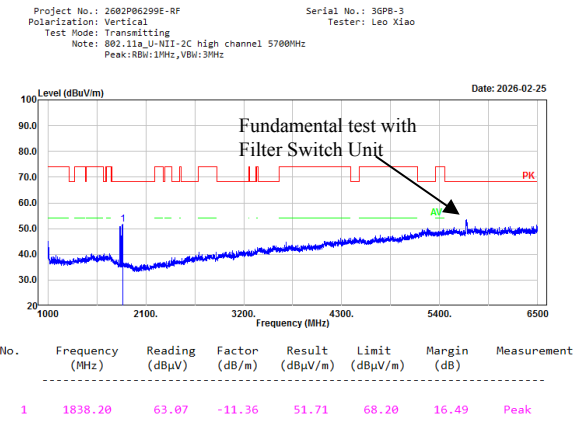


802.11 n20, Low Channel, 5500MHz, Horizontal

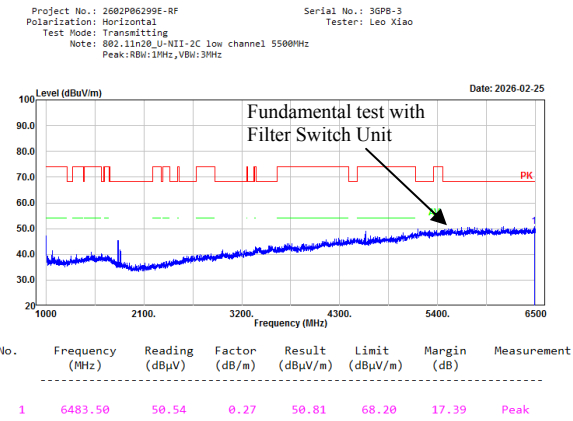




802.11 n20, Low Channel, 5500MHz, Vertical

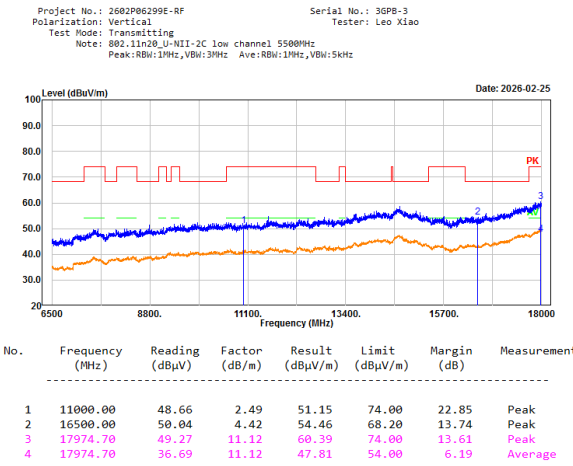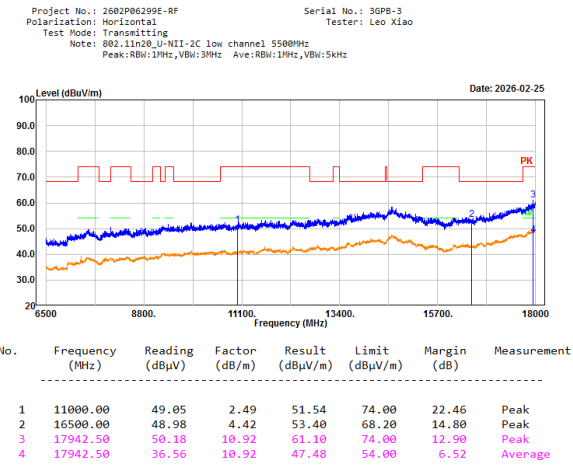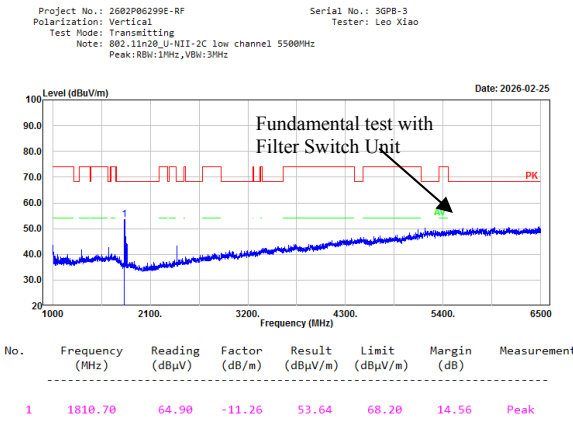


802.11 n20, Middle Channel, 5580MHz, Horizontal

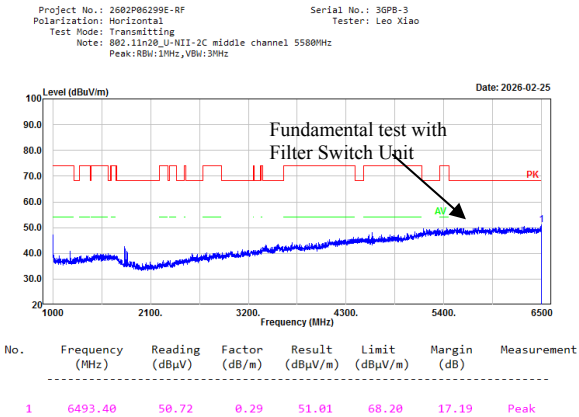




802.11 n20, Middle Channel, 5580MHz, Vertical

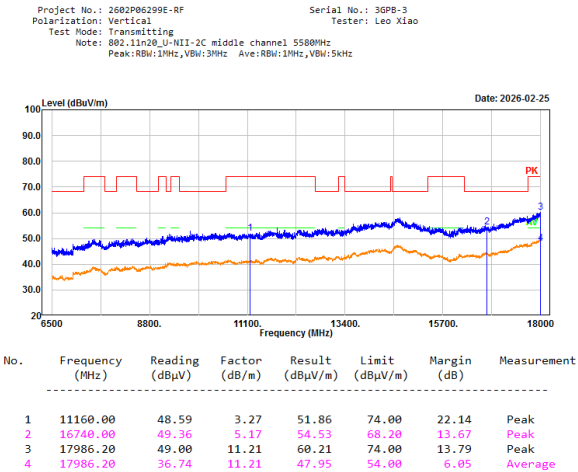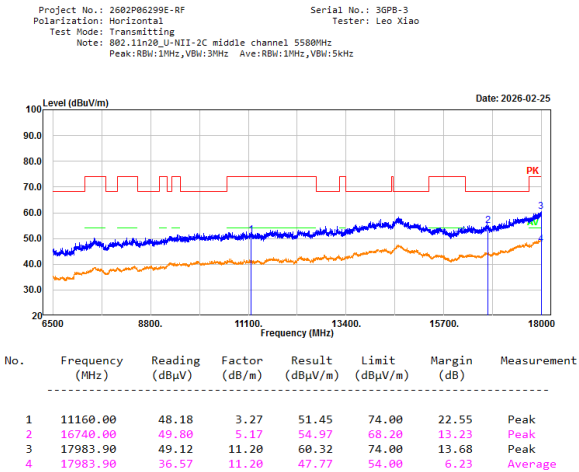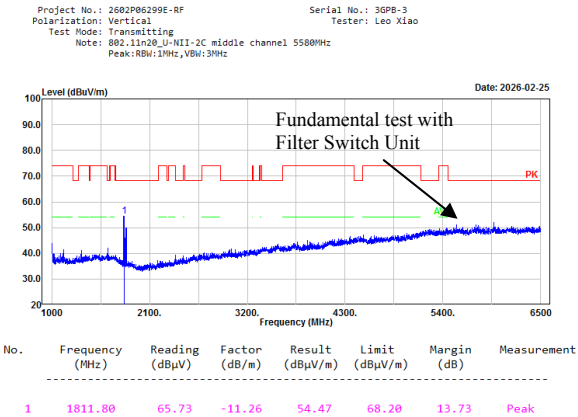


802.11 n20, High Channel, 5700MHz, Horizontal

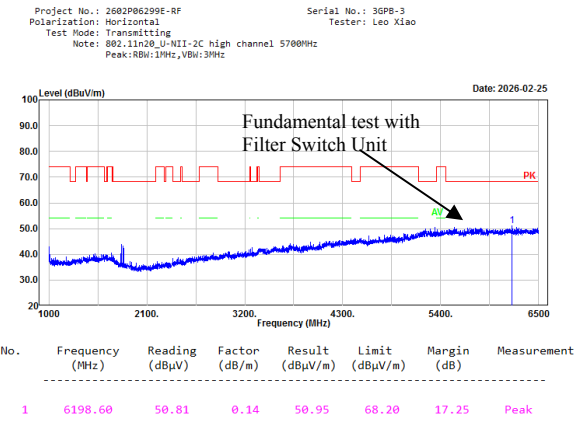




802.11 n20, High Channel, 5700MHz, Vertical

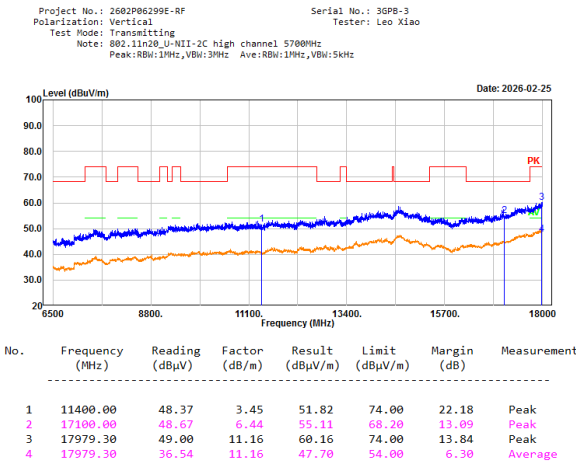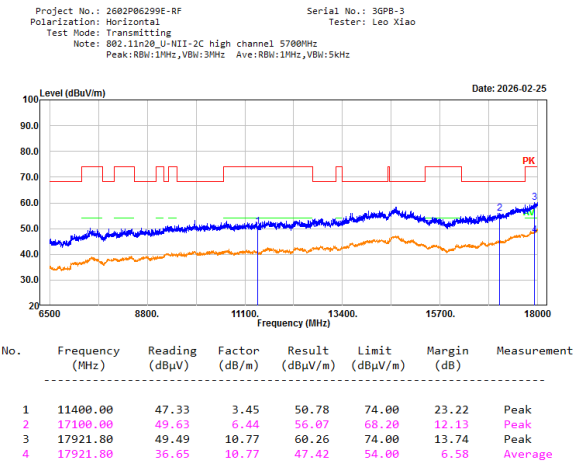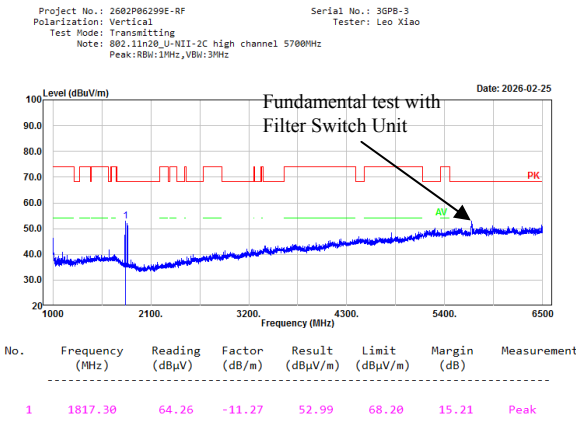


802.11 n40, Low Channel, 5510MHz, Horizontal

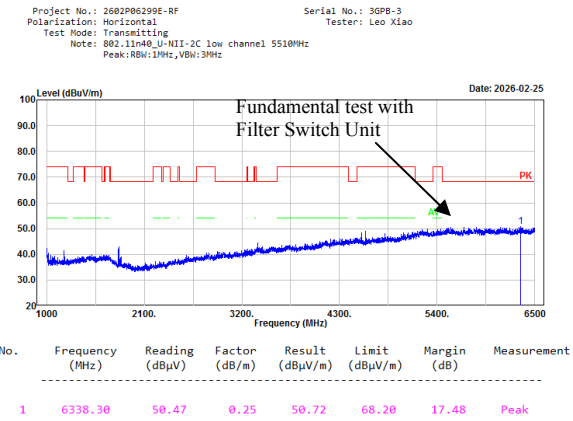




802.11 n40, Low Channel, 5510MHz, Vertical

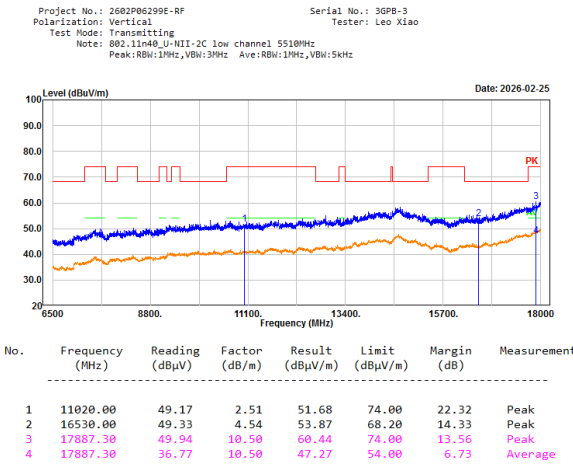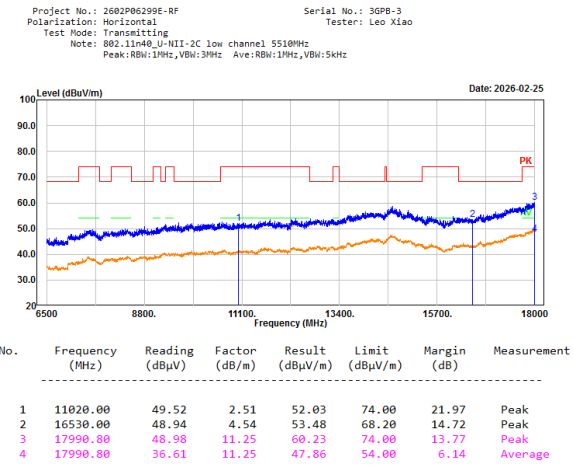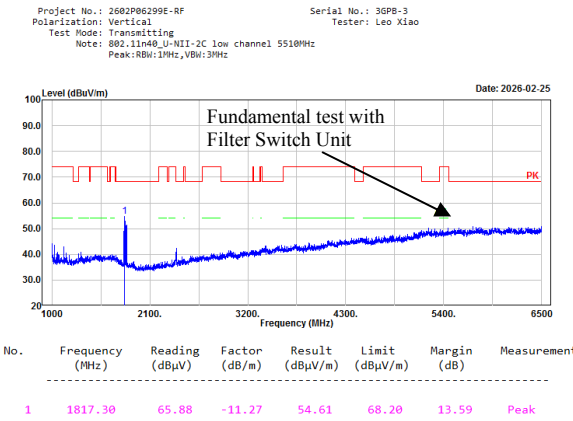


802.11 n40, Middle Channel, 5550MHz, Horizontal

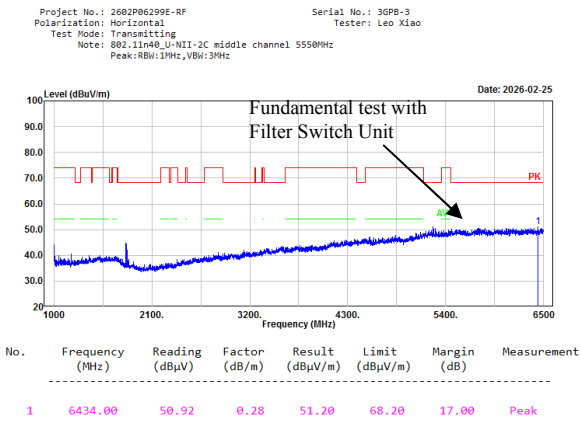




802.11 n40, Middle Channel, 5550MHz, Vertical

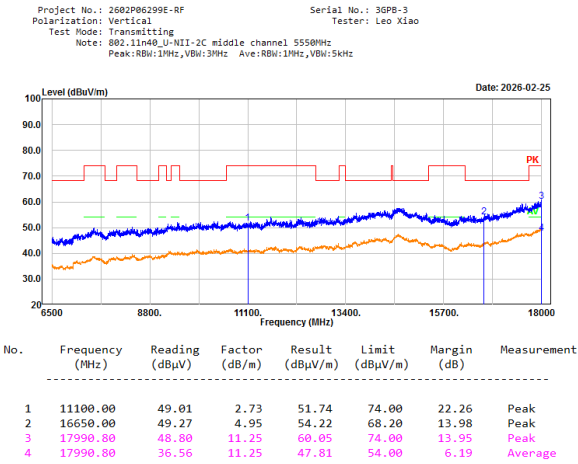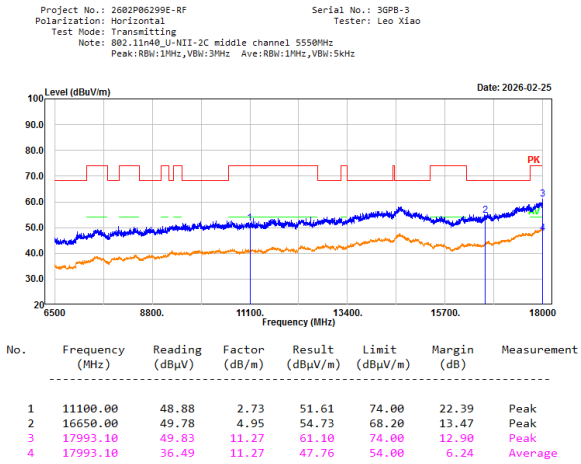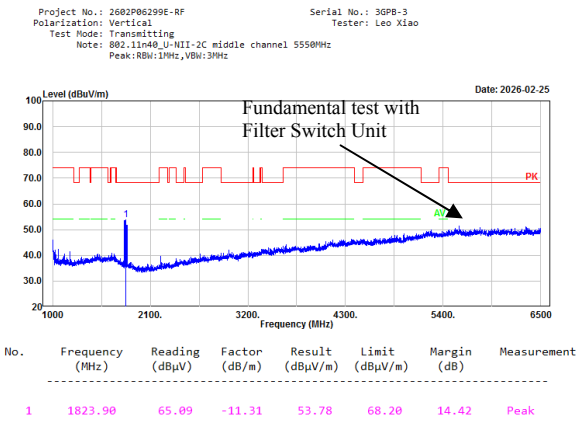


802.11 n40, High Channel, 5670MHz, Horizontal

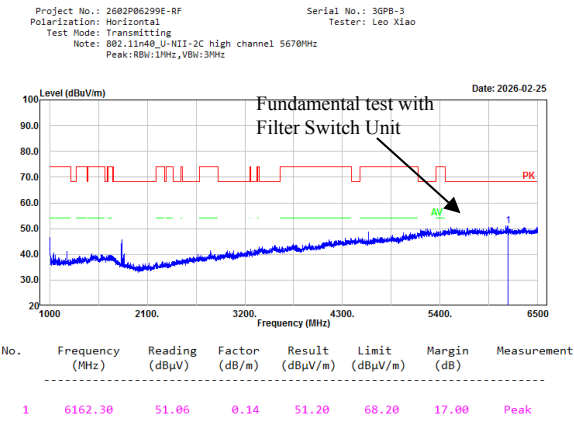




802.11 n40, High Channel, 5670MHz, Vertical

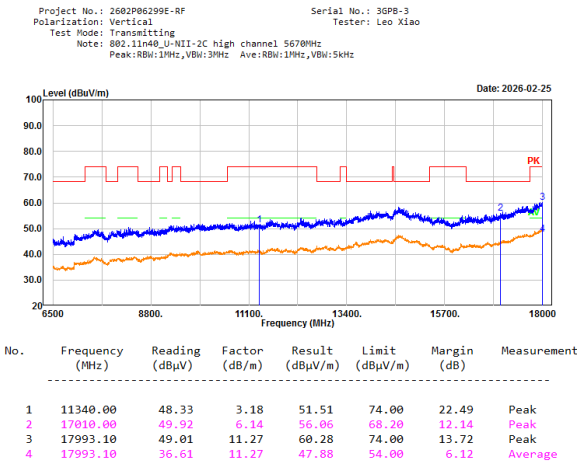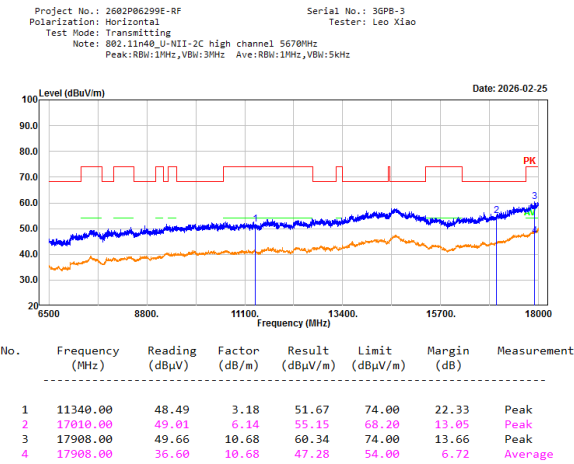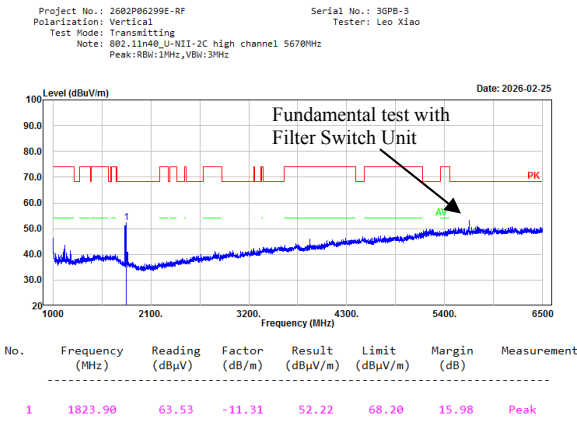


802.11 ac20, Low Channel, 5500MHz, Horizontal

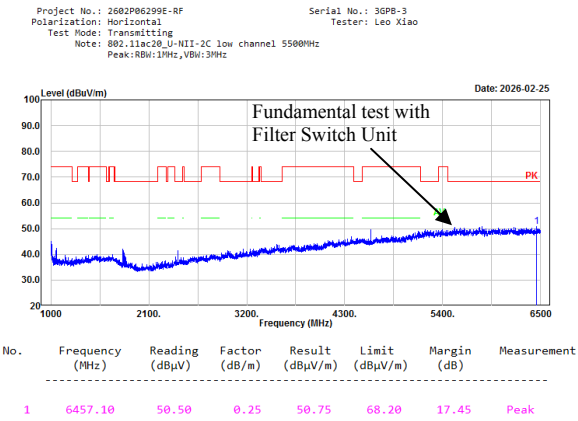




802.11 ac20, Low Channel, 5500MHz, Vertical

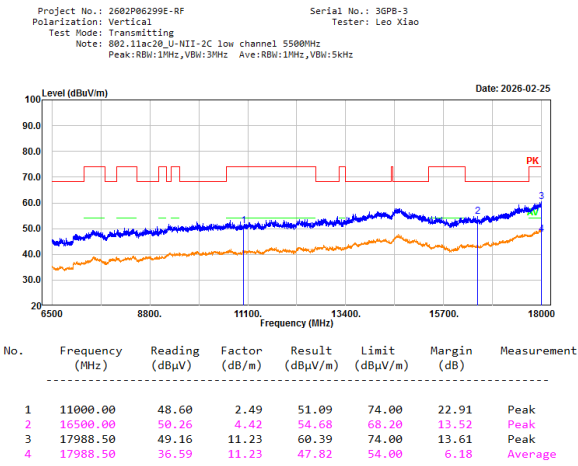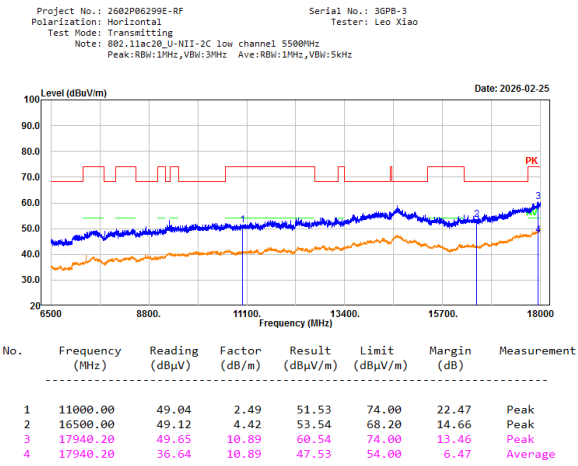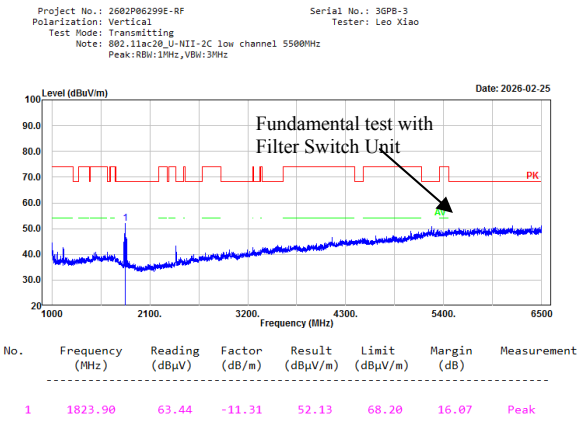


802.11 ac20, Middle Channel, 5580MHz, Horizontal

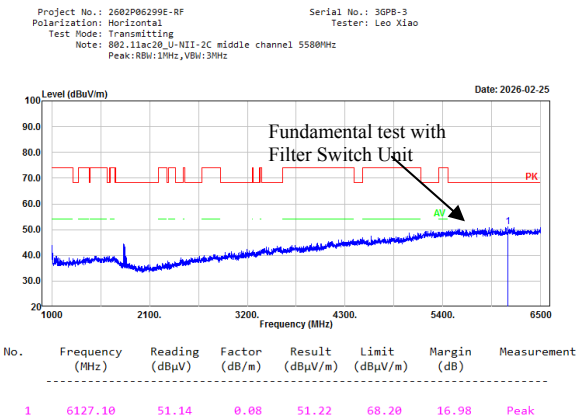




802.11 ac20, Middle Channel, 5580MHz, Vertical

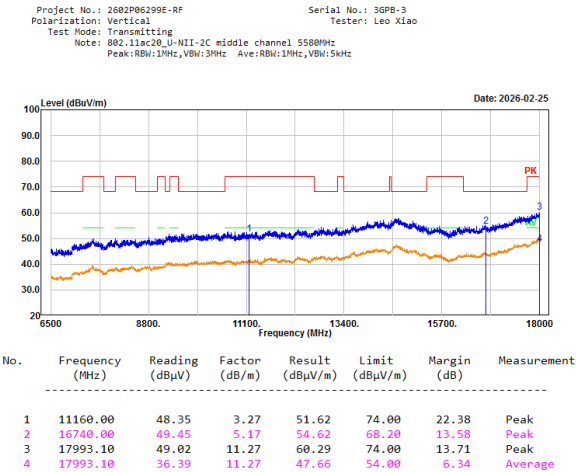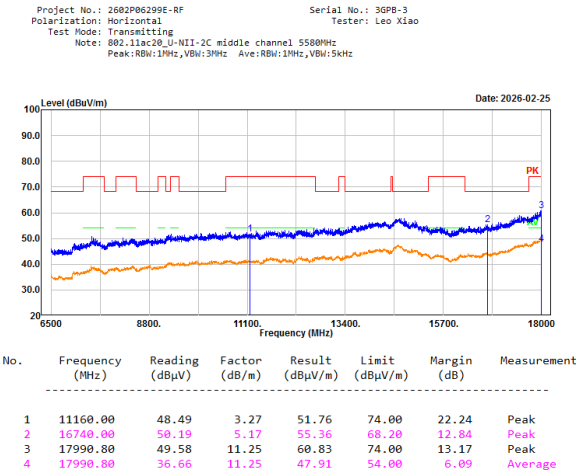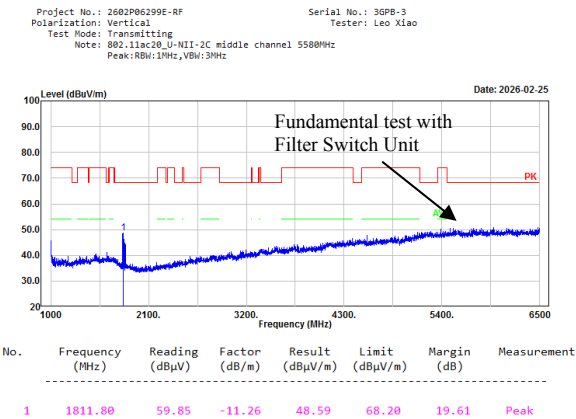


802.11 ac20, High Channel, 5700MHz, Horizontal

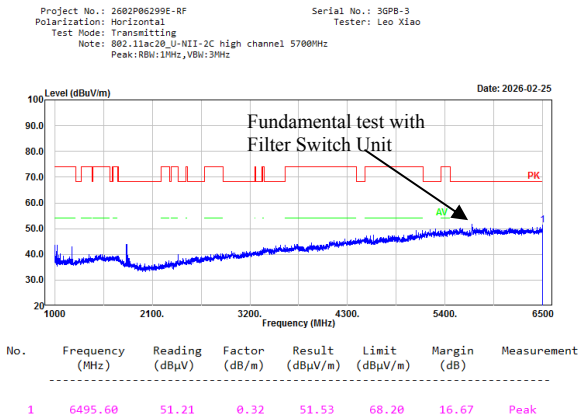




802.11 ac20, High Channel, 5700MHz, Vertical

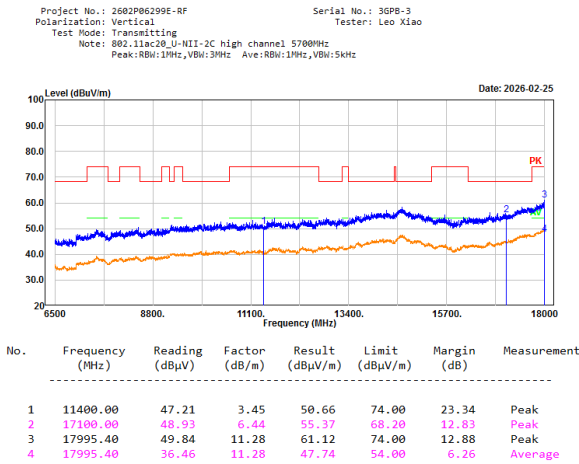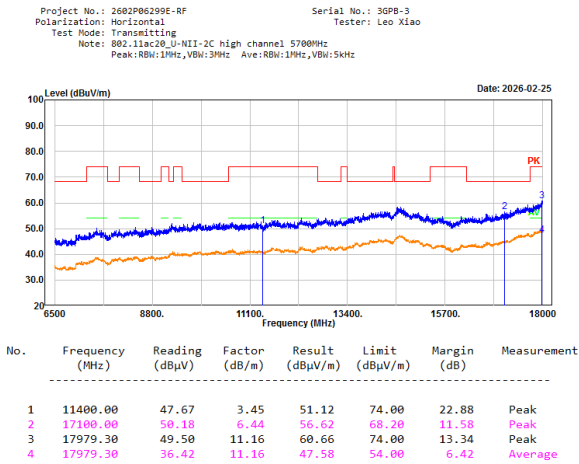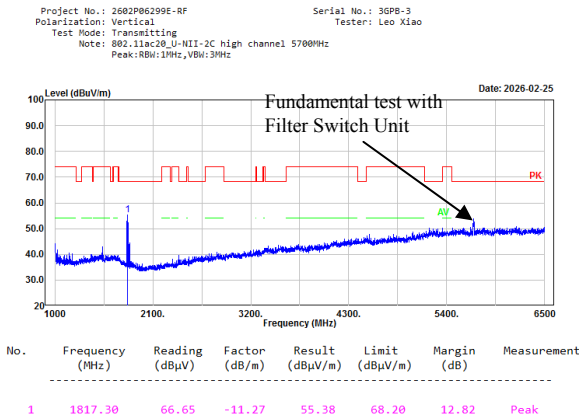


802.11 ac40, Low Channel, 5510MHz, Horizontal

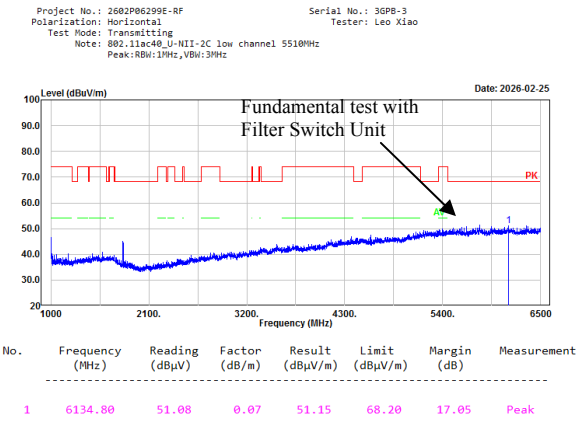




802.11 ac40, Low Channel, 5510MHz, Vertical

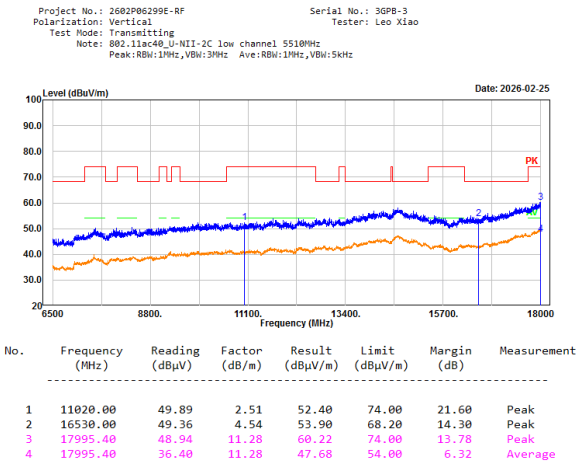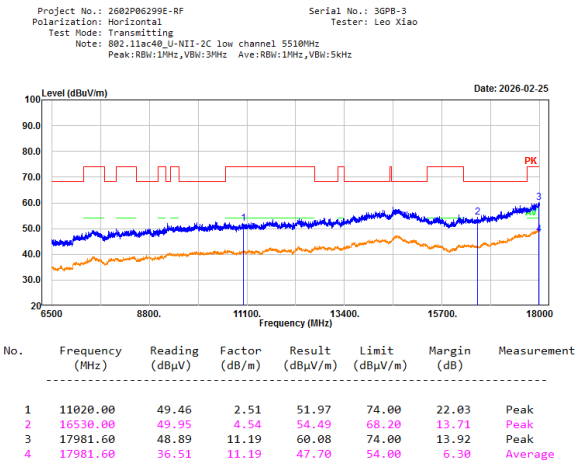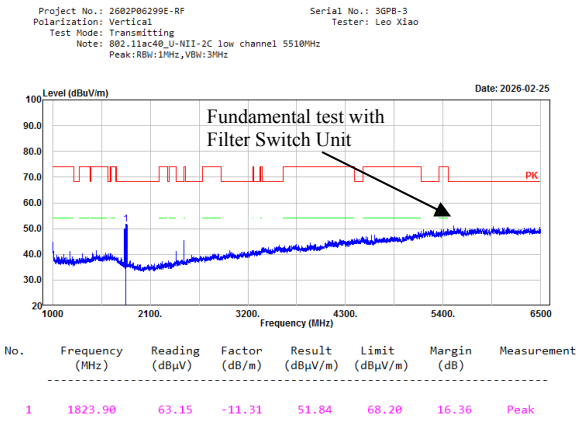


802.11 ac40, Middle Channel, 5550MHz, Horizontal

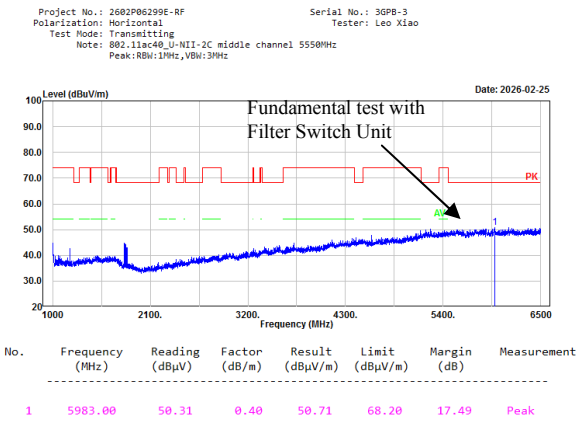




802.11 ac40, Middle Channel, 5550MHz, Vertical

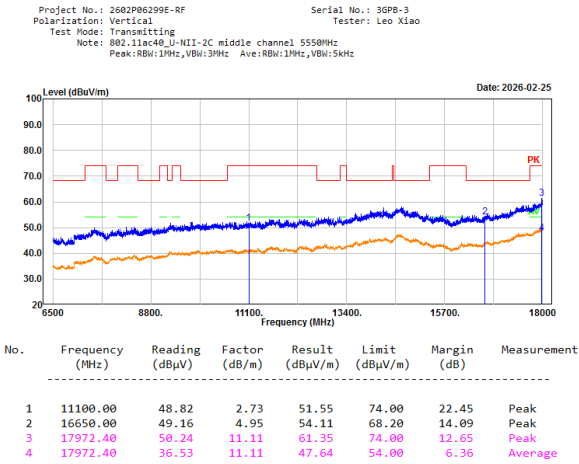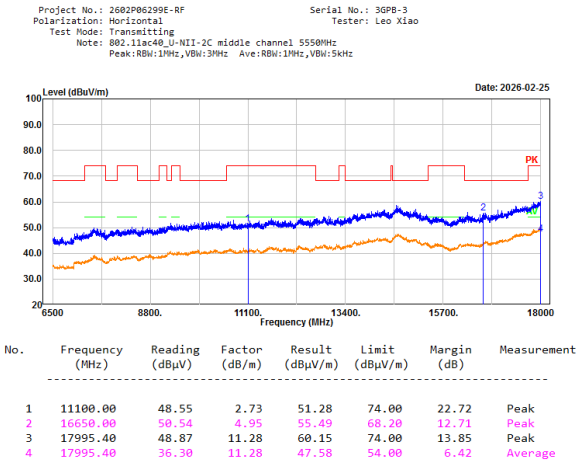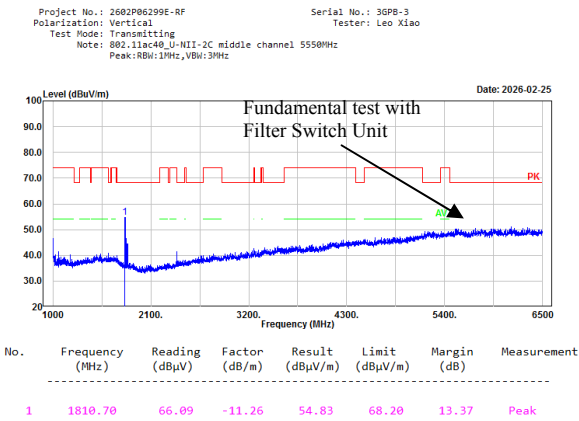


802.11 ac40, High Channel, 5670MHz, Horizontal

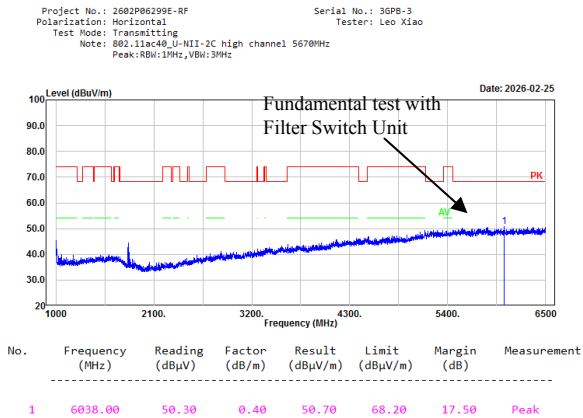




802.11 ac40, High Channel, 5670MHz, Vertical

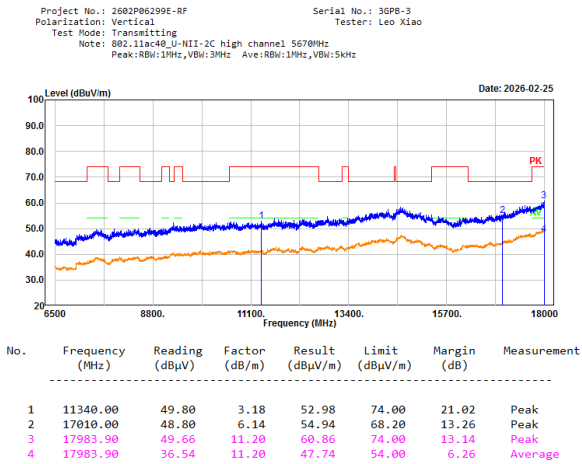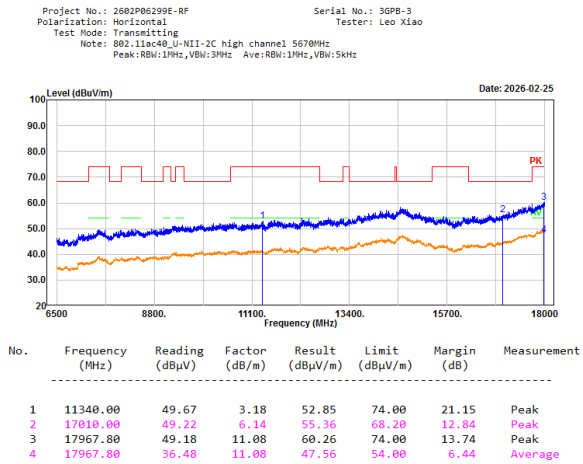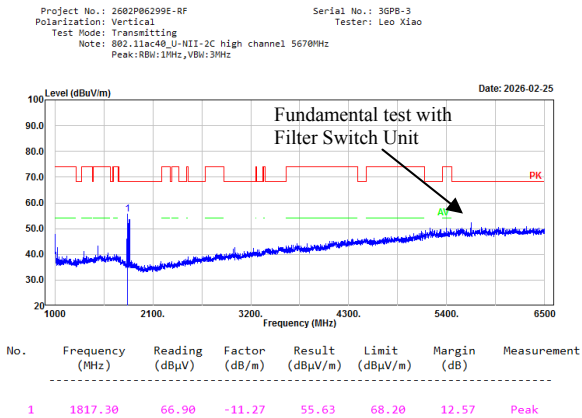


802.11ac80, Low Channel, 5530MHz, Horizontal

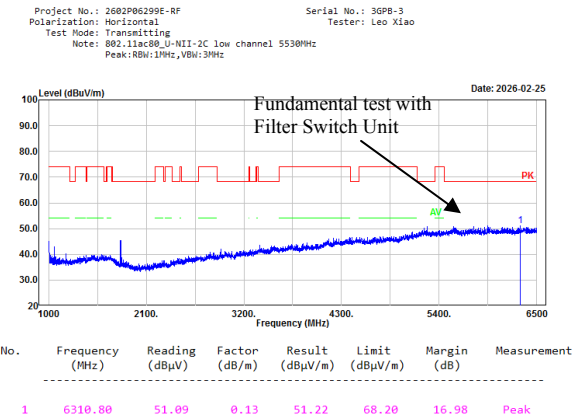




802.11ac80, Low Channel, 5530MHz, Vertical

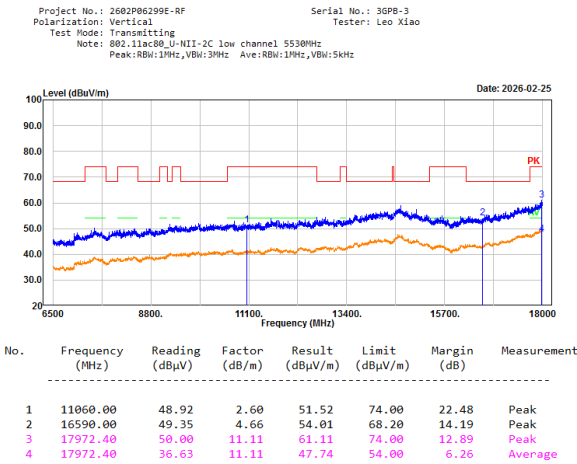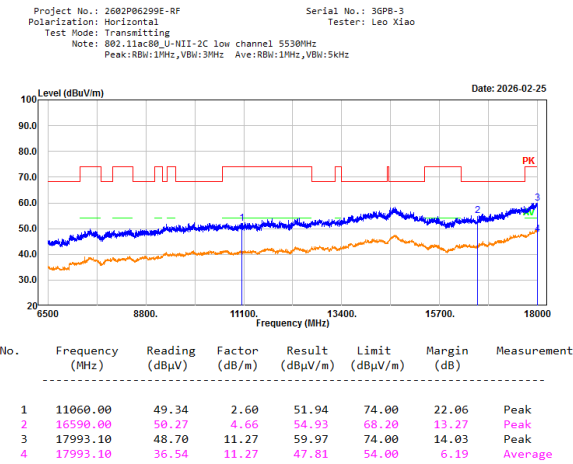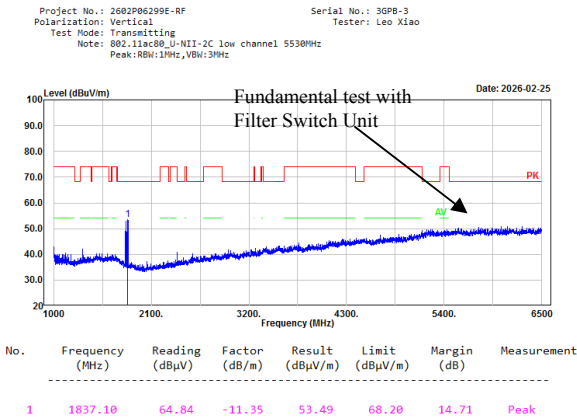

802.11ac80, High Channel, 5610MHz, Horizontal

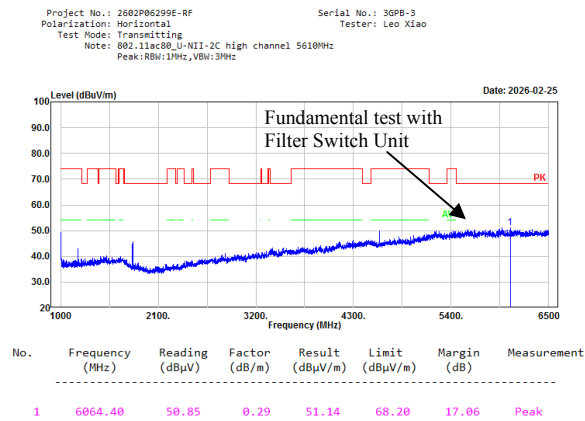


802.11ac80, High Channel, 5610MHz, Vertical

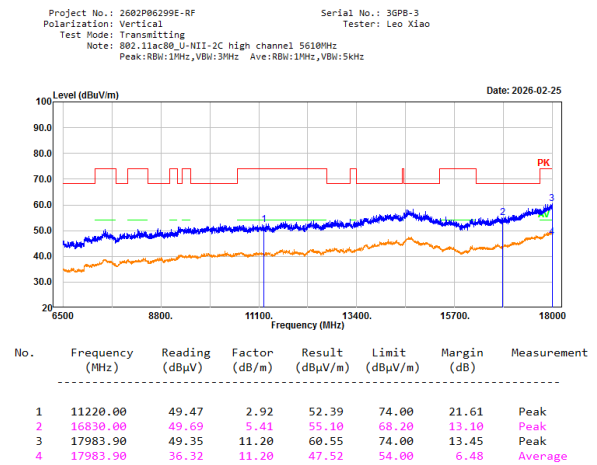
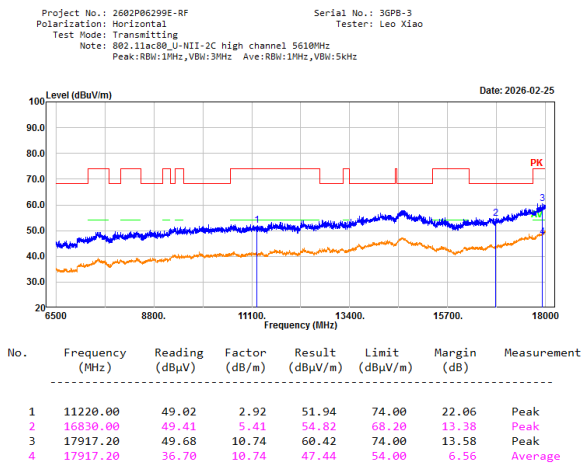
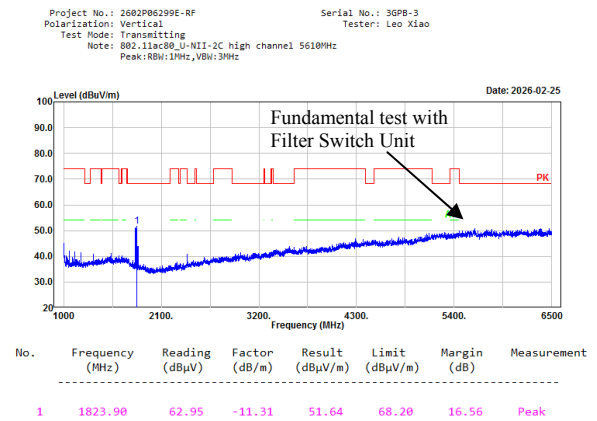


5725-5850MHz:

802.11a, Low Channel, 5745MHz, Horizontal

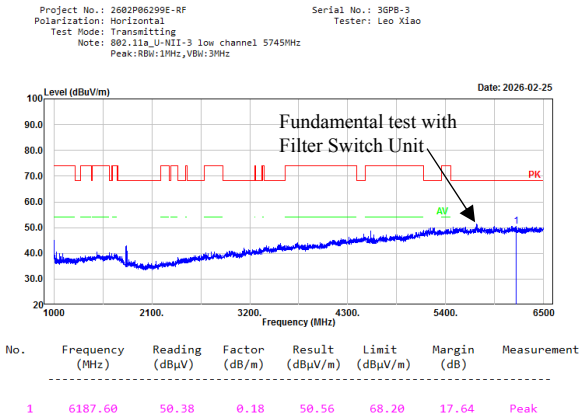


802.11a, Low Channel, 5745MHz, Vertical

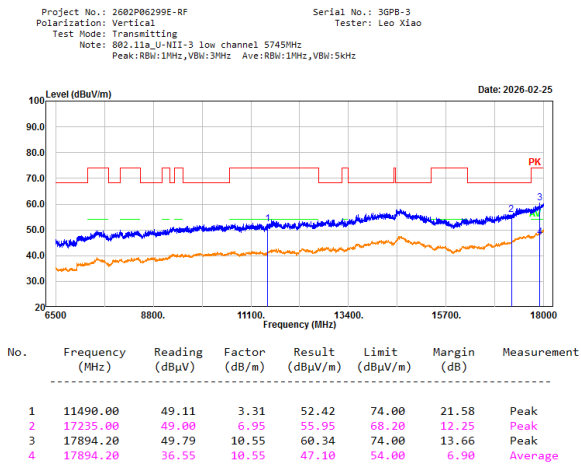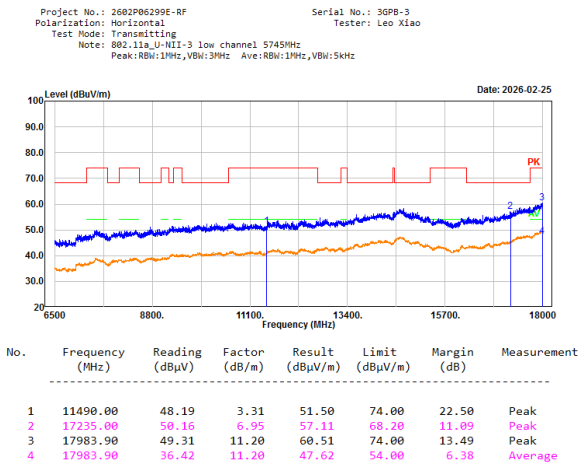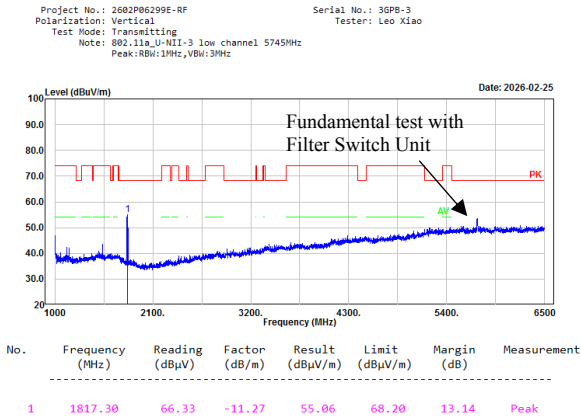

802.11a, Middle Channel, 5785MHz, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-3 middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

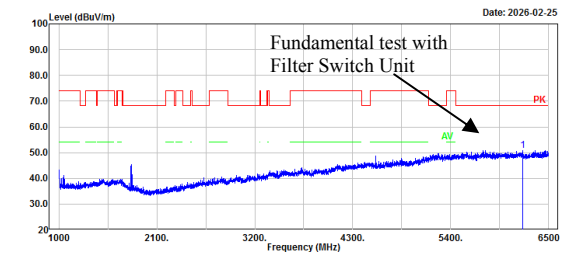


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6207.40	50.72	0.11	50.83	68.20	17.37	Peak

802.11a, Middle Channel, 5785MHz, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-3 middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3GPB-3
Tester: Leo Xiao

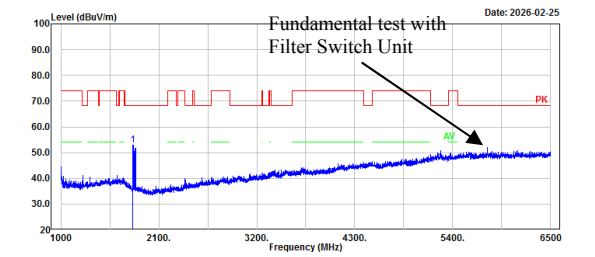

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1810.70	64.23	-11.26	52.97	68.20	15.23	Peak

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-3 middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 3GPB-3
Tester: Leo Xiao

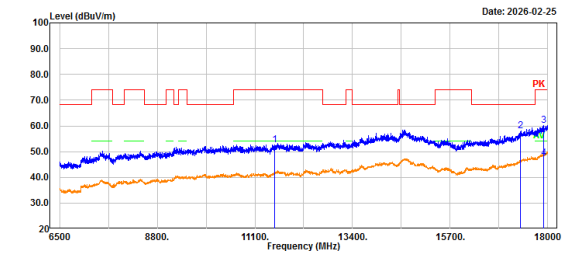

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11570.00	49.18	3.30	52.48	74.00	21.52	Peak
2	17355.00	51.03	7.12	58.15	68.20	10.05	Peak
3	17903.40	49.53	10.64	60.17	74.00	13.83	Peak
4	17903.40	36.72	10.64	47.36	54.00	6.64	Average


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-3 middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao



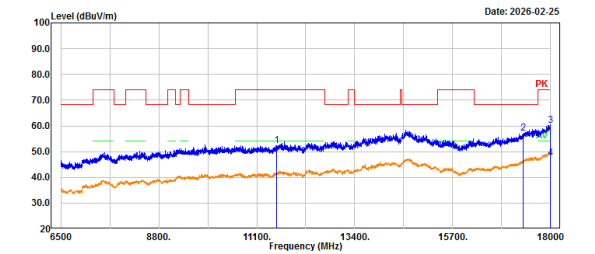


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11570.00	49.04	3.30	52.34	74.00	21.66	Peak
2	17355.00	50.14	7.12	57.26	68.20	10.94	Peak
3	17995.40	49.01	11.28	60.29	74.00	13.71	Peak
4	17995.40	36.32	11.28	47.60	54.00	6.40	Average


802.11a, High Channel, 5825MHz, Horizontal

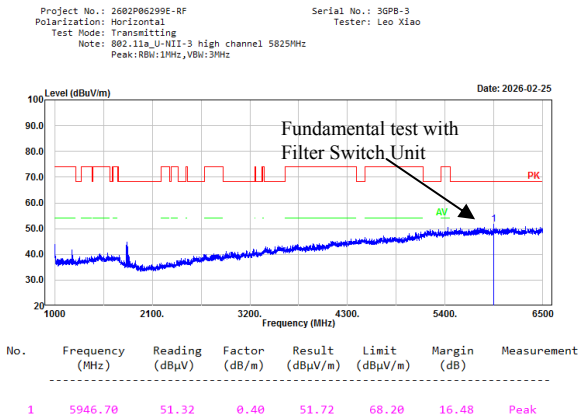




802.11a, High Channel, 5825MHz, Vertical

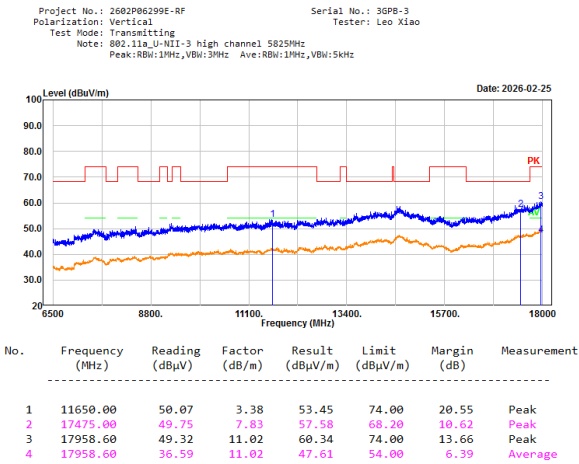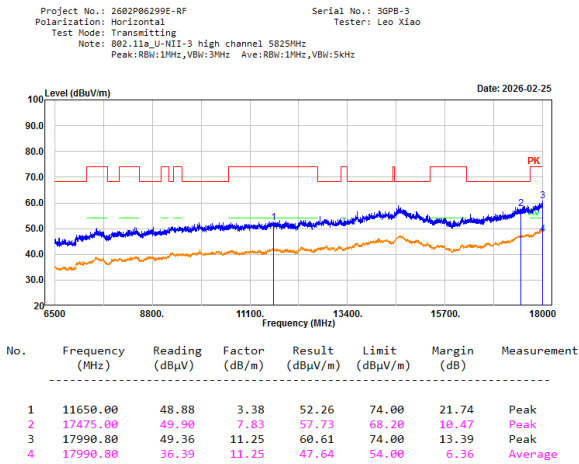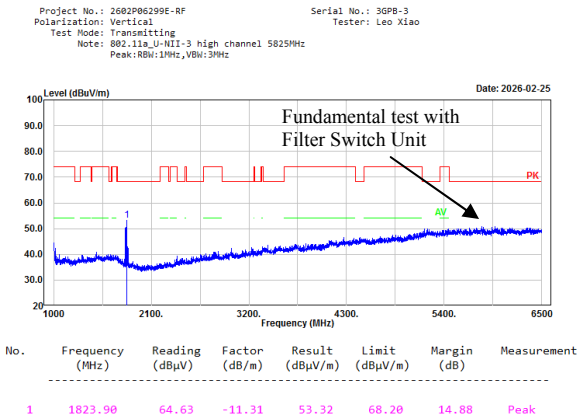

802.11 n20, Low Channel, 5745MHz, Horizontal

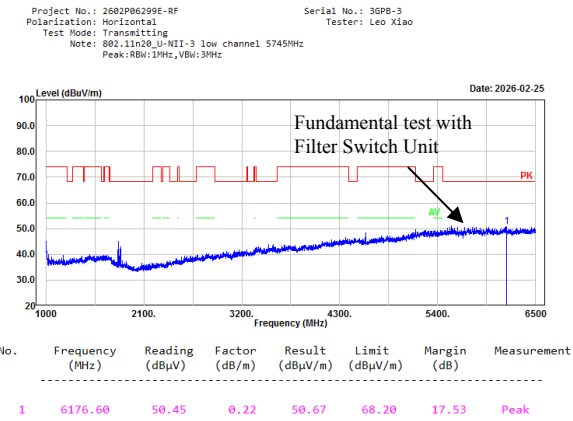

802.11 n20, Low Channel, 5745MHz, Vertical

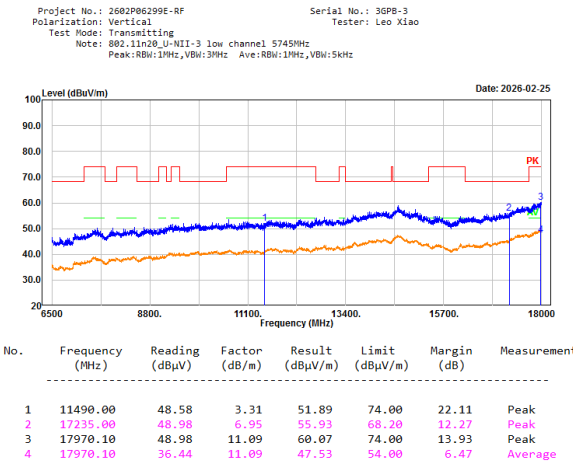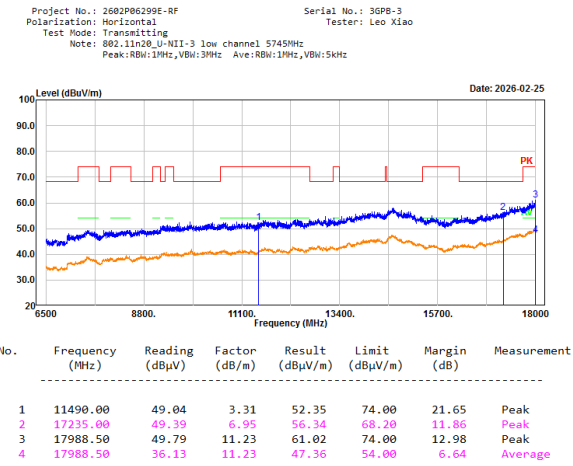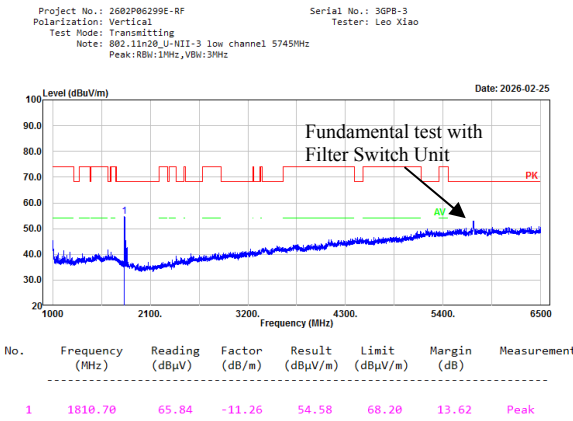


802.11 n20, Middle Channel, 5785MHz, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-3 middle channel 5785MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

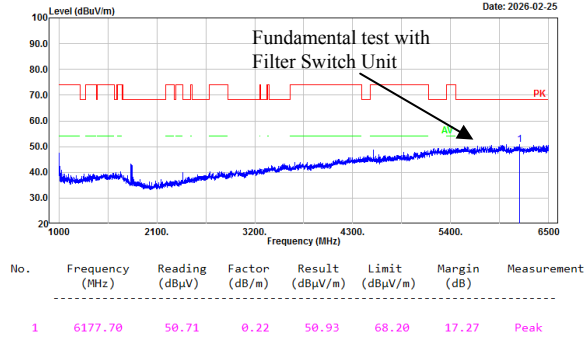


802.11 n20, Middle Channel, 5785MHz, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-3 middle channel 5785MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao


Date: 2026-02-25

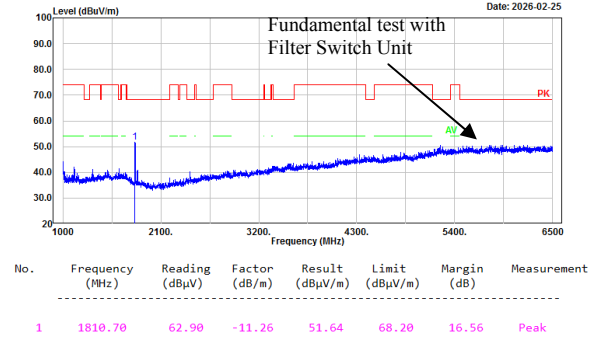

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-3 middle channel 5785MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao


Date: 2026-02-25

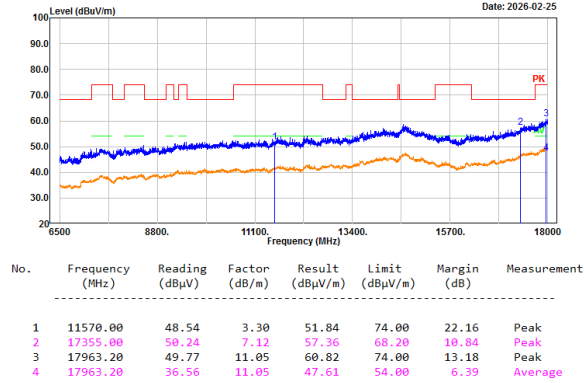


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-3 middle channel 5785MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao




Date: 2026-02-25

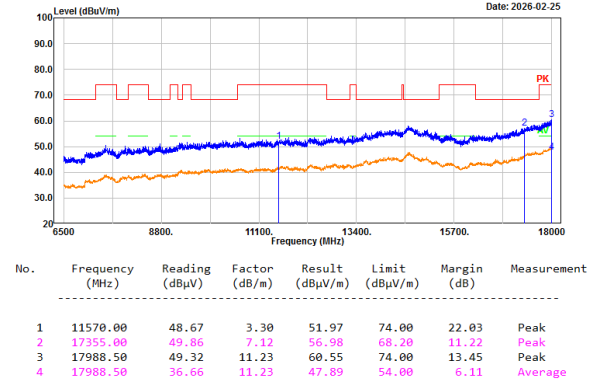


802.11 n20, High Channel, 5825MHz, Horizontal

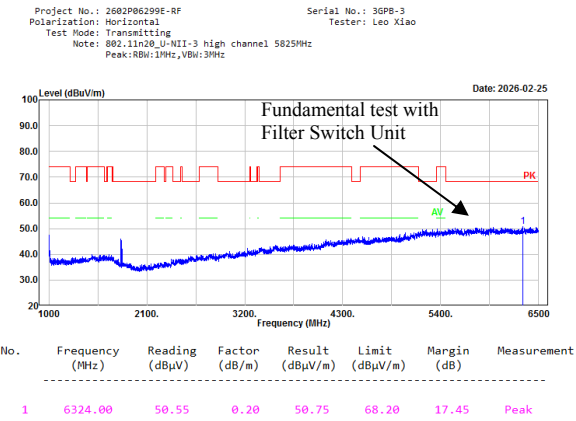




802.11 n20, High Channel, 5825MHz, Vertical

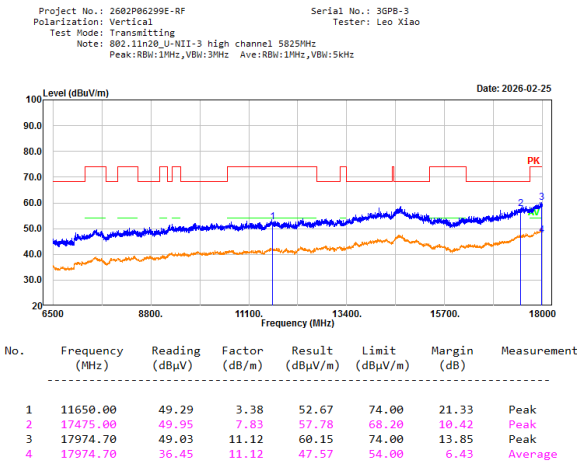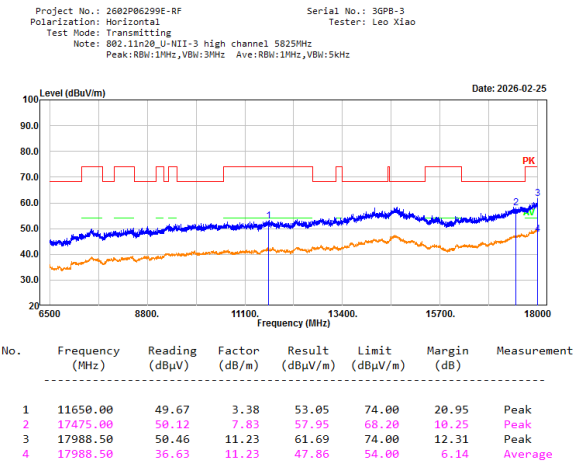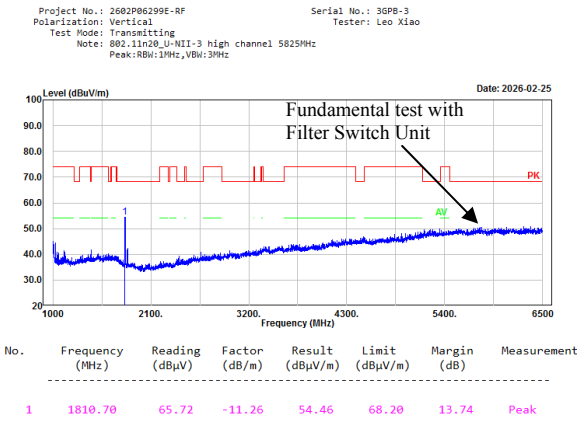


802.11 n40, Low Channel, 5755MHz, Horizontal

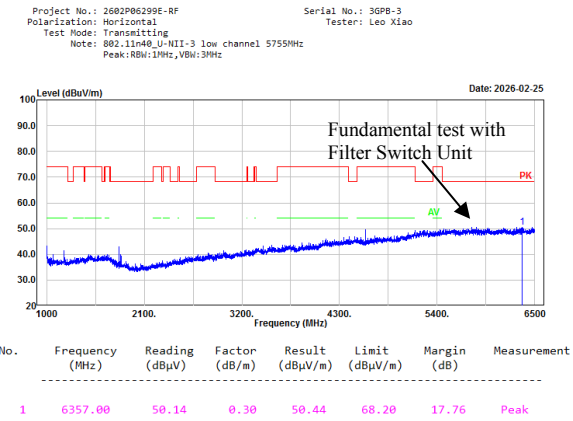




802.11 n40, Low Channel, 5755MHz, Vertical

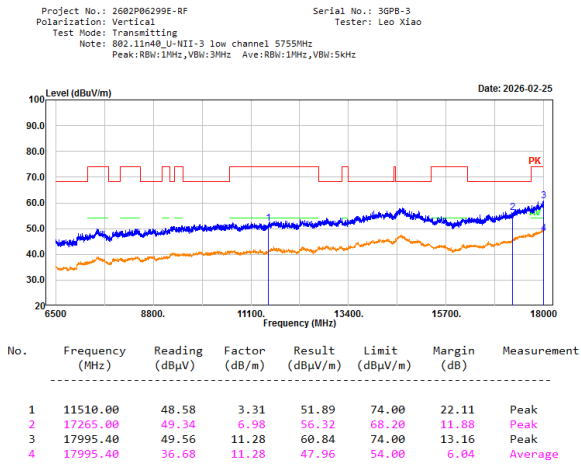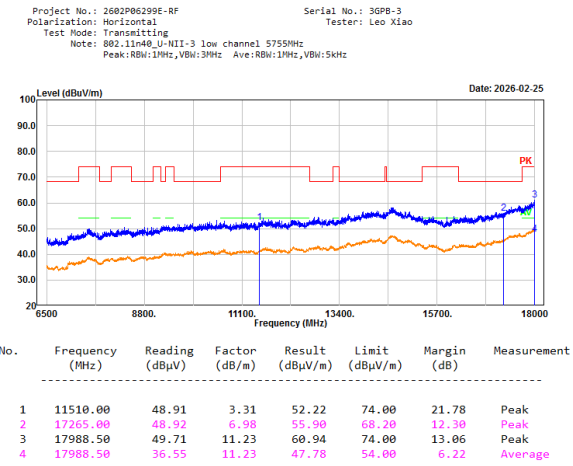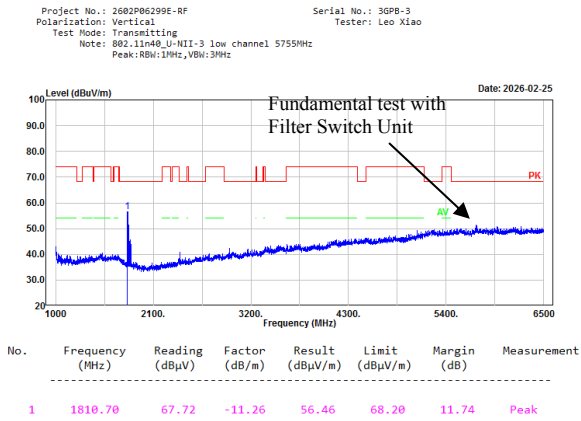


802.11 n40, High Channel, 5795MHz, Horizontal

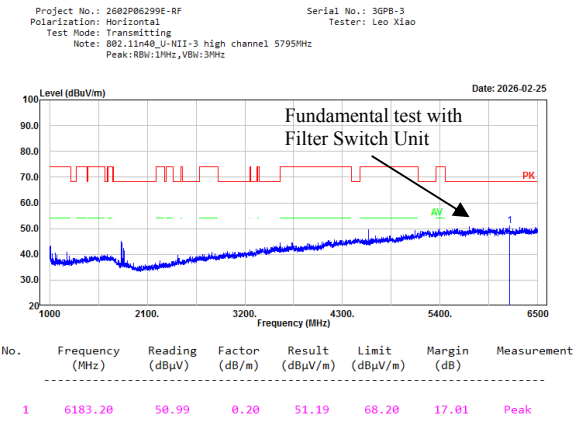




802.11 n40, High Channel, 5795MHz, Vertical

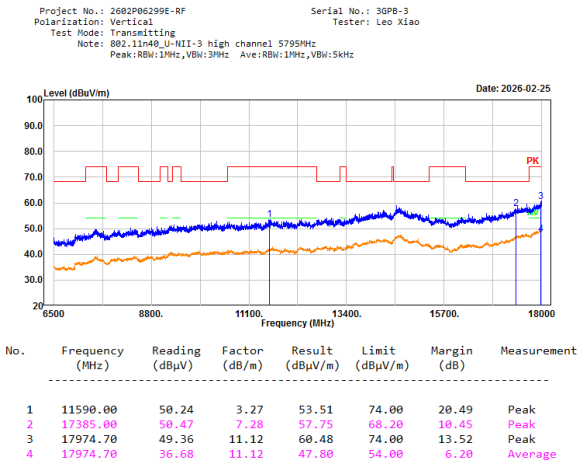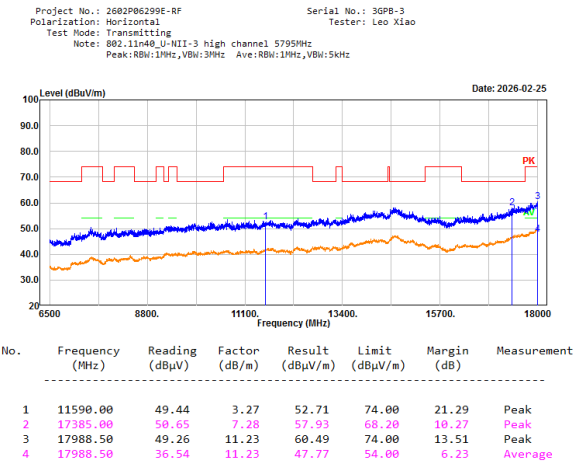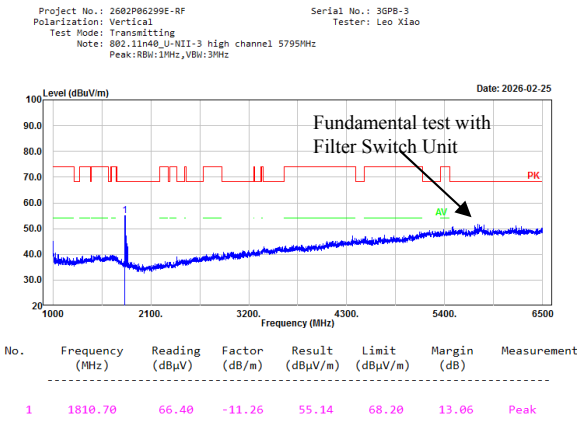

802.11 ac20, Low Channel, 5745MHz, Horizontal

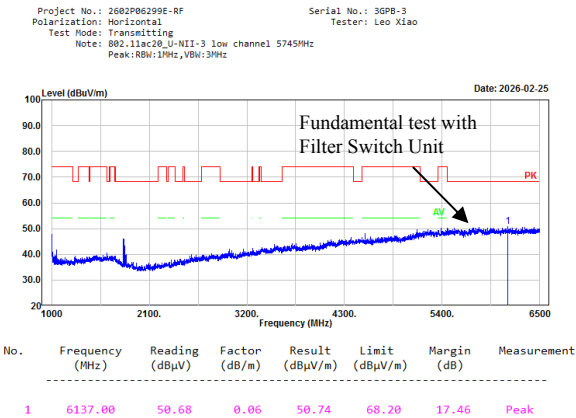

802.11 ac20, Low Channel, 5745MHz, Vertical

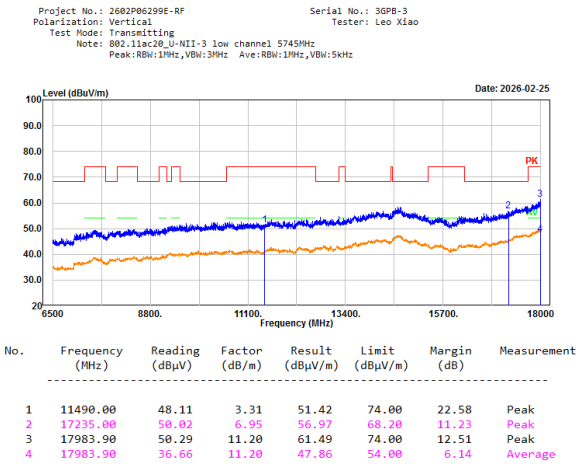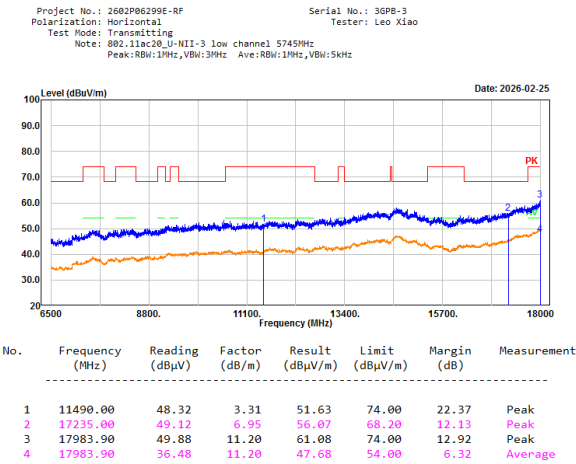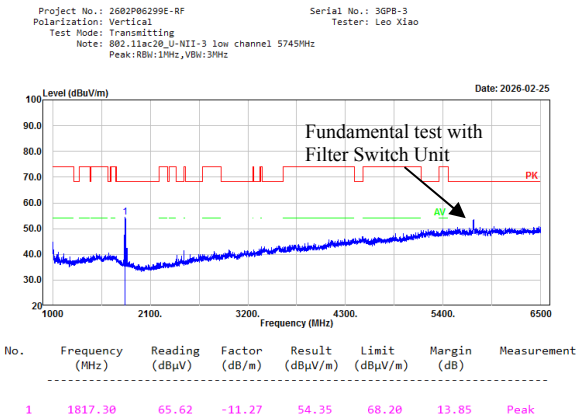


802.11 ac20, Middle Channel, 5785MHz, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 middle channel 5785MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

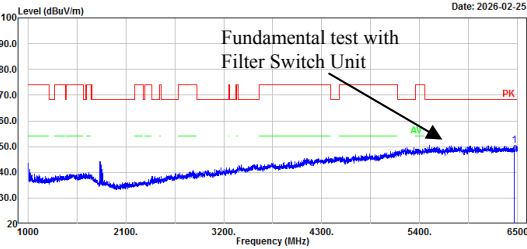


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6459.30	50.20	0.23	50.43	68.20	17.77	Peak

802.11 ac20, Middle Channel, 5785MHz, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 middle channel 5785MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

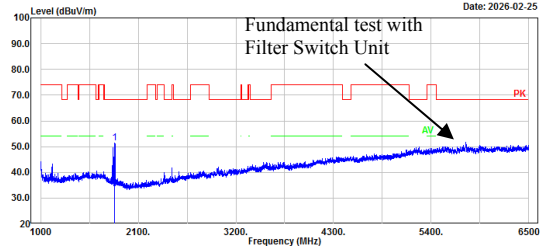


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1837.10	62.88	-11.35	51.53	68.20	16.67	Peak

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 middle channel 5785MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

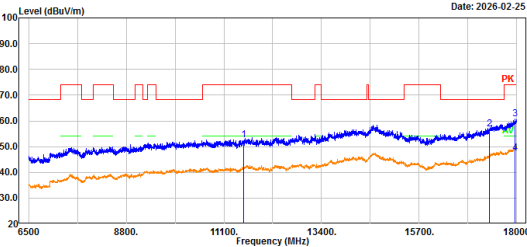


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11570.00	49.22	3.30	52.52	74.00	21.48	Peak
2	17355.00	49.80	7.12	56.92	68.20	11.28	Peak
3	17949.40	49.81	10.97	60.78	74.00	13.22	Peak
4	17949.40	36.42	10.97	47.39	54.00	6.61	Average

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 middle channel 5785MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25



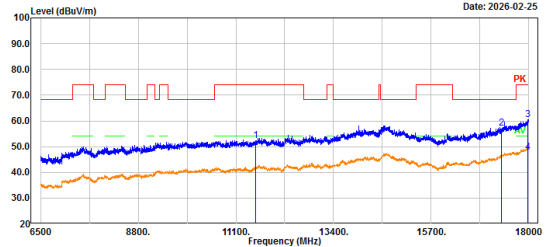


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11570.00	49.02	3.30	52.32	74.00	21.68	Peak
2	17355.00	49.87	7.12	56.99	68.20	11.21	Peak
3	17977.00	49.39	11.15	60.54	74.00	13.46	Peak
4	17977.00	36.67	11.15	47.82	54.00	6.18	Average

802.11 ac20, High Channel, 5825MHz, Horizontal

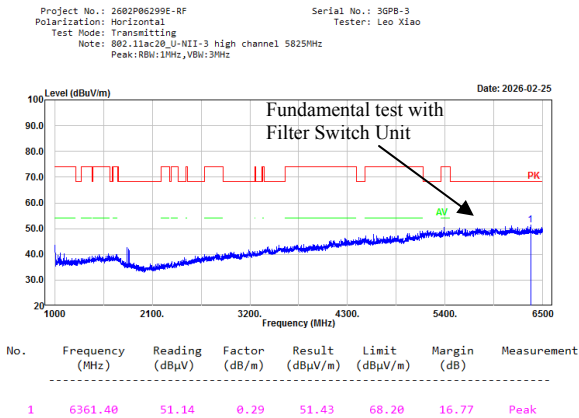


802.11 ac20, High Channel, 5825MHz, Vertical

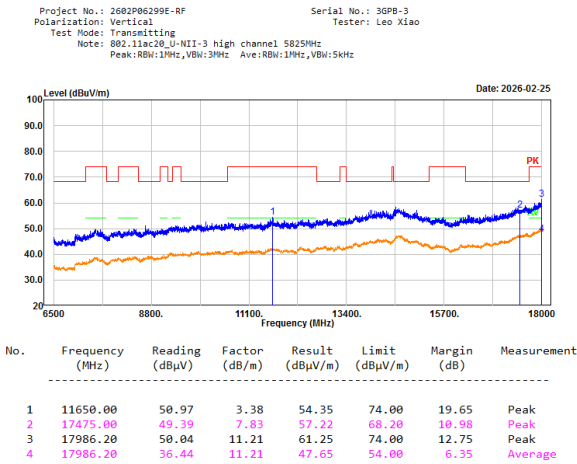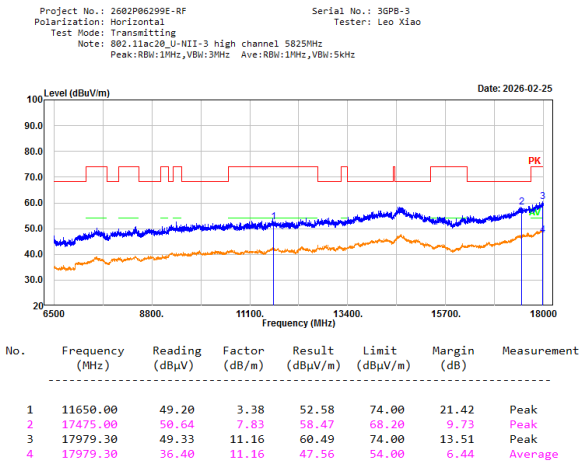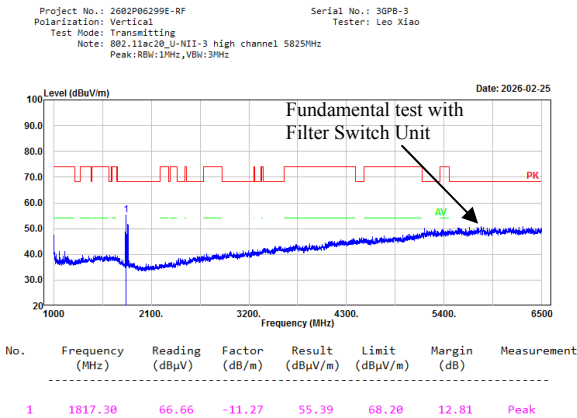

802.11 ac40, Low Channel, 5755MHz, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3 low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

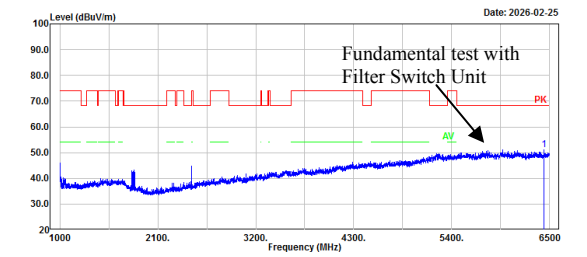


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6434.00	50.80	0.28	51.08	68.20	17.12	Peak

802.11 ac40, Low Channel, 5755MHz, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3 low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3GPB-3
Tester: Leo Xiao

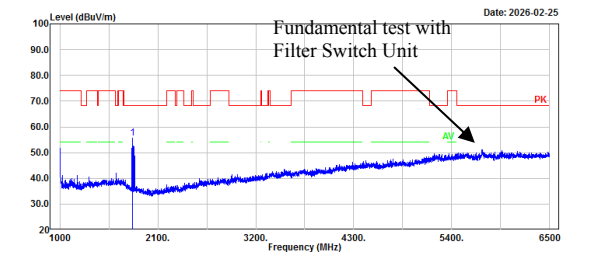

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	1817.30	66.80	-11.27	55.53	68.20	12.67	Peak

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3 low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 3GPB-3
Tester: Leo Xiao

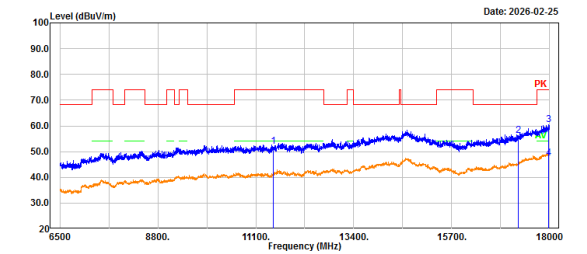

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11510.00	48.62	3.31	51.93	74.00	22.07	Peak
2	17265.00	49.27	6.98	56.25	68.20	11.95	Peak
3	17972.40	49.21	11.11	60.32	74.00	13.68	Peak
4	17972.40	36.51	11.11	47.62	54.00	6.38	Average


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3 low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao



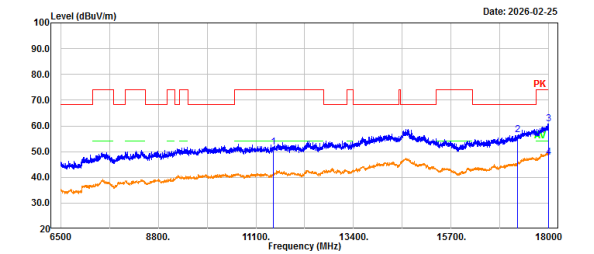


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11510.00	48.52	3.31	51.83	74.00	22.17	Peak
2	17265.00	49.55	6.98	56.53	68.20	11.67	Peak
3	17990.80	49.62	11.25	60.87	74.00	13.13	Peak
4	17990.80	36.53	11.25	47.78	54.00	6.22	Average


802.11 ac40, High Channel, 5795MHz, Horizontal

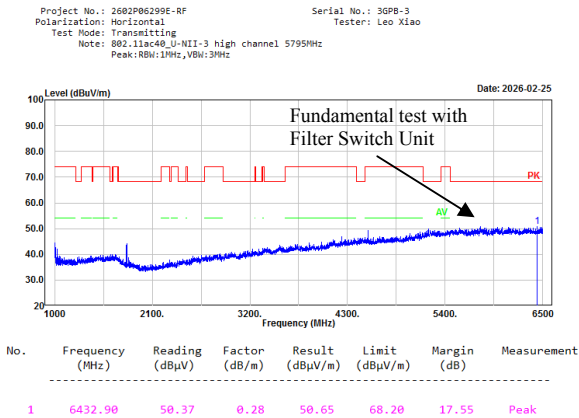




802.11 ac40, High Channel, 5795MHz, Vertical

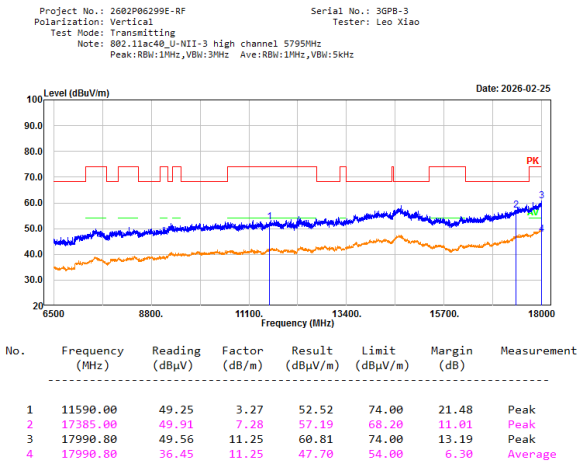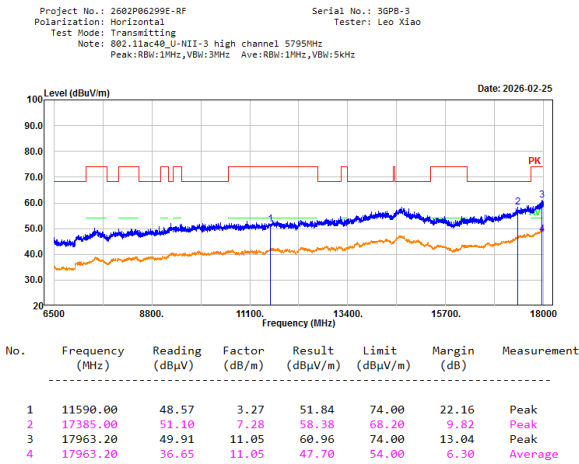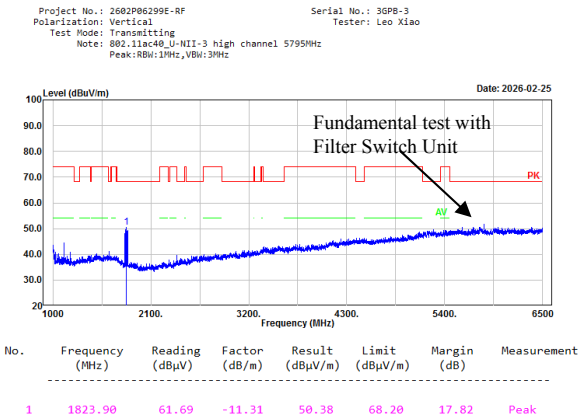

802.11ac80, Middle Channel, 5775MHz,
Horizontal

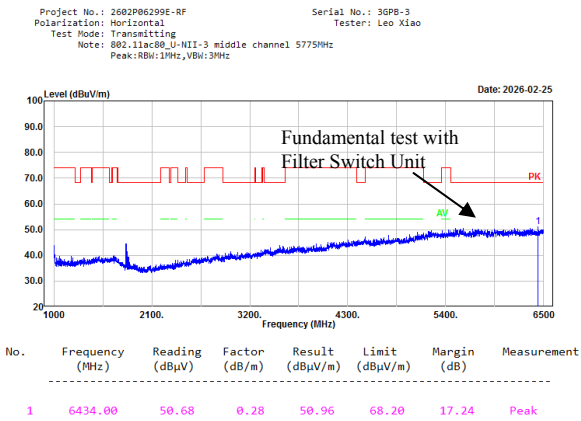


802.11ac80, Middle Channel, 5775MHz,
Vertical

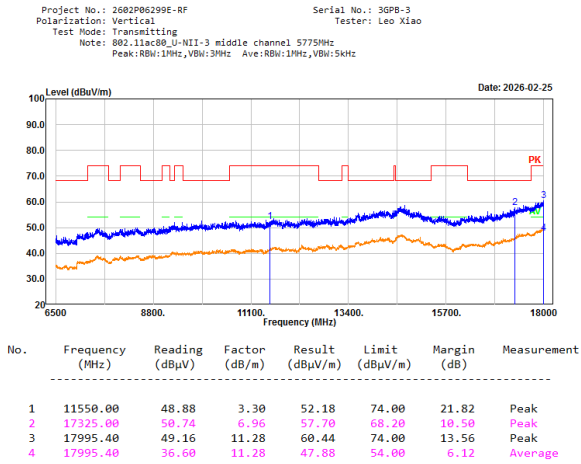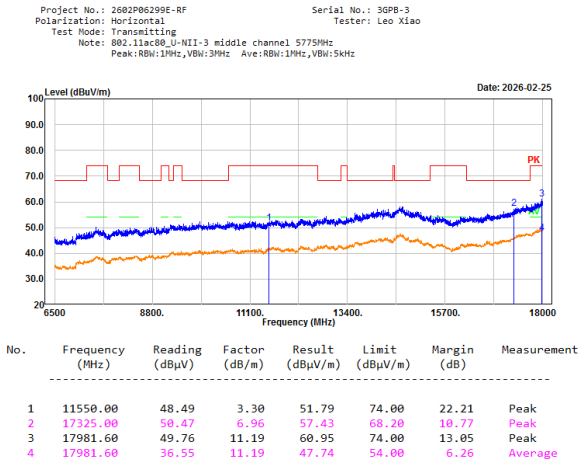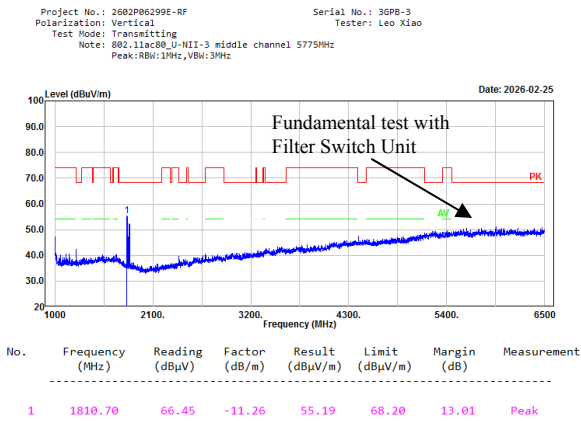




18-40GHz:

No Emission was detected in the range 18-40GHz, test was performed on the mode and channel which with the maximum power.

802.11a 5745MHz, Horizontal

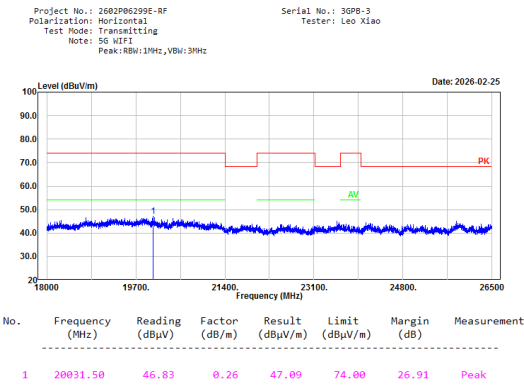


802.11a 5745MHz, Vertical

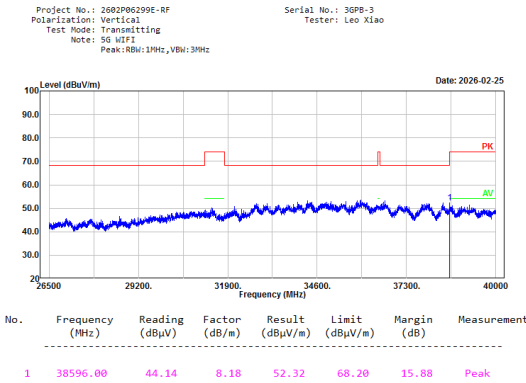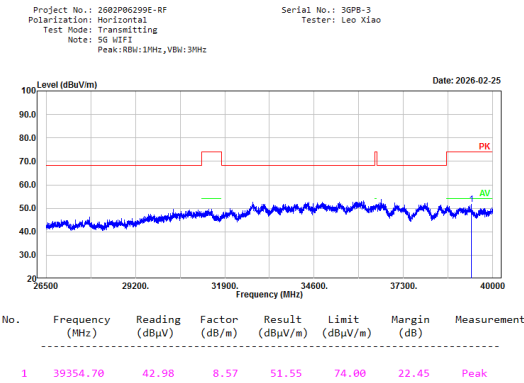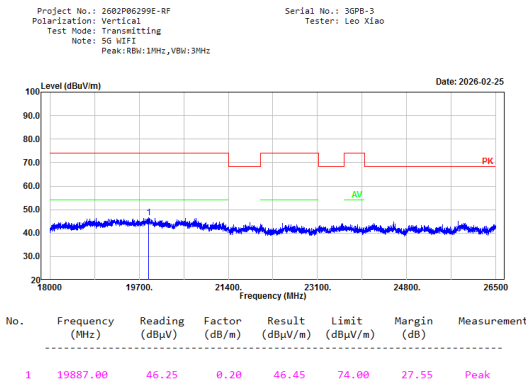

**Bandedge:
5150-5250MHz:****802.11a, 5180MHz, Bandedge, Horizontal**

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1 low channel 5180MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

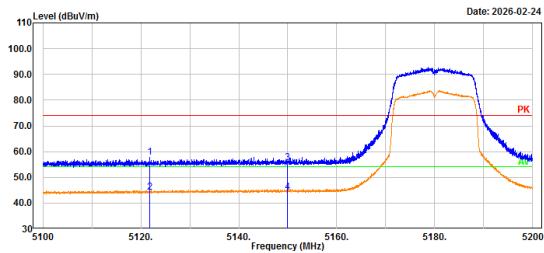


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5121.84	50.45	7.26	57.71	74.00	16.29	Peak
2	5121.84	36.96	7.26	44.22	54.00	9.78	Average
3	5150.00	48.09	7.48	55.57	74.00	18.43	Peak
4	5150.00	36.85	7.48	44.33	54.00	9.67	Average

802.11a, 5180MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1 low channel 5180MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

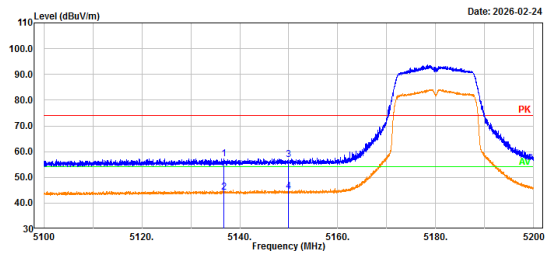


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5136.76	49.92	7.37	57.29	74.00	16.71	Peak
2	5136.76	36.81	7.37	44.18	54.00	9.82	Average
3	5150.00	49.26	7.48	56.74	74.00	17.26	Peak
4	5150.00	36.86	7.48	44.34	54.00	9.66	Average

802.11a, 5240MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1 high channel 5240MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

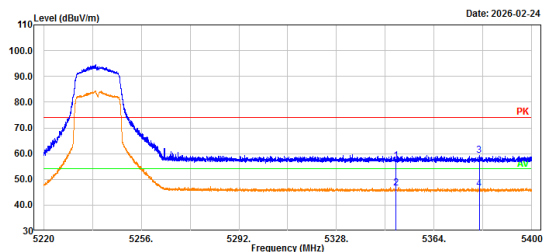


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	49.30	8.02	57.32	74.00	16.68	Peak
2	5350.00	38.50	8.02	46.52	54.00	7.48	Average
3	5380.60	51.30	7.99	59.29	74.00	14.71	Peak
4	5380.60	38.45	7.99	46.44	54.00	7.56	Average

802.11a, 5240MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1 high channel 5240MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

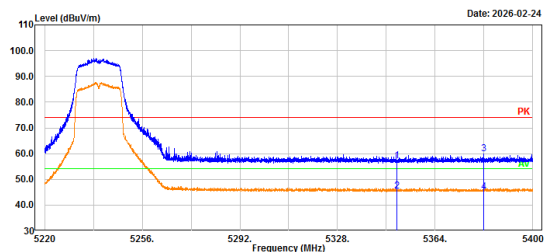


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	49.22	8.02	57.24	74.00	16.76	Peak
2	5350.00	37.27	8.02	45.29	54.00	8.71	Average
3	5381.96	51.79	7.99	59.78	74.00	14.22	Peak
4	5381.96	37.21	7.99	45.20	54.00	8.80	Average

802.11 n20, 5180MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-1 low channel 5180MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

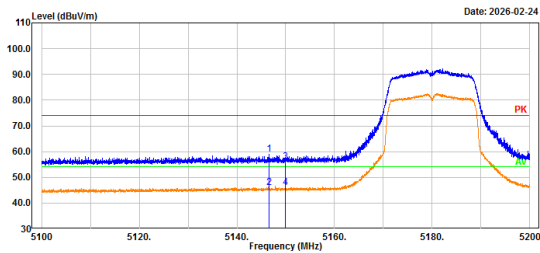


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5146.62	51.55	7.46	59.01	74.00	14.99	Peak
2	5146.62	38.56	7.46	46.02	54.00	7.98	Average
3	5150.00	48.56	7.48	56.04	74.00	17.96	Peak
4	5150.00	38.63	7.48	46.11	54.00	7.89	Average

802.11 n20, 5180MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-1 low channel 5180MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

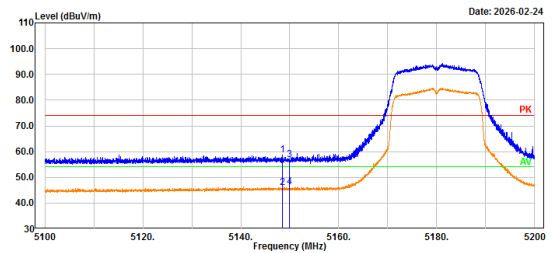


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5148.46	51.17	7.46	58.63	74.00	15.37	Peak
2	5148.46	38.53	7.46	45.99	54.00	8.01	Average
3	5150.00	49.46	7.48	56.94	74.00	17.06	Peak
4	5150.00	38.72	7.48	46.20	54.00	7.80	Average

802.11 n20, 5240MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-1 high channel 5240MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

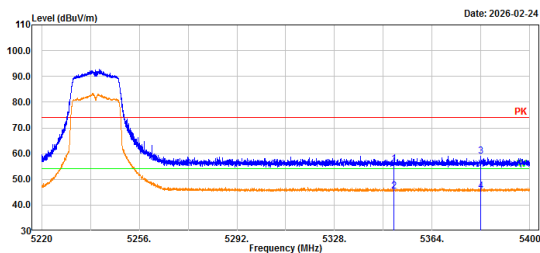


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	47.89	8.02	55.91	74.00	18.09	Peak
2	5350.00	37.41	8.02	45.43	54.00	8.57	Average
3	5381.78	51.04	7.99	59.03	74.00	14.97	Peak
4	5381.78	37.33	7.99	45.32	54.00	8.68	Average

802.11 n20, 5240MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-1 high channel 5240MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

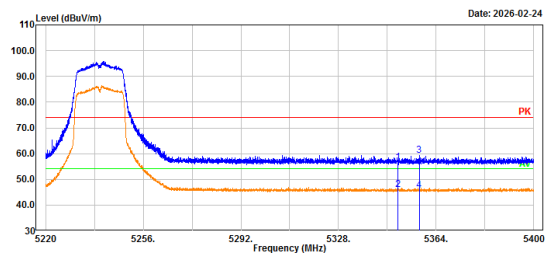


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	48.60	8.02	56.62	74.00	17.38	Peak
2	5350.00	37.83	8.02	45.85	54.00	8.15	Average
3	5357.74	51.40	8.01	59.41	74.00	14.59	Peak
4	5357.74	37.74	8.01	45.75	54.00	8.25	Average

802.11 n40, 5190MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n40_U-NII-1 low channel 5190MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

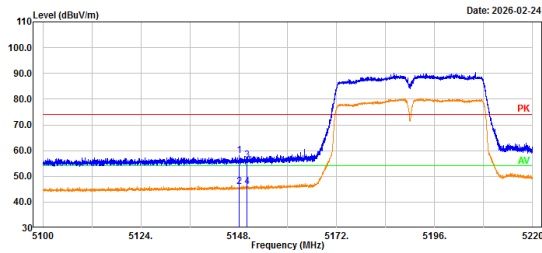


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5148.14	50.50	7.46	57.96	74.00	16.04	Peak
2	5148.14	38.55	7.46	46.01	54.00	7.99	Average
3	5150.00	48.64	7.48	56.12	74.00	17.88	Peak
4	5150.00	38.60	7.48	46.08	54.00	7.92	Average

802.11 n40, 5190MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n40_U-NII-1 low channel 5190MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

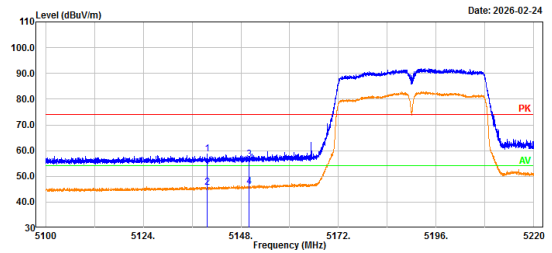


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5139.74	51.33	7.39	58.72	74.00	15.28	Peak
2	5139.74	38.37	7.39	45.76	54.00	8.24	Average
3	5150.00	49.02	7.48	56.50	74.00	17.50	Peak
4	5150.00	38.41	7.48	45.89	54.00	8.11	Average

802.11 n40, 5230MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n40_U-NII-1 high channel 5230MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

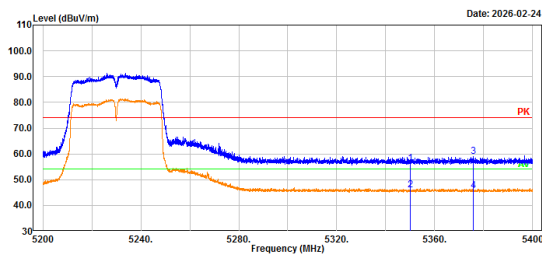


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	48.21	8.02	56.23	74.00	17.77	Peak
2	5350.00	37.83	8.02	45.85	54.00	8.15	Average
3	5375.68	50.94	8.00	58.94	74.00	15.06	Peak
4	5375.68	37.75	8.00	45.75	54.00	8.25	Average

802.11 n40, 5230MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n40_U-NII-1 high channel 5230MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

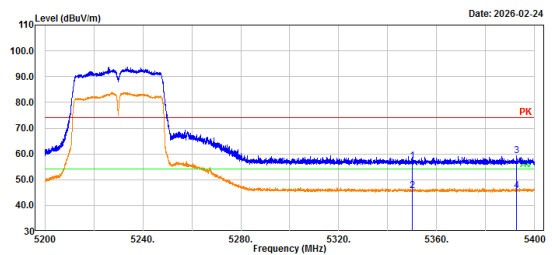


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	49.03	8.02	57.05	74.00	16.95	Peak
2	5350.00	37.63	8.02	45.65	54.00	8.35	Average
3	5392.64	51.19	7.99	59.18	74.00	14.82	Peak
4	5392.64	37.76	7.99	45.75	54.00	8.25	Average

802.11 ac20, 5180MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1 low channel 5180MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

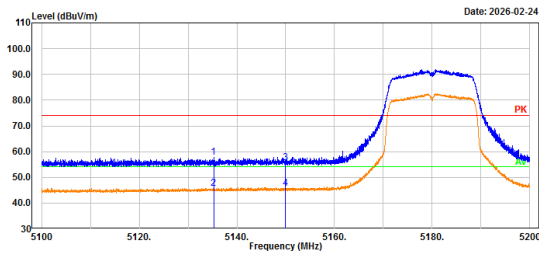


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5135.24	50.48	7.36	57.84	74.00	16.16	Peak
2	5135.24	38.29	7.36	45.65	54.00	8.35	Average
3	5150.00	48.15	7.48	55.63	74.00	18.37	Peak
4	5150.00	38.29	7.48	45.77	54.00	8.23	Average

802.11 ac20, 5180MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1 low channel 5180MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

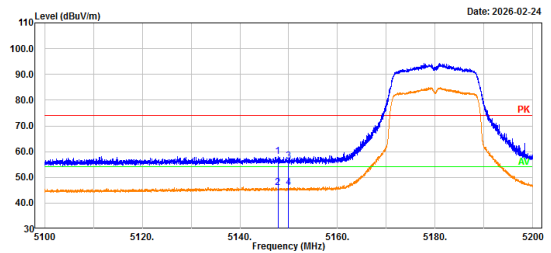


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5147.78	50.74	7.46	58.20	74.00	15.80	Peak
2	5147.78	38.40	7.46	45.86	54.00	8.14	Average
3	5150.00	48.89	7.48	56.37	74.00	17.63	Peak
4	5150.00	38.48	7.48	45.96	54.00	8.04	Average

802.11 ac20, 5240MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1 high channel 5240MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

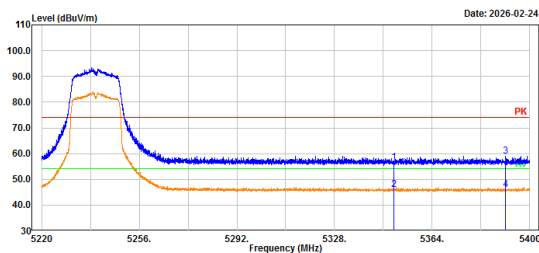


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	48.56	8.02	56.58	74.00	17.42	Peak
2	5350.00	37.94	8.02	45.96	54.00	8.04	Average
3	5391.04	50.93	7.98	58.91	74.00	15.09	Peak
4	5391.04	37.91	7.98	45.89	54.00	8.11	Average

802.11 ac20, 5240MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1 high channel 5240MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

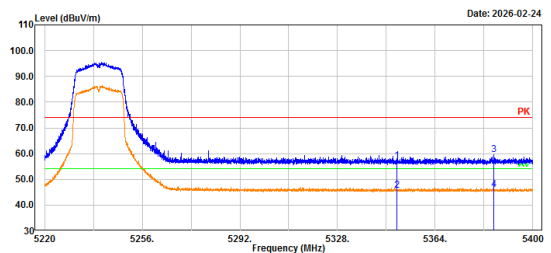


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	49.12	8.02	57.14	74.00	16.86	Peak
2	5350.00	37.74	8.02	45.76	54.00	8.24	Average
3	5385.56	51.50	7.98	59.48	74.00	14.52	Peak
4	5385.56	37.90	7.98	45.88	54.00	8.12	Average

802.11 ac40, 5190MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1 low channel 5190MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

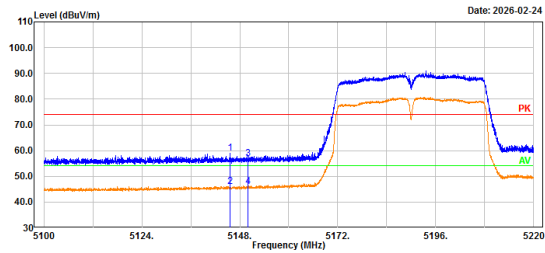


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5145.58	51.42	7.44	58.86	74.00	15.14	Peak
2	5145.58	38.45	7.44	45.89	54.00	8.11	Average
3	5150.00	49.39	7.48	56.87	74.00	17.13	Peak
4	5150.00	38.45	7.48	45.93	54.00	8.07	Average

802.11 ac40, 5190MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1 low channel 5190MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

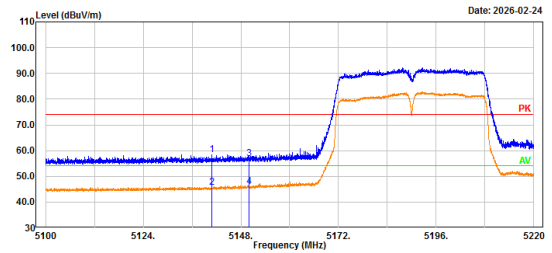


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5140.85	51.10	7.42	58.52	74.00	15.48	Peak
2	5140.85	38.33	7.42	45.75	54.00	8.25	Average
3	5150.00	49.26	7.48	56.74	74.00	17.26	Peak
4	5150.00	38.51	7.48	45.99	54.00	8.01	Average

802.11 ac40, 5230MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1 high channel 5230MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

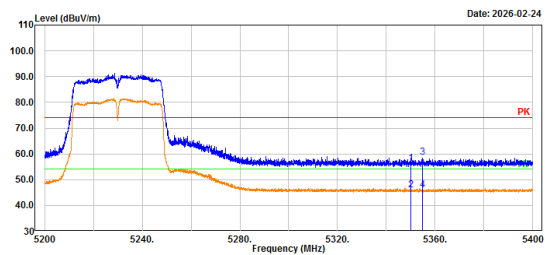


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	48.16	8.02	56.18	74.00	17.82	Peak
2	5350.00	37.96	8.02	45.98	54.00	8.02	Average
3	5354.72	50.52	8.01	58.53	74.00	15.47	Peak
4	5354.72	37.87	8.01	45.88	54.00	8.12	Average

802.11 ac40, 5230MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1 high channel 5230MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Willem Qiu

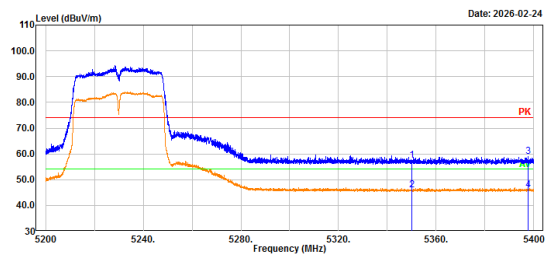


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	49.33	8.02	57.35	74.00	16.65	Peak
2	5350.00	37.87	8.02	45.89	54.00	8.11	Average
3	5397.68	50.87	7.98	58.85	74.00	15.15	Peak
4	5397.68	37.88	7.98	45.86	54.00	8.14	Average

802.11ac80, 5210MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80_U-NII-1 middle channel 5210MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3GPH-3
Tester: Willem Qiu

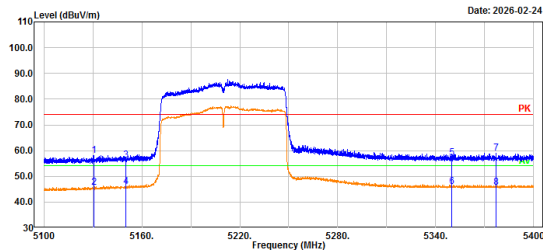


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5130.90	50.82	7.32	58.14	74.00	15.86	Peak
2	5130.90	38.47	7.32	45.79	54.00	8.21	Average
3	5150.00	48.68	7.48	56.16	74.00	17.84	Peak
4	5150.00	38.42	7.48	45.90	54.00	8.10	Average
5	5350.00	49.19	8.02	57.21	74.00	16.79	Peak
6	5350.00	37.96	8.02	45.98	54.00	8.02	Average
7	5376.90	50.84	8.00	58.84	74.00	15.16	Peak
8	5376.90	37.83	8.00	45.83	54.00	8.17	Average

802.11ac80, 5210MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80_U-NII-1 middle channel 5210MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 3GPH-3
Tester: Willem Qiu

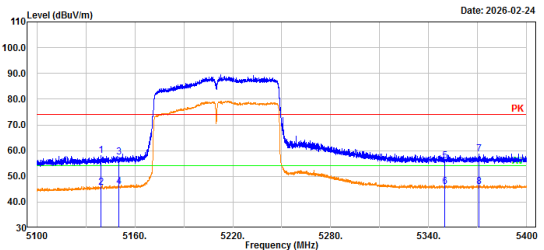

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5139.18	50.76	7.38	58.14	74.00	15.86	Peak
2	5139.18	38.43	7.38	45.81	54.00	8.19	Average
3	5150.00	50.06	7.48	57.54	74.00	16.46	Peak
4	5150.00	38.43	7.48	45.91	54.00	8.09	Average
5	5350.00	47.86	8.02	55.88	74.00	18.12	Peak
6	5350.00	37.93	8.02	45.95	54.00	8.05	Average
7	5370.66	50.58	8.00	58.58	74.00	15.42	Peak
8	5370.66	37.87	8.00	45.87	54.00	8.13	Average

5250-5350MHz:**802.11a, 5260MHz, Bandedge, Horizontal**


Project No.: 2602P06299E-RF Serial No.: 3GPB-3
Polarization: Horizontal Tester: Alan Xie
Test Mode: Transmitting
Note: 802.11a_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

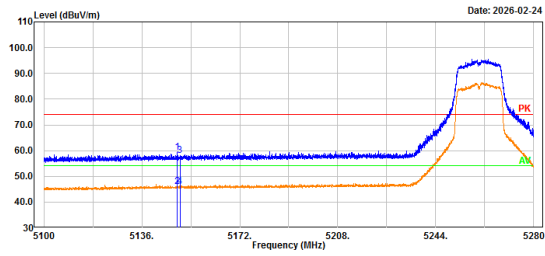

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5149.10	51.85	7.47	59.32	74.00	14.68	Peak
2	5149.10	38.47	7.47	45.94	54.00	8.06	Average
3	5150.00	50.56	7.48	58.04	74.00	15.96	Peak
4	5150.00	38.38	7.48	45.86	54.00	8.14	Average

802.11a, 5260MHz, Bandedge, Vertical


Project No.: 2602P06299E-RF Serial No.: 3GPB-3
Polarization: Vertical Tester: Alan Xie
Test Mode: Transmitting
Note: 802.11a_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

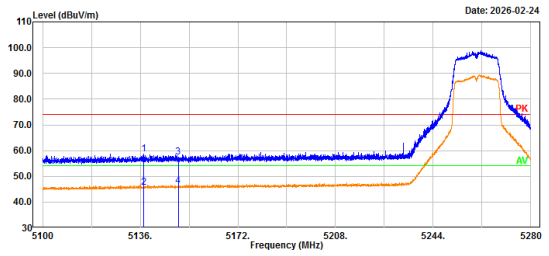

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5137.26	51.23	7.37	58.60	74.00	15.40	Peak
2	5137.26	38.46	7.37	45.83	54.00	8.17	Average
3	5150.00	49.97	7.48	57.45	74.00	16.55	Peak
4	5150.00	38.90	7.48	46.38	54.00	7.62	Average

802.11a, 5320MHz, Bandedge, Horizontal


Project No.: 2602P06299E-RF Serial No.: 3GPB-3
Polarization: Horizontal Tester: Alan Xie
Test Mode: Transmitting
Note: 802.11a_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

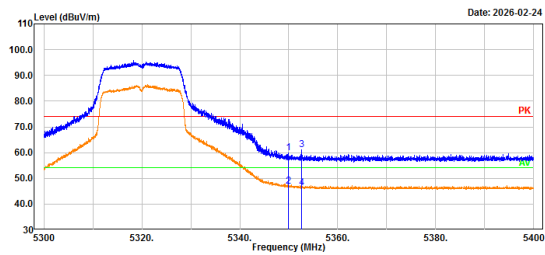

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	51.76	8.02	59.78	74.00	14.22	Peak
2	5350.00	38.77	8.02	46.79	54.00	7.21	Average
3	5352.56	52.98	8.01	60.99	74.00	13.01	Peak
4	5352.56	38.41	8.01	46.42	54.00	7.58	Average

802.11a, 5320MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF Serial No.: 3GPB-3
Polarization: Vertical Tester: Alan Xie
Test Mode: Transmitting
Note: 802.11a_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

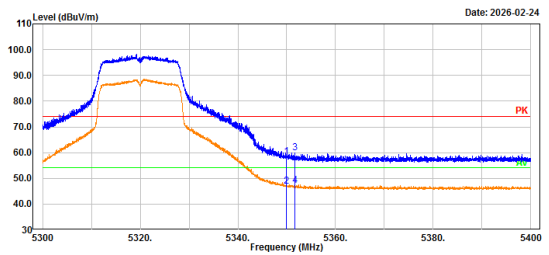


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	50.32	8.02	58.34	74.00	15.66	Peak
2	5350.00	38.96	8.02	46.98	54.00	7.02	Average
3	5351.60	51.92	8.01	59.93	74.00	14.07	Peak
4	5351.60	39.07	8.01	47.08	54.00	6.92	Average

802.11 n20, 5260MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Alan Xie

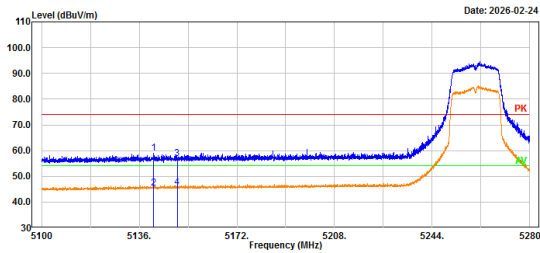


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5141.22	51.42	7.42	58.84	74.00	15.16	Peak
2	5141.22	37.97	7.42	45.39	54.00	8.61	Average
3	5150.00	49.51	7.48	56.99	74.00	17.01	Peak
4	5150.00	38.20	7.48	45.68	54.00	8.32	Average

802.11 n20, 5260MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Alan Xie

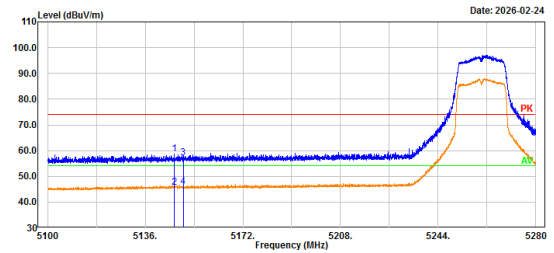


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5146.80	51.09	7.46	58.55	74.00	15.45	Peak
2	5146.80	38.16	7.46	45.62	54.00	8.38	Average
3	5150.00	49.64	7.48	57.12	74.00	16.88	Peak
4	5150.00	38.37	7.48	46.05	54.00	7.95	Average

802.11 n20, 5320MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Alan Xie

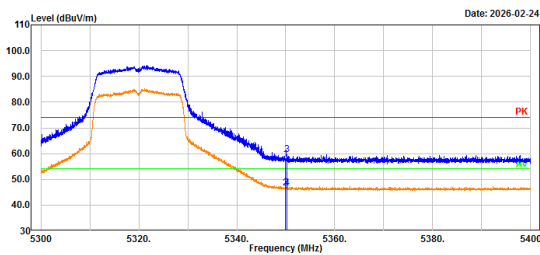


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	49.87	8.02	57.89	74.00	16.11	Peak
2	5350.00	38.49	8.02	46.51	54.00	7.49	Average
3	5350.30	51.69	8.01	59.70	74.00	14.30	Peak
4	5350.30	38.54	8.01	46.55	54.00	7.45	Average

802.11 n20, 5320MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Alan Xie

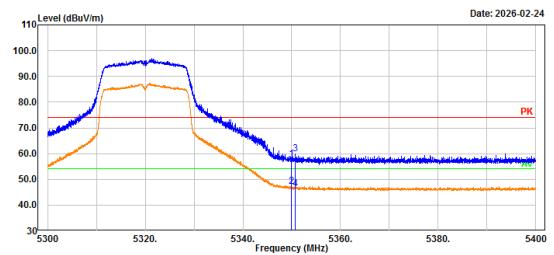


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	49.90	8.02	57.92	74.00	16.08	Peak
2	5350.00	39.26	8.02	47.28	54.00	6.72	Average
3	5350.66	51.78	8.01	59.79	74.00	14.21	Peak
4	5350.66	38.43	8.01	46.44	54.00	7.56	Average

802.11 n40, 5270MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n40_U-NII-2A low channel 5270MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Alan Xie

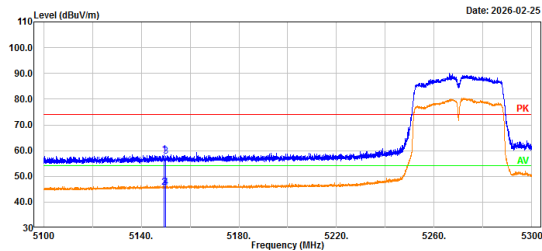


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5149.48	50.96	7.47	58.43	74.00	15.57	Peak
2	5149.48	38.32	7.47	45.79	54.00	8.21	Average
3	5150.00	50.16	7.48	57.64	74.00	16.36	Peak
4	5150.00	38.20	7.48	45.68	54.00	8.32	Average

802.11 n40, 5270MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n40_U-NII-2A low channel 5270MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Alan Xie

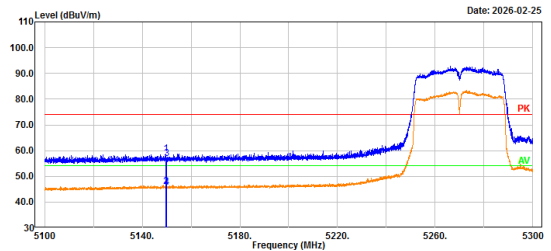


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5149.72	51.29	7.47	58.76	74.00	15.24	Peak
2	5149.72	38.45	7.47	45.92	54.00	8.08	Average
3	5150.00	49.26	7.48	56.74	74.00	17.26	Peak
4	5150.00	38.32	7.48	45.80	54.00	8.20	Average

802.11 n40, 5310MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n40_U-NII-2A high channel 5310MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Alan Xie

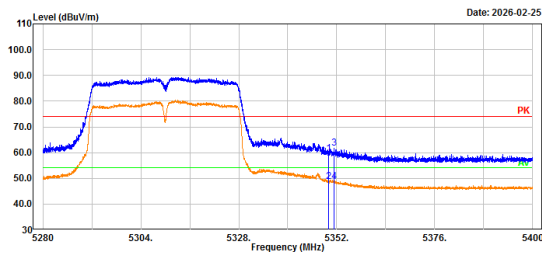


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	51.64	8.02	59.66	74.00	14.34	Peak
2	5350.00	40.67	8.02	48.69	54.00	5.31	Average
3	5351.30	53.63	8.01	61.64	74.00	12.36	Peak
4	5351.30	40.70	8.01	48.71	54.00	5.29	Average

802.11 n40, 5310MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n40_U-NII-2A high channel 5310MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Alan Xie

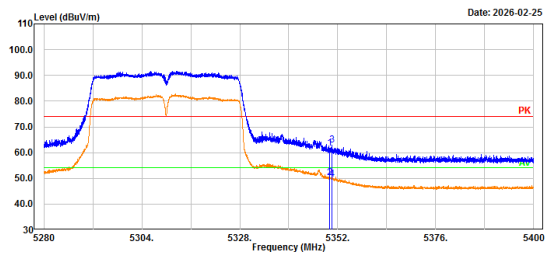


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	53.71	8.02	61.73	74.00	12.27	Peak
2	5350.00	42.14	8.02	50.16	54.00	3.84	Average
3	5350.49	55.03	8.01	63.04	74.00	10.96	Peak
4	5350.49	41.67	8.01	49.68	54.00	4.32	Average

802.11 ac20, 5260MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

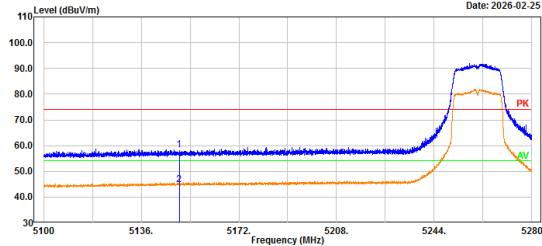


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	50.94	7.48	58.42	74.00	15.58	Peak
2	5150.00	37.43	7.48	44.91	54.00	9.09	Average

802.11 ac20, 5260MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

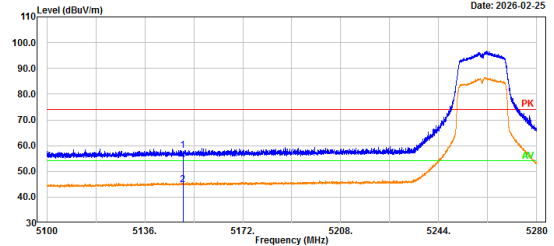


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	50.67	7.48	58.15	74.00	15.85	Peak
2	5150.00	37.25	7.48	44.73	54.00	9.27	Average

802.11 ac20, 5320MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

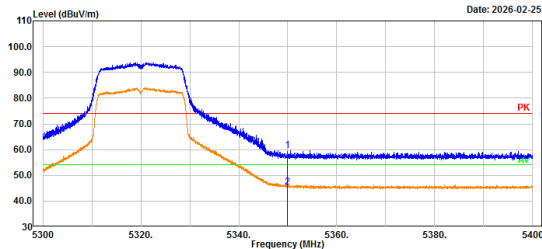


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	51.55	8.02	59.57	74.00	14.43	Peak
2	5350.00	37.31	8.02	45.33	54.00	8.67	Average

802.11 ac20, 5320MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

Date: 2026-02-25

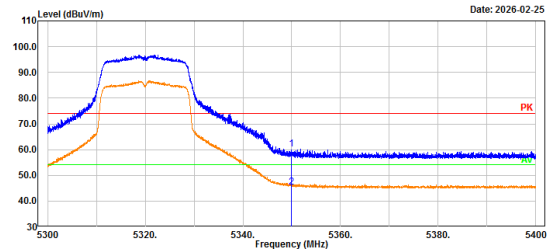


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	52.20	8.02	60.22	74.00	13.78	Peak
2	5350.00	37.41	8.02	45.43	54.00	8.57	Average

802.11 ac40, 5270MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-2A low channel 5270MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

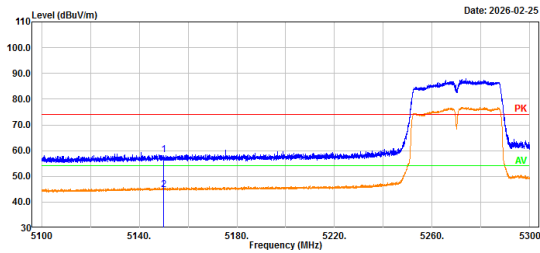


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	50.84	7.48	58.32	74.00	15.68	Peak
2	5150.00	37.24	7.48	44.72	54.00	9.28	Average

802.11 ac40, 5270MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-2A low channel 5270MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

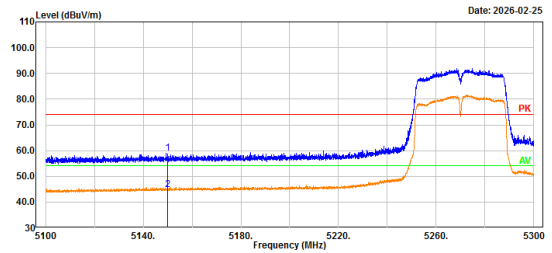


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	51.54	7.48	59.02	74.00	14.98	Peak
2	5150.00	37.36	7.48	44.84	54.00	9.16	Average

802.11 ac40, 5310MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-2A high channel 5310MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

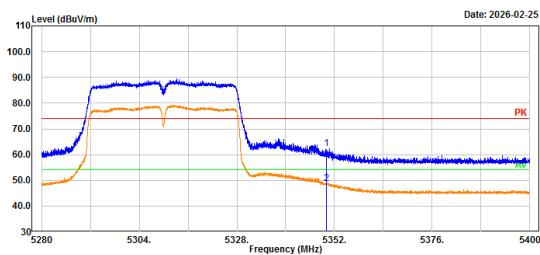


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	54.24	8.02	62.26	74.00	11.74	Peak
2	5350.00	40.83	8.02	48.85	54.00	5.15	Average

802.11 ac40, 5310MHz, Bandedge, Vertical


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-2A high channel 5310MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

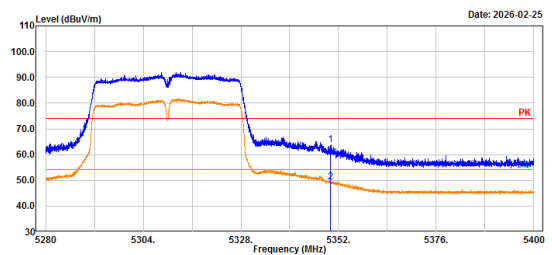


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	55.77	8.02	63.79	74.00	10.21	Peak
2	5350.00	41.27	8.02	49.29	54.00	4.71	Average

802.11ac80, 5290MHz, Bandedge, Horizontal

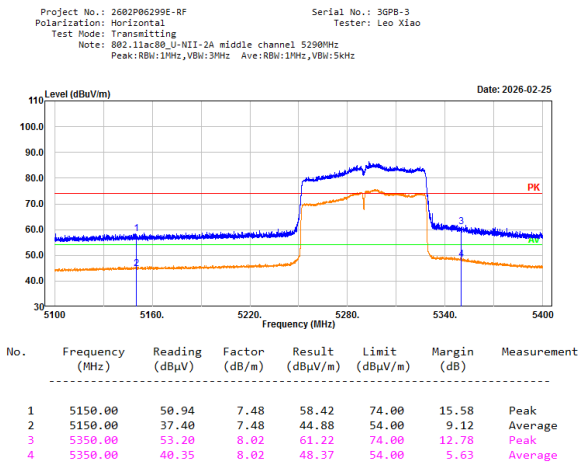

802.11ac80, 5290MHz, Bandedge, Vertical

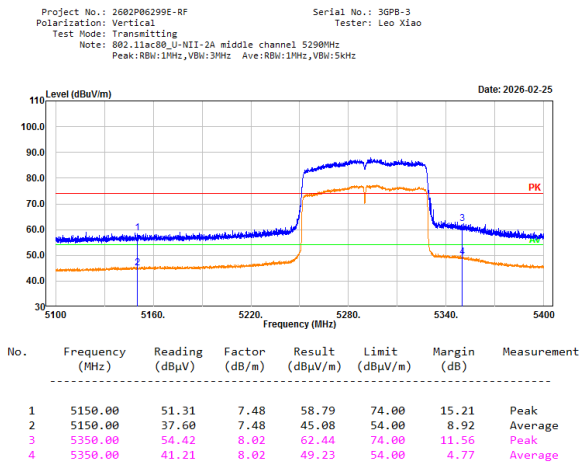


5470-5725MHz:

802.11a, 5500MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-2C low channel 5500MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

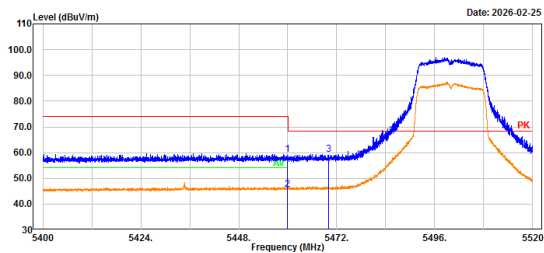


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5460.00	50.91	8.28	59.19	74.00	14.81	Peak
2	5460.00	37.40	8.28	45.68	54.00	8.32	Average
3	5470.00	50.99	8.33	59.32	68.20	8.88	Peak

802.11a, 5500MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-2C low channel 5500MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

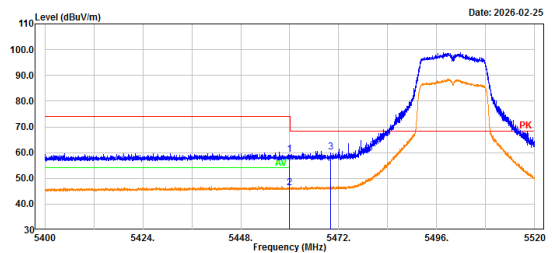


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5460.00	51.07	8.28	59.35	74.00	14.65	Peak
2	5460.00	38.00	8.28	46.28	54.00	7.72	Average
3	5470.00	51.84	8.33	60.17	68.20	8.03	Peak

802.11a, 5700MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-2C high channel 5700MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

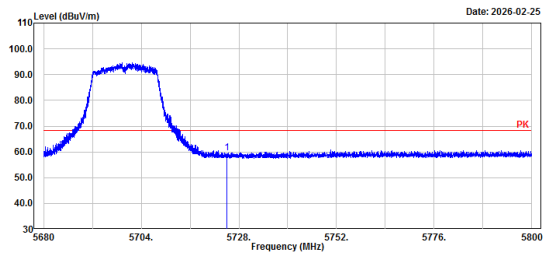


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5725.00	50.73	8.92	59.65	68.20	8.55	Peak

802.11a, 5700MHz, Bandedge, Vertical


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-2C high channel 5700MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

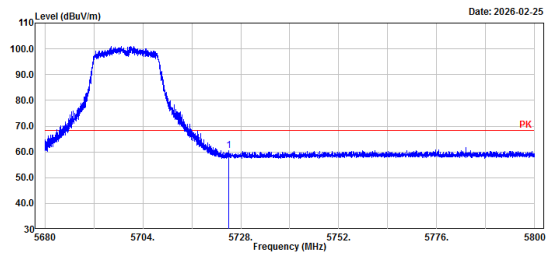


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5725.00	51.56	8.92	60.48	68.20	7.72	Peak


802.11 n20, 5500MHz, Bandedge, Horizontal

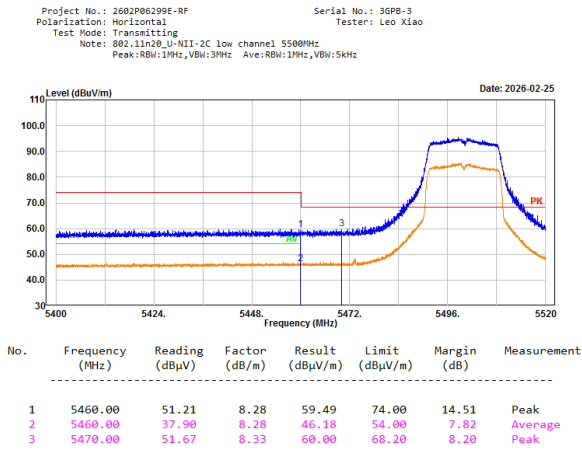


802.11 n20, 5500MHz, Bandedge, Vertical

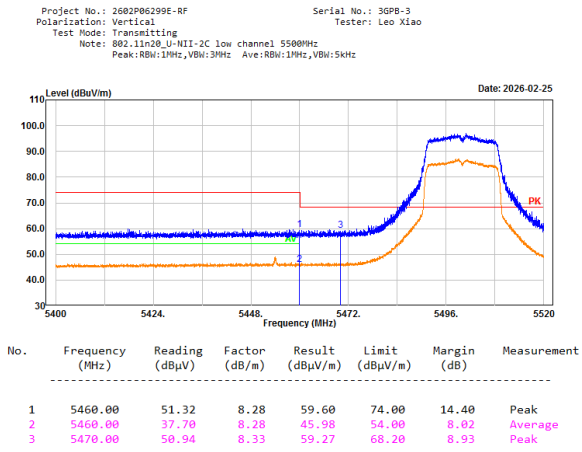

802.11 n20, 5700MHz, Bandedge, Horizontal

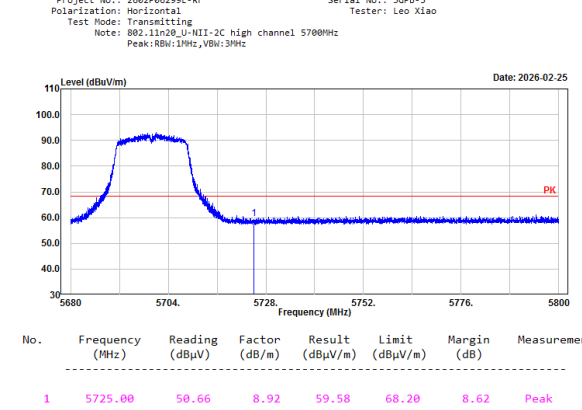


802.11 n20, 5700MHz, Bandedge, Vertical

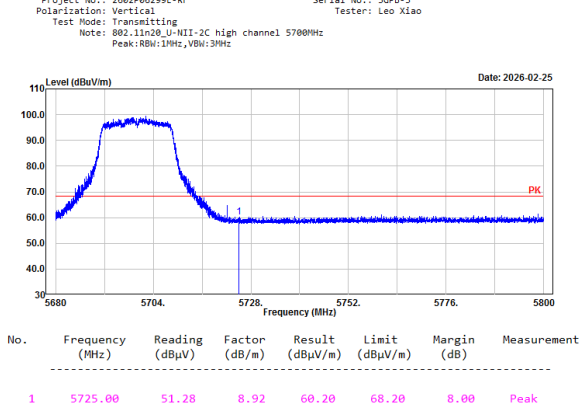

802.11 n40, 5510MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n40_U-NII-2C low channel 5510MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

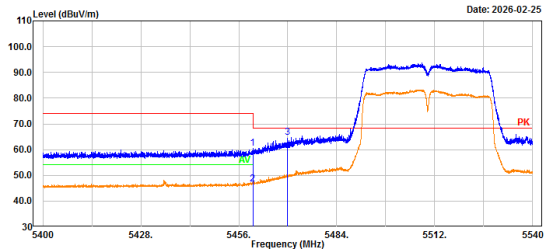


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5460.00	52.35	8.28	60.63	74.00	13.37	Peak
2	5460.00	38.27	8.28	46.55	54.00	7.45	Average
3	5470.00	56.43	8.33	64.76	68.20	3.44	Peak

802.11 n40, 5510MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n40_U-NII-2C low channel 5510MHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 3GPB-3
Tester: Leo Xiao

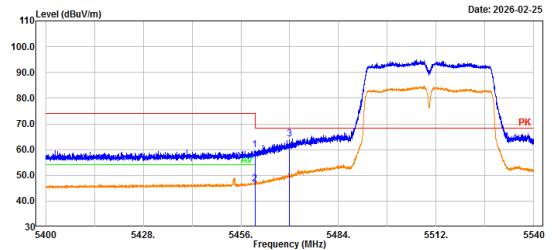


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5460.00	51.67	8.28	59.95	74.00	14.05	Peak
2	5460.00	38.23	8.28	46.51	54.00	7.49	Average
3	5470.00	55.78	8.33	64.11	68.20	4.09	Peak

802.11 n40, 5670MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n40_U-NII-2C high channel 5670MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

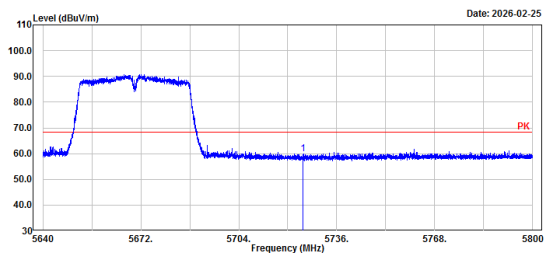


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5725.00	51.08	8.92	60.00	68.20	8.20	Peak

802.11 n40, 5670MHz, Bandedge, Vertical


Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n40_U-NII-2C high channel 5670MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

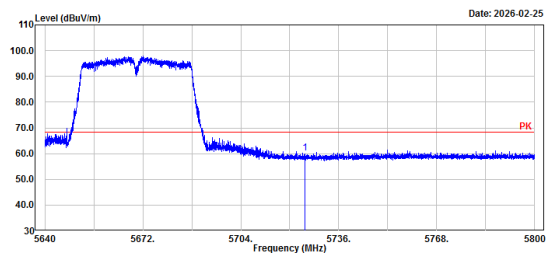


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5725.00	51.22	8.92	60.14	68.20	8.06	Peak


802.11 ac20, 5500MHz, Bandedge, Horizontal

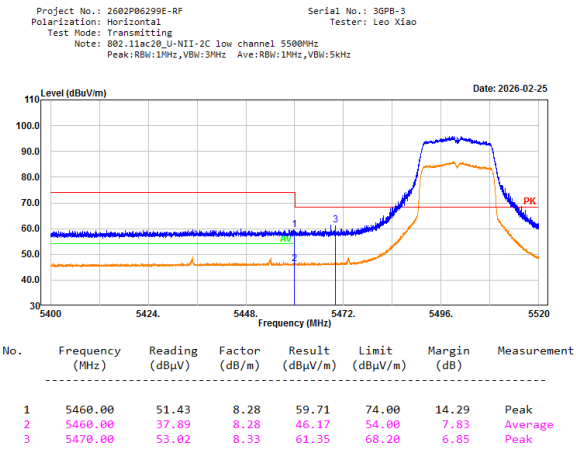


802.11 ac20, 5500MHz, Bandedge, Vertical

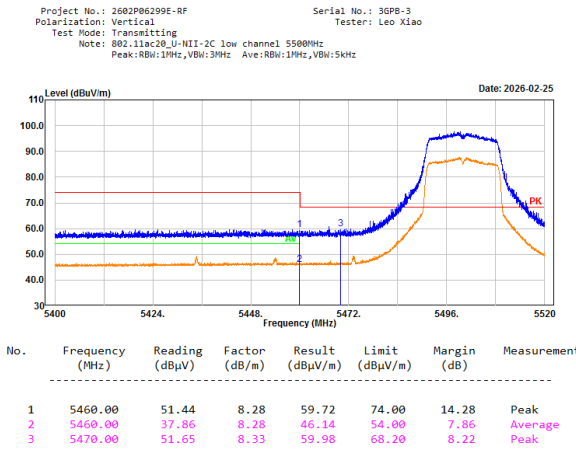


802.11 ac20, 5700MHz, Bandedge, Horizontal

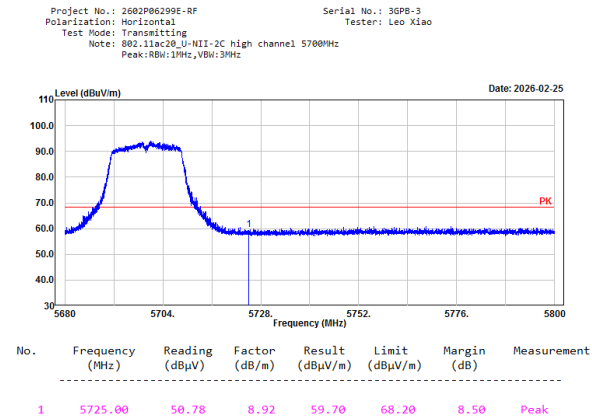


802.11 ac20, 5700MHz, Bandedge, Vertical

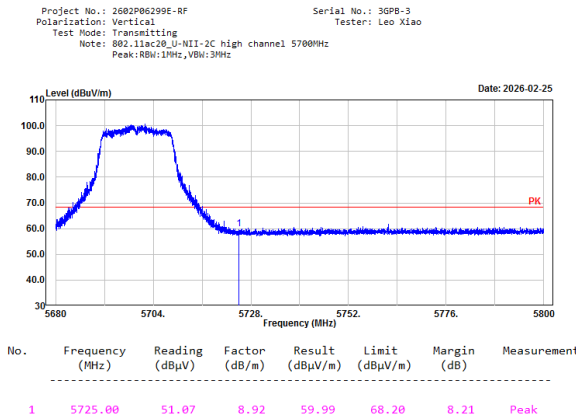


802.11 ac40, 5510MHz, Bandedge, Horizontal

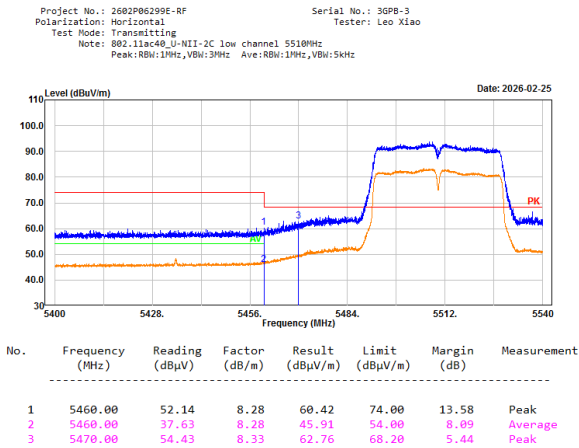


802.11 ac40, 5510MHz, Bandedge, Vertical

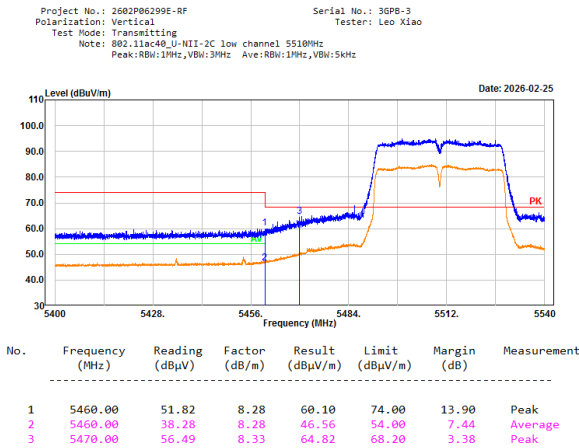


802.11 ac40, 5670MHz, Bandedge, Horizontal

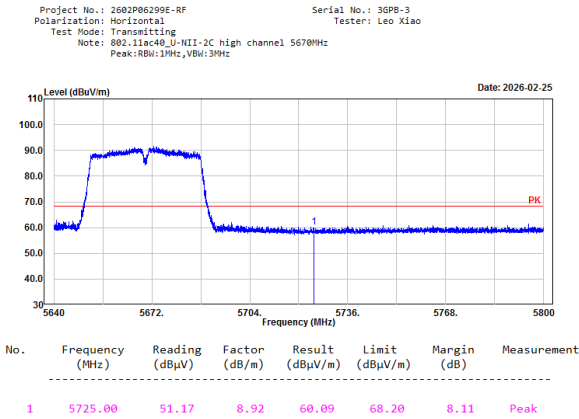


802.11 ac40, 5670MHz, Bandedge, Vertical

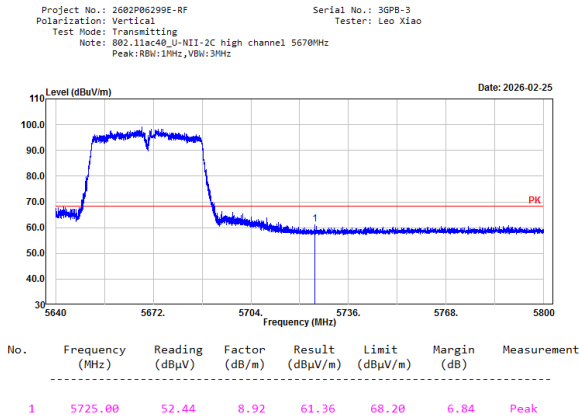


802.11ac80, 5530MHz, Bandedge, Horizontal

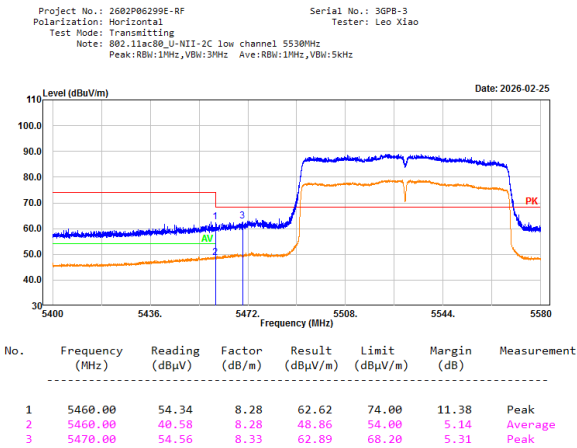


802.11ac80, 5530MHz, Bandedge, Vertical

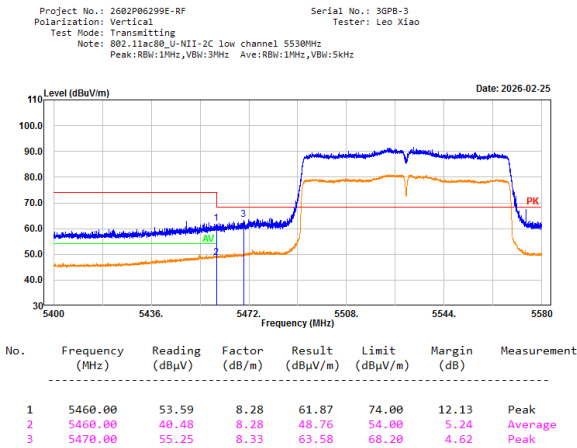

802.11ac80, 5610MHz, Bandedge, Horizontal

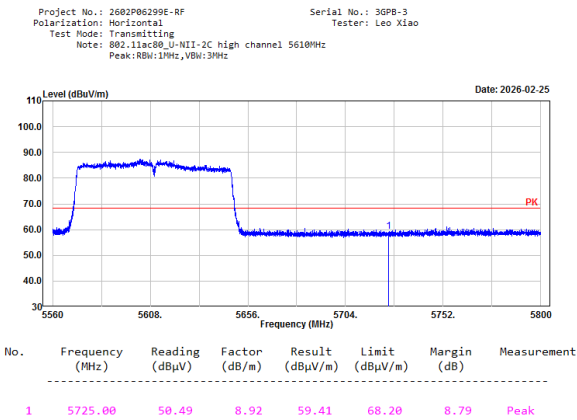

802.11ac80, 5610MHz, Bandedge, Vertical

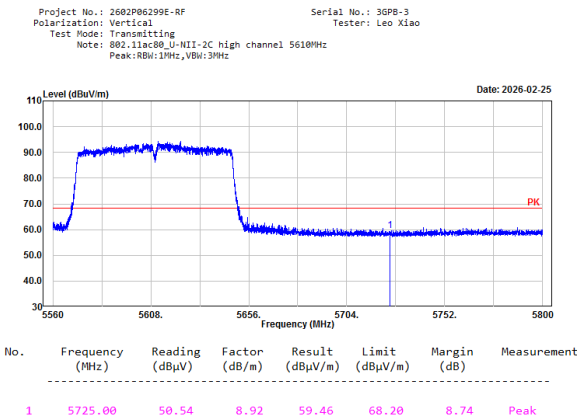


5725-5850MHz:

802.11a, 5745MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a U-NII-3 low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

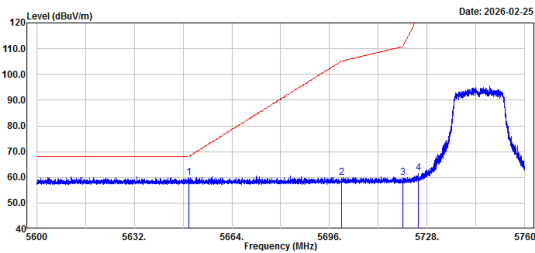


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	51.04	8.82	59.86	68.20	8.34	Peak
2	5700.00	50.97	8.84	59.81	105.20	45.39	Peak
3	5720.00	50.91	8.90	59.81	110.80	50.99	Peak
4	5725.00	52.71	8.92	61.63	122.20	60.57	Peak

802.11a, 5745MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a U-NII-3 low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

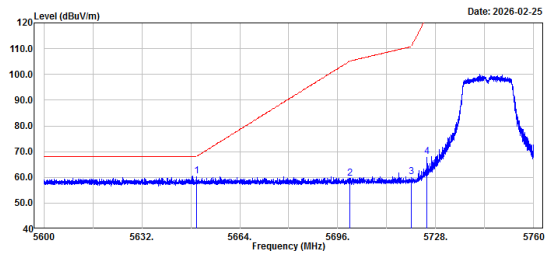


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	51.84	8.82	60.66	68.20	7.54	Peak
2	5700.00	50.90	8.84	59.74	105.20	45.46	Peak
3	5720.00	51.44	8.90	60.34	110.80	50.46	Peak
4	5725.00	59.12	8.92	68.04	122.20	54.16	Peak

802.11a, 5825MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a U-NII-3 high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

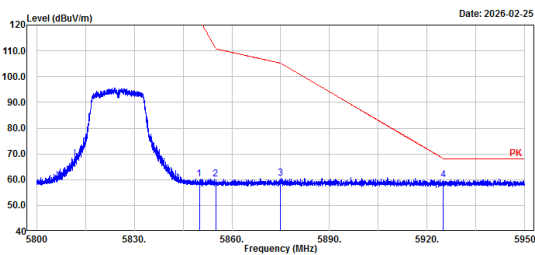


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	51.11	9.09	60.20	122.20	62.00	Peak
2	5855.00	51.10	9.10	60.20	110.80	50.60	Peak
3	5875.00	51.50	9.15	60.65	105.20	44.55	Peak
4	5925.00	50.63	9.22	59.85	68.20	8.35	Peak

802.11a, 5825MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a U-NII-3 high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

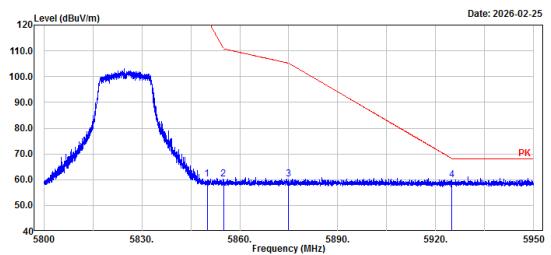


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	51.19	9.09	60.28	122.20	61.92	Peak
2	5855.00	51.23	9.10	60.33	110.80	50.47	Peak
3	5875.00	51.19	9.15	60.34	105.20	44.86	Peak
4	5925.00	50.84	9.22	60.06	68.20	8.14	Peak

802.11 n20, 5745MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-3 low channel 5745MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

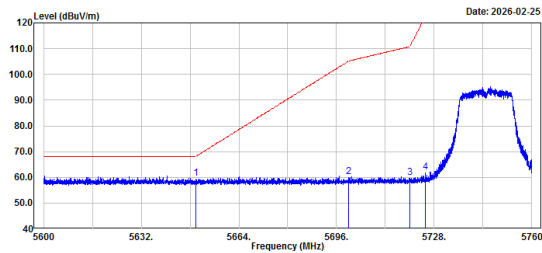


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	50.68	8.82	59.50	68.20	8.70	Peak
2	5700.00	51.42	8.84	60.26	105.20	44.94	Peak
3	5720.00	51.00	8.90	59.90	110.80	50.90	Peak
4	5725.00	53.09	8.92	62.01	122.20	60.19	Peak

802.11 n20, 5745MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-3 low channel 5745MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

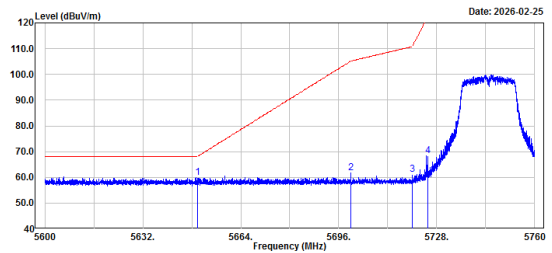


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	51.17	8.82	59.99	68.20	8.21	Peak
2	5700.00	52.98	8.84	61.82	105.20	43.38	Peak
3	5720.00	52.28	8.90	61.18	110.80	49.62	Peak
4	5725.00	59.34	8.92	68.26	122.20	53.94	Peak

802.11 n20, 5825MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-3 high channel 5825MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

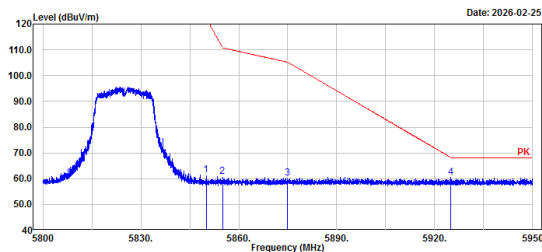


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	52.45	9.09	61.54	122.20	60.66	Peak
2	5855.00	51.72	9.10	60.82	110.80	49.98	Peak
3	5875.00	51.19	9.15	60.34	105.20	44.86	Peak
4	5925.00	51.16	9.22	60.38	68.20	7.82	Peak

802.11 n20, 5825MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-3 high channel 5825MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

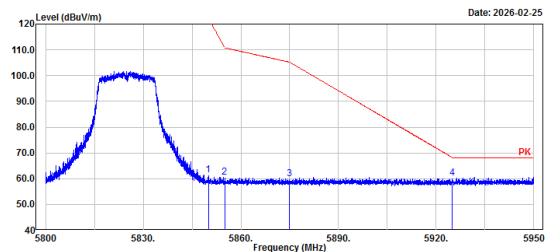


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	52.31	9.09	61.40	122.20	60.80	Peak
2	5855.00	51.51	9.10	60.61	110.80	50.19	Peak
3	5875.00	50.86	9.15	60.01	105.20	45.19	Peak
4	5925.00	50.95	9.22	60.17	68.20	8.03	Peak

802.11 n40, 5755MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n40_U-NII-3 low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

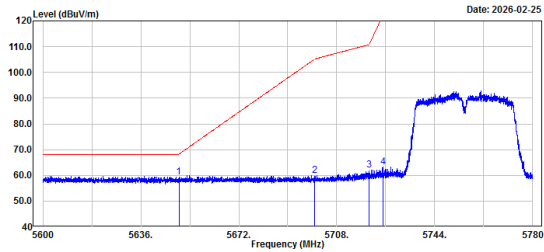


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	50.60	8.82	59.42	68.20	8.78	Peak
2	5700.00	51.20	8.84	60.04	105.20	45.16	Peak
3	5720.00	53.27	8.90	62.17	110.80	48.63	Peak
4	5725.00	54.47	8.92	63.39	122.20	58.81	Peak

802.11 n40, 5755MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n40_U-NII-3 low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

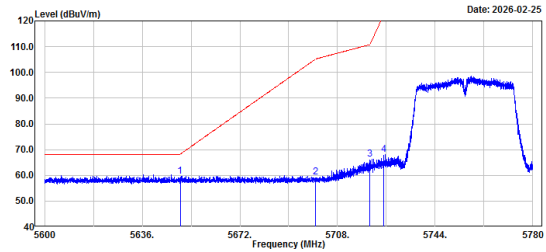


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	50.69	8.82	59.51	68.20	8.69	Peak
2	5700.00	50.40	8.84	59.24	105.20	45.96	Peak
3	5720.00	57.48	8.90	66.38	110.80	44.42	Peak
4	5725.00	59.03	8.92	67.95	122.20	54.25	Peak

802.11 n40, 5795MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n40_U-NII-3 high channel 5795MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

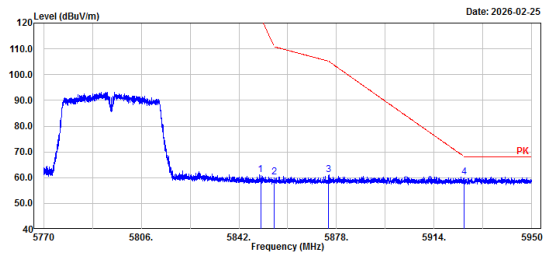


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	51.94	9.09	61.03	122.20	61.17	Peak
2	5855.00	51.01	9.10	60.11	110.80	50.69	Peak
3	5875.00	51.98	9.15	61.13	105.20	44.07	Peak
4	5925.00	50.86	9.22	60.08	68.20	8.12	Peak

802.11 n40, 5795MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n40_U-NII-3 high channel 5795MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

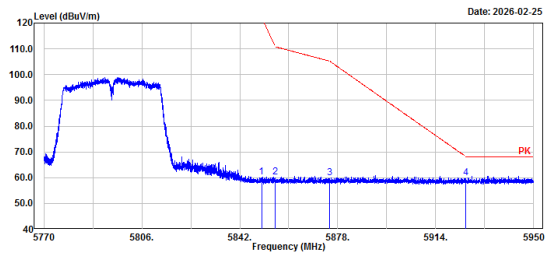


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	51.25	9.09	60.34	122.20	61.86	Peak
2	5855.00	51.05	9.10	60.15	110.80	50.65	Peak
3	5875.00	50.81	9.15	59.96	105.20	45.24	Peak
4	5925.00	50.67	9.22	59.89	68.20	8.31	Peak

802.11 ac20, 5745MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 low channel 5745MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

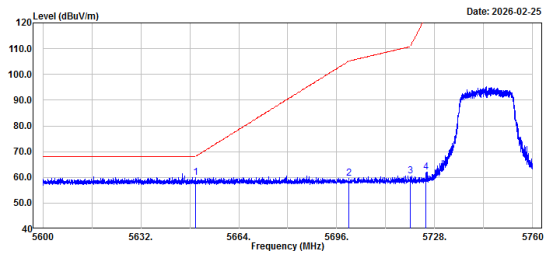


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	51.06	8.82	59.88	68.20	8.32	Peak
2	5700.00	50.90	8.84	59.74	105.20	45.46	Peak
3	5720.00	51.65	8.90	60.55	110.80	50.25	Peak
4	5725.00	53.16	8.92	62.08	122.20	60.12	Peak

802.11 ac20, 5745MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 low channel 5745MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

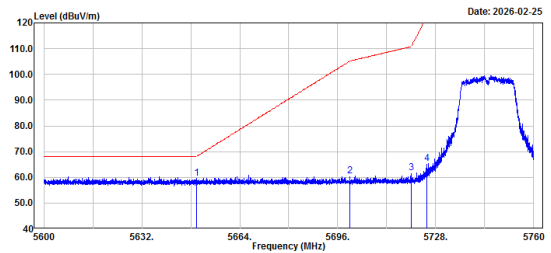


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	50.85	8.82	59.67	68.20	8.53	Peak
2	5700.00	51.64	8.84	60.48	105.20	44.72	Peak
3	5720.00	52.70	8.90	61.60	110.80	49.20	Peak
4	5725.00	56.51	8.92	65.43	122.20	56.77	Peak

802.11 ac20, 5825MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 high channel 5825MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

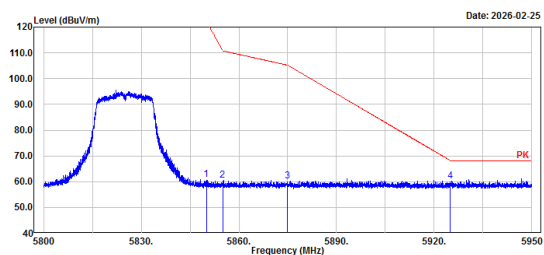


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	51.65	9.09	60.74	122.20	61.46	Peak
2	5855.00	51.39	9.10	60.49	110.80	50.31	Peak
3	5875.00	50.99	9.15	60.14	105.20	45.06	Peak
4	5925.00	51.12	9.22	60.34	68.20	7.86	Peak

802.11 ac20, 5825MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 high channel 5825MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

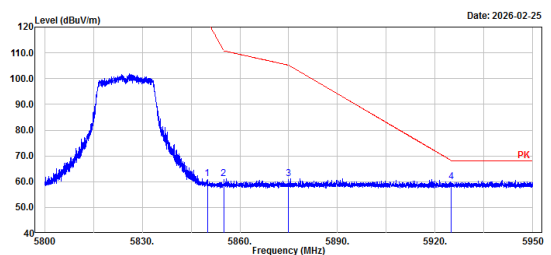


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	52.04	9.09	61.13	122.20	61.07	Peak
2	5855.00	51.97	9.10	61.07	110.80	49.73	Peak
3	5875.00	51.85	9.15	61.00	105.20	44.20	Peak
4	5925.00	50.78	9.22	60.00	68.20	8.20	Peak

802.11 ac40, 5755MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3 low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

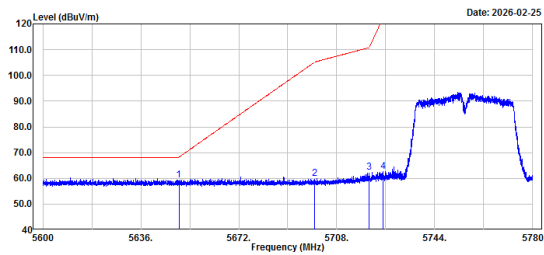


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	50.54	8.82	59.36	68.20	8.84	Peak
2	5700.00	51.02	8.84	59.86	105.20	45.34	Peak
3	5720.00	53.35	8.90	62.25	110.80	48.55	Peak
4	5725.00	53.85	8.92	62.77	122.20	59.43	Peak

802.11 ac40, 5755MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3 low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

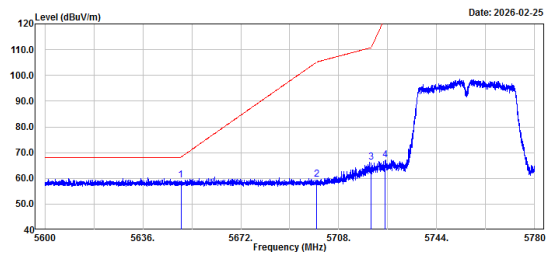


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	50.47	8.82	59.29	68.20	8.91	Peak
2	5700.00	50.69	8.84	59.53	105.20	45.67	Peak
3	5720.00	57.49	8.90	66.39	110.80	44.41	Peak
4	5725.00	58.16	8.92	67.08	122.20	55.12	Peak

802.11 ac40, 5795MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3 high channel 5795MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

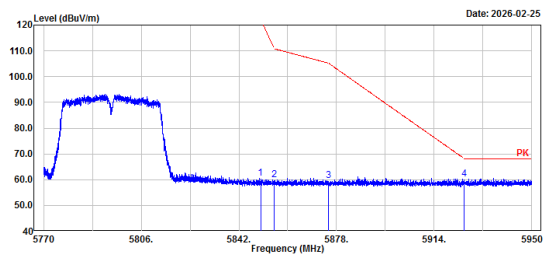


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	51.43	9.09	60.52	122.20	61.68	Peak
2	5855.00	50.91	9.10	60.01	110.80	50.79	Peak
3	5875.00	50.59	9.15	59.74	105.20	45.46	Peak
4	5925.00	51.10	9.22	60.32	68.20	7.88	Peak

802.11 ac40, 5795MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3 high channel 5795MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3GPB-3
Tester: Leo Xiao

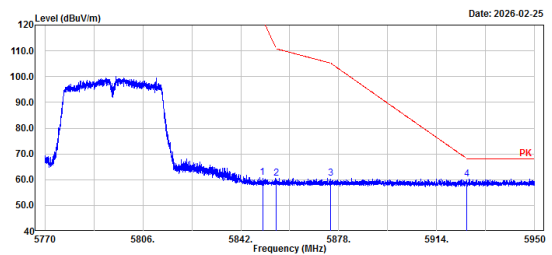


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	51.85	9.09	60.94	122.20	61.26	Peak
2	5855.00	51.50	9.10	60.60	110.80	50.20	Peak
3	5875.00	51.41	9.15	60.56	105.20	44.64	Peak
4	5925.00	50.91	9.22	60.13	68.20	8.07	Peak

802.11ac80, 5775MHz, Bandedge, Horizontal

Project No.: 2602P06299E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80_U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 36PB-3
Tester: Leo Xiao

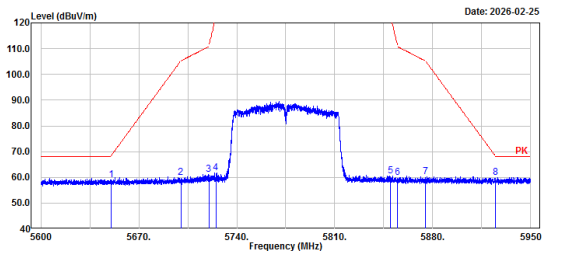


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	50.15	8.82	58.97	68.20	9.23	Peak
2	5700.00	51.02	8.84	59.86	105.20	45.34	Peak
3	5720.00	52.17	8.90	61.07	110.80	49.73	Peak
4	5725.00	52.78	8.92	61.70	122.20	60.50	Peak
5	5850.00	51.51	9.09	60.60	122.20	61.60	Peak
6	5855.00	50.86	9.10	59.96	110.80	50.84	Peak
7	5875.00	50.99	9.15	60.14	105.20	45.06	Peak
8	5925.00	50.64	9.22	59.86	68.20	8.34	Peak

802.11ac80, 5775MHz, Bandedge, Vertical

Project No.: 2602P06299E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80_U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 36PB-3
Tester: Leo Xiao

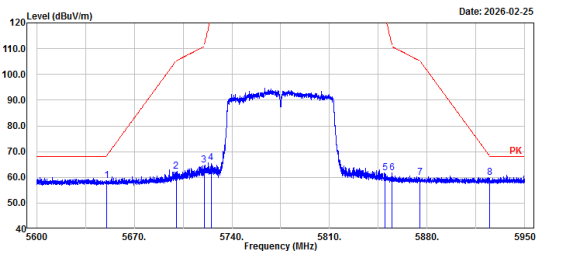

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	49.94	8.82	58.76	68.20	9.44	Peak
2	5700.00	53.62	8.84	62.46	105.20	42.74	Peak
3	5720.00	55.81	8.90	64.71	110.80	46.09	Peak
4	5725.00	56.81	8.92	65.73	122.20	56.47	Peak
5	5850.00	52.52	9.09	61.61	122.20	60.59	Peak
6	5855.00	52.68	9.10	61.78	110.80	49.02	Peak
7	5875.00	50.71	9.15	59.86	105.20	45.34	Peak
8	5925.00	50.74	9.22	59.96	68.20	8.24	Peak

5.3 Spot Check With Maximum Conducted Output Power

Sample No.:	3GPB-2	Test Date:	2026/05/09
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rini Yan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	51	ATM Pressure: (kPa)	100.3
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Microwave Peak Power Sensor	MA24418A	12618	2025/6/11	2026/6/10
Eastsheep	Coaxial Attenuator	5W-N-JK-6G- 10dB	F-08-EM504	2026/3/30	2027/3/29

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**5150-5250MHz**

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5180	14.98	24	Pass
	5220	15.22	24	Pass
	5240	15.38	24	Pass

Note: The device is a Client device.

5250-5350MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5260	14.79	24	Pass
	5300	14.96	24	Pass
	5320	14.92	24	Pass

5470-5725MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5500	14.78	24	Pass
	5580	14.8	24	Pass
	5700	14.89	24	Pass
	5720	14.95	24	Pass

5725-5850MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5745	14.73	30	Pass
	5785	14.82	30	Pass
	5825	14.89	30	Pass

Note:

The Spot Check data were similar to the original data.

5.4 Duty Cycle

Sample No.:	3GPB-2	Test Date:	2026/06/16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rini Yan	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	51	ATM Pressure: (kPa)	100.3
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200160/026	2025/7/28	2026/7/27

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11a	5180	2.033	2.072	98.12	/	/	0.010
802.11n20	5180	1.887	1.925	98.03	/	/	0.010
802.11n40	5190	0.927	0.964	96.16	0.17	1079	2
802.11ac20	5180	1.897	1.937	97.93	0.09	527	1
802.11ac40	5190	0.935	0.973	96.09	0.17	1070	2
802.11ac80	5210	0.455	0.492	92.48	0.34	2198	3


Duty Cycle = Ton/(Ton+Toff)*100%

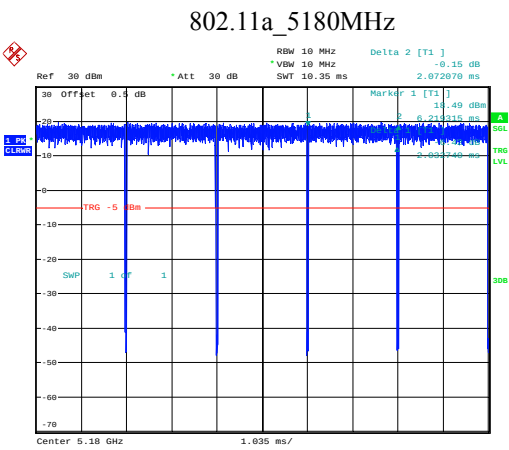


ProjectNo.:2602P06299E-RF Tester:Rini Yan
Date: 16.JUN.2026 21:59:42

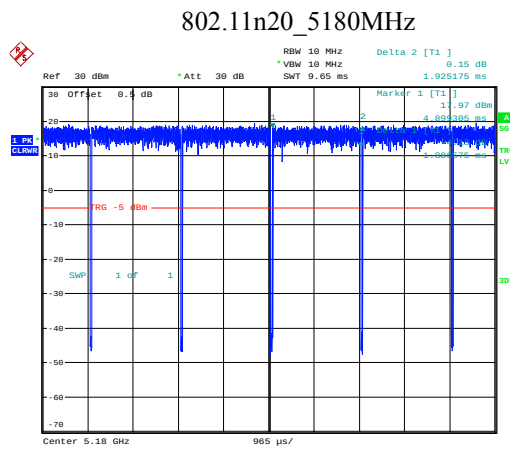


ProjectNo.:2602P06299E-RF Tester:Rini Yan
Date: 16.JUN.2026 15:53:51

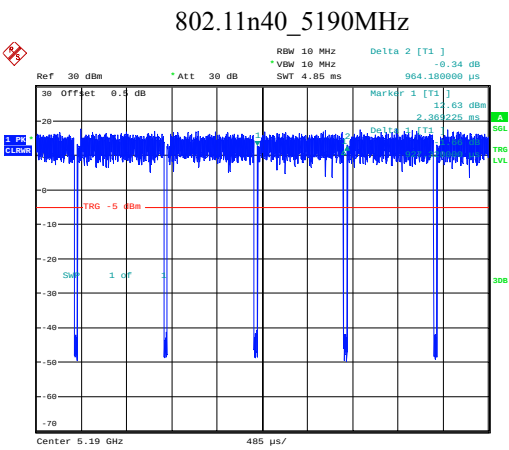


ProjectNo.:2602P06299E-RF Tester:Rini Yan
Date: 16.JUN.2026 15:05:07

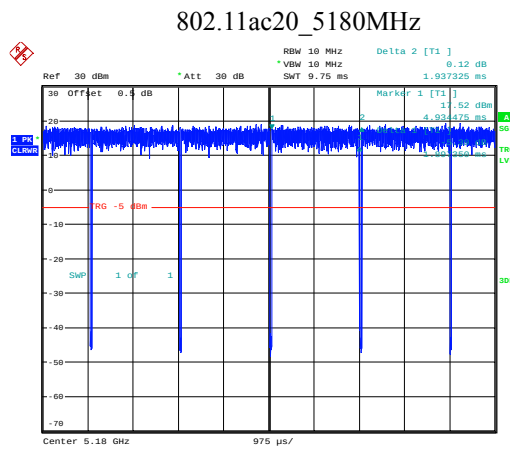

ProjectNo.:2602P06299E-RF Tester:Rini Yan
Date: 16.JUN.2026 22:05:50

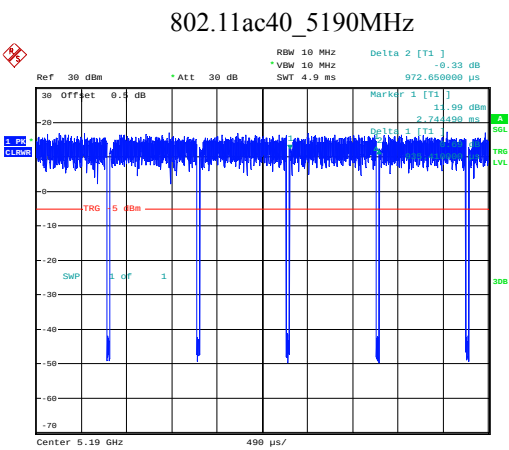

ProjectNo.:2602P06299E-RF Tester:Rini Yan
Date: 16.JUN.2026 22:06:57

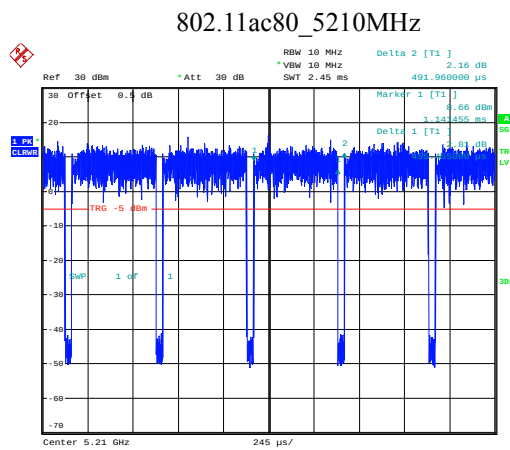

ProjectNo.:2602P06299E-RF Tester:Rini Yan
Date: 16.JUN.2026 22:08:40

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2602P06299E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2602P06299E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2602P06299E-RF-00E-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******