


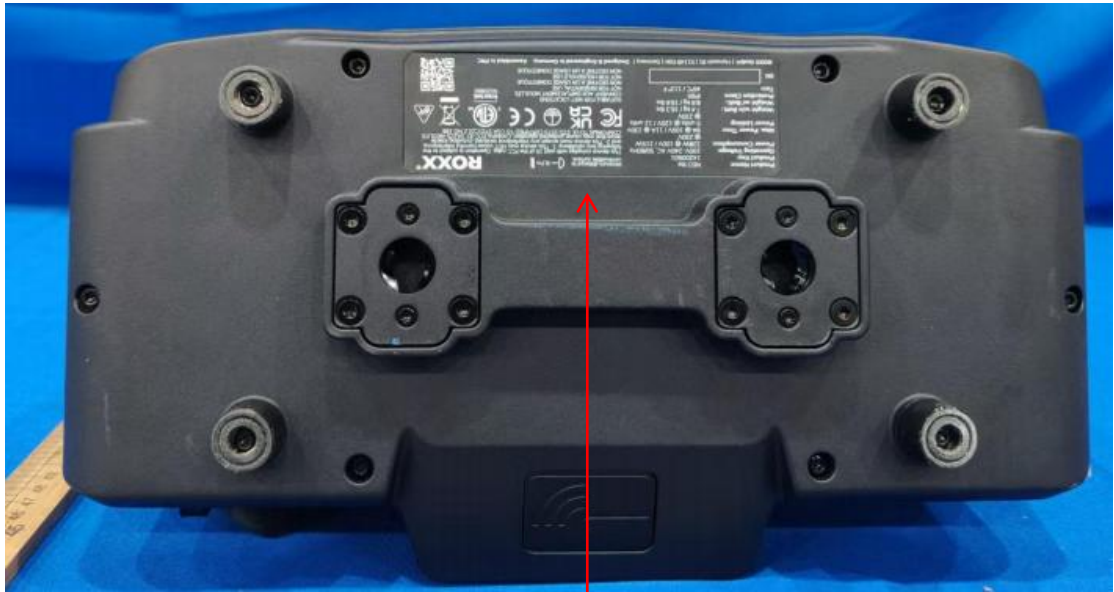

Product Name:	NEO lite	Minimum distance to combustible surface:	 0,7m	ROXX®
Product Key:	14200501	This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: 1- This device may NOT cause harmful interference, and 2- This device must accept any interference received, including interference that may cause undesired operation. FCC ID: 2A2LS-NEOLITE CONFORMS TO UL STD.1573 CERTIFIED TO CSA STD.C22.2 NO.166		
Operating Voltage:	100V-240V AC, 50/60Hz			
Power Consumption:	228W @ 100V / 215W @ 230V			
Max. Power Thru:	9A @ 100V / 11A @ 230V			
Power Linking:	5 units @ 120V / 11 units @ 230V			
Weight w/o Batt.:	7,4 kg / 16,3 lbs			
Weight w/ Batt.:	8,9 kg / 19,6 lbs			
Protection Class:	IP65			
Ta:v	45°C / 113° F			
SN				
ROXX GmbH Hansestr.91 51149 Köln Germany Designed & Engineered in Germany. Assembled in PRC		FC UK CA CE ETL US Intertek 5020960 SUITABLE FOR WET LOCATIONS CONVIENT AUX EMPLACEMENT MOUILLÉS NOT FOR RESIDENTIAL USE NON DESTINE A UN USAGE DOMESTIQUE NOT FOR HOUSEHOLD USE NON DESTINE A UN USAGE DOMESTIQUE QR Code		