


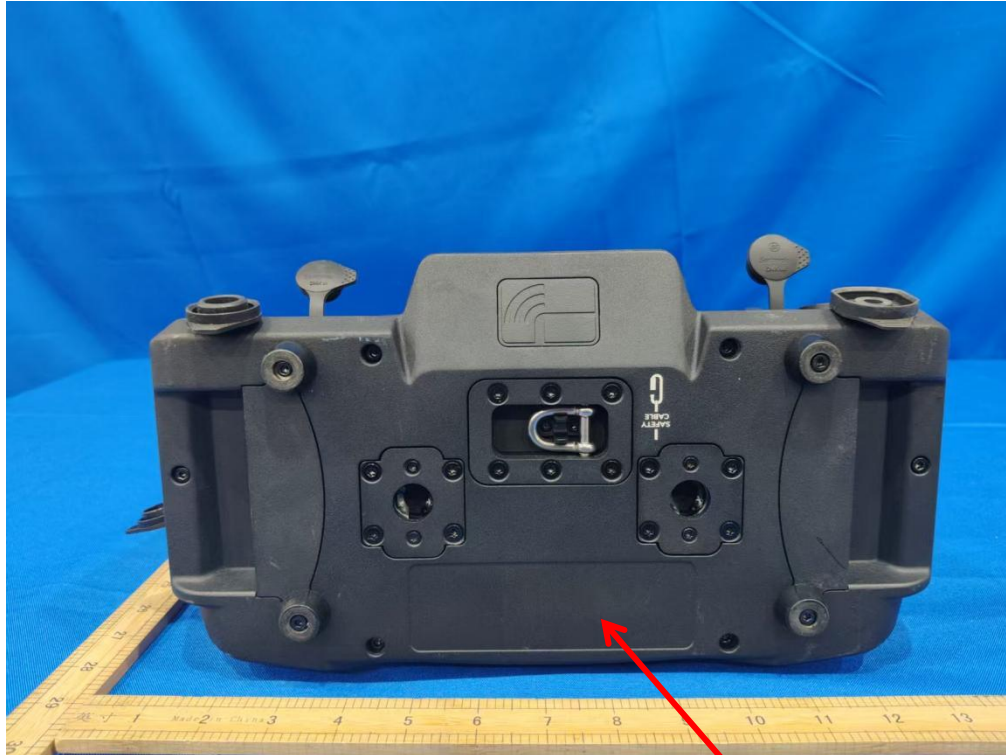

Product Name: NEO mini Product Key: 14201001 Operating Voltage: 100V-240V AC, 50/60Hz Power Consumption: 706W @ 100V / 668W @ 230V Max. Power Thru: 5A @ 100V / 9A @ 230V Power Linking: 1 unit @ 120V / 3 units @ 230V Weight: 7.7kg / 16.98lbs Protection Class: IP65 Ta:v 45°C / 113° F SN 	Minimum distance to combustible surface: 0.7m This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: 1- This device may NOT cause harmful interference, and 2- This device must accept any interference received, including interference that may cause undesired operation. FCC ID: 2A2LS-NEOMINI CONFORMS TO UL STD.1573 CERTIFIED TO CSA STD.C22.2 NO.166 Highest exterior surface temperature if exceeds 75 °C FCC UK CA CE SUITABLE FOR WET LOCATIONS CONVIENT AUX EMPLACEMENT MOUILLÉS NOT FOR RESIDENTIAL USE NON DESTINÉ A UN USAGE DOMESTIQUE NOT FOR HOUSEHOLD USE NON DESTINÉ A UN USAGE DOMESTIQUE Intertek 5020960
---	--

ROXX GmbH | Hansestr.91 | 51149 Köln | Germany | Designed & Engineered in Germany. Assembled in PRC