



FCC TEST REPORT

FCC ID: 2A2MQ-AINANNYA4

Product	:	Smart baby monitor
Model Name	:	Alnanny A4(Additional model refer to page 7)
Brand	:	N/A
Report No.	:	PTC26011000901E-FC04
Prepared for		
Hangzhou Arenti Technology Co., Ltd.		
4F,Building 4,No. 825,Ruquan Road,Changhe Street,Binjiang District,Hangzhou,Zhejiang,China		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Hangzhou Arenti Technology Co., Ltd.
Address : 4F,Building 4,No. 825,Ruquan Road,Changhe Street,Binjiang District, Hangzhou, Zhejiang, China
Manufacture's name : Hangzhou Arenti Technology Co., Ltd.
Address : 4F,Building 4,No. 825,Ruquan Road,Changhe Street,Binjiang District, Hangzhou, Zhejiang, China
Product name : Smart baby monitor
Model name : Alnanny A4(Additional model refer to page 7)
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10-2020
Test Date : Jan. 12, 2026 to Apr. 10, 2026
Date of Issue : Apr. 10, 2026
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Jack Zhou'.

Jack Zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY	5
2.1 TEST SITE	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF E.U.T.	7
3.2 CHANNEL LIST.....	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST	9
4.2 MEASUREMENT UNCERTAINTY	11
4.3 DESCRIPTION OF SUPPORT UNITS.....	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.4 MEASUREMENT PROCEDURE.....	14
5.5 CONDUCTED EMISSION LIMIT.....	14
5.6 MEASUREMENT DESCRIPTION	14
5.7 CONDUCTED EMISSION TEST RESULT.....	14
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION.....	17
6.2 TEST SETUP	18
6.3 SPECTRUM ANALYZER SETUP	19
6.4 TEST PROCEDURE.....	20
6.5 SUMMARY OF TEST RESULTS	21
7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	28
7.1 TEST PROCEDURE.....	28
7.2 TEST RESULT	29
8 6DB BANDWIDTH MEASUREMENT	36



TEST PROCEDURE	36
TEST RESULT	36
9 MAXIMUM PEAK OUTPUT POWER.....	38
9.1 TEST PROCEDURE.....	38
9.2 TEST RESULT	38
10 POWER SPECTRAL DENSITY	40
10.1 TEST PROCEDURE.....	40
10.2 TEST RESULT	40
11 ANTENNA APPLICATION	42
11.1 ANTENNA REQUIREMENT	42
11.2 RESULT	42
12 TEST SETUP	43
13 EUT PHOTOS.....	45



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS



Report No.: PTC26011000901E-FC04

2.1 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

FCC Designation Number: CN1219



3 General Information

3.1 General Description of E.U.T.

Product Name	:	Smart baby monitor
Model Name	:	Alnanny A4
Additional model name	:	Alnanny A4 Kit,Alnanny A4 Kit Plus,Alnanny A4-2Cam Kit,Alnanny A4-2Cam Kit Plus,Alnanny A5 Kit,Alnanny A5,Alnanny A5Pro,Alnanny A5-2Cam Kit,Alnanny A5Pro Kit,Alnanny A5Pro-2Cam KitAlnanny B3, Alnanny B3 Kit,Alnanny C3,Alnanny C3 Kit,Alnanny B2,Alnanny C2,Baby 3Q,Baby 3F, Alnanny Kit Plus,Alnanny-2Cam Kit,Alnanny-2Cam Kit Plus, Alnanny-Cam
Operating frequency	:	905 MHz and 925 MHz
Number of Channels	:	11 channels
Type of Modulation	:	OFDM
Antenna installation	:	FPC Antenna
Antenna Gain	:	-0.83 dBi
Power supply	:	Input: DC 5V=1A
Hardware Version	:	N/A
Software Version	:	N/A
Test sample No.	:	PTC26011000901E-1/2, PTC26011000901E-2/2



3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2020 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Modulation
1	905	OFDM
2	907	OFDM
3	909	OFDM
4	911	OFDM
5	913	OFDM
6	915	OFDM
7	917	OFDM
8	919	OFDM
9	921	OFDM
10	923	OFDM
11	925	OFDM



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-26.5GHz	Aug. 14, 2025	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 14, 2025	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 14, 2025	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 14, 2025	1 Year
Test S/W	Tonscend	JS1120-3	/	/	/	/

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions(Test Frequency from 9KHz-18GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESPI7	101671	9KHz-7GHz	Aug. 14, 2025	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	192	9 KHz -30MHz	Aug. 14, 2025	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Sep.10, 2025	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 14, 2025	1 Year
Cable	IMRO	AK-9515E(9m)	Cable-L	9KHz-3GHz	Aug. 14, 2025	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	6625-01-588-5515	9KHz-40GHz	Aug. 14, 2025	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 14, 2025	1 Year
Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug. 14, 2025	1 Year



Report No.: PTC26011000901E-FC04

Horn Antenna	SCHWARZBECK	BBHA 9170	9170-1066	15GHz-40GHz	Jun. 24, 2025	1 Year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Jun. 23, 2025	1 Year
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 14, 2025	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 14, 2025	1 Year
Band Reject Filter	MICROTRONICS	BRC50722	G015	0 to 880 and 950 to 1500MHz	Aug. 14, 2025	1 Year
Test S/W	Tonscend	TS+	/	/	/	/

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 14, 2025	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 14, 2025	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 14, 2025	1 Year
Limiter	R&S	ESH3-Z2	0357.8810.54-102808-NB	0Hz-30MHz	Aug. 14, 2025	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	0.09MHz-6GHz	Mar. 24,2025	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	0.09MHz-6GHz	Mar. 24,2026	1 Year
Test S/W	Tonscend	JS32-CE	/	/	/	/



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9kHz~30MHz)	$\pm 3.15\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%	



Report No.: PTC26011000901E-FC04

4.3 Description of Support Units

Equipment	Model No.	Manufacturer	Series No.	Parameter
Adapter	DCT06W050100US-C1	Zhuzhou Dachuan Electronic Technology Co., Ltd	/	Input: 100-240V~ 50/60Hz 0.2A Output: 5.0V $\overline{\text{---}}$ 1.0A 5.0W
Adapter	DCT07W050100US-C1	Zhuzhou Dachuan Electronic Technology Co., Ltd	/	Input: 100-240V~ 50/60Hz 0.25A Output: 5.0V $\overline{\text{---}}$ 1.0A 5.0W

5 Conducted Emission

Test Requirement	:	FCC CFR 47 Part 15 Section 15.207
Test Method	:	ANSI C63.10-2020
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	:	25.5 °C
Humidity	:	51 % RH
Atmospheric Pressure	:	101.2kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020.

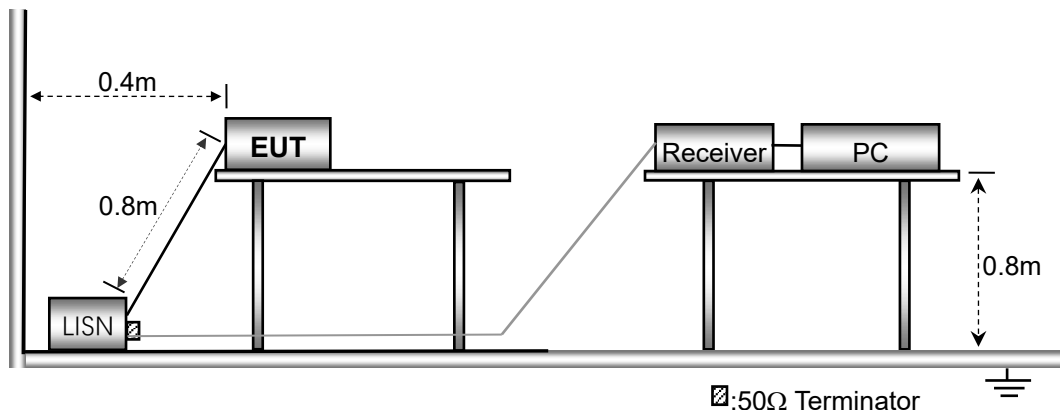

5.3 Test SET-UP (Block Diagram of Configuration)

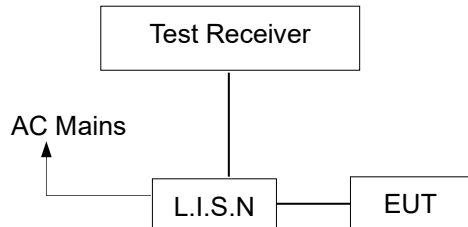

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass.

All the modulation modes were tested the data of the worst mode (Adapter:DCT07W050100US-C1 +CH6) are recorded in the following pages.



Line-AC 125V/60Hz

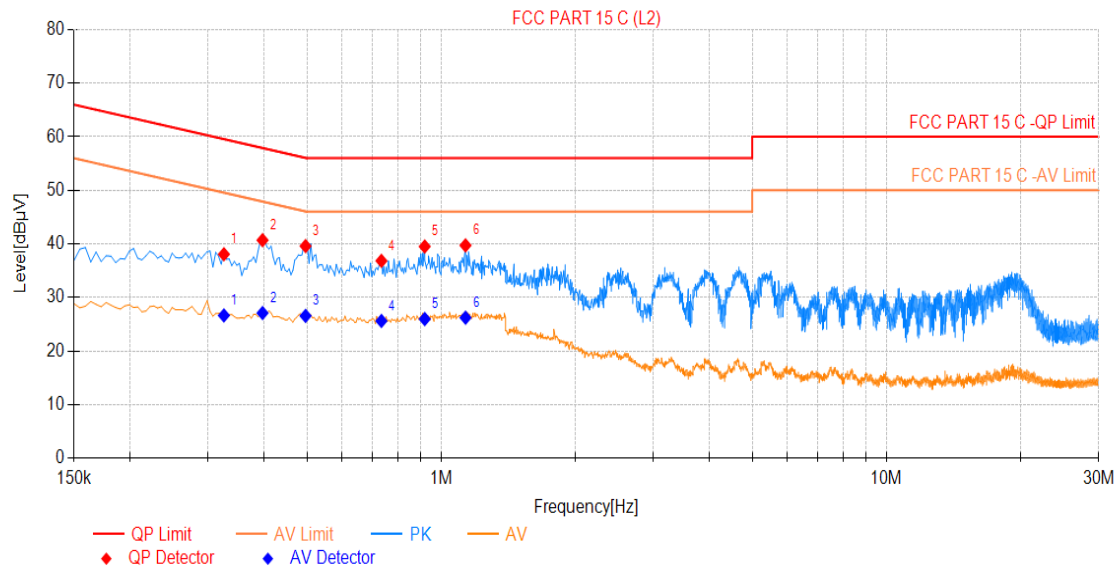


Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.326	28.25	9.81	38.06	59.57	21.51	16.82	26.63	49.57	22.94	PASS
2	0.398	30.88	9.81	40.69	57.91	17.22	17.28	27.09	47.91	20.82	PASS
3	0.497	29.78	9.81	39.59	56.06	16.47	16.74	26.55	46.06	19.51	PASS
4	0.735	27.01	9.82	36.83	56.00	19.17	15.79	25.61	46.00	20.39	PASS
5	0.920	29.68	9.83	39.51	56.00	16.49	16.13	25.96	46.00	20.04	PASS
6	1.136	29.89	9.83	39.72	56.00	16.28	16.39	26.22	46.00	19.78	PASS



Neutral-AC 125V/60Hz

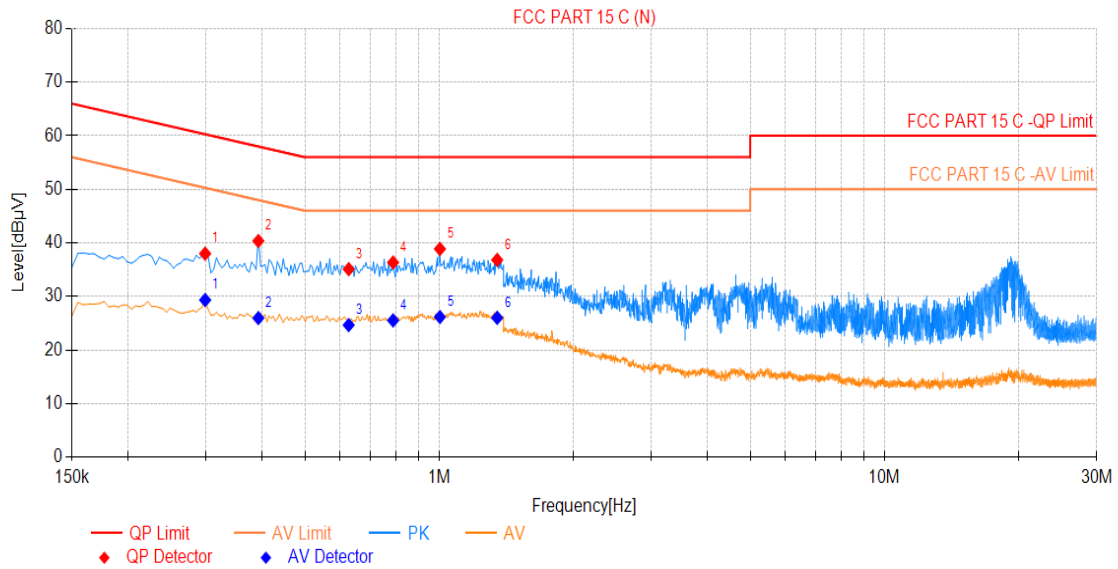

Final Data List											
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.299	28.18	9.81	37.99	60.28	22.29	19.52	29.33	50.28	20.95	PASS
2	0.393	30.55	9.81	40.36	58.00	17.64	16.15	25.96	48.00	22.04	PASS
3	0.627	25.28	9.82	35.10	56.00	20.90	14.83	24.65	46.00	21.35	PASS
4	0.789	26.52	9.82	36.34	56.00	19.66	15.70	25.52	46.00	20.48	PASS
5	1.005	29.04	9.83	38.87	56.00	17.13	16.32	26.15	46.00	19.85	PASS
6	1.352	26.99	9.83	36.82	56.00	19.18	16.17	26.00	46.00	20.00	PASS

Note:1. All test mode have been tested. Only the worst case have been recorded in the report.

2.QP Margin[dB]= QP Limit[dBμV]- QP Value[dBμV], AV Margin[dB]= AV Limit[dBμV]- AV Value[dBμV].



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10-2020
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C
 Humidity : 51.1 % RH
 Atmospheric Pressure : 101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

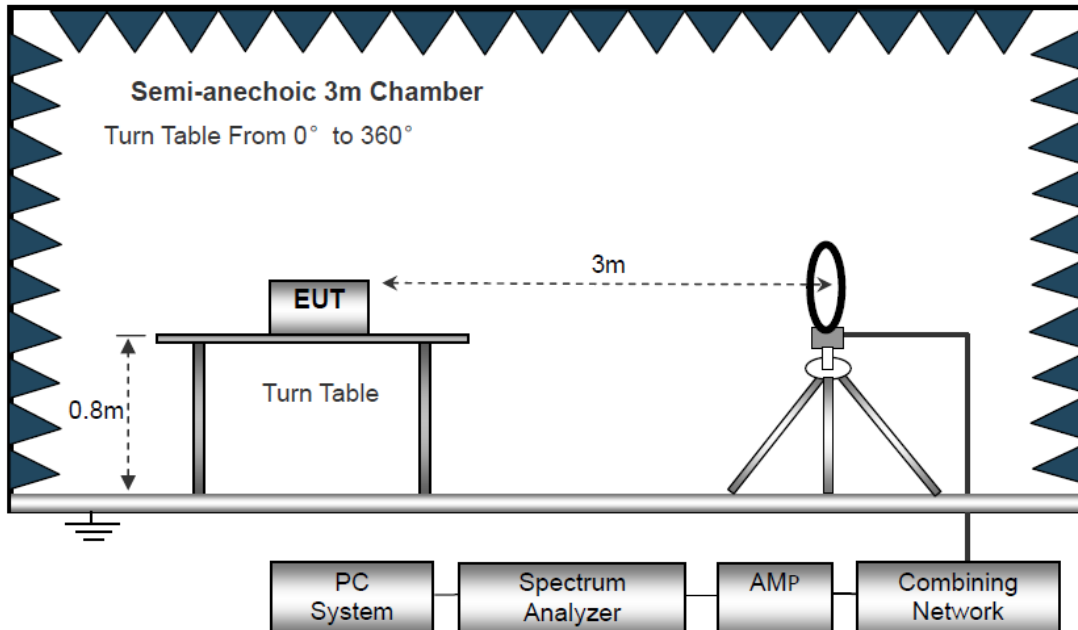

The test setup for emission measurement from 30 MHz to 1 GHz.

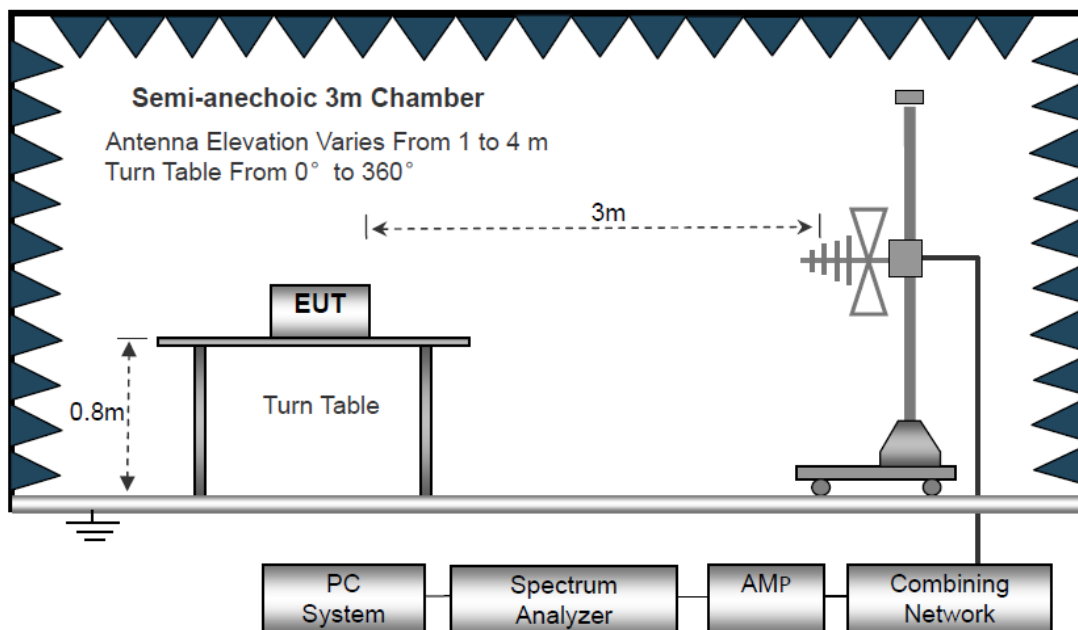

The test setup for emission measurement above 1 GHz

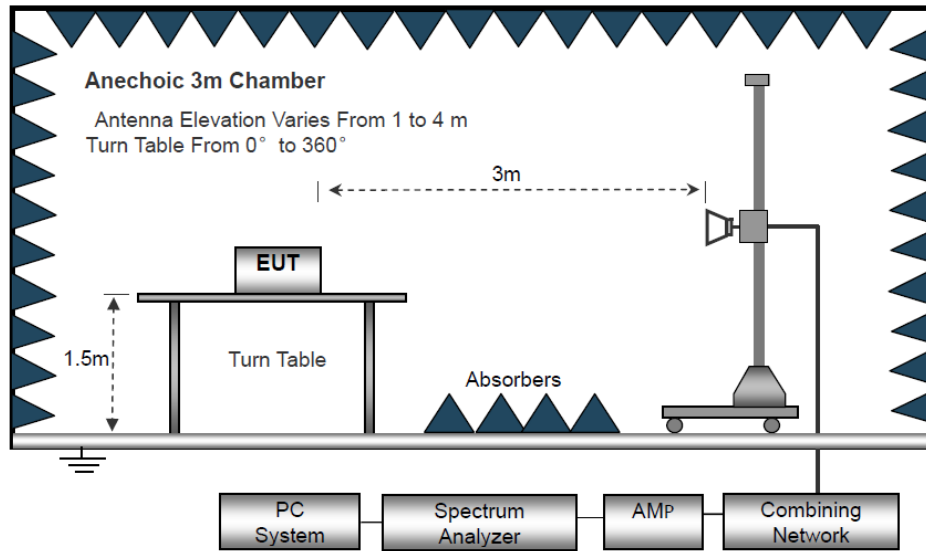

6.3 Spectrum Analyzer Setup

Receiver Setup	Frequency	Detector	RBW	VBW	Remark
	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2020.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz


Pass.

Please refer to the following test plots for the worst test mode (Adapter:DCT07W050100US-C1

+CH6:915 MHz).



Antenna Polarization: Horizontal (CH6:905 MHz)

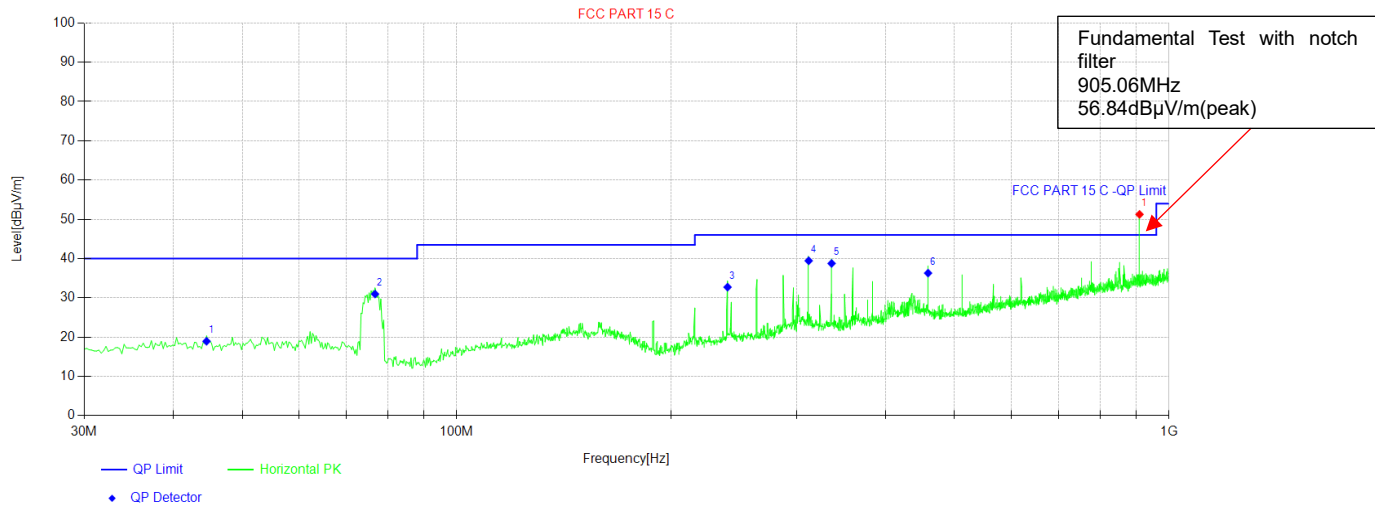


Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	44.55	28.84	-9.89	18.95	40.00	21.05	Horizontal	PASS
2	76.80	44.84	-13.86	30.98	40.00	9.02	Horizontal	PASS
3	240.01	42.07	-9.34	32.73	46.00	13.27	Horizontal	PASS
4	312.03	46.38	-6.93	39.45	46.00	6.55	Horizontal	PASS
5	336.04	45.23	-6.46	38.77	46.00	7.23	Horizontal	PASS
6	458.98	39.07	-2.76	36.31	46.00	9.69	Horizontal	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Antenna Polarization: Vertical (CH1:905 MHz)

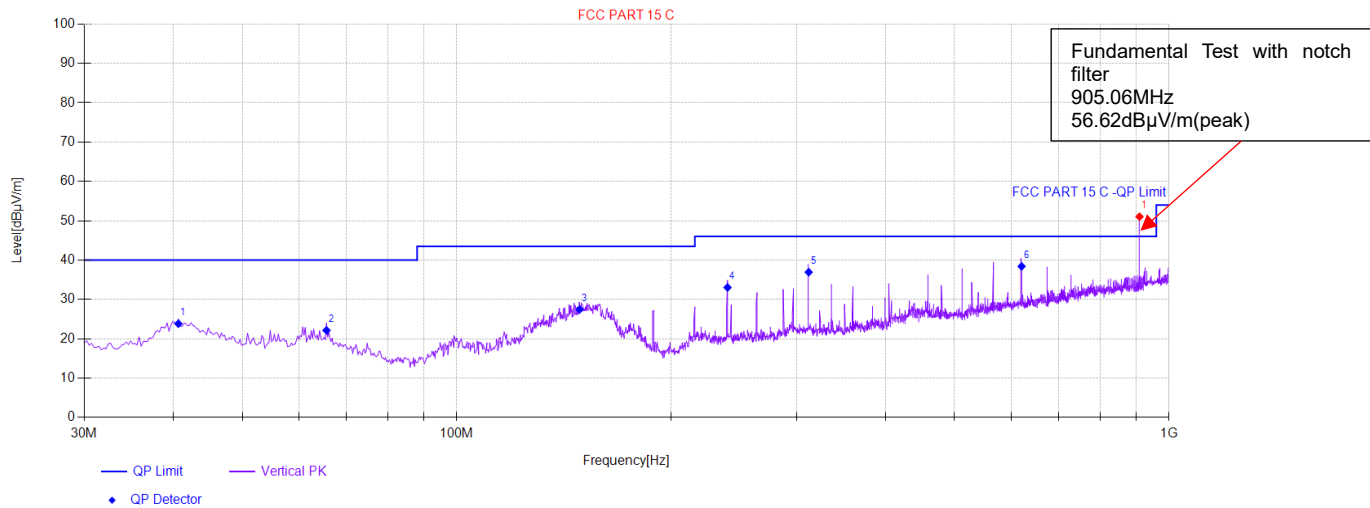

Final Data List[QP]

NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	40.67	33.97	-10.13	23.84	40.00	16.16	Vertical	PASS
2	65.65	33.83	-11.68	22.15	40.00	17.85	Vertical	PASS
3	148.83	35.79	-8.32	27.47	43.50	16.03	Vertical	PASS
4	240.01	42.38	-9.34	33.04	46.00	12.96	Vertical	PASS
5	312.03	43.86	-6.93	36.93	46.00	9.07	Vertical	PASS
6	620.97	37.67	0.74	38.41	46.00	7.59	Vertical	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Test Frequency 1GHz-10GHz:

Adapter:DCT07W050100US-C1+CH1:

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1810.00	H	48.43	6.58	34.04	34.09	54.96	74	19.04	PK
1810.00	H	32.57	6.58	34.04	34.09	39.10	54	14.90	AV
2715.00	H	40.27	7.73	37.11	34.79	50.32	74	23.68	PK
2715.00	H	32.95	7.73	37.11	34.79	43.00	54	11.00	AV
1810.00	V	42.30	6.58	35.28	34.09	50.07	74	23.93	PK
1810.00	V	24.47	6.58	35.28	34.09	32.24	54	21.76	AV
2715.00	V	37.74	7.73	39.31	34.79	49.99	74	24.01	PK
2715.00	V	24.10	7.73	39.31	34.79	36.35	54	17.65	AV

Note: 1. The testing has been conformed to $10 \times 912.00\text{MHz} = 9120\text{MHz}$.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Limit-Emission Level



Adapter:DCT07W050100US-C1+CH6:

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1830.00	H	47.09	6.58	34.04	34.09	53.62	74	20.38	PK
1830.00	H	30.67	6.58	34.04	34.09	37.20	54	16.8	AV
2745.00	H	42.28	7.73	37.11	34.79	52.33	74	21.67	PK
2745.00	H	32.90	7.73	37.11	34.79	42.95	54	11.05	AV
1830.00	V	42.78	6.58	35.28	34.09	50.55	74	23.45	PK
1830.00	V	25.13	6.58	35.28	34.09	32.90	54	21.1	AV
2745.00	V	38.83	7.73	39.31	34.79	51.08	74	22.92	PK
2745.00	V	22.65	7.73	39.31	34.79	34.90	54	19.1	AV



Adapter:DCT07W050100US-C1+CH11:

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1850.00	H	48.46	6.58	34.04	34.09	54.99	74	19.01	PK
1850.00	H	31.99	6.58	34.04	34.09	38.52	54	15.48	AV
2775.00	H	41.34	7.73	37.11	34.79	51.39	74	22.61	PK
2775.00	H	34.73	7.73	37.11	34.79	44.78	54	9.22	AV
1850.00	V	42.73	6.58	35.28	34.09	50.50	74	23.5	PK
1850.00	V	26.90	6.58	35.28	34.09	34.67	54	19.33	AV
2775.00	V	37.66	7.73	39.31	34.79	49.91	74	24.09	PK
2775.00	V	23.90	7.73	39.31	34.79	36.15	54	17.85	AV

Note: 1. The testing has been conformed to 10*925.00MHz=9250MHz.

2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 Emission Level = Reading + Factor
 Margin=Limit-Emission Level

**Radiated Restricted Band:**

Test Mode: Adapter:DCT07W050100US-C1+Channel 905MHz							
Frequency (MHz)	Read Level (dBuV)	Corr. Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity H/V	Detector
902	24.44	-2.97	21.47	46	24.53	H	Peak
928	23.36	-2.51	20.85	46	25.15	H	Peak
902	23.33	-2.97	20.36	46	25.64	V	Peak
928	24.50	-2.51	21.99	46	24.01	V	Peak

Test Mode: Adapter:DCT07W050100US-C1+Channel 925MHz							
Frequency (MHz)	Read Level (dBuV)	Corr. Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity H/V	Detector
902	24.45	-2.97	21.48	46	24.52	H	Peak
928	23.63	-2.51	21.12	46	24.88	H	Peak
902	23.83	-2.97	20.86	46	25.14	V	Peak
928	24.63	-2.51	22.12	46	23.88	V	Peak




7 Conduct Band Edge And Spurious Emissions Measurement

Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	: ANSI C63.10-2020
Test Limit	: Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Setup







7.3 Test Result

TestMode	Frequency[MHz]	Freq Range	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
CH1	905	0~Reference	16.423	16.423	---	PASS
CH1	905	9 kHz~30MHz	16.423	-19.117	≤ -3.58	PASS
CH1	905	30 MHz~12750MHz	16.423	-42.187	≤ -3.58	PASS
CH6	915	0~Reference	17.055	17.055	---	PASS
CH6	915	9 kHz~30MHz	17.055	-24.512	≤ -2.95	PASS
CH6	915	30 MHz~12750MHz	17.055	-34.289	≤ -2.95	PASS
CH11	925	0~Reference	16.795	16.795	---	PASS
CH11	925	9 kHz~30MHz	16.795	-26.102	≤ -3.21	PASS
CH11	925	30 MHz~12750MHz	16.795	-34.495	≤ -3.21	PASS


Test Graphs:

Conducted spurious emissions, CH1:

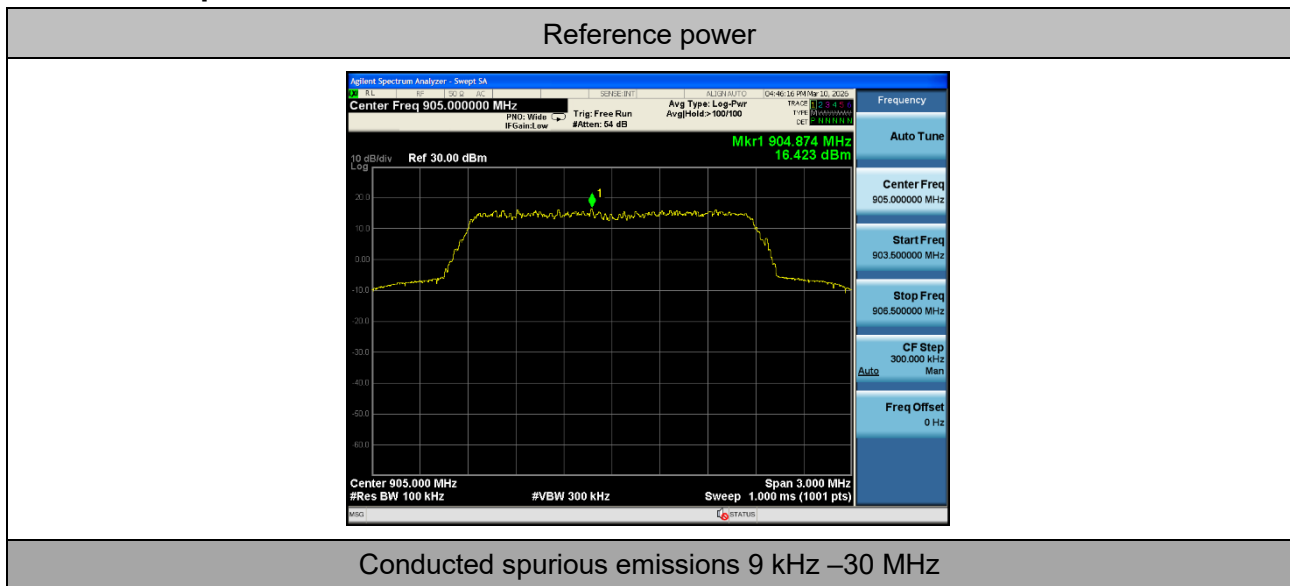

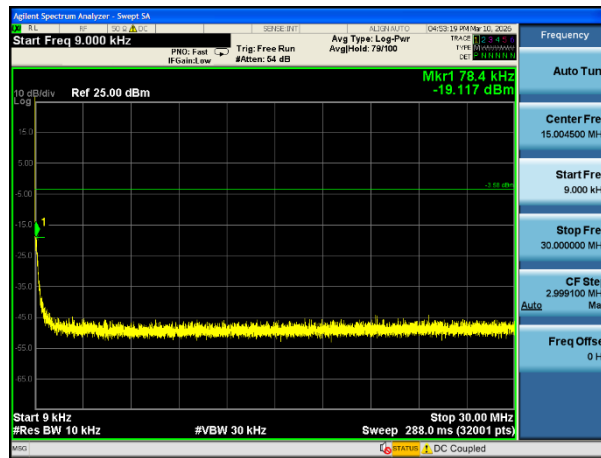


Conducted spurious emissions 30 MHz –12750 MHz

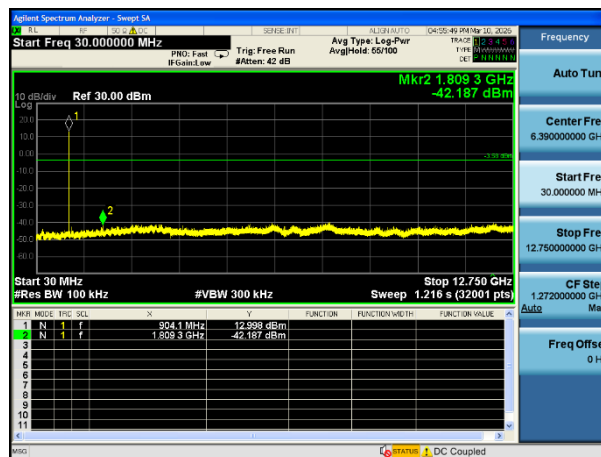




Conducted spurious emissions, CH6:

Reference power

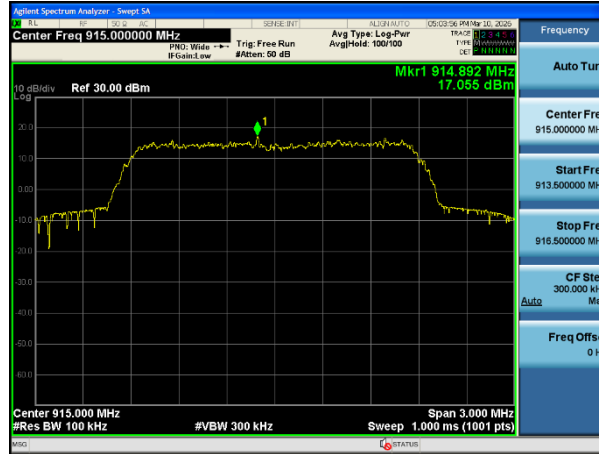


Conducted spurious emissions 9 kHz –30 MHz

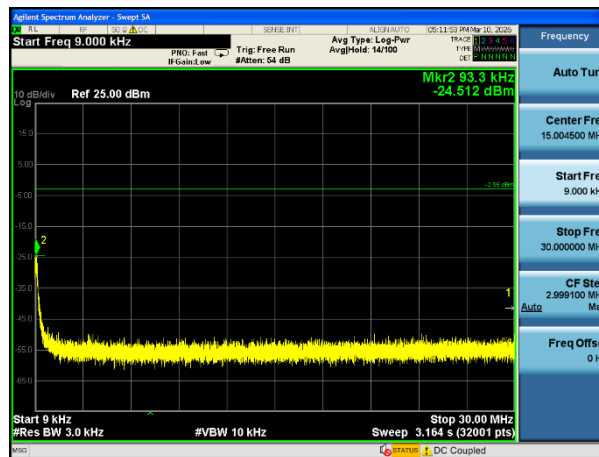

Conducted spurious emissions 30 MHz –12750 MHz




Report No.: PTC26011000901E-FC04

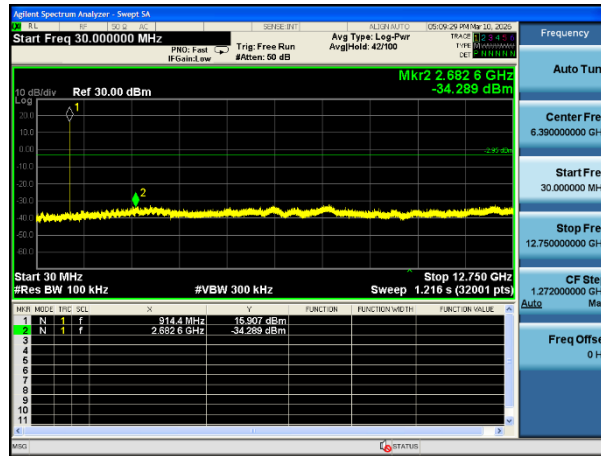




Conducted spurious emissions, CH11:

Reference power

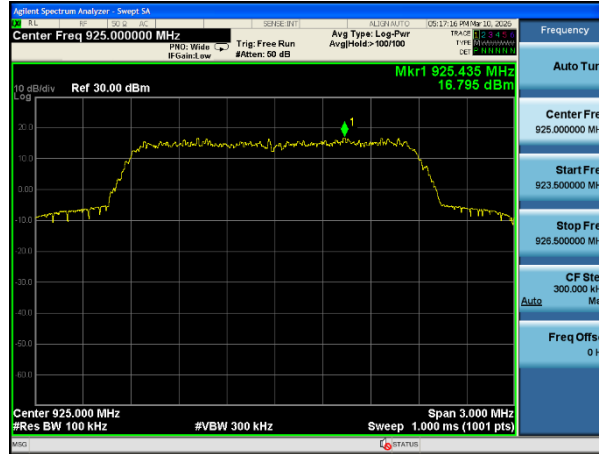


Conducted spurious emissions 9 kHz –30 MHz

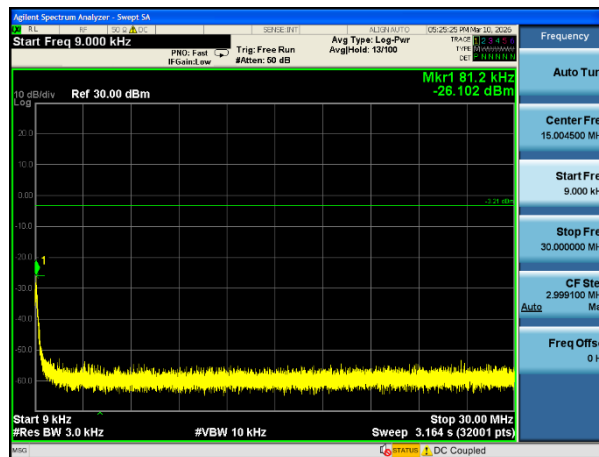

Conducted spurious emissions 30 MHz –12750 MHz




Report No.: PTC26011000901E-FC04

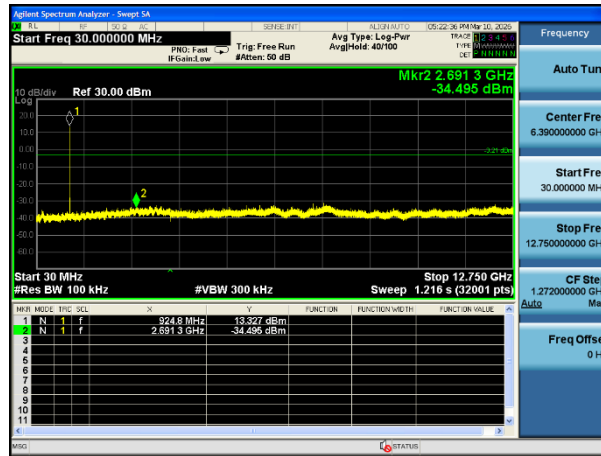



Band edge:

Test Mode	Result[dBm]	Limit[dBm]	Verdict
CH1	-26.147	-3.58	PASS
CH6	-37.731	-2.95	PASS
CH11	-29.192	-3.21	PASS

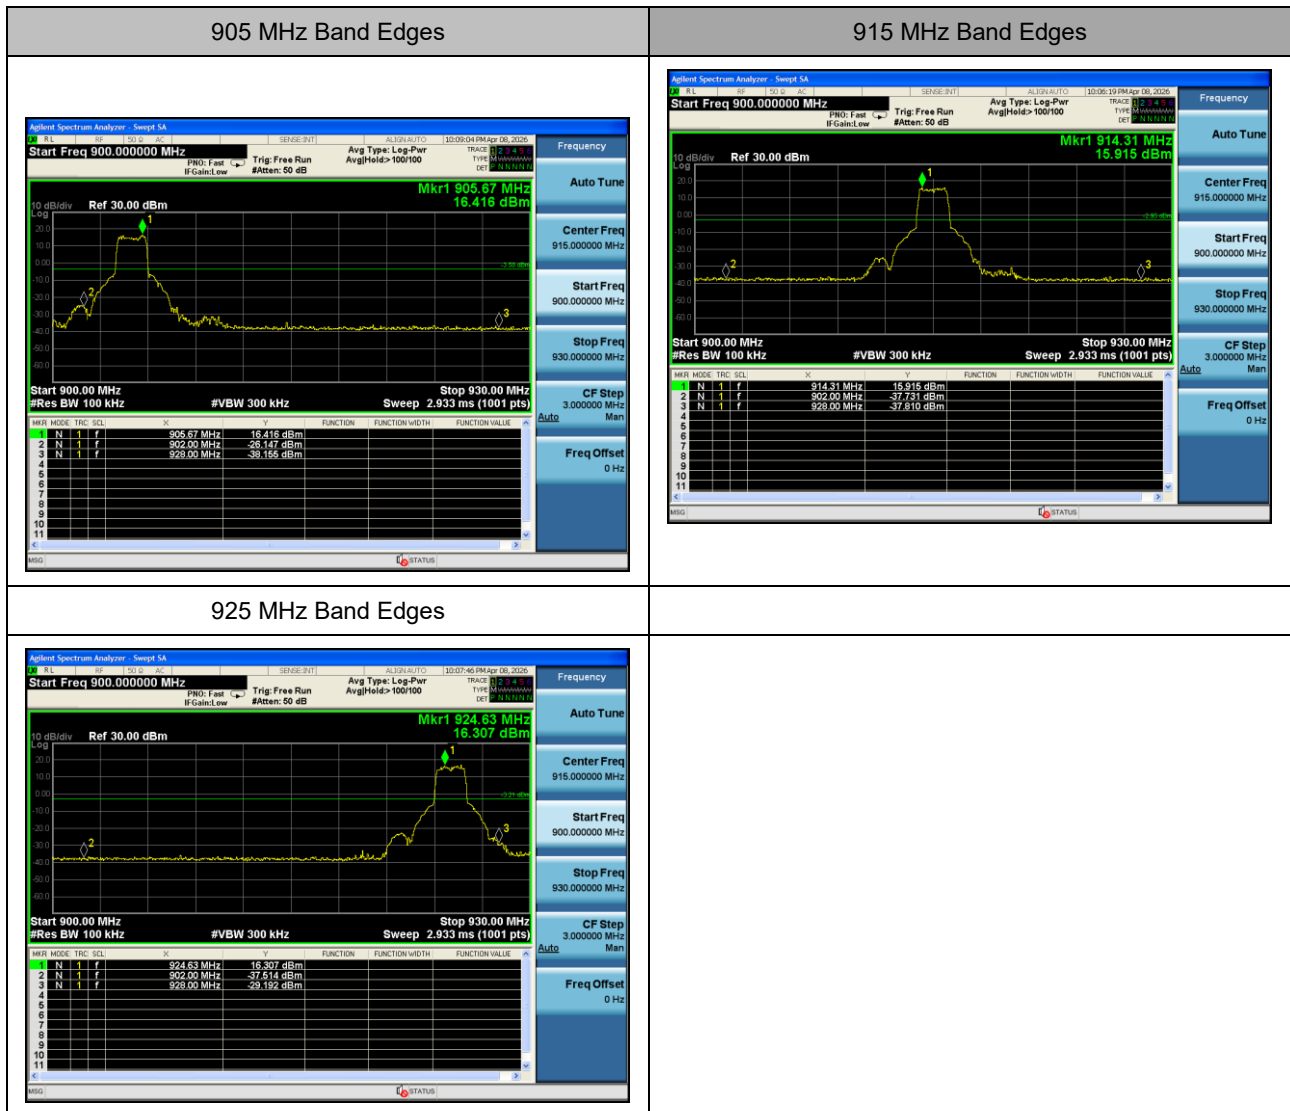



8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10-2020

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure


The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, the automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

11.8.1 Option 1

The steps for the first option are as follows:

Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the $VBW \geq [3 \times RBW]$. Detector = peak. Trace mode = max-hold. Sweep = No faster than coupled (auto) time. Allow the trace to stabilize. Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

Test Setup




Test Result

Test Mode	Frequency[MHz]	6dB Bandwidth [MHz]	Minimum Limit[MHz]	Verdict
CH1	905	1.775	0.5	PASS
CH6	915	1.789	0.5	PASS
CH11	925	1.786	0.5	PASS



Test Graphs:

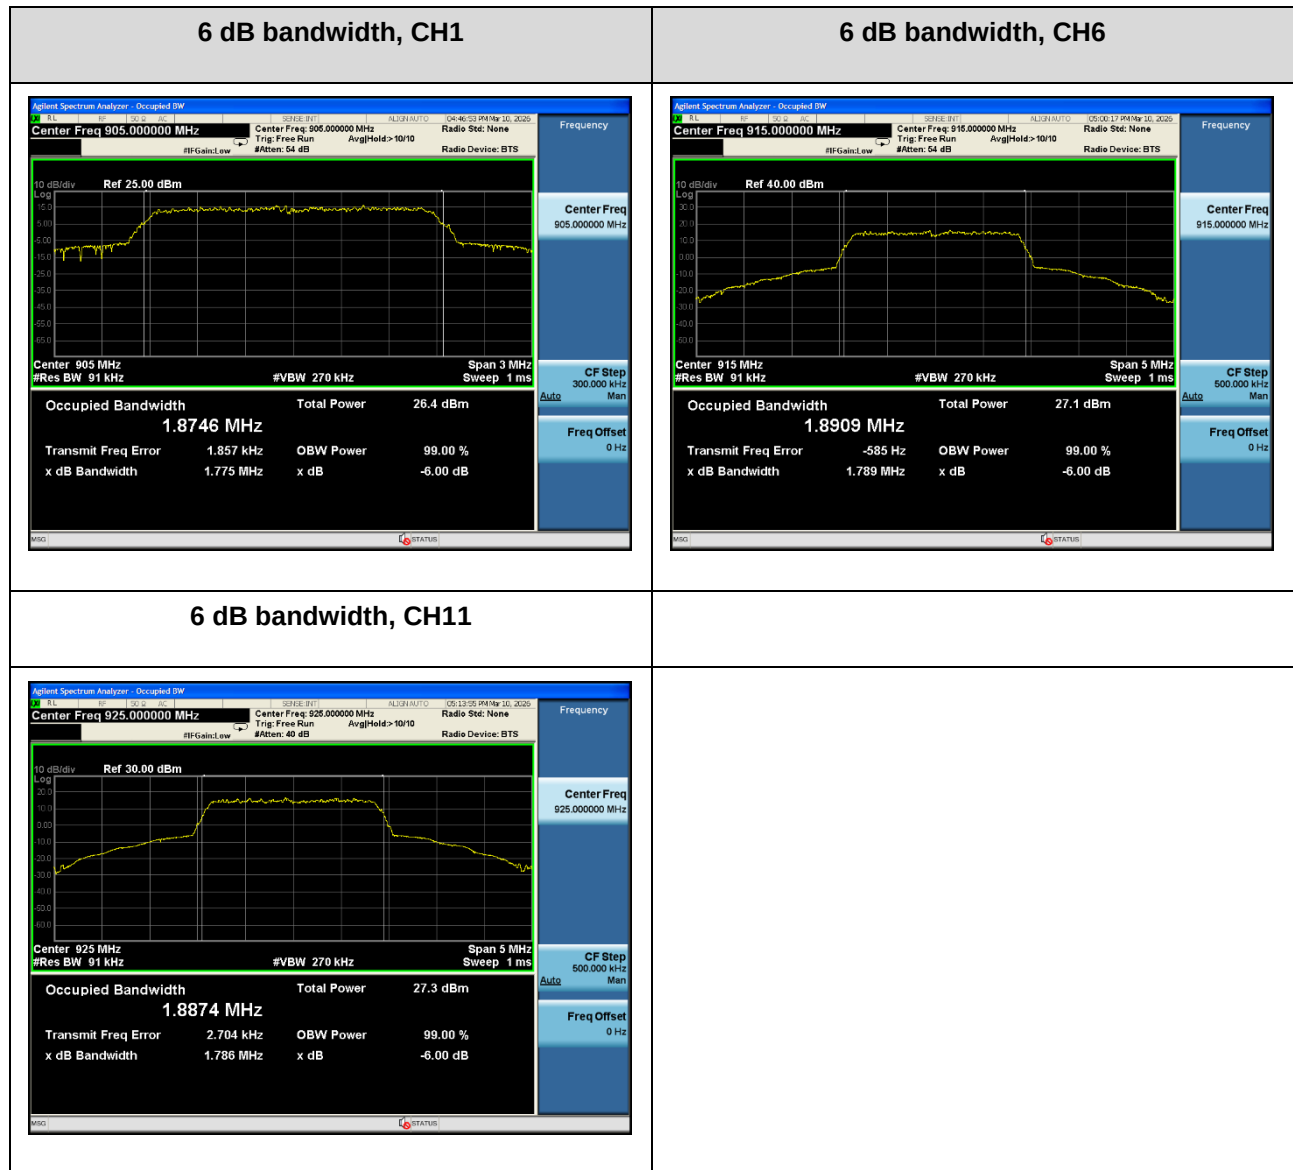




9 Maximum Peak Output Power

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10-2020
Test Limit	:	Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

9.1 Test Procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

9.2 Test Setup




9.3 Test Result

Test Mode	Conducted Power [dBm]	Limit [dBm]	Margin [dB]	Verdict
CH1	27.602	30	2.398	PASS
CH6	27.967	30	2.033	PASS
CH11	27.930	30	2.070	PASS



Test Graphs:

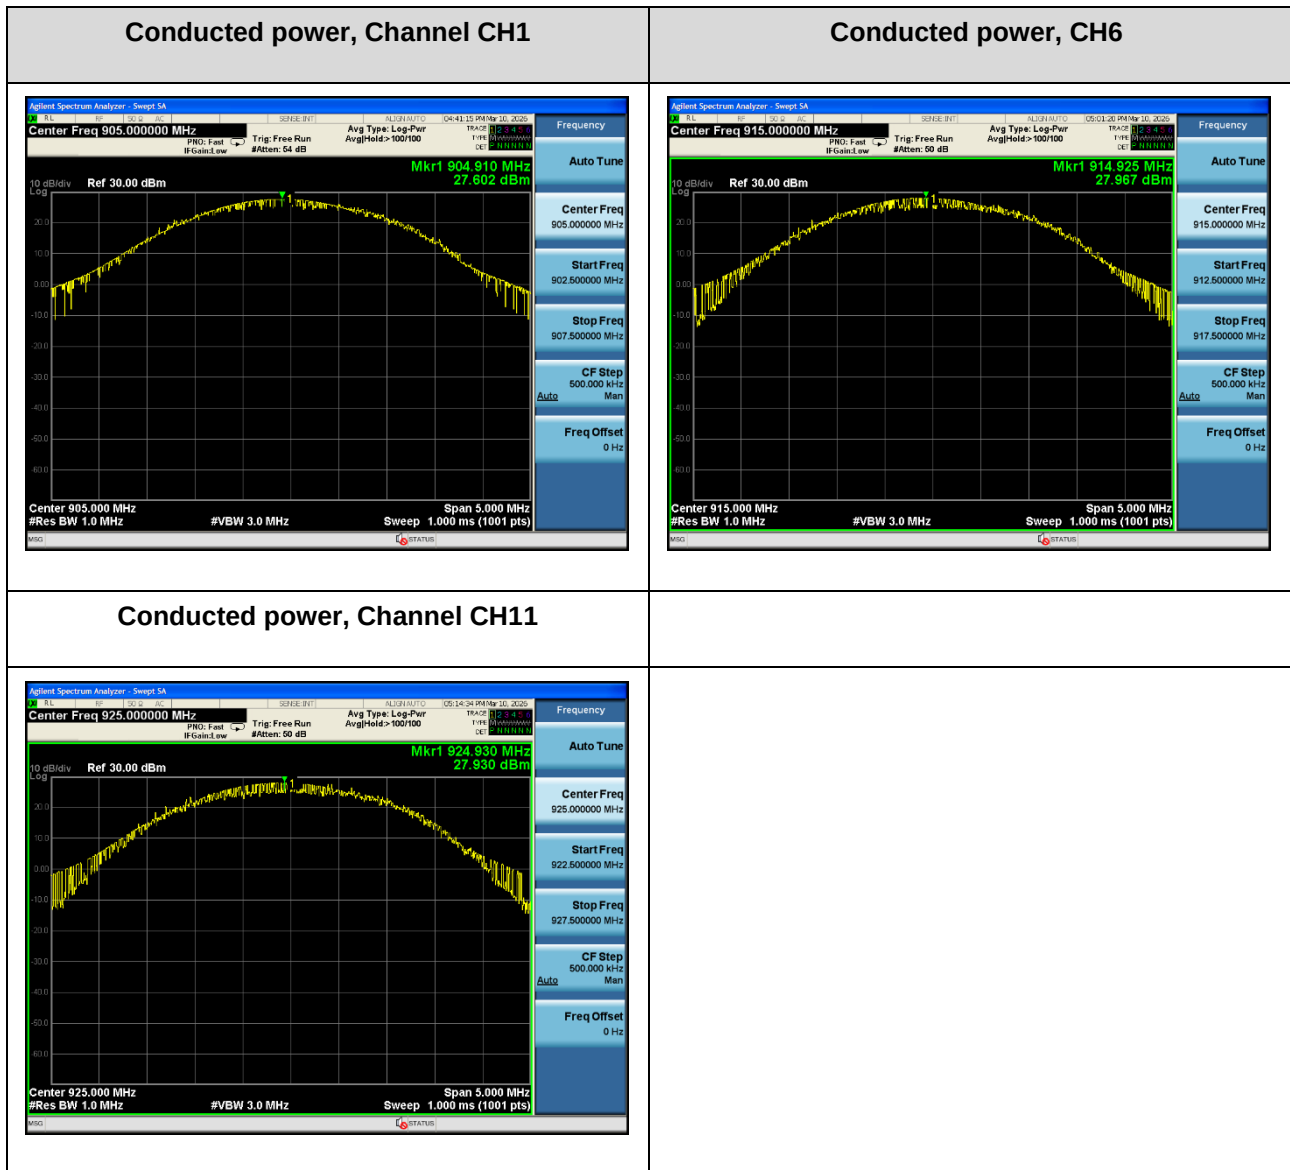




10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10-2020
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

10.2 Test Setup




10.3 Test Result

Test Mode	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
CH1	2.507	≤8.00	PASS
CH6	2.749	≤8.00	PASS
CH11	3.074	≤8.00	PASS



Test Graphs:

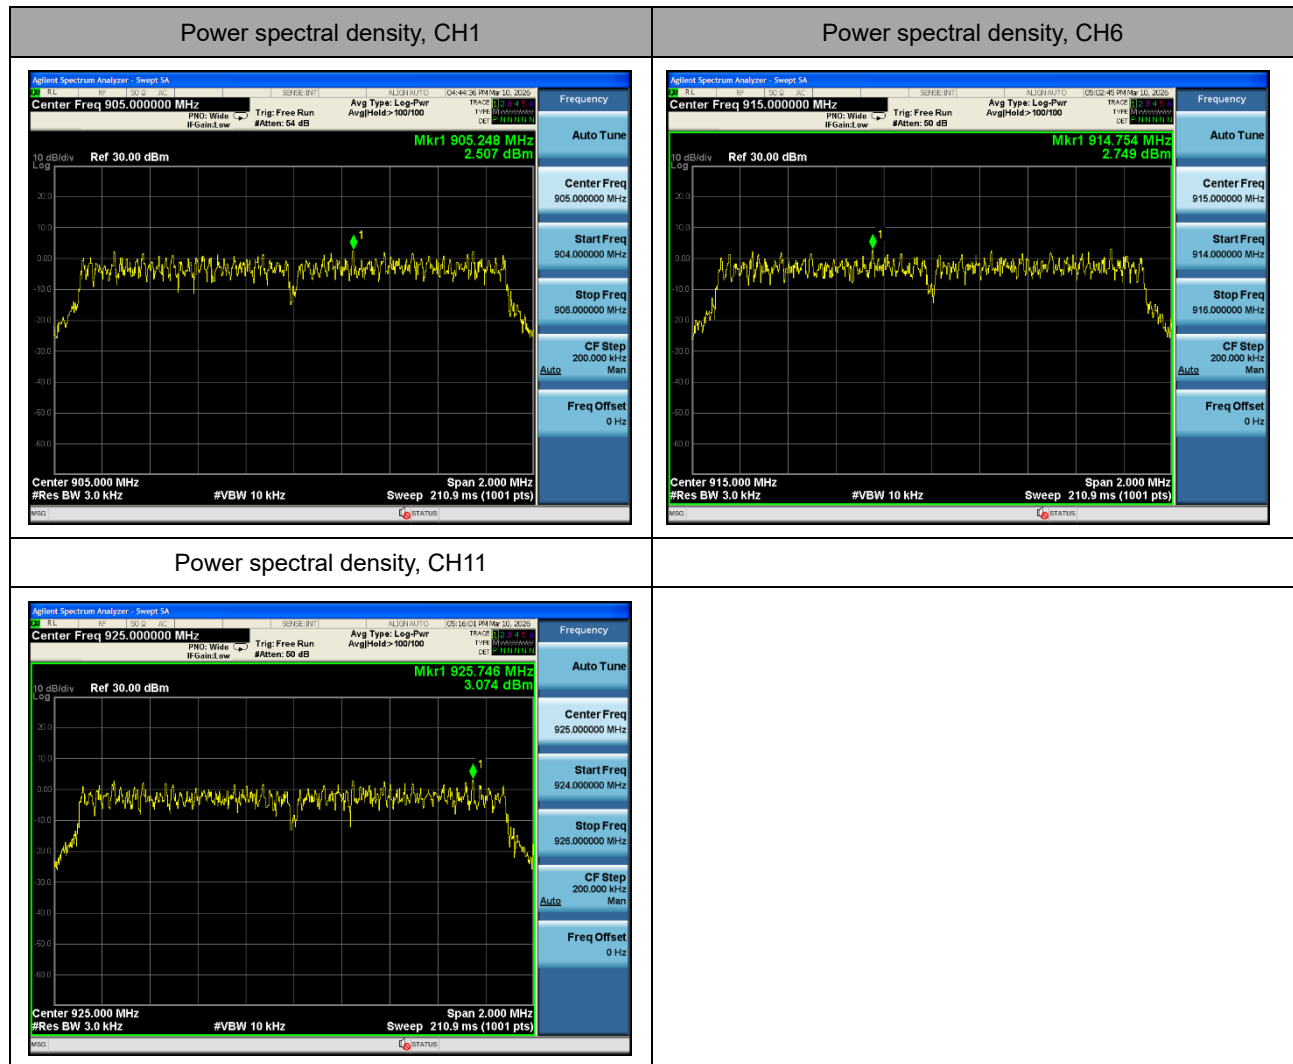



11 Antenna Application

11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result


The EUT'S antenna, permanent attached antenna, is internal FPC antenna. The antenna's gain is -0.83 dBi and meets the requirement.

12 Test Setup

Conducted Emissions



Radiated Spurious Emissions
Test Frequency From Below 1GHz

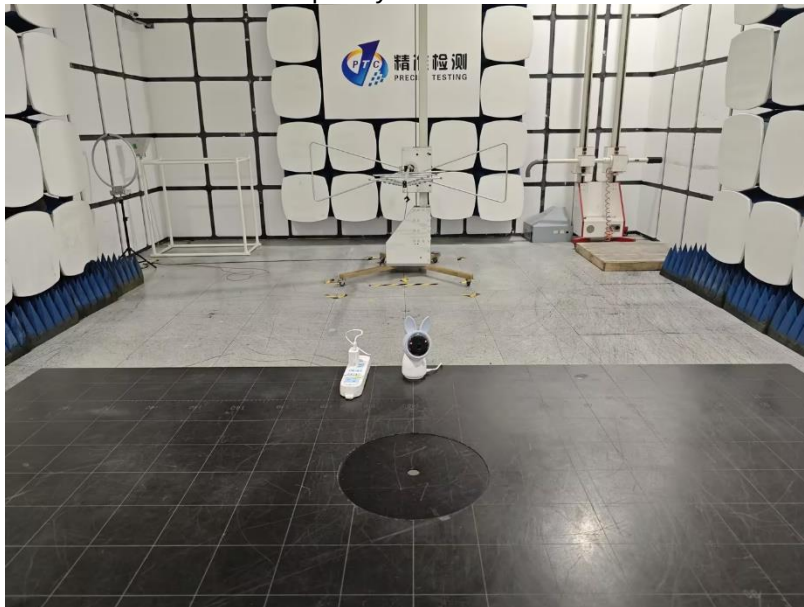



Test frequency from Above 1GHz




13 EUT Photos








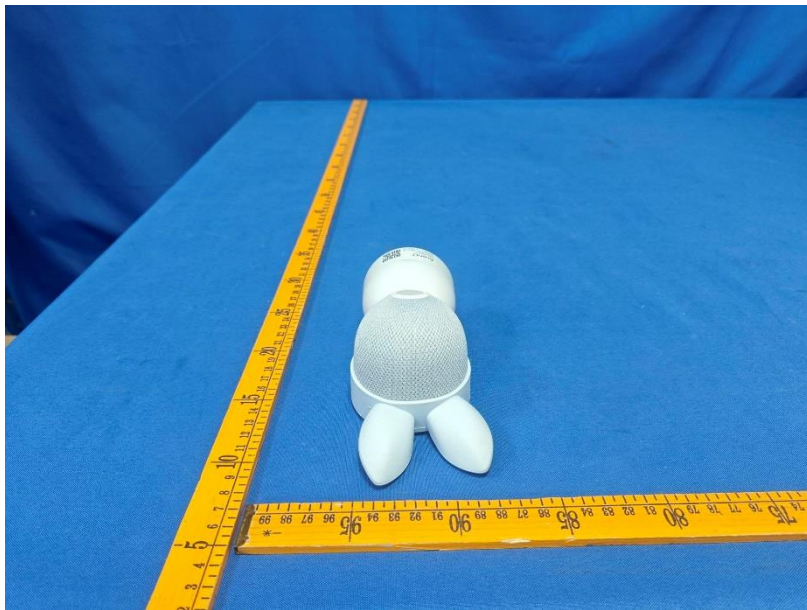
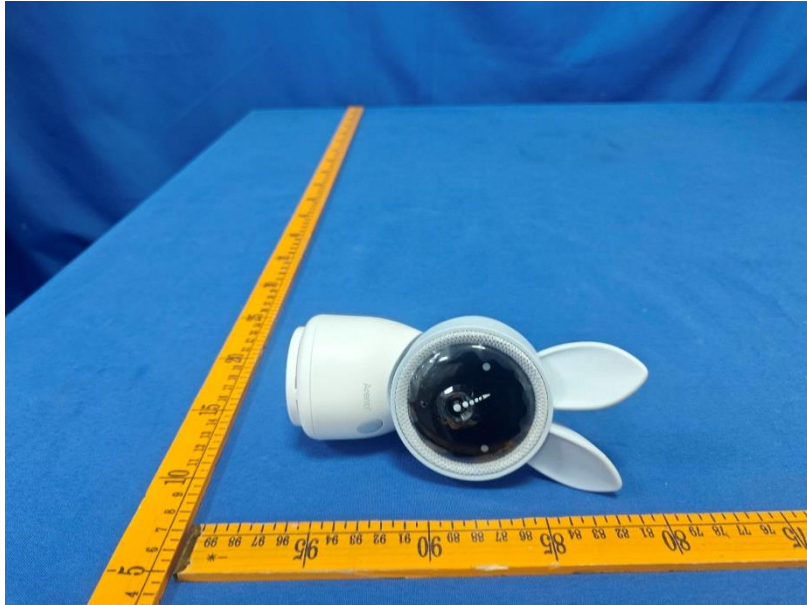






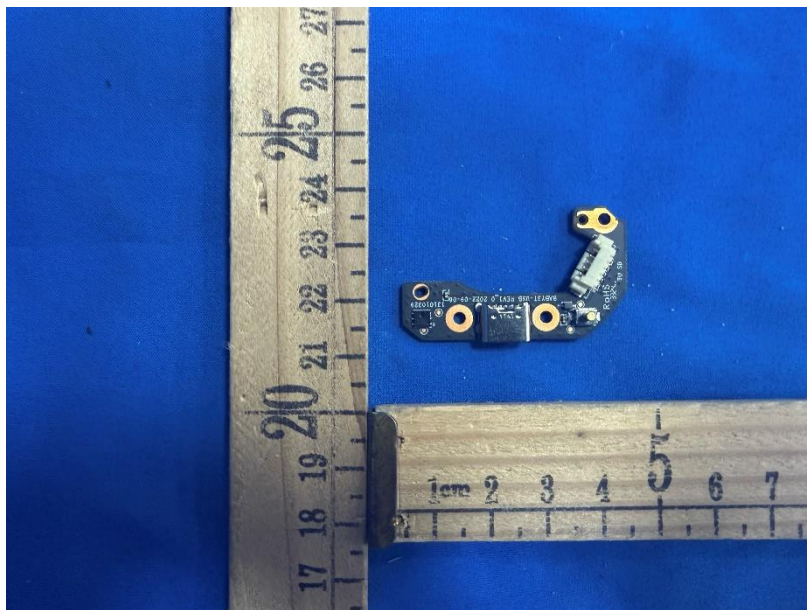



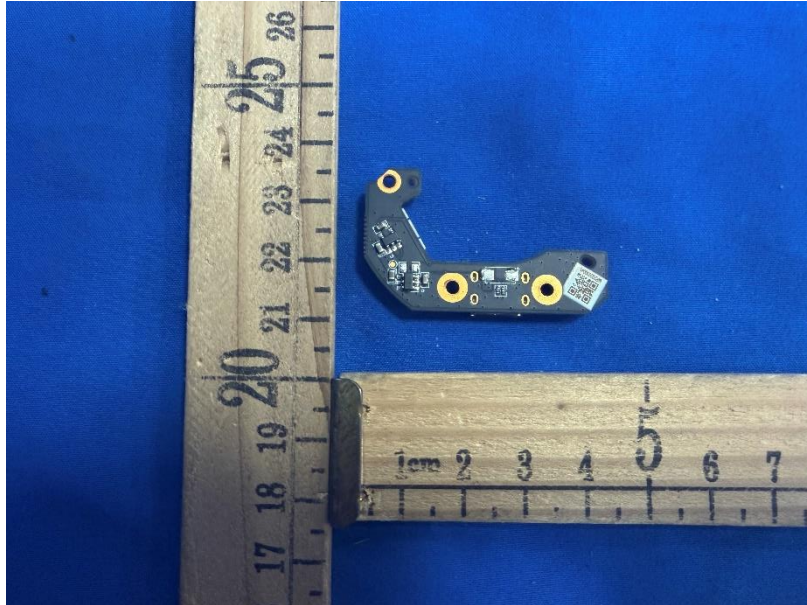


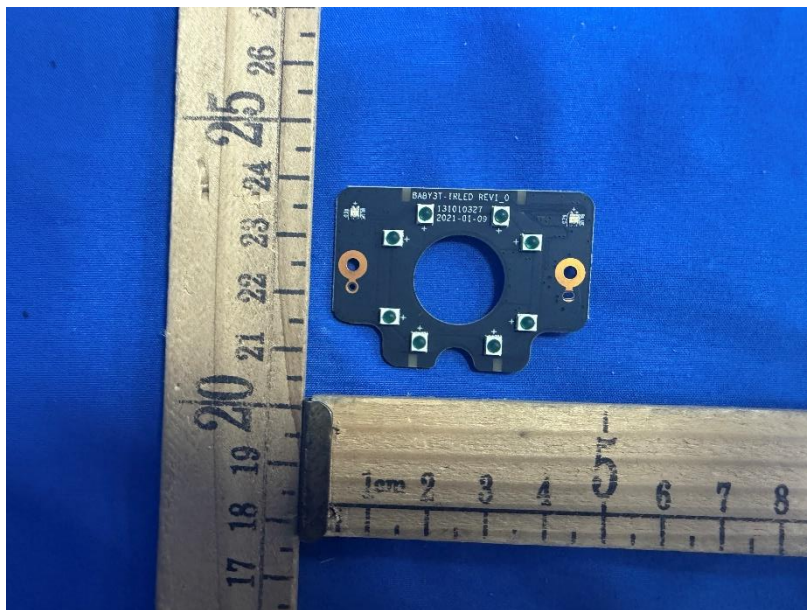
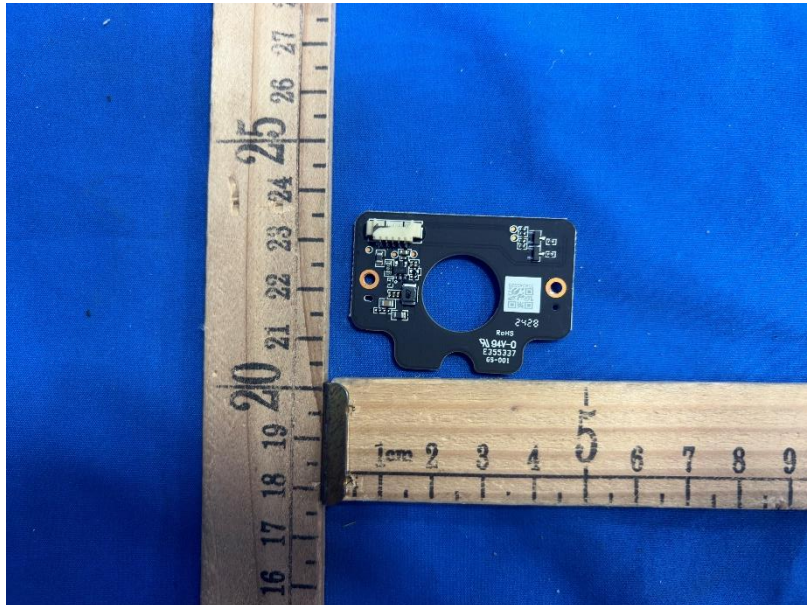


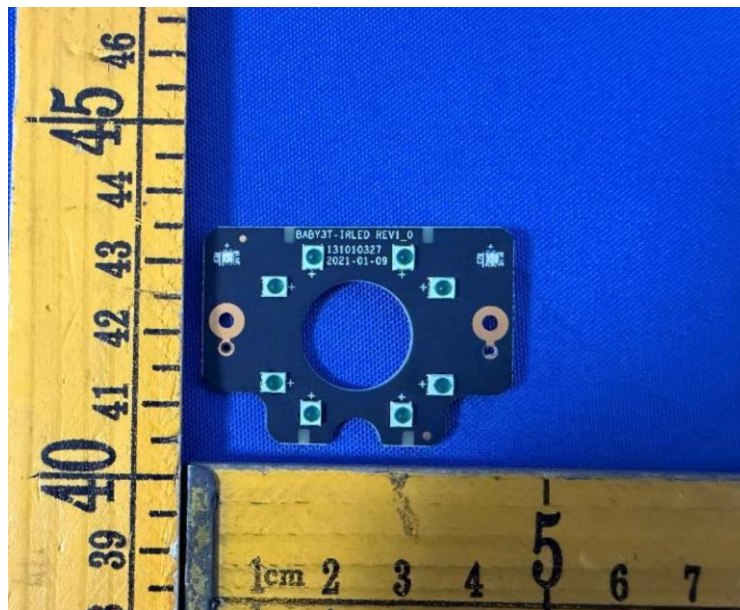
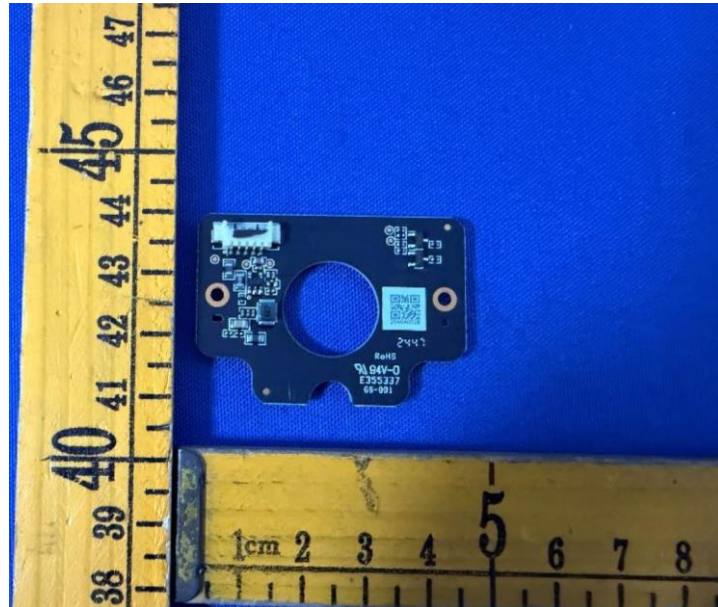


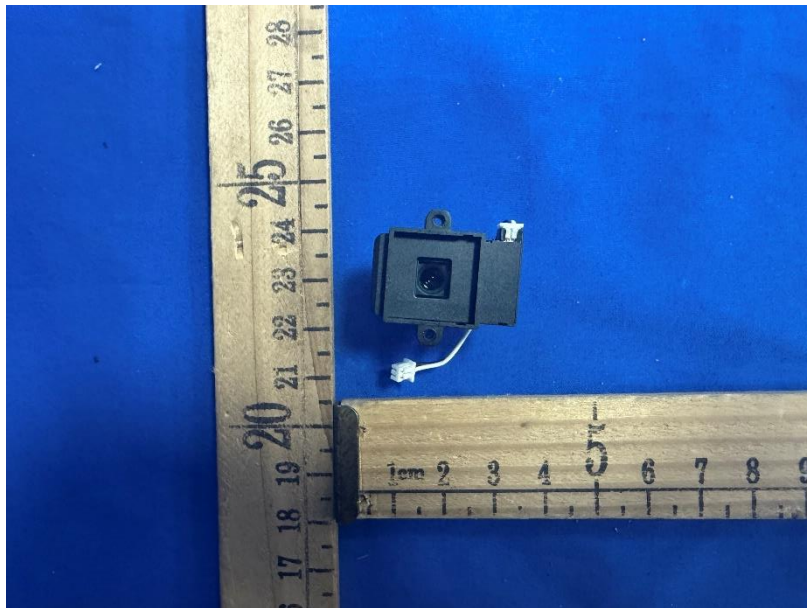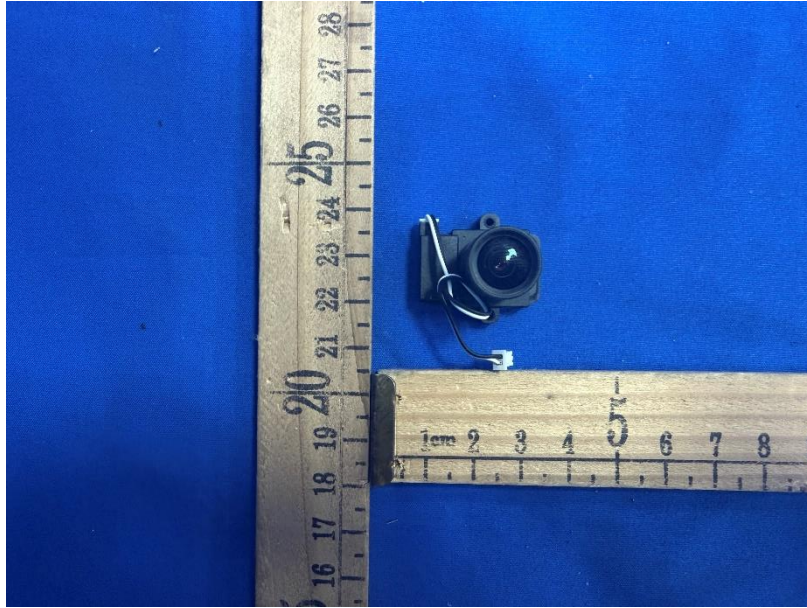


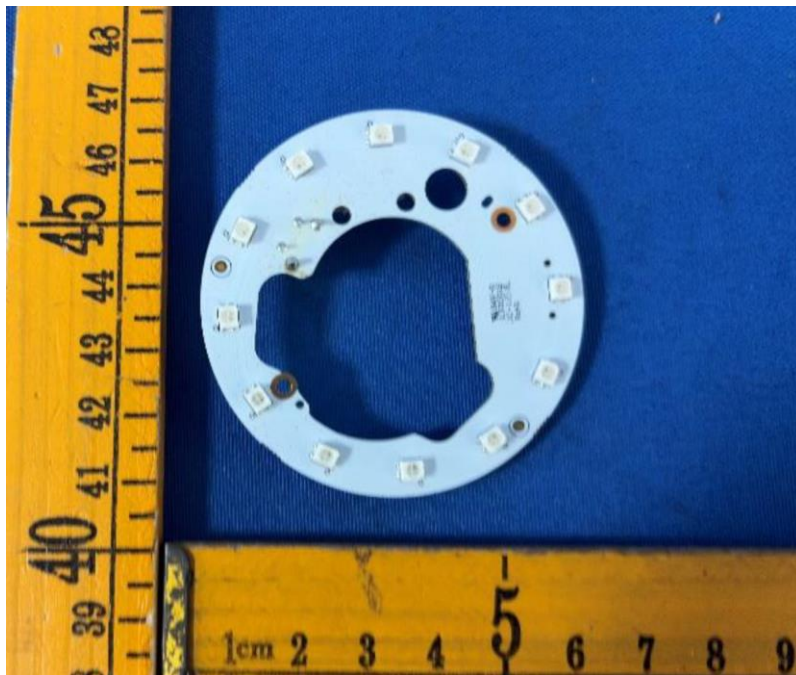


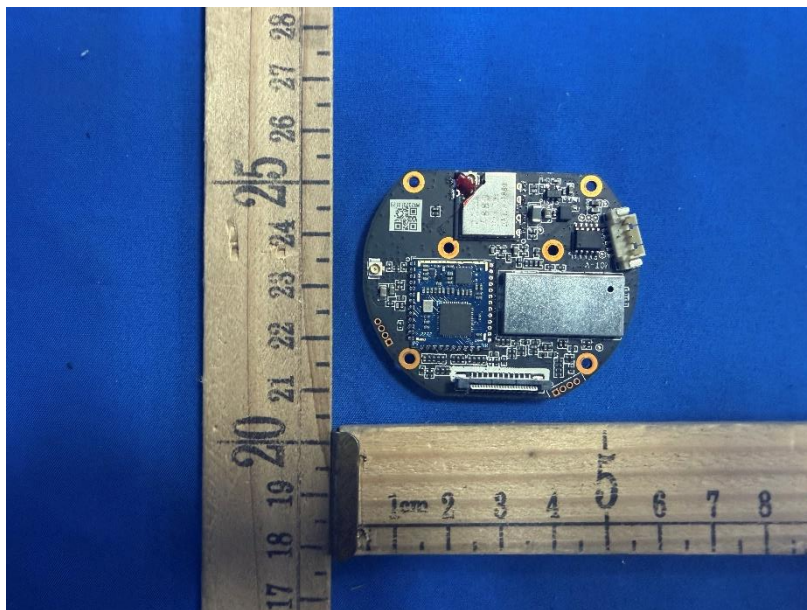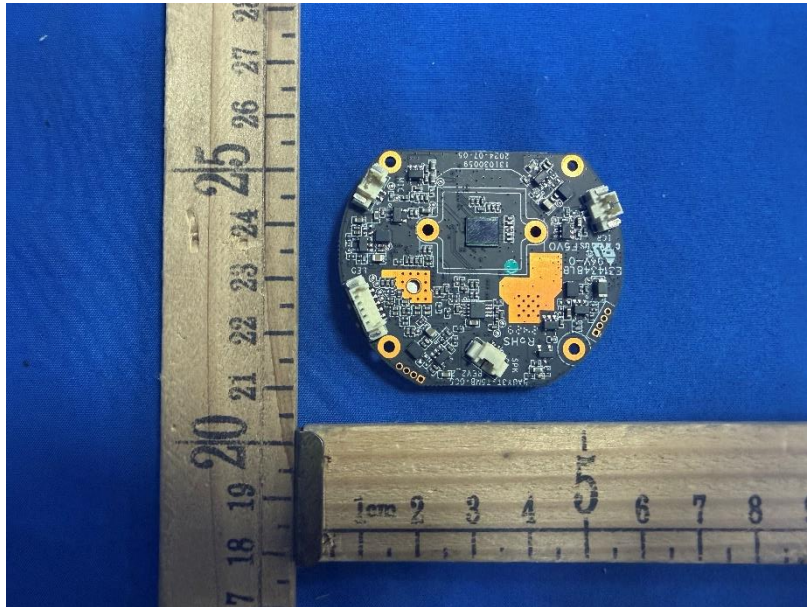

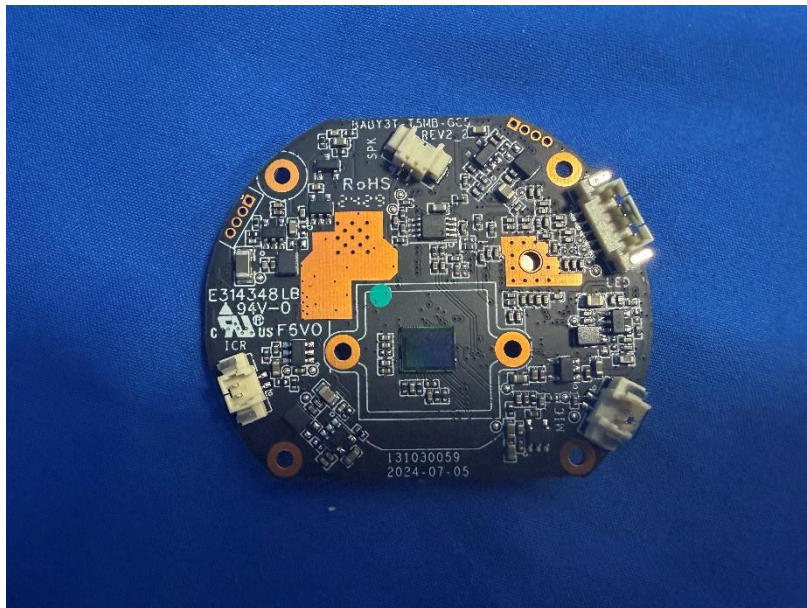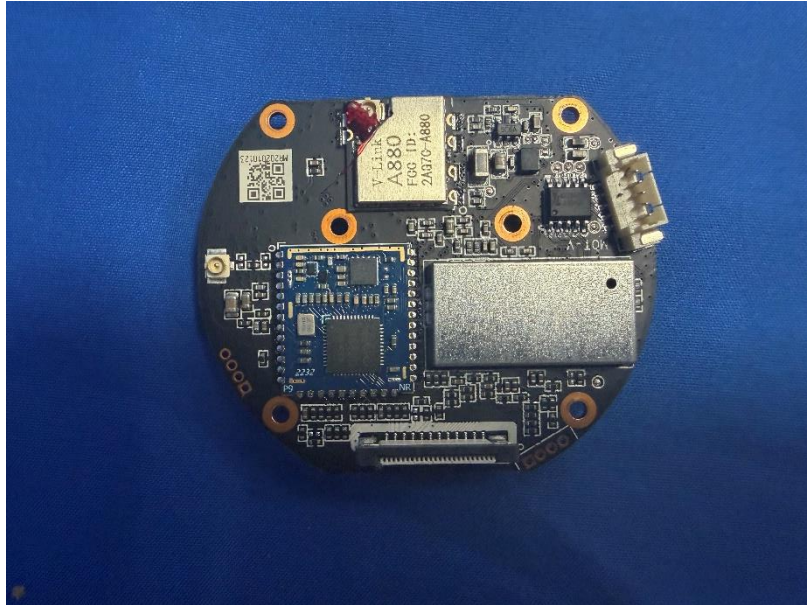

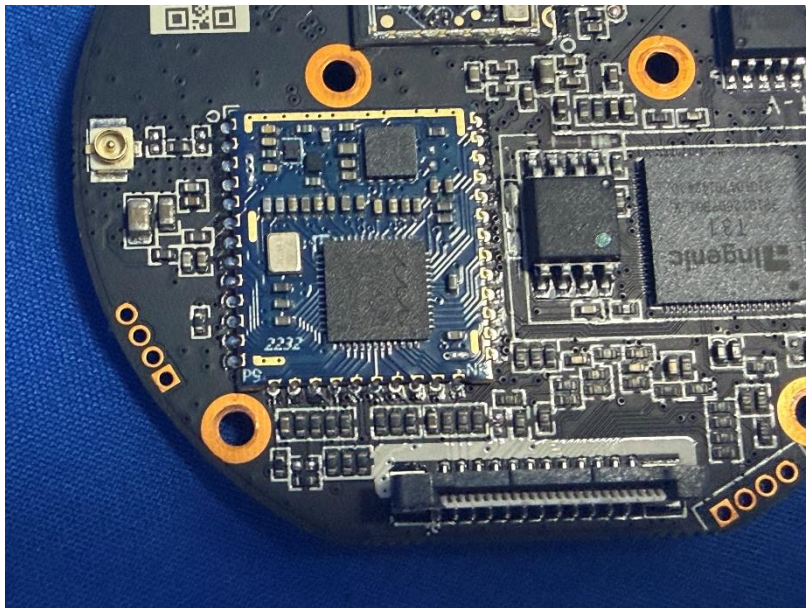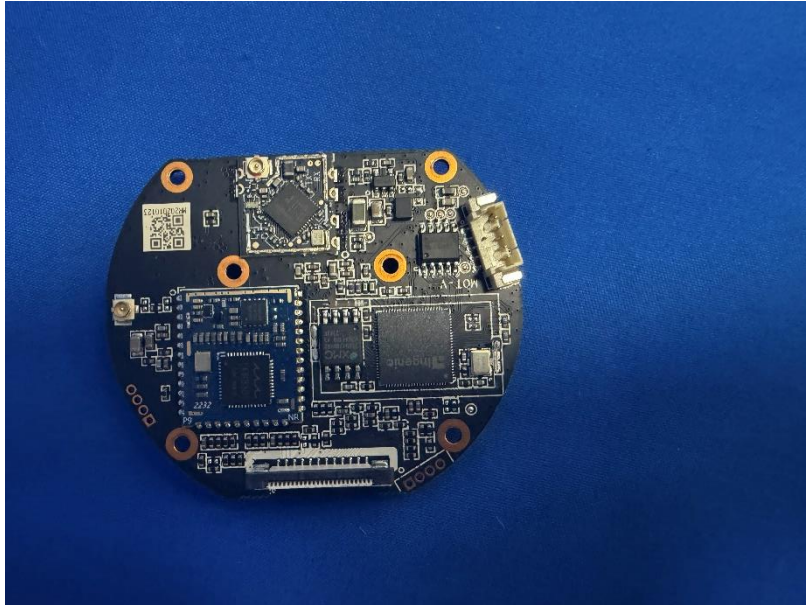

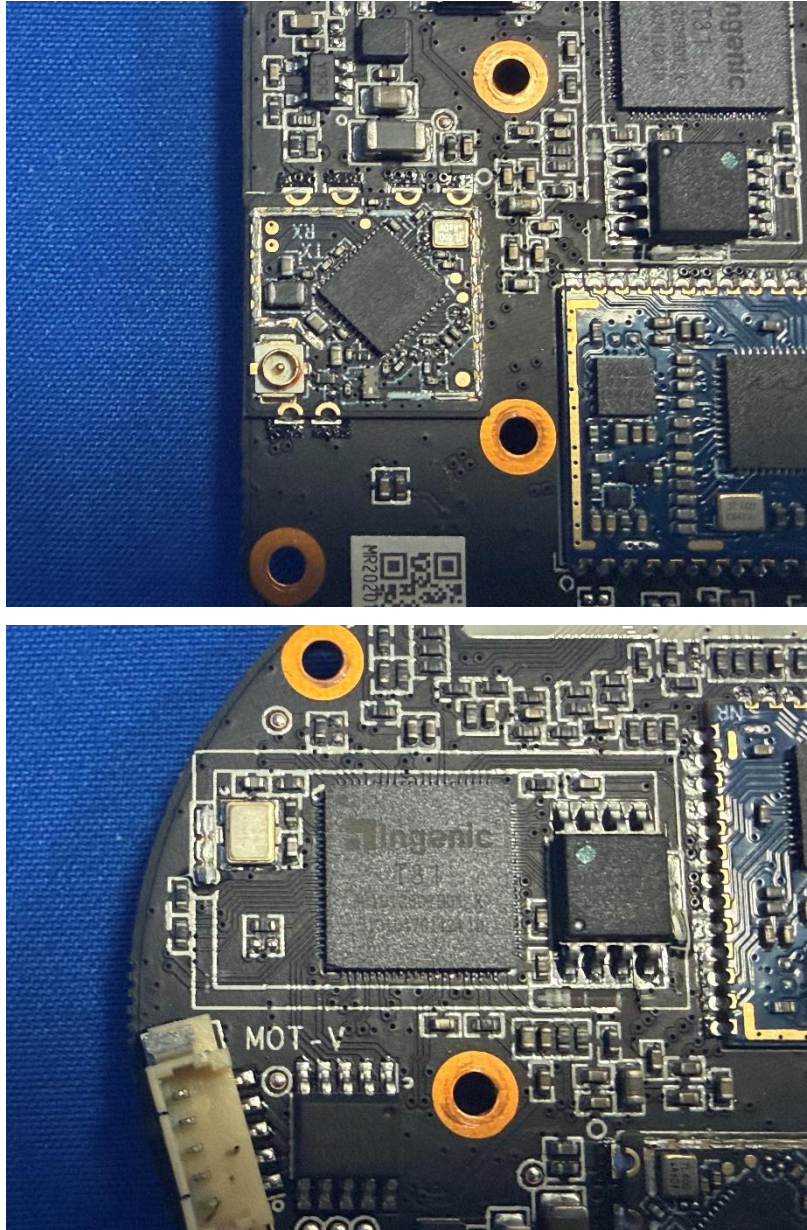

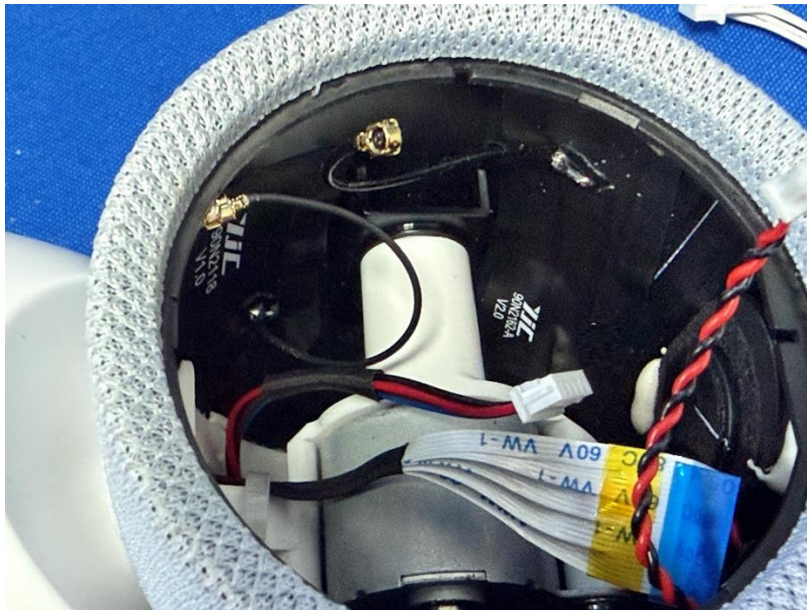



*****THE END REPORT*****