

CIXI MINGYE COMMUNICATION AND ELECTRONIC CO.,LTD.

MPE ASSESSMENT REPORT

Report Type:

FCC MPE assessment report

Model:

AA10704J-2AC1Q
AA10704J-2AC2H1Q
AA10704J-2AC1Q2R
AA10704J-2AC1H1Q1R
AA10704J-1Q2UC
AA10704J-2H1Q2UC
AA10704J-1Q2R2UC
AA10704J-1H1Q1R2UC

REPORT NUMBER:

220300430SHA-002

ISSUE DATE:

September 9, 2022

DOCUMENT CONTROL NUMBER:

TTRFFCCMPE-02_V1 © 2018 Intertek



Applicant : CIXI MINGYE COMMUNICATION AND ELECTRONIC CO.,LTD.
West Industrial District,Guanhaiwei Town,CIXI CITY Zhejiang
Province 315315

Manufacturer : CIXI MINGYE COMMUNICATION AND ELECTRONIC CO.,LTD.
West Industrial District,Guanhaiwei Town,CIXI CITY Zhejiang
Province 315315

Manufacturer Site : CIXI MINGYE COMMUNICATION AND ELECTRONIC CO.,LTD.
West Industrial District,Guanhaiwei Town,CIXI CITY Zhejiang
Province 315315

Type/Model: : AA10704J-2AC1Q
AA10704J-2AC2H1Q
AA10704J-2AC1Q2R
AA10704J-2AC1H1Q1R
AA10704J-1Q2UC
AA10704J-2H1Q2UC
AA10704J-1Q2R2UC
AA10704J-1H1Q1R2UC

FCC ID : 2A2N8-1072ACUC1Q

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

FCC PART 1 SECTION 1.1310

PREPARED BY:

REVIEWED BY:



Project Engineer
Damon Ding



Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Report No.	Version	Description	Issued Date
220300430SHA-002	Rev. 01	Initial issue of report	September 9, 2022

Measurement result summary

TEST ITEM	FCC REFERENCE	TEST RESULT	NOTE
RF Exposure	1.1310	Pass	-

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Socket Outlet
Type/Model:	AvA1704J-4AC1Q2UC AvA1704J-1Q2UC, AvA1704J-1H1Q1R2UC, AsA1704J-4AC1Q2UC, AsA1704J-1Q2UC, AsA1704J-1H1Q1R2UC
Description of EUT:	The EUT is a Socket Outlet with wireless charging function. it has six models. The main type is AvA1704J-4AC1Q2UC, with 4 socket outlets, with four type A interfaces and two type C interfaces ,with wireless charger, with glass lid and with CBE .The difference between the main type with other types is the size of outlets, with or without two type A interfaces and two type C interfaces ,with or without HDMI,RJ45 extension cord . We test AA10704J-4AC1Q2UC as representative and list the worst results in this report.
Rating:	AC 125V, 15A
Category of EUT:	Class B
EUT type:	☒ Table top ☐ Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	August 11, 2022
Date of test:	August 11, 2022~ September 9, 2022

1.2 Technical Specification

Frequency Range:	111kHz – 200kHz
Modulation:	FSK
Antenna:	Coil antenna

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

FCC PART 1 SECTION 1.1310

KDB 680106 D01 RF Exposure Wireless Charging App v03

2.2 Mode of operation during the test

Within this test report, EUT was tested under all modes and tested under its rating voltage and frequency. Other voltage and frequency are specified if used. The worst data was listed in the report.

2.3 Test peripherals list

Item No.	Name	Brand and Model	Description
1	Wireless load	EESON	100%/50%/0% power level
2	Power Adapter	A138A-120150U-US3	Input:100-240VAC/50-60Hz Output: 5V-3A/9V-2A/12V-1.5A

2.4 Record of climatic conditions

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)
RF Exposure	24	53	101

2.5 Instrument list

Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Exposure Level Tester	Narda	ELT-400	EC 2928	2023-08-13
☒	Field sensor & Field meter	AR	FL17000	EC 5818-1	2023-05-19

3 RF Exposure Assessment

Test result: Pass

3.1 Assessment Limit

Reference: 47 CFR §1.1310, KDB 680106


Limits for General Population/Uncontrolled Exposure

Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm ²]	Averaging time [minutes]
0.1 – 0.3	614	1.63	*100	30
0.3 – 1.34	614	1.63	*100	30
1.34 – 30	824/f	2.19/f	*180/f ²	30
30 – 300	27.5	0.073	0.2	30
300 – 1 500	-	-	f/1500	30
1 500 – 100 000	-	-	1.0	30

Limits for Occupational/Controlled Exposure

Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm ²]	Averaging time [minutes]
0.1 – 0.3	614	1.63	*100	6
0.3 – 3.0	614	1.63	*100	6
3.0 – 30	1842/f	4.89/f	*900/f ²	6
30 – 300	61.4	0.163	1.0	6
300 – 1 500	-	-	f/300	6
1 500 – 100 000	-	-	5	6

3.2 Assessment Configuration

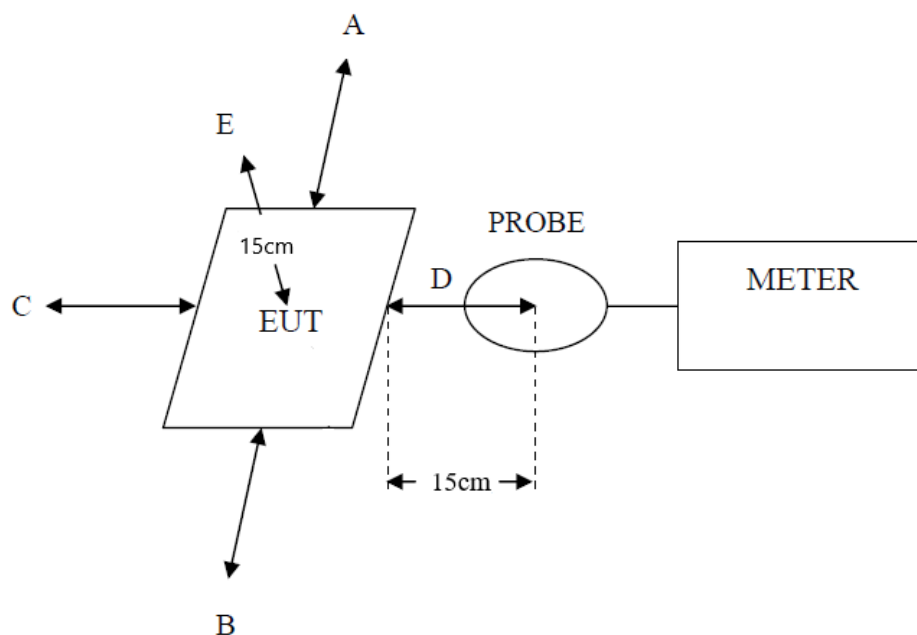

3.3 Assessment Results

Test result of Magnetic Field Strength:

Test Position	Test distance (cm)	Test result (A/m)	Limit (A/m)	Result (Pass/Fail)
A: Right	15	0.0034	1.63 *0.5	Pass
B: Left	15	0.0047	1.63 *0.5	Pass
C: Front	15	0.0054	1.63 *0.5	Pass
D: Back	15	0.0046	1.63 *0.5	Pass
E: Top	15	0.0039	1.63 *0.5	Pass

Test result of Electric Field Strength:

Test Position	Test distance (cm)	Test result (V/m)	Limit (V/m)	Result (Pass/Fail)
A: Right	15	0.62	614 *0.5	Pass
B: Left	15	0.61	614 *0.5	Pass
C: Front	15	0.46	614 *0.5	Pass
D: Back	15	0.61	614 *0.5	Pass
E: Top	15	0.74	614 *0.5	Pass

***** END *****