

承认书

SPECIFICATION FOR APPROVEAL

客户名称(CUSTOMER): ZLGD-A1-0338

客户料号(PART NO.): ZLGD-Y14X38.5-100-FR

品名(DESCRIPTION): 线圈+磁片 Coil + diskette

规格(SPECIFICATION): 14x38.5,0.08x105P Silk-covered wire with magnetic edge 100MM

日期 DATE: 20240613

本公司确认 (TRX APPROVAL)		
制作	审核	承认日期
曾小仙	邱志辉	20240613
客户确认 (CUSTOMER APPROVAL)		
工程	批准	承认日期
确认结果(Result): ☐ 合格 ☐ 不合格 ☐ 其它		

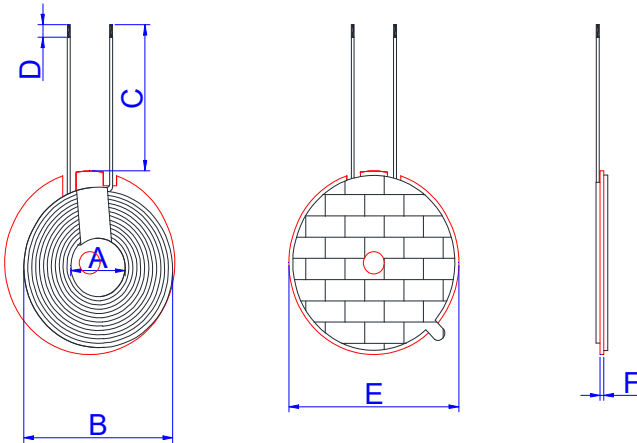
东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

东莞市石碣镇新风西路107号

电话: 0769-86016320 传真: 0769-86372427

东莞市德弗力五金电子材料有限公司
Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION																																		
产品型号: DESC	ZLGD-Y14X38. 5-100-FR	版本 Rev:C	Customer: ZLGD-A1-0338																															
			Description: Coil + diskette																															
			Date: 20240613																															
一、尺寸DIMENSION:(mm) 			A	14.0±1.0																														
			B	38.5±1.5																														
			C	100 +3.0																														
			D	3.0±2.0																														
			E	44.0±1.0																														
			F	0.8±0.2																														
			G																															
			H																															
			I																															
			J																															
			K																															
			L																															
			M																															
			N																															
			O																															
			P																															
			Note:																															
			1. Wire bonding G44 0.8 hard magnetic																															
			2. Wrap 8MM high-temperature tape around the cable exit position																															
			3. Attach double-sided tape with ear on the back of the magnetic disc																															
			4. The thread is crookedy5. Do not loosen the thread																															
二、 天线增益 Antenna gain: <table><tr><td>Operation frequency:</td><td>113kHz-205kHz</td></tr><tr><td>Antenna Type:</td><td>Loop coil Antenna</td></tr><tr><td>Antenna gain:</td><td>0dBi</td></tr></table>					Operation frequency:	113kHz-205kHz	Antenna Type:	Loop coil Antenna	Antenna gain:	0dBi																								
Operation frequency:	113kHz-205kHz																																	
Antenna Type:	Loop coil Antenna																																	
Antenna gain:	0dBi																																	
三、绕线参数(WindingSpecification:) <table><tr><th>序号 NO.</th><th>端子 TERMINAL</th><th>线径 WIRE</th><th>圈数 Turns</th><th>绕线方向 Winding Direction</th></tr><tr><td>1</td><td></td><td>0.08×105P silk-covered wire</td><td>12TS</td><td>anticlockwise</td></tr></table>					序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction	1		0.08×105P silk-covered wire	12TS	anticlockwise																				
序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction																														
1		0.08×105P silk-covered wire	12TS	anticlockwise																														
四、电气特性 ELECTRICAL CHARACTERISTICS: 温度 TEMPERATURE:25±10℃,湿度 RELATIVE HUMIDITY:65±20% <table><tr><th>序号 NO.</th><th>项目 ITEM</th><th>端子 TERMINAL</th><th>标准 SPECIFICATION</th><th>测试条件 TEST FREQUENCY</th><th>测试仪器 TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td></td><td>6.8uH±0.3 Magnetized sheet</td><td>100KHz/1.0V</td><td>SHDA 1062</td></tr><tr><td>2</td><td>IND.</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>Q value</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>DCR</td><td></td><td></td><td></td><td></td></tr></table>					序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	1	IND.		6.8uH±0.3 Magnetized sheet	100KHz/1.0V	SHDA 1062	2	IND.					3	Q value					4	DCR				
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																													
1	IND.		6.8uH±0.3 Magnetized sheet	100KHz/1.0V	SHDA 1062																													
2	IND.																																	
3	Q value																																	
4	DCR																																	
拟制/日期PREPARED BY/DATE		审核/日期CHECKED BY/DATE		客户/日期CUSTOMEU/DATE																														