


7.5. Peak to Average Power Ratio (PAPR)

Test setup

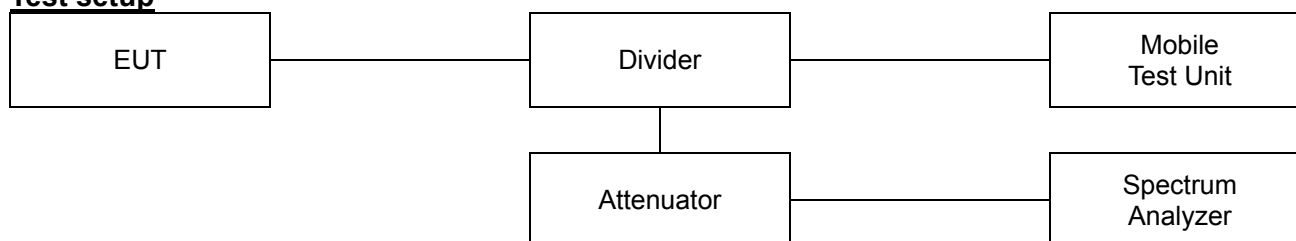

Limit

According to §24.232(d), §27.50(d)(5), the peak-to-average ratio(PAR) of the transmission must not exceed 13 dB.

Test procedure

971168 D01 v03r01 - Section 5.7.2 or 5.7.3

ANSI 63.26-2015 – Section 5.2.3.4 or 5.2.6

Test settings

5.2.3.4 Measurement of peak power in a broadband noise-like signal using CCDF

- 1) Set resolution/measurement bandwidth $\geq$ OBW or specified reference bandwidth
- 2) Set the number of counts to a value that stabilizes the measured CCDF curve.
- 3) Set the measurement interval as follows:
 - a) For continuous transmissions, set to the greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - b) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - c) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- 4) Record the maximum PAPR level associated with a probability of 0.1%

5.2.6 Peak-to-average power ratio

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{PK} .

Use one of the applicable procedure presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{AG} . Determine the P.A.P.R from:

$$PAPR(dB) = P_{PK}(dBm \text{ or } dBW) - P_{AG}(dBm \text{ or } dBW)$$

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0177


Page (39) of (75)

KCTL


Test results

Test mode: GSM 1900


GPRS / Low ch.

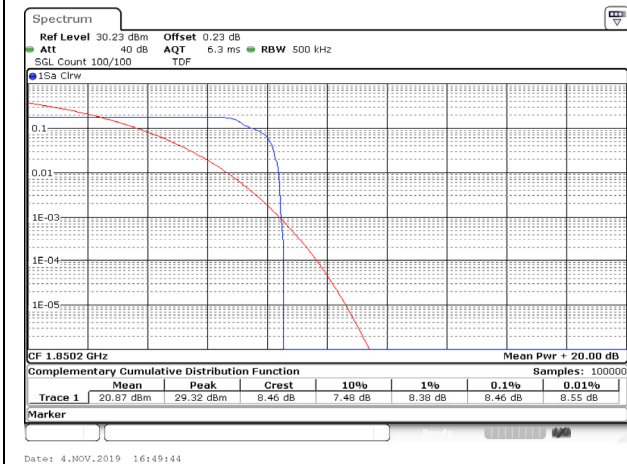


EDGE / Low ch.

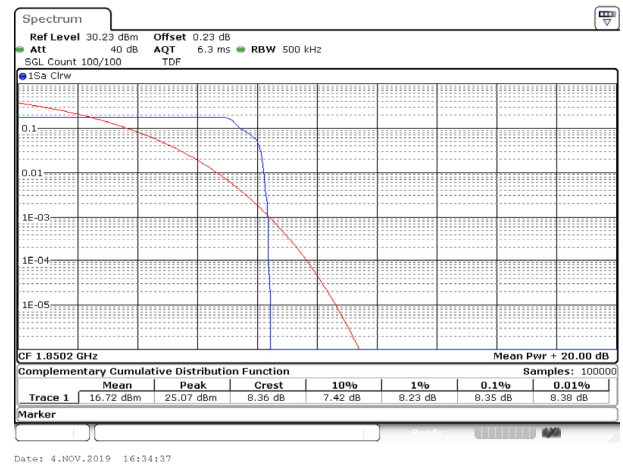


GPRS / Mid ch.

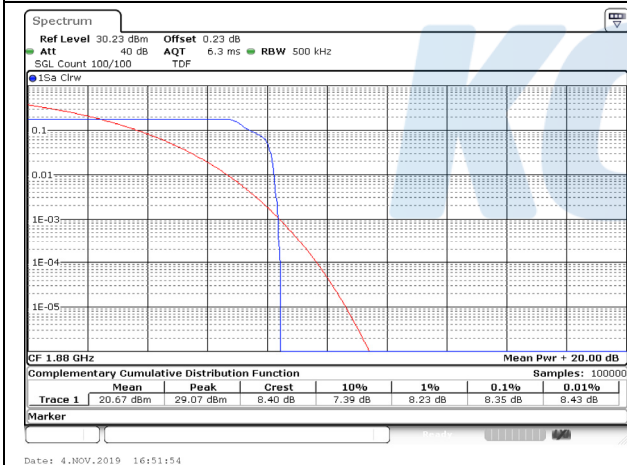

EDGE / Mid ch.

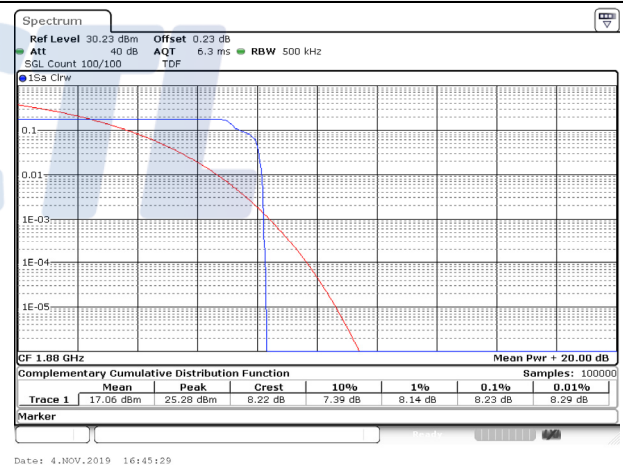

GPRS / High ch.

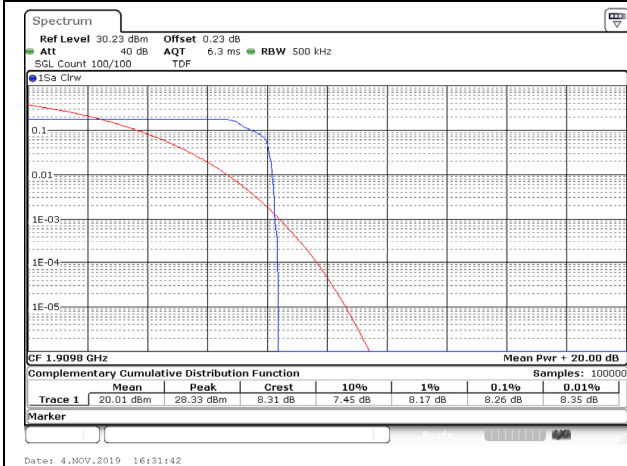

EDGE / High ch.



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (40) of (75)


KCTL

Test mode: WCDMA 1700


RMC / Low ch.

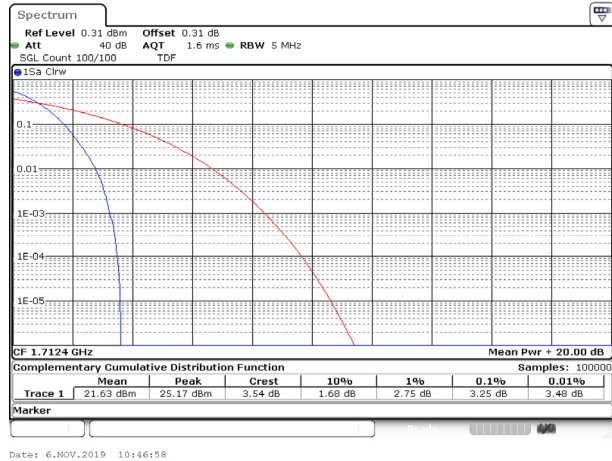

RMC / Mid ch.

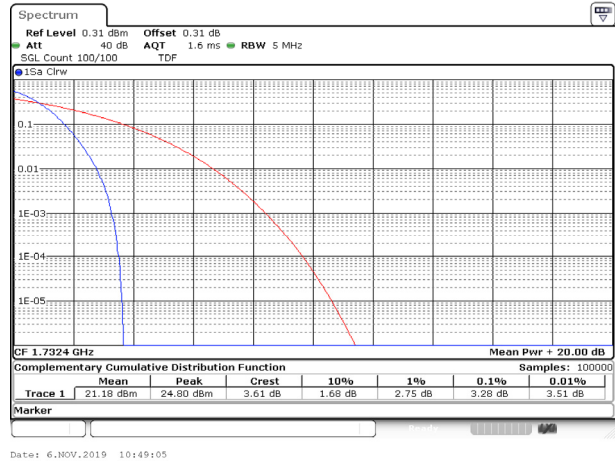

RMC / High ch.

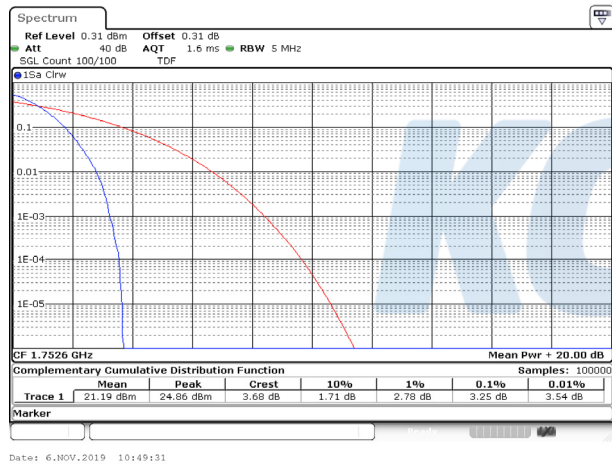

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (41) of (75)


KCTL

Test mode: WCDMA 1900


RMC / Low ch.

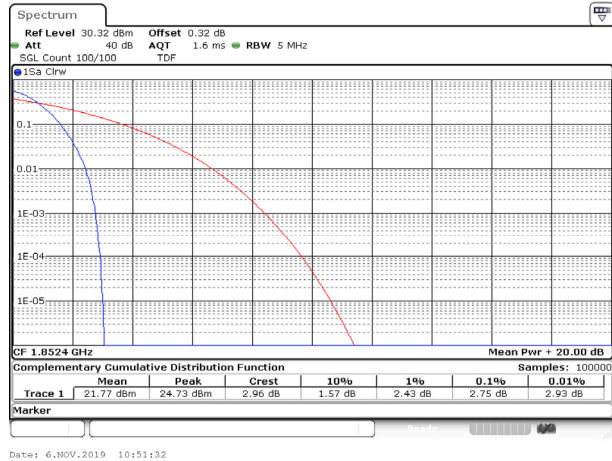

RMC / Mid ch.

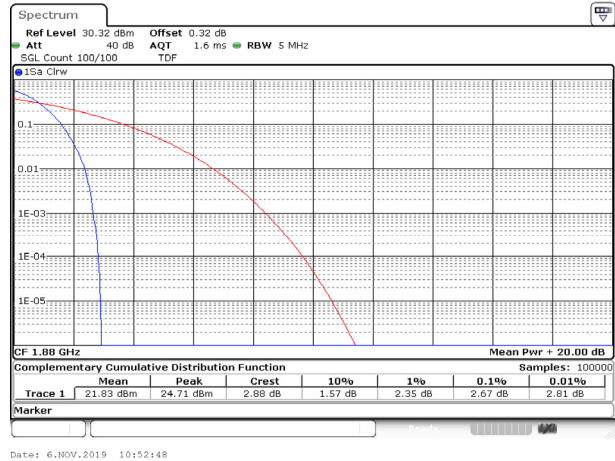


RMC / High ch.

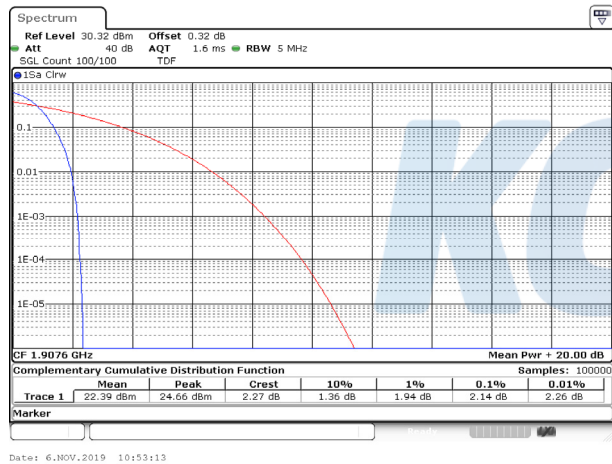

Blank

7.6. Frequency stability

Test setup

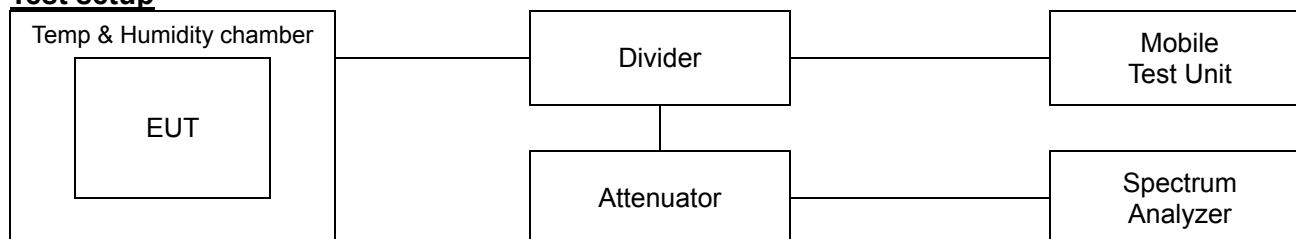

Limit

According to §2.1055(a),

The frequency stability shall be measured with variation of ambient temperature as follows:

- 1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- 2) From -20° to + 50° centigrade for equipment to be licensed for use in the maritime services under part 80 of this chapter, except for class A, B, and S emergency position indicating radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the local television transmission service and point-to-point microwave radio service under part 21 of this chapter, equipment licensed for use aboard aircraft in the aviation services under part 87 of this chapter, and equipment authorized for use in the family radio service under part 95 of this chapter.
- 3) From 0° to + 50° centigrade for equipment to be licensed for use in the radio broadcast Services under part 73 of this chapter.

According to §2.1055(d),

The frequency stability shall be measured with variation of primary supply Voltage as follows:

- 1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- 2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacturer.
- 3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

According to §22.355,

The carrier frequency of each transmitter in the public mobile services must be maintained within the tolerances given in Table of this section.

For mobile devices operating in the 824 to 849 MHz band at a power level than or equal to 3 Watts, the limit specified in Table C-1 is ± 2.5 ppm.

According to §24.235,

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

The carrier frequency shall not depart from the reference frequency, in excess of ± 2.5 ppm for mobile stations and ± 1.0 ppm for base stations.

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR19-SRF0177</p> <p>Page (43) of (75)</p>	
--	---	---

According to §27.54 and RSS-139(6.4),

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the Authorized bands of operation.

Test procedure

ANSI 63.26-2015 – Section 5.6

Test settings


- 1) The carrier frequency of the transmitter is measured at room temperature.
(20°C to provide a reference)
- 2) The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3) Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each Temperature level.

KCTL

Test results


Test mode : GSM 850
 Frequency (Hz) : 836 600 000
 Channel : 190
 Deviation limit : ±0.00025% or 2.5ppm

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+22(Ref)	836,599,997	-2.62	0.0	0.000000
		-30	836,599,994	-5.59	0.0	-0.000001
		-20	836,599,996	-4.10	0.0	0.000000
		-10	836,599,997	-2.90	0.0	0.000000
		0	836,599,998	-1.80	0.0	0.000000
		+10	836,600,000	-0.20	0.0	0.000000
		+20	836,600,001	0.88	0.0	0.000000
		+30	836,600,001	1.06	0.0	0.000000
		+40	836,599,998	-2.44	0.0	0.000000
		+50	836,599,995	-4.68	0.0	-0.000001
115%	4.43	+22	836,599,996	-3.81	0.0	0.000000
End point	2.55	+22	836,599,997	-3.23	0.0	0.000000

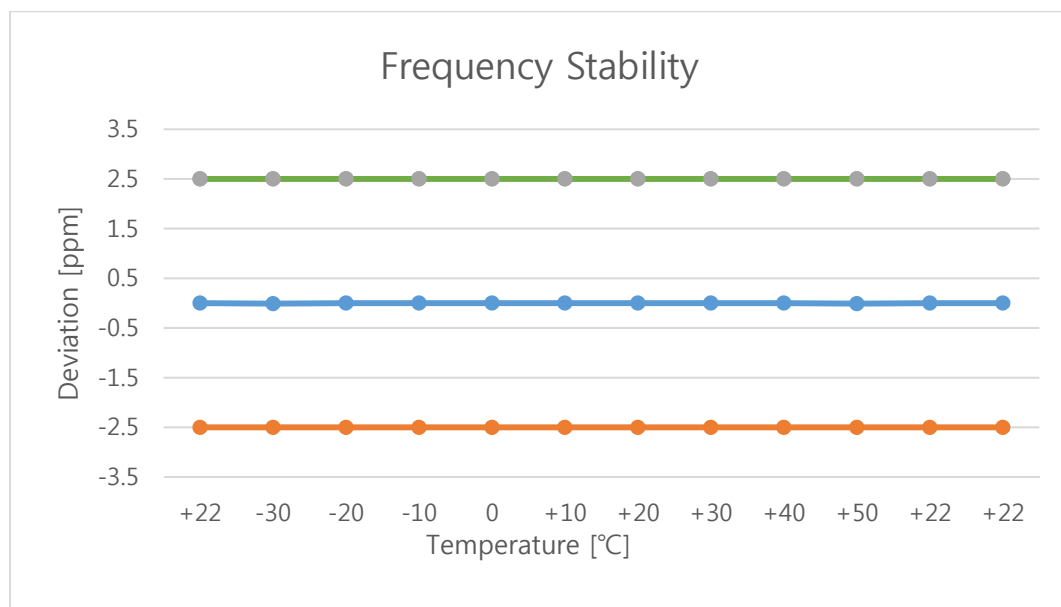


Test mode : GSM 1900
 Frequency (Hz) : 1 880 000 000
 Channel : 661
 Deviation limit : The frequency stability shall be sufficient to ensure that the
Fundamental emission stays within the authorized frequency block.

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+22(Ref)	1,879,999,997	-2.78	0.0	0.000000
		-30	1,879,999,985	-14.75	0.0	-0.000001
		-20	1,879,999,989	-11.20	0.0	-0.000001
		-10	1,879,999,992	-7.90	0.0	0.000000
		0	1,879,999,994	-6.30	0.0	0.000000
		+10	1,879,999,998	-2.10	0.0	0.000000
		+20	1,879,999,996	-4.50	0.0	0.000000
		+30	1,879,999,987	-13.30	0.0	-0.000001
		+40	1,879,999,984	-16.11	0.0	-0.000001
		+50	1,879,999,980	-19.92	0.0	-0.000001
115%	4.43	+22	1,879,999,997	-3.07	0.0	0.000000
End point	2.55	+22	1,879,999,997	-2.97	0.0	0.000000

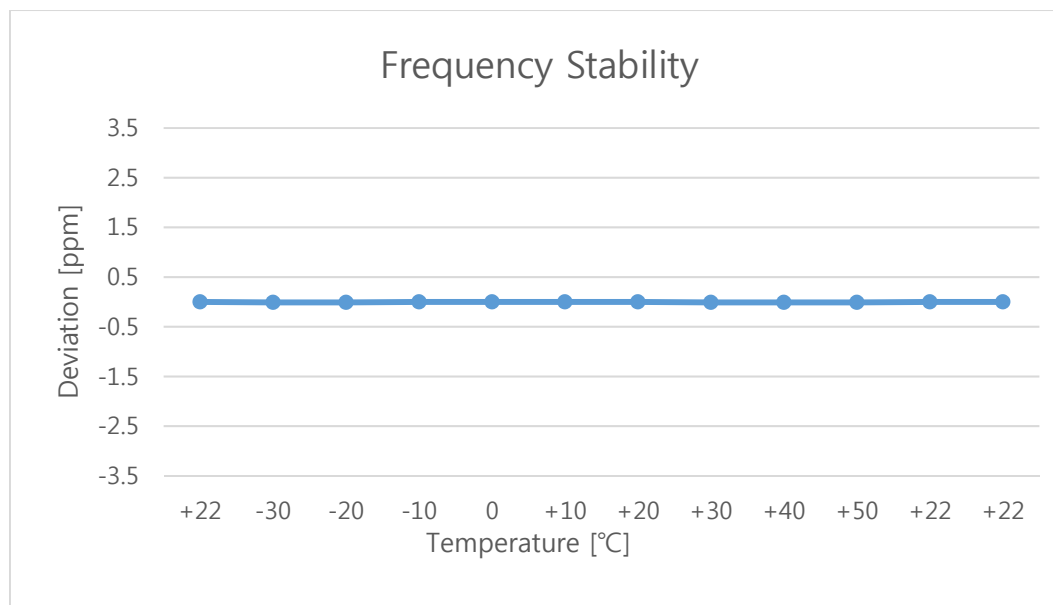

Test mode : WCDMA 850
 Frequency (Hz) : 836 600 000
 Channel : 4183
 Deviation limit : ±0.00025% or 2.5ppm

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+22(Ref)	836,600,000	-0.48	0.0	0.000000
		-30	836,600,002	2.38	0.0	0.000000
		-20	836,600,002	1.86	0.0	0.000000
		-10	836,600,001	0.71	0.0	0.000000
		0	836,600,000	0.28	0.0	0.000000
		+10	836,600,000	0.11	0.0	0.000000
		+20	836,599,999	-0.64	0.0	0.000000
		+30	836,599,999	-1.03	0.0	0.000000
		+40	836,599,998	-1.57	0.0	0.000000
		+50	836,599,998	-1.76	0.0	0.000000
115%	4.43	+22	836,599,999	-0.72	0.0	0.000000
End point	2.55	+22	836,600,000	-0.46	0.0	0.000000

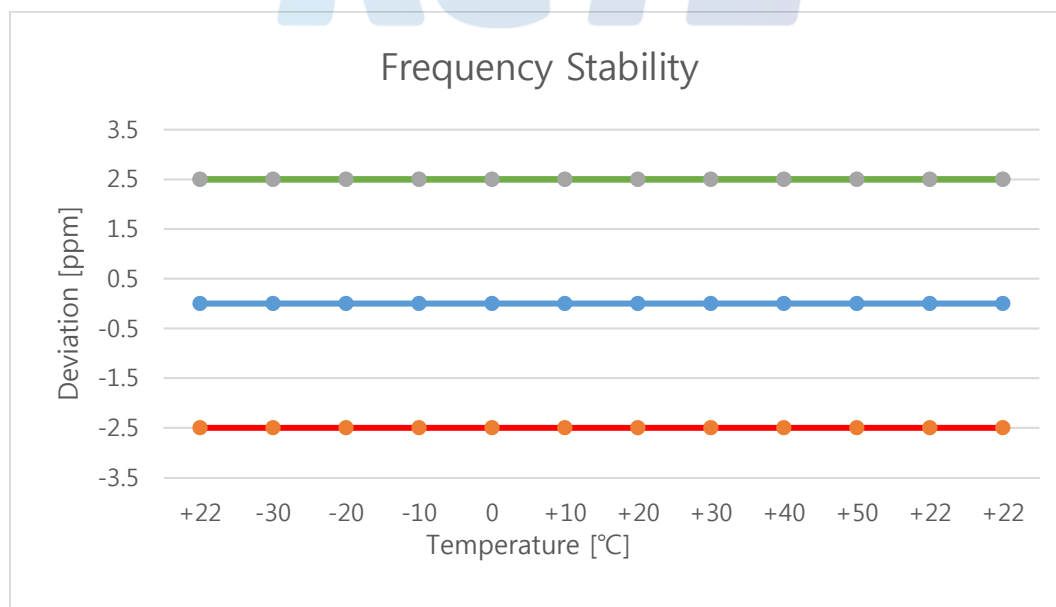

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (47) of (75)



Test mode : WCDMA 1700
Frequency (Hz) : 1 732 400 000
Channel : 1412
Deviation limit : The frequency stability shall be sufficient to ensure that the
Fundamental emission stays within the authorized frequency block.

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+22(Ref)	1,732,399,999	-1.17	0.0	0.000000
		-30	1,732,400,002	1.78	0.0	0.000000
		-20	1,732,400,001	1.08	0.0	0.000000
		-10	1,732,400,001	0.77	0.0	0.000000
		0	1,732,400,000	0.26	0.0	0.000000
		+10	1,732,399,999	-1.33	0.0	0.000000
		+20	1,732,399,998	-1.68	0.0	0.000000
		+30	1,732,399,998	-2.22	0.0	0.000000
		+40	1,732,399,998	-2.30	0.0	0.000000
		+50	1,732,399,997	-3.39	0.0	0.000000
115%	4.43	+22(Ref)	1,732,399,998	-1.60	0.0	0.000000
End point	3.55	+22(Ref)	1,732,399,999	-1.27	0.0	0.000000

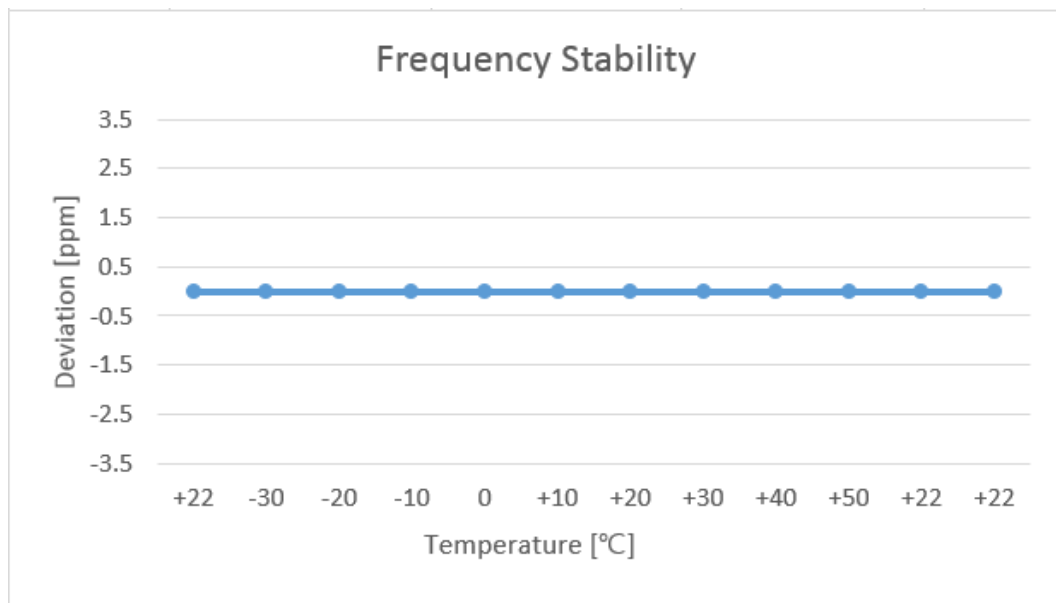

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (48) of (75)

KCTL

Test mode : WCDMA 1900
Frequency (Hz) : 1 880 000 000
Channel : 9400
Deviation limit : ±0.00025% or 2.5ppm


Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+22(Ref)	1,880,000,000	-0.15	0.0	0.000000
		-30	1,879,999,997	-2.75	0.0	0.000000
		-20	1,879,999,998	-2.41	0.0	0.000000
		-10	1,879,999,999	-1.30	0.0	0.000000
		0	1,879,999,999	-0.60	0.0	0.000000
		+10	1,880,000,000	-0.42	0.0	0.000000
		+20	1,880,000,000	0.28	0.0	0.000000
		+30	1,879,999,999	-0.93	0.0	0.000000
		+40	1,879,999,997	-2.88	0.0	0.000000
		+50	1,879,999,995	-4.79	0.0	0.000000
115%	4.43	+22(Ref)	1,879,999,999	-0.54	0.0	0.000000
End point	3.55	+22(Ref)	1,880,000,000	-0.47	0.0	0.000000

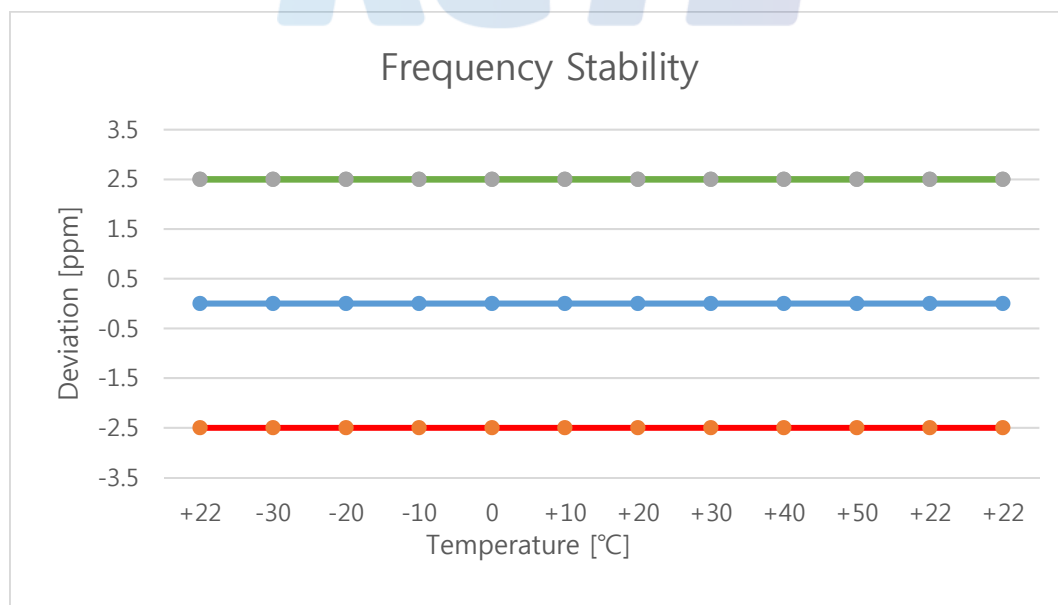


7.7. Radiated Power (ERP/EIRP)

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

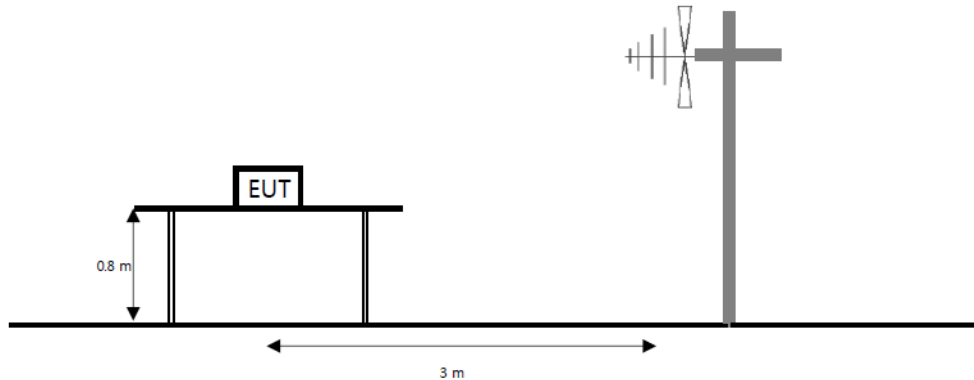

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

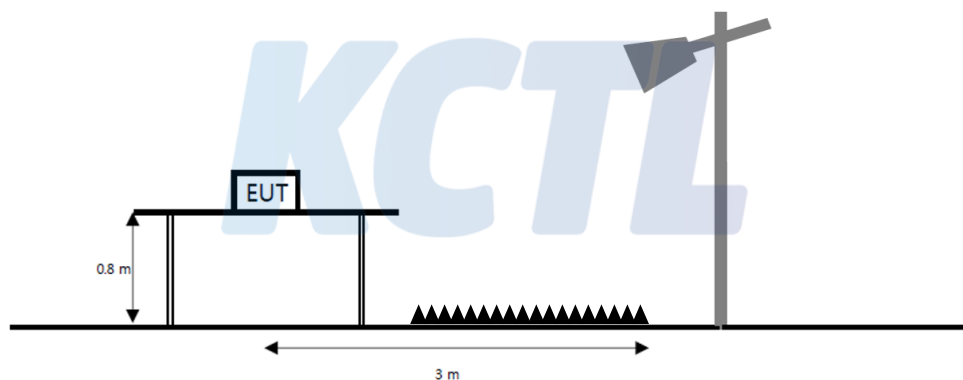

The diagram below shows the test setup for substituted method.

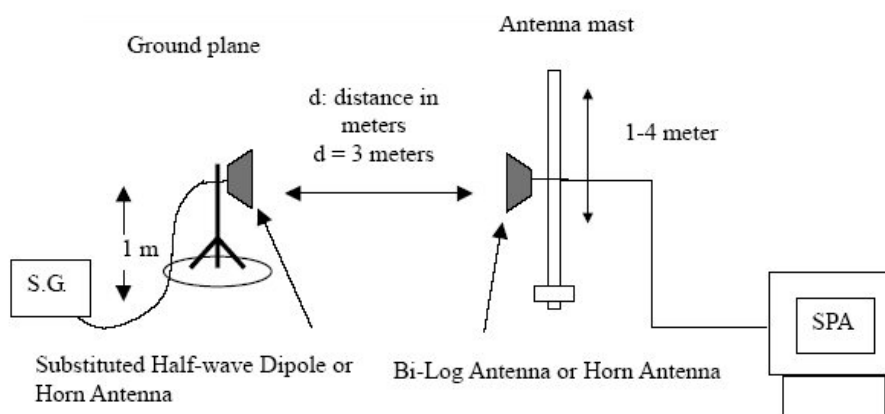

Limit

According to §22.913(a)(5), the ERP of transmitters in the cellular radiotelephone service must not exceed the limits in this section. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710~1755 MHz band and mobile and portable stations operating in the 1695~1710 MHz and 1755~1780 MHz bands are 1 watt EIRP.

Test procedure

971168 D01 v03r01 - Section 5.2.2

ANSI 63.26-2015 – Section 5.2.4.4.1

ANSI/TIA-603-E-2016 - Section 2.2.17

Test settings

- 1) RBW = 1 % to 5 % of the OBW.
- 2) VBW $\geq 3 \times$ RBW.
- 3) SPAN = 2 $\times$ to 3 $\times$ the OBW.
- 4) Number of measurement points in sweep $\geq 2 \times$ span / RBW.
- 5) Sweep time :
 - 1) Auto couple, or
 - 2) $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
- 6) Detector = RMS
- 7) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- 8) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
- 9) Trace mode = trace averaging (RMS) over 100 sweeps.
- 10) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- 11) Allow trace to fully stabilize.

Notes:

1. On a test site, the EUT shall be placed at 80 cm height on a turn table, and in the position close To normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to Correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
The power is calculated by the following formula;
$$Pd(\text{dBm}) = Pg(\text{dBm}) - \text{Cable loss (dB)} + \text{Antenna gain (dB)}$$

Note. Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

Test results

Test mode: GSM 850

Mode	Channel	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBi]	[dB]	[dB m]	[dB m]	[W]
GPRS	128	824.2	H	-0.60	3.69	30.28	25.99	0.397
	190	836.6	H	-0.50	3.71	29.33	25.12	0.325
	251	848.8	H	-0.50	3.74	30.54	26.30	0.427
EDGE	128	824.2	H	-0.60	3.69	30.28	25.99	0.397
	190	836.6	H	-0.50	3.71	29.18	24.97	0.314
	251	848.8	H	-0.50	3.74	30.24	26.00	0.398

Test mode: GSM 1900

Mode	Channel	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dB m]	[dB m]	[W]
GPRS	512	1 850.2	V	6.18	5.73	23.37	23.82	0.241
	661	1 880.0	V	6.14	5.78	25.75	26.11	0.408
	810	1 909.8	V	6.11	5.80	27.74	28.05	0.638
EDGE	512	1 850.2	V	6.18	5.73	23.60	24.05	0.254
	661	1 880.0	V	6.14	5.78	25.40	25.76	0.377
	810	1 909.8	V	6.11	5.80	27.78	28.09	0.644

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBi) - C.L(Cable loss) (dB)

Test mode: WCDMA 850

Mode	Channel	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBi]	[dB]	[dB m]	[dB m]	[W]
RMC	4132	826.4	H	-0.60	3.70	23.74	19.44	0.088
	4183	836.6	H	-0.50	3.71	22.99	18.78	0.076
	4233	846.6	H	-0.50	3.73	22.80	18.57	0.072
HSUPA	4132	826.4	H	-0.60	3.70	20.27	15.97	0.040
	4183	836.6	H	-0.50	3.71	19.24	15.03	0.032
	4233	846.6	H	-0.50	3.73	19.29	15.06	0.032

Test mode: WCDMA 1700

Mode	Channel	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dB m]	[dB m]	[W]
RMC	1312	1 712.4	V	6.35	5.48	16.96	17.82	0.061
	1412	1 732.4	V	6.32	5.52	16.14	16.94	0.049
	1513	1 752.6	V	6.30	5.55	18.21	18.96	0.079
HSUPA	1312	1 712.4	V	6.35	5.48	15.32	16.18	0.041
	1412	1 732.4	V	6.32	5.52	12.41	13.21	0.021
	1513	1 752.6	V	6.30	5.55	11.32	12.07	0.016


Test mode: WCDMA 1900

Mode	Channel	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dB m]	[dB m]	[W]
RMC	9262	1 852.4	V	6.18	5.74	17.91	18.35	0.068
	9400	1 880.0	V	6.14	5.78	17.90	18.26	0.067
	9538	1 907.6	V	6.11	5.80	20.54	20.85	0.122
HSUPA	9262	1 852.4	V	6.18	5.74	17.04	17.48	0.056
	9400	1 880.0	V	6.14	5.78	17.27	17.63	0.058
	9538	1 907.6	V	6.11	5.80	20.36	20.67	0.117


7.8. Radiated Spurious Emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

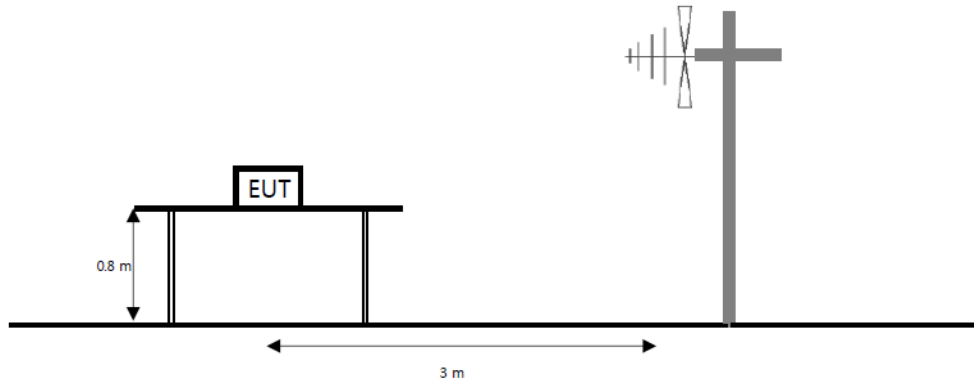

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

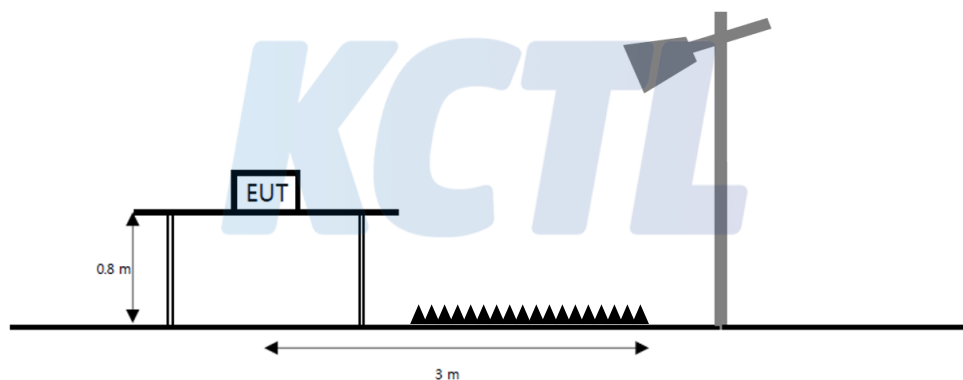

The diagram below shows the test setup for substituted method.

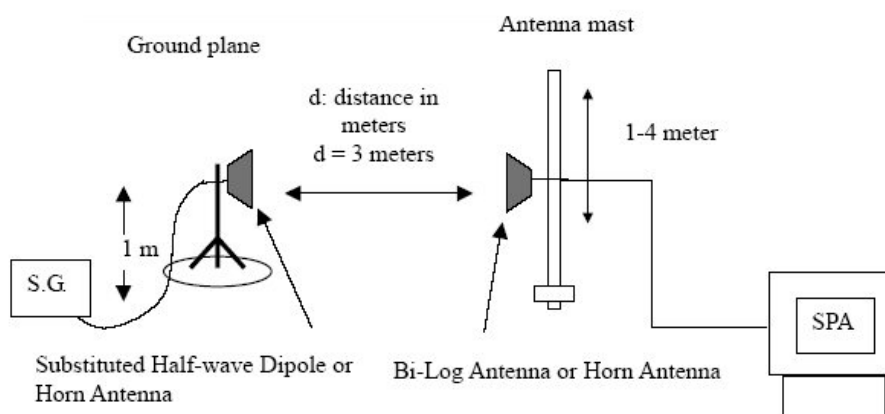

Limit

According to §22.917(a), §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log(P_{\text{[Watts]}})$ dB.

Test procedure

971168 D01 v03r01 - Section 5.8

ANSI 63.26-2015 – Section 5.5

ANSI/TIA-603-E-2016 - Section 2.2.12

Test settings


- 1) RBW = 1 kHz for below 1 GHz and 1 MHz for above 1 GHz.
- 2) VBW $\geq 3 \times$ RBW.
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep time = Auto couple
- 6) Number of sweep points $\geq 2 \times$ span / RBW
- 7) Allow trace to fully stabilize.

Notes:


1. On a test site, the EUT shall be placed at 80 cm height on a turn table, and in the position close To normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to Correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.
11. This EUT was tested under all configurations and the highest power is reported in RMC mode

Test results (Below 1 000 MHz) – Worst case

Test mode : GSM 850
Frequency (MHz) : 848.80
Channel : 251

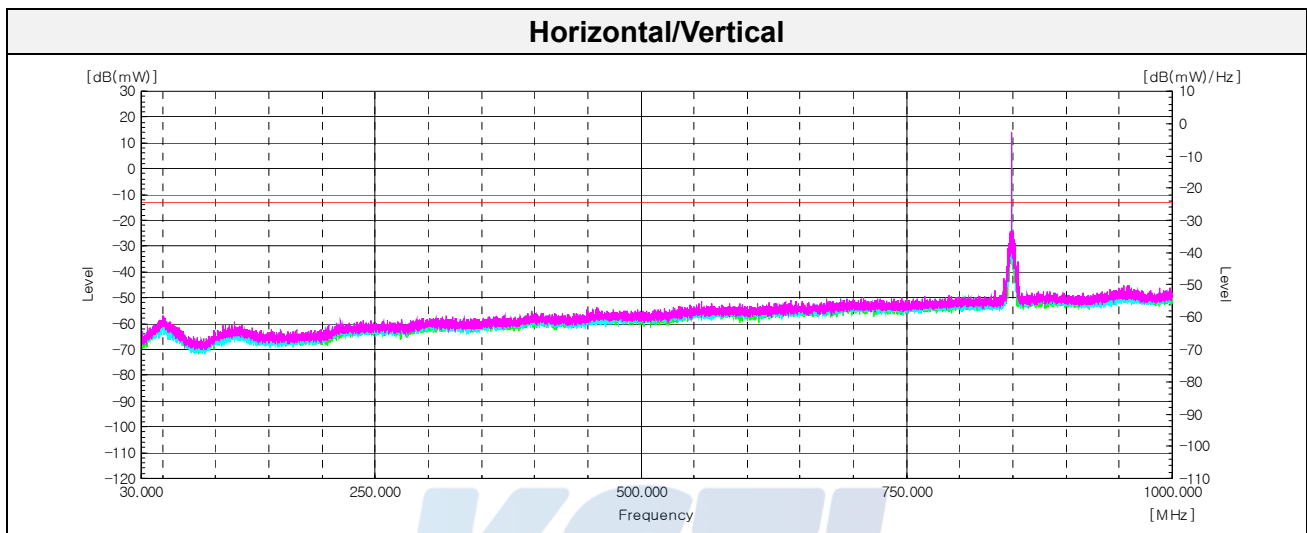


Test mode : GSM 1900
Frequency (MHz) : 1 909.8
Channel : 810

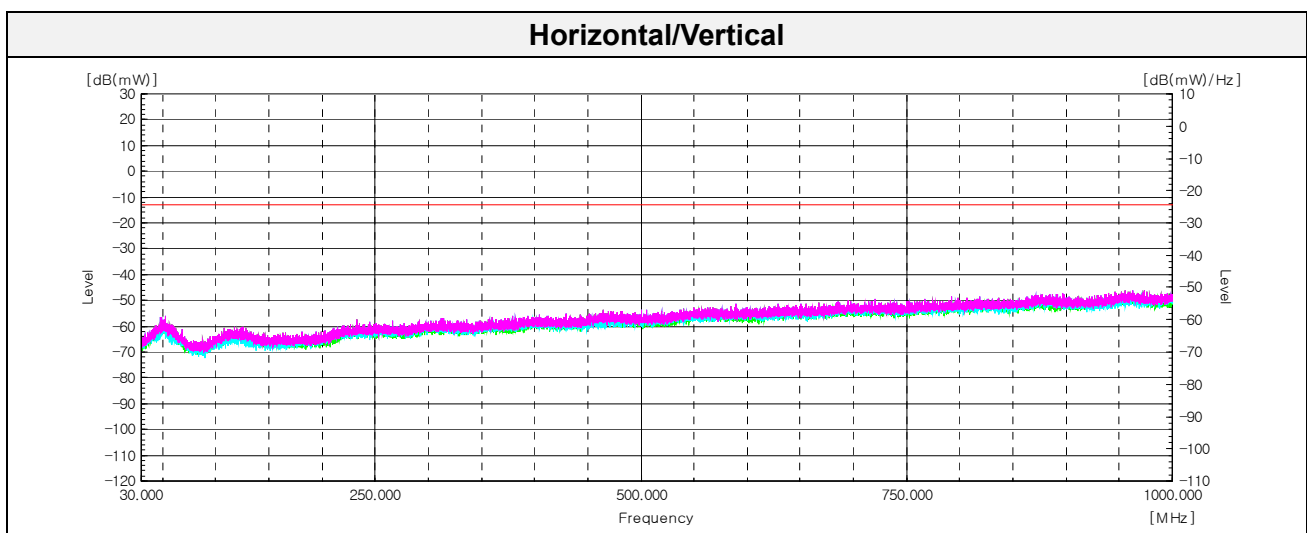
**Note.**

1. No spurious emission were detected below 1 000 MHz.

Test mode : WCDMA 850
Frequency (MHz) : 826.4
Channel : 4132

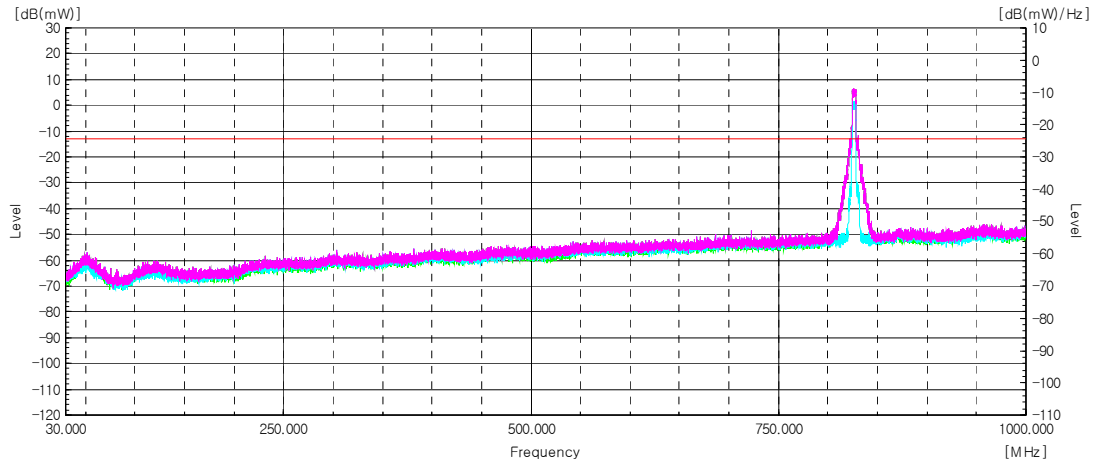
Horizontal/Vertical

Test mode : WCDMA 1700
Frequency (MHz) : 1 752.6
Channel : 1513

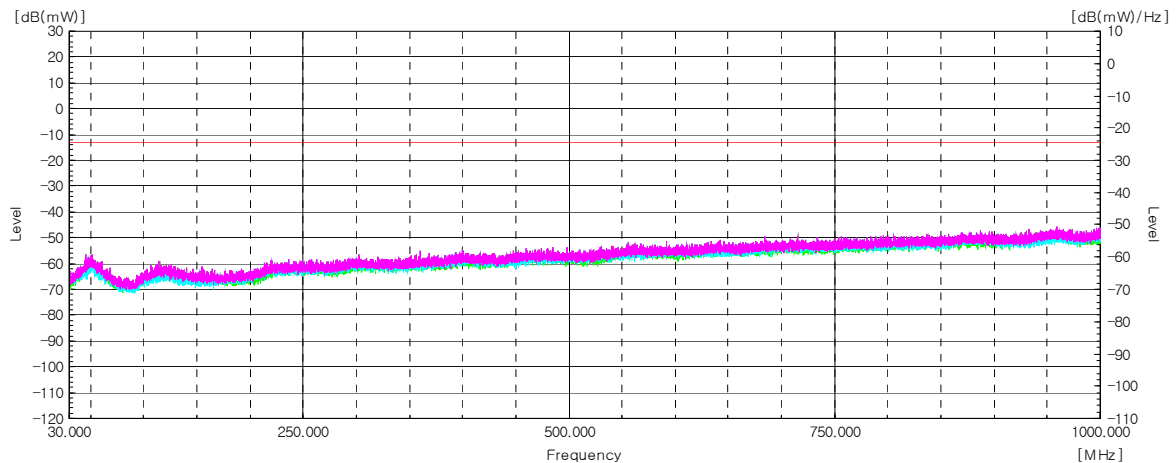Horizontal/Vertical**Note.**


1. No spurious emission were detected below 1 000 MHz.

Test mode : WCDMA 1900
Frequency (MHz) : 1 907.6
Channel : 9538

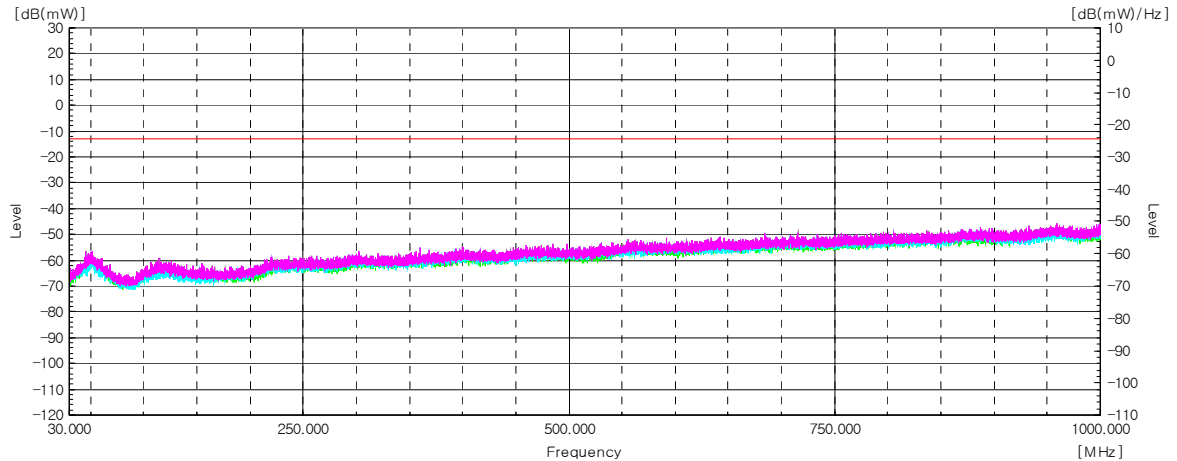Horizontal/Vertical**Note.**

1. No spurious emission were detected below 1 000 MHz.

KCTL

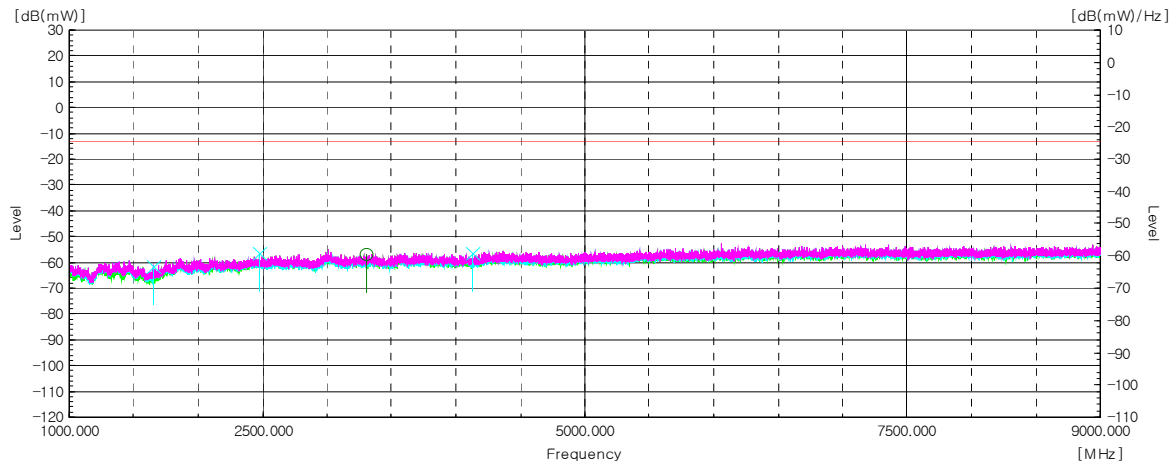Test results (Above 1 000 MHz)Test mode : GSM 850Frequency(MHz) : 824.2Channel : 128**Horizontal/Vertical**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
GPRS	1 648.54	V	6.42	5.36	-62.46	-61.40	-13.00	48.40
	2 472.59	V	6.00	6.63	-55.77	-56.40	-13.00	43.40
	3 306.14	H	7.37	7.67	-56.50	-56.80	-13.00	43.80
	4 128.20	V	8.73	8.59	-56.54	-56.40	-13.00	43.40


Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})
2. Level(dBm) = Antenna gain(dBi) - Cable loss(dB) - Substitute level(dBm)

Test mode : GSM 850

Frequency(MHz) : 836.6

Channel : 190

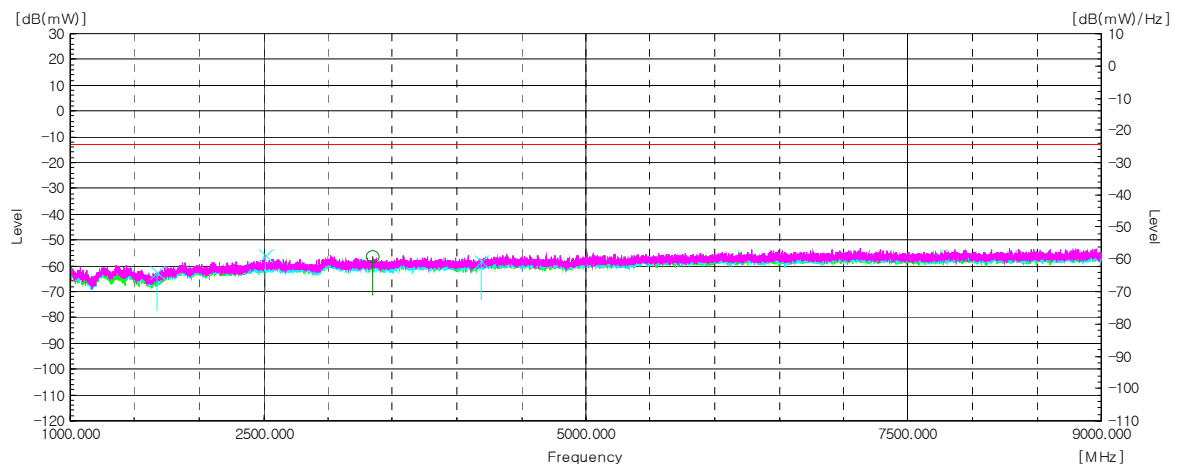
Horizontal/Vertical

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
GPRS	1 673.04	V	6.39	5.40	-63.29	-62.30	-13.00	49.30
	2 510.09	V	6.01	6.67	-55.14	-55.80	-13.00	42.80
	3 346.15	H	7.46	7.72	-56.14	-56.40	-13.00	43.40
	4 183.70	V	8.78	8.65	-58.43	-58.30	-13.00	45.30

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})

2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

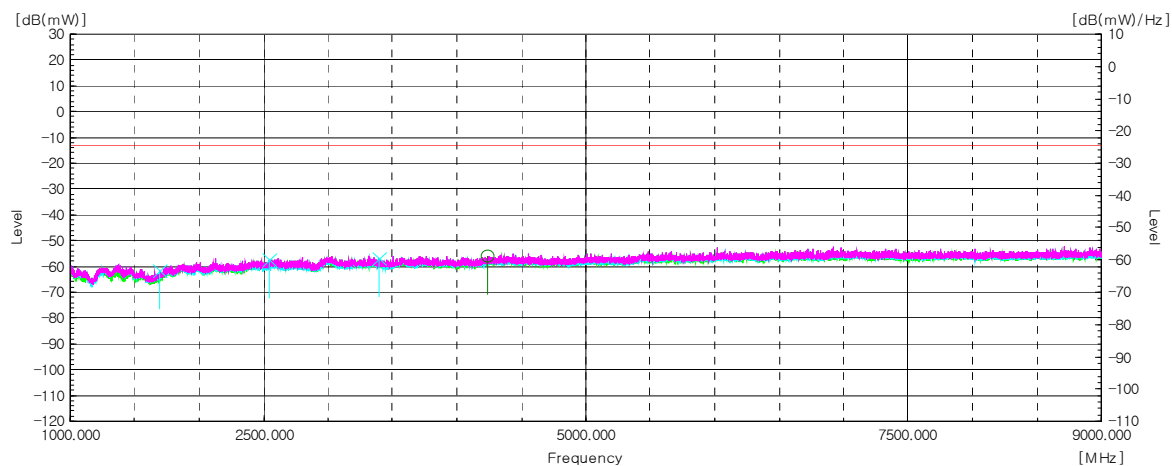
Test mode : GSM 850Frequency(MHz) : 848.8Channel : 251**Horizontal/Vertical**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
GPRS	1 694.54	V	6.37	5.44	-62.73	-61.80	-13.00	48.80
	2 546.60	V	6.07	6.73	-56.74	-57.40	-13.00	44.40
	3 396.65	V	7.57	7.78	-56.69	-56.90	-13.00	43.90
	4 241.70	H	8.84	8.70	-55.94	-55.80	-13.00	42.80

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_[Watts])

2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

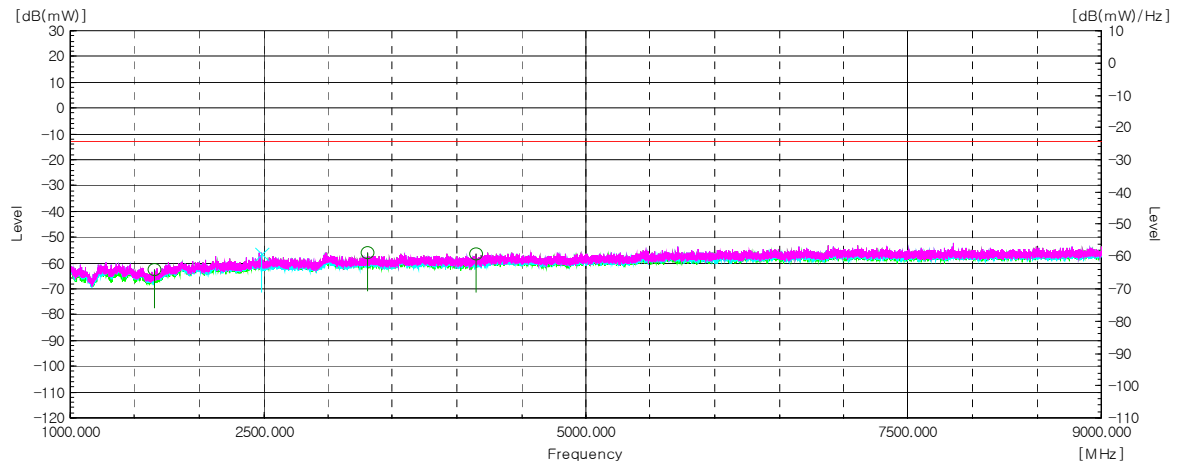
Test mode : WCDMA 850Frequency(MHz) : 826.4Channel : 4132**Horizontal/Vertical**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	1 651.54	H	6.42	5.35	-63.57	-62.50	-13.00	49.50
	2 481.59	V	6.00	6.64	-56.06	-56.70	-13.00	43.70
	3 302.64	H	7.37	7.67	-55.50	-55.80	-13.00	42.80
	4 152.20	H	8.75	8.62	-56.43	-56.30	-13.00	43.30

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})

2. Level(dBm) = Antenna gain(dBi) - Cable loss(dB) - Substitute level(dBm)

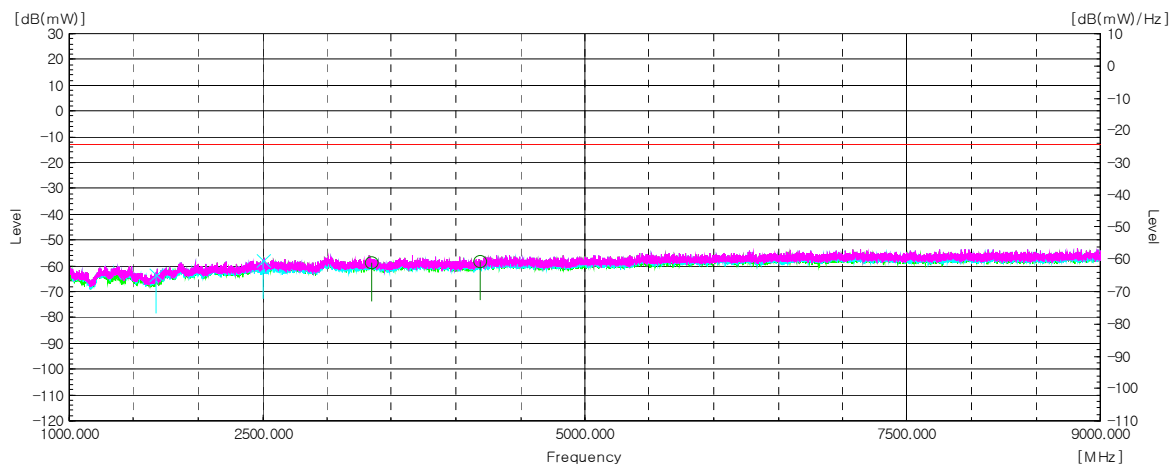
Test mode : WCDMA 850Frequency(MHz) : 836.6Channel : 4183**Horizontal/Vertical**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	1 674.04	V	6.39	5.40	-64.39	-63.40	-13.00	50.40
	2 507.59	V	6.01	6.64	-57.17	-57.80	-13.00	44.80
	3 345.65	H	7.46	7.72	-58.64	-58.90	-13.00	45.90
	4 183.20	H	8.78	8.65	-58.63	-58.50	-13.00	45.50

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})

2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

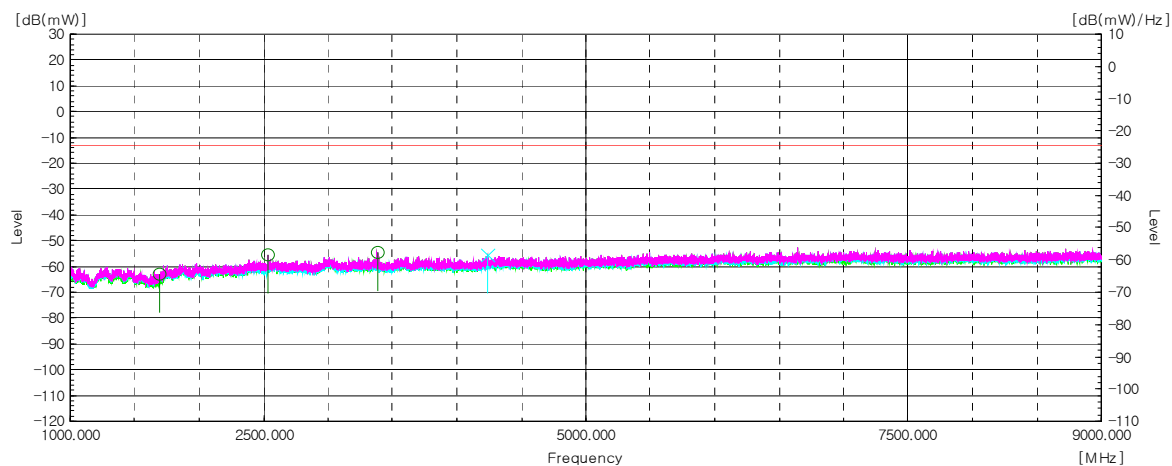Test mode : WCDMA 850Frequency(MHz) : 846.6Channel : 4233**Horizontal/Vertical**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	1 692.04	H	6.37	5.44	-63.83	-62.90	-13.00	49.90
	2 535.60	H	6.05	6.72	-54.93	-55.60	-13.00	42.60
	3 383.15	H	7.54	7.77	-54.37	-54.60	-13.00	41.60
	4 235.20	V	8.84	8.69	-55.75	-55.60	-13.00	42.60

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_[Watts])


2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

Test mode : GSM 1900


Frequency(MHz) : 1 850.2

Channel : 512

Horizontal/Vertical for 1 GHz ~ 3 GHz

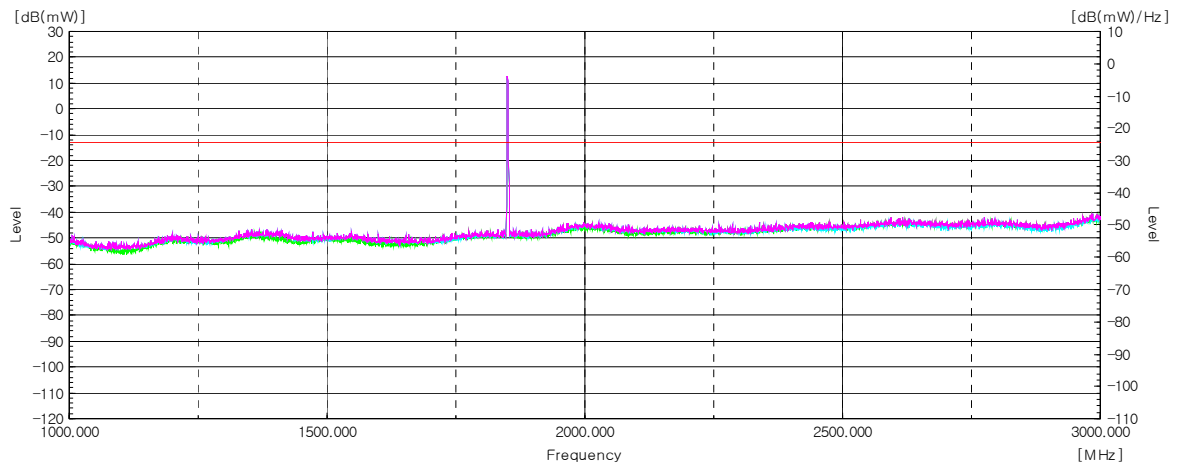

Horizontal/Vertical for 3 GHz ~ 18 GHz

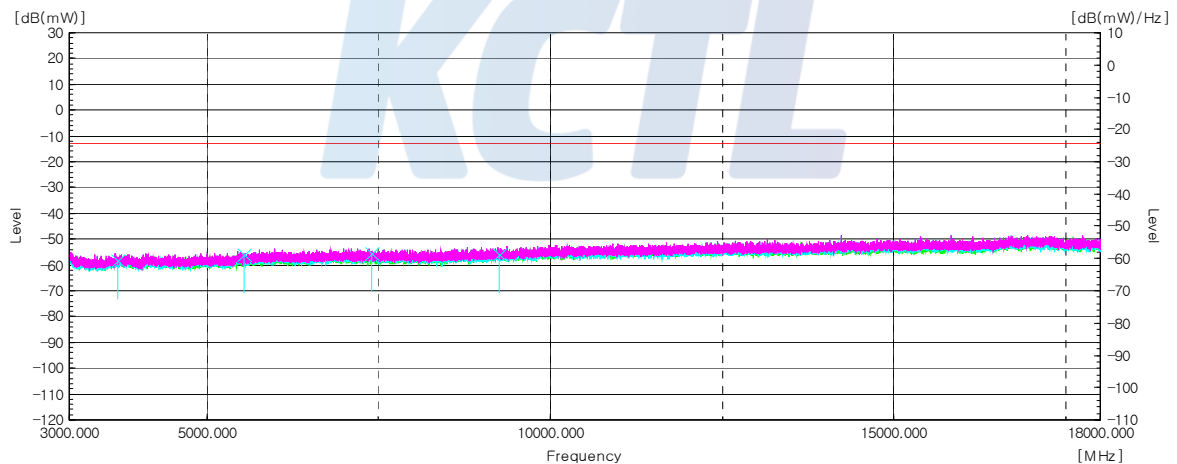

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
GPRS	3 700.50	V	8.12	8.15	-58.37	-58.40	-13.00	45.40
	5 544.00	V	10.60	10.04	-56.56	-56.00	-13.00	43.00
	7 400.50	V	11.82	11.62	-55.90	-55.70	-13.00	42.70
	9 251.50	V	12.95	13.13	-55.92	-56.10	-13.00	43.10

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})


2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

Test mode : GSM 1900


Frequency(MHz) : 1 880.0

Channel : 661

Horizontal/Vertical for 1 GHz ~ 3 GHz

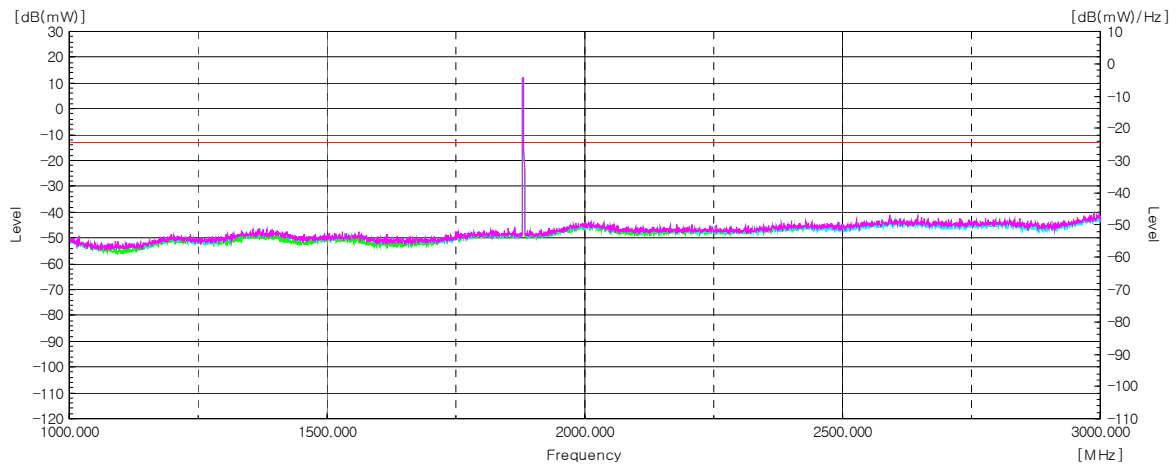

Horizontal/Vertical for 3 GHz ~ 18 GHz


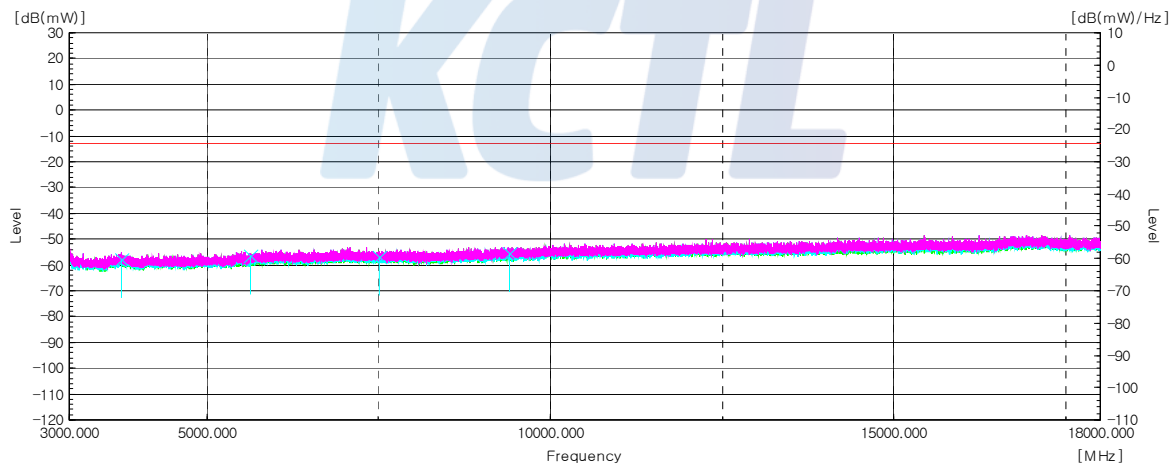


Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
GPRS	3 760.00	V	8.22	8.24	-58.08	-58.10	-13.00	45.10
	5 640.00	V	10.60	10.18	-56.72	-56.30	-13.00	43.30
	7 520.00	V	12.02	11.83	-57.29	-57.10	-13.00	44.10
	9 401.50	V	13.04	13.31	-55.13	-55.40	-13.00	42.40

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})

2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

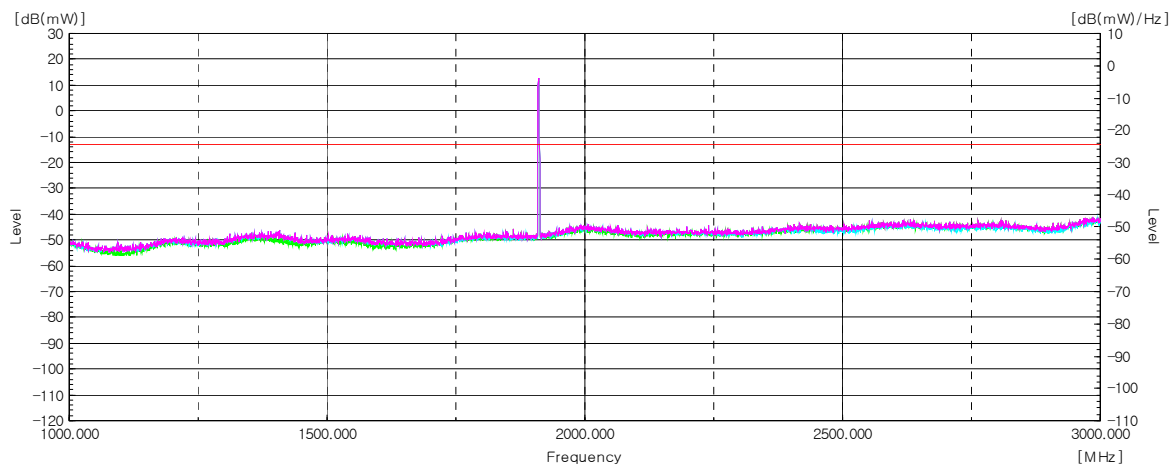
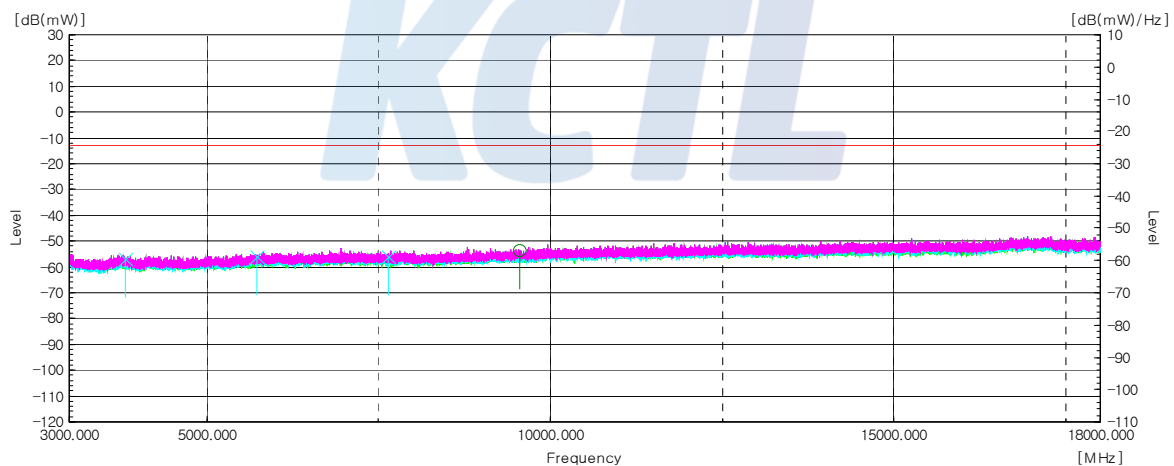
Test mode : GSM 1900Frequency(MHz) : 1 909.8Channel : 810**Horizontal/Vertical for 1 GHz ~ 3 GHz****Horizontal/Vertical for 3 GHz ~ 18 GHz**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
GPRS	3 819.50	V	8.31	8.21	-57.20	-57.10	-13.00	44.10
	5 728.50	V	10.60	10.45	-56.15	-56.00	-13.00	43.00
	7 640.50	V	12.14	11.92	-56.12	-55.90	-13.00	42.90
	9 550.50	H	13.06	13.32	-53.54	-53.80	-13.00	40.80

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})

2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

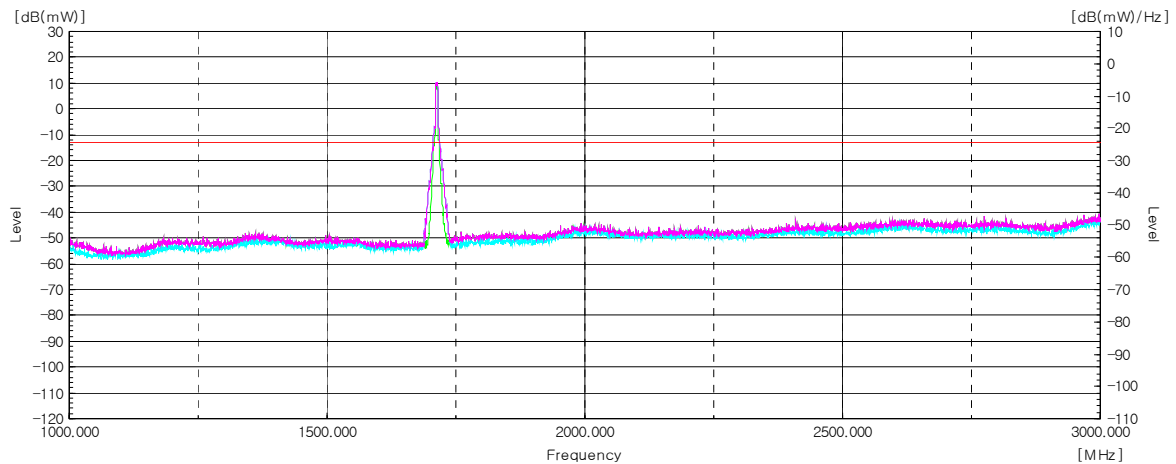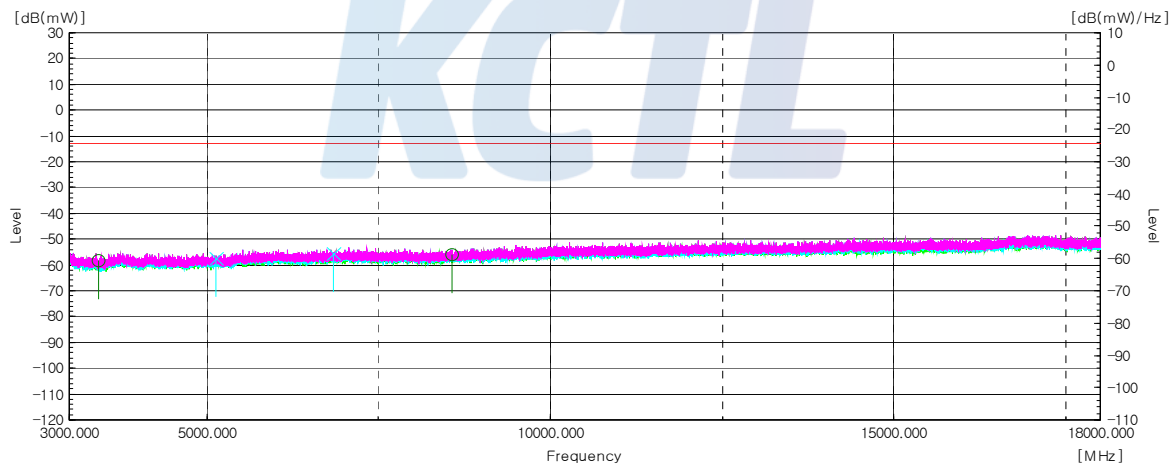Test mode : WCDMA 1700Frequency(MHz) : 1 712.4Channel : 1312**Horizontal/Vertical for 1 GHz ~ 3 GHz****Horizontal/Vertical for 3 GHz ~ 18 GHz**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 425.50	H	7.64	7.82	-57.92	-58.10	-13.00	45.10
	5 137.50	V	10.09	9.67	-58.02	-57.60	-13.00	44.60
	6 848.50	V	11.04	11.28	-55.16	-55.40	-13.00	42.40
	8 562.50	H	12.98	12.61	-56.27	-55.90	-13.00	42.90

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})


2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

Test mode : WCDMA 1700


Frequency(MHz) : 1 732.4

Channel : 1412

Horizontal/Vertical for 1 GHz ~ 3 GHz

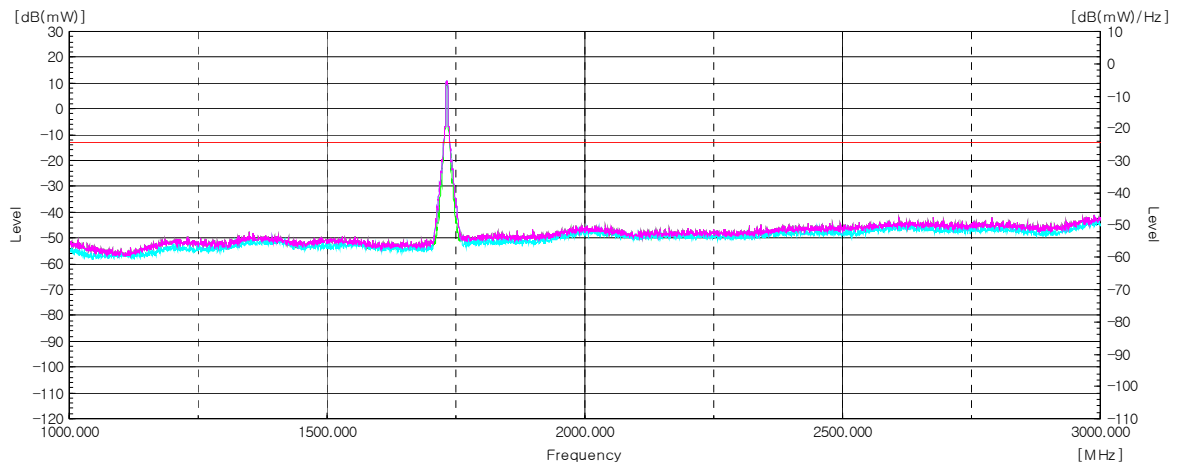

Horizontal/Vertical for 3 GHz ~ 18 GHz


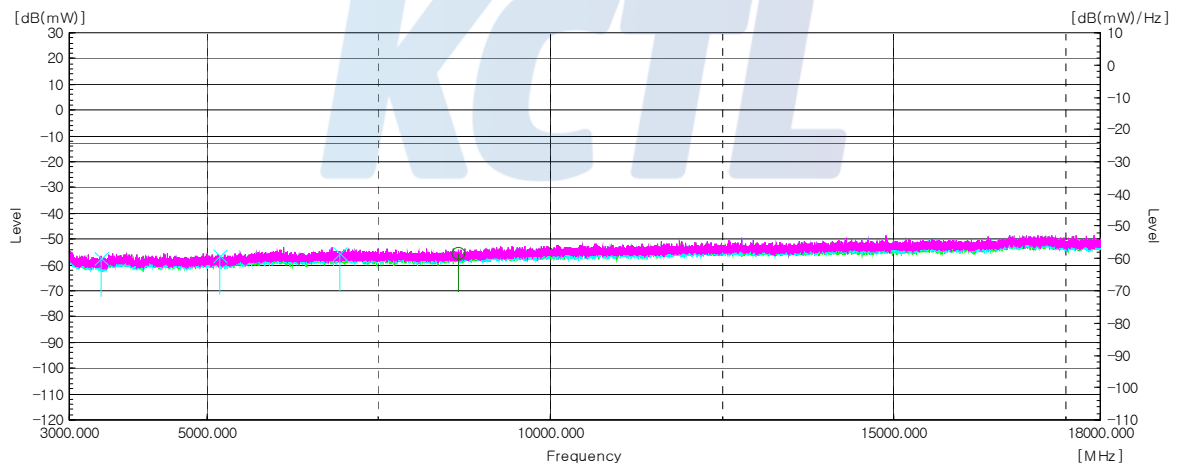


Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 463.00	V	7.72	7.86	-57.46	-57.60	-13.00	44.60
	5 196.00	V	10.17	9.73	-56.84	-56.40	-13.00	43.40
	6 929.50	V	11.07	11.40	-55.37	-55.70	-13.00	42.70
	8 662.00	H	12.94	12.79	-55.75	-55.60	-13.00	42.60

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})

2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

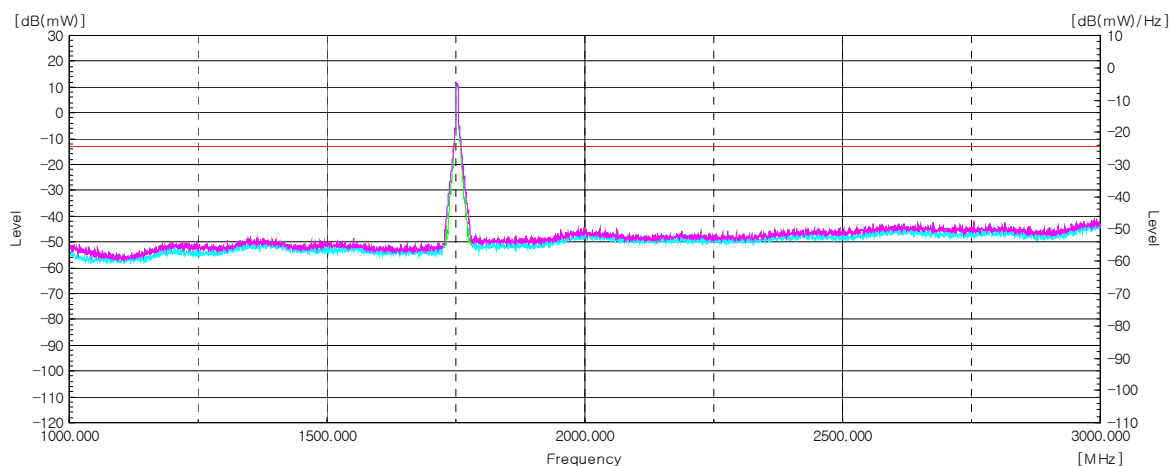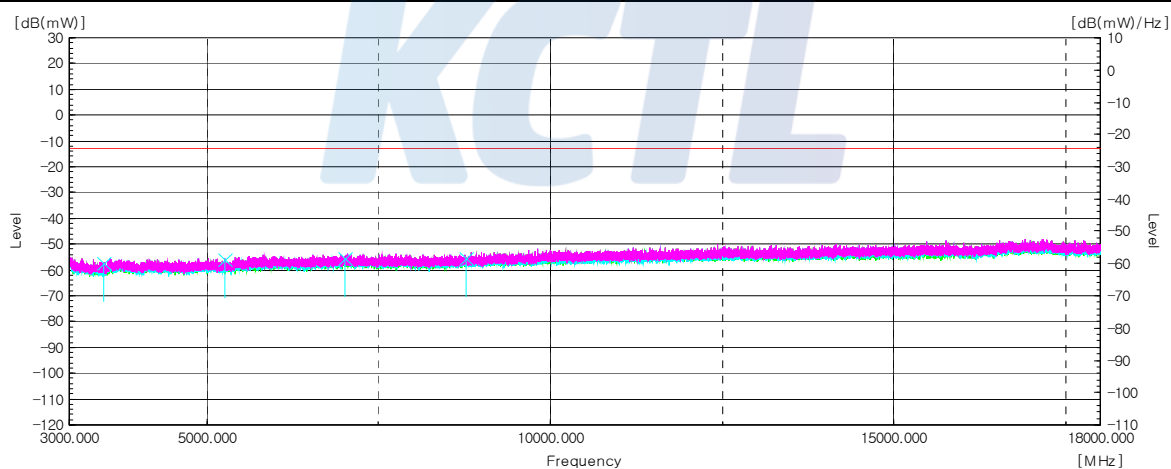Test mode : WCDMA 1700Frequency(MHz) : 1 752.6Channel : 1513**Horizontal/Vertical for 1 GHz ~ 3 GHz****Horizontal/Vertical for 3 GHz ~ 18 GHz**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 504.00	V	7.81	7.91	-57.50	-57.60	-13.00	44.60
	5 257.50	V	10.26	9.68	-56.48	-55.90	-13.00	42.90
	7 011.00	V	11.12	11.33	-55.19	-55.40	-13.00	42.40
	8 765.50	V	12.89	12.90	-55.69	-55.70	-13.00	42.70

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})


2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

Test mode : WCDMA 1900


Frequency(MHz) : 1 852.4

Channel : 9262

Horizontal/Vertical for 1 GHz ~ 3 GHz

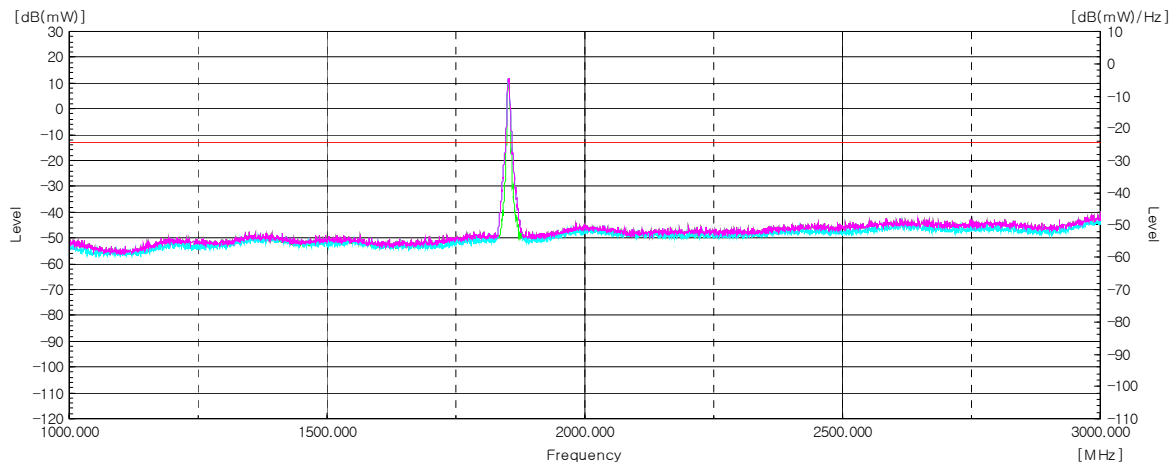

Horizontal/Vertical for 3 GHz ~ 18 GHz

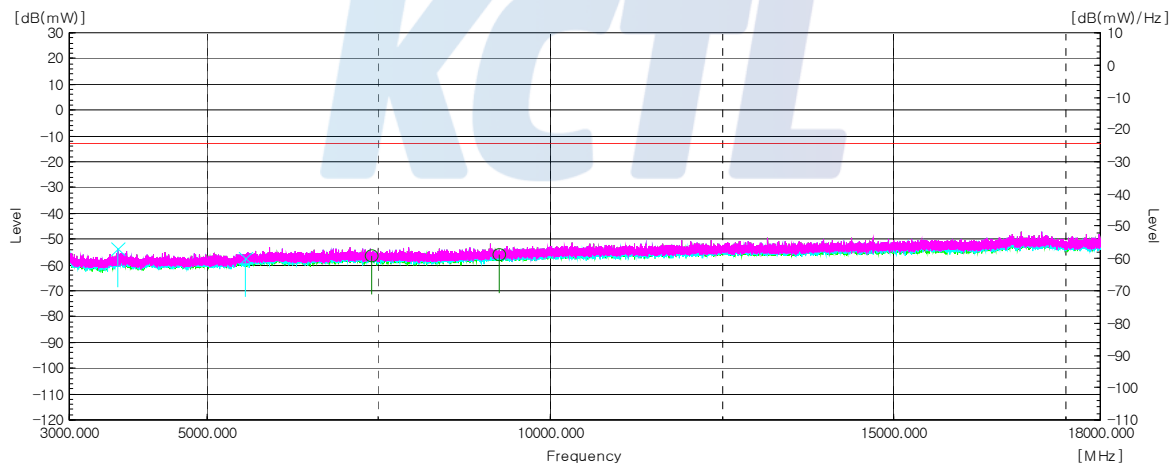

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 707.00	V	8.13	8.16	-53.67	-53.70	-13.00	40.70
	5 560.50	V	10.60	10.05	-57.95	-57.40	-13.00	44.40
	7 408.50	H	11.84	11.63	-56.81	-56.60	-13.00	43.60
	9 262.50	H	12.96	13.13	-55.63	-55.80	-13.00	42.80

Note.



1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})

2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

Test mode : WCDMA 1900

Frequency(MHz) : 1 880.0

Channel : 9400

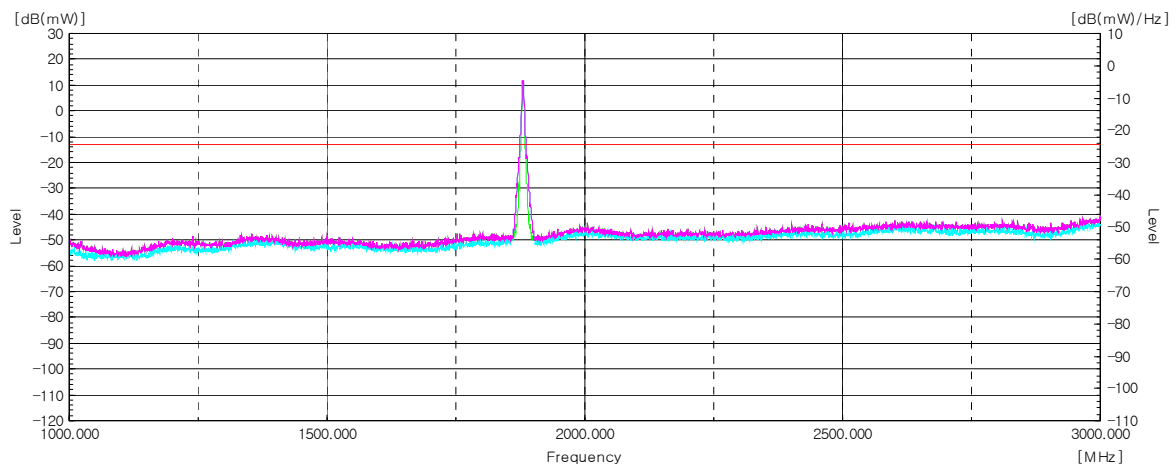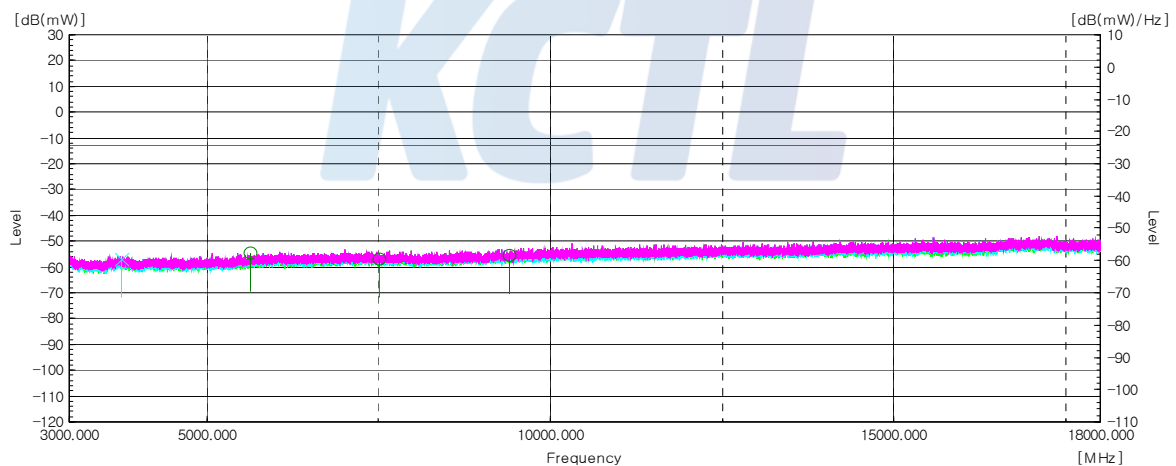Horizontal/Vertical for 1 GHz ~ 3 GHz**Horizontal/Vertical for 3 GHz ~ 18 GHz**

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 760.00	V	8.22	8.24	-56.78	-56.80	-13.00	43.80
	5 638.00	H	10.60	10.18	-54.92	-54.50	-13.00	41.50
	7 520.00	H	12.02	11.83	-57.29	-57.10	-13.00	44.10
	9 399.50	H	13.04	13.31	-55.43	-55.70	-13.00	42.70

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})


2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

Test mode : WCDMA 1900


Frequency(MHz) : 1 907.6

Channel : 9538

Horizontal/Vertical for 1 GHz ~ 3 GHz

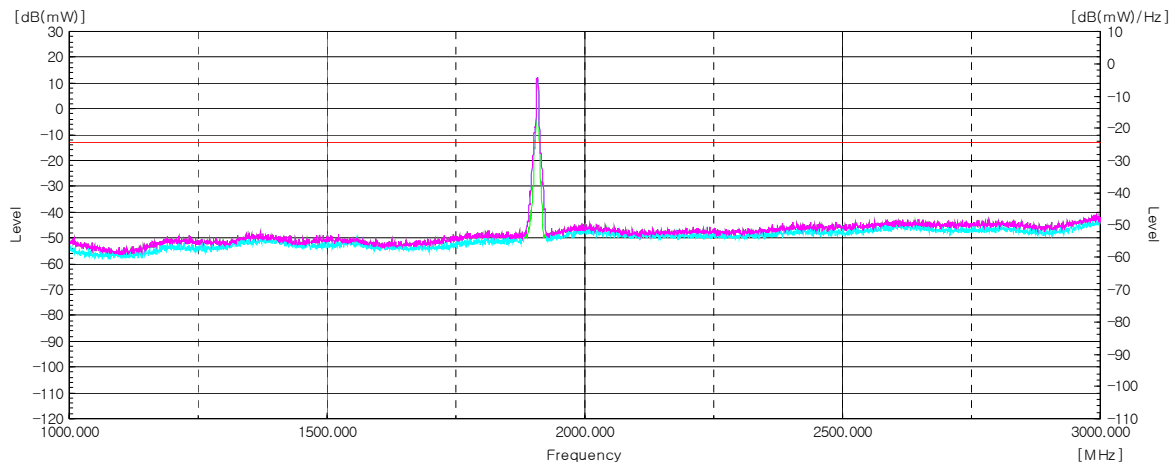

Horizontal/Vertical for 3 GHz ~ 18 GHz

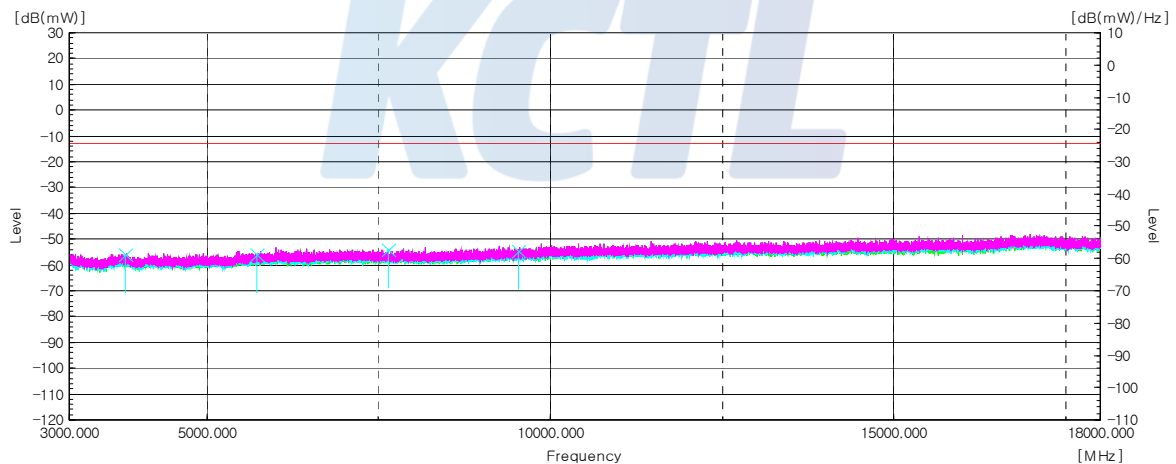

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 819.00	V	8.31	8.21	-56.10	-56.00	-13.00	43.00
	5 722.00	V	10.60	10.44	-56.26	-56.10	-13.00	43.10
	7 642.00	V	12.14	11.93	-54.41	-54.20	-13.00	41.20
	9 539.00	V	13.07	13.31	-54.56	-54.80	-13.00	41.80


Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})


2. Level(dB m) = Antenna gain(dB i) - Cable loss(dB) - Substitute level(dB m)

Test results (Above 18 GHz to 20 GHz) – Worst case

Test mode : GSM 1900
Frequency (MHz) : 1 909.8
Channel : 810

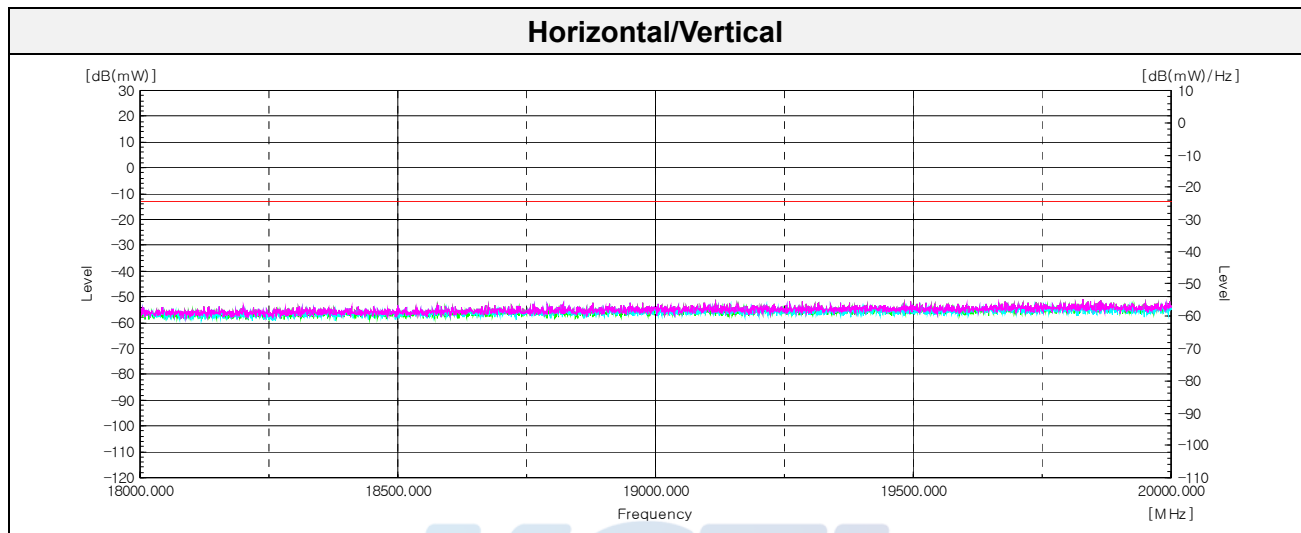

Test mode : WCDMA 1900
Frequency (MHz) : 1 907.6
Channel : 9538

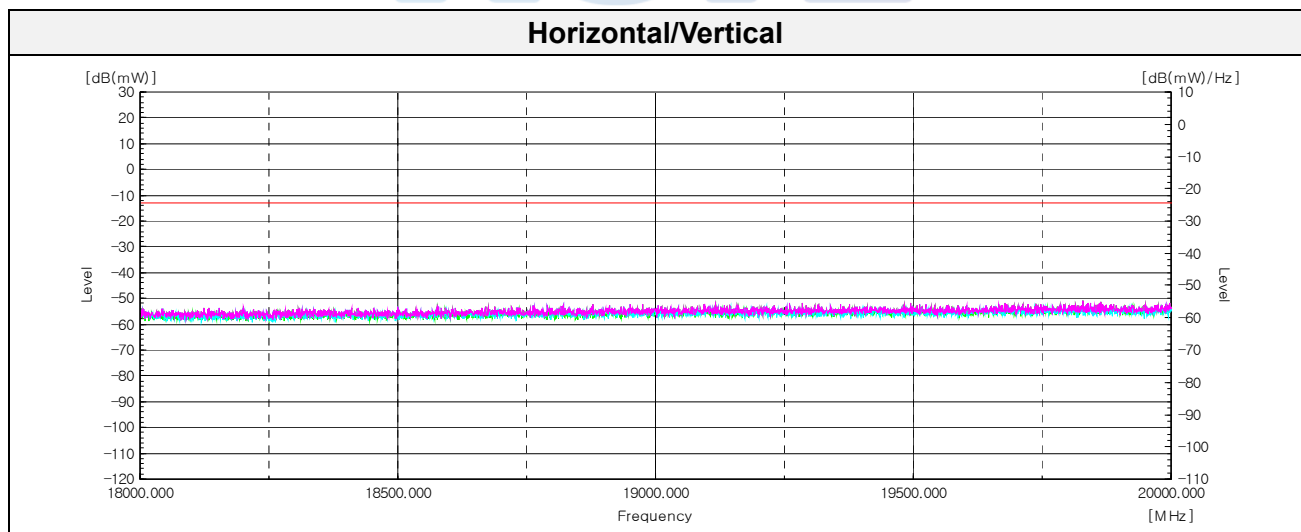**Note.**

1. No spurious emissions were detected above 18GHz.

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R & S	FSV30	100914	20.10.14
Spectrum Analyzer	AGILENT	N9040B	MY57010132	20.07.31
Signal Generator	R&S	SMB100A	176206	20.01.25
Power Divider	Aeroflex /Weinschel, Inc.	1580-1	SC571	20.08.01
Attenuator	API Inmet	40AH2W-10	16	20.05.15
Attenuator	API Inmet	40AH2W-10	12	20.05.15
Attenuator	Weinschel ENGINEERING	10	AJ1239	20.05.14
DC Power Supply	Agilent	E3632A	KR94907664	20.05.13
Temp & Humid Chamber	ESPEC CORP.	SH-641	92004785	20.05.13
Wideband Radio Communication Tester	R & S	CMW500	132120	20.07.17
Wideband Radio Communication Tester	R & S	CMW500	141780	20.04.18
High pass Filter	Wainwright Instruments GmbH	WHKX3.0/18G- 12SS	44	20.01.25
High pass Filter	Wainwright Instruments GmbH	WHKX1.0/1.5S- 10SS	14	20.01.25
Biconical VHF-UHF Broadband Antenna	SCHWARZBECK	VUBA9117	275	20.04.13
Bilog Antenna	Teseq GmbH	CBL 6143A	35039	21.05.21
Horn Antenna	ETS.lindgren	3117	00161083	20.09.18
Horn Antenna	ETS.lindgren	3117	161225	20.05.22
Horn Antenna	ETS.lindgren	3116	00086632	20.02.15
Horn Antenna	ETS.lindgren	3116	00086635	20.05.09
Amplifier	SONOMA INSTRUMENT	310N	186402	20.01.04
Amplifier	L-3 Narda-MITEQ	AMF-7D-01001800- 22-10P	2031196	20.02.21
Amplifier	L-3 Narda-MITEQ	JS44-18004000-33- 8P	2000997	20.08.01
Antenna Mast	MATURO	EAS 1.5	042/8941211	N/A
Antenna Mast	MATURO	EAS 1.5	043/8941211	N/A
Turn Table	MATURO	TT 0.8 PF	041/8941211	N/A
Cable Assembly	Radiall	R286303620	1649.241	N/A
Cable Assembly	Radiall	TESTPRO 3	N/A	N/A

End of test report