



Part #0 Power Density Report

Power Density Characterization

FCC ID : A3LSMF976U

Revision : B

Date : April 10th, 2026

SAMSUNG ELECTRONICS

Power Density Characterization

1. Exposure Scenarios

At frequencies > 6 GHz, the total peak spatial averaged power density (psPD) is required to be assessed for all antenna configurations (beams) from all mmWave antenna modules installed inside the device. This device has a patch antenna arrays

As showed in Figure 1 and 2, the surfaces near-by each mmW antenna module for PD characterization are identified and listed in Table 1.

Table 1. Evaluation Surfaces for PD Characterization

Band/Mode	Antenna Module	condition	Back	Front	Top	Bottom	Right	Left
NR n258	J	Closed	Yes	Yes	Yes	No	Yes	No
NR n260	J	Closed	Yes	Yes	Yes	No	Yes	No
NR n261	J	Closed	Yes	Yes	Yes	No	Yes	No
NR n258	J	Open	Yes	Yes	Yes	No	Yes	No
NR n260	J	Open	Yes	Yes	Yes	No	Yes	No
NR n261	J	Open	Yes	Yes	Yes	No	Yes	No

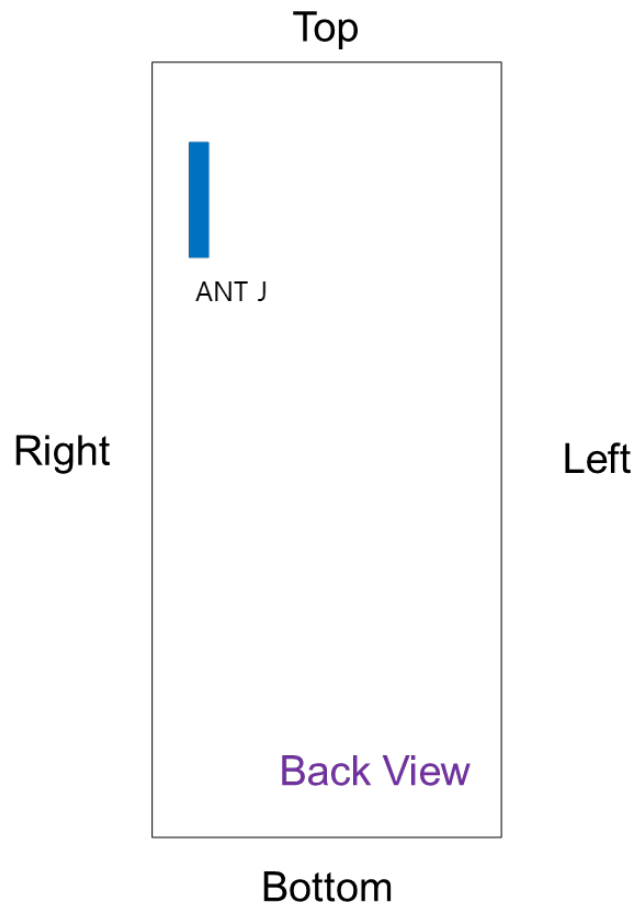


Figure 1: Location of mmW antenna modules looking from back of the DUT - Closed


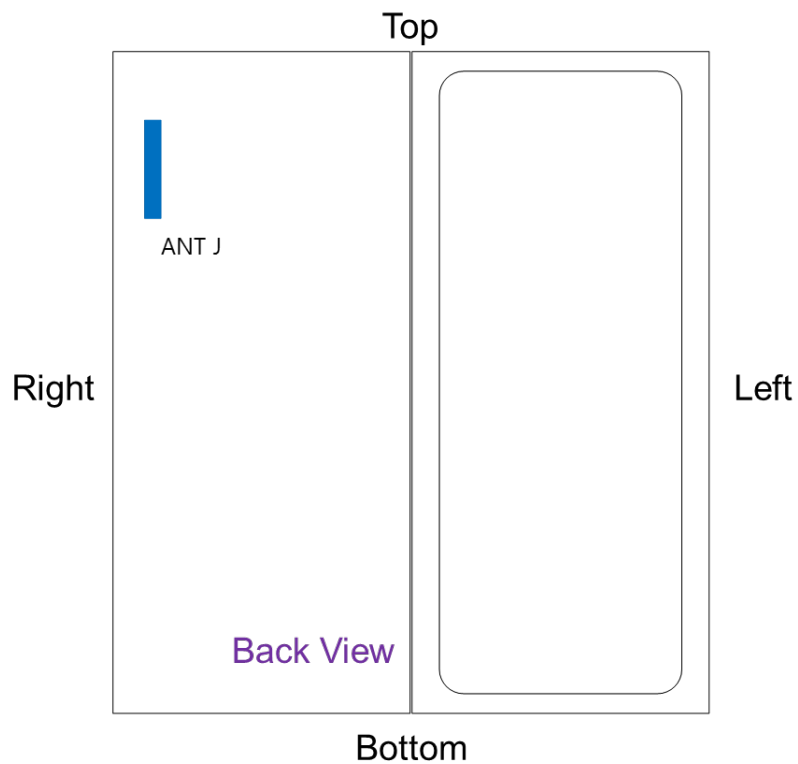


Figure 2: Location of mmW antenna modules looking from back of the DUT – Open

2. Power Density Characterization Method



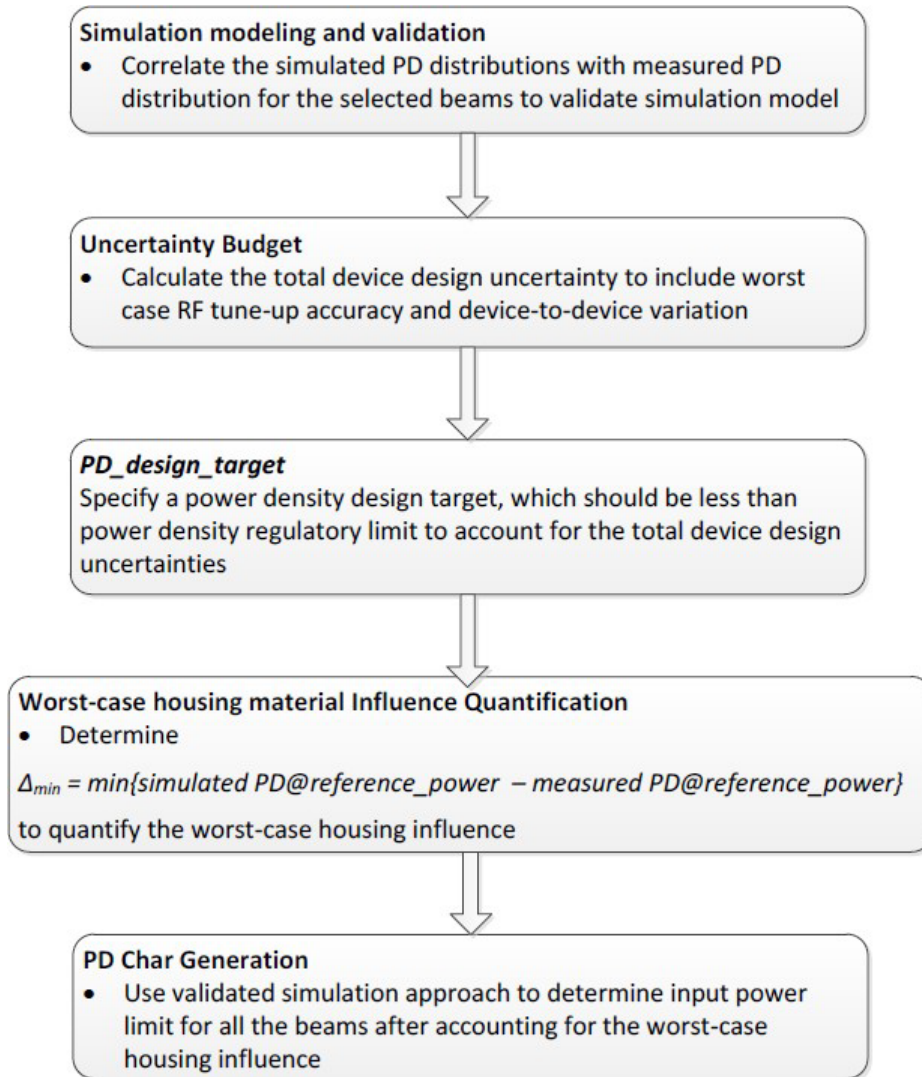

ELECTRONICS

3. Codebook for all supported beams

Table 2. 5G mmW NR Band n258 Ant J Codebook

Band	Module	Type(P or D)	Beam ID	Feed no.	Paried With
n258	J	Patch	0	1	256
			1	1	257
			2	1	258
			3	1	259
			4	1	260
			5	2	261
			6	2	262
			7	2	263
			8	2	264
			9	2	265
			10	2	266
			11	2	267
			12	5	268
			13	5	269
			14	5	270
			15	5	271
			16	5	272
			17	5	273
			18	5	274
			19	5	275
			20	5	276
			256	1	0
			257	1	1
			258	1	2
			259	1	3
			260	1	4
			261	2	5
			262	2	6
			263	2	7
			264	2	8
			265	2	9
			266	2	10
			267	2	11
			268	5	12
			269	5	13
			270	5	14
			271	5	15
			272	5	16
			273	5	17
			274	5	18
			275	5	19
			276	5	20

Table 3. 5G mmW NR Band n260 Ant J Codebook

Band	Module	Type(P or D)	Beam ID	Feed no.	Paried With
n260	J	Patch	0	1	256
			1	1	257
			2	1	258
			3	1	259
			4	1	260
			5	2	261
			6	2	262
			7	2	263
			8	2	264
			9	2	265
			10	2	266
			11	2	267
			12	5	268
			13	5	269
			14	5	270
			15	5	271
			16	5	272
			17	5	273
			18	5	274
			19	5	275
			20	5	276
			256	1	0
			257	1	1
			258	1	2
			259	1	3
			260	1	4
			261	2	5
			262	2	6
			263	2	7
			264	2	8
			265	2	9
			266	2	10
			267	2	11
			268	5	12
			269	5	13
			270	5	14
			271	5	15
			272	5	16
			273	5	17
			274	5	18
			275	5	19
			276	5	20

Table 4. 5G mmW NR Band n261 Ant J Codebook

Band	Module	Type(P or D)	Beam ID	Feed no.	Paried With
n261	J	Patch	0	1	256
			1	1	257
			2	1	258
			3	1	259
			4	1	260
			5	2	261
			6	2	262
			7	2	263
			8	2	264
			9	2	265
			10	2	266
			11	2	267
			12	5	268
			13	5	269
			14	5	270
			15	5	271
			16	5	272
			17	5	273
			18	5	274
			19	5	275
			20	5	276
			256	1	0
			257	1	1
			258	1	2
			259	1	3
			260	1	4
			261	2	5
			262	2	6
			263	2	7
			264	2	8
			265	2	9
			266	2	10
			267	2	11
			268	5	12
			269	5	13
			270	5	14
			271	5	15
			272	5	16
			273	5	17
			274	5	18
			275	5	19
			276	5	20

4. Simulation and Modeling Validation

Power density simulations of all beams and surfaces were performed. Details of these simulations and modeling validation can be found in the Power Density Simulation Report. Table below includes a summary of the validation results to support worst-case housing influence quantification in power density characterization for this model.

With an input power of 6 dBm for n258, n260 and n261 bands, PD measurements are conducted for at least one single beam per antenna module on worst-surface(s). PD measurements are performed at mid channel of each mmW band and with CW modulation. ALL measured PD values are listed in table below along with corresponding simulated PD values for the same configuration.

PD value will be used to determine worst-case housing influence for conservative assessment.

Table 5. Simulated and Measure PD

Condition	Band	Channel	Module	Side	Beam ID	Sim. PD (mW/cm2)	Meas. PD (mW/cm2) * Circle Avg	Delta = sim - meas (dB)
Closed	n261	Mid Ch. 2077915 (27924.96 MHz)	J	Right	274	0.608	0.378	2.06
				Rear	14	1.199	0.795	1.78
					275	1.164	0.918	1.03
	n260	Mid Ch. 2254165 (38499.96 MHz)	J	Right	19	0.876	0.461	2.79
					275	0.804	0.296	4.34
				Rear	19	1.279	0.616	3.17
					275	1.131	0.422	4.28
	n258	Mid Ch. 2025833 (24800.04 MHz)	J	Right	273	0.717	0.466	1.87
				Rear	14	1.157	0.612	2.77
					273	1.434	1.010	1.52

Condition	Band	Channel	Module	Side	Beam ID	Sim. PD (mW/cm2)	Meas. PD (mW/cm2) * Circle Avg	Delta = sim - meas (dB)
open	n261	Mid Ch. 2077915 (27924.96 MHz)	J	Right	275	0.659	0.485	1.33
				Rear	14	1.175	0.767	1.85
					275	1.198	0.920	1.15
	n260	Mid Ch. 2254165 (38499.96 MHz)	J	Right	19	0.877	0.316	4.43
					275	0.861	0.475	2.58
				Rear	19	1.291	0.627	3.14
					275	1.155	0.622	2.69
	n258	Mid Ch. 2025833 (24800.04 MHz)	J	Rear	14	1.154	0.638	2.57
					273	1.379	1.010	1.35

5. PD design target

Table 6. PD design target

PD_design_target	
$PD_design_target < PD_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$	
psPD over 4 cm ² Averaging Area (mW/cm ²)	
Total Uncertainty	1.4 dB
PD_regulatory_limit	1.0 mW/cm ²
PD_design_target	0.724 mW/cm ²

6. Δmin

For non-metal material, the material property cannot be accurately characterized at mmW frequencies to date. The estimated material property for the device housing is used in the simulation model, which could influence the accuracy in simulation for PD amplitude quantification. Since the housing influence on PD could vary from surface to surface where the EM field propagates through, the most underestimated surface is used to quantify the worst-case housing influence for conservative assessment.

Since the mmW antenna modules are placed at different locations, only surrounding material/housing has impact on EM field propagation, and in turn power density. Furthermore, depending on the type of antenna array, i.e., dipole antenna array or patch antenna array, the nature of EM field propagation in the near field is different. Therefore, the worst-case housing influence is determined per antenna module and per antenna type.

For this DUT, the below procedure was used to determine worst-case housing influence,

Δmin :

1. Based on PD simulation, for each module and antenna type, determine one or more worst-surface(s) that has highest 4cm² PD for all the single beams per antenna module and per antenna type in the mid channel of each band.
2. For identified worst surface(s) per antenna module and per antenna type group,
 - a. First determine min based on identified worst surface(s), and derive input.power.limit
 - b. Then prove all other near-by surface(s), i.e., non-selected surface(s), is not required for housing material loss quantification(in other words, these non-evaluated surfaces have

no influence on the determined input.power.limit) by:

- i. re-scale all simulated 4cm² PD at input.power.limit to identify the worst-PD beam per each non-evaluated surface
- ii. Measure 4cm² PD at input.power.limit on identified worst-PD beam per each non-evaluated surface
- iii. Demonstrated all measured 4cm² PD values are below PD_design_target

3. If any of the above surface(s) in Step(2.b.iii) have measured 4cm² PD > PD_design_target, then those surfaces must be included in the min determination in Step(2.a), and re-evaluate input.power.limit with these added surfaces.

Following above procedure, based on Samsung PD simulation report, the worst- surface(s) having highest 4 cm² PD for all the single beams per each antenna type and each antenna module group in the mid channel of n258, n260 and n261 bands are identified as in following table :

Table 7. Worst-surface(s) for ANT J

Band	Antenna/ Module	Condition	Back	Front	Top	Bottom	Right	Left
NR n258	J	Closed	Yes	No	No	No	Yes	No
NR n261	J	Closed	Yes	No	No	No	Yes	No
NR n260	J	Closed	Yes	No	No	No	Yes	No
NR n258	J	Open	Yes	No	No	No	Yes	No
NR n261	J	Open	Yes	No	No	No	Yes	No
NR n260	J	Open	Yes	No	No	No	Yes	No

Thus, when comparing a simulated 4cm²-averaged PD and measured 4cm²-averaged PD for the identified worst surface(s), the worst error introduced for each antenna type and each antenna module group when using the estimated material property in the simulation is highlighted in bold numbers in Table 8. Thus, the worst-case housing influence, denoted as $\Delta_{min} = \text{Sim. PD} - \text{Meas. PD}$, is determined as

Table 8. Δ_{min} for Ant J

Condition	Band	Antenna	Δ_{min} (dB)
Folder Closed	NR n258	J	1.52
	NR n260	J	2.79
	NR n261	J	1.03
Folder Open	NR n258	J	1.35
	NR n260	J	2.58
	NR n261	J	1.15

Δ_{min} represents the worst case where RF exposure is underestimated the most in simulation when using the estimated material property of the housing. For conservative assessment, the Δ_{min} is used as the worst-case factor and applied to all the beams in the corresponding antenna type and antenna module group to determine input power limits in PD char for compliance. The detail input.power.limit derivation is described in Section 7.

Simulated 4cm² PD values in Power Density Simulation Report are scaled to input.power.limit and are listed in Tables blow for all single beams for all identified surfaces, when assuming the simulation is performed with correct housing influence.



ELECTRONICS

Determine the worst beam for each of non-selected surface(s), identified in the table below:

Table 9. Non-Selected Surface(s) for Ant J

Band	Antenna/ Module	Condition	Back	Front	Top	Bottom	Right	Left
NR n258	J	Closed	No	Yes	Yes	No	Yes	No
NR n261	J	Closed	No	Yes	Yes	No	Yes	No
NR n260	J	Closed	No	Yes	Yes	No	No	No
NR n258	J	Open	No	Yes	Yes	No	Yes	No
NR n261	J	Open	No	Yes	Yes	No	Yes	No
NR n260	J	Open	No	Yes	Yes	No	No	No

Then perform PD measurement for all determined worst-case beam on the corresponding surface. Measurement is performed in the mid channel of each band with CW modulation. The evaluation distance is at 2mm.

Table 10. n258/mid channel, J Patch simulated 4cm² PD at PD_design_Target
(if simulation performed with correct housing material properties) (Δmin) - closed

n258, Ant J, Scaled-up Power Density with Sim.power.limit						
Beam ID	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)
0	0.704	0.055	0.317	0.021	0.124	0.697
1	0.332	0.050	0.221	0.025	0.070	0.649
2	0.335	0.027	0.227	0.032	0.081	0.557
3	0.180	0.026	0.097	0.016	0.029	0.724
4	0.213	0.020	0.051	0.012	0.028	0.654
5	0.381	0.060	0.441	0.026	0.098	0.664
6	0.211	0.028	0.103	0.024	0.037	0.668
7	0.370	0.031	0.178	0.013	0.074	0.613
8	0.451	0.084	0.477	0.033	0.204	0.637
9	0.314	0.039	0.145	0.025	0.079	0.636
10	0.164	0.028	0.085	0.018	0.044	0.702
11	0.451	0.084	0.477	0.033	0.204	0.637
12	0.187	0.033	0.103	0.029	0.040	0.655
13	0.227	0.050	0.156	0.030	0.076	0.706
14	0.296	0.038	0.058	0.009	0.050	0.709
15	0.433	0.071	0.245	0.031	0.086	0.611
16	0.471	0.040	0.552	0.033	0.211	0.658
17	0.200	0.037	0.135	0.033	0.048	0.656
18	0.315	0.034	0.091	0.011	0.066	0.642
19	0.666	0.073	0.133	0.017	0.098	0.666
20	0.399	0.054	0.346	0.043	0.193	0.623
256	0.139	0.028	0.183	0.009	0.031	0.622
257	0.196	0.058	0.218	0.009	0.027	0.711
258	0.246	0.033	0.149	0.009	0.033	0.715
259	0.203	0.023	0.066	0.016	0.039	0.685
260	0.308	0.024	0.096	0.016	0.028	0.724
261	0.168	0.031	0.132	0.009	0.025	0.679
262	0.268	0.013	0.028	0.011	0.030	0.724
263	0.246	0.027	0.219	0.007	0.034	0.724
264	0.154	0.027	0.211	0.009	0.026	0.658
265	0.175	0.019	0.064	0.006	0.031	0.699
266	0.206	0.015	0.062	0.011	0.030	0.705
267	0.156	0.029	0.206	0.009	0.024	0.662
268	0.358	0.013	0.091	0.009	0.018	0.724
269	0.218	0.022	0.059	0.007	0.023	0.677
270	0.159	0.027	0.090	0.012	0.028	0.694
271	0.201	0.025	0.186	0.012	0.037	0.689
272	0.223	0.026	0.303	0.012	0.034	0.665
273	0.362	0.015	0.048	0.011	0.025	0.724
274	0.161	0.033	0.075	0.006	0.018	0.670
275	0.212	0.027	0.137	0.009	0.030	0.705
276	0.275	0.022	0.258	0.013	0.050	0.653



ELECTRONICS

Table 11. n260/mid channel, J Patch simulated 4cm² PD at PD_design_Target
(if simulation performed with correct housing material properties) (Δmin) - closed

n260, Ant J, Scaled-up Power Density with Sim.power.limit						
Beam ID	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)
0	0.643	0.013	0.175	0.003	0.032	0.724
1	0.584	0.017	0.121	0.003	0.022	0.705
2	0.328	0.035	0.074	0.006	0.030	0.724
3	0.248	0.025	0.082	0.006	0.025	0.724
4	0.413	0.019	0.056	0.011	0.026	0.724
5	0.289	0.033	0.117	0.014	0.031	0.668
6	0.316	0.022	0.079	0.009	0.026	0.705
7	0.368	0.016	0.066	0.005	0.027	0.724
8	0.363	0.031	0.109	0.014	0.035	0.724
9	0.568	0.018	0.141	0.008	0.042	0.724
10	0.338	0.014	0.037	0.005	0.025	0.724
11	0.631	0.011	0.159	0.003	0.020	0.724
12	0.424	0.023	0.254	0.014	0.048	0.644
13	0.495	0.021	0.154	0.009	0.072	0.724
14	0.497	0.022	0.050	0.002	0.017	0.724
15	0.438	0.025	0.136	0.004	0.025	0.724
16	0.577	0.031	0.268	0.010	0.069	0.701
17	0.386	0.026	0.256	0.012	0.033	0.655
18	0.497	0.026	0.093	0.007	0.071	0.724
19	0.496	0.018	0.039	0.002	0.019	0.724
20	0.406	0.021	0.138	0.003	0.022	0.724
256	0.486	0.030	0.198	0.005	0.040	0.710
257	0.488	0.024	0.094	0.014	0.045	0.717
258	0.407	0.025	0.098	0.013	0.044	0.524
259	0.482	0.030	0.094	0.017	0.044	0.664
260	0.529	0.032	0.039	0.007	0.046	0.696
261	0.386	0.027	0.168	0.027	0.068	0.504
262	0.438	0.029	0.052	0.012	0.033	0.571
263	0.564	0.035	0.039	0.004	0.030	0.724
264	0.432	0.044	0.215	0.016	0.047	0.724
265	0.524	0.020	0.176	0.018	0.061	0.671
266	0.429	0.028	0.044	0.008	0.028	0.602
267	0.527	0.018	0.194	0.007	0.039	0.680
268	0.361	0.031	0.304	0.020	0.058	0.619
269	0.551	0.037	0.138	0.012	0.045	0.646
270	0.464	0.033	0.067	0.004	0.041	0.680
271	0.600	0.024	0.086	0.011	0.056	0.699
272	0.384	0.036	0.131	0.027	0.082	0.506
273	0.411	0.025	0.283	0.018	0.068	0.594
274	0.542	0.035	0.101	0.009	0.038	0.689
275	0.474	0.034	0.057	0.002	0.026	0.667
276	0.497	0.031	0.114	0.023	0.093	0.594

Table 12. n261/mid channel, J Patch simulated 4cm² PD at PD_design_Target
(if simulation performed with correct housing material properties) (Δmin) - closed

n261, Ant J, Scaled-up Power Density with Sim.power.limit						
Beam ID	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)
0	0.472	0.025	0.119	0.007	0.047	0.714
1	0.424	0.042	0.104	0.008	0.042	0.701
2	0.295	0.033	0.113	0.011	0.062	0.684
3	0.214	0.028	0.105	0.012	0.053	0.652
4	0.180	0.021	0.051	0.006	0.036	0.692
5	0.422	0.045	0.179	0.020	0.042	0.691
6	0.333	0.033	0.064	0.012	0.033	0.671
7	0.382	0.055	0.270	0.024	0.136	0.724
8	0.375	0.044	0.224	0.019	0.054	0.724
9	0.405	0.044	0.238	0.024	0.058	0.704
10	0.169	0.021	0.027	0.002	0.030	0.657
11	0.391	0.040	0.207	0.017	0.049	0.724
12	0.311	0.024	0.247	0.043	0.103	0.574
13	0.258	0.043	0.046	0.007	0.039	0.697
14	0.296	0.042	0.066	0.002	0.026	0.699
15	0.379	0.065	0.150	0.009	0.054	0.723
16	0.477	0.057	0.401	0.029	0.181	0.636
17	0.298	0.055	0.043	0.018	0.054	0.667
18	0.297	0.044	0.048	0.003	0.032	0.668
19	0.414	0.048	0.103	0.008	0.053	0.680
20	0.340	0.053	0.138	0.012	0.072	0.724
256	0.296	0.048	0.270	0.007	0.033	0.687
257	0.343	0.034	0.238	0.008	0.023	0.683
258	0.382	0.029	0.120	0.013	0.016	0.702
259	0.372	0.026	0.058	0.019	0.022	0.708
260	0.270	0.030	0.060	0.017	0.026	0.724
261	0.371	0.029	0.086	0.021	0.024	0.687
262	0.358	0.020	0.056	0.005	0.010	0.711
263	0.268	0.027	0.306	0.004	0.027	0.724
264	0.433	0.034	0.190	0.025	0.041	0.724
265	0.323	0.023	0.036	0.034	0.021	0.724
266	0.323	0.029	0.204	0.005	0.029	0.706
267	0.341	0.027	0.269	0.015	0.020	0.724
268	0.399	0.032	0.113	0.013	0.040	0.711
269	0.381	0.047	0.068	0.017	0.024	0.724
270	0.352	0.021	0.041	0.006	0.023	0.696
271	0.344	0.029	0.220	0.003	0.029	0.706
272	0.205	0.031	0.291	0.009	0.026	0.676
273	0.391	0.041	0.107	0.015	0.039	0.716
274	0.385	0.026	0.053	0.006	0.021	0.708
275	0.366	0.029	0.103	0.006	0.024	0.707
276	0.338	0.032	0.310	0.005	0.034	0.720



ELECTRONICS

Table 13. n258/mid channel, J Patch simulated 4cm² PD at PD_design_Target
(if simulation performed with correct housing material properties) (Δ_{min}) - open

n258, Ant J, Scaled-up Power Density with Sim.power.limit						
Beam ID	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)
0	0.466	0.044	0.399	0.022	0.362	0.680
1	0.312	0.026	0.254	0.016	0.212	0.724
2	0.287	0.010	0.203	0.016	0.255	0.532
3	0.211	0.010	0.099	0.010	0.118	0.724
4	0.233	0.008	0.056	0.008	0.117	0.684
5	0.371	0.044	0.495	0.018	0.422	0.717
6	0.254	0.009	0.109	0.013	0.156	0.675
7	0.328	0.009	0.174	0.007	0.218	0.648
8	0.286	0.018	0.438	0.024	0.396	0.664
9	0.340	0.028	0.150	0.015	0.340	0.619
10	0.168	0.009	0.068	0.009	0.181	0.659
11	0.286	0.018	0.438	0.024	0.396	0.664
12	0.226	0.013	0.096	0.012	0.266	0.555
13	0.240	0.036	0.189	0.015	0.394	0.681
14	0.277	0.012	0.057	0.010	0.094	0.705
15	0.365	0.014	0.252	0.011	0.419	0.682
16	0.421	0.012	0.489	0.023	0.263	0.616
17	0.254	0.021	0.164	0.018	0.383	0.638
18	0.304	0.029	0.117	0.013	0.211	0.636
19	0.529	0.027	0.141	0.011	0.294	0.695
20	0.442	0.009	0.362	0.022	0.490	0.668
256	0.171	0.013	0.184	0.007	0.080	0.641
257	0.234	0.017	0.256	0.009	0.100	0.651
258	0.252	0.009	0.135	0.009	0.117	0.693
259	0.175	0.007	0.069	0.007	0.138	0.652
260	0.305	0.008	0.095	0.016	0.119	0.697
261	0.155	0.009	0.173	0.009	0.046	0.650
262	0.254	0.006	0.032	0.013	0.070	0.717
263	0.254	0.009	0.240	0.005	0.099	0.715
264	0.219	0.014	0.254	0.008	0.099	0.647
265	0.188	0.006	0.067	0.003	0.093	0.696
266	0.196	0.005	0.057	0.011	0.116	0.685
267	0.210	0.015	0.240	0.007	0.097	0.648
268	0.337	0.004	0.118	0.008	0.061	0.705
269	0.198	0.010	0.048	0.006	0.052	0.667
270	0.162	0.008	0.072	0.006	0.063	0.641
271	0.213	0.007	0.165	0.007	0.165	0.705
272	0.286	0.021	0.343	0.008	0.128	0.684
273	0.341	0.004	0.046	0.016	0.060	0.724
274	0.146	0.011	0.054	0.005	0.034	0.640
275	0.227	0.012	0.111	0.010	0.076	0.694
276	0.335	0.011	0.309	0.007	0.208	0.703



ELECTRONICS

Table 14. n260/mid channel, J Patch simulated 4cm² PD at PD_design_Target
(if simulation performed with correct housing material properties) (Δ_{min}) - open

n260, Ant J, Scaled-up Power Density with Sim.power.limit						
Beam ID	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)
0	0.635	0.003	0.176	0.003	0.074	0.724
1	0.578	0.005	0.117	0.003	0.046	0.695
2	0.330	0.009	0.076	0.009	0.082	0.724
3	0.248	0.013	0.073	0.003	0.095	0.721
4	0.420	0.004	0.053	0.011	0.068	0.724
5	0.298	0.014	0.109	0.012	0.114	0.668
6	0.317	0.009	0.067	0.007	0.077	0.700
7	0.360	0.005	0.056	0.004	0.056	0.724
8	0.369	0.014	0.103	0.010	0.111	0.724
9	0.568	0.005	0.140	0.010	0.093	0.724
10	0.336	0.006	0.031	0.005	0.060	0.724
11	0.648	0.004	0.161	0.003	0.042	0.724
12	0.432	0.005	0.263	0.016	0.117	0.631
13	0.452	0.007	0.127	0.008	0.156	0.660
14	0.495	0.006	0.046	0.002	0.033	0.724
15	0.446	0.008	0.127	0.003	0.060	0.724
16	0.574	0.008	0.265	0.011	0.133	0.678
17	0.357	0.006	0.241	0.009	0.077	0.596
18	0.482	0.009	0.080	0.007	0.148	0.706
19	0.492	0.006	0.038	0.002	0.030	0.724
20	0.416	0.006	0.136	0.003	0.066	0.724
256	0.455	0.010	0.190	0.005	0.155	0.724
257	0.497	0.010	0.119	0.007	0.129	0.724
258	0.450	0.013	0.093	0.010	0.118	0.562
259	0.490	0.007	0.083	0.007	0.141	0.724
260	0.541	0.011	0.040	0.004	0.151	0.692
261	0.426	0.016	0.163	0.016	0.189	0.597
262	0.457	0.009	0.058	0.009	0.086	0.602
263	0.556	0.010	0.034	0.003	0.069	0.724
264	0.378	0.015	0.246	0.010	0.194	0.675
265	0.546	0.012	0.189	0.014	0.193	0.696
266	0.455	0.011	0.048	0.007	0.065	0.632
267	0.554	0.007	0.191	0.004	0.094	0.710
268	0.409	0.017	0.351	0.015	0.190	0.659
269	0.540	0.010	0.128	0.007	0.108	0.676
270	0.520	0.013	0.063	0.003	0.074	0.698
271	0.541	0.010	0.079	0.006	0.112	0.669
272	0.373	0.014	0.152	0.011	0.199	0.490
273	0.443	0.012	0.307	0.015	0.188	0.632
274	0.548	0.012	0.097	0.006	0.090	0.724
275	0.520	0.013	0.054	0.002	0.050	0.697
276	0.470	0.013	0.128	0.011	0.188	0.577



ELECTRONICS

Table 15. n261/mid channel, J Patch simulated 4cm² PD at PD_design_Target
(if simulation performed with correct housing material properties) (Δmin) – open

n261, Ant J, Scaled-up Power Density with Sim.power.limit						
Beam ID	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)
0	0.467	0.008	0.098	0.008	0.090	0.708
1	0.444	0.018	0.091	0.007	0.120	0.706
2	0.330	0.008	0.119	0.015	0.161	0.724
3	0.212	0.012	0.096	0.012	0.172	0.652
4	0.152	0.006	0.047	0.003	0.073	0.669
5	0.386	0.018	0.157	0.015	0.154	0.724
6	0.367	0.016	0.065	0.012	0.088	0.684
7	0.371	0.012	0.248	0.027	0.401	0.724
8	0.386	0.030	0.220	0.020	0.274	0.724
9	0.398	0.030	0.234	0.022	0.275	0.724
10	0.163	0.005	0.024	0.006	0.053	0.649
11	0.419	0.031	0.200	0.018	0.253	0.724
12	0.267	0.010	0.168	0.028	0.277	0.553
13	0.230	0.021	0.048	0.007	0.073	0.716
14	0.292	0.012	0.070	0.002	0.049	0.689
15	0.364	0.008	0.128	0.009	0.132	0.724
16	0.441	0.031	0.441	0.027	0.572	0.606
17	0.275	0.008	0.066	0.007	0.150	0.656
18	0.320	0.013	0.039	0.006	0.063	0.668
19	0.396	0.009	0.103	0.006	0.117	0.704
20	0.342	0.008	0.152	0.020	0.253	0.724
256	0.335	0.023	0.301	0.008	0.092	0.705
257	0.359	0.007	0.195	0.007	0.049	0.648
258	0.407	0.010	0.118	0.010	0.054	0.715
259	0.370	0.012	0.056	0.009	0.034	0.684
260	0.261	0.013	0.067	0.017	0.059	0.687
261	0.377	0.014	0.088	0.015	0.038	0.685
262	0.372	0.005	0.050	0.003	0.028	0.720
263	0.264	0.010	0.291	0.004	0.066	0.706
264	0.464	0.014	0.171	0.019	0.077	0.706
265	0.334	0.011	0.042	0.018	0.038	0.694
266	0.299	0.008	0.211	0.006	0.060	0.691
267	0.385	0.011	0.248	0.014	0.065	0.703
268	0.429	0.014	0.111	0.013	0.058	0.715
269	0.389	0.017	0.070	0.010	0.038	0.699
270	0.377	0.007	0.041	0.006	0.051	0.724
271	0.348	0.013	0.207	0.007	0.071	0.695
272	0.219	0.017	0.290	0.009	0.077	0.644
273	0.420	0.015	0.109	0.012	0.056	0.713
274	0.382	0.008	0.066	0.005	0.033	0.704
275	0.396	0.007	0.100	0.007	0.058	0.720
276	0.349	0.022	0.252	0.007	0.094	0.688

The test results in the table below shows that the all measured 4cm² PD values are less than PD_design_target of 0.724 mW/cm², thus, the non-selected surfaces have no influence on the determined and input.power.limit in Section 7.

**Table 16. 4cm² PD of the selected beams measured on the corresponding surfaces
that are not selected for Δmin determination – closed**

Band	Antenna	Beam ID	Surface	Tested Power Level (dBm)	input.power.limit (dBm)	Meas. 4cm2 PD (mW/cm2)
n261	J	16	Front	8.2	7.7	0.03
		16	Right	8.2	7.7	0.25
		16	Top	8.2	7.7	0.43
n260		276	Front	7.8	6.9	0.06
		268	Top	8.2	7.2	0.54
n258		16	Front	8.1	7.7	0.03
		0	Right	15.4	15.0	0.28
		16	Top	8.1	7.7	0.62

**Table 17. 4cm² PD of the selected beams measured on the corresponding surfaces
that are not selected for Δmin determination - open**

Band	Antenna	Beam ID	Surface	Tested Power Level (dBm)	input.power.limit (dBm)	Meas. 4cm2 PD (mW/cm2)
n261	J	16	Front	8.2	7.8	0.08
		0	Right	12.8	12.3	0.21
		16	Top	8.2	7.8	0.43
n260		272	Front	7.2	6.2	0.22
		268	Top	8.2	7.3	0.51
n258		20	Front	8.2	7.7	0.20
		19	Right	7.4	7.0	0.21
		5	Top	12.5	12.0	0.42

7 PD Char

7.1 Single Beams

To determine the input power limit at each antenna port, simulation was performed at low, mid, and high channel for each mmW band supported, with 6 dBm input power per active port for n258 band and 6 dBm input power per active port for n260 band and 6 dBm input power per active port for n261 band:

1. Obtained PDsurface value (the worst PD among all identified surfaces of the DUT) at all three channels for all single beams specified in the codebook.
2. Derived a scaling factor at low, mid and high channel, $s(i)_{low_or_mid_or_high}$, by:

$$s(i)_{low_or_mid_or_high} = \frac{PD\ design\ target}{sim.PD_{surface}(i)}, \quad i \in single\ beams \quad (1)$$

3. Determined the worst-case scaling factor, $s(i)$, among low, mid and high channels:

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, \quad i \in single\ beams \quad (2)$$

For Smart Transmit Plus, “Qualcomm IPLG” prints the $\llbracket sim.power \rrbracket_limit$ for all three channels, denoted as $\llbracket sim.power \rrbracket_limit_L$, $\llbracket sim.power \rrbracket_limit_M$, and $\llbracket sim.power \rrbracket_limit_H$. The $\llbracket sim.power \rrbracket_limit$ is determined by:

$$sim.power_{limit} = \min\{sim.power_{limit_L}, sim.power_{limit_M}, sim.power_{limit_H}\}$$

7.2 Beam Pairs

Per the manufacturer, the relative phase between beam pair is not controlled in the chipset design and could vary from run to run. Therefore, for each beam pair, based on the simulation results, the worst-case scaling factor was determined mathematically to ensure the compliance. The worst-case PD for MIMO operations was found by sweeping the relative phase for all possible angles to ensure a conservative assessment. The power density simulation report contains the worst-case power density for each surface after sweeping through all relative phases between beams.

Once the power density was determined for the worst-case $\emptyset$, the scaling factor was obtained by the below equation for low, mid and high channels:

$$s(i)_{low_or_mid_or_high} = \frac{PD\ design\ target}{total\ PD\ (\emptyset(i)_{worstcase})}, i \in beam\ pairs \quad (3)$$

The total PD ($\emptyset_{worstcase}$) varies with channel and beam pair, the lowest scaling factor among all three channels, $s(i)$, is determined for the beam pair i:

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, i \in beam\ pairs \quad (4)$$

7.3 Input.Power.Limit Calculations

The PD Char specifies the limit of input power at antenna port that corresponds to PD_design_target for all the beams.

Ideally, if there is no uncertainty associated with hardware design, the input power limit, denoted as *input. power. (i)*, for beam i can be obtained after accounting for the housing influence (Δ_{min}) given by:

For n258, n260 and n261

$$input.power.limit(i) = 18\ dBm + 10 * \log(s(i)) + \Delta_{min}, i \in all\ beams \quad (5)$$

where 6 dBm is the input power used in simulation for n258,n261 and n260, respectively; $s(i)$

is the scaling factor obtained from Eq. (2) or Eq. (4) for beam i ; $\Delta_{\min}$ is the worst-case housing influence factor for beam i .

If simulation overestimates the housing influence, then $\Delta_{\min}$ (= simulated PD - measured PD) is negative, which means that the measured PD would be higher than the simulated PD. The input power to antenna elements determined via simulation must be decreased for compliance.

Similarly, if simulation underestimates the loss, then $\Delta_{\min}$ is positive (measured PD would be lower than the simulated value). Input power to antenna elements determined via simulation can be increased and still be PD compliant.

In reality the hardware design has uncertainty which must be properly considered. The device design related uncertainty is embedded in the process of $\Delta_{\min}$ determination.

Since the device uncertainty is already accounted for in PD_design_target, it needs to be removed to avoid double counting this uncertainty.

Thus, Equation 5 is modified to:

If $-\text{TxAGC uncertainty} < \Delta_{\min} < \text{TxAGC uncertainty}$,

$$\text{input.power.limit}(i) = 18 \text{ dBm} + 10 * \log(s(i)) + \Delta_{\min}, i \in \text{all beams} \quad (6)$$

else if $\Delta_{\min} < -\text{TxAGC uncertainty}$,

$$\text{input.power.limit}(i) = 18 \text{ dBm} + 10 * \log(s(i)) + (\Delta_{\min} + \text{TxAGC uncertainty}), i \in \text{all beams} \quad (7)$$

else if $\Delta_{\min} > \text{TxAGC uncertainty}$,

$$\text{input.power.limit}(i) = 18 \text{ dBm} + 10 * \log(s(i)) + (\Delta_{\min} - \text{TxAGC uncertainty}), i \in \text{all beams} \quad (8)$$

Following above logic, the input.power.limit for this DUT can be calculated using Equations (6), (7) and (8), i.e.,

Table 18. *input. power. limit* Calculation – closed

Band	Antenna	Delta Min (dB)	TxAGC Uncertainty (dB)	input.power.limit (dBm)	Notes
n258	J	1.52	0.47	$\text{input.power.limit}(i) = \text{sim.power_limit} + 1.52 - 0.47$	Using eq8
n261	J	2.79	0.47	$\text{input.power.limit}(i) = \text{sim.power_limit} + 2.79 - 0.47$	Using eq8
n260	J	1.03	0.47	$\text{input.power.limit}(i) = \text{sim.power_limit} + 1.03 - 0.47$	Using eq8

Table 19. *input. power. limit* Calculation – open

Band	Antenna	Delta Min (dB)	TxAGC Uncertainty (dB)	input.power.limit (dBm)	Notes
n258	J	1.35	0.47	$\text{input.power.limit}(i) = \text{sim.power_limit} + 1.35 - 0.47$	Using eq8
n261	J	2.58	0.47	$\text{input.power.limit}(i) = \text{sim.power_limit} + 2.58 - 0.47$	Using eq8
n260	J	1.15	0.47	$\text{input.power.limit}(i) = \text{sim.power_limit} + 1.15 - 0.47$	Using eq8

Table 20. Permanent backoff

Band	Antenna	Backoff (dB)
NR n258	J	0.50
NR n260	J	1.00
NR n261	J	0.50

Table 21. Additional Per-beam Permanent backoff

Band	Antenna	Beam	Backoff (dB)
NR n260	J	11	0.5

Table 21. 5G NR n258 J Patch *input.power.limit*

Band	Beam ID 1	Beam ID 2	input.power.limit
n258	0		15.0
n258	1		13.6
n258	2		13.6
n258	3		11.5
n258	4		12.5
n258	5		12.0
n258	6		9.7
n258	7		9.8
n258	8		11.3
n258	9		10.5
n258	10		9.1
n258	11		11.3
n258	12		5.6
n258	13		7.4
n258	14		4.3
n258	15		7.9
n258	16		6.5
n258	17		6.8
n258	18		6.4
n258	19		7.0
n258	20		7.7
n258		256	11.5
n258		257	12.8
n258		258	13.0
n258		259	12.1
n258		260	12.4
n258		261	8.9
n258		262	8.0
n258		263	9.0
n258		264	7.9
n258		265	8.2
n258		266	8.2
n258		267	7.9
n258		268	3.7
n258		269	4.1
n258		270	4.8
n258		271	4.9
n258		272	4.4
n258		273	3.6
n258		274	4.2
n258		275	5.2
n258		276	4.2
n258	0	256	9.6
n258	1	257	9.3
n258	2	258	9.9
n258	3	259	7.9
n258	4	260	9.0
n258	5	261	5.4
n258	6	262	4.8
n258	7	263	5.9
n258	8	264	5.9
n258	9	265	5.6
n258	10	266	5.1
n258	11	267	5.9
n258	12	268	-0.4
n258	13	269	1.0
n258	14	270	1.2
n258	15	271	2.6
n258	16	272	1.7
n258	17	273	-0.3
n258	18	274	1.8
n258	19	275	2.6
n258	20	276	2.0

Table 22. 5G NR n260 J Patch *input. power. limit*

Band	Beam ID 1	Beam ID 2	input.power.limit
n260	0		12.2
n260	1		11.5
n260	2		11.8
n260	3		12.2
n260	4		12.9
n260	5		9.5
n260	6		8.8
n260	7		9.7
n260	8		10.3
n260	9		9.4
n260	10		9.1
n260	11		8.2
n260	12		6.3
n260	13		5.5
n260	14		5.0
n260	15		5.3
n260	16		6.8
n260	17		5.3
n260	18		5.8
n260	19		4.7
n260	20		5.3
n260		256	14.2
n260		257	12.6
n260		258	12.2
n260		259	12.5
n260		260	12.7
n260		261	10.2
n260		262	8.7
n260		263	8.6
n260		264	11.1
n260		265	10.2
n260		266	8.7
n260		267	9.8
n260		268	7.2
n260		269	6.3
n260		270	5.0
n260		271	5.8
n260		272	6.2
n260		273	6.7
n260		274	6.3
n260		275	5.0
n260		276	6.3
n260	0	256	9.3
n260	1	257	8.7
n260	2	258	8.8
n260	3	259	8.7
n260	4	260	9.2
n260	5	261	6.8
n260	6	262	5.6
n260	7	263	5.3
n260	8	264	7.9
n260	9	265	6.4
n260	10	266	6.1
n260	11	267	6.0
n260	12	268	3.2
n260	13	269	2.5
n260	14	270	1.8
n260	15	271	1.6
n260	16	272	3.0
n260	17	273	2.9
n260	18	274	2.5
n260	19	275	1.5
n260	20	276	2.5

Table 23. 5G NR n261 J Patch *input. power. limit*

Band	Beam ID 1	Beam ID 2	input.power.limit
n261	0		11.7
n261	1		11.8
n261	2		11.7
n261	3		12.2
n261	4		10.9
n261	5		10.6
n261	6		8.5
n261	7		10.9
n261	8		11.1
n261	9		11.4
n261	10		6.9
n261	11		10.7
n261	12		7.7
n261	13		4.6
n261	14		3.8
n261	15		5.9
n261	16		7.7
n261	17		5.6
n261	18		3.7
n261	19		5.2
n261	20		6.5
n261		256	11.8
n261		257	11.6
n261		258	11.2
n261		259	11.1
n261		260	12.4
n261		261	8.5
n261		262	6.7
n261		263	7.8
n261		264	9.7
n261		265	8.6
n261		266	8.2
n261		267	8.7
n261		268	4.8
n261		269	4.4
n261		270	4.0
n261		271	4.0
n261		272	4.1
n261		273	4.9
n261		274	4.1
n261		275	3.9
n261		276	4.6
n261	0	256	8.4
n261	1	257	8.3
n261	2	258	8.0
n261	3	259	8.2
n261	4	260	8.5
n261	5	261	6.0
n261	6	262	4.0
n261	7	263	6.2
n261	8	264	6.7
n261	9	265	6.8
n261	10	266	5.9
n261	11	267	5.6
n261	12	268	2.3
n261	13	269	1.3
n261	14	270	0.6
n261	15	271	1.3
n261	16	272	1.6
n261	17	273	1.8
n261	18	274	0.7
n261	19	275	1.2
n261	20	276	1.6