



HEARING AID COMPATIBILITY RF EMISSIONS TEST REPORT

FCC ID : A4RG025E
Equipment : Phone
Model Name : G025E
M-Rating : M3
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR §20.19
ANSI C63.19-2011

The product was received on May 05, 2020 and testing was started from Jun. 08, 2020 and completed on Jun. 09, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. General Information	4
2. Testing Location.....	5
3. Applied Standards	5
4. RF Audio Interference Level.....	5
5. Air Interface and Operating Mode.....	6
6. Measurement System Specification	7
6.1 E-Field Probe System.....	7
6.2 Data Storage and Evaluation.....	8
7. RF Emissions Test Procedure.....	9
8. Test Equipment List	12
9. Measurement System Validation	13
10. Modulation Interference Factor.....	14
11. Low-power Exemption.....	16
12. Conducted RF Output Power (Unit: dBm).....	19
13. HAC RF Emission Test Results.....	23
14. Uncertainty Assessment	25
15. References.....	27

Appendix A. Plots of System Performance Check

Appendix B. Plots of RF Emission Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos

Appendix E. Manufacturer MIF factor

Appendix F. UID specifications for HAC RFE



History of this test report

Report No.	Version	Description	Issued Date
HA022521-02A	Rev. 01	Initial issue of report	Jun. 29, 2020

**1. General Information**

Product Feature & Specification	
Applicant Name	Google LLC
Equipment Name	Phone
Model Name	G025E
FCC ID	A4RG025E
Date Tested	2020/6/8 ~ 2020/6/9
Frequency Band	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK

Reviewed by: Jason Wang**Report Producer: Daisy Peng**



2. Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.: SAR04-HY

3. Applied Standards

- FCC CFR47 Part 20.19
- ANSI C63.19-2011
- FCC KDB 285076 D01 HAC Guidance v05r01
- FCC KDB 285076 D03 HAC FAQ v01r01

4. RF Audio Interference Level

FCC wireless hearing aid compatibility rules ensure that consumers with hearing loss are able to access wireless communications services through a wide selection of handsets without experiencing disabling radio frequency (RF) interference or other technical obstacles.

To define and measure the hearing aid compatibility of handsets, in CFR47 part 20.19 ANSI C63.19 is referenced. A handset is considered hearing aid-compatible for acoustic coupling if it meets a rating of at least M3 under ANSI C63.19, and A handset is considered hearing aid compatible for inductive coupling if it meets a rating of at least T3. According to ANSI C63.19 2011 version, for acoustic coupling, the RF electric field emissions of wireless communication devices should be measured and rated according to the emission level as below.

Emission Categories	E-field emissions	
	<960Mhz	>960Mhz
M1	50 to 55 dB (V/m)	40 to 45 dB (V/m)
M2	45 to 50 dB (V/m)	35 to 40 dB (V/m)
M3	40 to 45 dB (V/m)	30 to 35 dB (V/m)
M4	<40 dB (V/m)	<30 dB (V/m)

Table 5.1 Telephone near-field categories in linear units

**5. Air Interface and Operating Mode**

Air Interface	Band MHz	Type	C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
GSM	GSM850	VO	Yes	WLAN, BT	CMRS Voice	No
	GSM1900			WLAN, BT		No
	EDGE850	VD	Yes	WLAN, BT	Google Duo	No
	EDGE1900			WLAN, BT		
WCDMA	Band II	VO	No ⁽¹⁾	WLAN, BT	CMRS Voice	No
	Band IV			WLAN, BT		No
	Band V			WLAN, BT		No
	HSPA	VD	No ⁽¹⁾	WLAN, BT	Google Duo	No
CDMA	BC0	VO	Yes	WLAN, BT	CMRS Voice	No
	BC1			WLAN, BT		No
	BC10			WLAN, BT		No
	EVDO	VD	No ⁽¹⁾	WLAN, BT	Google Duo	No
LTE (FDD)	Band 2	VD	No ⁽¹⁾	5G NR, WLAN, BT	VoLTE / Google Duo	No
	Band 4			5G NR, WLAN, BT		No
	Band 5			5G NR, WLAN, BT		No
	Band 7			5G NR, WLAN, BT		No
	Band 12			5G NR, WLAN, BT		No
	Band 13			5G NR, WLAN, BT		No
	Band 14			5G NR, WLAN, BT		No
	Band 17			5G NR, WLAN, BT		No
	Band 25			5G NR, WLAN, BT		No
	Band 26			5G NR, WLAN, BT		No
	Band 30			5G NR, WLAN, BT		No
	Band 66			5G NR, WLAN, BT		No
	Band 71			5G NR, WLAN, BT		No
LTE (TDD)	Band 38	VD	Yes	5G NR, WLAN, BT	VoLTE / Google Duo	No
	Band 41			5G NR, WLAN, BT		No
	Band 48			5G NR, WLAN, BT		No
5G NR	n2	VD	No ⁽¹⁾	LTE, WLAN, BT	Google Duo	No
	n5			LTE, WLAN, BT		No
	n12			LTE, WLAN, BT		No
	n25			LTE, WLAN, BT		No
	n41			LTE, WLAN, BT		No
	n66			LTE, WLAN, BT		No
	n71			LTE, WLAN, BT		No
Wi-Fi	2450	VD	No ^(1,2)	GSM,WCDMA,CDMA,LTE,5G NR,5G WLAN, BT	VoWiFi / Google Duo	No
	5200	VD	No ⁽¹⁾	GSM,WCDMA,CDMA,LTE,5G NR,2.4G WLAN, BT		No
	5300			GSM,WCDMA,CDMA,LTE,5G NR,2.4G WLAN, BT		No
	5500			GSM,WCDMA,CDMA,LTE,5G NR,2.4G WLAN, BT		No
	5800			GSM,WCDMA,CDMA,LTE,5G NR,2.4G WLAN, BT		No
BT	2450	DT	No	GSM,WCDMA,CDMA,LTE,5G NR,5G WLAN	NA	No

Type Transport:

VO= Voice only

DT= Digital Transport only (no voice)

VD= CMRS and IP Voice Service over Digital Transport

Remark:

- The air interface is exempted from testing by low power exemption that its average antenna input power plus its MIF is ≤ 17 dBm, and is rated as M4.
- According to ANSI C63.19 2011 -version, for the 2.4GHz WLAN air interface technology of a device is exempt from testing whose peak antenna input power, WLAN averaged over intervals ≤ 50 μ s, is ≤ 23 dBm. An RF air interface technology that is exempted from testing shall be rated as M4.
- The device have similar frequency in some LTE bands: LTE 38/41, since the supported frequency spans for the smaller LTE bands are completely cover by the larger LTE bands, therefore, only larger LTE bands were required to be tested for hearing-aid compliance
- Because features of Google Duo allow the option of voice-only communications, Duo has been tested for HAC/T-Coil compatibility to ensure the best user experience

6. Measurement System Specification

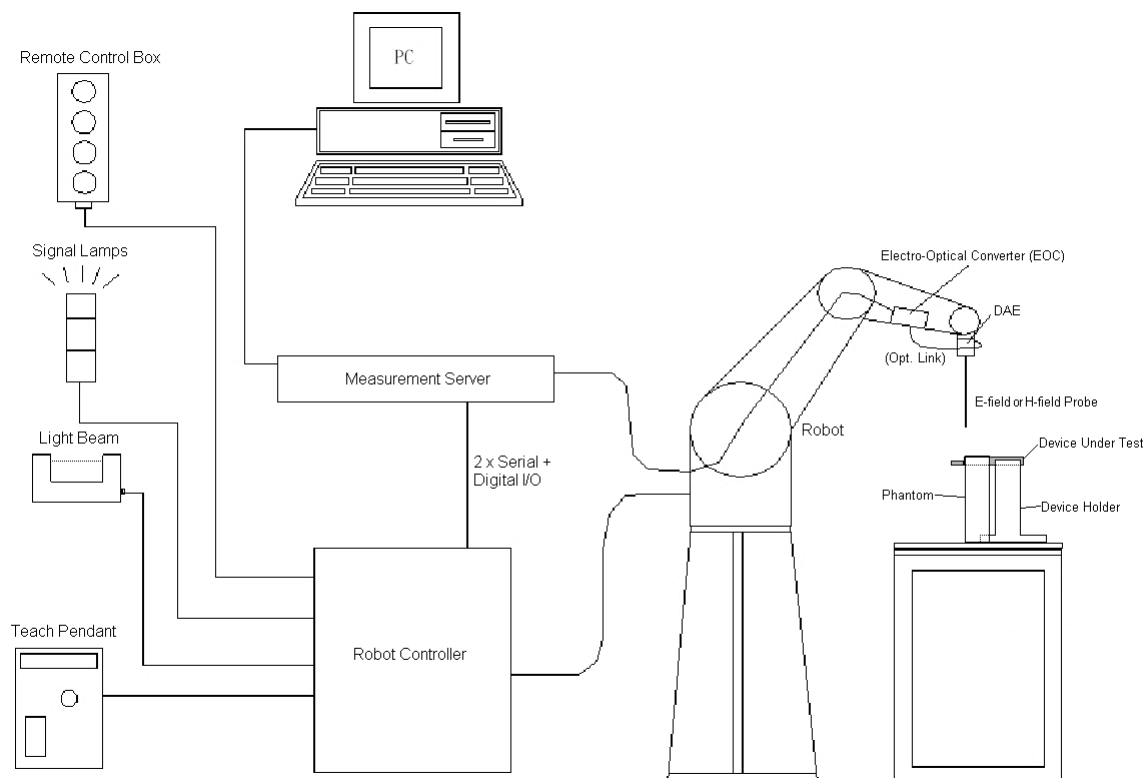


Fig 5.1 System Configurations

6.1 E-Field Probe System

E-Field Probe Specification

<ER3DV6>

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k=2$)
Frequency	100 MHz to 6 GHz; Linearity: ± 2.0 dB (100 MHz to 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to 1000 V/m (M3 or better device readings fall well below diode compression point)
Linearity	± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm



Fig 5.2 Photo of E-field Probe

Probe Tip Description:

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

6.2 Data Storage and Evaluation

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, and device frequency and modulation data) in measurement files.

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.



7. RF Emissions Test Procedure

Referenced from ANSI C63.19 -2011 section 5.5.1

- a. Confirm the proper operation of the field probe, probe measurement system, and other instrumentation and the positioning system.
- b. Position the WD in its intended test position.
- c. Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.
- d. The center sub-grid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, refer to illustrated in Figure 8.2. If the field alignment method is used, align the probe for maximum field reception.
- e. Record the reading at the output of the measurement system.
- f. Scan the entire 50 mm by 50 mm region in equality spaced increments and record the reading at each measurement point, The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- g. Identify the five contiguous sub-grids around the center sub-grid whose maximum reading is the lowest of all available choices. This eliminates the three sub-grids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
- h. Identify the maximum reading within the non-excluded sub-grids identified in step g).
- i. Indirect measurement method
- j. The RF audio interference level in dB (V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB (V/m)
- k. Compare this RF audio interference level with the categories in ANSI C63.19-2011 clause 8 and record the resulting WD category rating.
- l. For the T-Coil perpendicular measurement location is ≥ 5.0 mm from the center of the acoustic output, then two different 50 mm by 50 mm areas may need to be scanned, the first for the microphone mode assessment and the second for the T-Coil assessment.
- m. The second for the T-Coil assessment, with the grid shifted so that it is centered on the perpendicular measurement point. Record the WD category rating.

Test Instructions

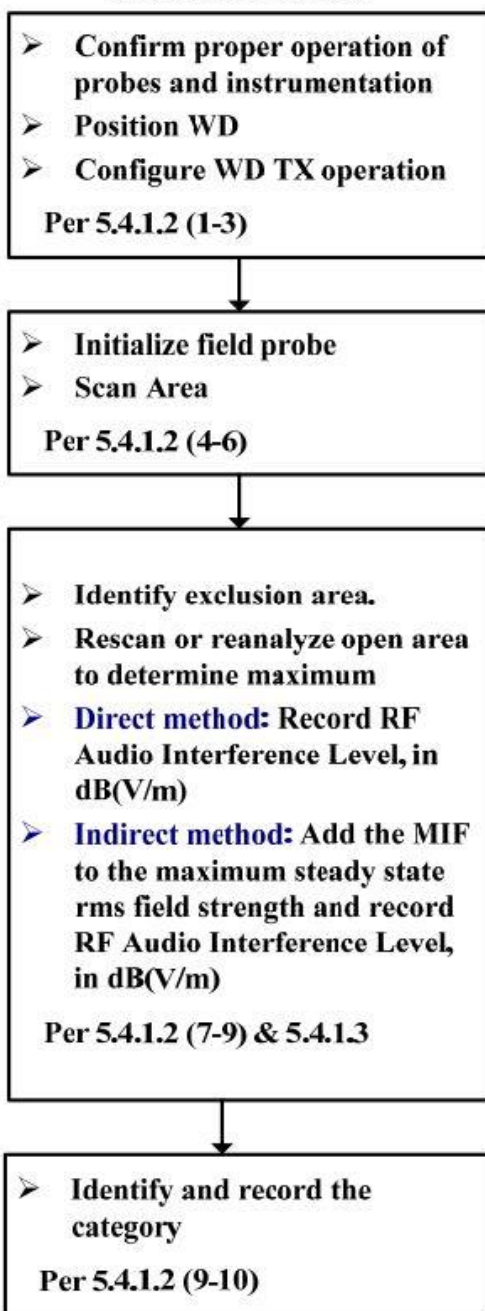


Figure 8.1 RF Emissions Flow Chart

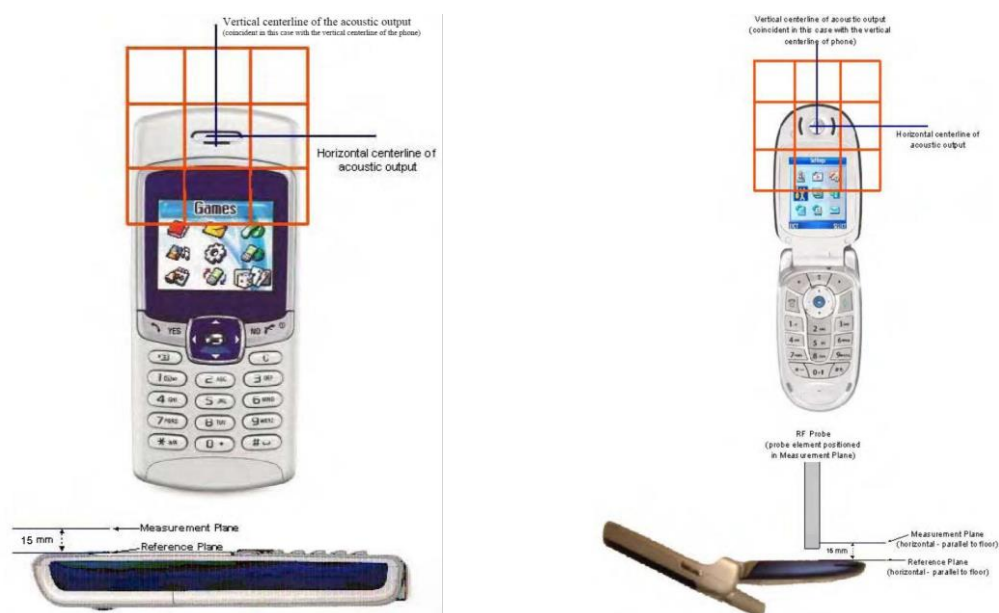


Fig 8.2 EUT reference and plane for HAC RF emission measurements

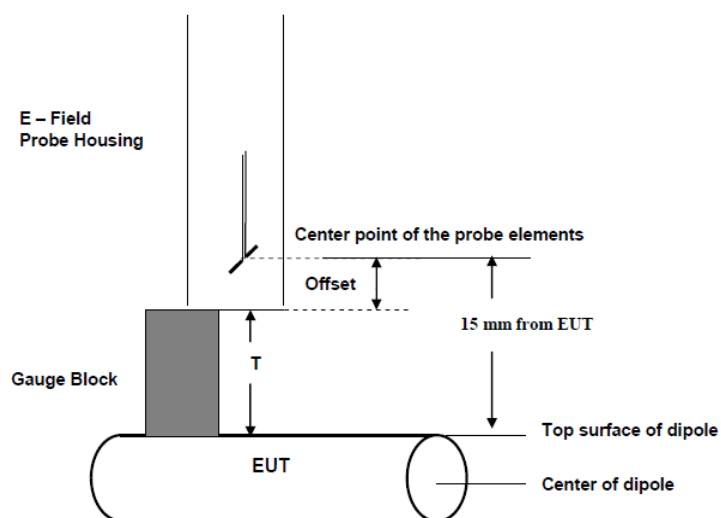


Fig. 8.3 Gauge block with E-field probe



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz Calibration Dipole	CD835V3	1045	Sep. 19, 2018	Sep. 17, 2020
SPEAG	1880MHz Calibration Dipole	CD1880V3	1038	Sep. 19, 2018	Sep. 17, 2020
SPEAG	2450MHz Calibration Dipole	CD2450V3	1186	Jan. 30, 2019	Jan. 28, 2021
SPEAG	2600Mhz Calibration Dipole	CD2600V3	1010	Mar. 14, 2019	Mar. 12, 2021
SPEAG	3500Mhz Calibration Dipole	CD3500V3	1009	Feb. 18, 2019	Feb. 16, 2021
SPEAG	Isotropic E-Field Probe	EF3DV3	4047	Jan. 24, 2020	Jan. 23, 2021
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 17, 2019	Sep. 16, 2020
Testo	Hygro meter	608-H1	45196600	Nov. 18, 2019	Nov. 17, 2020
R&S	Base Station	CMW500	149637	Sep. 03, 2019	Sep. 02, 2020
R&S	Base Station	CMU200	117591	Dec. 09, 2019	Dec. 08, 2020
SPEAG	Test Arch Phantom	N/A	N/A	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Anritsu	Power Meter	ML2495A	1036004	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Sensor	MA2411B	1027253	Aug. 08, 2019	Aug. 07, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	NCR	NCR
Woken	Attenuator	WK0602-XX	N/A	NCR	NCR
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2019	Aug. 26, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 27, 2019	Jun. 26, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2019	Oct. 15, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 12, 2019	Aug. 11, 2020

Note:

1. NCR: "No-Calibration Required"
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole CD835V3, SN: 1045, CD1880V3, SN: 1038, CD2450V3, SN: 1186, CD2600V3, SN:1010 and CD3500V3, SN:1009, can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

9. Measurement System Validation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the test Arch and a corresponding distance holder.

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal HAC measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

<Test Setup>

1. In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator.
2. The center point of the probe element(s) is 15mm from the closest surface of the dipole elements.
3. The calibrated dipole must be placed beneath the arch phantom. The equipment setup is shown below:
4. The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.

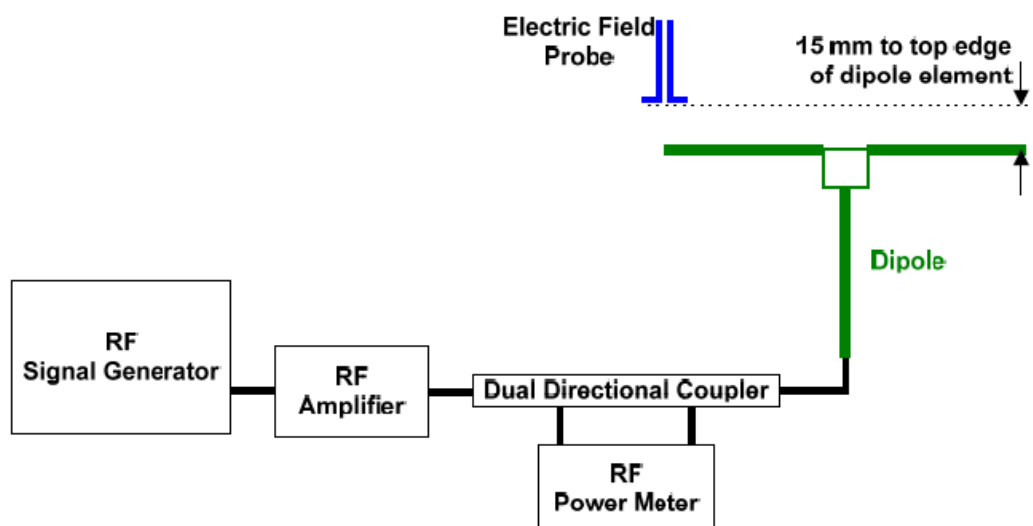


Fig. 7.1 Setup Diagram

<Validation Results>

Comparing to the original E-field value provided by SPEAG, the verification data should be within its specification of 25 %. Table 6.1 shows the target value and measured value. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to appendix A of this report.

Deviation = ((Average E-field Value) - (Target value)) / (Target value) * 100%

Frequency (MHz)	Input Power (dBm)	Target Value (V/m)	E-Field above high end (V/m)	E-Field above low end (V/m)	Average Value (V/m)	Deviation (%)	Date
835	20	108.8	116.8	117.6	117.2	7.72	Jun 08, 2020
1880	20	89.5	90.74	91.74	91.24	1.94	Jun 08, 2020
2600	20	84.5	86.12	87.42	86.77	2.69	Jun 09, 2020
3500	20	84.6	86.86	85.80	86.33	2.04	Jun 09, 2020



10. Modulation Interference Factor

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF). For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF.

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics. Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63.19-2011.

ER3D, EF3D and EU2D E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the indirect measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading. Probe Modulation Response (PMR) calibration linearizes the probe response over its dynamic range for specific modulations which are characterized by their UID and result in an uncertainty specified in the probe calibration certificate. The MIF is characteristic for a given waveform envelope and can be used as a constant conversion factor if the probe has been PMR calibrated.

The evaluation method for the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty. It may alternatively be determined through analysis and simulation, because it is constant and characteristic for a communication signal. DASY52 uses well-defined signals for PMR calibration. The MIF of these signals has been determined by simulation and it is automatically applied.

The MIF measurement uncertainty is estimated as follows, declared by HAC equipment provider SPEAG, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:

1. 0.2 dB for MIF: -7 to +5 dB
2. 0.5 dB for MIF: -13 to +11 dB
3. 1 dB for MIF: > -20 dB

MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst values for all air interface are listed below to determine the Low-power Exemption.

UID	Communication System Name	MIF(dB)
10021	GSM-FDD(TDMA,GMSK)	3.63
10025	EDGE-FDD (TDMA, 8PSK, TN 0)	3.75
10460	UMTS-FDD(WCDMA, AMR)	-25.43
10225	UMTS-FDD (HSPA+)	-20.39
10081	CDMA2000 (1xRTT, RC3)	-19.71
10295	CDMA2000 (1xRTT, RC1 SO3, 1/8th Rate 25 fr.)	3.26
10403	CDMA2000 (1xEV-DO, Rev. 0)	-17.67
10170	LTE-FDD(SC-FDMA,1RB,20MHz,16-QAM)	-9.76
10173	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	-1.44
10769	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	-12.08
10061	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
10077	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	0.12
10427	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	-13.44
10069	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10616	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57



11. Low-power Exemption

<Max Tune-up Limit>

WWAN

Frequency Band		Average Power (dBm)				
Antenna		Ant 0	Ant 1	Ant 2	Ant 5	Ant 7
GSM	GSM850	33.50	33.50			
	EDGE850	27.50	27.50			
	GSM1900	30.00		30.50		
	EDGE1900	26.00		26.50		
WCDMA	Band V	25.00	24.30			
	Band IV	25.70		25.70		
	Band II	25.70		25.70		
	HSPA	24.70	23.30	24.70		
CDMA	BC0	25.50	24.60			
	BC1	25.50		25.50		
	BC10	25.50	24.70			
	1xEVDO	25.50	24.70	25.50		
FDD LTE	Band 2	25.70		25.70		
	Band 4	25.70		25.70		
	Band 5	25.70	25.00			
	Band 7	25.70		25.70		
	Band 12	25.70	25.70			
	Band 13	25.20	25.20			
	Band 14	25.70	25.70			
	Band 17	25.70	25.70			
	Band 25	25.70		25.70		
	Band 26	25.70	25.00			
	Band 30	23.70		23.70		
	Band 66	25.70		25.70		
TDD LTE	Band 71	25.70	25.70			
	Band 38	25.70		25.70		
	Band 41 TDD-PC3	25.70		25.70		
	Band41 TDD-PC2	27.50		27.00		
5G NR FDD	Band 48			22.60		24.20
	n2	25.70		25.70		
	n5	25.00	25.00			
	n12	24.70	24.70			
	n25	25.70		25.70		
	n66	25.70		25.70		
5G NR TDD	n71	25.70	25.70			
	n41 TDD-PC3	25.70		25.70	25.70	
	n41 TDD-PC2				27.50	

WLAN

Antenna		Ant 4	Ant 3	Ant 4+3
2.4GHz WLAN	802.11b	12.00	15.00	17.5
	802.11g	12.00	15.00	17.5
	802.11n-HT20	12.00	15.00	17.5
	802.11ac-VHT20	12.00	15.00	17.5
5GHz WLAN	802.11a	14.50	15.50	16.8
	802.11n-HT20	14.50	15.50	16.8
	802.11n-HT40	14.50	15.50	16.8
	802.11ac-VHT20	14.50	15.50	16.8
	802.11ac-VHT40	14.50	15.50	16.8
	802.11ac-VHT80	14.50	13.00	16.6

**<Low Power Exemption>****General Note:**

1. EDGE data modes is not necessary due the GSM Voice mode is the worst case.
2. According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes.
3. According to ANSI C63.19 2011 -version, for the 2.4GHz WLAN air interface technology of a device is exempt from testing whose peak antenna input power, WLAN averaged over intervals ≤ 50 μ s, is ≤ 23 dBm. An RF air interface technology that is exempted from testing shall be rated as M4.
4. HAC RF rating is M4 for the air interface which meets the low power exemption.

WWAN Ant. 0				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
GSM850	33.50	3.63	37.13	Yes
EDGE850	27.50	3.75	31.25	Yes ⁽¹⁾
GSM1900	30.00	3.63	33.63	Yes
EDGE1900	26.00	3.75	29.75	Yes ⁽¹⁾
WCDMA	25.70	-25.43	0.27	No
WCDMA - HSPA	25.70	-20.39	5.31	No
CDMA Full Frame Rate	25.50	-19.71	5.79	No
CDMA 1/8th Frame Rate	25.50	3.26	28.76	Yes
CDMA - EVDO	25.50	-17.67	7.83	No
LTE - FDD	25.70	-9.76	15.94	No
LTE – TDD – Band 41 PC3	25.70	-1.44	24.26	Yes
LTE – TDD – Band 41 PC2	27.50	-1.44	26.06	Yes
5G FR1 - FDD	25.70	-12.08	13.62	No
5G NR - TDD - PC3	25.70	-12.08	13.62	No

WWAN Ant. 1				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
GSM850	33.50	3.63	37.13	Yes
EDGE850	27.50	3.75	31.25	Yes ⁽¹⁾
WCDMA	24.30	-25.43	-1.13	No
WCDMA - HSPA	24.30	-20.39	3.91	No
CDMA Full Frame Rate	24.70	-19.71	4.99	No
CDMA 1/8th Frame Rate	24.70	3.26	27.96	Yes
CDMA - EVDO	24.70	-17.67	7.03	No
LTE - FDD	25.70	-9.76	15.94	No
5G FR1 - FDD	25.70	-12.08	13.62	No

WWAN Ant. 2				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
GSM1900	30.50	3.63	34.13	Yes
EDGE1900	26.50	3.75	30.25	Yes ⁽¹⁾
WCDMA	25.70	-25.43	0.27	No
WCDMA - HSPA	25.70	-20.39	5.31	No
CDMA Full Frame Rate	25.50	-19.71	5.79	No
CDMA 1/8th Frame Rate	25.50	3.26	28.76	Yes
CDMA - EVDO	25.50	-17.67	7.83	No
LTE - FDD	25.70	-9.76	15.94	No
LTE – TDD – Band 41 PC3	25.70	-1.44	24.26	Yes
LTE – TDD – Band 41 PC2	27.00	-1.44	25.56	Yes
LTE – TDD – Band 48	22.60	-1.44	21.16	Yes
5G FR1 - FDD	25.70	-12.08	13.62	No
5G NR - TDD - PC3	25.70	-12.08	13.62	No

WWAN Ant. 5				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
5G NR – n41 TDD - PC3	25.70	-12.08	13.62	No
5G NR – n41 TDD - PC2	27.50	-12.08	15.42	No

WWAN Ant.7				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
LTE – TDD – Band 48	24.20	-1.44	22.76	Yes

12. Conducted RF Output Power (Unit: dBm)

GSM

Ant 0

GSM850	Burst Average Power (dBm)		
TX Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GSM 1 Tx slot	31.85	32.14	31.81

Ant 1

GSM850	Burst Average Power (dBm)		
TX Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GSM 1 Tx slot	32.24	32.53	32.22

Ant 2

GSM1900	Burst Average Power (dBm)		
TX Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM 1 Tx slot	28.70	28.96	28.93

Ant 0

GSM1900	Burst Average Power (dBm)		
TX Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM 1 Tx slot	28.90	28.96	28.82

**CDMA****Ant 0**

Band	CDMA BC0		
TX Channel	1013	384	777
Frequency (MHz)	824.7	836.52	848.31
RC1 SO55	24.20	24.27	23.79

Ant 1

Band	CDMA BC0		
TX Channel	1013	384	777
Frequency (MHz)	824.7	836.52	848.31
RC1 SO55	22.66	22.74	22.66

Ant 2

Band	CDMA BC1		
TX Channel	25	600	1175
Frequency (MHz)	1851.25	1880	1908.75
RC1 SO55	24.58	24.63	24.57

Ant 0

Band	CDMA BC1		
TX Channel	25	600	1175
Frequency (MHz)	1851.25	1880	1908.75
RC1 SO55	24.56	24.46	24.21

Ant 0

Band	CDMA BC10		
TX Channel	476	580	684
Frequency (MHz)	817.9	820.5	823.1
RC1 SO55	24.28	24.30	24.31

Ant 1

Band	CDMA BC10		
TX Channel	476	580	684
Frequency (MHz)	817.9	820.5	823.1
RC1 SO55	22.71	22.73	22.74

**TDD LTE Band 41****Ant 0**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	24.60	24.31	24.27	24.72	24.40

Ant 2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	24.74	24.62	24.61	24.74	24.55

TDD LTE Band 41 HPUE**Ant 0**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	26.37	26.10	26.03	26.55	26.26

Ant 2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	25.71	25.63	25.81	25.86	25.68

TDD LTE Band 41**Ant 0**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	24.60	24.31	24.27	24.72	24.40

Ant 2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	24.74	24.62	24.61	24.74	24.55

**TDD LTE Band 48****Ant 2**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				55340	55830	56150	56640
Frequency (MHz)				3560	3609	3641	3690
20	QPSK	1	0	21.63	21.66	21.62	21.59

Ant 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				55340	55830	56150	56640
Frequency (MHz)				3560	3609	3641	3690
20	QPSK	1	0	22.98	23.00	22.98	23.07

**13. HAC RF Emission Test Results**

Plot No.	Air Interface	Modulation / Mode	Channel	Transmit Ant.	Average Antenna Input Power (dBm)	MIF	E-Field (dBV/m)	Margin to FCC M3 limit (dB)	E-Field M Rating
01	GSM850	GSM Voice	128	Ant 0	31.85	3.63	36.48	8.52	M4
02	GSM850	GSM Voice	189	Ant 0	32.14	3.63	36.30	8.70	M4
03	GSM850	GSM Voice	251	Ant 0	31.81	3.63	36.73	8.27	M4
04	GSM850	GSM Voice	128	Ant 1	32.24	3.63	40.91	4.09	M3
05	GSM850	GSM Voice	189	Ant 1	32.53	3.63	41.28	3.72	M3
06	GSM850	GSM Voice	251	Ant 1	32.22	3.63	40.91	4.09	M3
07	GSM1900	GSM Voice	512	Ant 2	28.70	3.63	31.35	3.65	M3
08	GSM1900	GSM Voice	661	Ant 2	28.96	3.63	31.54	3.46	M3
09	GSM1900	GSM Voice	810	Ant 2	28.93	3.63	32.09	2.91	M3
10	GSM1900	GSM Voice	512	Ant 0	28.90	3.63	24.66	10.34	M4
11	GSM1900	GSM Voice	661	Ant 0	28.96	3.63	25.27	9.73	M4
12	GSM1900	GSM Voice	810	Ant 0	28.82	3.63	24.75	10.25	M4
13	CDMA BC0	1xRTT, RC1 SO3, 18th Rate	1013	Ant 0	24.20	3.26	30.11	14.89	M4
14	CDMA BC0	1xRTT, RC1 SO3, 18th Rate	384	Ant 0	24.27	3.26	28.90	16.10	M4
15	CDMA BC0	1xRTT, RC1 SO3, 18th Rate	777	Ant 0	23.79	3.26	29.11	15.89	M4
16	CDMA BC0	1xRTT, RC1 SO3, 18th Rate	1013	Ant 1	22.66	3.26	32.22	12.78	M4
17	CDMA BC0	1xRTT, RC1 SO3, 18th Rate	384	Ant 1	22.74	3.26	31.36	13.64	M4
18	CDMA BC0	1xRTT, RC1 SO3, 18th Rate	777	Ant 1	22.66	3.26	31.64	13.36	M4
19	CDMA BC1	1xRTT, RC1 SO3, 18th Rate	25	Ant 2	24.58	3.26	29.87	5.13	M4
20	CDMA BC1	1xRTT, RC1 SO3, 18th Rate	600	Ant 2	24.63	3.26	27.30	7.70	M4
21	CDMA BC1	1xRTT, RC1 SO3, 18th Rate	1175	Ant 2	24.57	3.26	30.03	4.97	M3
22	CDMA BC1	1xRTT, RC1 SO3, 18th Rate	25	Ant 0	24.56	3.26	25.43	9.57	M4
23	CDMA BC1	1xRTT, RC1 SO3, 18th Rate	600	Ant 0	24.46	3.26	25.92	9.08	M4
24	CDMA BC1	1xRTT, RC1 SO3, 18th Rate	1175	Ant 0	24.21	3.26	22.00	13.00	M4
25	CDMA BC10	1xRTT, RC1 SO3, 18th Rate	476	Ant 0	24.28	3.26	29.78	15.22	M4
26	CDMA BC10	1xRTT, RC1 SO3, 18th Rate	580	Ant 0	24.30	3.26	29.58	15.42	M4
27	CDMA BC10	1xRTT, RC1 SO3, 18th Rate	684	Ant 0	24.31	3.26	29.35	15.65	M4
28	CDMA BC10	1xRTT, RC1 SO3, 18th Rate	476	Ant 1	22.71	3.26	30.90	14.10	M4
29	CDMA BC10	1xRTT, RC1 SO3, 18th Rate	580	Ant 1	22.73	3.26	31.15	13.85	M4
30	CDMA BC10	1xRTT, RC1 SO3, 18th Rate	684	Ant 1	22.74	3.26	31.07	13.93	M4
31	LTE Band 41	20M_QPSK_1_0	39750	Ant 2	24.74	-1.62	21.08	13.92	M4
32	LTE Band 41	20M_QPSK_1_0	40185	Ant 2	24.62	-1.62	21.79	13.21	M4
33	LTE Band 41	20M_QPSK_1_0	40620	Ant 2	24.61	-1.62	22.06	12.94	M4
34	LTE Band 41	20M_QPSK_1_0	41055	Ant 2	24.74	-1.62	20.96	14.04	M4
35	LTE Band 41	20M_QPSK_1_0	41490	Ant 2	24.55	-1.62	20.52	14.48	M4
36	LTE Band 41	20M_QPSK_1_0	39750	Ant 0	24.60	-1.62	20.96	14.04	M4
37	LTE Band 41	20M_QPSK_1_0	40185	Ant 0	24.31	-1.62	20.73	14.27	M4
38	LTE Band 41	20M_QPSK_1_0	40620	Ant 0	24.27	-1.62	22.94	12.06	M4
39	LTE Band 41	20M_QPSK_1_0	41055	Ant 0	24.72	-1.62	23.58	11.42	M4
40	LTE Band 41	20M_QPSK_1_0	41490	Ant 0	24.40	-1.62	24.40	10.60	M4



Plot No.	Air Interface	Modulation / Mode	Channel	Transmit Ant.	Average Antenna Input Power (dBm)	MIF	E-Field (dBV/m)	Margin to FCC M3 limit (dB)	E-Field M Rating
41	LTE Band 41_HPUE	20M_QPSK_1_0	39750	Ant 2	25.71	-1.62	21.15	13.85	M4
42	LTE Band 41_HPUE	20M_QPSK_1_0	40185	Ant 2	25.63	-1.62	21.74	13.26	M4
43	LTE Band 41_HPUE	20M_QPSK_1_0	40620	Ant 2	25.81	-1.62	22.00	13.00	M4
44	LTE Band 41_HPUE	20M_QPSK_1_0	41055	Ant 2	25.86	-1.62	20.44	14.56	M4
45	LTE Band 41_HPUE	20M_QPSK_1_0	41490	Ant 2	25.68	-1.62	20.93	14.07	M4
46	LTE Band 41_HPUE	20M_QPSK_1_0	39750	Ant 0	26.37	-1.62	20.95	14.05	M4
47	LTE Band 41_HPUE	20M_QPSK_1_0	40185	Ant 0	26.10	-1.62	20.69	14.31	M4
48	LTE Band 41_HPUE	20M_QPSK_1_0	40620	Ant 0	26.03	-1.62	22.99	12.01	M4
49	LTE Band 41_HPUE	20M_QPSK_1_0	41055	Ant 0	26.55	-1.62	23.66	11.34	M4
50	LTE Band 41_HPUE	20M_QPSK_1_0	41490	Ant 0	26.26	-1.62	23.90	11.10	M4
51	LTE Band 48	20M_QPSK_1_0	55340	Ant 7	22.98	-1.62	21.48	13.52	M4
52	LTE Band 48	20M_QPSK_1_0	55830	Ant 7	23.00	-1.62	21.04	13.96	M4
53	LTE Band 48	20M_QPSK_1_0	56150	Ant 7	22.98	-1.62	21.98	13.02	M4
54	LTE Band 48	20M_QPSK_1_0	56640	Ant 7	23.07	-1.62	22.54	12.46	M4
55	LTE Band 48	20M_QPSK_1_0	55340	Ant 2	21.63	-1.62	22.65	12.35	M4
56	LTE Band 48	20M_QPSK_1_0	55830	Ant 2	21.66	-1.62	22.36	12.64	M4
57	LTE Band 48	20M_QPSK_1_0	56150	Ant 2	21.62	-1.62	22.51	12.49	M4
58	LTE Band 48	20M_QPSK_1_0	56640	Ant 2	21.59	-1.62	23.45	11.55	M4

Remark:

1. The HAC measurement system applies MIF value onto the measured RMS E-field, which is indirect method in ANSI C63.19 2011 version, and reports the RF audio interference level.
2. Phone Condition: Mute on; Backlight off; Max Volume

Test Engineer : Randy Lin and Carter Jhuang

14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 12.1.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (E)	Standard Uncertainty (E)
Measurement System					
Probe Calibration	5.1	Normal	1	1	± 5.1 %
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %
Sensor Displacement	16.5	Rectangular	$\sqrt{3}$	1	± 9.5 %
Boundary Effects	2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %
Phantom Boundary Effects	7.2	Rectangular	$\sqrt{3}$	1	± 4.1 %
Linearity	4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %
Scaling with PMR Calibration	10.0	Rectangular	$\sqrt{3}$	1	± 5.77 %
System Detection Limit	1.0	Rectangular	$\sqrt{3}$	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	$\sqrt{3}$	1	± 0.5 %
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %
RF Ambient Conditions	3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %
RF Reflections	12.0	Rectangular	$\sqrt{3}$	1	± 6.9 %
Probe Positioner	1.2	Rectangular	$\sqrt{3}$	1	± 0.7 %
Probe Positioning	4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %
Extrap. and Interpolation	1.0	Rectangular	$\sqrt{3}$	1	± 0.6 %
Test Sample Related					
Device Positioning Vertical	4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %
Device Positioning Lateral	1.0	Rectangular	$\sqrt{3}$	1	± 0.6 %
Device Holder and Phantom	2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %
Phantom and Setup Related					
Phantom Thickness	2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %
Combined Standard Uncertainty					± 16.30 %
Coverage Factor for 95 %					K = 2
Expanded Std. Uncertainty on Power					± 32.6 %
Expanded Std. Uncertainty on Field					± 16.3 %

Table 12.1 Uncertainty Budget of HAC free field assessment
Remark:

Worst-Case uncertainty budget for HAC free field assessment according to ANSI C63.19 [1], [2]. The budget is valid for the frequency range 700 MHz - 3 GHz and represents a worst case analysis.



15. References

- [1] ANSI C63.19-2011, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 27 May 2011.
- [2] FCC KDB 285076 D01v05r01, "Equipment Authorization Guidance for Hearing Aid Compatibility", Apr. 2020.
- [3] FCC KDB 285076 D03v01r01, "Hearing aid compatibility frequently asked questions", Apr. 2020.
- [4] SPEAG DASY System Handbook