TECHNICAL INFORMATION

TEST REPORT ON THE PERFORMANCE OF MARINE RADAR

Trade Name : FURUNO
Transceiver Type : RTR-082

Report no.: FLI 12-04-028

Date of issue: April 15, 2004

Furuno Labotech International Co., Ltd.
9-52 Ashihara-cho, Nishinomiya City, Hyogo 662-8580, Japan
Tel: +81-798-63-1094 Fax: +81-798-63-1098

This report shall not be reproduced except in full, without the written approval of Furuno Labotech International Co., Ltd.

All tests were performed in Furuno Labotech International Co., Ltd.
All data herein contained is true and correct to our best knowledge.

All tests were performed and reported by:

Name: Katsumi Imamura

Function: Assistant Chief

Signature:

Verified by:

Name: Sadatomo Kuwahara

Function: Chief Engineer

Signature:

This report has been approved by:

Date: April 15, 2004

Name: Mitsuyoshi Komori

Function: Manager, Technical Section

Signature:

* * * * * * **CONTENTS** * * * * * *

1 General Information 3

2 Identification of Equipment (FCC Rule, 2.925) 9

3 Test data 10

3.1 RF Power Output (FCC Rule, 2.1046) 10
3.2 Modulation Characteristics (FCC Rule, 2.1047) 13
3.3 Occupied Bandwidth (FCC Rule, 2.1049) 24
3.4 Spurious Emissions at Antenna Terminal (FCC Rule, 2.1051) 26
3.5 Field Strength of Spurious Radiation (FCC Rule, 2.1053) 30
3.6 Frequency Stability (FCC Rule, 2.1055) 32
3.7 Suppression of Interference Aboard Ships (FCC Rule, 80.217) 35

4 Photographs to Reveal Equipment Construction and Layout (FCC Rule, 2.1033) 39

5 Description of Circuitry and Devices (FCC Rules, 2.1033) 40

5.1 Function of Each Semiconductor or Active Device 40
5.2 Description of the circuitry and devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation, and for limiting power 43

6 Operator's Manual Incl. Circuit Diagrams (FCC Rule, 2.1033) 47

Attachment A [Test data for 3.4 Spurious Emissions at Antenna Terminal] ..... A.1 - A.14
Attachment B [Test data for 3.5 Field Strength of Spurious Radiation] ..... B.1 - B.7
Attachment C [Test data for 3.7 Suppression of Interference Aboard Ships] ..... C.1 - C.21
Attachment D [List of Test/ Measuring Equipment] ..... D.1 - D.3
Attachment E [Photographs of the EUT] ..... E.1 - E.28

1 General Information

1.1 General

(a) Manufacturer: Furuno Electric Co., Ltd.
Ashihara-cho 9-52, Nishinomiya-city, 662-8580 Japan

(b) Model: FAR-2837SW

	Type	Serial Number
Antenna unit	RSB-104	R144-0002
Radiator:	SN-36AF	
Transceiver Unit	RTR-082	R148-0001
Processor unit	RPU-013	4318-0003
Control unit	RCU-014	0003
Monitor unit	MU-231CR	0004

(c) Primary Function: Search, Navigation and anticollison

(d) Discrimination

Range Discrimination: 26 meters on a range scale of 1.5 nm

Bearing Discrimination: on a range scale of 1.5 nm,

Radiator type:	SN-30AF	SN-36AF
Discrimination (°):	2.48	2.03

(e) Minimum Range: 22 meters on a range scale of 0.25 nm

(f) Frequency Range: Fixed frequency, S-band

Type of Emission: P0N

(g) Power Supply: 100 - 115/220 - 230 VAC (for Processor unit),
100 - 230 VAC (for Monitor unit),
200 / 220 VAC (for Antenna Motor drive via Transceiver unit)

1.2 Transceiver Unit

Type: RTR-082

(1) Transmitter

(a) Assignable Frequency for Shipborne Radar:
Between 2900 and 3100 MHz (FCC Rule: 80.375 (d)-(1))

(b) Type of RF Generator

Magnetron Type: MG5223F

Peak Output Power: 30 kW nominal

(c) Magnetron Ratings

Center frequency of Magnetron: 3050 MHz

Tolerances

MG5223F
Manufacturing: ±30 MHz
Pulling: 13 MHz
Tolerance for 20°C temperature variation: -1.4 MHz

(d) Guard Band:

Guard Band is specified to be equal to 1.5/T MHz, where "T" is the pulselength in microseconds. See para (e). (FCC Rule: 80.209(b))

(e) Pulse Characteristics:

Range Scale (nm)	(Short 1)	(Short 2)	(Middle 1)	(Middle 2)	(Middle 3)	(Long 1)	(Long 2)
	0.125						
	0.25						
	0.5	0.5					
	0.75	0.75	0.75				
	1.5	1.5	1.5				
		3	3	3	3		
			6	6	6	6	
				12	12	12	
				24	**24**	24	
						48	
							96
Pulselength (μs)	0.07	0.15	0.30	0.50	0.70	1.20	1.20
P.R.R.(Hz)	3000	3000	1500	1000	1000	600	500
Duty cycle	$2.10X10^{-4}$	$4.50X10^{-4}$	$4.50X10^{-4}$	$5.00X10^{-4}$	$7.00X10^{-4}$	$7.20X10^{-4}$	$6.00X10^{-4}$
Guard Band (MHz)	21.43	10.00	5.00	3.00	2.14	1.25	1.25

Note 1: Tests were carried out for the underlined Range Scales.

(2) Modulator

(a) FET Type: 2SK1466
Trigger Voltage: Approx. +16 VDC positive

(3) Receiver

(a) Passband (MHz)
RF Stage: 100 MHz
IF Stage:

Pulselength	Short 1	Short 2	Middle 1	Middle 2	Middle 3	Long 1	Long 2
(MHz)	40	40	10	10	10	3	3

(b) Gain (overall) (dB): Sufficient to cause limiting, approximately 130

(c) Overall Noise Figure (dB): 4 (typical)

(d) Video Output Voltage (V): 2 V negative

(e) Features Provided:

Sensitivity Time Controls (Anti-clutter Sea),
Fast Time Constant (Anti-clutter Rain)

(f) If receiver is tunable, describe method of adjusting frequency:

Adjustment of tuning voltage of receiver local oscillator
(Automatic and manual)

1.3 Antenna (Scanner) Unit

(a) Antenna Rotation ON-OFF Switch:

Provided.

(b) Reflector: Slotted array antenna

Radiator type:	SN-30AF	SN-36AF
Length (cm):	309	377
Length (ft):	10.1	12.4

(c) Type of Beam: Vertical fan

(d) Beam Width (between half-Radiator power points)

Radiator type:	SN-30AF	SN-36AF
Horizontal (°):	2.3	1.8
Vertical (°):	25	25

(e) Polarization: Horizontal

(f) Antenna Gain:

Radiator type:	SN-30AF	SN-36AF
Ant. gain (dB):	26.2	26.8

(g) Attenuation of Major Side Lobes with respect to main beam:

Radiator type:	SN-30AF	SN-36AF
Within ±10°	-24 dB	-24 dB
Outside ±10°	-30 dB	-30 dB

(h) Scanning (rotating or oscillating):

Rotating over 360° continuously clockwise

(i) Antenna Rotation Rate: 21 or 26 rpm for RSB-104/-105,

(j) Number of Degrees Scanned: 360°

(k) Sector Scan: provided.

(l) Type of Transmission System: Wave guide.

(m) Rated Loss of Transmission System per hundred feet: 9.2 dB

1.4 Monitor Unit

(a) Type:

Monitor type	MU-231CR
Size (in. diagonal) and Color:	23.1, Color LCD
Pixels:	1024 x 1280
Effective diameter (mm):	> 340

(b) Size of Indicator: See above.

(c) Sweep Linearity: 2% on all ranges

(d) Range Scales:

Range (nm)	Number of Range Rings	Range Ring Interval (nm)
0.125	5	0.025
0.25	5	0.05
0.5	5	0.1
0.75	3	0.25
1.5	6	0.25
3	6	0.5
6	6	1
12	6	2
24	6	4
48	6	8
96	6	16

(e) Range Ring Accuracy: Better than 1% of maximum scale in use or 10 m, whichever is the greater

(f) Overall Bearing Accuracy from Scanner to Display: Better than 1°

(g) Target Plot Facility: Simulated afterglow in low shade

(h) Heading Indicator: Provided, automatic alignment. Heading Line and Heading Marker

(i) True Bearing Indicator: provided

1.5 Functional Controls

Range selector	Power Switch	FTC control
A/C rain	A/C sea	Gain control
Panel dimmer [2)]		
Heading line off	Echo stretch [2)]	MENU
Guard zone set/Audio alarm off		Range ring on/off
Interference rejector [2)]	ST-BY/TX	Arrow keys (VRM/EBL/GUARD)
Trackball		
VRM on/off	SHIFT (Offcenter)	Range set [2)]
Zoom	EBL on/off	Echo Trail
Brilliance [2)]	Navigation on/off [1),2)]	Anchor watch [2)]
Display brilliance	PLOT color [2)]	TRU/REL [2), 3)]
Mode [2), 3)]	Chart display [2)]	Waypoint [2)]
HU/HUTB/CU/NU/TM		

Note: [1)] Valid when interfaced with navaid
[2)] Selected on menu
[3)] Valid when interfaced with gyrocompass

1.6 Operational Features

(a) Is positive means provided to indicate whether or not the overall operation of the equipment is such that it may be relied upon to provide effective operation in accordance with its primary function:

Yes (Performance Monitor)

(b) Is the equipment for continuous operation: Yes

(c) Is provision made for operation with shore based radar beacons (RACONS):
Yes (SART)

1.7 Line Power Supply Requirements

(a) Input Voltage and Power Drain:

Unit	Type	Input voltage	Power drain
Processor unit	RPU-013	100 - 115/220 - 230 VAC	300 VA
Monitor unit	MU231CR	100 - 230 VAC	90 VA
Transceiver unit (for Antenna Motor drive)	RTR-082	200 / 220 VAC	600 VA

1.8 Construction Features

(a) Does equipment embody replacement units with chassis type assembly: Yes

(b) Are fuse alarms provided: Fuses are provided.

(c) State units that are weatherproof: Antenna Unit (IEC 60529 - IPX6)

(d) If all units are not housed in a single container, indicate number and give description of individual units:

1 X Antenna Unit	Type:	RSB-104 (21 or 26 rpm) or RSB-105 (21 or 26 rpm)
1 X Transceiver Unit	Type:	RTR-082
1 X Processor Unit	Type:	RPU-013
1 X Control Unit	Type:	RCU-014
1 X Monitor Unit	Type:	MU-231CR (23.1 inch LCD)

(e) Approximate Weight of Complete Installation:

Antenna Unit:	129 kg
Transceiver Unit:	17 kg
Processor Unit:	10 kg
Control Unit:	3.7 kg
Monitor Unit:	22 kg

(f) Approximate space required for installation excluding scanner

Transceiver Unit:	860 (W) X 707 (H) X 270 (D) mm
Monitor Unit:	798 (W) X 560 (H) X 451 (D) mm
Processor Unit:	565 (W) X 498 (H) X 460 (D) mm
Control Unit:	398 (W) X 92 (H) X 250 (D) mm

2 Identification of Equipment (FCC Rule, 2.925)

The following nameplates are permanently fixed on the corresponding equipment units.

FCC ID: ADB9ZWRTR082

Material of nameplate: Aluminum, 0.5 mm thick

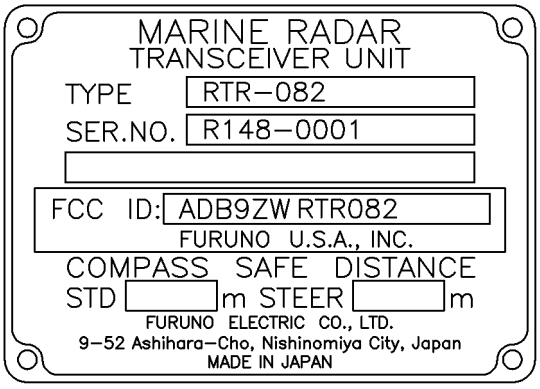

Fig. 2.1 Name Plate for Transceiver Unit,

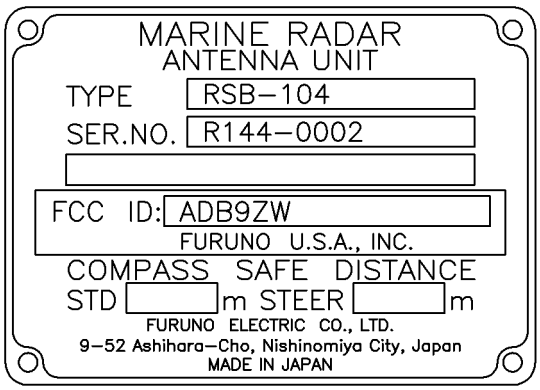

Fig. 2.2 Name Plate for Antenna (Scanner) Unit,

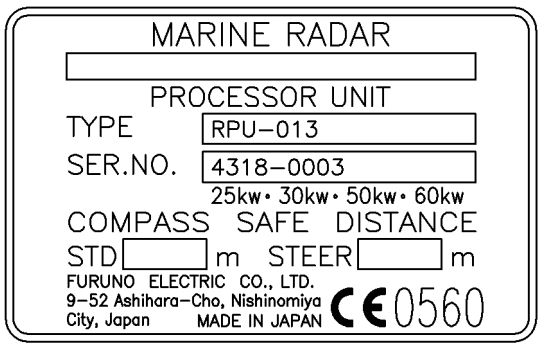

Fig. 2.3 Name Plate for Processor Unit,

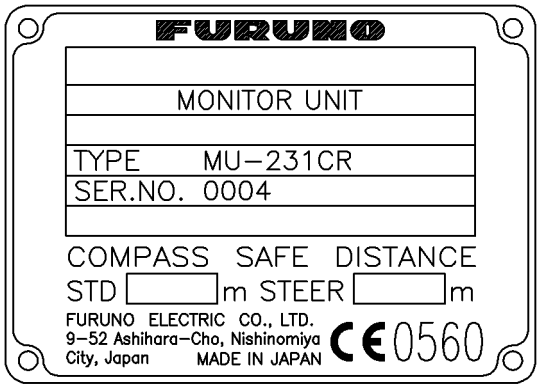

Fig. 2.4 Name Plate for Monitor Unit,

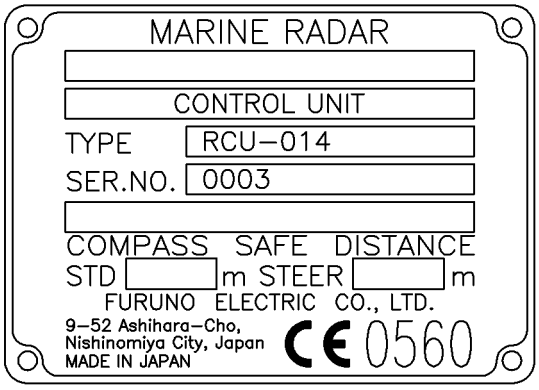

Fig. 2.5 Name Plate for Control Unit.

3 Test data

3.1 RF Power Output (FCC Rule, 2.1046)

3.1.1 Microwave characteristics

The peak voltage was determined using the divider having a ratio of 1000 to 1 and the oscilloscope. Current pulse was viewed across the wideband current transformer with output voltage per ampere 1.00.

(1) Nominal values

Pulselength	Short 1	Short 2	Middle 1	Middle 2	Middle 3	Long 1	Long 2
Range scale (nm)	0.125	3	6	12	24	48	96
Pulselength (µs)	0.07	0.15	0.30	0.50	0.70	1.20	1.20
PRR (Hz)	3000	3000	1500	1000	1000	600	500
Duty cycle	2.10×10^{-4}	4.50×10^{-4}	$4.50 \times 10^{--4}$	5.00×10^{-4}	7.00×10^{-4}	7.20×10^{-4}	6.00×10^{-4}
Guard band (MHz)	21.43	10.00	5.00	3.00	2.14	1.25	1.25

(2) Measured values

Magnetron input pulse voltage

Magnetron input pulse voltage was measured at its cathode using the oscilloscope and divider with ratio 1000 to 1.

Pulselength	Short 1	Short 2	Middle 1	Middle 2	Middle 3	Long 1	Long 2
Directional coupler attenuation (dB)	50.21	50.21	50.21	50.21	50.21	50.21	50.21
Magnetron input voltage (kV)	8.8	8.7	8.6	8.8	8.8	8.8	8.8
Pulselength (µs) (50 % amplitude)	0.266	1.084	1.330	1.420	1.488	1.552	1.552
Rise time (µs) (10 - 90 % amplitude)	0.128	0.128	0.128	0.128	0.128	0.128	0.128
Decay time (µs) (90 - 10 % amplitude)	0.148	1.720	2.030	1.710	1.340	0.580	0.580

Magnetron input pulse current
Magnetron input pulse current was observed across the wideband current transformer with output voltage per ampere 1.00.

Pulselength	Short 1	Short 2	Middle 1	Middle 2	Middle 3	Long 1	Long 2
Magnetron input current (A)	6.0	6.0	7.3	8.6	9.0	9.2	9.2
Pulselength (µs) (50 % amplitude)	0.448	0.124	0.334	0.540	0.756	1.200	1.200
Rise time (µs) (10 - 90 % amplitude)	0.080	0.100	0.100	0.100	0.100	0.100	0.100
Decay time (µs) (90 - 10 % amplitude)	0.087	0.181	0.110	0.124	0.126	0.126	0.126

RF envelope of the magnetron output pulse
The RF envelope of the magnetron output pulse was measured using a diode and the oscilloscope with the following results:

Pulselength	Short 1	Short 2	Middle 1	Middle 2	Middle 3	Long 1	Long 2
Pulselength (µs) (-3 dB points)	0.057	0.142	0.334	0.540	0.752	1.200	1.200
Rise time (ns) (10 - 90 % amplitude)	0.015	0.015	0.015	0.015	0.015	0.017	0.017
Decay time (ns) (90 - 10 % amplitude)	0.086	0.180	0.097	0.118	0.120	0.118	0.118

Estimated efficiency
The estimated efficiency of the RF generator (magnetron) was determined by the following measurements and calculation. Power output from magnetron was measured using the directional coupler, power meter and the oscilloscope.

Pulselength	Short 1	Short 2	Middle 1	Middle 2	Middle 3	Long 1	Long 2
Range scale (nm)	0.125	3	6	12	24	48	96
P.R.R (Hz)	3017.0	3017.0	1508.9	1005.8	1005.8	603.5	502.9
Duty cycle	1.73E-4	4.28E-4	5.04E-4	5.43E-4	7.56E-4	7.24E-4	6.03E-4
Magnetron input, av. (W)	9.07	22.31	31.64	41.30	59.90	58.37	48.65
Magnetron input, peak (kW)	52.56	52.08	62.78	76.03	79.20	80.61	80.61
Power meter reading (mW)	0.0415	0.0852	0.1102	0.1340	0.1950	0.1980	0.1660
Magnetron output, av. (W)	4.356	8.942	11.566	14.064	20.466	20.781	17.422

Pulselength	Short 1	Short 2	Middle 1	Middle 2	Middle 3	Long 1	Long 2
Magnetron Output, peak (kW):	25.24	20.87	22.95	25.89	27.06	28.70	28.87
Magnetron efficiency (%):	48.0	40.1	36.6	34.1	34.2	35.6	35.8
Spurious response limits (dB)	49.39	52.51	53.63	54.48	56.11	56.18	55.41

Peak Power Input to RF Generator : 55.8 kW
Estimated Efficiency of RF Generator : 41.6 %

3.2 Modulation Characteristics (FCC Rule, 2.1047)

3.2.1 FET Trigger Pulse

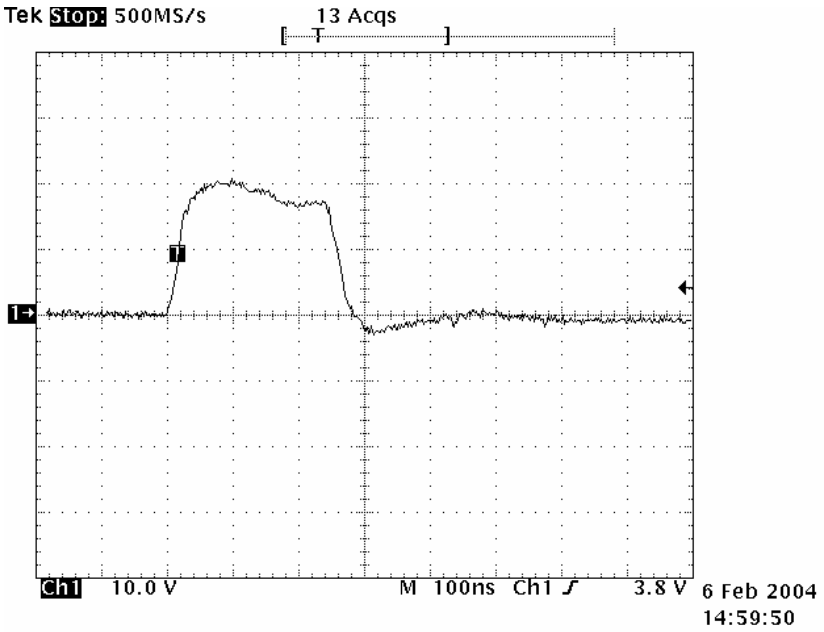

Fig. 3.2.1.1 Typical waveform of Trigger Pulse Scale: 10 V/div., 100 ns/div.

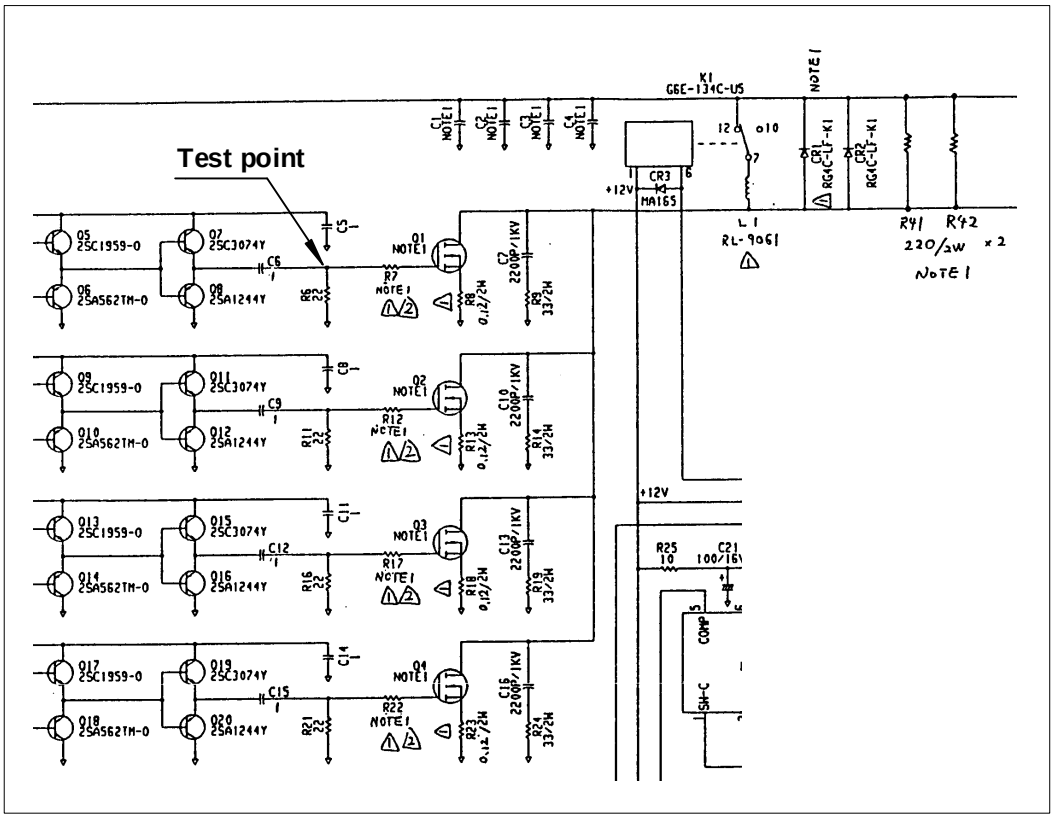

Fig. 3.2.1.2 Test Point for observing Trigger Pulse
(in MD board (03P9244) of Radar Antenna Unit)

3.2.2 Trigger Pulse at Magnetron Cathode

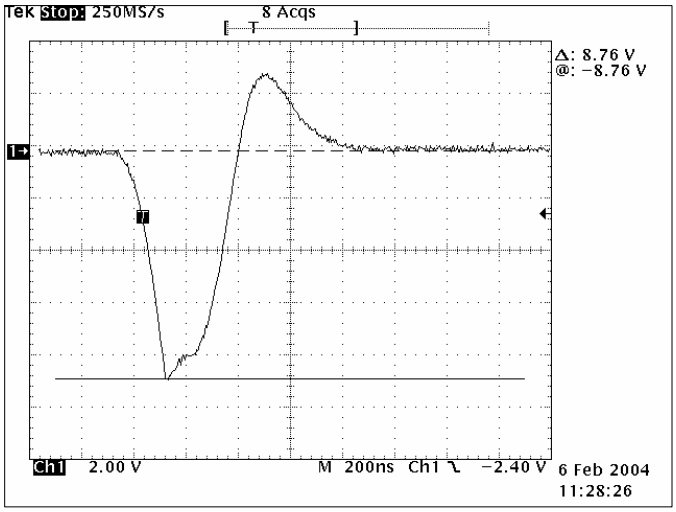

Fig. 3.2.2.1 Short 1 Pulse (0.125 nm Range) Scale: 2 kV/div. 200 ns/div.

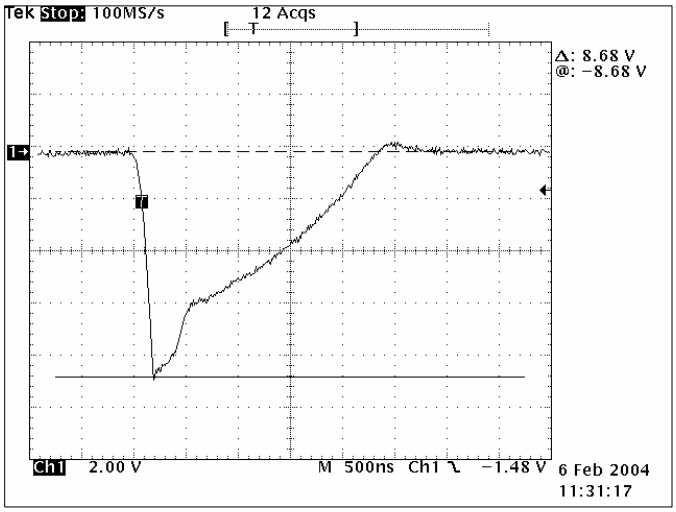

Fig. 3.2.2.2 Short 2 Pulse (3 nm Range) Scale: 2 kV/div. 500 ns/div.

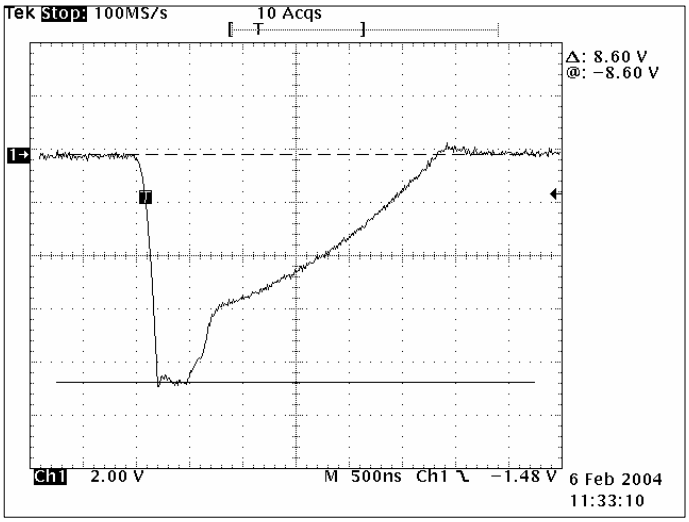

Fig. 3.2.2.3 Middle 1 Pulse (6 nm Range) Scale: 2 kV/div. 500 ns/div.

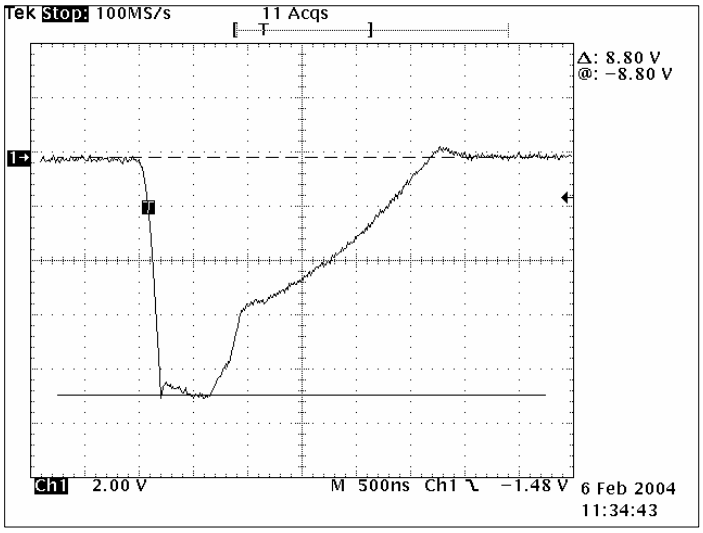

Fig. 3.2.2.4 Middle 2 Pulse (12 nm Range) Scale: 2 kV/div. 500 ns/div.

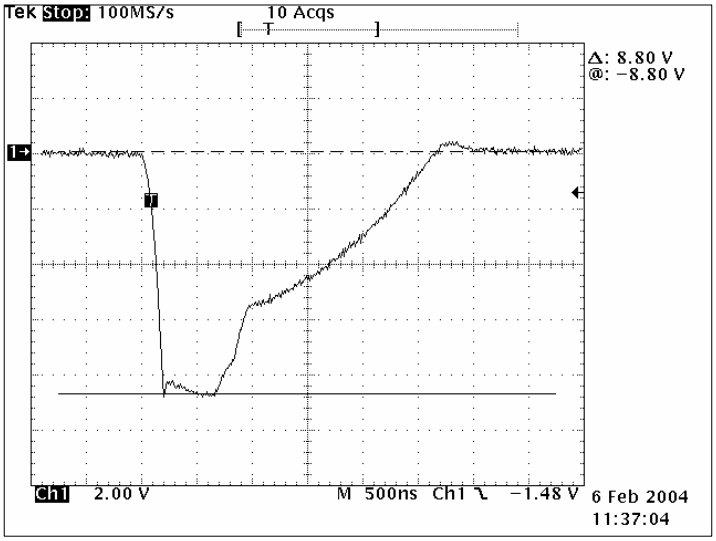

Fig. 3.2.2.5 Middle 3 Pulse (24 nm Range) Scale: 2 kV/div. 500 ns/div.

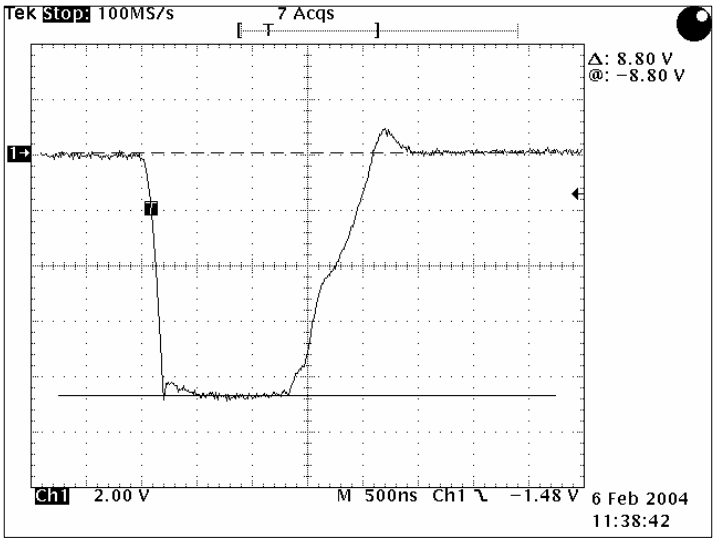

Fig. 3.2.2.6 Long 1 Pulse (48 nm Range) Scale: 2 kV/div. 500 ns/div.

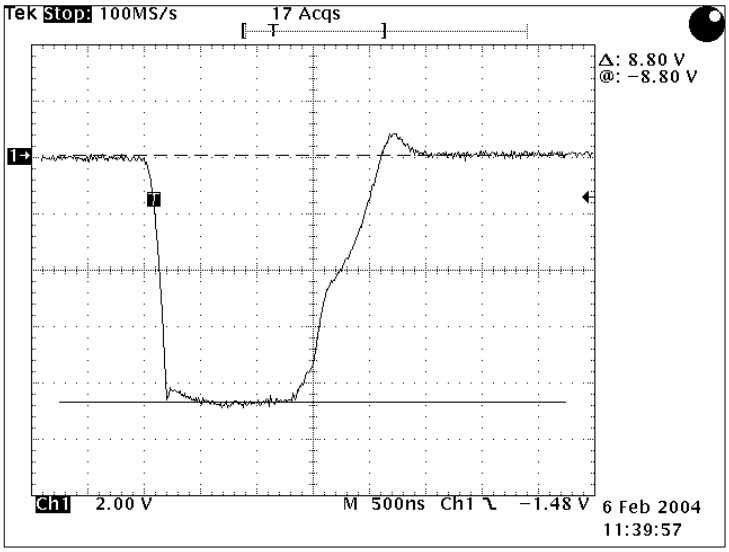

Fig. 3.2.2.7 Long 2 Pulse (96 nm Range) Scale: 2 kV/div. 500 ns/div.

3.2.3 **Magnetron Output** (detected):

3.2.3.1 Setup for Measurement:

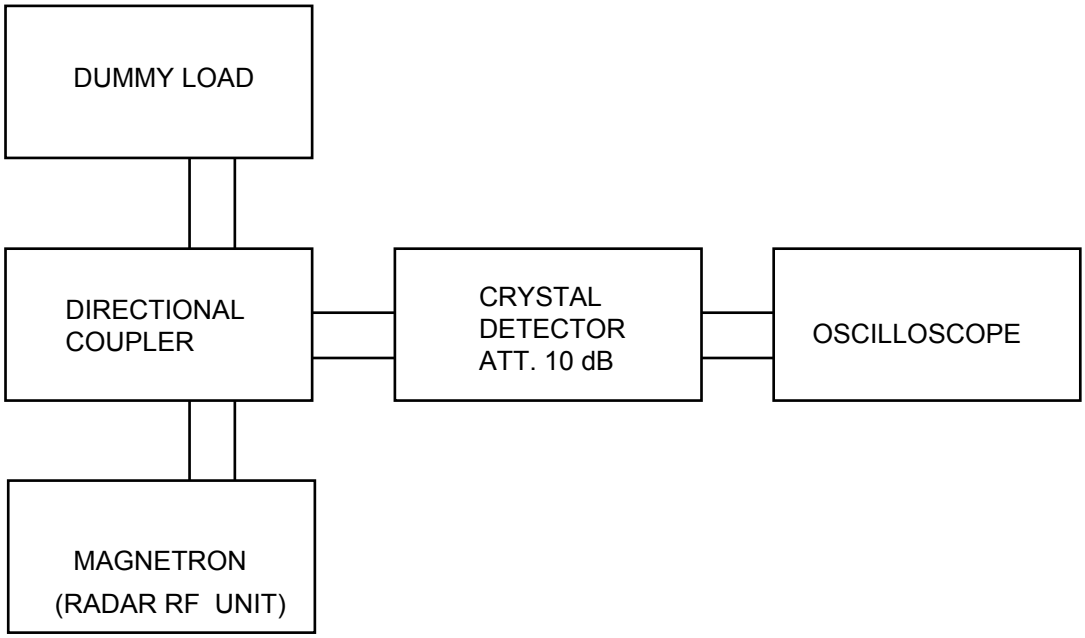

Fig. 3.2.3.1

3.2.3.2 Measuring Equipment List:

See Attachment D [List of Test/Measuring Equipment].

3.2.3.3 Measured Data:

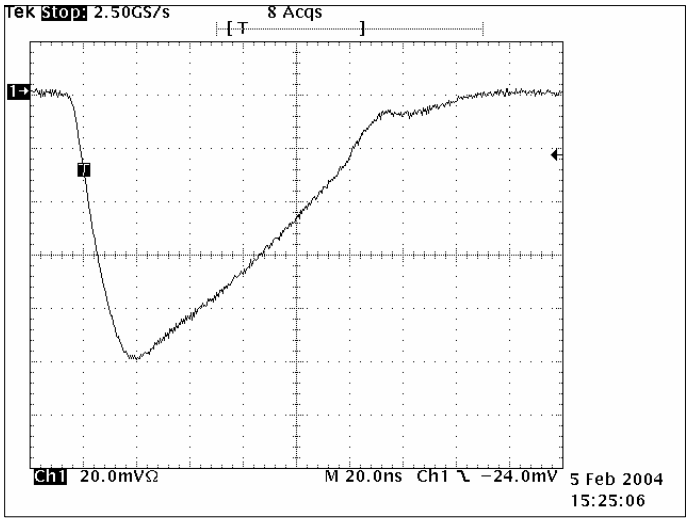

Fig. 3.2.3.2 Short 1 Pulse (0.125 nm Range) Scale: 20 mV/div. 20 ns/div.

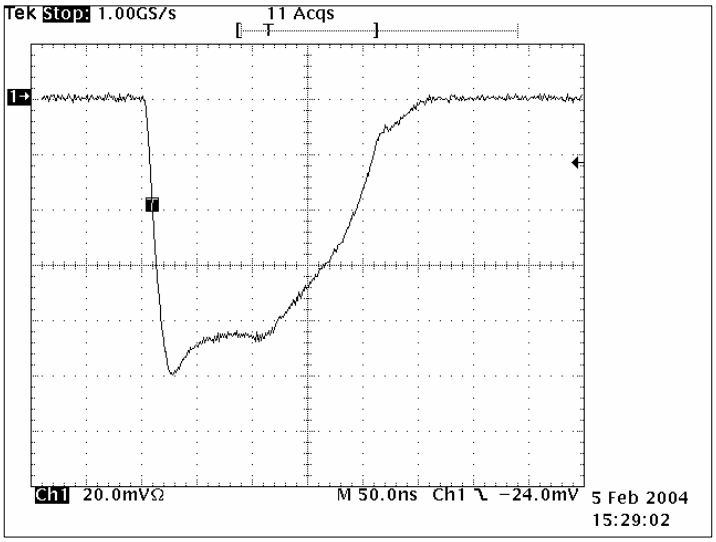

Fig. 3.2.3.3 Short 2 Pulse (3 nm Range) Scale: 20 mV/div. 50 ns/div.

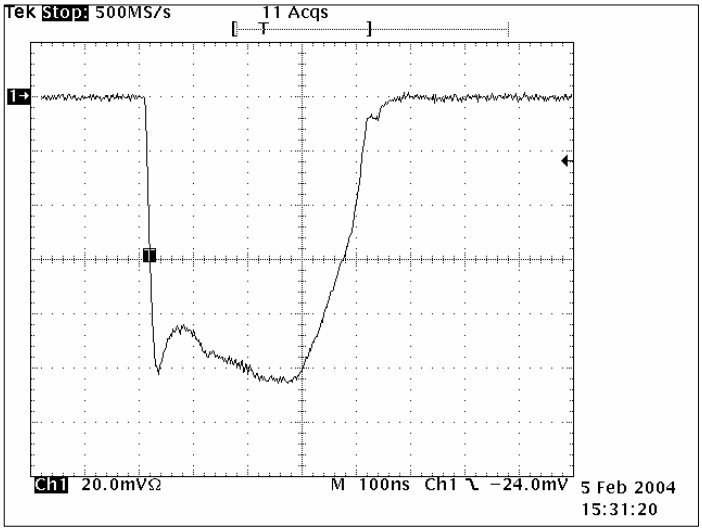

Fig. 3.2.3.4 Middle 1 Pulse (6 nm Range) Scale: 20 mV/div. 100 ns/div.

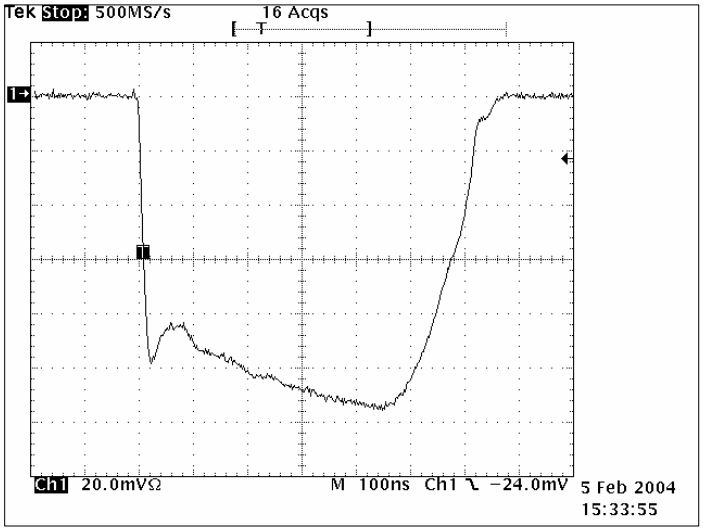

Fig. 3.2.3.5 Middle 2 Pulse (12 nm Range) Scale: 20 mV/div. 100 ns/div.

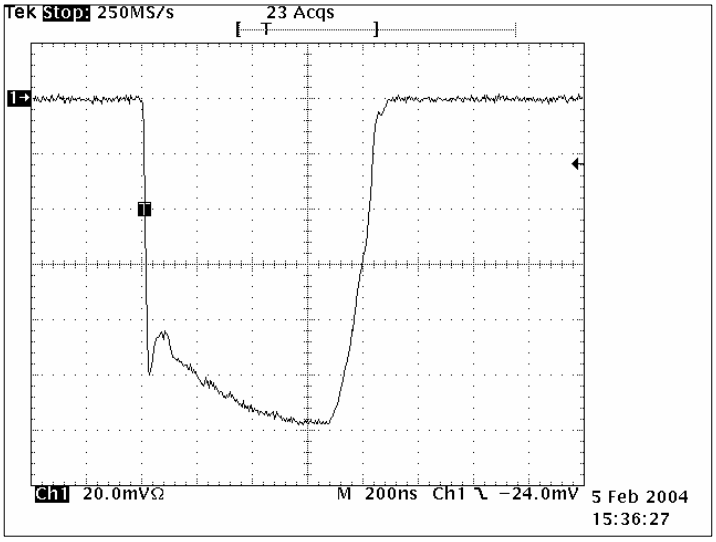

Fig. 3.2.3.6 Middle 3 Pulse (24 nm Range) Scale: 20 mV/div. 200 ns/div.

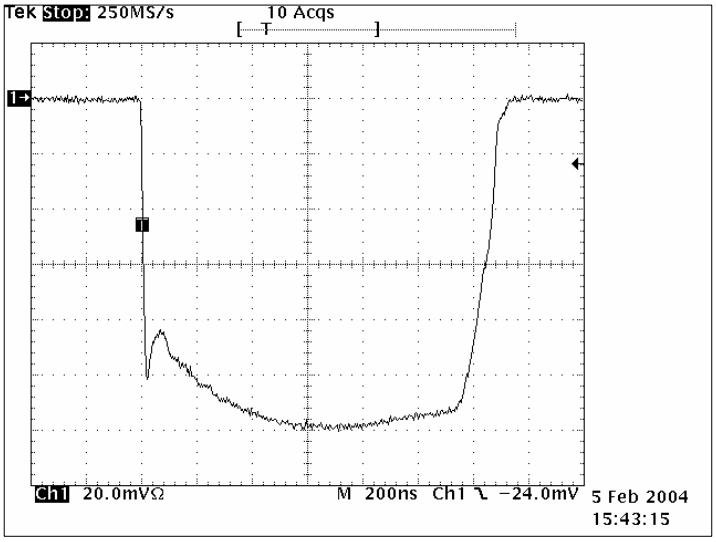

Fig. 3.2.3.7 Long 1 Pulse (48 nm Range) Scale: 20 mV/div. 200 ns/div.

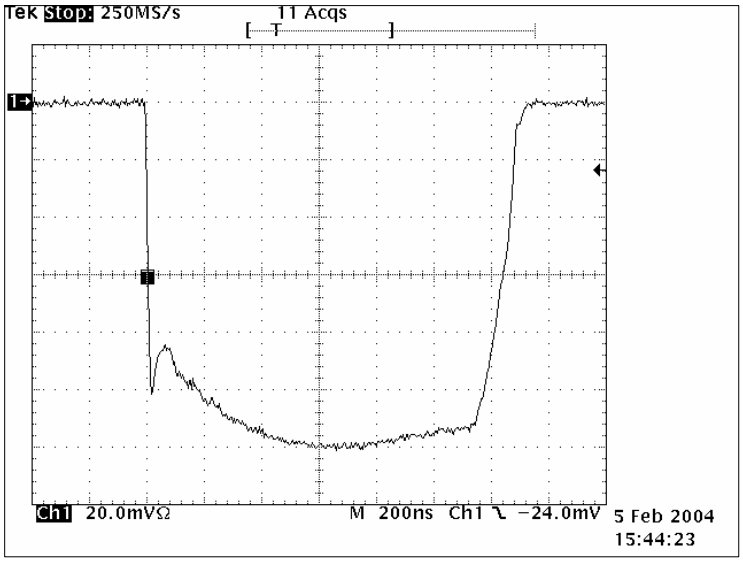

Fig. 3.2.3.8 Long 2 Pulse (96 nm Range) Scale: 20 mV/div. 200 ns/div.

3.2.4 Radar Pulse Spectrum:

Measured by the spectrum analyzer.

(Test Equipment Setup and Measuring Equipment List are same as Clause 3.4.1 and 3.4.2.)

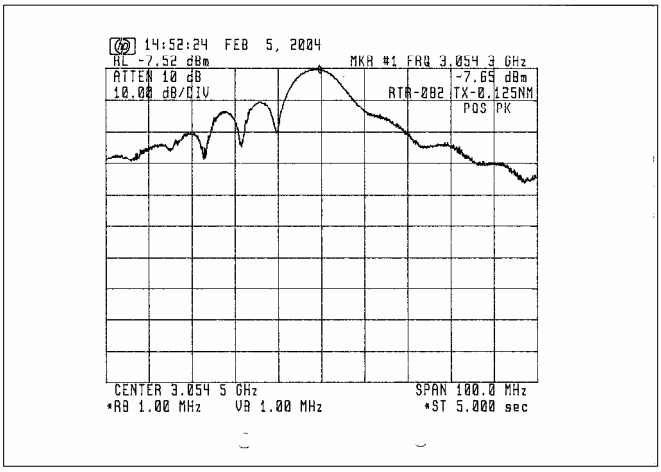

Fig. 3.2.4.1 For Short 1 Pulse (0.125 nm Range)

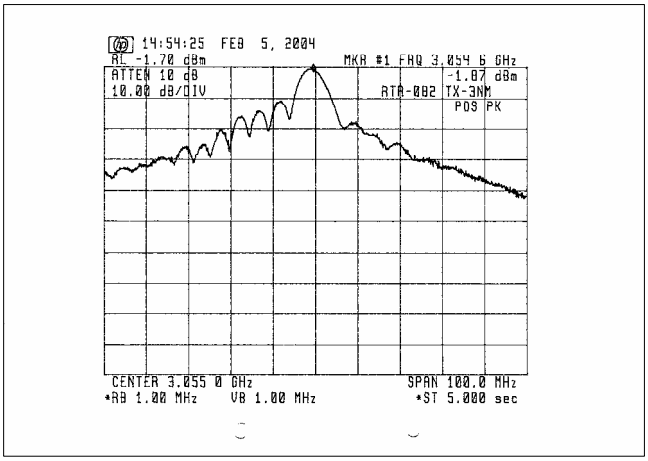

Fig. 3.2.4.2 For Short 2 Pulse (3 nm Range)

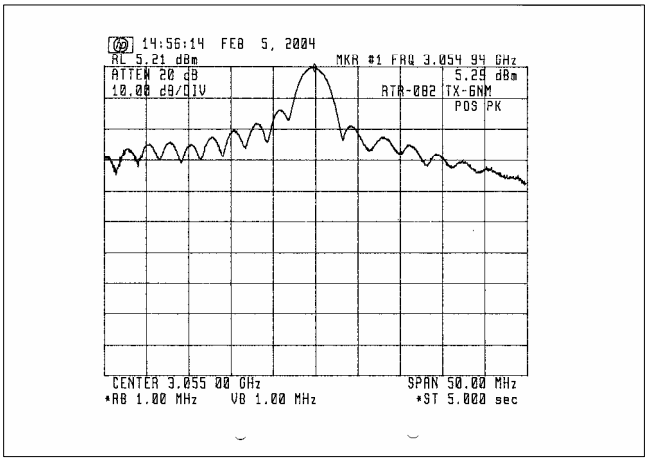

Fig. 3.2.4.3 For Middle 1 Pulse (6 nm Range)

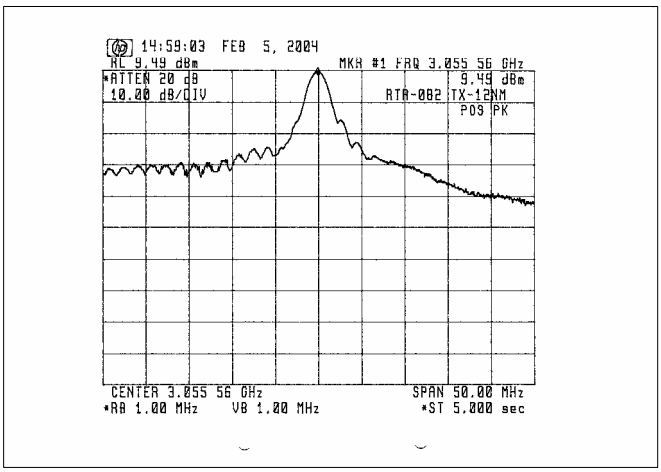

Fig. 3.2.4.4 For Middle 2 Pulse (12 nm Range)

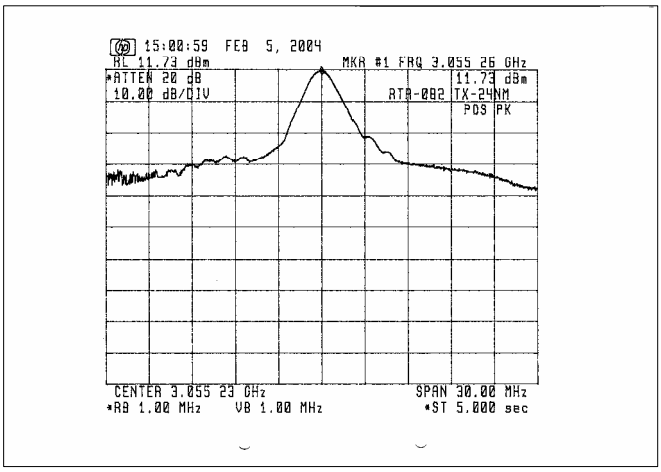

Fig. 3.2.4.5 For Middle 3 Pulse (24 nm Range)

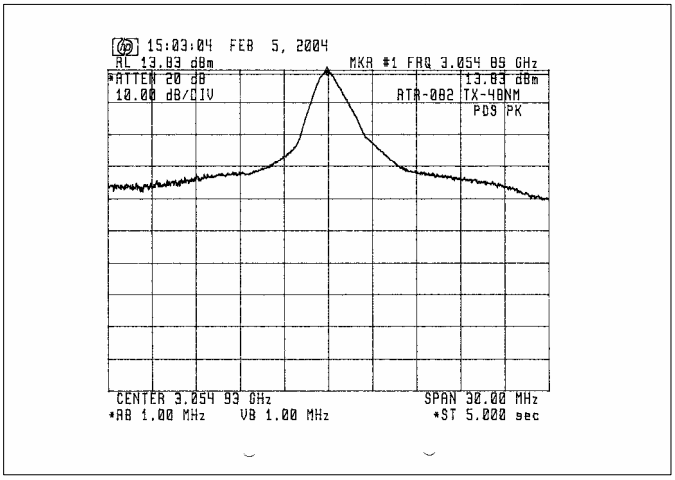

Fig. 3.2.4.6 For Long 1 Pulse (48 nm Range)

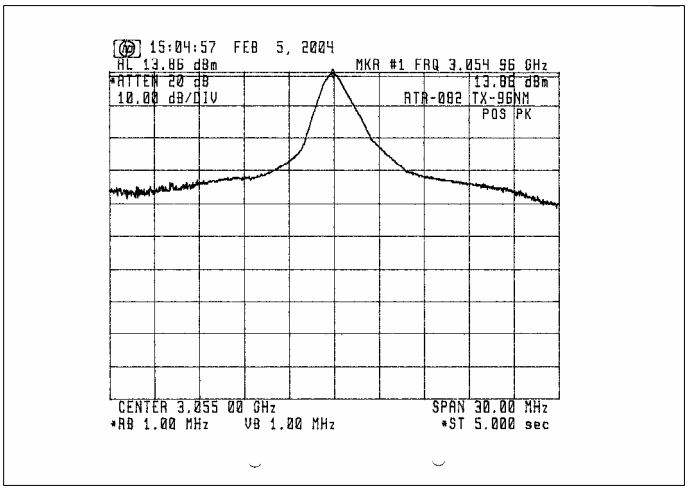

Fig. 3.2.4.7 For Long 2 Pulse (96 nm Range)

3.3 Occupied Bandwidth (FCC Rule, 2.1049)

3.3.1 Measuring Method

FCC rule 47 CFR 2.1049 requires measurements of the occupied bandwidth which is defined in the same section as "the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission." To obtain the occupied bandwidth of the radar transmitter, a special program (program list shown below) was loaded to the Hewlett-Packard spectrum analyzer and run by entering the HP-provided POWER BANDWIDTH calculation command [PWRBW].

The result was automatically displayed on the screen on the spectrum analyzer as:

POWER_BW=----- MHz

```
10   ! HP_71000 DOWNLOAD PROGRAM
20   ASSIGN @Sa TO 718
30   CLEAR @Sa
40   CALL M_ain(@Sa)
50   LOCAL @Sa
60   END
70   !
80    SUB M_ain(@Sa)
90   M_ain:       !
100  CALL Pwr_bw(@Sa)
110  CALL Limit_line(@Sa)
120  !
130  OUTPUT @Sa;"VARDEF K_ey,0;";
140  !
150  OUTPUT @Sa;"FUNCDEF D_LP,^";
160  OUTPUT @Sa;"MOV K_ey,0;";
170  !
180  Main_menu:   !
190  OUTPUT @Sa;"REPEAT;";
200  OUTPUT @Sa;"READMENU K_ey,";
210  !   location: %Top----Bottom-%
220  OUTPUT @Sa;" l,%Limit   line   %,";
230  OUTPUT @Sa;" 2,%Power   bw      %,";
240  OUTPUT @Sa;"14,%     Exit%;";
250  !
260  OUTPUT @Sa;"IF K_ey,EQ,1;THEN;LIMIT_LINE;";
270  OUTPUT @Sa;"ELSIF K_ey,EQ,2;THEN;PWR_BW;";
280  OUTPUT @Sa;"ELSIF K_ey,EQ,l4;THEN;ABORT;";
290  OUTPUT @Sa;"ENDIF;";
300  OUTPUT @Sa;"UNTIL K_ey,EQ,14;";
310  OUTPUT @Sa;"IP;TS;";
320  OUTPUT @Sa;"ADORT;";
330  OUTPUT @Sa;"^"
340  !
350  Define_keydef:   !
360  OUTPUT @Sa;"KEYDEF 7,D_LP, %DLP       TEST%;";
370  !
380  OUTPUT   @Sa;"FUNCDEF D,^";
390  OUTPUT   @Sa;"KEYPST;";
400  OUTPUT   @Sa;"^"
410  !
420  SUBEND
430  !
440  SUB Limit_line(@Sa)
450  Limit_line:     !
460  OUTPUT @Sa;"CLRDSP;";
470  OUTPUT@Sa;"FUNCDEF LIMIT_LINE,^";
480  OUTPUT   @Sa;"PU;PA   0,654;";
490  OUTPUT   @Sa;"LINET 1;";
500  OUTPUT   @Sa;"PD;PA 100,654;";
510  OUTPUT   @Sa;"PU;PA 201,654;";
520  OUTPUT   @Sa;"PD;PA 300,654;";
530  OUTPUT   @Sa;"PU;PA 105,630;";
540  OUTPUT   @Sa;"TEXT @-35dB@;";
550  OUTPUT   @Sa;"PU;PA 205,720;";
560  OUTPUT   @Sa;"TEXT @-25dB@;";
570  OUTPUT   @Sa;"PU;PA 301,743;";
580  OUTPUT   @Sa;"LINET 1;";
590  OUTPUT   @Sa;"PD;PA 400,743;";
600  OUTPUT   @Sa;"PU;PA 601,743;";
610  OUTPUT   @Sa;"LINET l;";
620  OUTPUT   @Sa;"PD;PA 700,743;";
630  OUTPUT   @Sa;"PU;PA 701,654;";
640  OUTPUT   @Sa;"LINET l;";
650  OUTPUT@Sa;"PD;PA 1000,654;HD;";
660  OUTPUT   @Sa;"^"
670  SUBEND
680  SUB Pwr_bw(@Sa)
690  Pwr_bw:       !
700  !      Calculating Power band width
710  OUTPUT @Sa;   "VARDEF P_bw,0;";
720  OUTPUT @Sa;"FUNCDEF PWR_BW,^";
730  OUTPUT @Sa;"CLRW TRA;";
740  OUTPUT @Sa;"CLRDSP;";
750  OUTPUT @Sa;"SNGLS;";
760  OUTPUT @Sa;"MXMH   TRA;TS;TS;TS;";
770  OUTPUT @Sa;"MOV   P_bw,PWRBW   TRA,99.0;";
780  OUTPUT@Sa;"DIV P__bw,P_bw,1000000;";
790  OUTPUT @Sa;"PU;PA 10,800;HD;";
800  OUTPUT @Sa;"TEXT @POWER_BW = @;";
810  OUTPUT @Sa;"DSPLY P_bw,8,3;";
820  OUTPUT @Sa;"TEXT @ MHz @;";
830  OUTPUT @Sa;"^"
840  SUBEND
```

Fig. 3.3.1 Program for Calculation of Occupied Bandwidth

3.3.2 Test Equipment Setup:

Same as Clause 3.4.1.

3.3.3 Measuring Equipment List:

Same as Clause 3.4.2.

3.3.4 Test Result:

The test result is shown below.

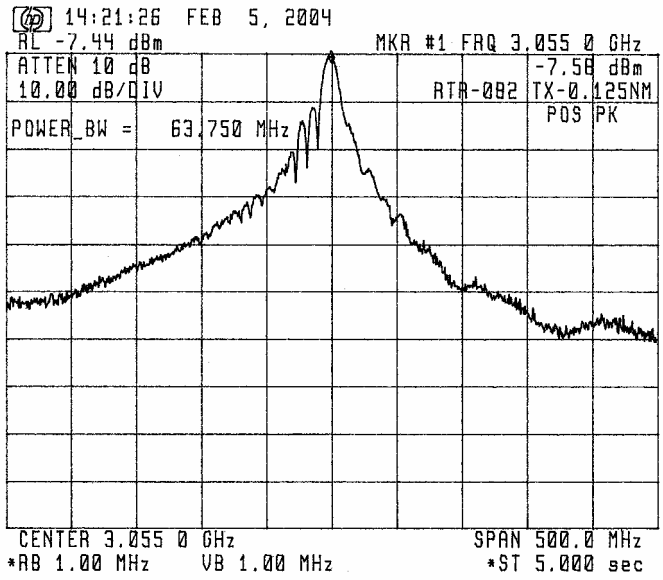

Fig. 3.3.2 Measurement of Occupied Bandwidth

Occupied bandwidth = 63.750 MHz

3.4 Spurious Emissions at Antenna Terminal (FCC Rule, 2.1051)

3.4.1 Test Equipment Setup:

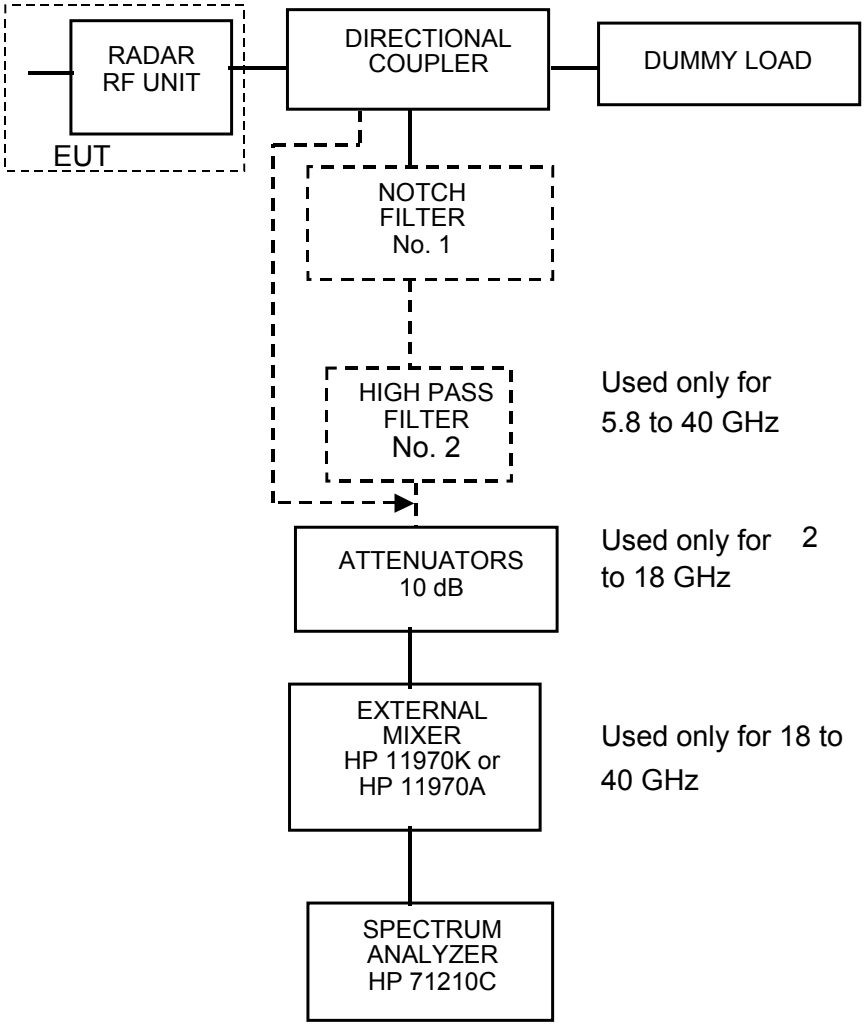

Fig. 3.4.1

3.4.2 Measuring Equipment List:

See Attachment D [List of Test/Measuring Equipment].

Note: (1) The characteristics of Notch Filter (No. 1) are described in Fig. 3.4.2 to Fig. 3.4.4.
(2) The characteristic of High Pass Filter (No. 2) is described in Fig. 3.4.5 to Fig 3.4.6.

3.4.3 Test Conditions:

Radar Range Settings: 0.125 nm (Short 1)/3 nm (Short 2)/6 nm (Middle 1)/12 nm (Middle 2)/24 nm (Middle 3)/48 nm (Long 1)/96 nm (Long 2)

3.4.4 Emission Limits:

(a) Frequency Range (FCC Rule, 2.1057(1)) : 10 kHz - 40 GHz

(b) Emission Limits (FCC Rule, 80.211) :

Frequency removed from the assigned frequency	Frequency (Hz)	Emission attenuation (mean power ,dB)
50 - 100 % (of the authorized bandwidth)	2950 - 3000 M 3100 - 3150 M	At least 25
100 - 250 %	2800 - 2950 M 3150 - 3300 M	At least 35
more than 250 %	10 k - 2800 M 3300 - 40,000 M	At least 43 + 10 log $_{10}$ (mean power in watts)

Note : (1) Assigned frequency (center frequency) = 3050 MHz

(2) Authorized bandwidth = 100 MHz

3.4.5 Test Results:

As shown in Attachment A, the spurious emissions at antenna terminal of EUT are found lower than the specified limits.

(Note: Spurious emissions for 10 kHz to 2 GHz are not found due to the antenna terminal structure. (Waveguide tube)).

Characteristic of Filter No.1 (for S-band)

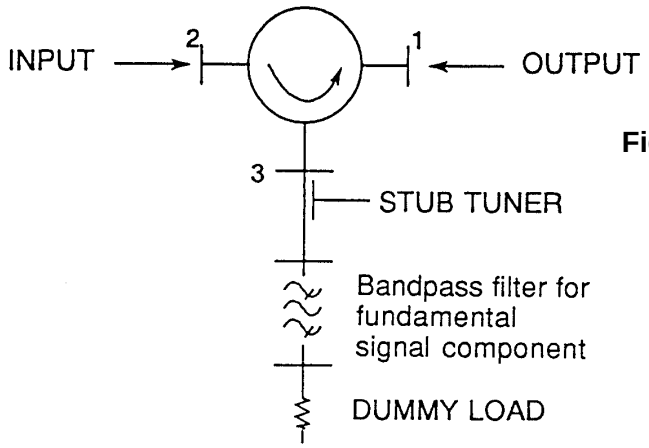

Fig. 3.4.2

Setup of Notch Filter No.1

This notch filter is used to increase the dynamic range of the spectrum analyzer.

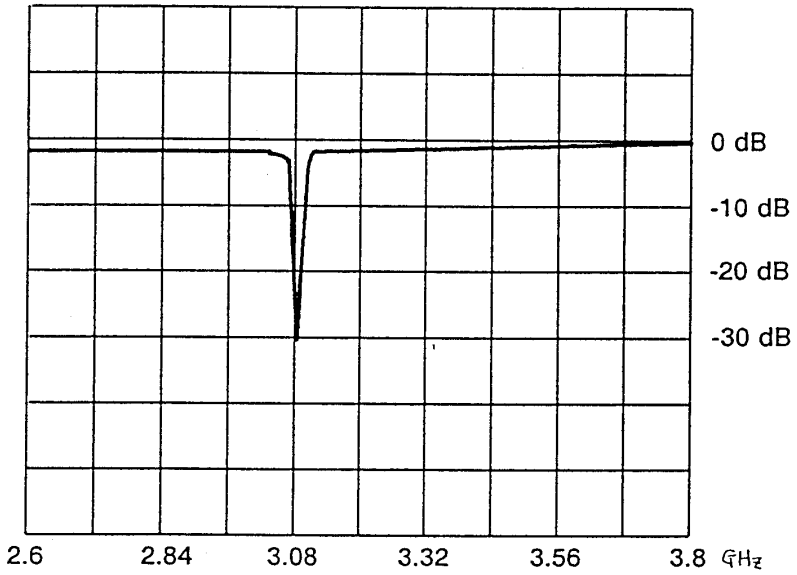

Fig. 3.4.3

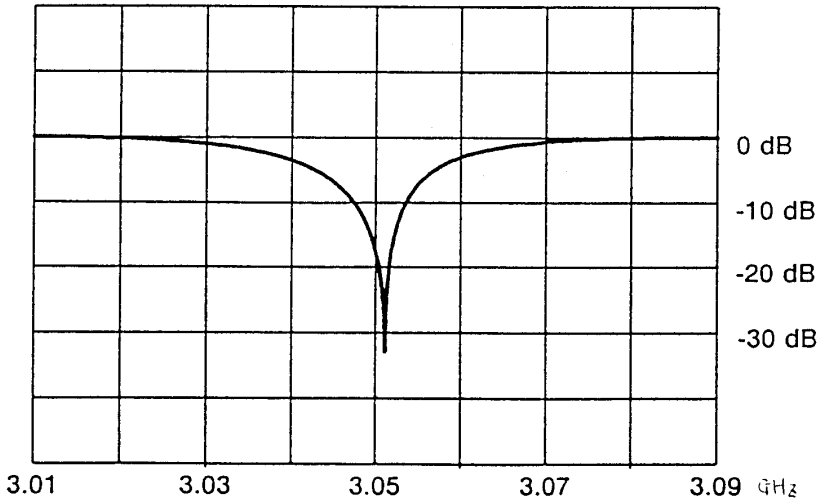

Fig. 3.4.4

Characteristic of Filter No. 2 (for S-band)

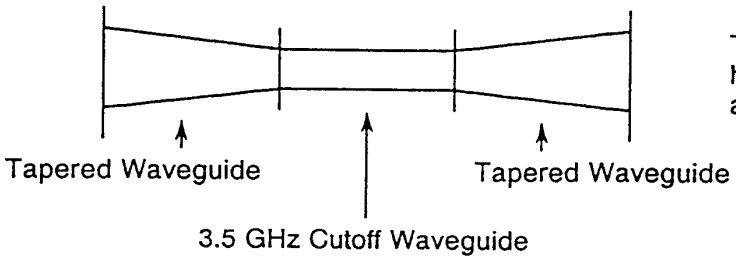

This filter is used to filter out the high level fundamental signal to avoid damage to the analyzer.

Fig. 3.4.5

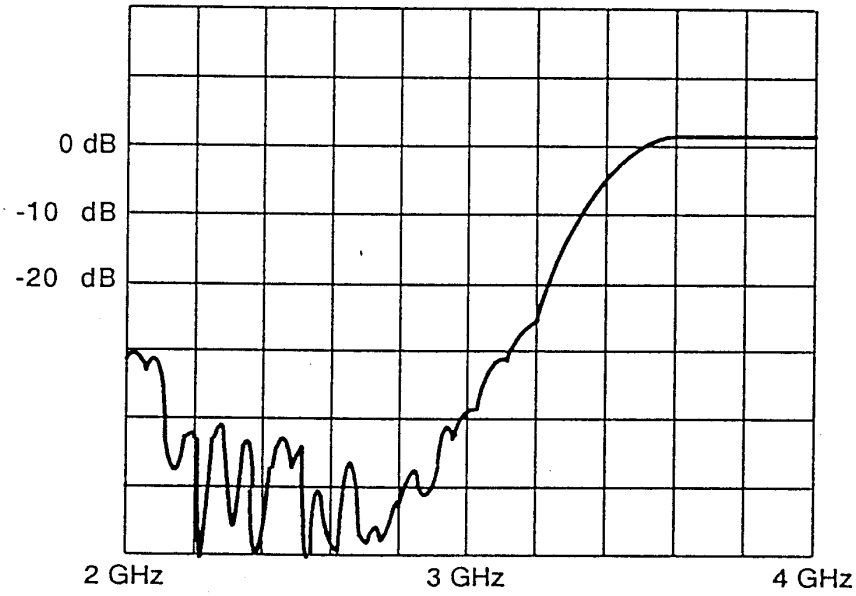

Fig. 3.4.6

3.5 Field Strength of Spurious Radiation (FCC Rule, 2.1053)

3.5.1 Test Site: Rooftop of 6-story building,
FURUNO ELECTRIC CO., LTD.
Ashihara-cho 9-52, Nishinomiya-city, 662-8580 Japan

3.5.2 Distance between the radar set and measuring antenna: 10 m

3.5.3 Radar Range settings: 0.125 nm (Short 1)/3 nm (Short 2)/6 nm (Middle 1)/12 nm (Middle 2)/24 nm (Middle 3)/48 nm (Long 1)/96 nm (Long 2)

3.5.4 Measuring Equipment List:
See Attachment D [List of Test/Measuring Equipment].

3.5.5 Test settings:

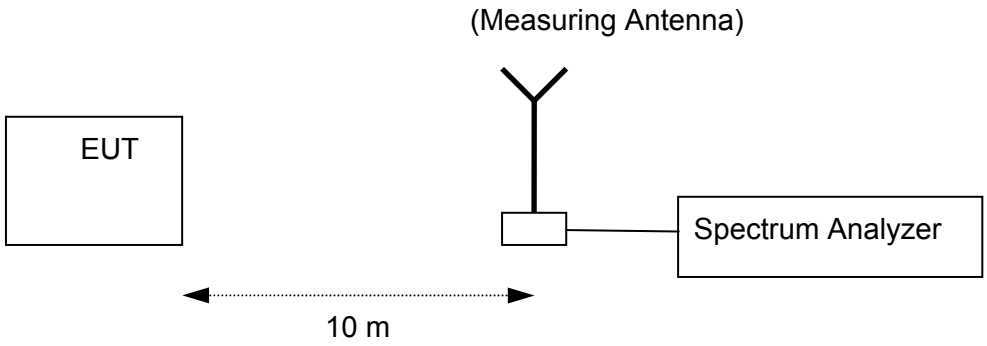

3.5.6 Field Strength Limits:

(a) Frequency Range (FCC Rule, 2.1057(1)) : 10 kHz - 40 GHz

(b) Emission Limits (FCC Rule, 80.211) :

Frequency removed from the assigned frequency	Frequency (MHz)	Emission attenuation (mean power, dB)
50 - 100 % (of the authorized bandwidth)	2,950 – 3,000 3,100 – 3,150	At least 25
100 - 250 %	2,800 – 2,950 3,150 – 3,300	At least 35
more than 250 %	0.01 – 2,800 3,300 - 40,000	At least 43 + 10 $\log_{10}$ (mean power in watts)

Note: (1) Assigned frequency (center frequency) = 3050 MHz
(2) Authorized bandwidth = 100 MHz

3.5.7 Test Results:

As shown in Attachment B, the field strengths of spurious radiation generated by EUT are found lower than the specified limits.

3.6 Frequency Stability (FCC Rule, 2.1055)

3.6.1 Setup for Measurement

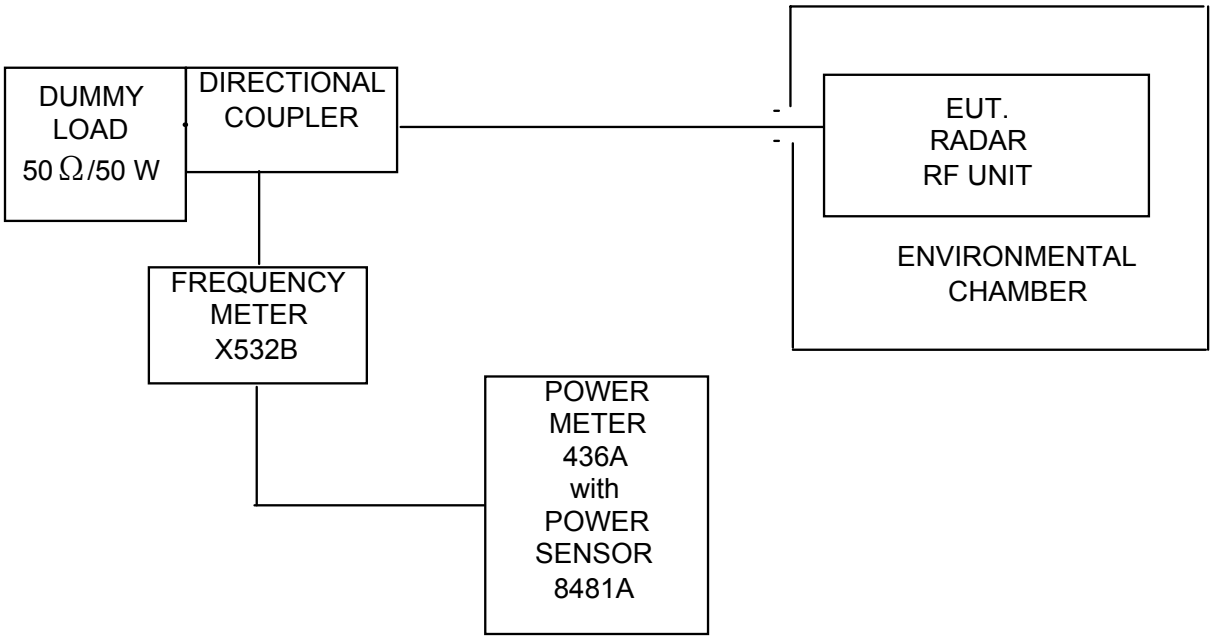

Fig. 3.6.1

3.6.2 Test Conditions:

1) Radar Range settings : 0.125 nm (Short 1)/3 nm (Short 2)/6 nm (Middle 1)/12 nm (Middle 2)/24 nm (Middle 3)/48 nm (Long 1)/96 nm (Long 2)
2) Ambient Temperature settings: - 20°C to + 50°C (10°C step)
3) Power Supply Voltage settings: 85 /115% of nominal voltage (85 VAC to 115 VAC)

3.6.3 Measuring Equipment List:

See Attachment D [List of Test/Measuring Equipment].

3.6.4 Frequency Tolerance Limits:

"The frequency at which maximum emission occurs must be within the authorized bandwidth and must not be closer than 1.5/T MHz to the upper and lower limits of the authorized band width, where "T" is the pulse duration in microseconds. "
(FCC Rule, 80.209 (b))

1) Center frequency (f_0): 3050 MHz
2) Authorized bandwidth (f(AUBW)): 100 MHz

"Upper limit frequency of the authorized band", f(UAUBW) = f_0 + f(AUBW)/2 = 3100 MHz

"Lower limit frequency of the authorized band", f(LAUBW) = f_0 - f(AUBW)/2 = 3000 MHz

3) Assignable frequency bandwidth : 200 MHz (between 2900 MHz and 3100 MHz)
(FCC Rule, 80.375 (d)-(1))

"Upper limit frequency of the assignable band", f(UASB) = 3100 MHz
"Lower limit frequency of the assignable band", f(LASB) = 2900 MHz

4) Guard Band (f(1.5/T)) :

Pulselength	Short 1	Short 2	Middle 1	Middle 2	Middle 3	Long 1	Long 2
Range Scale (nm)	0.125	3	6	12	24	48	96
Pulselength (µsec)	0.07	0.15	0.30	0.50	0.70	1.20	1.20
Guard Band f(1.5/T) (MHz)	21.43	10.00	5.00	3.00	2.14	1.25	1.25

3.6.5 Test Results:

Shown on Fig. 3.6.2.
(1) "Upper Tolerance Frequency measured (at - 20°C)", f(U) = 3058.5 MHz
(2) "Lower Tolerance Frequency measured (at + 50°C)", f(L) = 3052.8 MHz
(3)-(a)
f(U) + max. f(1.5/T) = 3079.9 MHz < f(UAUBW) = 3100 MHz ≤ f(UASB) = 3100 MHz
(3)-(b)
f(L) - max. f(1.5/T) = 3031.4 MHz > f(LAUBW) = 3000 MHz ≥ f(LASB) = 2900 MHz
So, both are found within the specified limits.

FREQUENCY STABILITY WITH VARIATION OF PRIMARY SUPPLY VOLTAGE:

The built-in voltage regulator allows no frequency variation against variations of ±15 % of nominal power supply voltage (85 to 115 VAC for nominal 100 VAC).

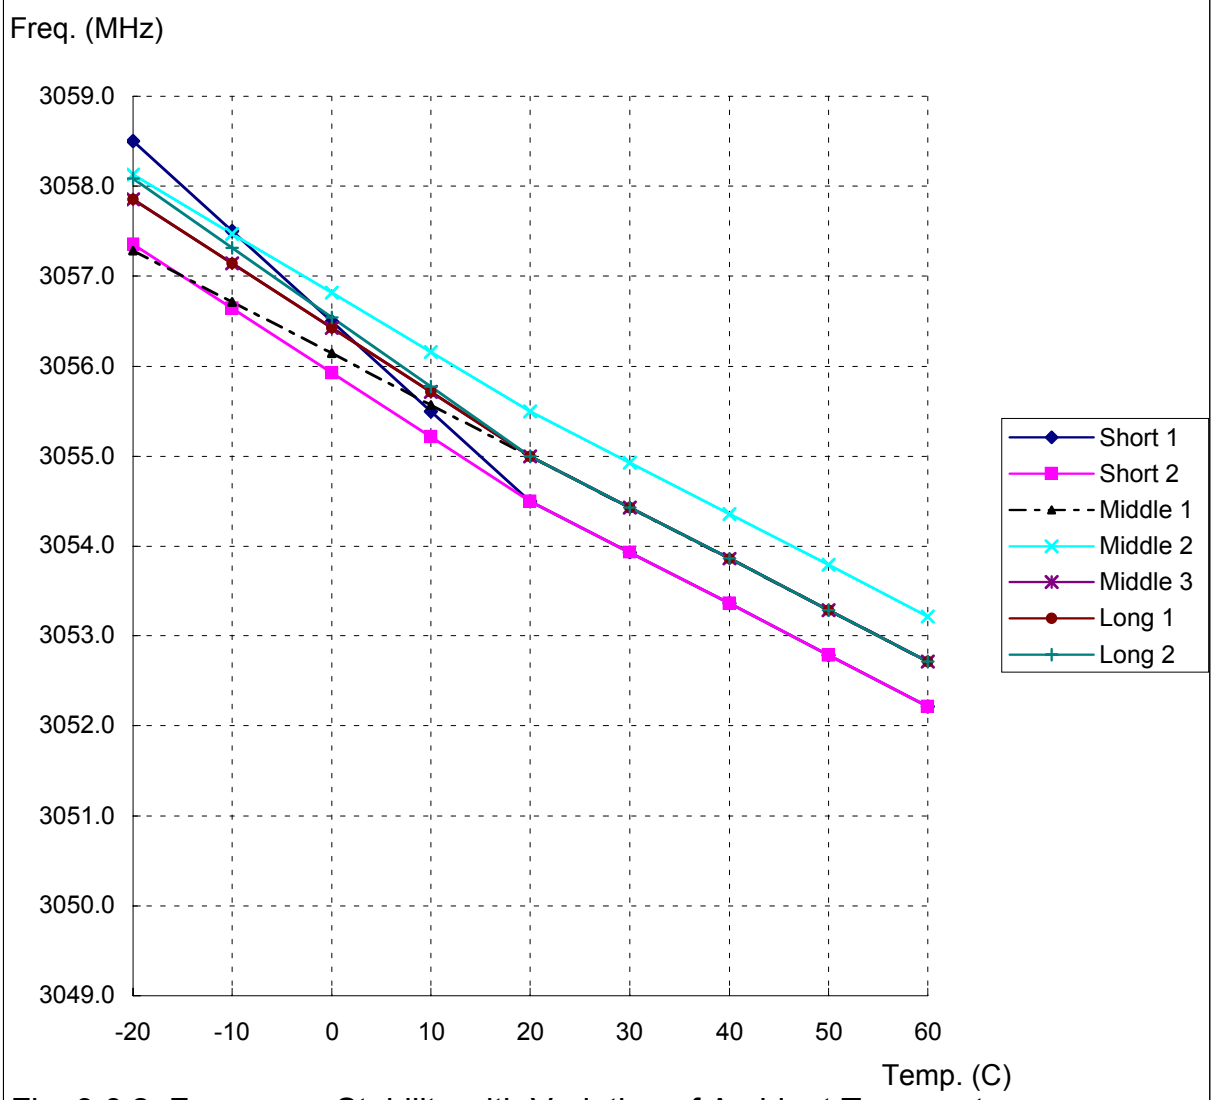

Fig. 3.6.2 Frequency Stability with Variation of Ambient Temperature

3.7 Suppression of Interference Aboard Ships (FCC Rule, 80.217)

3.7.1 Measuring Antenna Characteristics at Representative Frequencies:

Whip antennas are used to determine the level of interference caused by the radar to shipboard receivers. These antennas have the following characteristics (refer to impedance charts attached):

Length	Test Frequency (Hz)	Impedance (Ω)	θ	R (Ω)	C or L
6 m	500.5 k	1 k	-90°	0	80 pF
6 m	1.992 M	1.25 k	-86°	87.2	64 pF
6 m	10.00204 M	158		109	140 pF
4 m	27.5 M	95		83.5	128 pF
5/8 λ	150 M	116.5		105.5	52.5 nH
1/4 λ	450 M	70.5		34.5	5.68 pF

3.7.2 Test Site:

Rooftop of 6-story building,
Furuno Electric Company, Ltd.
Ashihara-cho 9-52, Nishinomiya-city, 662-8580 JAPAN

3.7.3 Measuring Instrument List:

See Attachment D [List of Test/Measuring Equipment].
(Instruments for measuring antenna characteristics are listed below.)

(1) Network Analyzer, HP 8753C
(2) Spectrum Analyzer, ADVANTEST TR4172
(3) Spectrum Analyzer, HP 8566B
(4) Antennas,
for 14 k - 10 MHz, 6 m whip
for 10 - 30 MHz, 4 m whip
for 30 - 300 MHz, VHF whip
for 300 - 1000 MHz, UHF whip

3.7.4 Test Results:

Interference levels to the respective antenna were measured at 2 m from the radar which was put in OFF and TRANSMIT conditions, and found within the specified limits.

3.7.4.1 **Harmful Interference to Receiver** (FCC Rule, 80.217 (a))

Limits: for 14 - 490 kHz, 5 μV/m
for 490 kHz - 1 GHz, 1 μV/m

Results: There is no spurious component which is deemed harmful interference. (Test data are shown in Attachment C.)

3.7.4.2 **Electromagnetic Field** (FCC Rule, 80.217 (b) - 1)

Limits: for below 30 MHz, 0.1 μV/m at 1 nm (-20 dBμV/m)
for 30 to 100 MHz, 0.3 μV/m at 1 nm (-10.5 dBμV/m)
for 100 to 300 MHz, 1.0 μV/m at 1 nm (0 dBμV/m)
for over 300 MHz, 3.0 μV/m at 1 nm (9.5 dBμV/m)

Results: Interference was measured with the antenna located 2 m from the radar and converted to levels at 1 nm. There is no spurious component exceeding the limits.
(Test data are shown in Attachment C.)

3.7.4.3 **Power Input to an Artificial Antenna** (FCC Rule, 80.217 (b) - 2)

Limits: for below 30 MHz, 400 μW
for 30 to 100 MHz, 4,000 μW
for 100 to 300 MHz, 40,000 μW
for over 300 MHz, 400,000 μW

Results: There is no spurious component exceeding the limits.
(Test data are shown in Attachment C.)

MEASUREMENT OF IMPEDANCE OF TEST ANTENNAS

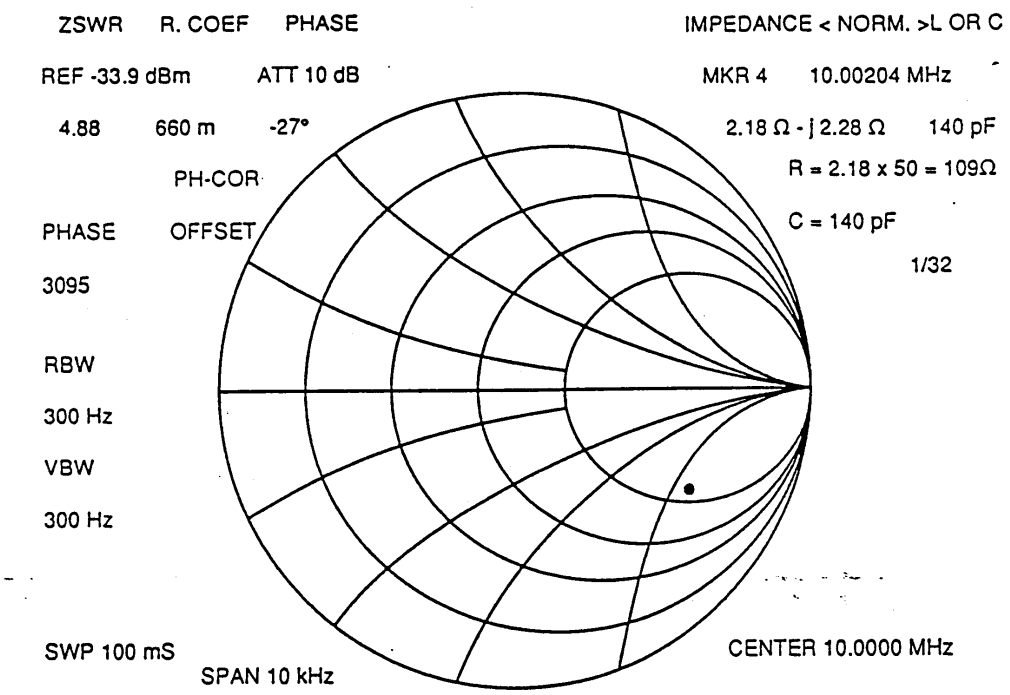

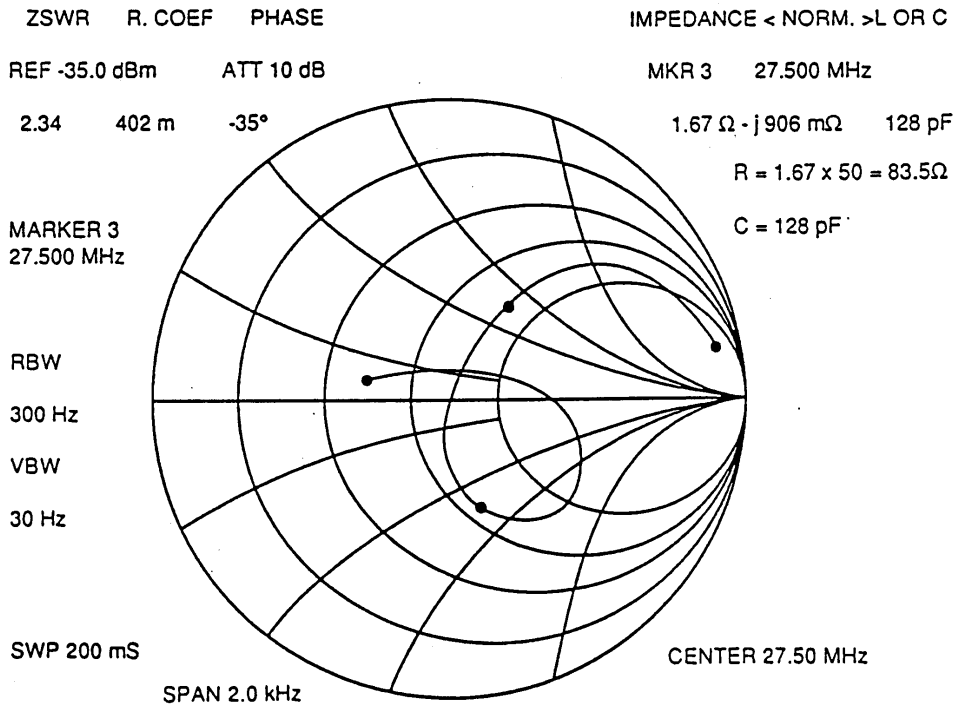

MEASUREMENT OF IMPEDANCE OF TEST ANTENNAS

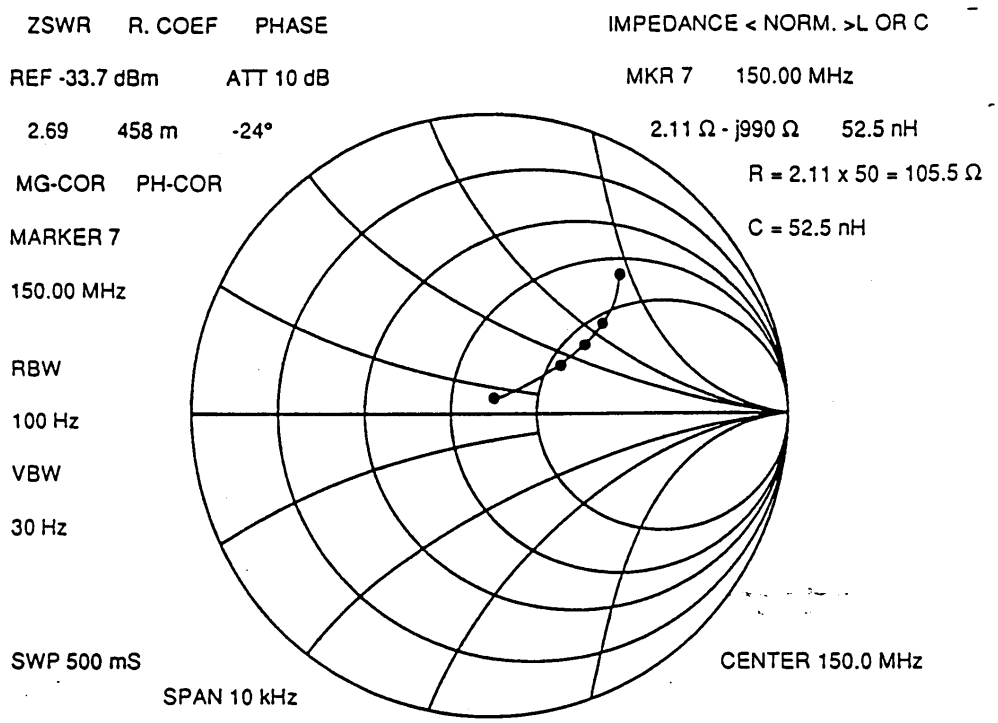

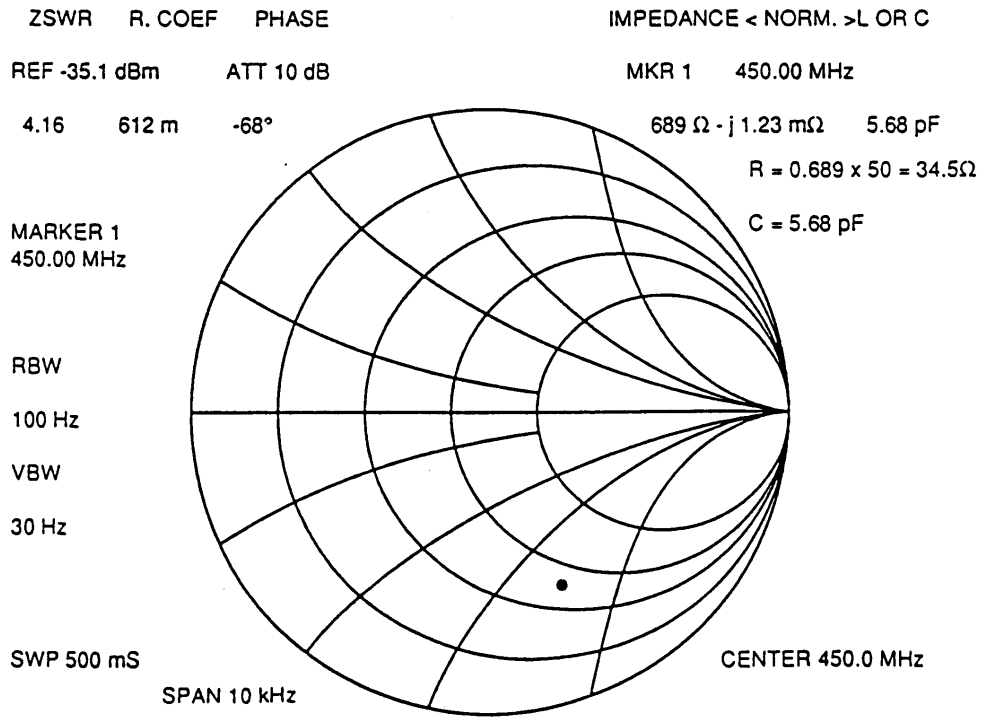

4 Photographs to Reveal Equipment Construction and Layout (FCC Rule, 2.1033)

(See Attachment E Photos of the Equipment Under Test (EUT))

5 Description of Circuitry and Devices (FCC Rules, 2.1033)

5.1 Function of Each Semiconductor or Active Device

TRANSCEIVER UNIT RTR-082

RF unit controller PCB 03P9346 (RFC)

CR1 - CR4:	Voltage protection
CR5:	Rectifier
CR6 - CR8:	Voltage protection
CR9:	LED
Q1 - Q4:	Pulse amplifier
Q5 - Q12:	Transistor switch
U1:	Operational amplifier
U2:	Voltage regulation
U3:	Buffer
U4:	Voltage regulation
U5:	Operational amplifier
U6:	Oscillator
U7:	A/D converter
U8:	Comparator
U9:	Inverter
U10 - U11:	Buffer

Modulator PCB 03P9244 (MD)

CR1 - CR3, CR5:	Reverse-Voltage Protection
CR4:	Rectifier
Q1-Q4, Q21:	Switching
Q5 - Q20:	FET Gate Driver
U1:	Regulator
U2:	Photo-Coupler

Chassis Mounted Parts

CR802 - CR803:	Clipper
CR801:	Limiter

HY801:	3 Ports Circulator
U801:	MIC Frequency Converter with Limiter
V801:	Magnetron

IF amplifier PCB 03P9335 (IF AMP)

CR1:	Reverse voltage protection
CR2:	RF detection
CR3 - CR4:	Voltage shifter
CR5:	RF gate
CR6:	Reverse voltage protection
CR7:	Voltage shifter
CR8 - CR9:	RF limiter
CR10:	RF switch
Q1:	RF switch
Q2 - Q3:	Pulse amplifier
Q4:	RF switch
U1:	Comparator
U2:	Pulse amplifier
U3:	Log detector
U4:	Gated amplifier
U5:	Comparator
U6:	Switch
U7:	Variable gain controller
U8:	DC regulator
U9:	Variable gain controller
U10:	Switch
U11 - U12:	Video amplifier
U15:	DC regulator
U16:	Pulse amplifier
U17:	NAND gate
U18:	Comparator
U19:	DC regulator
U20 - U22:	3 dB Hybrid
U23:	Comparator
U24:	AND gate

Terminal Board 03P9349 (TB)

Active device: none.

Power Board 03P9348 (PWR)

CR1:	Q3 driver
CR2:	Protection for Reverse connection
CR11, CR21, CR31, CR41:	Switching
CR42:	Q41 driver
CR51:	Switching
CR52:	Reverse voltage protection
Q1 - Q2:	Q3 driver
Q3:	Switching
Q11:	Overcurrent protection
Q22 - Q24:	Switching
Q31:	Overcurrent protection
Q41:	Switching
Q42:	Q41 driver
U1:	5 V regulator
U2:	Voltage detector
U11:	12 V line switching controller
U12:	12 V line overcurrent detector
U21:	Magnetron heater line switching controller
U22:	5 V line overcurrent detector
U31:	5 V line switching controller
U41:	-12 V line switching controller
U51:	32 V line series regulator

ANTENNA (Scanner) UNIT RSB-104

Bearing Signal Generator PCB 03P9347 (BP GEN)

U1:	Comparator
U3:	Photo-interrupter
Q3 - Q4:	Buffer

5.2 Description of the circuitry and devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation, and for limiting power

TRANSCEIVER UNIT RTR-082

RF unit controller PCB 03P9346 (RFC)

In the RFC Board, the following 4 main functions are incorporated:

(1) generating TX modulator trigger pulses with the specified pulse-length that fire the modulator FETs in MD Board.
TX trigger signals that are transmitted with the form of serial commands from the Processor unit trigger the internal digital counter included in the Field Programmable Gate Array U17 for counting up to the specified value, and then the TX modulator trigger pulses with the specified pulse-length are produced.

(2) controlling the tuning voltage input to the MIC.
Micro-Processor U19 reads the tuning indication voltage transferred from the IF Amplifier Board through the internal A/D converter and generates/adjusts the tuning voltage through the internal D/A converter for maximizing the tuning indication voltage by using the feedback-control technologies.

(3) generating the Gain- and STC-control voltages to input the IF Amplifier Board.
According to the control parameters transferred from the Processor unit, Micro-Processor U19 calculates the Gain and STC control voltages (waveforms) and places those data into the internal memory of the Field Programmable Gate Array U17, and generates the Gain- and STC-control voltages through the D/A converter U13.

(4) transferring the Heading and Bearing signals with the form converted to the serial commands to the Processor unit.
The Heading and Bearing signals transferred from BP GEN Board is converted to the specified serial bit streams (commands) in the Field Programmable Gate Array U17, and then output to the Processor unit.

Modulator Board 03P9244 (MD)

The function of the modulator board is to produce a high tension pulse that drives the magnetron.

The high voltage (TX-HV) is charged into C1 to C4 through R1/R2 while the magnetron is inactive. This high voltage is discharged through the pulse transformer T801 when FETs Q1 - Q4 are conductive. T801 boosts the voltage and makes the magnetron oscillate.

Because the magnetron oscillates only when the FET is conductive, transmission pulselength can be changed by the pulselength fed to the gates of FETs.
Also the magnetron current is proportional to the discharging current via the FETs, thus the transmission power can be changed by the number of FETs conductive.

The four pulses TRIG.1 to TRIG.4 are produced on the RFC board and applied to the gates of Q1/Q2/Q3/Q4 via the current amplifiers Q5 to Q20.

The relay K1 and coil L1 are provided to eliminate the ringing at the trailing edge of the transmission pulse across the primary winding of T801. This relay is active when the short pulse 1 (Short 1) is selected.

Duplexer and Mixer

Since the radar system uses a single antenna for transmission and reception, and the efficient device is required for switching the transmitter and the receiver, this radar employs circulator HY801. The circulator HY801 is a passive directional coupler with three ports. The incoming signal is bent in the specific direction and emerges from another port with little loss, the other port being isolated. In the same manner, the received signal entering into another port is transferred to the other port, isolating one port. This operation of the circulator protects the receiver during transmission and minimizes loss of the received signal during reception.

The diode limiter is a self-activating switch made of two PIN diodes. Its function is to attenuate the strong transmission signals from the magnetron and other boat radars through the antenna and to protect the MIC (microwave IC) U801. The PIN diode conducts at a certain level of microwave power. When the diode is the cut-off state, the input impedance of the diode limiter matches the impedance of the waveguide, and the microwave energy is delivered to the MIC. When the diode is put into a conductive state, the waveguide is short-circuited and most of the input energy is reflected back to the transmitter side. The strong signal is thus weakened down to about 50 mW by the diode

limiter.

U801 is a microwave IC (MIC) incorporating a local oscillator and mixer diodes. The received microwave signal of 3050 MHz coming from the diode limiter is mixed with the local oscillation signal in the mixer diodes and converted to IF signal of 60 MHz.

IF amplifier PCB 03P9335 (IF AMP)

The 60 MHz IF signal from MIC is amplified by the IF amplifier, gain- and STC-controlled and delivered to the Processor unit.

The IF amplifier consists of 5 main parts, i.e. the first stage amplifiers (Q1, Q2 and Q3,) VGA (Variable Gain Amplifiers) (U7 and U9), the driver amplifier (U16), the logarithmic amplifier (U3) and the tuning amplifier (U2, T2, T4, U4, U6 and U5) for tuning indicator.

- In the first stage amplifiers Q2 and Q3, the input IF signal is split into 2 stages by the 3 dB Hybrid Splitter U20 and then each of the split IF signals are amplified, and finally combined by the 3 dB Hybrid Combiner U21 for improving the saturation level of the IF signal.
- In the VGA (U7 and U9), the IF signal is gain- and STC-controlled.
- In the driver amplifier (U16), the cable loss of IF signal caused between the Antenna unit and the Processor unit is compensated precedently. The amplified IF signal is then output through the TNC type connector (J823) of which the output impedance is 75 Ω.
- In the logarithmic amplifier (U3), the 60 MHz IF signal is detected and the video signal is generated. The video signal is also used for the Sub-display and for the auto-STC control. The video signal for the Sub-display is combined with the 60 MHz IF signal from the driver amplifier U16 by the Duplexer located in the output stage, and then output through the TNC type connector (J823) of which the output impedance is also 75 Ω.
- In the tuning amplifier (U2, T2, T4, U4, U6 and U5) for the tuning indicator, the 60 MHz IF signal from MIC is amplified by the IF amplifier U2, filtered with the band width of 2 MHz by the T2, amplified with the timing gate, detected by the diode CR2, and then output through the buffered amplifier U5. This detected signal consists of a DC voltage with the peak for the center frequency of the 60 MHz input IF signal.

ANTENNA (Scanner) UNIT RSB-104

Bearing Signal Generator PCB 03P9347 (BP GEN)

Bearing signal generator in the PCB generates a square wave signal used for synchronizing the sweep-rotation of the Display with the rotation of the Antenna radiator.

U3 Photo-interrupter is composed of a LED and a photo-transistor, and in the shape of “U”.

The LED and the photo-transistor are enclosed in the U-shaped package with a gap that the rotating timing disc goes through.

The timing disc is provided with 60 slits at regular intervals along its perimeter. This disc is fitted on the scanner motor shaft and rotated at a speed of 360 rpm.

The photo-transistor receives the LED light through the slit of the timing disc, and converts into the electric current. The output of the photo-transistor generates the signal voltage across R3, and then is reshaped by the comparator IC U1, and buffered and sent to the Processor unit for the use of the sweep-rotation signal.

6 Operator's Manual Incl. Circuit Diagrams (FCC Rule, 2.1033)

(See separate covers)

Attachment A

[TEST DATA for Clause 3.4. SPURIOUS EMISSIONS AT ANTENNA TERMINALS]

1. Spurious emissions for 0.125 nm Range:

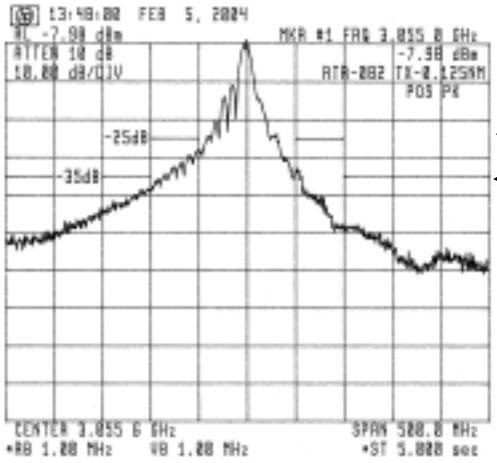

Ref. level: -7.98 dBm

Emission limitations:

(a) 25 dB for 50 to 100 % of the authorized BW (100 MHz)

(b) 35 dB for 100 to 250 % of the authorized BW (100 MHz)

Fig. 1.1 Without Filter

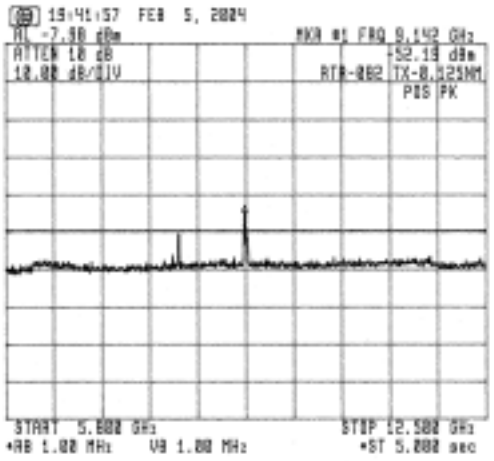

Emission limitations:

(c) 43 + 10 log Pm = 49.39 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 1.2 With Filters No.1+No.2

Note: 3rd-order harmonics detected.
Spurious emission level corrected: -82.36 dBm.
Margin for Spurious emission limit: 32.97 dB.

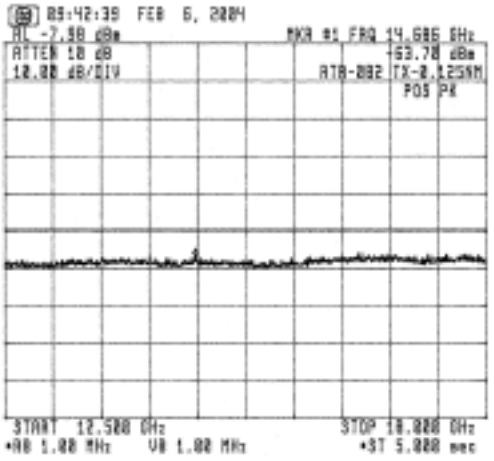

Emission limitations:

(c) 43 + 10 log Pm = 49.39 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 1.3 With Filters No.1+ No. 2

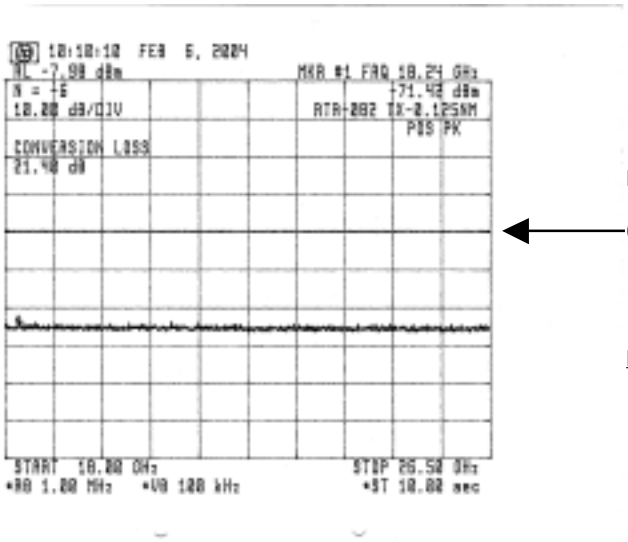

Emission limitations:

(c) 43 + 10 log Pm = 49.39 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 1.4 With Filters No.1+ No. 2

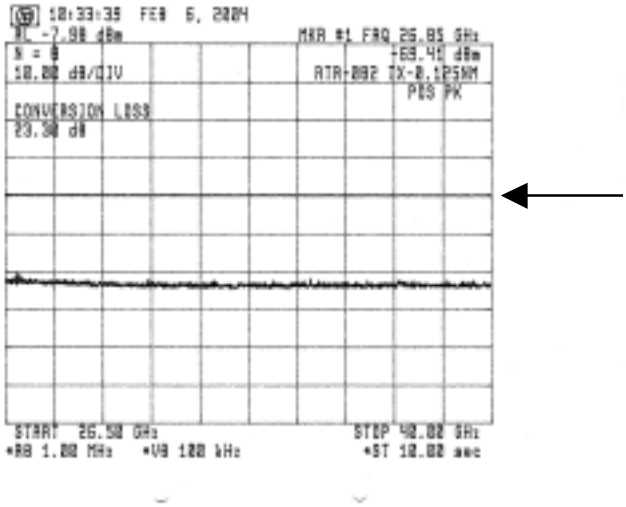

Emission limitations:

(c) 43 + 10 log Pm = 49.39 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 1.5 With Filters No.1+ No. 2

2. Spurious emissions for 3 nm Range:

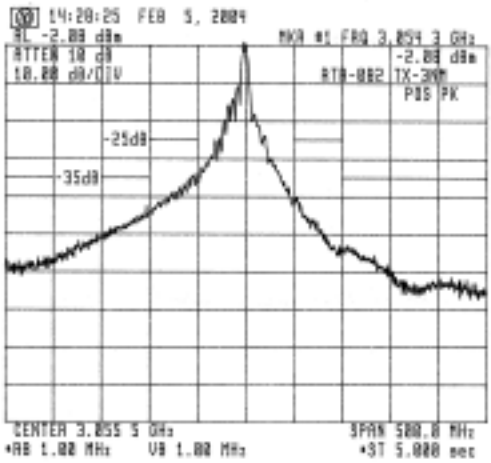

Ref. level: -2.08 dBm

Emission limitations:

(a) 25 dB for 50 to 100 % of the authorized BW (100 MHz)

(b) 35 dB for 100 to 250 % of the authorized BW (100 MHz)

Fig. 2.1 Without Filter

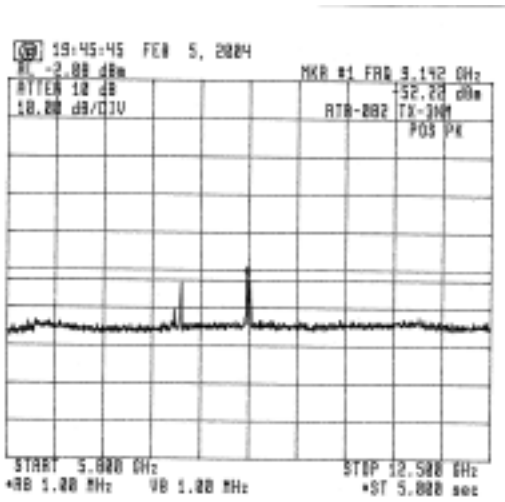

Emission limitations:

(c) 43 + 10 log Pm = 52.51 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 2.2 With Filters No.1+No.2

Note: 3rd-order harmonics detected.
Spurious emission level corrected: -88.29 dBm.
Margin for Spurious emission limit: 35.78 dB.

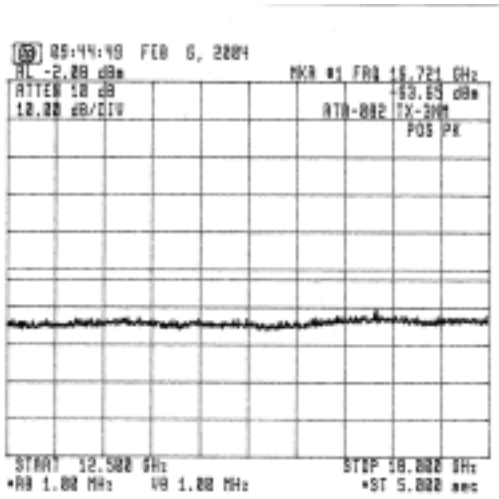

Emission limitations:

(c) 43 + 10 log Pm = 52.51 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 2.3 With Filters No.1+ No. 2

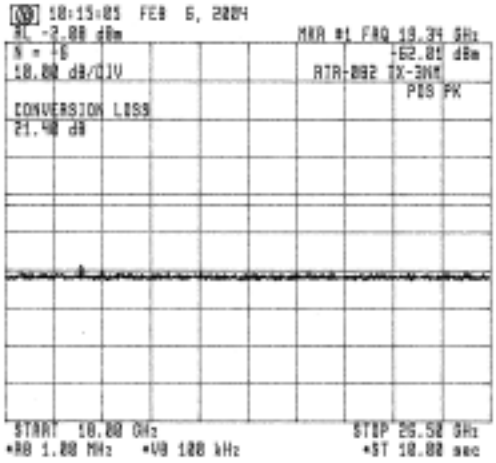

Emission limitations:

(c) 43 + 10 log Pm = 52.51 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 2.4 With Filters No.1+ No. 2

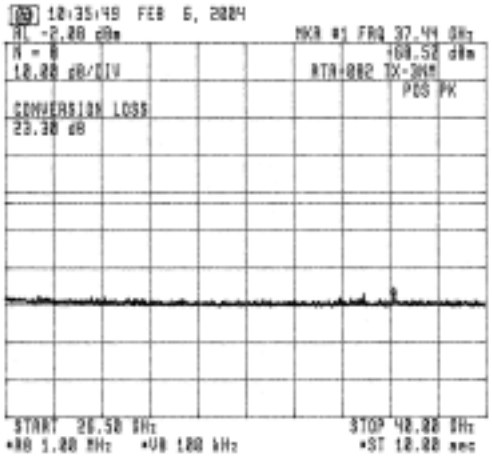

Emission limitations:

(c) 43 + 10 log Pm = 52.51 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 2.5 With Filters No.1+ No. 2

3. Spurious emissions for 6 nm Range:

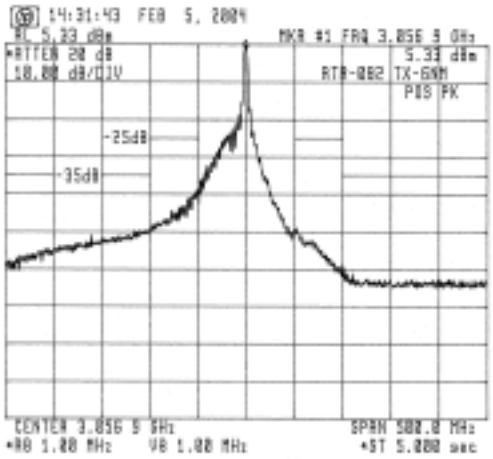

Ref. level: 5.33 dBm

Emission limitations:

(a) 25 dB for 50 to 100 % of the authorized BW (100 MHz)

(b) 35 dB for 100 to 250 % of the authorized BW (100 MHz)

Fig. 3.1 Without Filter

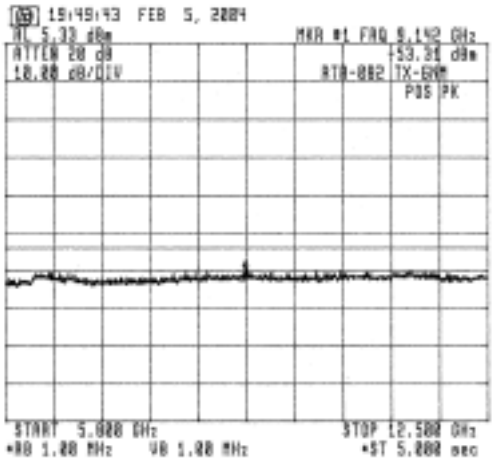

Emission limitations:

(c) 43 + 10 log Pm = 53.63 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 3.2 With Filters No.1+No.2

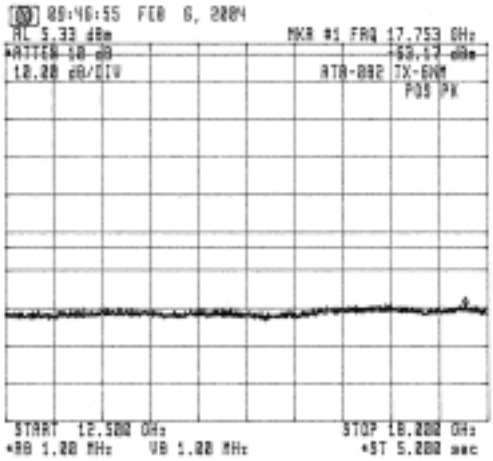

Emission limitations:

(c) 43 + 10 log Pm = 53.63 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 3.3 With Filters No.1+ No. 2

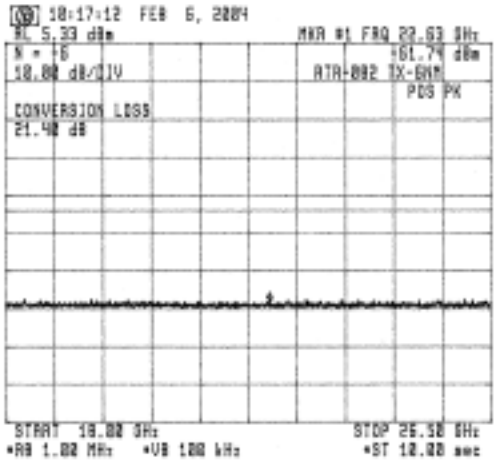

Emission limitations:

(c) 43 + 10 log Pm = 53.63 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 3.4 With Filters No.1+ No. 2

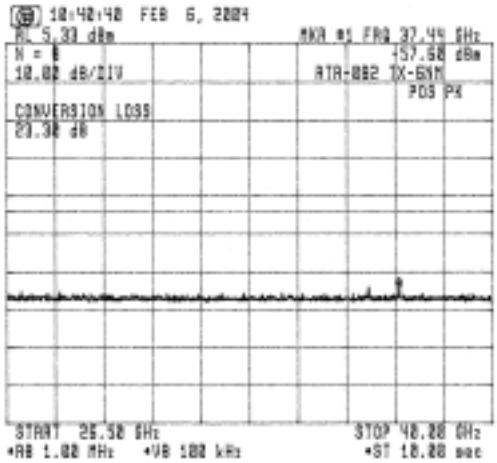

Emission limitations:

(c) 43 + 10 log Pm = 53.63 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 3.5 With Filters No.1+ No. 2

4 Spurious emissions for 12 nm Range:

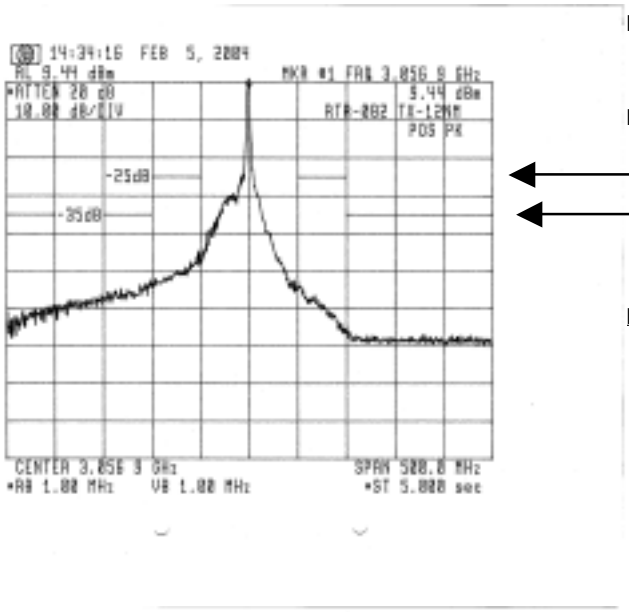

Ref. level: 9.44 dBm

Emission limitations:

(a) 25 dB for 50 to 100 % of the authorized BW (100 MHz)

(b) 35 dB for 100 to 250 % of the authorized BW (100 MHz)

Fig. 4.1 Without Filter

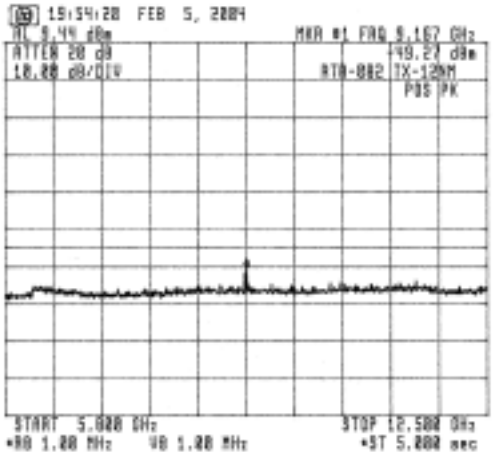

Emission limitations:

(c) 43 + 10 log Pm = 54.48 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 4.2 With Filters No.1+No.2

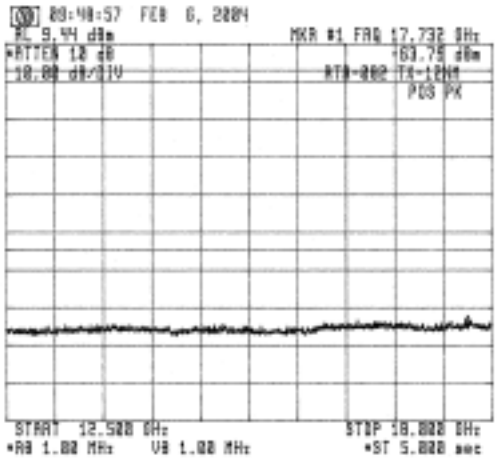

Emission limitations:

(c) 43 + 10 log Pm = 54.48 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 4.3 With Filters No.1+ No. 2

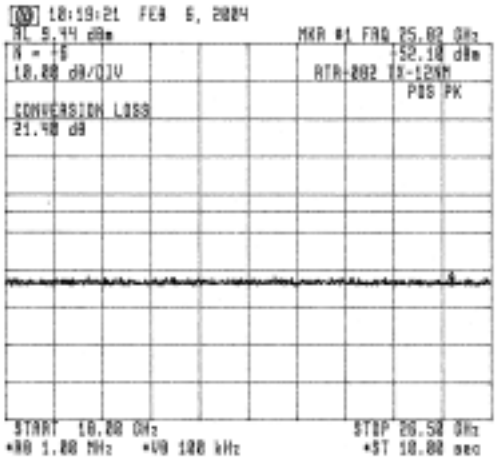

Emission limitations:

(c) 43 + 10 log Pm = 54.48 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 4.4 With Filters No.1+ No. 2

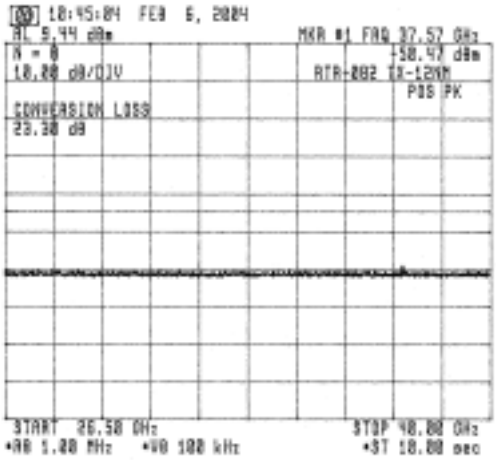

Emission limitations:

(c) 43 + 10 log Pm = 54.48 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 4.5 With Filters No.1+ No. 2

5 Spurious emissions for 24 nm Range:

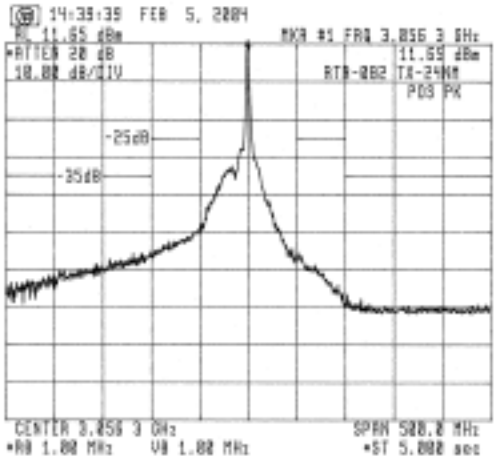

Ref. level: 11.65 dBm

Emission limitations:

(a) 25 dB for 50 to 100 % of the authorized BW (100 MHz)

(b) 35 dB for 100 to 250 % of the authorized BW (100 MHz)

Fig. 5.1 Without Filter

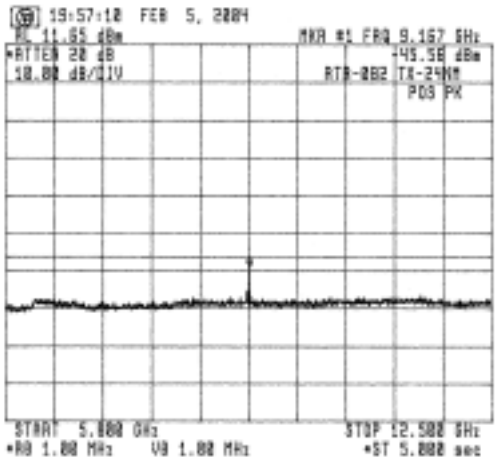

Emission limitations:

(c) 43 + 10 log Pm = 56.11 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 5.2 With Filters No.1+No.2

Note: 3rd-order harmonics detected.
Spurious emission level corrected: -96.36 dBm.
Margin for Spurious emission limit: 40.25 dB.

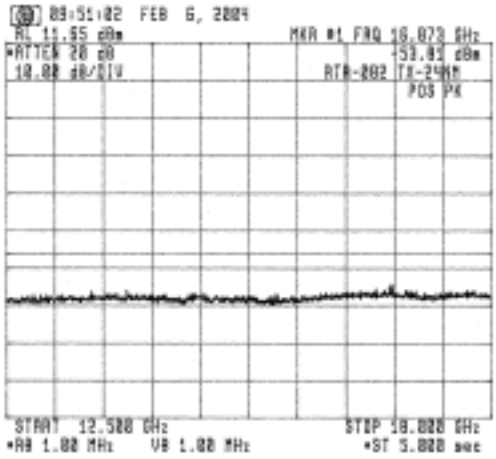

Emission limitations:

(c) 43 + 10 log Pm = 56.11 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 5.3 With Filters No.1+ No. 2

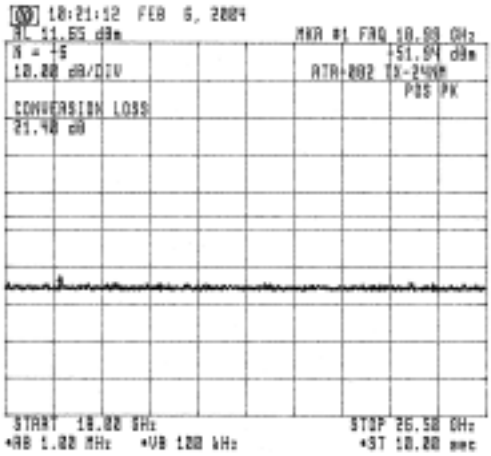

Emission limitations:

(c) 43 + 10 log Pm = 56.11 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 5.4 With Filters No.1+ No. 2

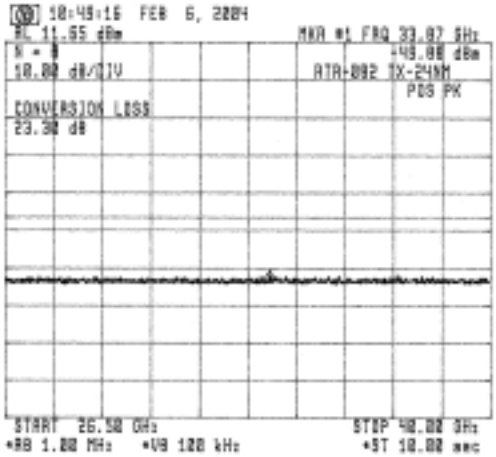

Emission limitations:

(c) 43 + 10 log Pm = 56.11 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 5.5 With Filters No.1+ No. 2

6 Spurious emissions for 48 nm Range:

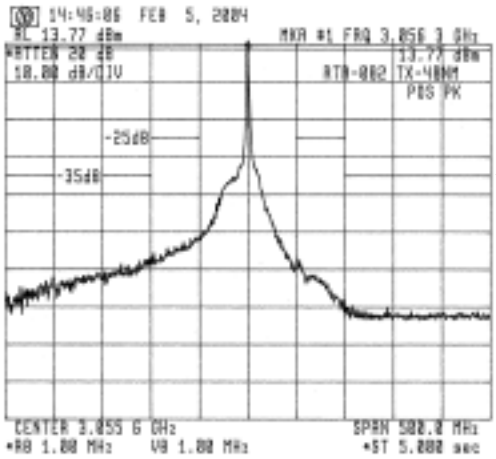

Ref. level: 13.77 dBm

Emission limitations:

(a) 25 dB for 50 to 100 % of the authorized BW (100 MHz)

(b) 35 dB for 100 to 250 % of the authorized BW (100 MHz)

Fig. 6.1 Without Filter

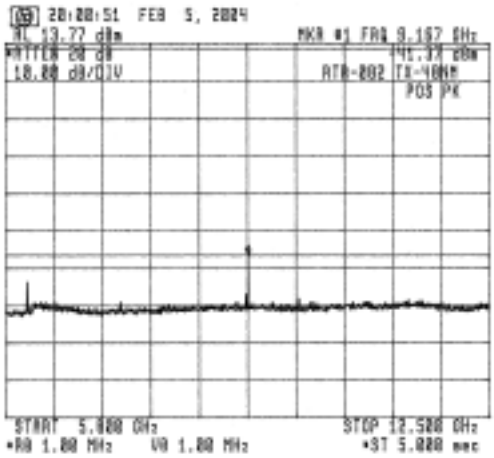

Emission limitations:

(c) 43 + 10 log Pm = 56.18 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 6.2 With Filters No.1+No.2

Note: 3rd-order harmonics detected.
Spurious emission level corrected: -94.29 dBm.
Margin for Spurious emission limit: 38.11 dB.

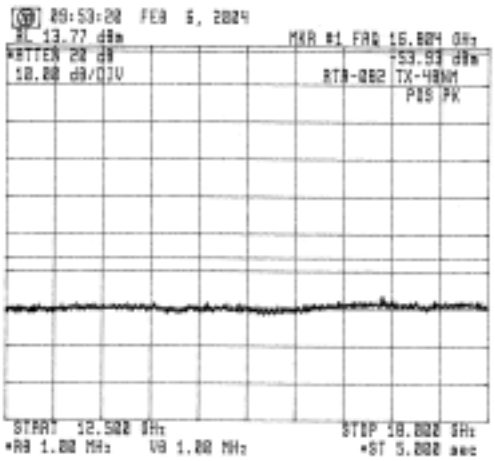

Emission limitations:

(c) 43 + 10 log Pm = 56.18 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 6.3 With Filters No.1+ No. 2

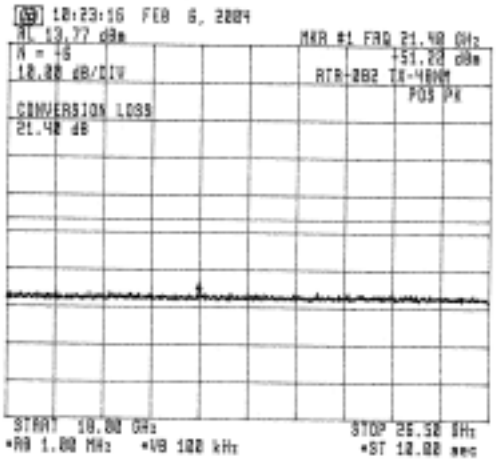

Emission limitations:

(c) 43 + 10 log Pm = 56.18 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 6.4 With Filters No.1+ No. 2

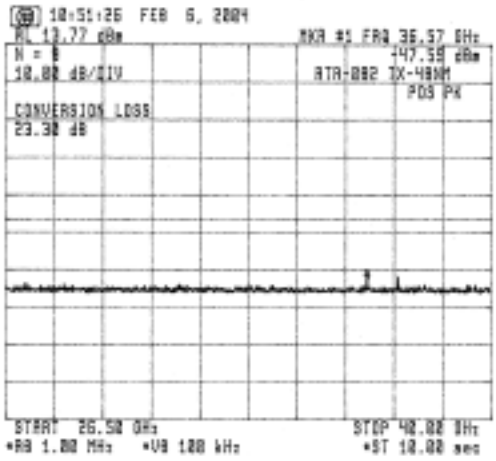

Emission limitations:

(c) 43 + 10 log Pm = 56.18 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 6.5 With Filters No.1+ No. 2

7 Spurious emissions for 96 nm Range:

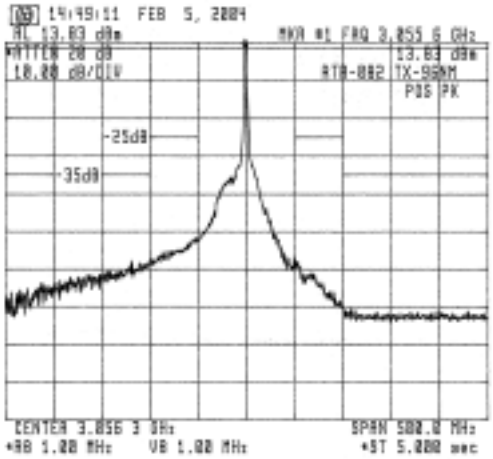

Ref. level: 13.83 dBm

Emission limitations:

(a) 25 dB for 50 to 100 % of the authorized BW (100 MHz)

(b) 35 dB for 100 to 250 % of the authorized BW (100 MHz)

Fig. 7.1 Without Filter

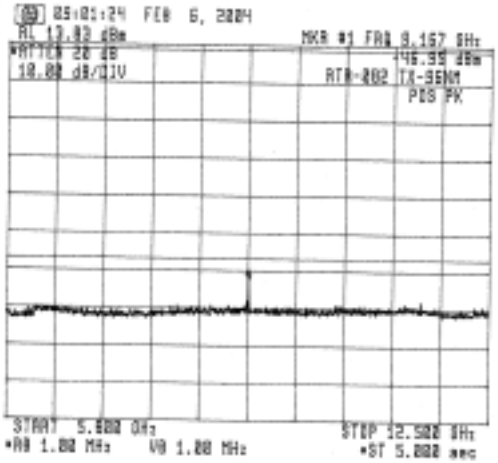

Emission limitations:

(c) 43 + 10 log Pm = 55.41 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 7.2 With Filters No.1+No.2

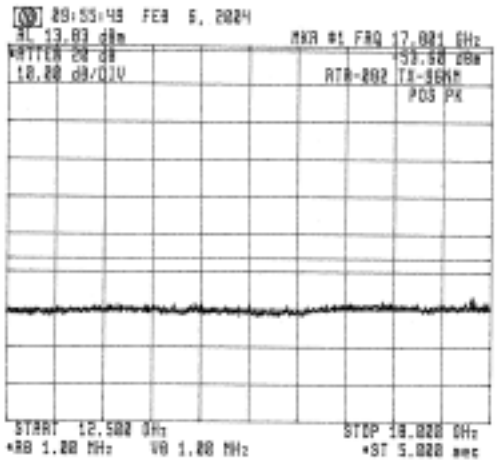

Emission limitations:

(c) 43 + 10 log Pm = 55.41 dB for more than 250 % of the authorized BW (100 MHz)

Fig. 7.3 With Filters No.1+ No. 2

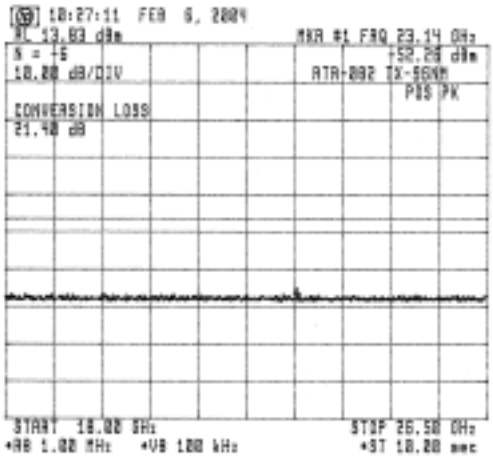

Emission limitations:

(c) 43 + 10 log Pm = 55.41 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 7.4 With Filters No.1+ No. 2

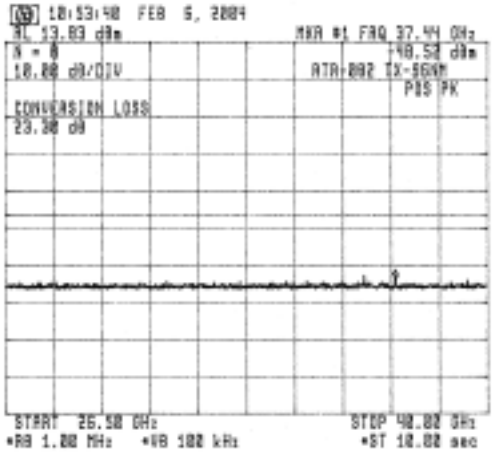

Emission limitations:

(c) 43 + 10 log Pm = 55.41 dB
for more than 250 % of
the authorized BW (100 MHz)

Fig. 7.5 With Filters No.1+ No. 2

Attachment B TEST DATA for Clause 3.5 FIELD STRENGTH OF SPURIOUS RADIATION

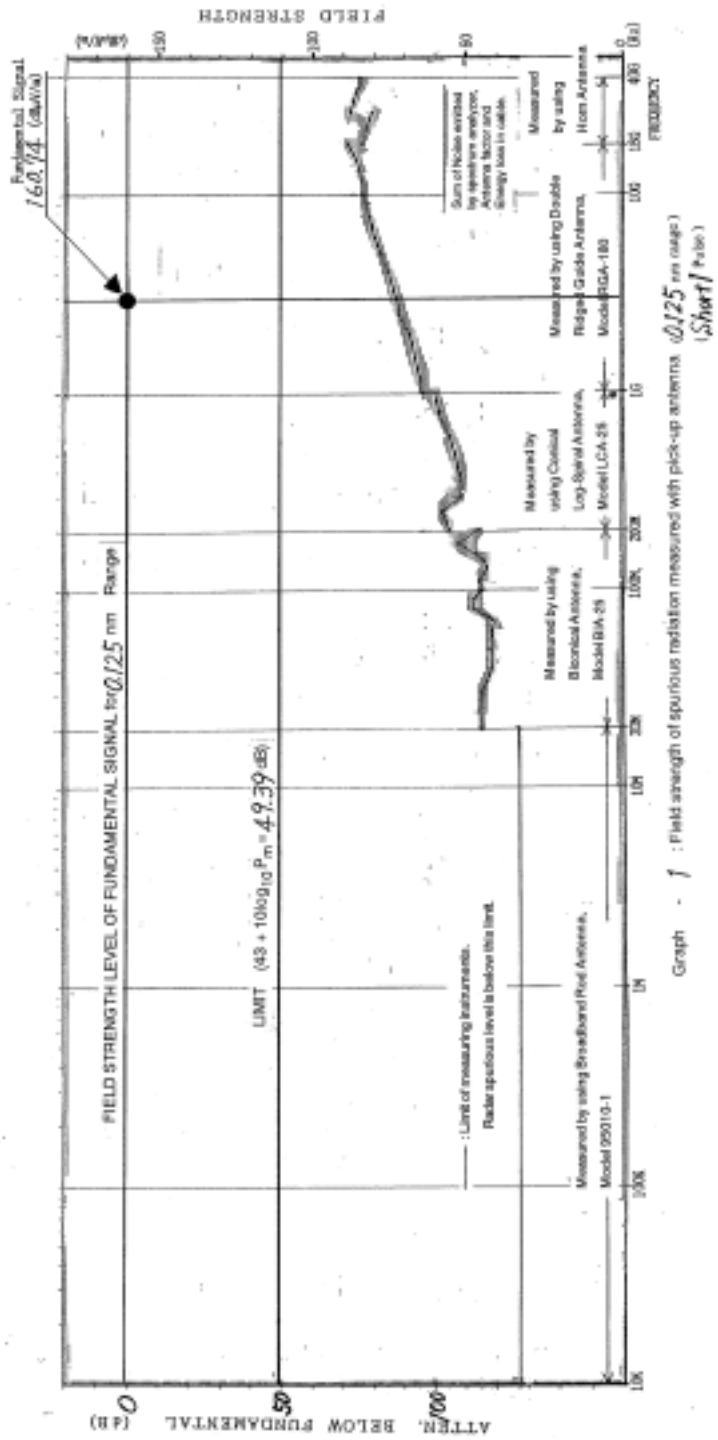

Graph - 1 : Field strength of spurious radiation measured with pick-up antenna 0.125 nm range (Short Pulse)

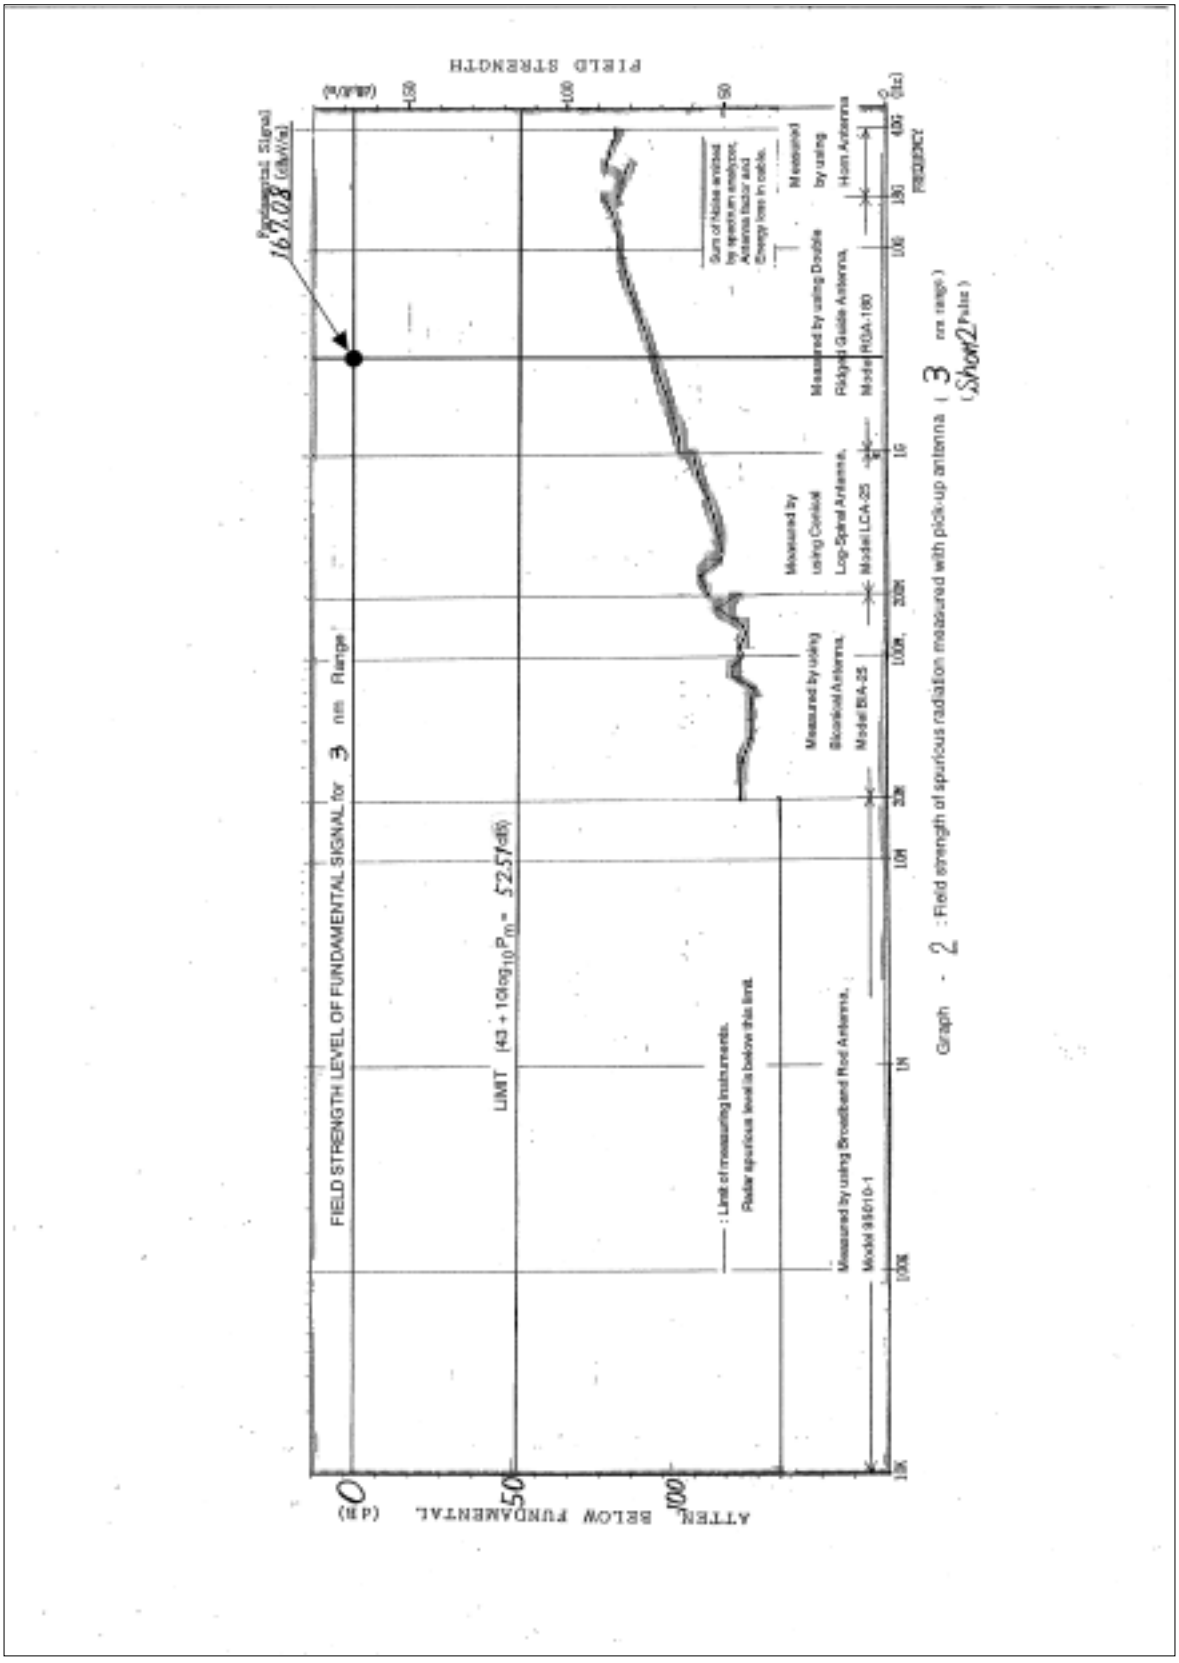
FIELD STRENGTH
FIELD STRENGTH LEVEL OF FUNDAMENTAL SIGNAL for 3 nm Range
LIMIT (43 + 10log10Pm = 52.5 (dB))
Measured by using Broadband Rod Antenna, Model 95010-1
Measured by using Biconical Antenna, Model BIA-25
Measured by using Conical Log-Spiral Antenna, Model LCA-25
Measured by using Double Ridged Guide Antenna, Model RGA-180
Measured by using Horn Antenna
Sum of Noise emitted by spectrum analyzer, Antenna factor and Energy loss in cable.
Limit of measuring instruments.
Radar spurious level is below this limit.
ATTEN. BELOW FUNDAMENTAL (dB)
FREQUENCY
Graph - 2 : Field strength of spurious radiation measured with pick-up antenna (3 nm range)
(Short 2 Pulse)

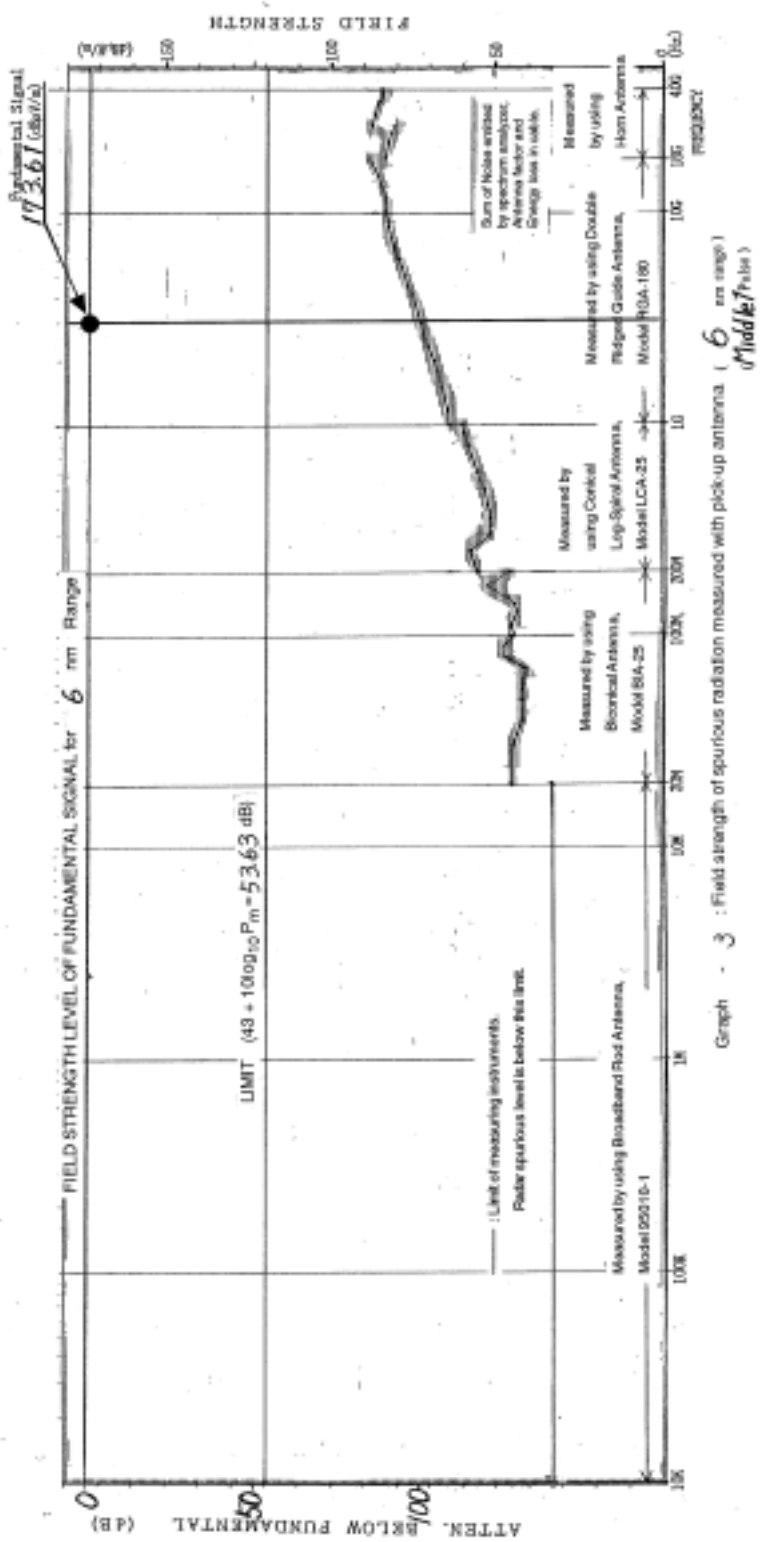

Graph - 3 : Field strength of spurious radiation measured with pick-up antenna (6 mm range) Middle (Pulse)

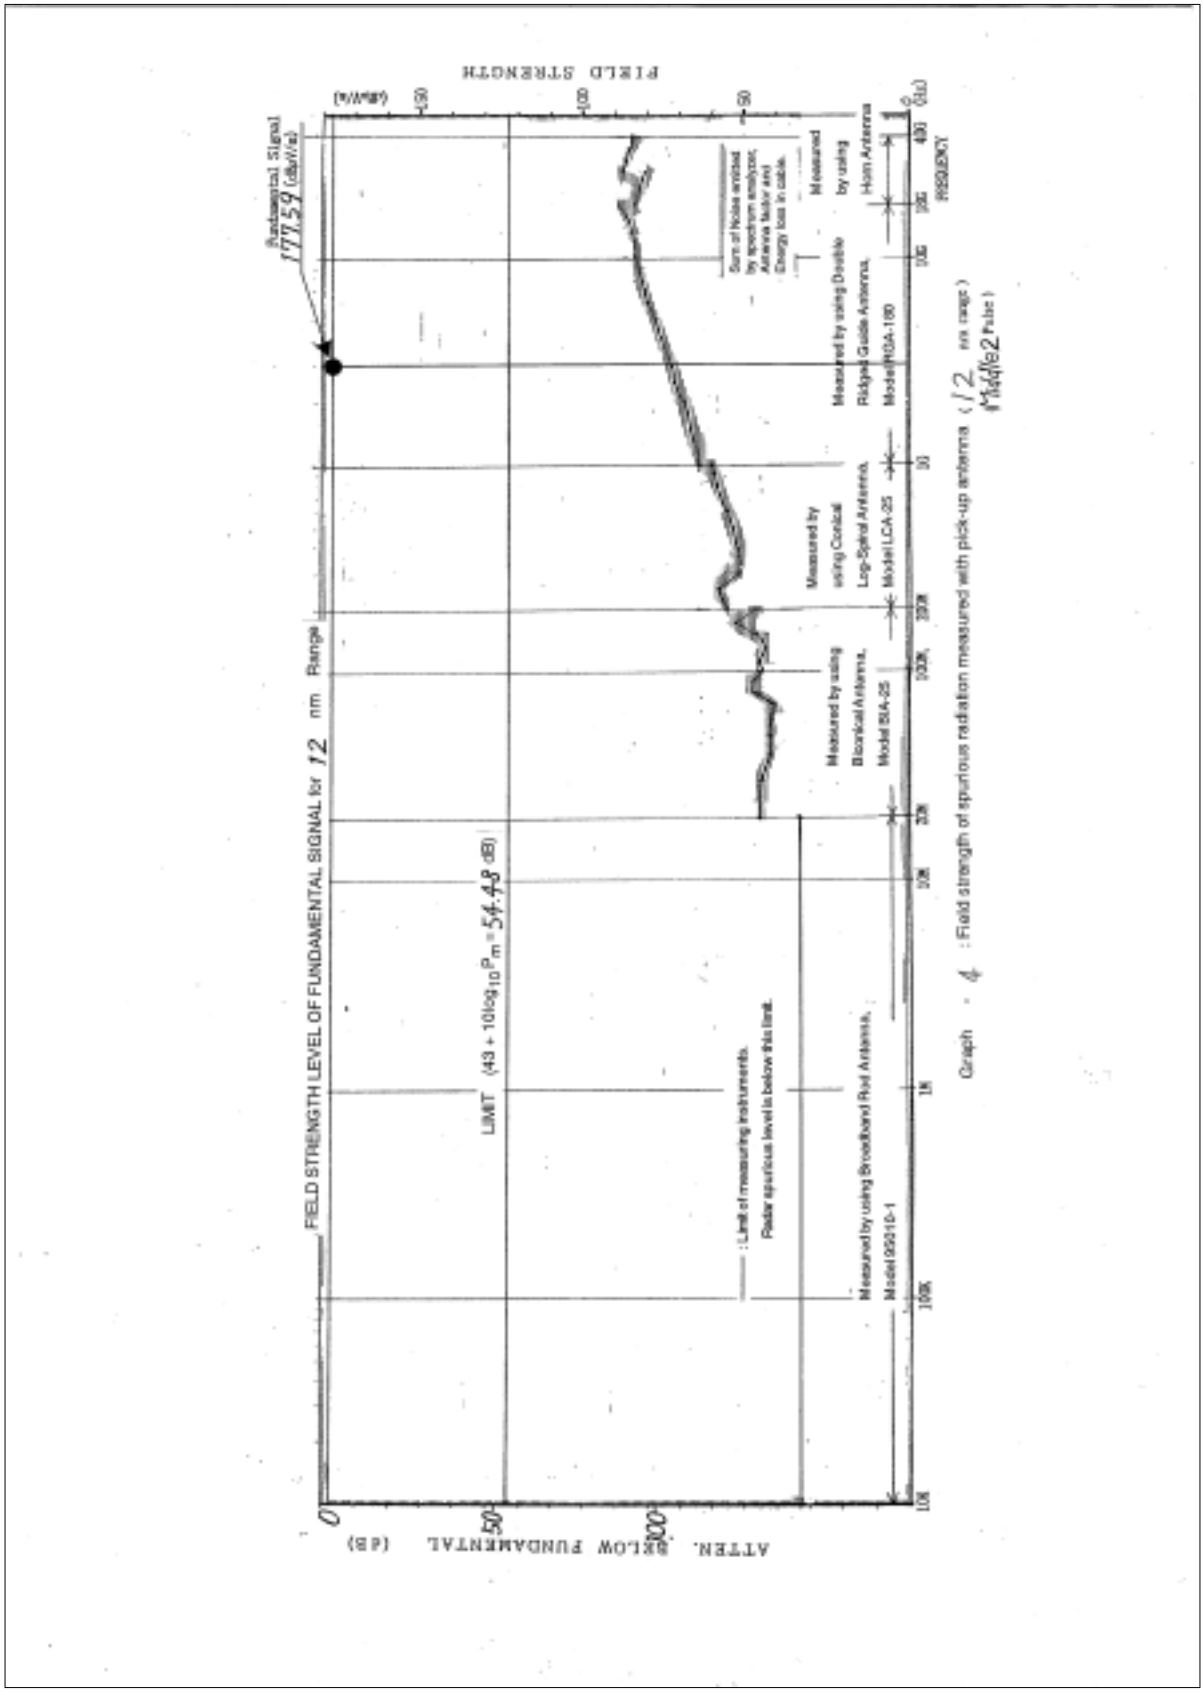
FIELD STRENGTH LEVEL OF FUNDAMENTAL SIGNAL for 12 nm Range
Fundamental Signal 177.59 (dBμV/m)
LIMIT (43 + 10log10 Pm = 54.48 dB)
: Limit of measuring instruments.
Radar spurious level is below this limit.
Measured by using Broadband Rod Antenna, Model 95010-1
Measured by using Biconical Antenna, Model BSA-25
Measured by using Conical Log-Spiral Antenna, Model LCA-25
Measured by using Double Ridged Guide Antenna, Model RGA-180
Measured by using Horn Antenna
Sum of Noise emitted by spectrum analyzer, Antenna factor and Energy loss in cable.
FIELD STRENGTH
ATTEN. BELOW FUNDAMENTAL (dB)
FREQUENCY
Graph - 4 : Field strength of spurious radiation measured with pick-up antenna (12 nm range)
Model 2 Pulse)

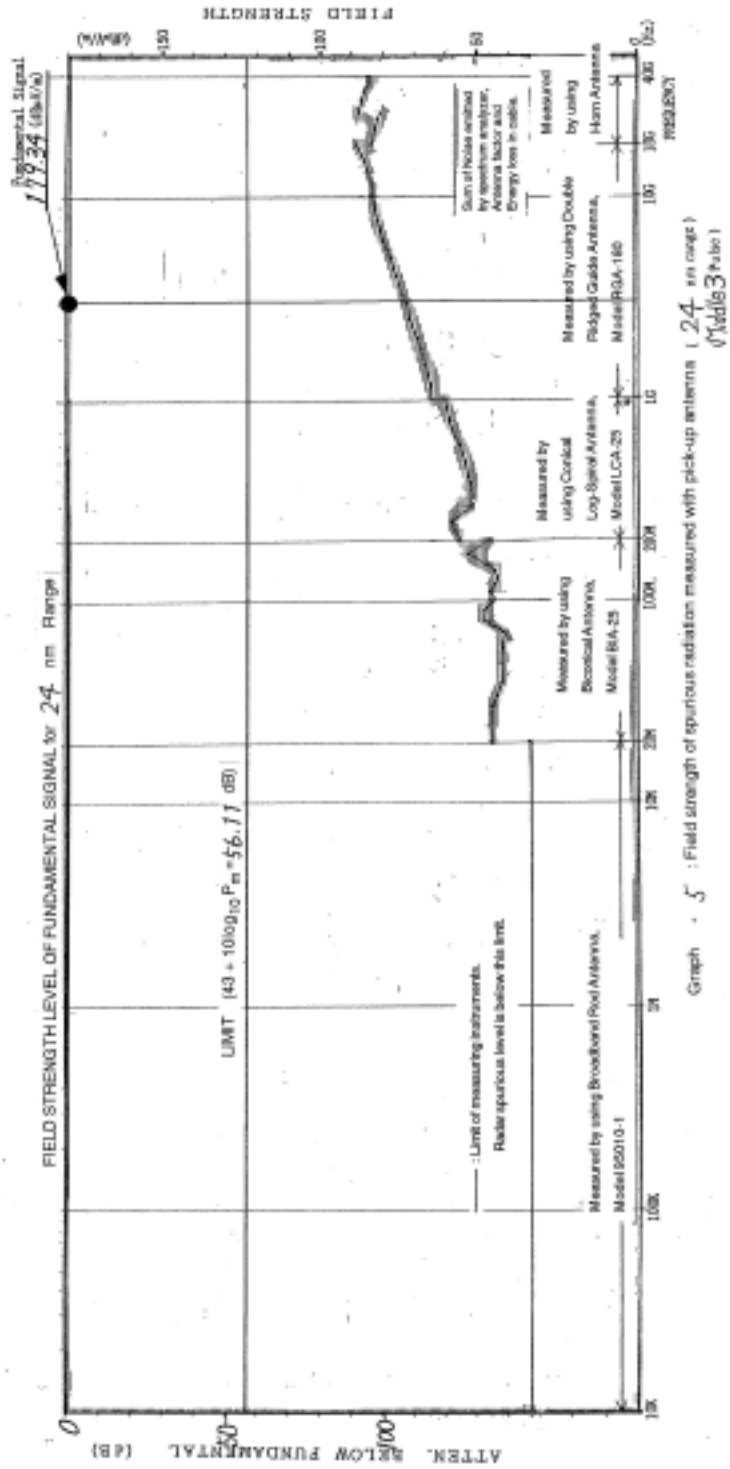

Graph - 5 : Field strength of spurious radiation measured with pick-up antenna (24 nm range)
(Note 3 Pulse)

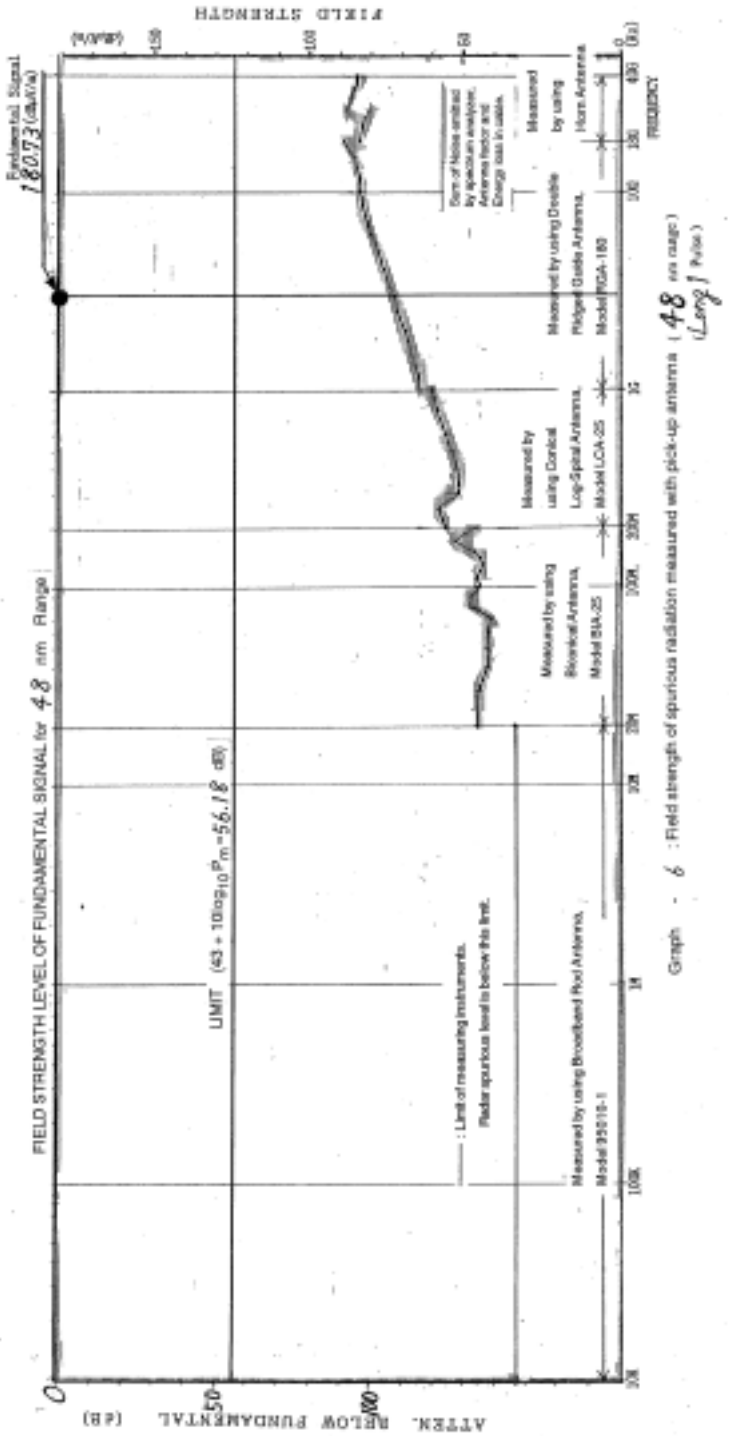

Graph - 6 : Field strength of spurious radiation measured with pick-up antenna (48 nm range)
(Long Pulse)

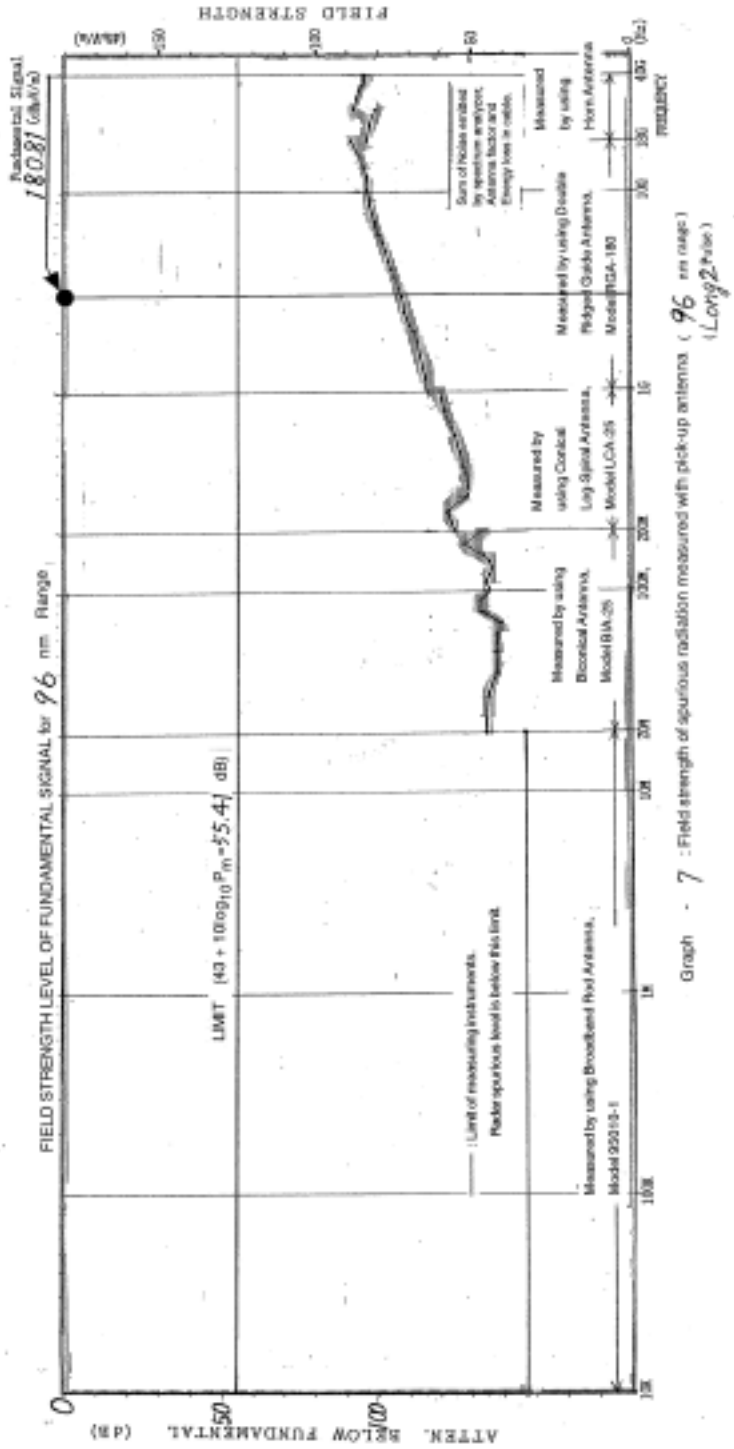

Graph - 7 : Field strength of spurious radiation measured with pick-up antenna (96 nm range) (Long 2 Pulse)