

**SONY.**

(d)- (8) Instruction book:

# ***UHF Synthesized Transmitter***

Operating Instructions page 2

EN

FCC ID: AK8WRT808A68  
Page 6

**WRT-808A**

© 1998 by Sony Corporation

## Owner's Record

The model and serial numbers are located at the rear of the unit. Record the serial number in the space provided below. Refer to these numbers whenever you call upon your Sony dealer regarding this product.

Model No. WRT-808A      Serial No. \_\_\_\_\_

### Notice for customers in the U.S.A.

Use of Sony wireless devices is regulated by the Federal Communications Commission as described in Part 74 subpart H of the FCC regulations and users authorized thereby are required to obtain an appropriate license.

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

## Table of contents

|                             |    |
|-----------------------------|----|
| Precautions .....           | 3  |
| Introduction .....          | 4  |
| Features .....              | 4  |
| Parts Identification .....  | 5  |
| Power Supply .....          | 6  |
| Channel Setting .....       | 7  |
| Notes on Use .....          | 8  |
| Specifications .....        | 9  |
| Wireless Channel List ..... | 10 |

## Precautions

- The unit is designated for use in ambient temperature range of 0°C to 50°C (32°F to 122°F).
- Do not place the unit on or near heat sources, such as lighting equipment, power amplifiers, or in a place subject to direct sunlight or excessive moisture. In such places, the external finish or internal parts of the unit may be damaged.
- If the unit is used in a very humid or dusty place or in a place subject to an active gas, clean its surface as well as the connectors with a dry, sift cloth soon after use.  
Lengthy use of the unit in such places or not cleaning it after its use in such places may shorten its life.
- When cleaning the unit, never use organic solvents such as thinners or benzine, which will damage the finish of the unit.
- The unit has been factory adjusted precisely. Do not tamper with its internal parts or attempt to repair it.

## Introduction

The WRT-808A is a plug-on transmitter which converts any handheld dynamic microphone into a wireless microphone.

The WRT-808A is a transmitter to be in combination with the WRR-800A/801A UHF Synthesized Diversity Tuner for an 800MHz band UHF synthesized wireless microphone system.

The WRT-808A can also be used in conventional Sony Wireless Microphone System composed of the WRT-810A/820A UHF Synthesized Transmitter, WRR-820A/840A/850A UHF Synthesized Diversity Tuner, etc.

The microphone/transmitter and tuners of the wireless microphone system are classified by frequency band. A 12MHz frequency band (or two consecutive numbered TV channels, such as 68 and 69 of the WRT-808A/U68 model) is assigned to each microphone/transmitter and tuner model.

In building a UHF wireless microphone system, be sure to combine a microphone/transmitter and a tuner having the same TV channel number.

*For the selective wireless channels and frequencies, see "Wireless Channel List" on page 10.*

Easy and steady connection to a microphone

Compact and lightweight

Operation powered by easily available battery


Battery alarm by two-colors LED

Remote battery alarm on tuner

Selectable RF output power

## Parts Identification

- ➊ Microphone connector  
Connect to a dynamic microphone which has a XLR type connector.
- ➋ POWER/BATT indicator  
See "Power Supply" on page 6.
- ➌ AF/PEAK indicator  
Lights in green when an audio signal over the reference level is inputted. Lights in red when an audio signal becomes maximum level.
- ➍ Channel select switches  
See "Channel Setting" on page 7.
- ➎ Input LEVEL volume  
Adjust according to the input level.
- ➏ Power switch  
Turns the power of the transmitter ON or OFF.
- ➐ Battery case lid  
See "Power Supply" on page 6.
- ➑ Microphone release button  
Push this button to release the microphone.

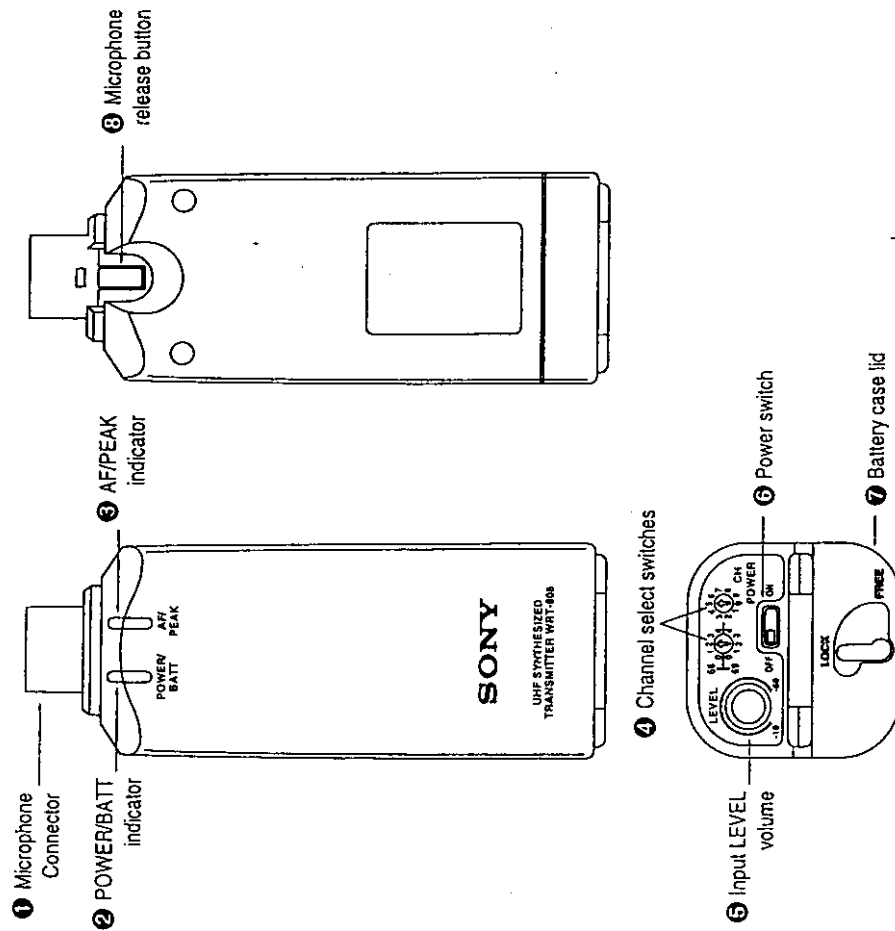


## Power supply

The transmitter can operate on two LR6 (size AA) alkaline batteries continuously for about 4 hours at 25°C (77°F).

### Inserting the batteries

- 1 Turn the knob on the battery case lid as shown below to open the battery compartment.
- 2 Match the polarity and insert the batteries.
- 3 Close the lid and turn the knob to its original position.

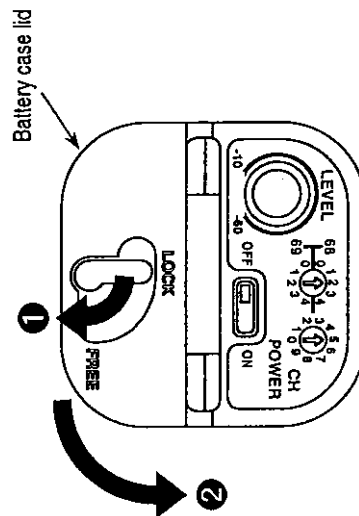

### Battery indication

When you turn the power on, the POWER/BATT indicator lights in green. When the battery level becomes low as about one hour is left for continuous operation, the indicator lights in red as a warning. When the batteries are almost exhausted as the unit does not work, the indicator flashes in red. Promptly replace the batteries when the red indication lights or flashes. When the POWER/BATT indicator lights in red, the BATT indication on the WRR-800A/801A/850A starts flashing.

#### Note

The indication may be incorrect if the batteries are not new when inserted. If you plan to use the transmitter for a long period, it is best to replace the batteries with new ones.

### Notes on batteries


- Use new alkaline batteries, and check the recommended "useby" date on the bottom of the batteries.
- Be careful to insert the batteries with the correct polarity.
- When not using the transmitter for a long period, remove the batteries to avoid leakage. If the batteries does leak, clean all leakage from the unit and insert new batteries. Leakage left in the unit may cause poor battery contact. If there seems to be poor battery contact, consult your Sony dealer.

## Channel Setting

Set the channel select switches for the desired channel using the screwdriver.

The left switch is for selecting the TV band and 10s digit of the transmitting channel, and the right switch is for selecting the 1s digit of the transmitting channel.

**Example:** To set to channel 69-05 on the U68 model

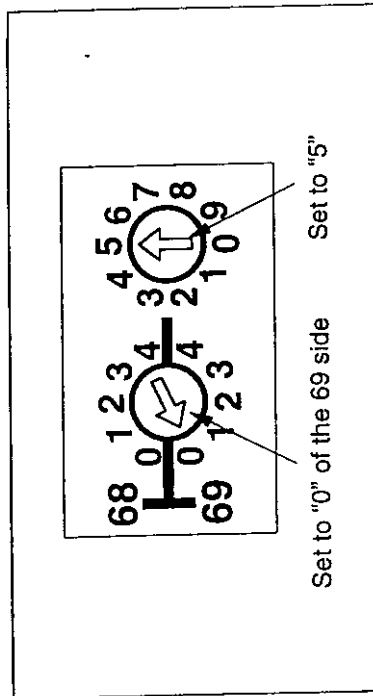

### Notes

- Turn off the transmitter when setting the transmitting channel to eliminate interference or noise on other wireless equipment.
- If the channel select switches are operated while the transmitter is on, the POWER/BATT indicator flashes in green as a warning.
- If you set to any channel other than those listed in "Wireless Channel Lists", the POWER/BATT indicator flashes in green as a warning.
- The transmitter does not transmit while the POWER/BATT indicator is flashing.

## Notes on Use

### On channel selection

- Make sure that the channel selected on the transmitter is the same as that selected on the tuner used in the same system.
- Depending on the noise or interference conditions, the selectable channels may not necessarily all be usable. If necessary, you can determine the usable channels by stepping the channel selection through a number of channels on a tuner with the transmitter set to OFF. Those channels on which the RF indicator of the tuner does not light are usable.
- If there is a TV broadcasting station near by, do not use the station's channel.

### On microphone system operation

- To operate with two or more channels, maintain a distance of at least 30 cm (1 ft.) between each pair of transmitters.  
*For details of operation with two or more channels, refer to the Operating Instructions for the WRR-800A/801A/805A UHF Synthesized Diversity Tuners.*
- Ensure that the tuners set to channels being used are either turned off or set to the minimum output level.
- When powering the transmitter on or off, to keep the noise to a minimum, set the audio output level from the tuner or mixer to a minimum.

- Powering the transmitter on without checking the channel selection first may interfere with the operation of other microphones/transmitters, if the current setting is already being used.
- To prevent noise generation, keep the microphones/transmitters at least 3 m (10 ft.) away from the tuner antennas when the system allows selection of up to 11 channels.
- Do not grip the body while using as it will significantly degrade good performance, causing dropouts, etc.

## Specifications

| Transmitter and modulator section |                                                                                          |
|-----------------------------------|------------------------------------------------------------------------------------------|
| Oscillator                        | Crystal controlled PLL synthesizer                                                       |
| Carrier frequencies               | 794.125 to 805.875 MHz<br>(94 settings at 125kHz intervals)                              |
| Type of emission                  | 110KF3E                                                                                  |
| RF power output                   | 50mW/10mW selectable                                                                     |
| Frequency stability               | Within $\pm 0.005\%$                                                                     |
| Spurious radiation                | 2.5 $\mu$ W or less                                                                      |
| Tone signal                       | 32.768kHz                                                                                |
| Type of antenna                   | Internal                                                                                 |
| Audio section                     |                                                                                          |
| Pre-emphasis                      | 50 $\mu$ s                                                                               |
| Reference deviation               | $\pm 5$ kHz ( $\sim 60$ dBV, 1kHz input)                                                 |
| Frequency response                | 100 to 15,000 Hz                                                                         |
| Signal to noise ratio             | 57dB or more<br>(A-weighted, 1kHz modulation, with reference deviation at WRR-800A/801A) |
| Audio attenuator                  | 0 to 50dB continuous                                                                     |
| Power section                     |                                                                                          |
| Power requirements                | 3.0 V DC<br>(two LR6/size AA alkaline batteries)                                         |
| Battery life                      | Approx. 4 hours at 25°C or 77°F with Sony LR6 alkaline batteries                         |
| General                           |                                                                                          |
| Operating temperature             | 0°C to +50°C (32°F to 122°F)                                                             |
| Storage temperature               | -30°C to +60°C (-22°F to +140°F)                                                         |
| Dimensions                        | 40 x 40 x 108 mm                                                                         |
| Mass                              | 165 g                                                                                    |

## Wireless Channel List

The WRT-808A can transmit on any selected wireless channel among those listed below.

| Channel | Frequency (MHz)<br>TV-68 Band | Channel | Frequency (MHz)<br>TV-68 Band | Channel | Frequency (MHz)<br>TV-69 Band | Channel | Frequency (MHz)<br>TV-69 Band |
|---------|-------------------------------|---------|-------------------------------|---------|-------------------------------|---------|-------------------------------|
| 68-01   | 794.125                       | 68-25   | 797.125                       | 69-01   | 800.125                       | 69-25   | 803.125                       |
| 68-02   | 794.250                       | 68-26   | 797.250                       | 69-02   | 800.250                       | 69-26   | 803.250                       |
| 68-03   | 794.375                       | 68-27   | 797.375                       | 69-03   | 800.375                       | 69-27   | 803.375                       |
| 68-04   | 794.500                       | 68-28   | 797.500                       | 69-04   | 800.500                       | 69-28   | 803.500                       |
| 68-05   | 794.625                       | 68-29   | 797.625                       | 69-05   | 800.625                       | 69-29   | 803.625                       |
| 68-06   | 794.750                       | 68-30   | 797.750                       | 69-06   | 800.750                       | 69-30   | 803.750                       |
| 68-07   | 794.875                       | 68-31   | 797.875                       | 69-07   | 800.875                       | 69-31   | 803.875                       |
| 68-08   | 795.000                       | 68-32   | 798.000                       | 69-08   | 801.000                       | 69-32   | 804.000                       |
| 68-09   | 795.125                       | 68-33   | 798.125                       | 69-09   | 801.125                       | 69-33   | 804.125                       |
| 68-10   | 795.250                       | 68-34   | 798.250                       | 69-10   | 801.250                       | 69-34   | 804.250                       |
| 68-11   | 795.375                       | 68-35   | 798.375                       | 69-11   | 801.375                       | 69-35   | 804.375                       |
| 68-12   | 795.500                       | 68-36   | 798.500                       | 69-12   | 801.500                       | 69-36   | 804.500                       |
| 68-13   | 795.625                       | 68-37   | 798.625                       | 69-13   | 801.625                       | 69-37   | 804.625                       |
| 68-14   | 795.750                       | 68-38   | 798.750                       | 69-14   | 801.750                       | 69-38   | 804.750                       |
| 68-15   | 795.875                       | 68-39   | 798.875                       | 69-15   | 801.875                       | 69-39   | 804.875                       |
| 68-16   | 796.000                       | 68-40   | 799.000                       | 69-16   | 802.000                       | 69-40   | 805.000                       |
| 68-17   | 796.125                       | 68-41   | 799.125                       | 69-17   | 802.125                       | 69-41   | 805.125                       |
| 68-18   | 796.250                       | 68-42   | 799.250                       | 69-18   | 802.250                       | 69-42   | 805.250                       |
| 68-19   | 796.375                       | 68-43   | 799.375                       | 69-19   | 802.375                       | 69-43   | 805.375                       |
| 68-20   | 796.500                       | 68-44   | 799.500                       | 69-20   | 802.500                       | 69-44   | 805.500                       |
| 68-21   | 796.625                       | 68-45   | 799.625                       | 69-21   | 802.625                       | 69-45   | 805.625                       |
| 68-22   | 796.750                       | 68-46   | 799.750                       | 69-22   | 802.750                       | 69-46   | 805.750                       |
| 68-23   | 796.875                       | 68-47   | 799.875                       | 69-23   | 802.875                       | 69-47   | 805.875                       |
| 68-24   | 797.000                       |         |                               | 69-24   | 803.000                       |         |                               |

**(d)-(9) Tune-up procedure at specific operating power levels:****(1) Vcc voltage of RF AMP block**

DC-DC converter output is +5V constant. It supplies Vcc of the RF AMP block.  
 Voltage regulator output is +3V constant. It supplies Vcc of the VCO(CP401).


**(2) Measurement of RF power output.**

RF power output is measured at output terminal (CN402).

VCO(CP401) output is applied to RF AMP block and the output is applied to L.P.F. and isolator. So RF power output is decided by VCO and RF AMP block output power, L.P.F. insertion loss and isolator insertion loss.

- 1) VCO RF output power is  $-1.5 \sim +2.0\text{dBm}$  (at  $50\Omega$  load) at 3V power supply voltage.
- 2) Adjust CT401 and RV401 so that RF AMP block output power is  $16 \sim 19\text{dBm}$  (at  $50\Omega$  load) when RF AMP block input power is  $-1.5 \sim +2.0\text{dBm}$  and 5V power supply voltage.
- 3) L.P.F. insertion loss is less than 0.6dB.
- 4) Isolator insertion loss is  $0.5 \sim 0.9\text{dB}$ .

Therefore RF output power is  $50\text{mW}(\pm 5\text{mW})$  by adjusting CT401 and RV401.

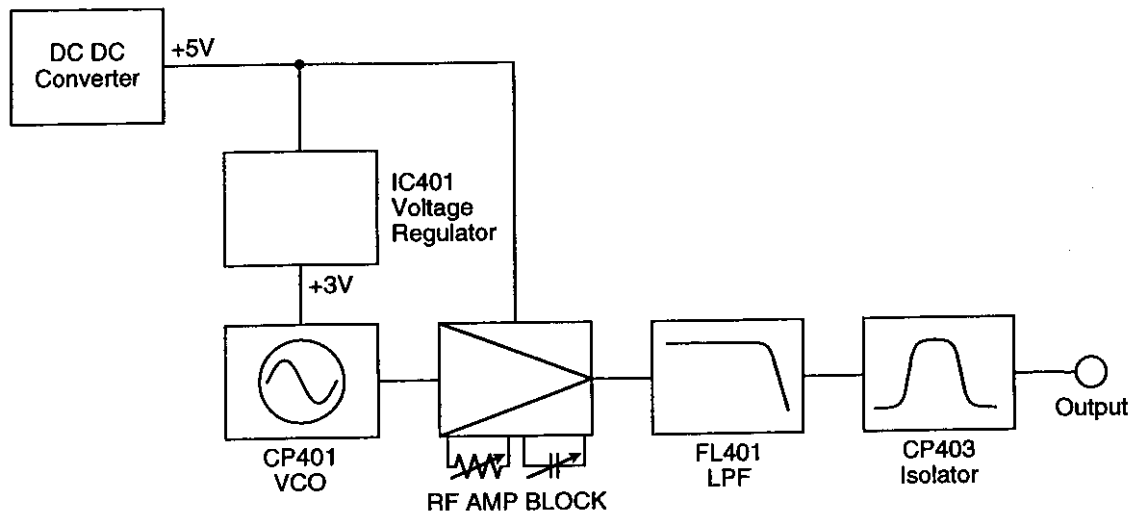

**(d)-(10)A description of circuitry for determining and stabilizing frequency:**

Determination and stability of frequency on PLL synthesizer

1. Divide the oscillation frequency[f] from the VCO(CP401) by a prescaler[1/M](IC401).  
A counter[1/A](IC401) and N counter[1/N](IC401) and apply it [fr'] to a phase detector.

$$fr' = \frac{1}{MN+A} f \quad \text{---- (1)}$$

2. The integrated output signal of the phase detector, which is taken by the phase difference from[fr'] to a reference oscillator[fr], and use the signal as the control voltage for the VCO.

3. With the above 1 and 2(loop 1 through 2), the circuit maintains its balance.


$$fr = fr' \quad \text{---- (2)}$$

by expression of (1), (2)

$$f = (MN+A)fr \quad \text{---- (3)}$$


4. Therefore transmitting frequency[f] is determined by [M], [N], [A], [fr] and stability is decided by stability of reference frequency[fr].

5. Stability of the reference frequency[fr] is  $\pm 35\text{ppm}$ (by stability of X'tal(X551) spec).  
So stability of transmitting frequency[f] is  $\pm 50\text{ppm}$ (0.005%).

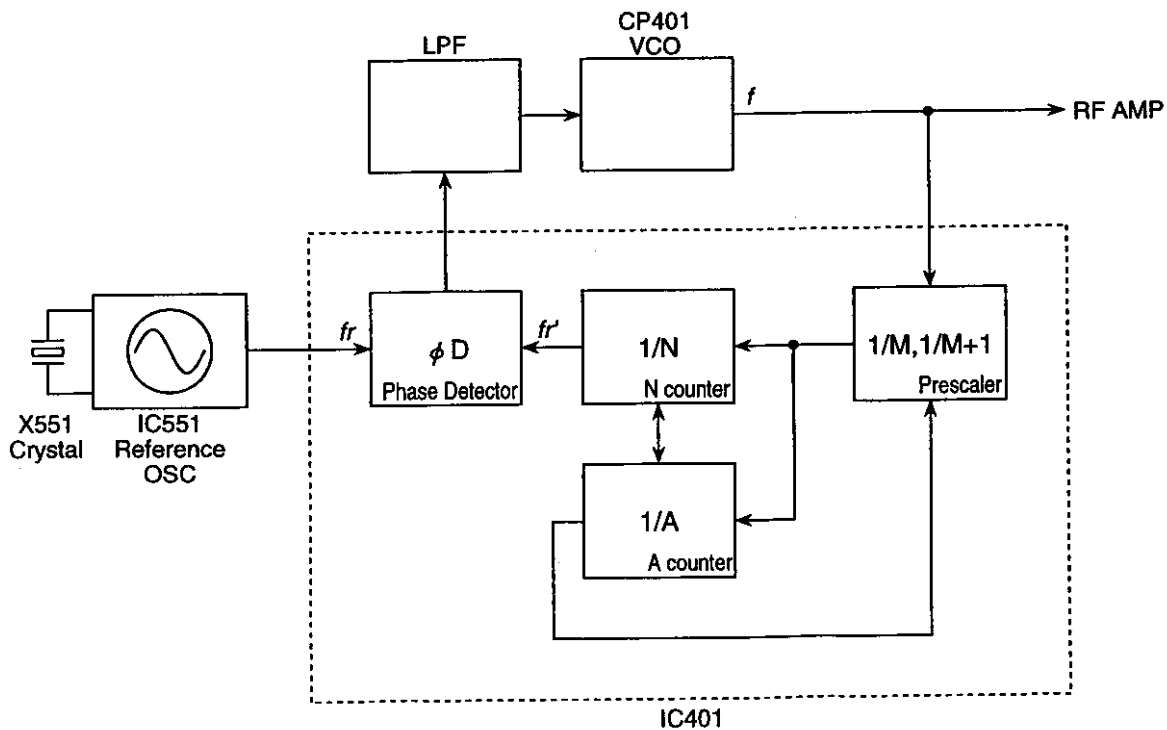

**(d)-(11)A description of circuits for suppression of spurious radiation:**

1. Radiation of higher harmonics are suppressed by installation of low pass filter and isolator in the next to a RF AMP.
2. By introducing direct oscillation system of transmitting frequency by the VCO, RF AMP are straightly amplified. So there is no spurious caused by frequency multiplier.
3. Shield of the VCO and the RF AMP block suppress spurious emission radiated from the transmitter chassis.

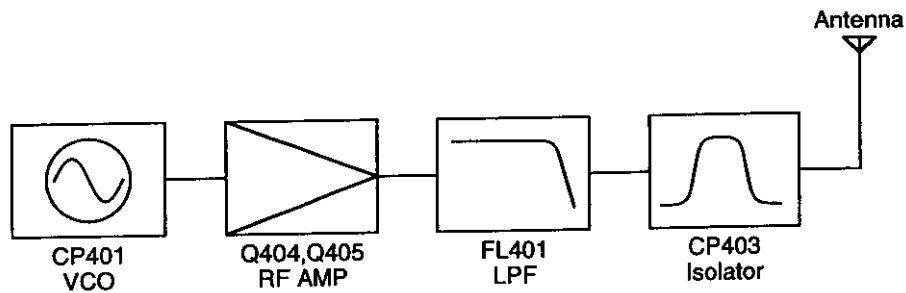

**(e) Report of Measurement**

-- Under FCC Rules and Regulations Parts 2 and 74 --

Report Date : December 28, 1998

**Manufacturer:** Sony Corporation

**Manufacturer's Address:** 7-35 Kitashinagawa 6-chome  
Shinagawa-ku, Tokyo, 141 JAPAN


**Trade Name:** SONY

**Model Number:** WRT-808A(68) (FCC ID: AK8WRT808A68)

**Commodity:** UHF SYNTHESIZED TRANSMITTER

**Test Method:** All Measurements were performed in accordance  
with the applicable sections in FCC Rules and Regulations  
Part 2 and 74.

I hereby state that the measurements shown in this report were made in accordance with the procedures indicated. I assume full responsibility for the accuracy of these measurements and vouch for the qualifications of all persons taking them.

|                                                                                                          |                                                                             |                                                                                                                            |
|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Signed by:</b><br> | <b>Name (Print):</b><br>K. Nakayama                                         | <b>Title:</b><br>Manager, Product Safety<br>Quality Assurance Department<br>Broadcasting & Professional<br>Systems Company |
| <b>Company Name:</b><br>Sony Corporation                                                                 | <b>Address:</b><br>7-35 Kitashinagawa 6-chome<br>Shinagawa-ku, Tokyo, Japan |                                                                                                                            |


2.1046 RF power output (The effective radiated power output)

## A. Measurement procedure

1. The measurement shall be made on an open field test site which is free from reflecting objects that may affect the measurement results.
2. For radiated power output of the equipment, the measuring antenna was raised and lowered to obtain a maximum reading on the spectrum analyzer with the antenna vertically and horizontally polarized. The turntable was rotated a minimum of 360° to further increase the reading on the spectrum analyzer. Then field strength was recorded in dB  $\mu$  V/m.
3. The unit was removed and replaced with a dipole antenna. (The antenna was adjusted to a half-wave of transmitting frequency.) The center of the dipole antenna was placed approximately at the same location as the center of the unit.
4. The dipole antenna at the unit end was connected to a signal generator with a coaxial cable. With the antennas at both ends vertically and horizontally polarized and signal generator tuned to the transmitting frequency, the level of the signal generator output was adjusted to the previously recorded maximum reading for this set of conditions was obtained.
5. The input power into the dipole antenna was calculated from the coaxial cable loss and the signal generator output voltage obtained in these readings.

For the measured data, refer to Page

Wooden antenna Pole



## 2.1047 Modulation characteristics


### A Measurement procedure

The test signal was applied to the audio input terminal of the transmitter.

A modulation analyzer was connected to the output terminals of the transmitter.

The test signal frequency was switched over 100Hz, 2.5kHz and 15kHz.

For the test set-up, refer to the diagram below.

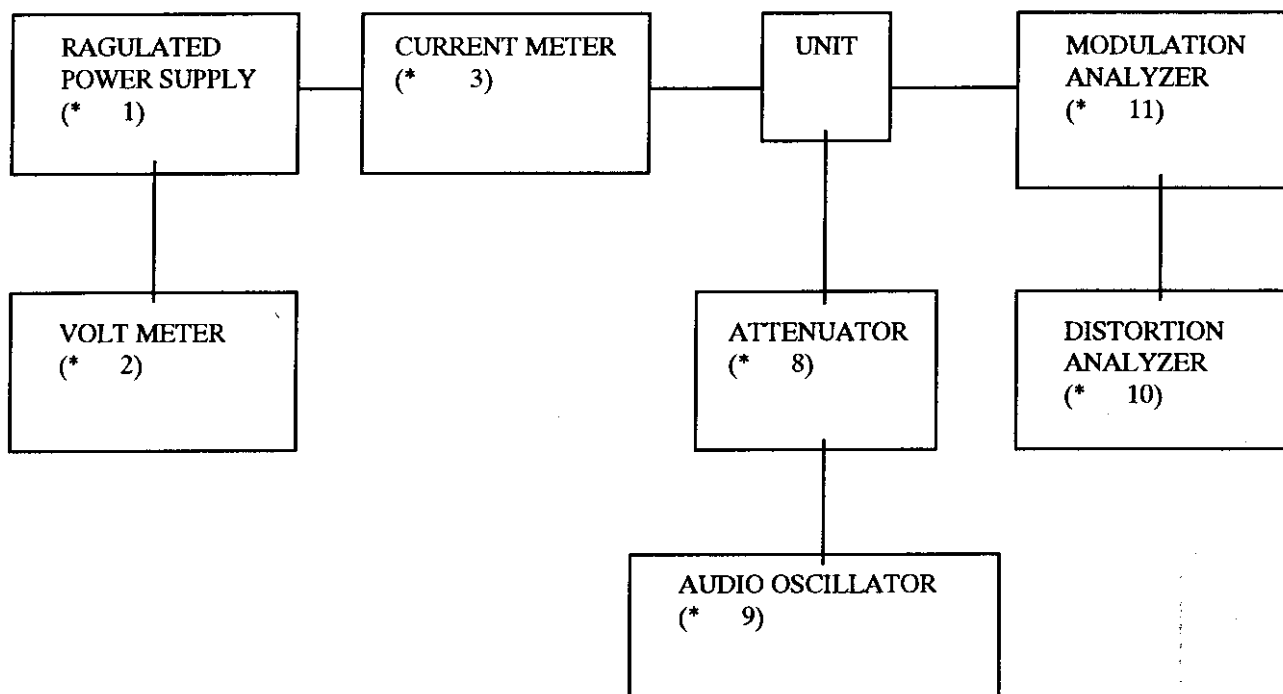

For the measured data, refer to Page

## 2.1049 Occupied bandwidth

### A. Measurement procedure


Manufacturer's necessary bandwidth is 110KHz.

A spectrum analyzer was connected to the output terminals.

The unit was modulated by a 15kHz tone of sufficient level to produce at least 85 percent modulation.

The occupied bandwidth was measured with the spectrum analyzer set at 50KHz/div. scan and 10dB/div.

For the test set-up, refer to the diagram below.

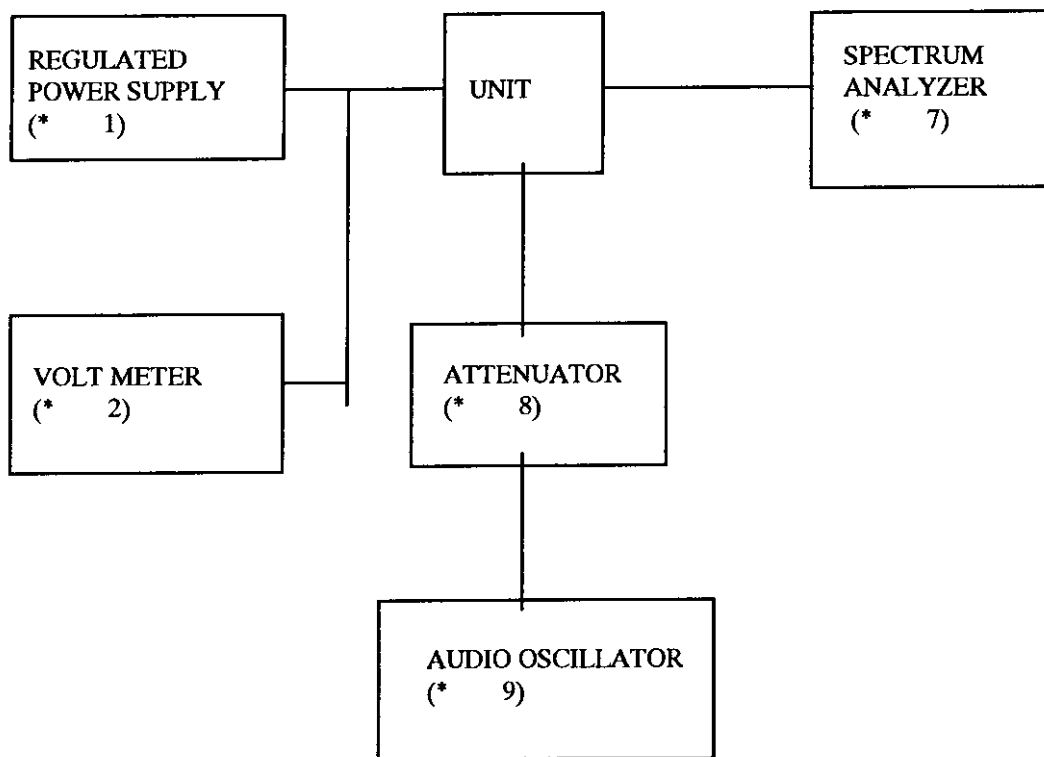

For the measured data, refer to Page

**2.1051 Spurious emissions at antenna terminals****A. Measurement procedure**

The conducted spurious test is not applicable because this device has a fixed antenna (not removable).

## 2.1053 Field strength of spurious radiation

### A-1. Measurement procedure (from lowest frequency to 1000MHz)

1. The measurement shall be made on an open field test site which is free from reflecting objects that may affect the measurement results.
2. This procedure was intended to determine the level of spurious emission radiated from the antenna and the unit chassis. The radio frequency spectrum was scanned from lowest frequency generated in the equipment to 1000MHz.
3. For each spurious or harmonic measurement, the measuring antenna was adjusted to the correct length for the frequency involved. This length was made from the lowest frequency generated in the equipment to 1000MHz.
4. For each frequency generated in the equipment, the measuring antenna was raised and lowered to obtain a maximum reading on the spectrum analyzer with the antenna vertically polarized. The turntable was rotated a minimum of 360° to further increase the reading on the spectrum analyzer. Then field strength was recorded in dB  $\mu$  V/m.
5. The unit was removed and replaced with a dipole antenna. (The antenna was adjusted to a half-wave of transmitting frequency.) The center of the dipole antenna was placed approximately at the same location as the center of the unit.
6. The dipole antenna at the unit end was fed with a signal generator. With the antennas at both ends vertically polarized and signal generator tuned to the transmitting frequency, the level of the signal generator output was adjusted to the previously recorded maximum reading for this set of conditions was obtained.
7. The entire procedure for each spurious and harmonics frequency with the FSM antenna horizontally polarized was repeated.
8. The input power into the dipole antenna was calculated from the impedance and the signal generator voltage obtained in these readings.

For the measured data, refer to the page


2.1053 Field strength of spurious radiation

## A-2 Measurement procedure (from 1GHz to 10 GHz)

1. The measurement shall be made on an open field which is free from reflecting objects that may affect the measurement results.
2. This procedure was intended to determine the level of spurious emission radiated from the antenna and the unit chassis. The radio frequency spectrum was scanned from 1GHz frequency generated in the equipment to 10GHz.
3. For each spurious or harmonic measurement, the measuring antenna was changed according to frequency range.
4. For each frequency generated in the equipment, the measuring antenna was raised and lowered to obtain a maximum reading on the spectrum analyzer with the antenna vertically polarized. The turntable was rotated a minimum of 360° to further increase the reading on the spectrum analyzer. Then field strength was recorded in dB  $\mu$  V/m.

For the measured data, refer to the page

For the setup, refer to the diagram below.

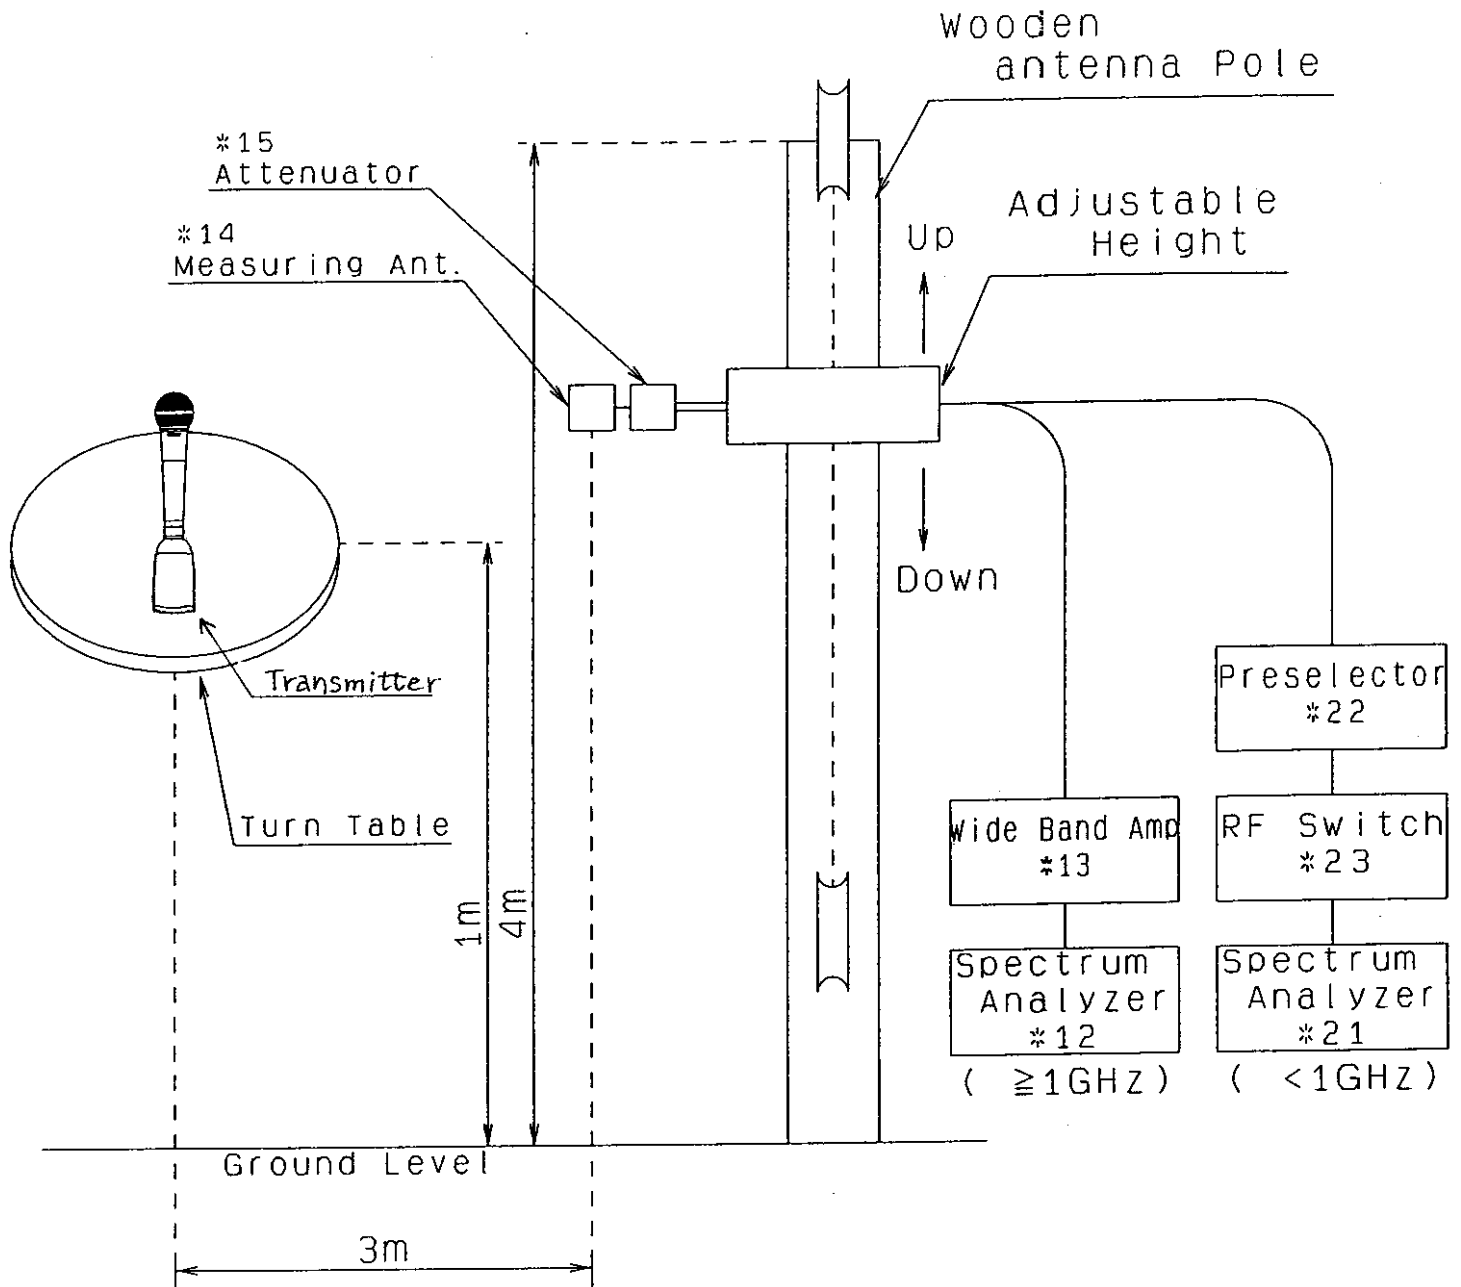

Measuring site

Distance between Antenna  
Location

---- 3 meters

---- Atsugi Technology Center, Kanagawa, Japan

For the measured data, refer to Page


2.1055 Frequency stability

## (1) Frequency vs. Ambient temperature

## A. Measurement procedure

The unit was placed in the temperature cycle chamber and was kept at a temperature of  $-30^{\circ} \pm 1^{\circ}$  for 1 hour. The rated test voltage was applied for two minutes. The transmitting frequency was measured during this period and recorded. A similar measurement was performed with the temperatures changed  $10^{\circ}\text{C}$  each time up to maximum of  $50^{\circ}\text{C}$ .

For the test setup, refer to the diagram below.

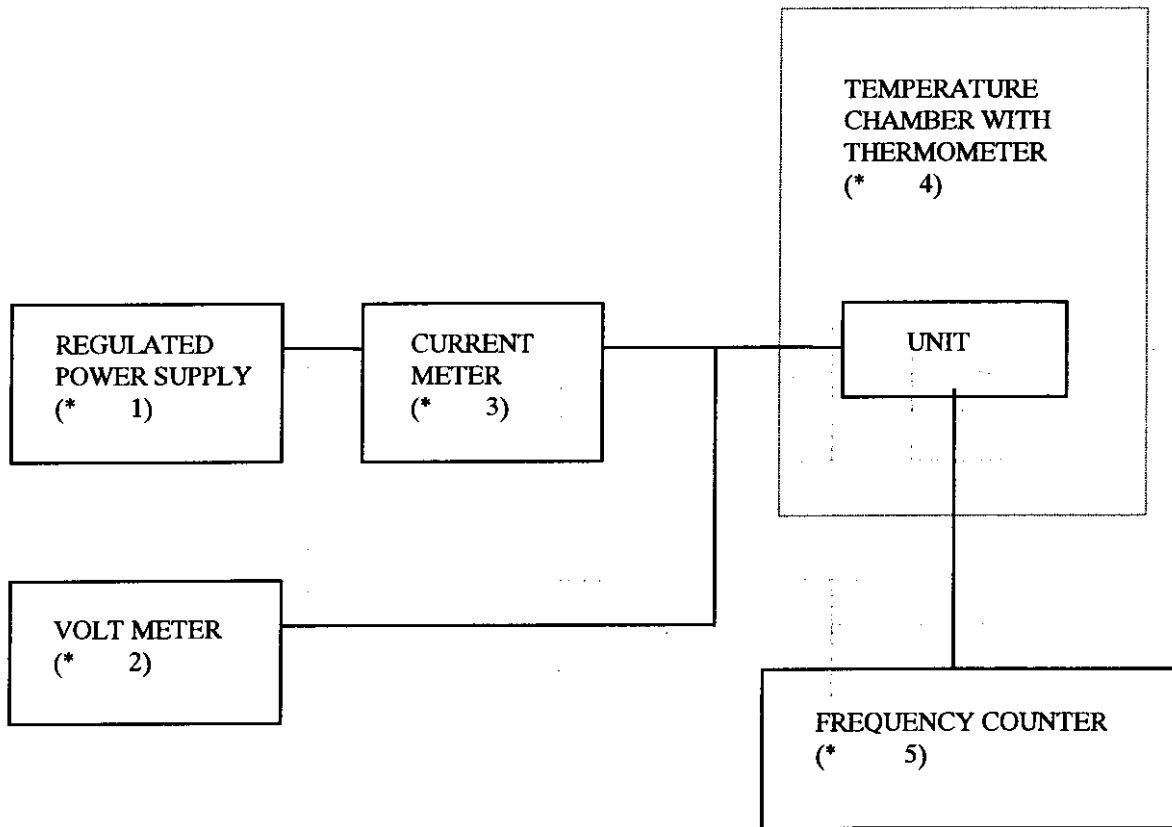

For the measured data, refer to the Page

## 2.1055 Frequency stability


### (2) Frequency vs. Supply voltage

#### A. Measurement procedure

The power supply voltage to the unit under test is varied from 2.0V to 1.725V.

|                                                                          |        |
|--------------------------------------------------------------------------|--------|
| Nominal Value                                                            | 3.00 V |
| 85% of the nominal value                                                 | 2.55 V |
| 115% of the nominal value                                                | 3.45 V |
| Battery operating end point which shall be specified by the manufacturer | 1.90 V |

For the test setup, refer to the diagram below.

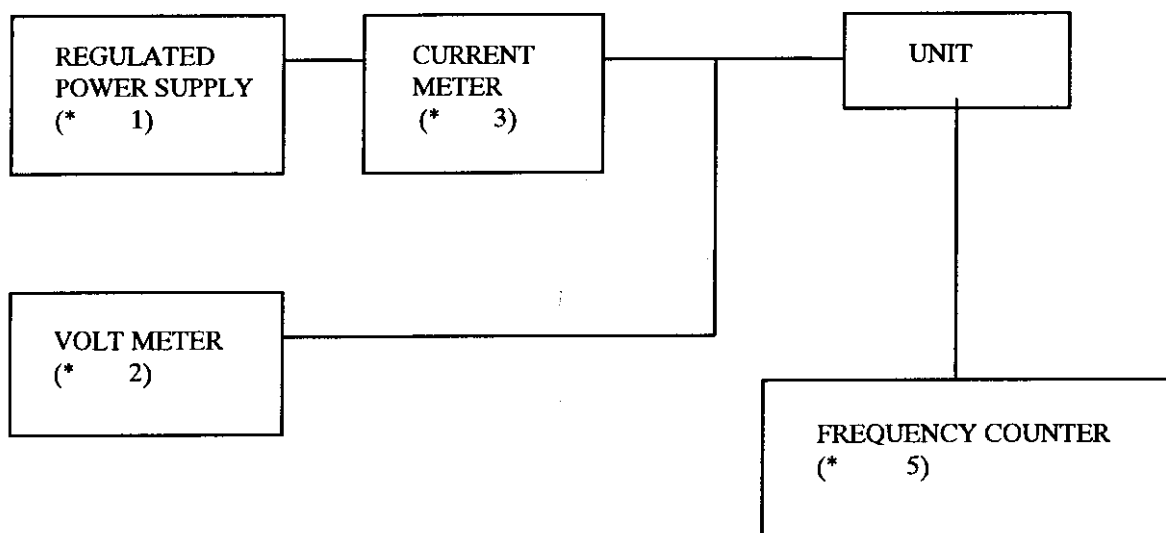

For the measured data, refer to the Page

2.1046 RF power output (The effective radiated power output)


Model: WRT-808A(68)  
FCC ID: AK8WRT808A68  
POWER SUPPLY: 3.00V DC

| Frequency (MHz) | CH No. | ERP (mW) |
|-----------------|--------|----------|
| 794.125         | 68-01  | 5.6      |
| 800.125         | 69-01  | 5.8      |
| 805.875         | 69-47  | 5.2      |

2.1047 Modulation characteristics

Deviation VS. Input Level


Model: WRT-808A(68)  
FCC ID: AK8WRT808A68  
Transmitting Freq.: 794.125MHz (CH No. 68-01)

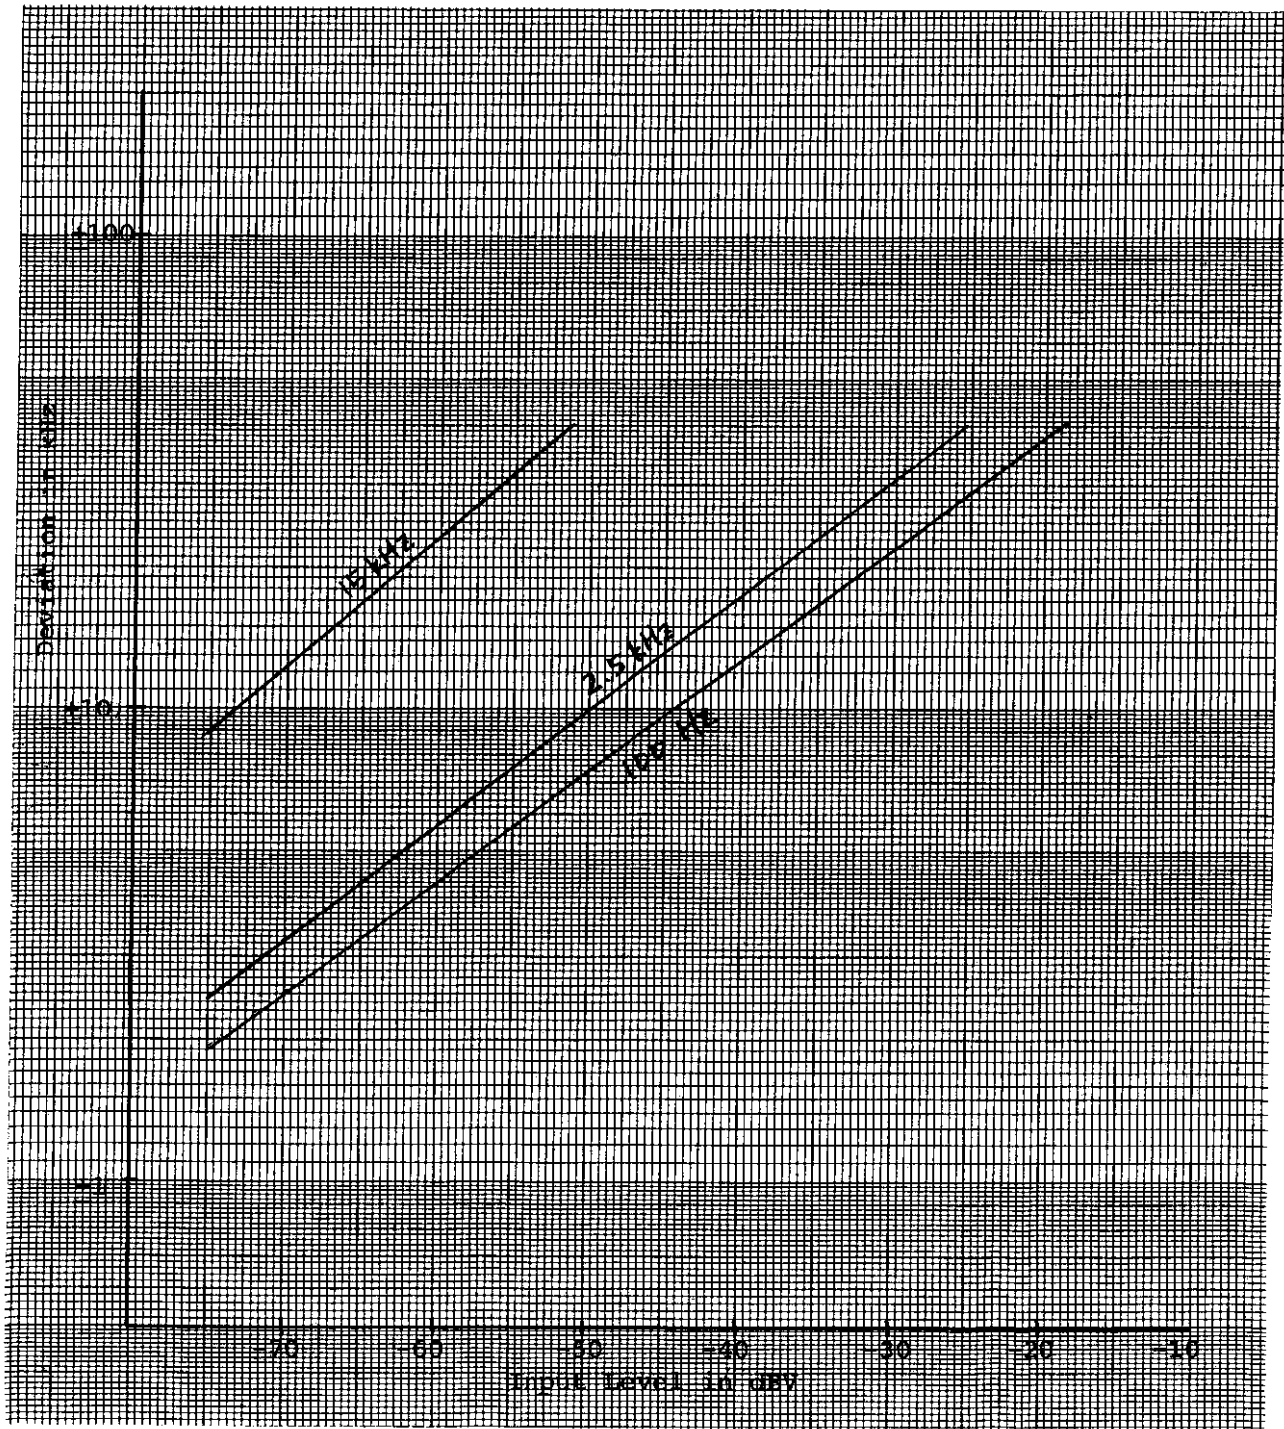

2.1047 Modulation characteristics

Deviation VS. Input Level


Model: WRT-808A(68)  
FCC ID: AK8WRT808A68  
Transmitting Freq.: 800.125MHz (CH No. 69-01)

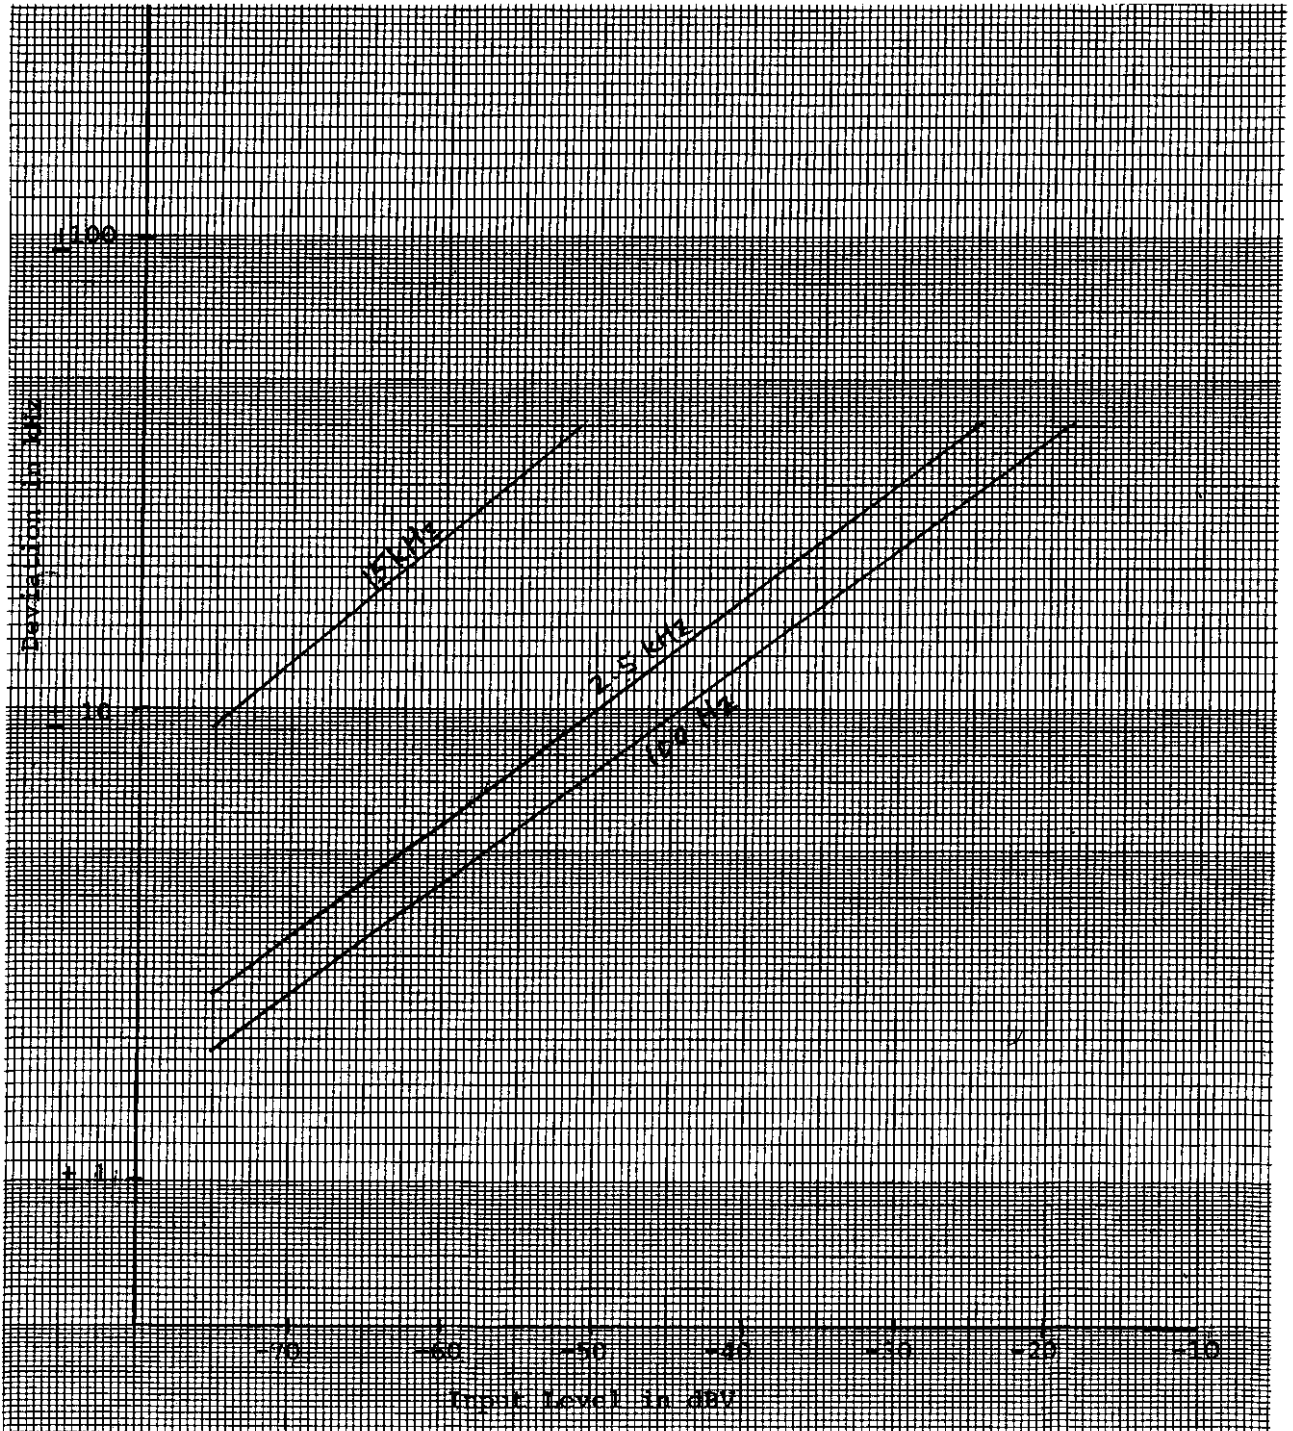

2.1047 Modulation characteristics

Deviation VS. Input Level


Model: WRT-808A(68)  
FCC ID: AK8WRT808A68  
Transmitting Freq.: 805.875MHz (CH No. 69-47)

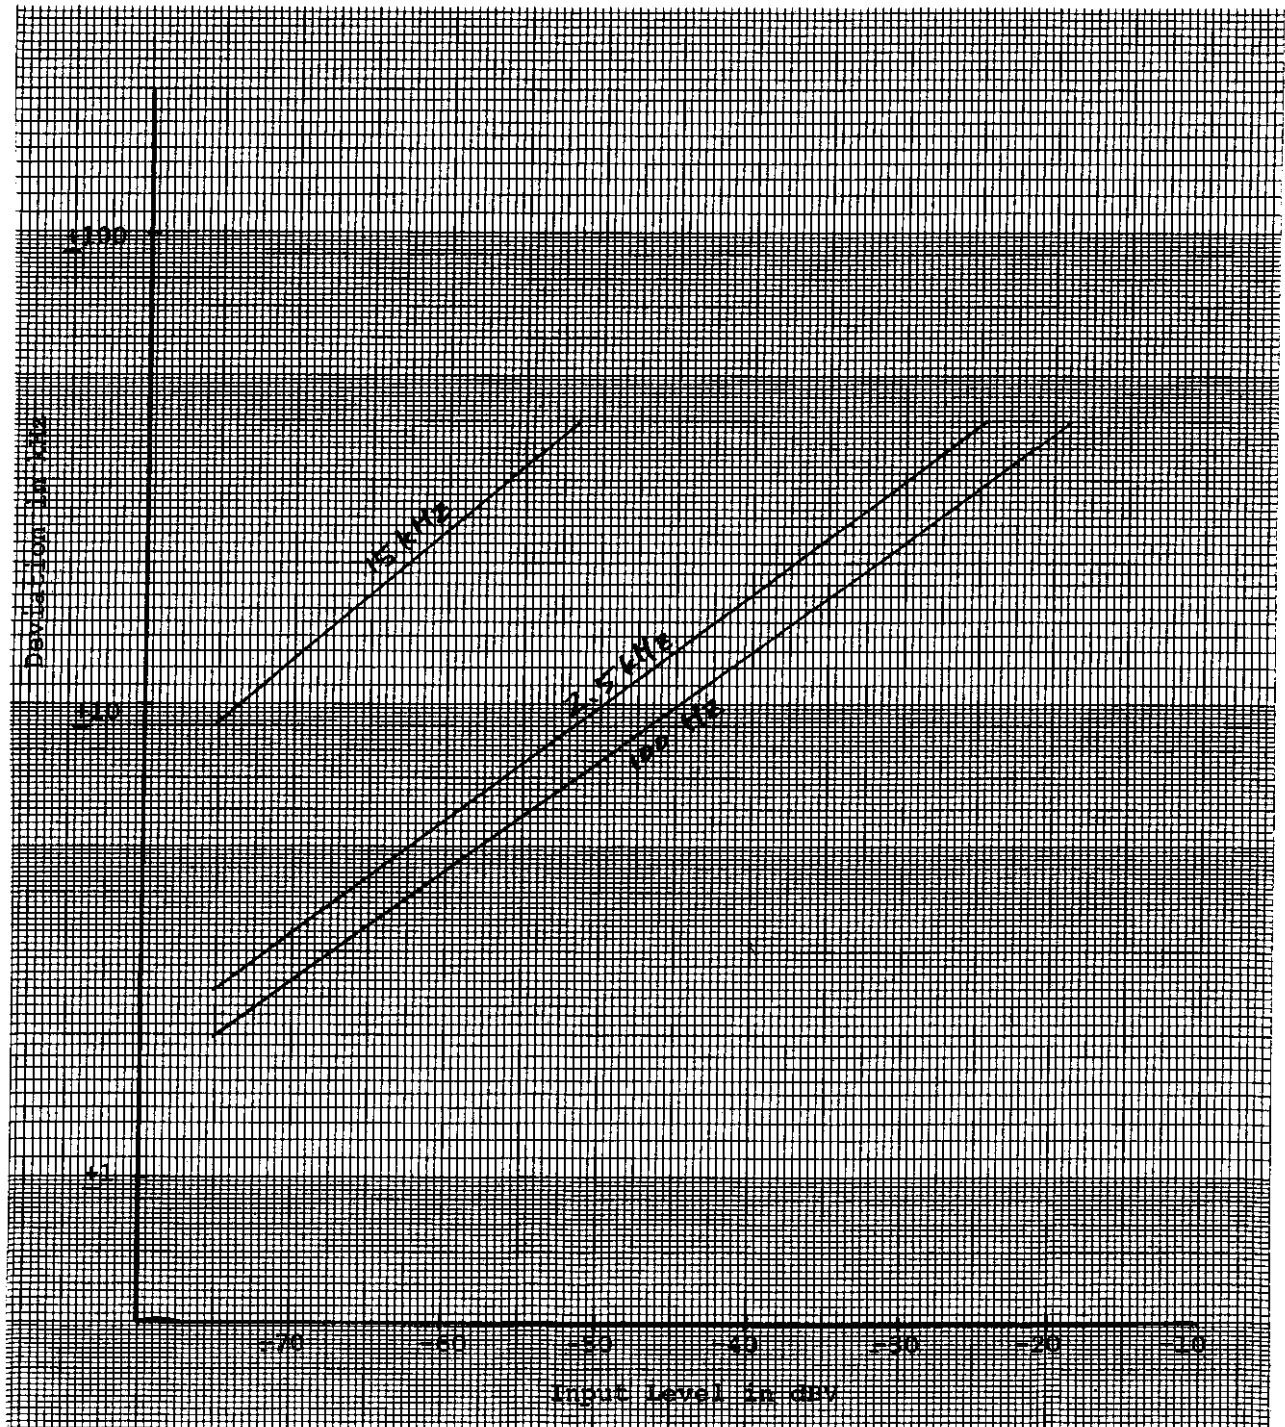


2.1049 Occupied bandwidth

Model: WRT-808A(68)  
FCC ID: AK8WRT808A68

Center Frequency  
794.125 MHz (CH No. 68-01)  
Modulating frequency: 15kHz  
Input Level: -53dB(0dB=1Vrms)

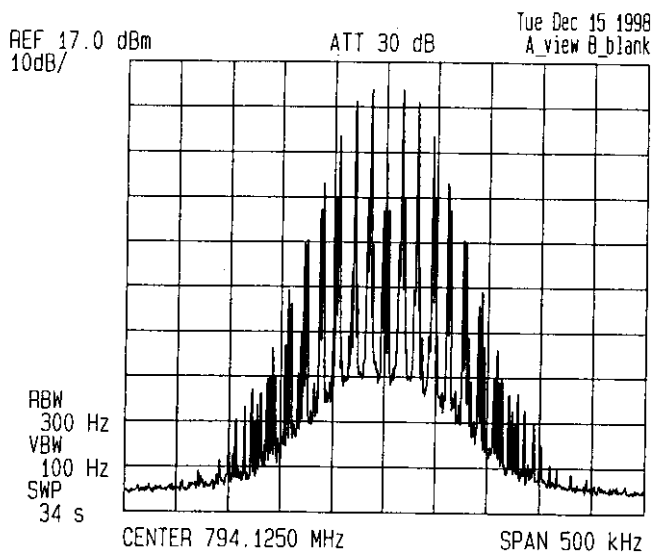


Center Frequency  
800.125MHz (CH No. 69-01)

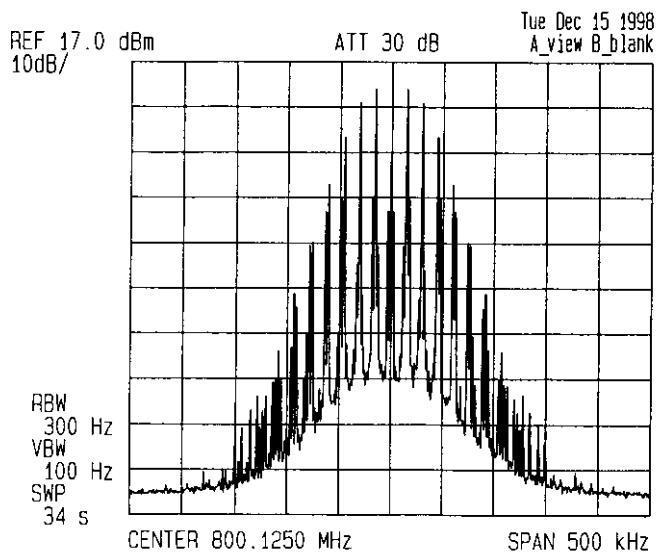

2.1049 Occupied bandwidth

Model: WRT-808A(68)  
FCC ID: AK8WRT808A68

Center Frequency  
805.875MHz (CH No. 69-47)

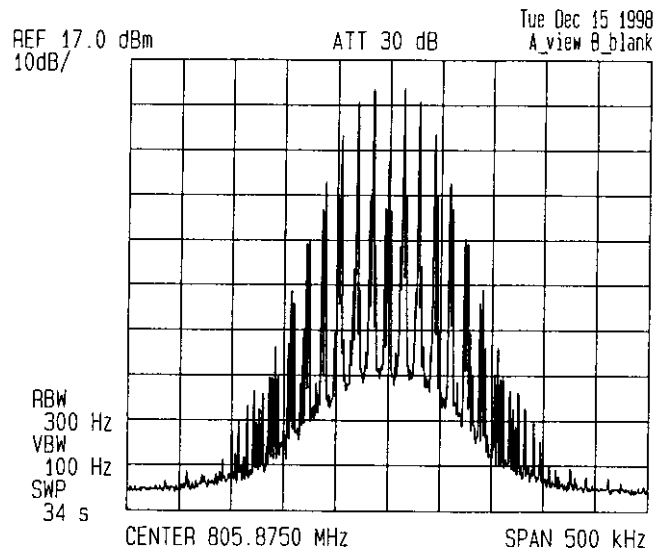

2.1053 Field strength of spurious radiation

Model: WRT-808A(68)  
FCC ID: AK8WRT808A68

Frequency: 794.125MHz (CH No. 68-01)  
Power supply: AA size battery x 2 3.0V

| Frequency (MHz) | Field strength (dB $\mu$ V/m) |
|-----------------|-------------------------------|
| * * 794.125     | 104.20 (* 0.0 )               |
| 1588.250        | 63.60 (- 40.6 )               |

Frequency: 800.125MHz (CH No. 69-01)  
Power supply: AA size battery x 2 3.0V

| Frequency (MHz) | Field strength (dB $\mu$ V/m) |
|-----------------|-------------------------------|
| * * 800.125     | 104.60 (* 0.0 )               |
| 1600.250        | 61.30 (- 43.3 )               |

Frequency: 805.875MHz (CH No. 69-47)  
Power supply: AA size battery x 2 3.0V

| Frequency (MHz) | Field strength (dB $\mu$ V/m) |
|-----------------|-------------------------------|
| * * 805.875     | 103.90 (* 0.0 )               |
| 1611.750        | 60.80 (- 43.1 )               |

Note: \* In parenthesis figure shows spurious and harmonic emission level.  
Unit: dB (0dB = carrier level)  
\* \* Carrier frequency

### Method of Calculating Field Strength

1. "Substitution Method" is employed in case that reading of spectrum analyzer is extremely higher than the noise level.

$$\begin{aligned} \text{Field Strength [dB } \mu \text{ V/m]} &= \text{S.S.G. Output Level [dB } \mu \text{ V/m]} \text{ (at } 50 \Omega \text{)} \\ &+ \text{Balun Loss of Reception Antenna [dB]} \\ &+ \text{Antenna Factor [dB]} \end{aligned}$$

2. Following calculation is employed in case that S.S.G. is not employed.

$$\begin{aligned} \text{Field Strength [dB } \mu \text{ V/m]} &= \text{Meter Reading [dB } \mu \text{ V]} \\ &+ \text{Antenna Factor (including Balun Loss) [dB]} \\ &+ \text{Cable Loss} + 20\log(3\text{m}/10\text{m}) \text{ [dB]} \end{aligned}$$

2.1055 Frequency stability

Nominal frequency : 794.125MHz (CH No. 68-01)

| Power supply           | Frequency stability (%) |            |           |           |
|------------------------|-------------------------|------------|-----------|-----------|
| Ambient temperature(℃) | 1.900V DC               | 2.550 V DC | 3.000V DC | 3.450V DC |
| -30                    | -0.00161                | -0.00161   | -0.00161  | -0.00161  |
| -20                    | -0.00088                | -0.00087   | -0.00087  | -0.00087  |
| -10                    | -0.00036                | -0.00036   | -0.00036  | -0.00036  |
| 0                      | -0.00011                | -0.00010   | -0.00010  | -0.00010  |
| 10                     | -0.00001                | -0.00001   | -0.00001  | -0.00001  |
| 20                     | -0.00000                | -0.00000   | -0.00000  | -0.00000  |
| 30                     | -0.00000                | -0.00000   | -0.00000  | -0.00000  |
| 40                     | -0.00011                | -0.00011   | -0.00011  | -0.00011  |
| 50                     | -0.00010                | -0.00010   | -0.00010  | -0.00010  |

Nominal frequency : 800.125MHz (CH No. 69-01)

| Power supply           | Frequency stability (%) |            |           |           |
|------------------------|-------------------------|------------|-----------|-----------|
| Ambient temperature(℃) | 1.900V DC               | 2.550 V DC | 3.000V DC | 3.450V DC |
| -30                    | -0.00160                | -0.00160   | -0.00160  | -0.00160  |
| -20                    | -0.00087                | -0.00087   | -0.00087  | -0.00087  |
| -10                    | -0.00037                | -0.00037   | -0.00037  | -0.00037  |
| 0                      | -0.00010                | -0.00010   | -0.00010  | -0.00010  |
| 10                     | -0.00001                | -0.00001   | -0.00001  | -0.00001  |
| 20                     | -0.00000                | -0.00000   | -0.00000  | -0.00000  |
| 30                     | -0.00005                | -0.00005   | -0.00005  | -0.00005  |
| 40                     | -0.00011                | -0.00011   | -0.00011  | -0.00011  |
| 50                     | -0.00010                | -0.00010   | -0.00010  | -0.00010  |

2.1055 Frequency stability

Nominal frequency : 805.875MHz (CH No. 69-47)

| Power supply           | Frequency stability (%) |            |           |           |
|------------------------|-------------------------|------------|-----------|-----------|
| Ambient temperature(℃) | 1.900V DC               | 2.550 V DC | 3.000V DC | 3.450V DC |
| -30                    | -0.00161                | -0.00161   | -0.00161  | -0.00161  |
| -20                    | -0.00088                | -0.00088   | -0.00087  | -0.00087  |
| -10                    | -0.00037                | -0.00037   | -0.00037  | -0.00037  |
| 0                      | -0.00011                | -0.00010   | -0.00010  | -0.00010  |
| 10                     | -0.00001                | -0.00001   | -0.00001  | -0.00001  |
| 20                     | -0.00000                | -0.00000   | -0.00000  | -0.00000  |
| 30                     | -0.00005                | -0.00005   | -0.00005  | -0.00005  |
| 40                     | -0.00011                | -0.00011   | -0.00011  | -0.00011  |
| 50                     | -0.00011                | -0.00011   | -0.00011  | -0.00011  |

List of Test Equipment

| Equipment                                | Manufacturer                       | Type                     | Serial No.               |
|------------------------------------------|------------------------------------|--------------------------|--------------------------|
| *1 Regulated Power supply                | TAKASAGO                           | NL035-5                  | 9820333                  |
| *2 Volt Meter                            | Yokogawa                           | 2051                     | 10497U                   |
| *3 Current Meter                         | Yokogawa                           | 2051                     | 11384U                   |
| *4 Temperature Chamber                   | Tabai                              | PL-1                     | 2223871                  |
| *5 Frequency Counter                     | Anritsu                            | MF76A                    | MT59216                  |
| *6 Power Meter<br>Power Sensor           | Hewlett Packard<br>Hewlett Packard | 435B<br>8482A            | 2445A11826<br>2349A10440 |
| *7 Spectrum Analyzer                     | ADVANTEST                          | R3371A                   | 5863D14                  |
| *8 Attenuator                            | Anritsu                            | MN-32A                   | M42522                   |
| *9 Audio Oscillator                      | Matsushita                         | VP-722A                  | 529059                   |
| *10 Distortion Analyzer                  | Hewlett Packard                    | 334A                     | 1140A09384               |
| *11 Modulation Analyzer                  | Hewlett Packard                    | 8901A                    | 1922A00235               |
| *12 Spectrum Analyzer                    | ADVANTEST                          | R3265                    | 15060251                 |
| *13 Wide Band Amplifier                  | Anritsu                            | A4H1002S                 | -                        |
| *14 Horn Antenna<br>Log-Periodic Antenna | SCHWARZBECK<br>SCHWARZBECK         | BBHA 9120-B<br>UHALP9107 | 102/93<br>-              |
| *15 3dB Attenuator                       | Hewlett Packard                    | 8491B                    | 2708A                    |
| *21 Spectrum Analyzer                    | ADVANTEST                          | TR4172                   | 60690030                 |
| *22 Preselector                          | ADVANTEST                          | TR14307                  | 68360004                 |
| *23 RF Switch                            | ADVANTEST                          | TR14308                  | 8604004                  |
| *24 Standard Signal Generator            | Anritsu                            | MG645B1                  | M54866                   |