

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3 MAXIMUM POWER SPECTRAL DENSITY

Test Date	2022/02/17~03/31	Temp./Hum.	17~22°C/64~70%
Cable Loss	1.9dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		
Simultaneous Factor 10 log(N _{ANT})(Note: where N _{ANT} is the number of outputs)			3dB

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.3.1 Power Spectral Density Result

● OFDM Modulation

SKU #1 (with INPAQ Antenna)

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz) ^{Note 2}		Directional Antenna Gain (dBi) ^{Note 4}	Max. e.i.r.p Density (dBm/MHz) ^{Note 3}	Limit (dBm/MHz)
			ANT A (AUX)	ANT B (Main)			
802.11ax-HE20	5	5955	-7.303	-7.146	5.13	-2.016	-1
		6175	-7.431	-7.155	5.13	-2.025	
		6415	-7.381	-7.118	5.10	-2.018	
	6	6435	-7.252	-8.114	5.10	-2.152	
		6475	-7.403	-7.001	5.10	-1.901	
		6515	-7.224	-7.738	5.10	-2.124	
	7	6535	-9.041	-8.824	5.10	-3.724	
		6695	-7.958	-7.540	5.10	-2.440	
		6855	-7.743	-8.335	4.86	-2.883	
	8	6875	-7.840	-7.554	4.86	-2.694	
		6995	-6.641	-6.581	4.86	-1.721	
		7115	-11.179	-11.805	4.86	-6.319	
802.11ax-HE40	5	5965	-6.816	-7.368	5.13	-1.686	-1
		6165	-7.100	-7.913	5.13	-1.970	
		6405	-6.893	-7.920	5.10	-1.793	
	6	6445	-6.995	-7.836	5.10	-1.895	
		6485	-6.803	-7.594	5.10	-1.703	
		6525	-6.880	-7.140	5.10	-1.780	
	7	6685	-7.177	-7.536	5.10	-2.077	
		6845	-7.232	-7.723	4.86	-2.372	
		6885	-7.150	-7.742	4.86	-2.290	
	8	7005	-6.942	-7.591	4.86	-2.082	
		7085	-7.160	-7.878	4.86	-2.300	
802.11ax-HE80	5	5985	-7.051	-6.932	5.13	-1.802	-1
		6145	-6.887	-7.058	5.13	-1.757	
		6385	-6.710	-6.290	5.10	-1.190	
	6	6465	-6.921	-6.300	5.10	-1.200	
		6545	-7.301	-6.552	5.10	-1.452	
		6625	-8.057	-9.134	5.10	-1.452	
	7	6705	-8.295	-9.317	5.10	-2.957	
		6785	-8.090	-9.117	5.10	-3.195	
		6865	-8.547	-9.416	4.86	-2.990	
	8	6945	-7.815	-7.145	4.86	-3.687	
		7025	-7.817	-8.637	4.86	-2.285	
802.11ax-HE160	5	6025	-6.818	-6.780	5.13	-2.957	-1
		6185	-6.777	-6.841	5.13	-1.650	
		6345	-6.672	-6.307	5.10	-1.647	
	6	6505	-7.014	-6.998	5.10	-1.207	
	7	6665	-7.918	-8.228	5.10	-1.898	
		6825	-7.968	-8.025	5.10	-2.818	
	8	6985	-7.985	-8.259	4.86	-2.868	

Note: 1. All results have been included cable loss and Simultaneous Factor [Please refer to KDB 662911 E 2) c)]

2. Each output of PSD = individual spectrum value +10 log (N_{ANT})

3. Max. e.i.r.p Density= The Max. of Power Spectral Density [ANT A (AUX) or ANT B (Main)]+ Directional Antenna Gain

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = 10 log[(10^{G1/10} + 10^{G2/10} + ... + 10^{GN/10})/N_{ANT}] dBi

Directional gain:

5925MHz: 10 log[(10^{5.6/10} + 10^{4.6/10})/2]= 5.13dBi

6525MHz: 10 log[(10^{5.2/10} + 10^{5.0/10})/2]= 5.10dBi

7125MHz: 10 log[(10^{5.1/10} + 10^{4.6/10})/2]= 4.86dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only.

This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

SKU #2 (with LUXSHARE-ICT Antenna)

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz) ^{Note 2}		Directional Antenna Gain (dBi) ^{Note 4}	Max. e.i.r.p Density (dBm/MHz) ^{Note 3}	Limit (dBm/MHz)
			ANT A (AUX)	ANT B (Main)			
802.11ax-HE20	5	5955	-7.303	-7.146	1.95	-5.196	-1
		6175	-7.431	-7.155	1.95	-5.205	
		6415	-7.381	-7.118	1.60	-5.518	
	6	6435	-7.252	-8.114	1.60	-5.652	
		6475	-7.403	-7.001	1.60	-5.401	
		6515	-7.224	-7.738	1.60	-5.624	
	7	6535	-9.041	-8.824	1.60	-7.224	
		6695	-7.958	-7.540	1.60	-5.940	
		6855	-7.743	-8.335	2.83	-4.913	
	8	6875	-7.840	-7.554	2.83	-4.724	
		6995	-6.641	-6.581	2.83	-3.751	
		7115	-11.179	-11.805	2.83	-8.349	
802.11ax-HE40	5	5965	-6.816	-7.368	1.95	-4.866	-1
		6165	-7.100	-7.913	1.95	-5.150	
		6405	-6.893	-7.920	1.60	-5.293	
	6	6445	-6.995	-7.836	1.60	-5.395	
		6485	-6.803	-7.594	1.60	-5.203	
		6525	-6.880	-7.140	1.60	-5.280	
	7	6685	-7.177	-7.536	1.60	-5.577	
		6845	-7.232	-7.723	2.83	-4.402	
		6885	-7.150	-7.742	2.83	-4.320	
	8	7005	-6.942	-7.591	2.83	-4.112	
		7085	-7.160	-7.878	2.83	-4.330	
802.11ax-HE80	5	5985	-7.051	-6.932	1.95	-4.982	-1
		6145	-6.887	-7.058	1.95	-4.937	
		6385	-6.710	-6.290	1.60	-4.690	
	6	6465	-6.921	-6.300	1.60	-4.700	
		6545	-7.301	-6.552	1.60	-4.952	
		6625	-8.057	-9.134	1.60	-4.952	
	7	6705	-8.295	-9.317	1.60	-6.457	
		6785	-8.090	-9.117	1.60	-6.695	
		6865	-8.547	-9.416	2.83	-6.490	
	8	6945	-7.815	-7.145	2.83	-5.717	
		7025	-7.817	-8.637	2.83	-4.315	
802.11ax-HE160	5	6025	-6.818	-6.780	1.95	-4.987	-1
		6185	-6.777	-6.841	1.95	-4.830	
		6345	-6.672	-6.307	1.60	-4.827	
	6	6505	-7.014	-6.998	1.60	-4.707	
		6665	-7.918	-8.228	1.60	-5.398	
	7	6825	-7.968	-8.025	1.60	-6.318	
		6985	-7.985	-8.259	2.83	-6.368	
	8						

Note: 1. All results have been included cable loss and Simultaneous Factor [Please refer to KDB 662911 E 2) c)]

2. Each output of PSD = individual spectrum value +10 log (N_{ANT})

3. Max. e.i.r.p Density= The Max. of Power Spectral Density [ANT A (AUX) or ANT B (Main)]+ Directional Antenna Gain

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = 10 log[(10^{G1/10} + 10^{G2/10} + ... + 10^{GN/10})/N_{ANT}] dBi

Directional gain:

5925MHz: 10 log[(10^{2.1/10} + 10^{1.8/10})/2]= 1.95dBi

6525MHz: 10 log[(10^{1.6/10} + 10^{1.6/10})/2]= 1.60dBi

7125MHz: 10 log[(10^{1.9/10} + 10^{3.6/10})/2]= 2.83dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only.

This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● OFDMA Modulation
SKU #1 (with INPAQ Antenna)

Tones	RU Index	Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz) ^{Note 2}		Directional Antenna Gain (dBi) ^{Note 5}	Max. e.i.r.p Density (dBm/MHz) ^{Note 3}	Limit (dBm/MHz)
					ANT A (AUX)	ANT B (Main)			
26T	0	802.11ax- HE20	5	5955	-6.805	-6.323	5.13	-1.193	-1
52T	37	802.11ax- HE20	5	5955	-6.328	-6.263	5.13	-1.133	
106T	53	802.11ax- HE20	5	5955	-6.928	-6.725	5.13	-1.595	
242T	62	802.11ax- HE160	5	6025	-6.808	-7.707	5.13	-1.678	
484T	66	802.11ax- HE160	5	6025	-6.728	-7.005	5.13	-1.598	
996T	67	802.11ax- HE160	5	6025	-6.934	-6.223	5.13	-1.093	

Note: 1. All results have been included cable loss and Simultaneous Factor [Please refer to KDB 662911 E 2) c)]

2. Each output of PSD = individual spectrum value +10 log (N_{ANT})

3. Max. e.i.r.p Density= The Max. of Power Spectral Density [ANT A (AUX) or ANT B (Main)]+ Directional Antenna Gain

4. After preliminary test, we present worst case with maximum power of each RU type.

5. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = 10 log[(10^{G1/10} + 10^{G2/10} + ... + 10^{GN/10})/N_{ANT}] dBi

Directional gain:

5925MHz: 10 log[(10^{5.6/10} + 10^{4.6/10})/2]= 5.13dBi

6525MHz: 10 log[(10^{5.2/10} + 10^{5.0/10})/2]= 5.10dBi

7125MHz: 10 log[(10^{5.1/10} + 10^{4.6/10})/2]= 4.86dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only.

This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

SKU #2 (with LUXSHARE-ICT Antenna)

Tones	RU Index	Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz) ^{Note 2}		Directional Antenna Gain (dBi) ^{Note 5}	Max. e.i.r.p Density (dBm/MHz) ^{Note 3}	Limit (dBm/MHz)
					ANT A (AUX)	ANT B (Main)			
26T	0	802.11ax- HE20	5	5955	-6.805	-6.323	1.95	-4.373	-1
52T	37	802.11ax- HE20	5	5955	-6.328	-6.263	1.95	-4.313	
106T	53	802.11ax- HE20	5	5955	-6.928	-6.725	1.95	-4.775	
242T	62	802.11ax- HE160	5	6025	-6.808	-7.707	1.95	-4.858	
484T	66	802.11ax- HE160	5	6025	-6.728	-7.005	1.95	-4.778	
996T	67	802.11ax- HE160	5	6025	-6.934	-6.223	1.95	-4.273	

Note: 1. All results have been included cable loss and Simultaneous Factor [Please refer to KDB 662911 E 2) c)]

2. Each output of PSD = individual spectrum value +10 log (N_{ANT})

3. Max. e.i.r.p Density= The Max. of Power Spectral Density [ANT A (AUX) or ANT B (Main)]+ Directional Antenna Gain

4. After preliminary test, we present worst case with maximum power of each RU type.

5. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = 10 log[(10^{G1/10} + 10^{G2/10} + ... + 10^{GN/10})/N_{ANT}] dBi

Directional gain:

5925MHz: 10 log[(10^{2.1/10} + 10^{1.8/10})/2]= 1.95dBi

6525MHz: 10 log[(10^{1.6/10} + 10^{1.6/10})/2]= 1.60dBi

7125MHz: 10 log[(10^{1.9/10} + 10^{3.6/10})/2]= 2.83dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only.


This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.3.2 Measurement Plots

● OFDM Modulation

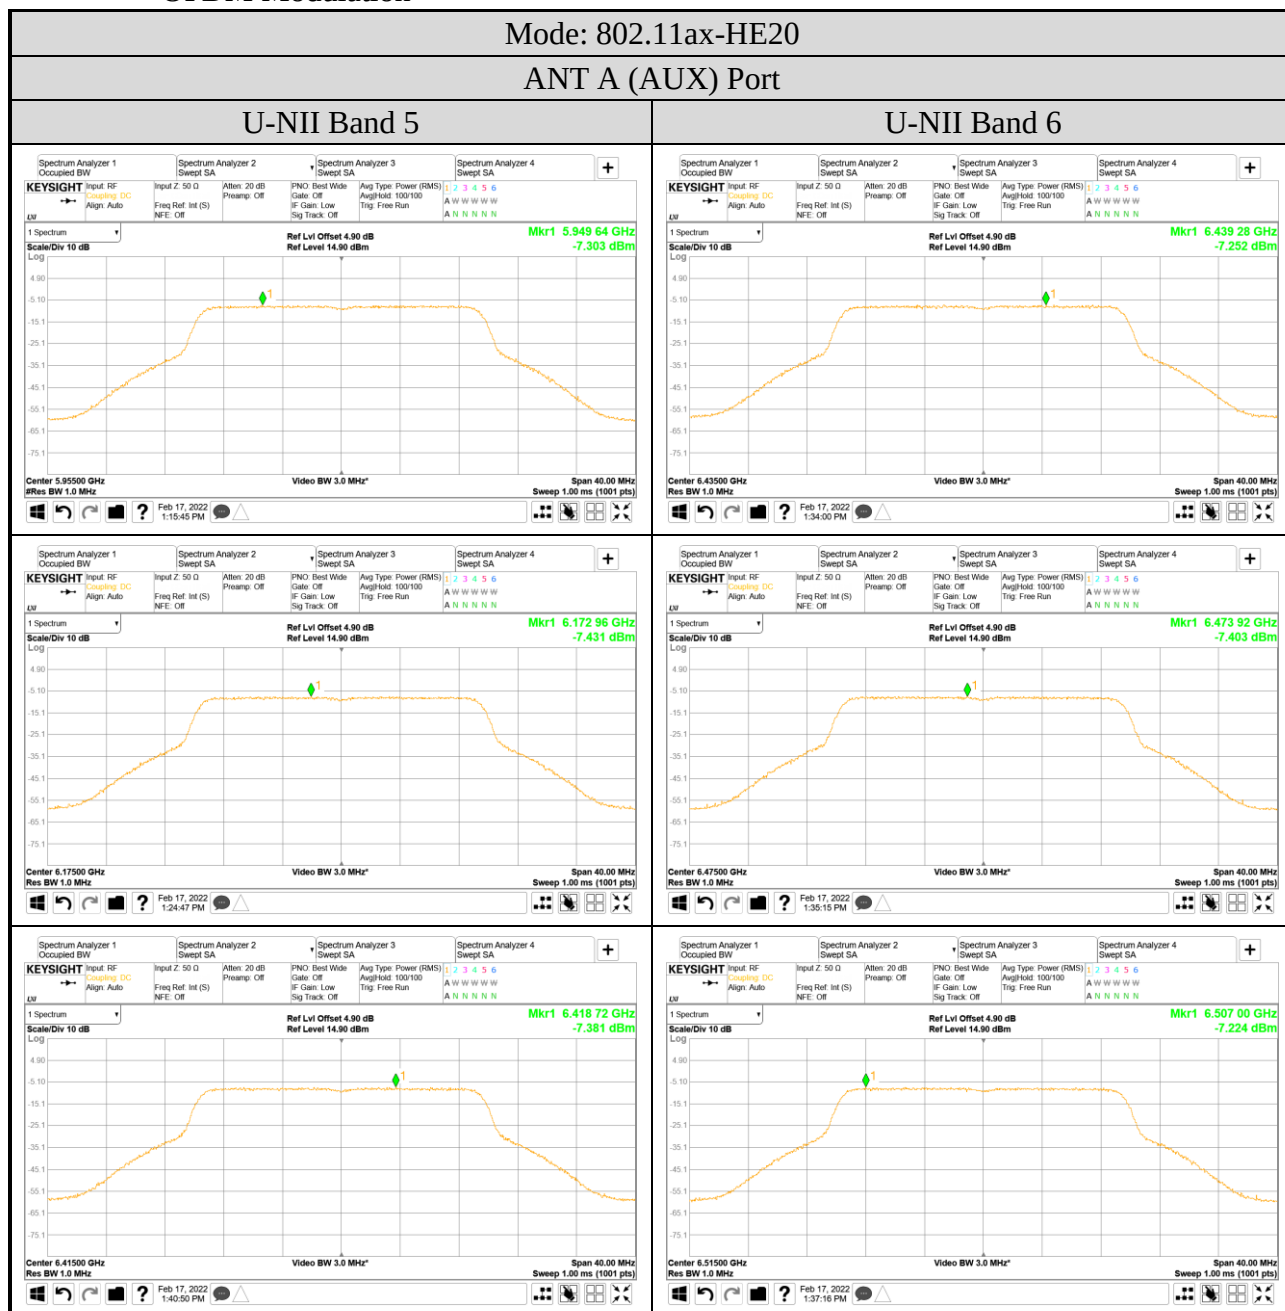


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

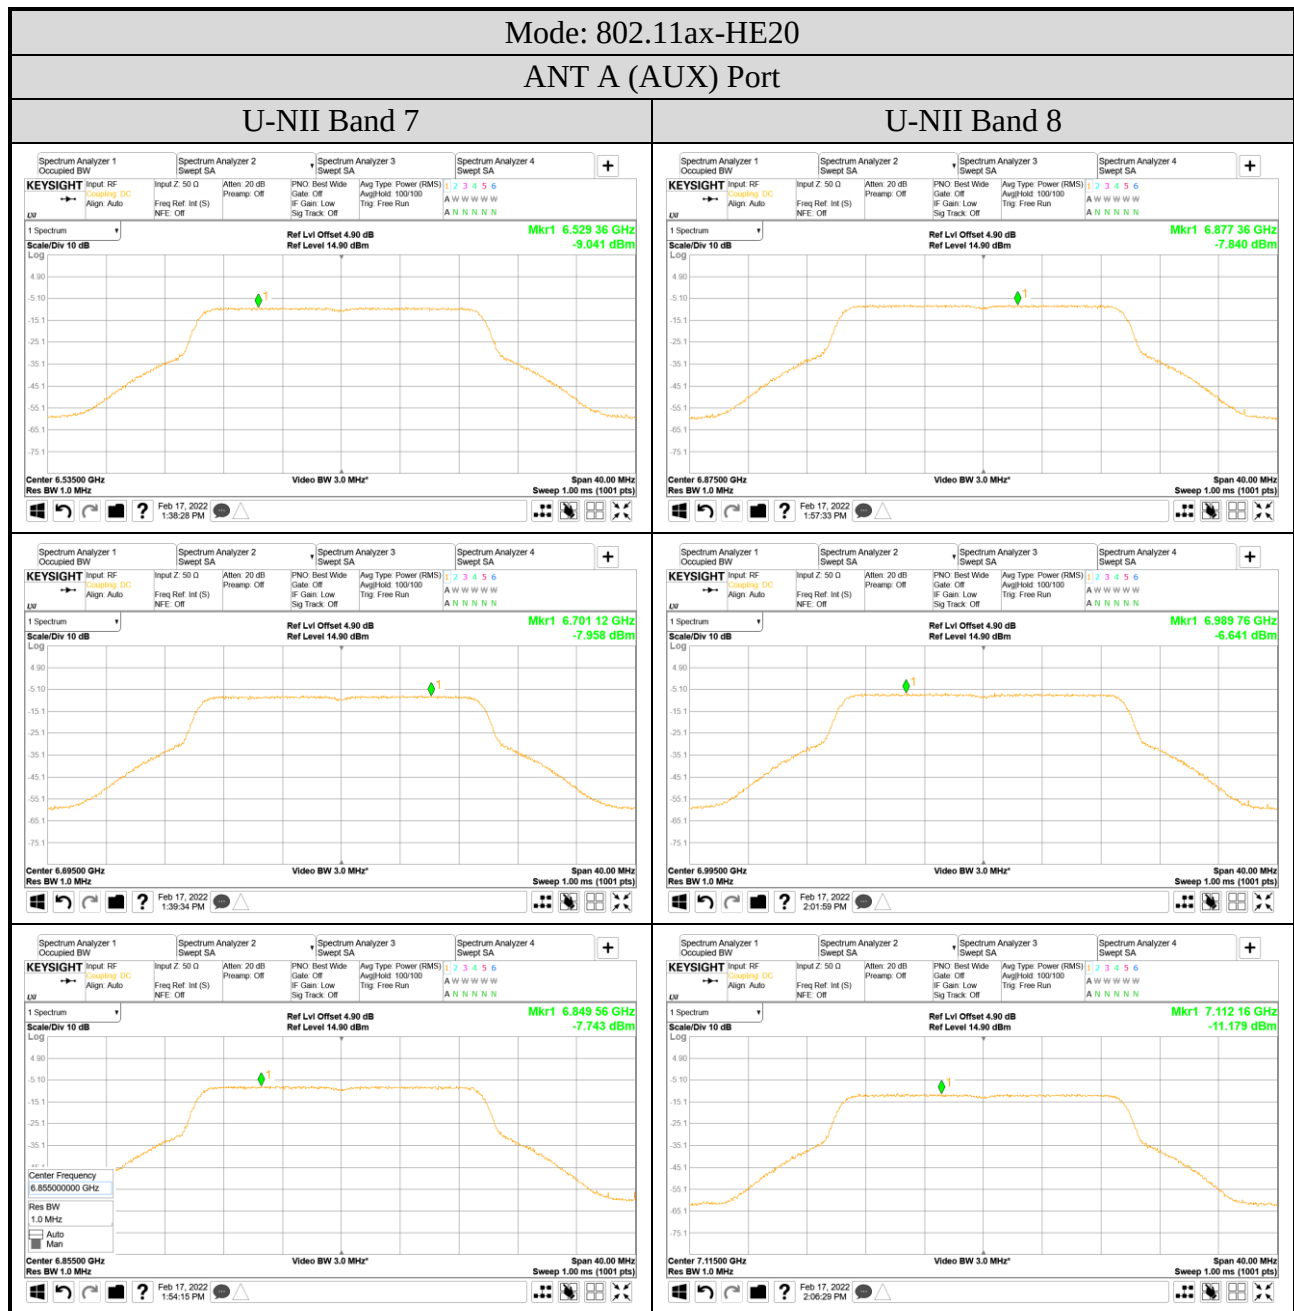

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

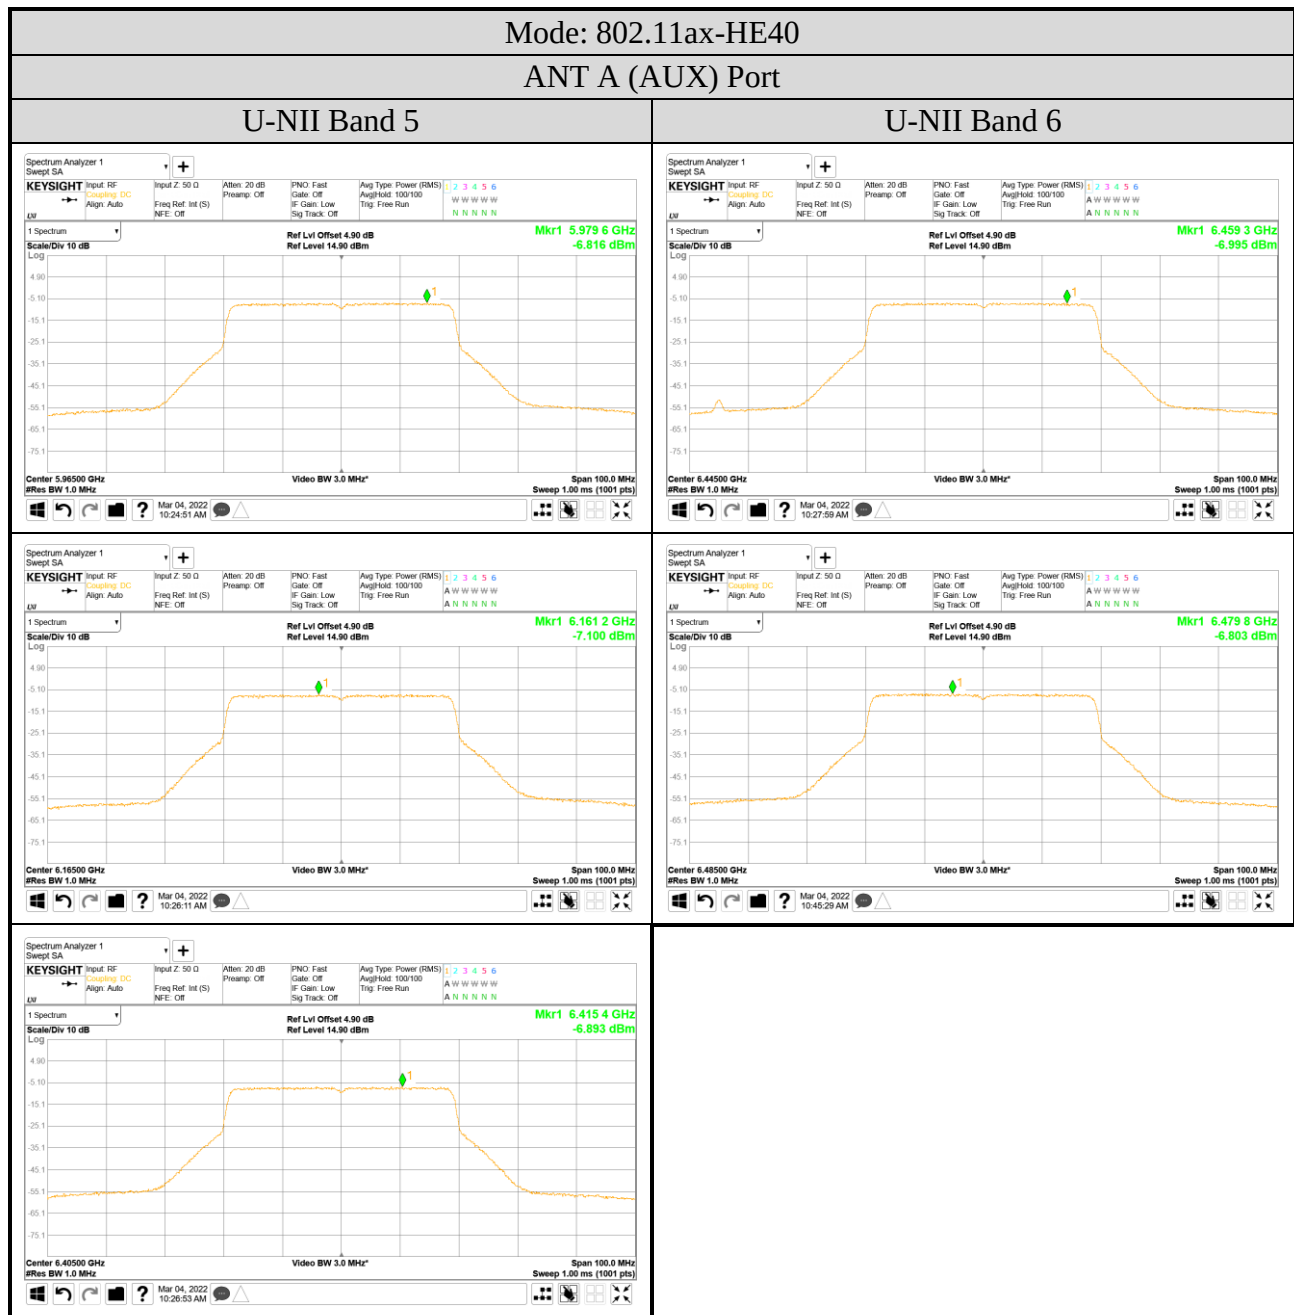


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan


Tel: +886 2 26099301

Fax: +886 2 26099303

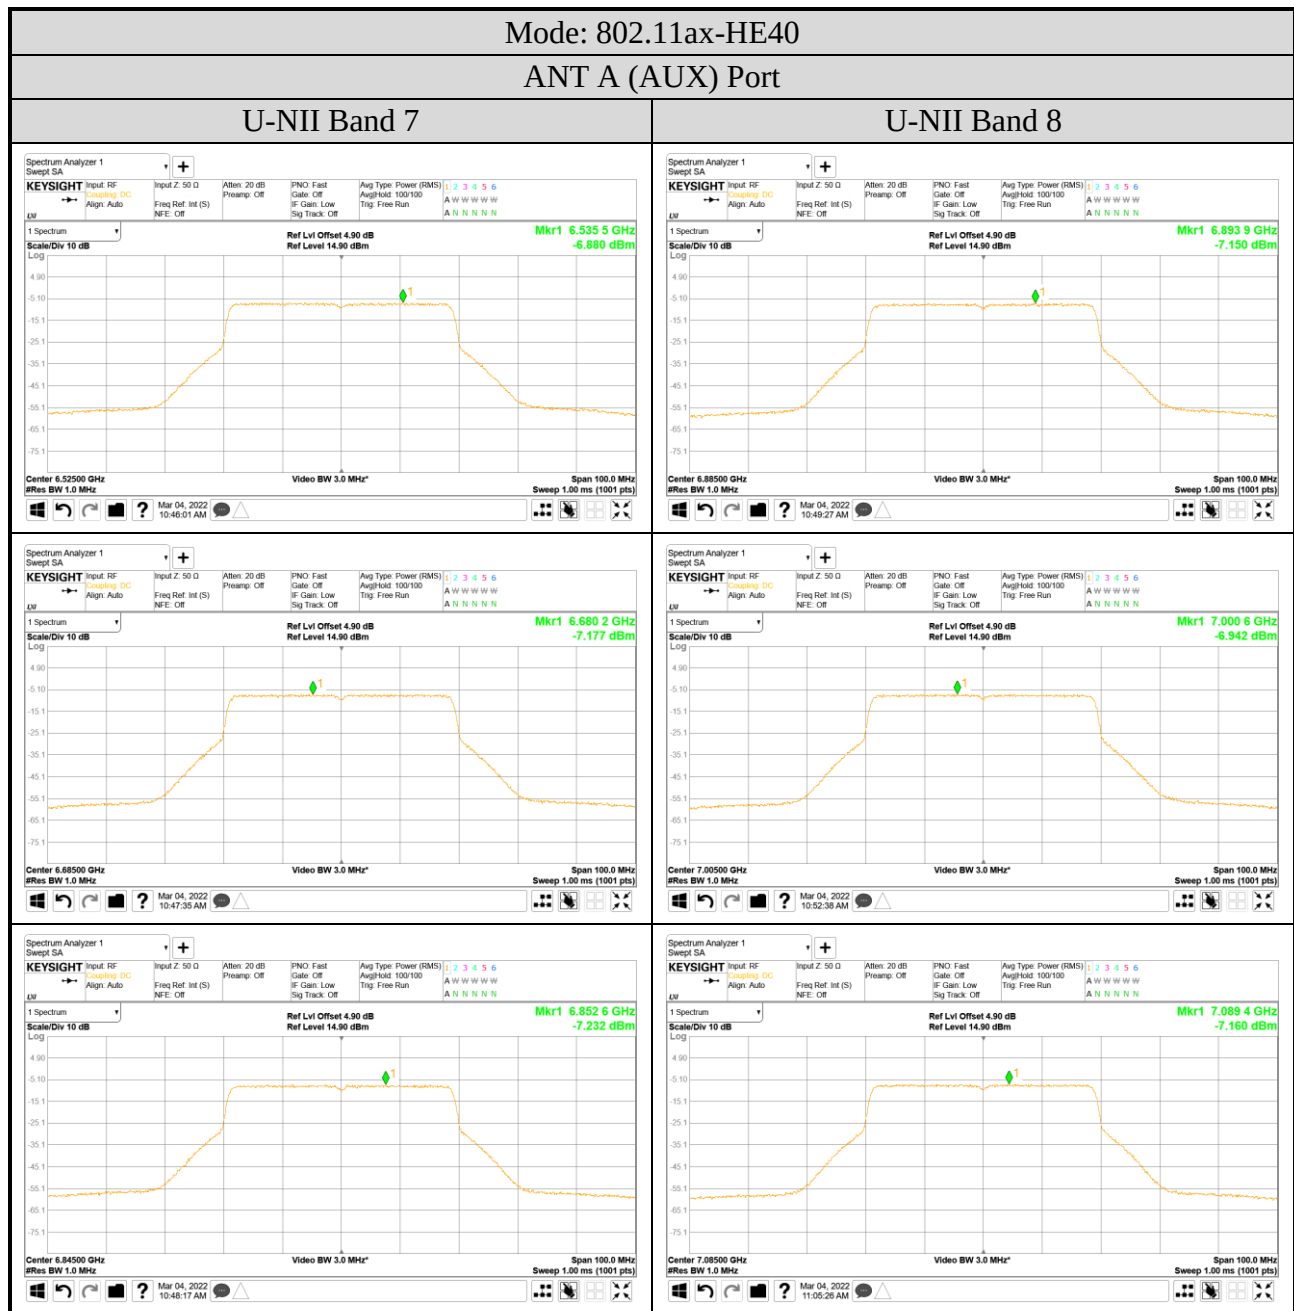


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

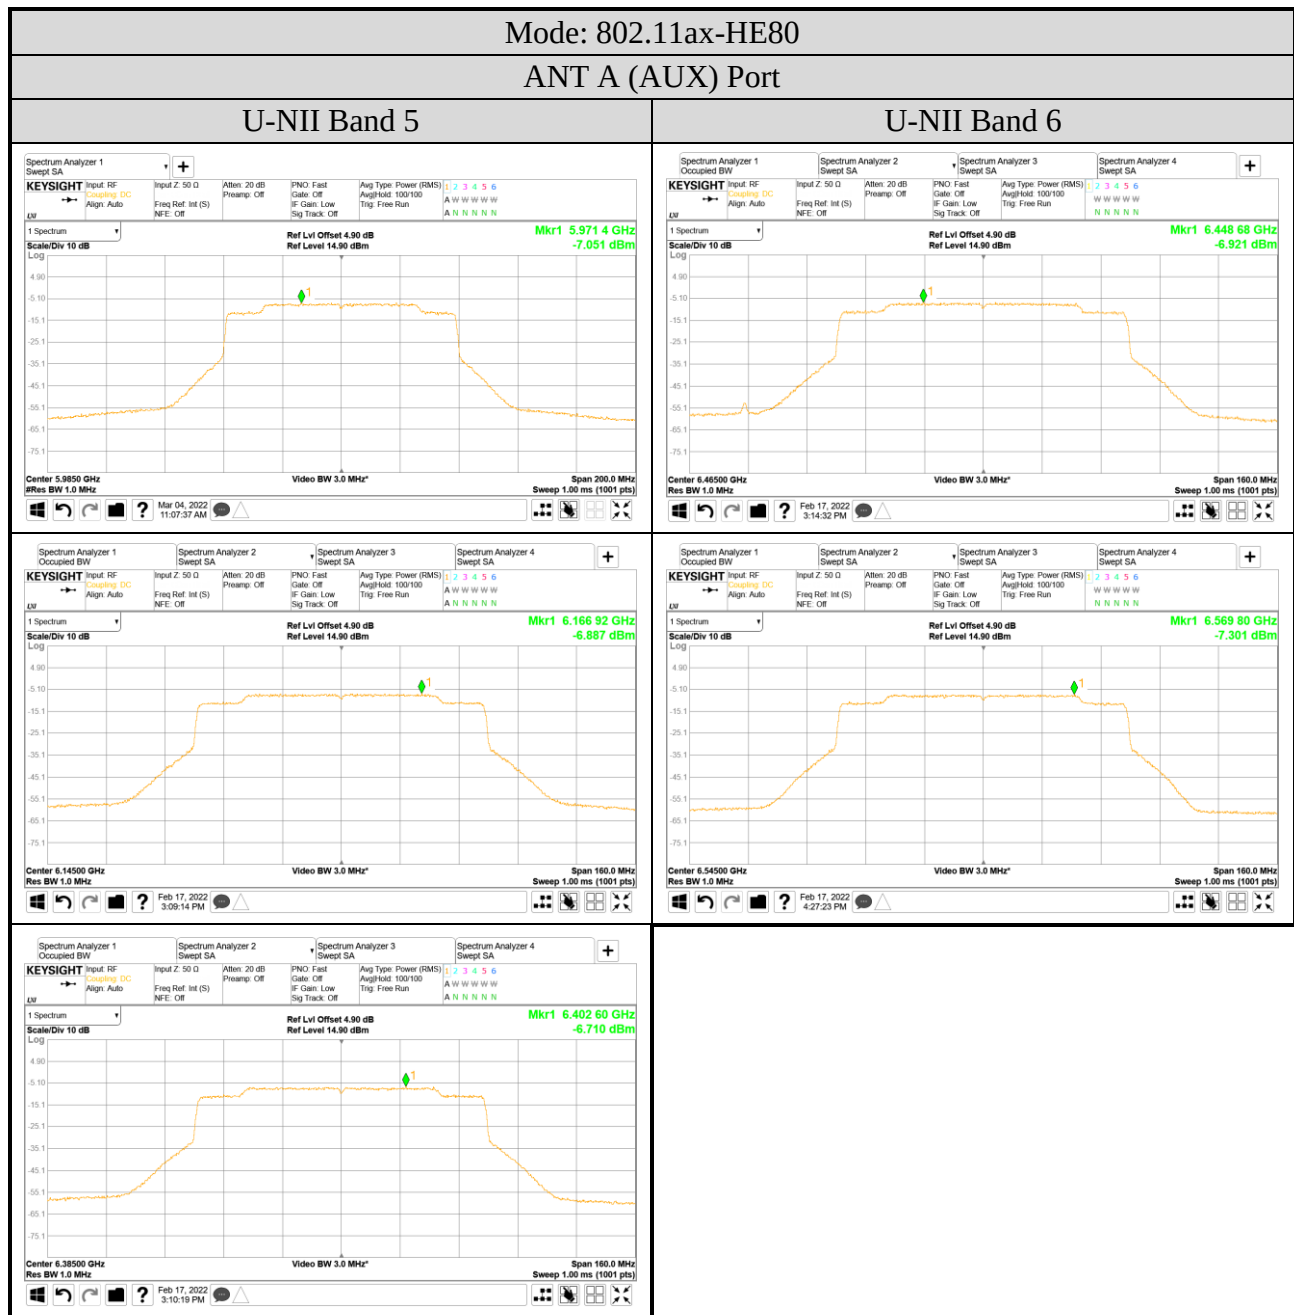


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

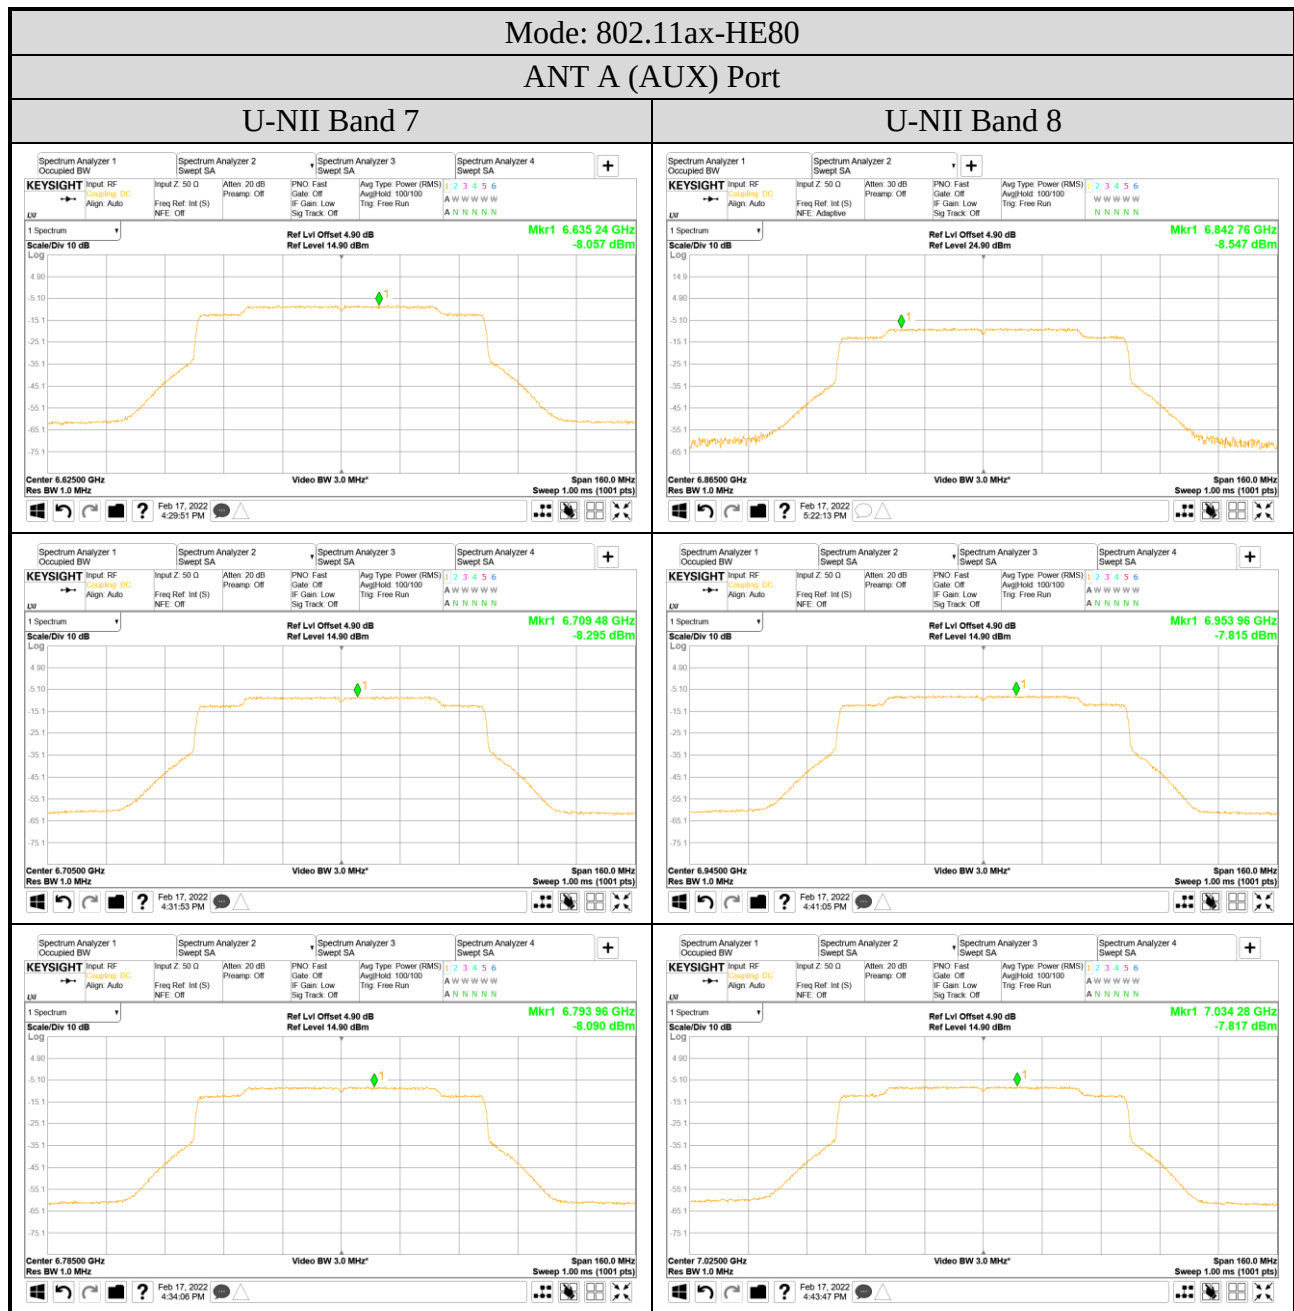


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

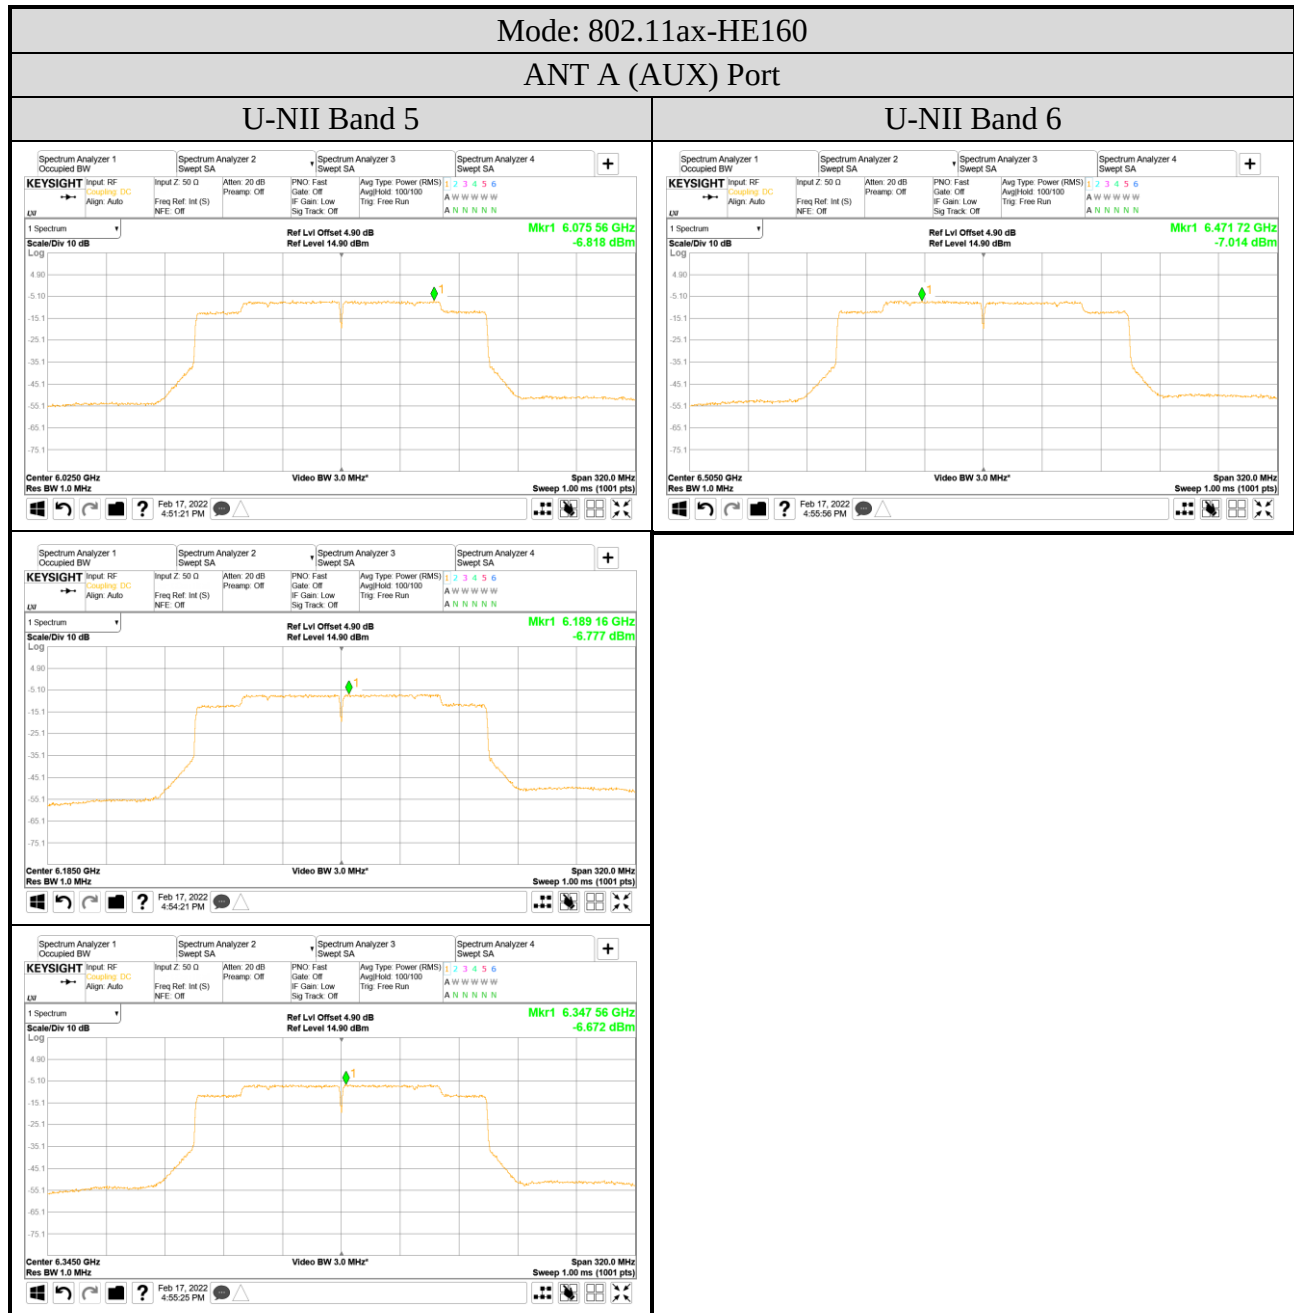

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

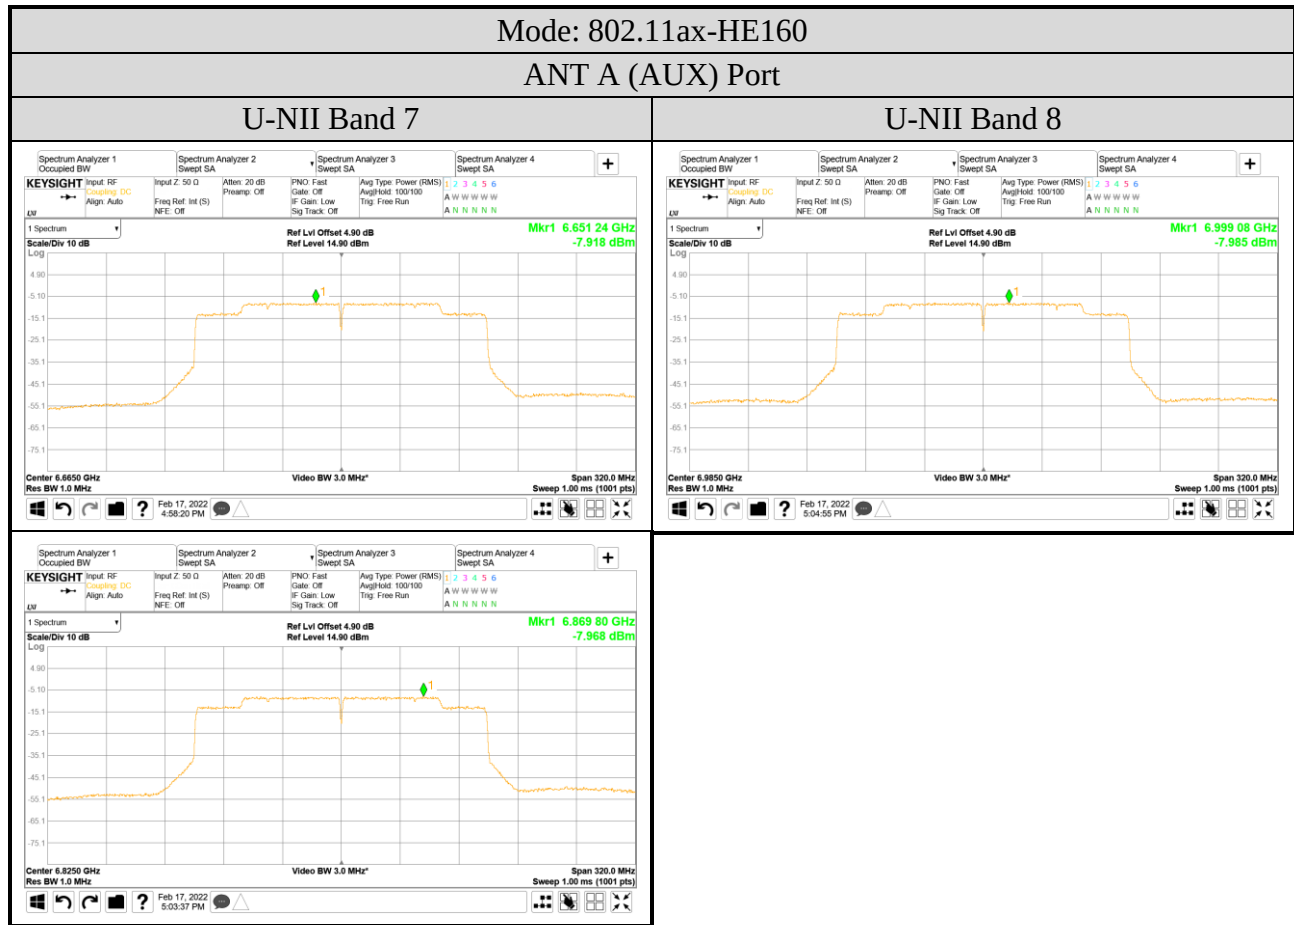

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● OFDMA Modulation

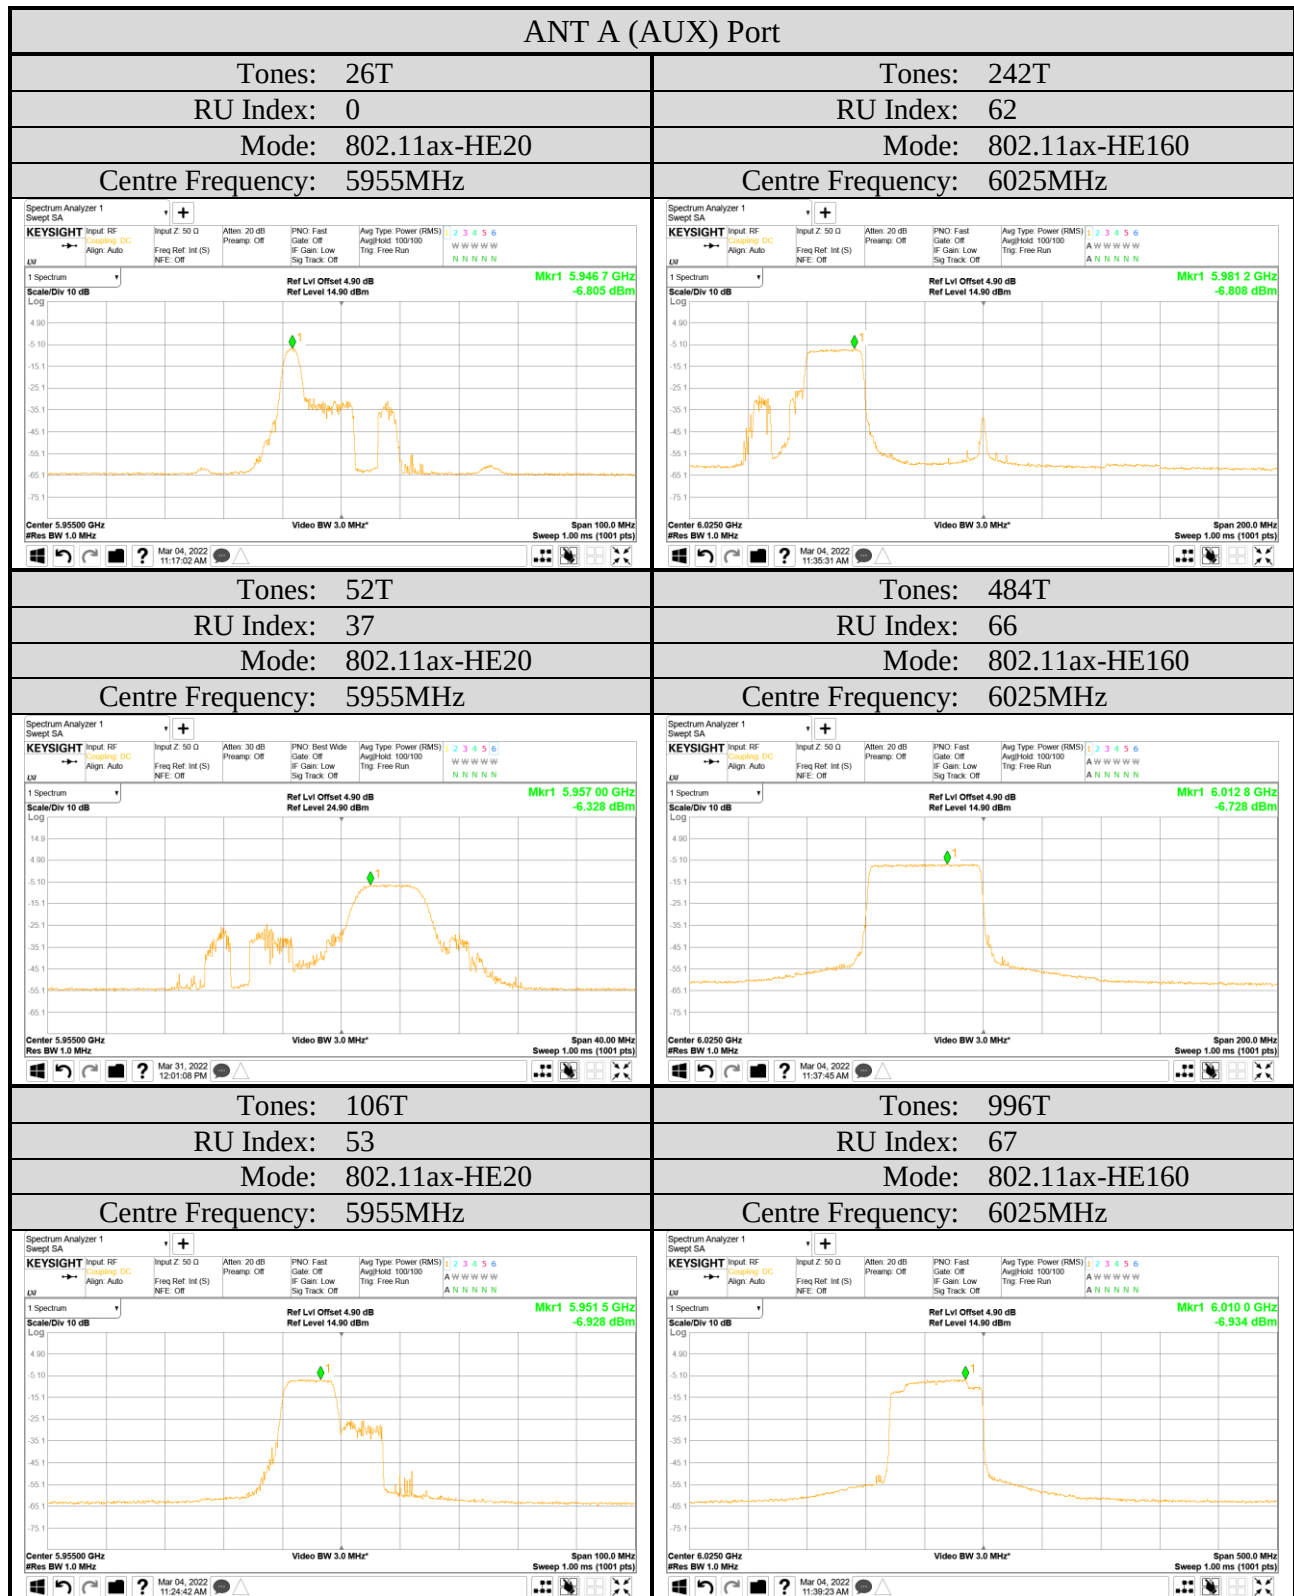


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● OFDM Modulation

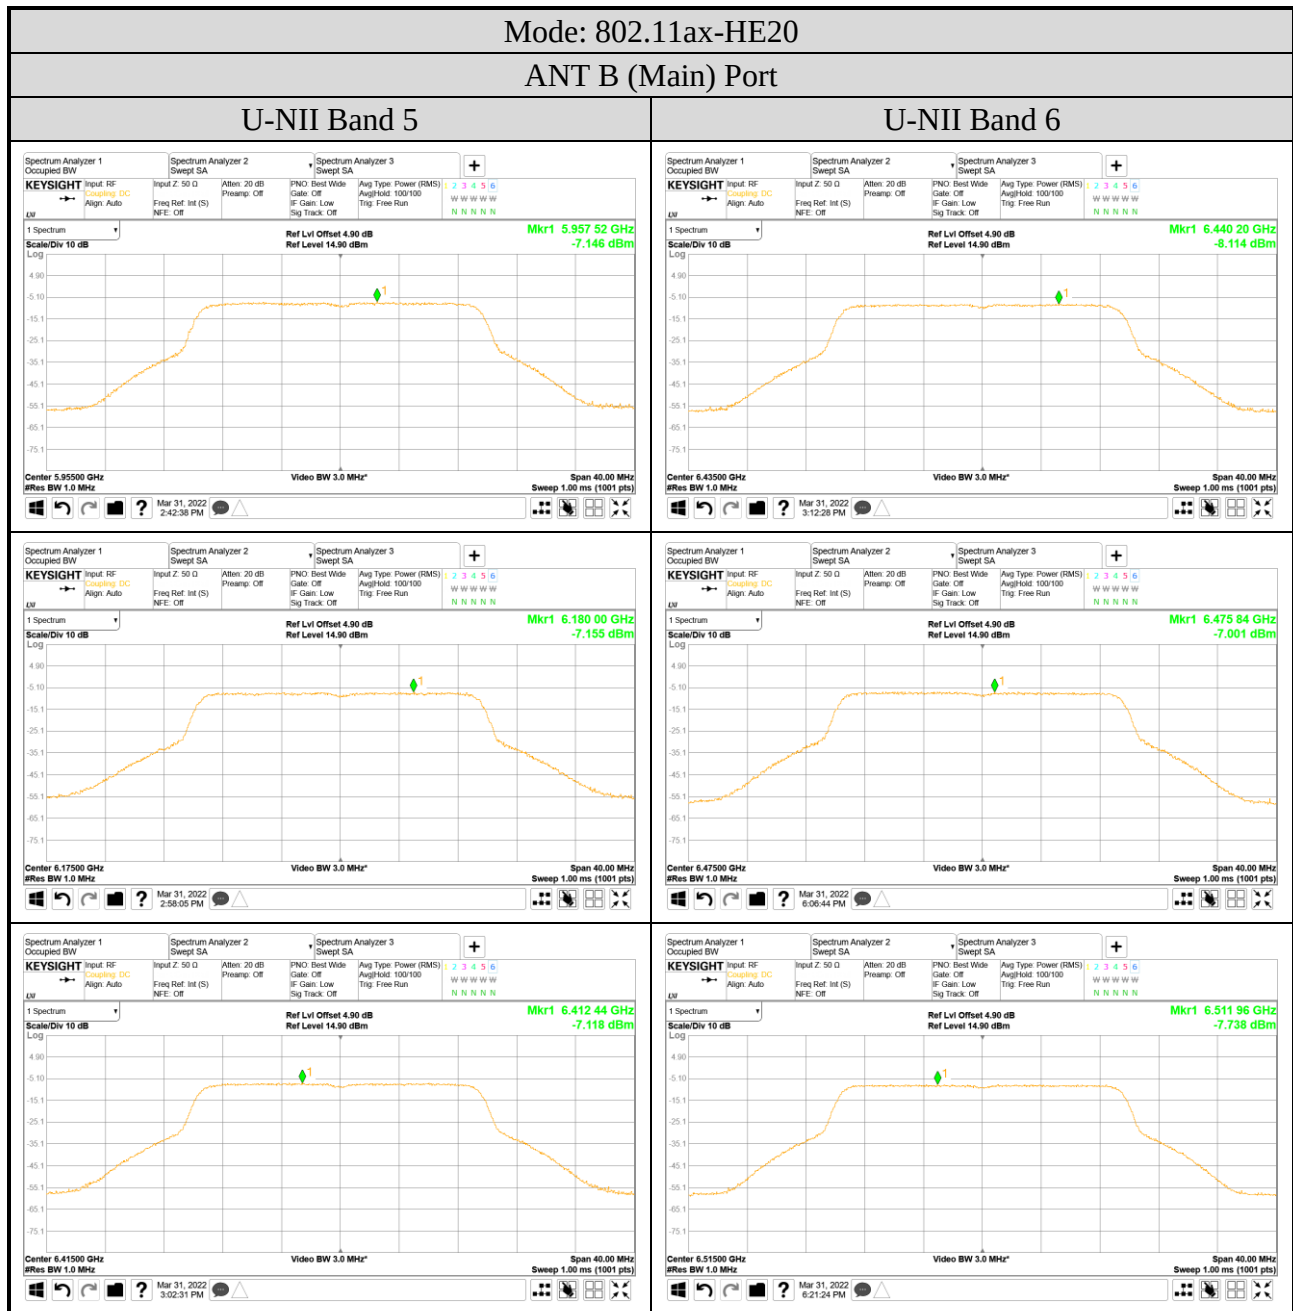

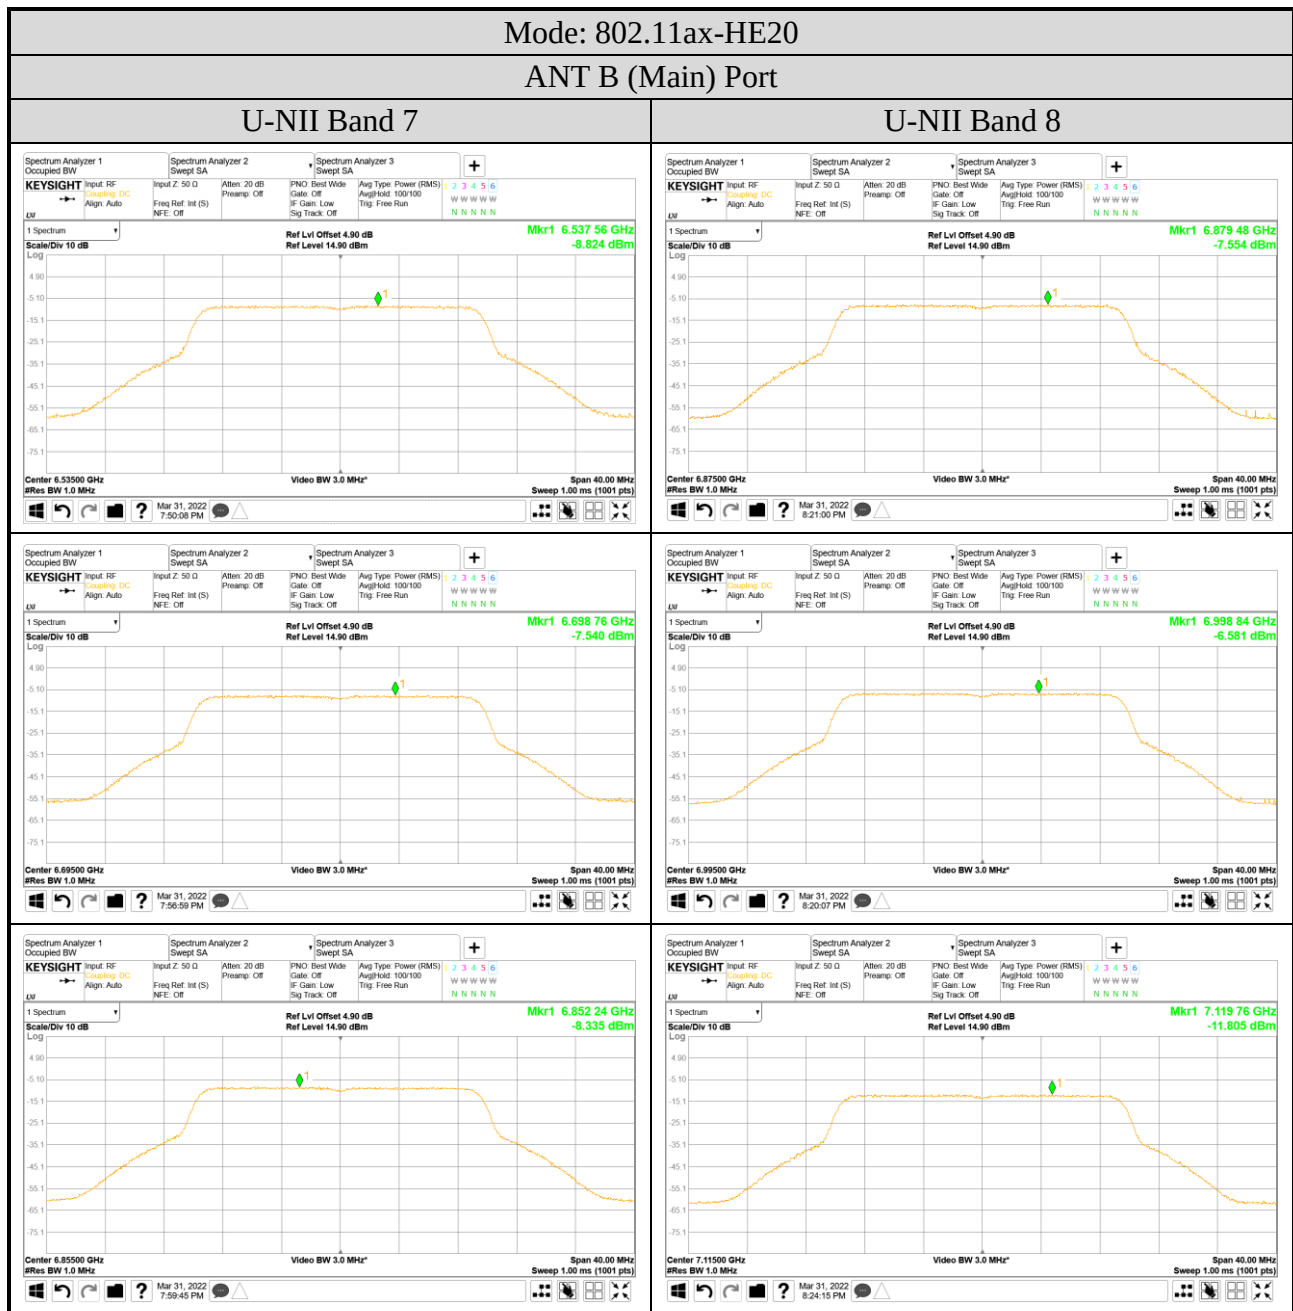


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

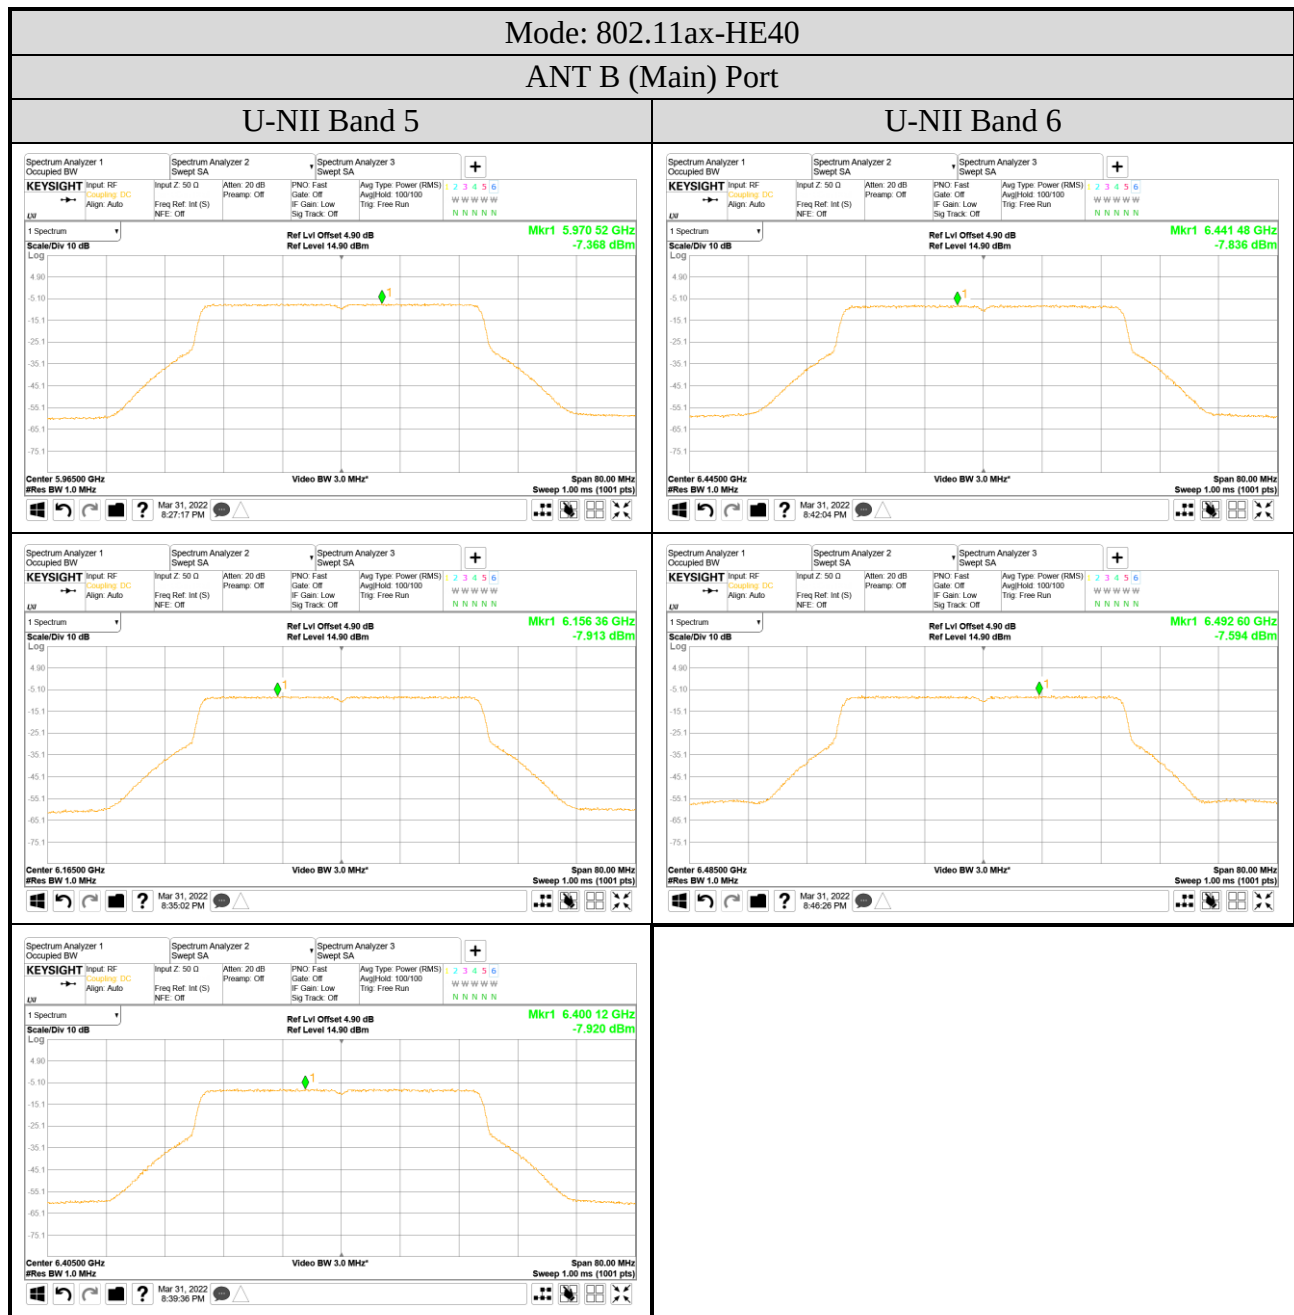


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

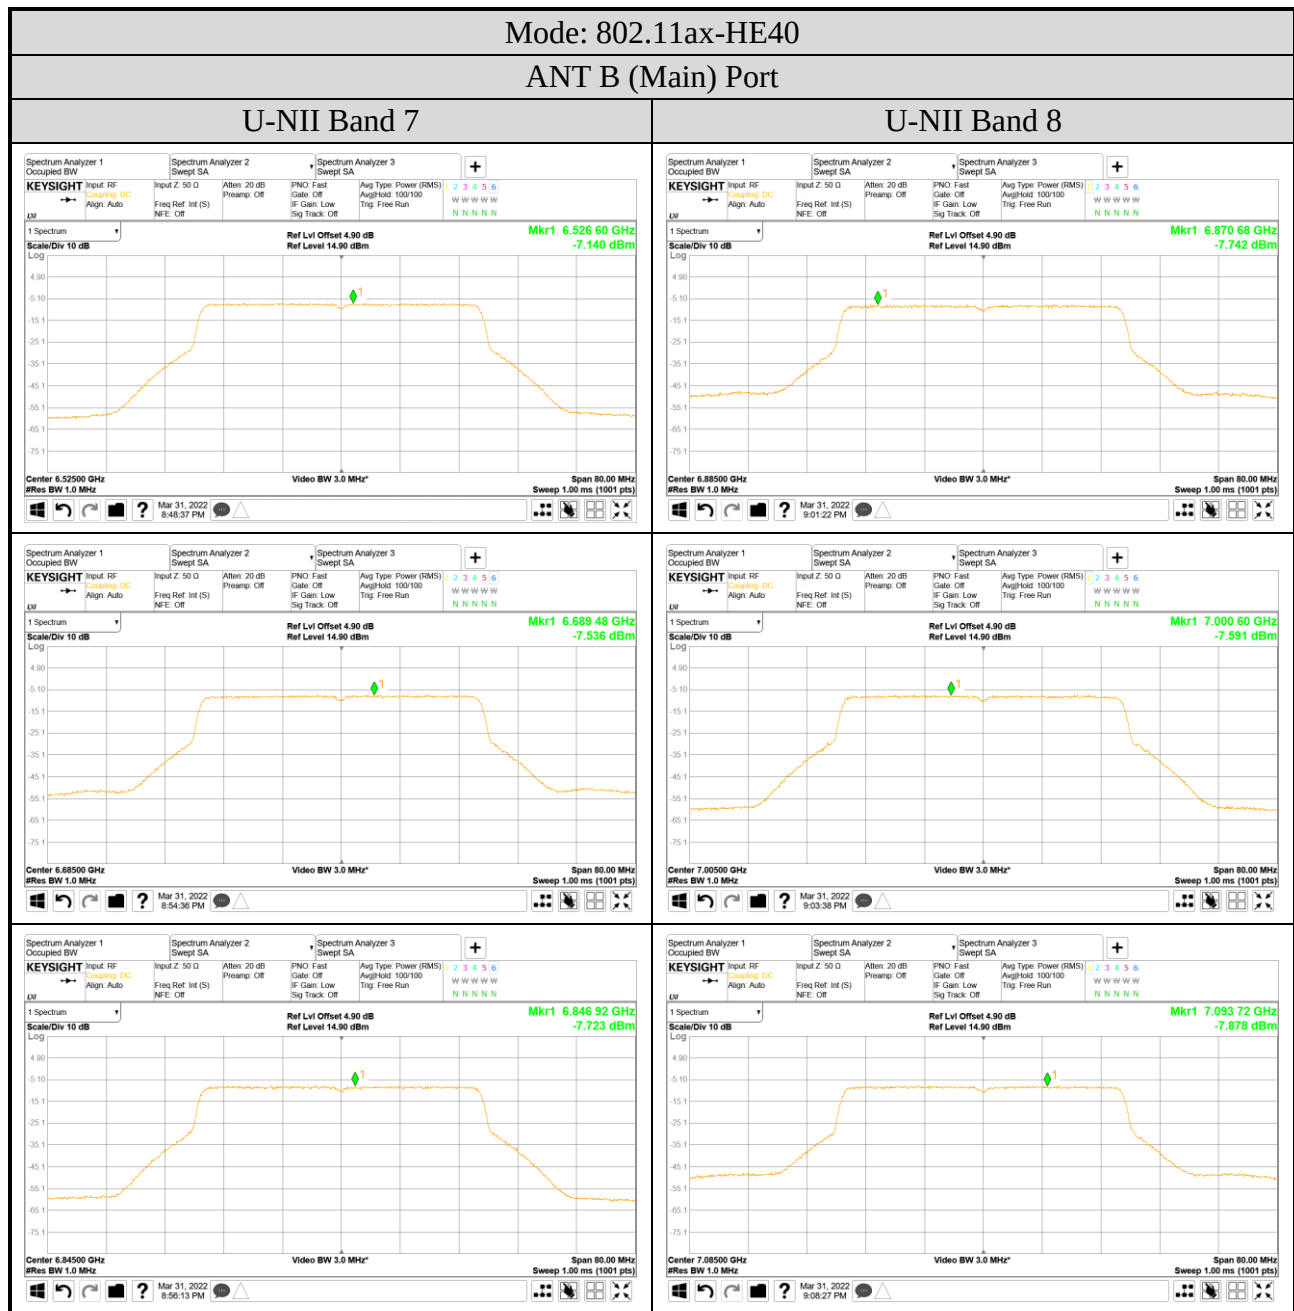


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

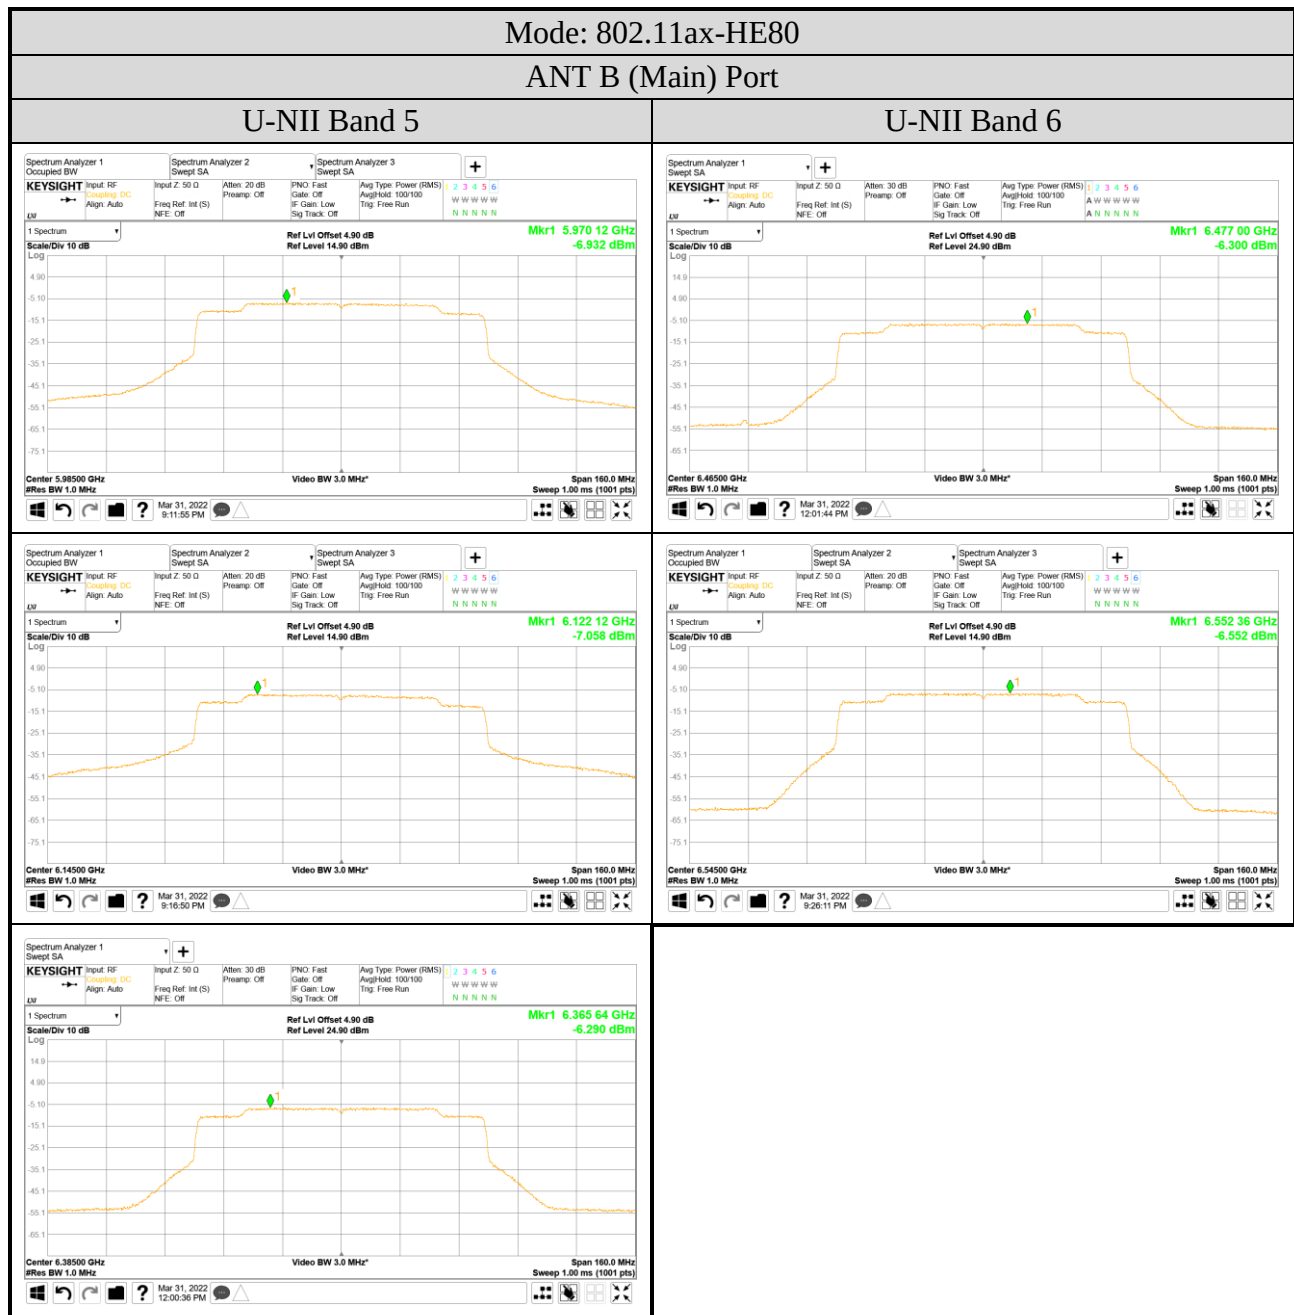

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

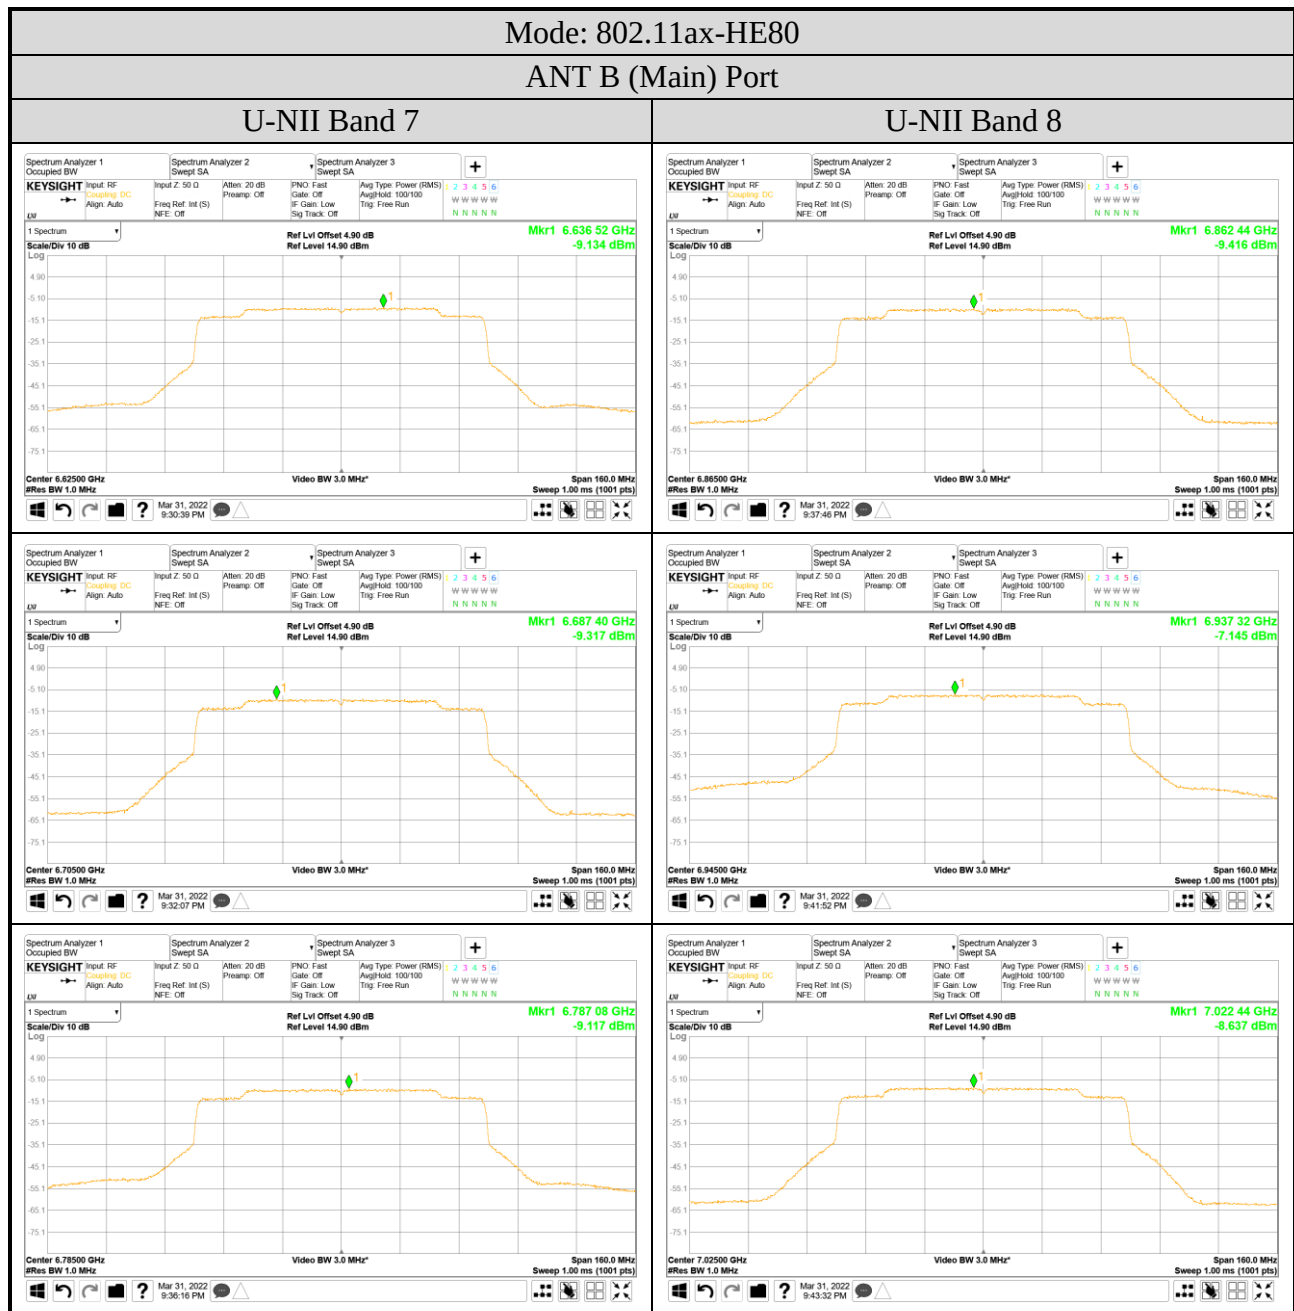


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan


Tel: +886 2 26099301

Fax: +886 2 26099303

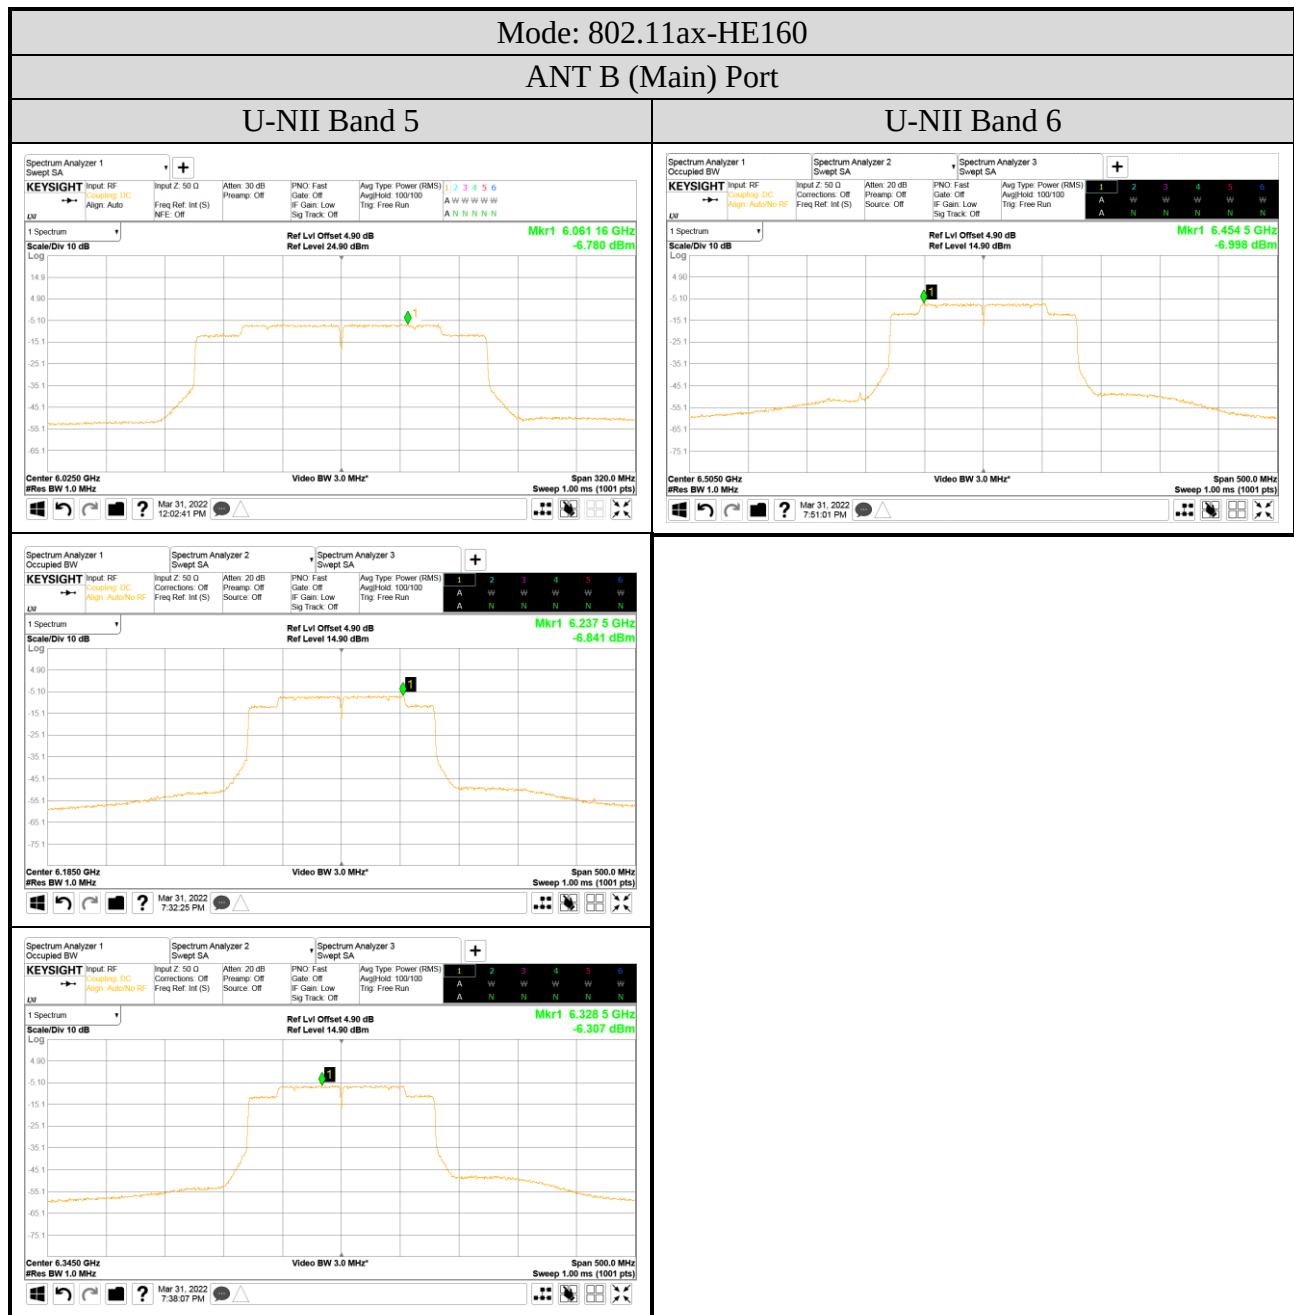

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

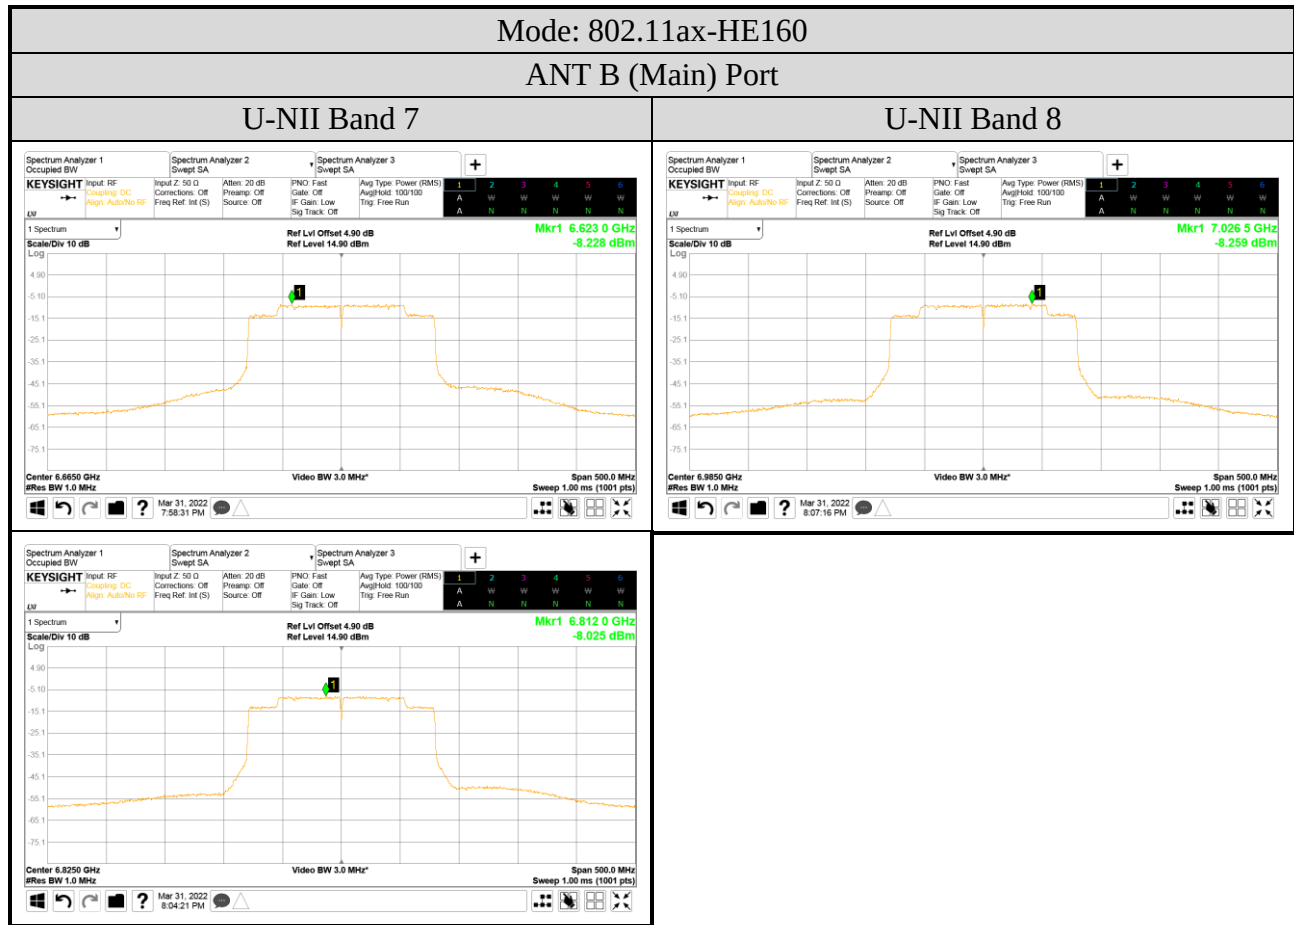

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● OFDMA Modulation

