

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 MAXIMUM CONDUCTED OUTPUT POWER

Test Date	2022/10/16 ~ 19	Temp./Hum.	22-23°C/69-72%
Cable Loss	1.5dB	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.4.1 Conducted Output Power Result

Modulation Type	U-NII Band	Centre Frequency (MHz)	Average Coneduted Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) Note3	Total E.I.R.P. (dBm) Note2	Limit
			AUX	Main				
802.11ax-HE20	5	5955	1.93	1.57	N/A	1.60	6.364	24dBm
		6175	1.83	1.51		1.60	6.283	
		6415	1.71	1.54		-0.09	4.546	
	6	6435	1.72	1.65		-0.09	4.605	
		6475	1.94	1.58		-0.09	4.684	
		6515	1.92	1.45		-0.09	4.612	
	7	6535	1.22	0.69		-0.09	3.883	
		6695	1.22	0.28		-0.09	3.696	
		6855	1.38	0.42		3.37	7.307	
	8	6875	1.51	0.56		3.37	7.441	
		6995	1.21	0.33		3.37	7.173	
		7115	-3.02	-2.74		3.37	3.503	
802.11ax-HE40	5	5965	5.64	5.41	N/A	1.60	10.137	24dBm
		6165	5.48	5.31		1.60	10.006	
		6405	5.33	5.27		-0.09	8.220	
	6	6445	5.32	5.41		-0.09	8.286	
		6485	5.49	5.36		-0.09	8.346	
	7	6525	5.60	5.31		-0.09	8.378	
		6685	4.69	4.38		-0.09	7.460	
		6845	4.75	4.32		-0.09	7.461	
	8	6885	4.83	4.43		3.37	11.015	
		7005	4.78	4.30		3.37	10.927	
		7085	5.00	4.58		3.37	11.175	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm)= Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Average Coneduted Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total E.I.R.P. (dBm) ^{Note 2}	Limit
			AUX	Main				
802.11ax-HE80	5	5985	6.83	6.92	N/A	1.60	11.486	24dBm
		6145	6.50	6.73		1.60	11.227	
		6385	6.37	6.67		-0.09	9.443	
	6	6465	6.32	6.71		-0.09	9.440	
		6545	6.62	6.57		-0.09	9.515	
		6625	5.79	5.85		-0.09	8.740	
	7	6705	5.81	5.92		-0.09	8.786	
		6785	5.63	5.64		-0.09	8.555	
	8	6865	5.61	5.60		3.37	11.985	
		6945	5.76	5.69		3.37	12.105	
		7025	5.75	5.75		3.37	12.130	
802.11ax-HE160	5	6025	10.23	10.05	N/A	1.60	14.751	24dBm
		6185	10.21	10.20		1.60	14.815	
		6345	10.22	10.19		-0.09	13.125	
	6	6505	10.28	10.23		-0.09	13.175	
		6665	9.47	9.33		-0.09	12.321	
		6825	9.27	9.16		3.37	15.596	
	8	6985	9.28	9.18		3.37	15.611	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then
Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● OFDMA Modulation

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 0			RU Index 4			RU Index 8				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE20	5	5955	26T	-5.82	-5.51	0.132	-5.74	-5.57	0.132	-5.89	-5.75	0.132	1.6	-0.912
		6175		-7.09	-7.42	0.132	-6.88	-7.20	0.132	-7.14	-7.46	0.132	1.6	-2.295
		6415		-7.48	-7.90	0.132	-7.39	-7.73	0.132	-7.64	-7.99	0.132	-0.09	-4.504
	6	6435		-7.62	-7.80	0.132	-7.43	-7.52	0.132	-7.65	-7.85	0.132	-0.09	-4.422
		6475		-7.74	-7.91	0.132	-7.61	-7.75	0.132	-7.83	-8.03	0.132	-0.09	-4.627
		6515		-7.91	-8.15	0.132	-7.74	-8.00	0.132	-7.96	-8.22	0.132	-0.09	-4.816
	7	6535		-8.70	-8.94	0.132	-8.50	-8.82	0.132	-8.82	-9.04	0.132	-0.09	-5.605
		6695		-9.17	-8.75	0.132	-8.98	-8.52	0.132	-9.21	-8.75	0.132	-0.09	-5.692
		6855		-8.72	-8.38	0.132	-8.56	-8.20	0.132	-8.85	-8.43	0.132	3.37	-1.864
	8	6875		-8.87	-8.52	0.132	-8.75	-8.33	0.132	-9.02	-8.62	0.132	3.37	-2.023
		6995		-7.84	-7.72	0.132	-7.69	-7.58	0.132	-7.91	-7.82	0.132	3.37	-1.122
		7115		-7.66	-7.40	0.132	-7.48	-7.25	0.132	-7.70	-7.47	0.132	3.37	-0.851

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 0			RU Index 8			RU Index 17				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE40	5	5965	26T	-5.97	-5.77	0.132	-5.90	-5.67	0.132	-5.82	-5.71	0.132	1.6	-1.022
		6165		-6.89	-7.16	0.132	-7.11	-7.36	0.132	-7.11	-7.34	0.132	1.6	-2.281
		6405		-7.34	-7.77	0.132	-7.53	-7.92	0.132	-7.57	-7.98	0.132	-0.09	-4.497
	6	6445		-7.60	-7.75	0.132	-7.73	-7.89	0.132	-7.69	-7.93	0.132	-0.09	-4.622
		6485		-7.67	-7.81	0.132	-7.84	-8.01	0.132	-7.89	-8.12	0.132	-0.09	-4.687
	7	6525		-7.82	-8.10	0.132	-8.05	-8.30	0.132	-8.08	-8.32	0.132	-0.09	-4.905
		6685		-9.20	-8.76	0.132	-9.29	-8.83	0.132	-9.24	-8.78	0.132	-0.09	-5.922
		6845		-8.58	-8.27	0.132	-8.74	-8.44	0.132	-8.81	-8.48	0.132	3.37	-1.910
	8	6885		-8.88	-8.49	0.132	-9.09	-8.68	0.132	-9.18	-8.80	0.132	3.37	-2.168
		7005		-7.84	-7.78	0.132	-8.05	-7.96	0.132	-8.09	-8.03	0.132	3.37	-1.298
		7085		-7.41	-7.18	0.132	-7.66	-7.39	0.132	-8.47	-8.09	0.132	3.37	-0.781

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 0			RU Index 18			RU Index 36				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE80	5	5985	26T	-5.94	-5.46	0.132	-5.33	-5.11	0.132	-6.14	-5.94	0.132	1.6	-0.476
		6145		-7.00	-6.98	0.132	-6.56	-6.55	0.132	-7.43	-7.36	0.132	1.6	-1.813
		6385		-7.50	-7.61	0.132	-7.00	-7.16	0.132	-7.90	-7.98	0.132	-0.09	-4.027
	6	6465		-8.04	-7.88	0.132	-7.56	-7.37	0.132	-8.37	-8.19	0.132	-0.09	-4.412
		6545		-8.31	-8.15	0.132	-7.92	-7.75	0.132	-8.79	-8.61	0.132	-0.09	-4.782
	7	6625		-9.44	-8.84	0.132	-8.84	-8.24	0.132	-9.59	-8.84	0.132	-0.09	-5.477
		6705		-9.53	-8.78	0.132	-9.01	-8.13	0.132	-9.78	-8.75	0.132	-0.09	-5.495
		6785		-8.70	-8.21	0.132	-8.18	-7.61	0.132	-9.02	-8.30	0.132	-0.09	-4.833
	8	6865		-9.06	-8.31	0.132	-8.65	-7.88	0.132	-9.63	-8.81	0.132	3.37	-1.736
		6945		-7.85	-7.24	0.132	-7.37	-6.83	0.132	-8.29	-7.74	0.132	3.37	-0.579
		7025		-8.29	-7.83	0.132	-7.92	-7.46	0.132	-8.85	-8.38	0.132	3.37	-1.172

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 0			RU Index 18			RU Index 36				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	26T	-7.50	-7.77	0.132	-6.33	-6.43	0.132	-5.96	-5.94	0.132	1.6	-1.208
		6185		-8.72	-8.55	0.132	-7.74	-7.52	0.132	-7.26	-7.13	0.132	1.6	-2.452
		6345		-9.23	-8.72	0.132	-8.01	-7.60	0.132	-7.55	-7.19	0.132	-0.09	-4.314
	6	6505		-9.36	-9.31	0.132	-8.32	-8.24	0.132	-7.94	-7.85	0.132	-0.09	-4.842
	7	6665		-10.54	-10.78	0.132	-9.34	-9.64	0.132	-8.78	-9.19	0.132	-0.09	-5.928
		6825		-9.76	-10.18	0.132	-8.55	-9.02	0.132	-8.07	-8.63	0.132	3.37	-1.829
	8	6985		-8.91	-9.26	0.132	-7.94	-8.31	0.132	-7.65	-7.79	0.132	3.37	-1.207

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index S0			RU Index S18			RU Index S36				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE160 (80H)	5	6025	26T	-5.79	-5.84	0.132	-6.58	-6.43	0.132	-8.17	-7.97	0.132	1.6	-1.073
		6185		-7.27	-7.10	0.132	-7.90	-7.75	0.132	-9.24	-9.26	0.132	1.6	-2.442
		6345		-7.54	-7.23	0.132	-8.15	-7.83	0.132	-9.75	-9.48	0.132	-0.09	-4.330
	6	6505		-7.96	-7.90	0.132	-8.76	-8.66	0.132	-10.33	-10.26	0.132	-0.09	-4.878
	7	6665		-8.62	-9.19	0.132	-9.08	-9.72	0.132	-10.36	-11.15	0.132	-0.09	-5.843
		6825		-8.12	-8.73	0.132	-8.75	-9.41	0.132	-10.38	-11.01	0.132	3.37	-1.902
	8	6985		-7.66	-7.92	0.132	-8.30	-8.57	0.132	-9.91	-10.17	0.132	3.37	-1.276

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}$ dBi

Directional gain:

5925MHz: $10 \log(10^{1.7/10} + 10^{1.5/10})/2 = 1.60$ dBi

6525MHz: $10 \log(10^{0.2/10} + 10^{0.4/10})/2 = 0.09$ dBi

7125MHz: $10 \log(10^{2.9/10} + 10^{3.8/10})/2 = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Tones: 52T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 37			RU Index 39			RU Index 40				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE20	5	5955	52T	-2.58	-2.39	N/A	-2.56	-2.37	N/A	-2.68	-2.52	N/A	1.6	2.146
		6175		-3.76	-4.11	N/A	-3.75	-4.06	N/A	-3.86	-4.17	N/A	1.6	0.708
		6415		-4.20	-4.75	N/A	-4.19	-4.74	N/A	-4.34	-4.86	N/A	-0.09	-1.536
	6	6435		-4.32	-4.59	N/A	-4.28	-4.54	N/A	-4.38	-4.65	N/A	-0.09	-1.488
		6475		-4.47	-4.70	N/A	-4.42	-4.66	N/A	-4.51	-4.79	N/A	-0.09	-1.618
		6515		-4.63	-4.94	N/A	-4.62	-4.88	N/A	-4.70	-5.02	N/A	-0.09	-1.828
	7	6535		-5.51	-5.74	N/A	-5.50	-5.70	N/A	-5.60	-5.83	N/A	-0.09	-2.679
		6695		-5.94	-5.52	N/A	-5.90	-5.47	N/A	-6.03	-5.58	N/A	-0.09	-2.759
		6855		-5.50	-5.14	N/A	-5.50	-5.13	N/A	-5.67	-5.26	N/A	3.37	1.069
	8	6875		-5.69	-5.29	N/A	-5.68	-5.29	N/A	-5.82	-5.45	N/A	3.37	0.900
		6995		-4.75	-4.56	N/A	-4.73	-4.56	N/A	-4.84	-4.70	N/A	3.37	1.736
		7115		-4.52	-4.31	N/A	-4.54	-4.31	N/A	-8.37	-8.03	N/A	3.37	1.967

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 37			RU Index 40			RU Index 44				
				AUX	Main	Duty Cycle Factor $10\log(1/X)$ Note 3	AUX	Main	Duty Cycle Factor $10\log(1/X)$ Note 3	AUX	Main	Duty Cycle Factor $10\log(1/X)$ Note 3		
802.11ax-HE40	5	5965	52T	-2.81	-2.57	N/A	-2.79	-2.62	N/A	-2.81	-2.71	N/A	1.6	1.922
		6165		-3.82	-4.15	N/A	-3.87	-4.19	N/A	-3.96	-4.28	N/A	1.6	0.628
		6405		-4.21	-4.73	N/A	-4.31	-4.79	N/A	-4.42	-4.94	N/A	-0.09	-1.542
	6	6445		-4.46	-4.64	N/A	-4.49	-4.67	N/A	-4.52	-4.78	N/A	-0.09	-1.629
		6485		-4.53	-4.78	N/A	-4.59	-4.85	N/A	-4.73	-4.96	N/A	-0.09	-1.733
	7	6525		-4.75	-5.00	N/A	-4.82	-5.08	N/A	-4.82	-5.08	N/A	-0.09	-1.953
		6685		-6.00	-5.66	N/A	-6.01	-5.64	N/A	-6.07	-5.63	N/A	-0.09	-2.901
		6845		-5.54	-5.16	N/A	-5.63	-5.23	N/A	-5.76	-5.34	N/A	3.37	1.034
	8	6885		-5.77	-5.36	N/A	-5.90	-5.45	N/A	-6.03	-5.65	N/A	3.37	0.820
		7005		-4.81	-4.62	N/A	-4.93	-4.75	N/A	-5.06	-4.92	N/A	3.37	1.666
		7085		-4.33	-4.11	N/A	-4.44	-4.20	N/A	-4.60	-4.35	N/A	3.37	2.162

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 37			RU Index 44			RU Index 52				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE80	5	5985	52T	-2.64	-3.04	N/A	-2.33	-2.57	N/A	-2.98	-3.07	N/A	1.6	2.162
		6145		-3.99	-3.86	N/A	-3.70	-3.62	N/A	-4.31	-4.29	N/A	1.6	0.950
		6385		-4.61	-4.45	N/A	-4.34	-4.18	N/A	-5.06	-5.08	N/A	-0.09	-1.339
	6	6465		-4.82	-5.09	N/A	-4.50	-4.79	N/A	-5.17	-5.42	N/A	-0.09	-1.722
		6545		-5.13	-5.42	N/A	-4.91	-5.19	N/A	-5.60	-5.95	N/A	-0.09	-2.127
	7	6625		-5.82	-6.59	N/A	-5.42	-6.23	N/A	-5.83	-6.75	N/A	-0.09	-2.886
		6705		-5.81	-6.77	N/A	-5.38	-6.44	N/A	-5.78	-7.01	N/A	-0.09	-2.957
		6785		-5.26	-6.00	N/A	-4.83	-5.67	N/A	-5.34	-6.27	N/A	-0.09	-2.309
	8	6865		-5.36	-6.33	N/A	-5.10	-6.11	N/A	-5.88	-6.85	N/A	3.37	0.805
		6945		-4.75	-5.11	N/A	-4.02	-4.81	N/A	-4.80	-5.46	N/A	3.37	1.983
		7025		-4.92	-5.54	N/A	-4.74	-5.31	N/A	-5.48	-5.98	N/A	3.37	1.365

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 37			RU Index 44			RU Index 52				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	52T	-4.13	-4.45	N/A	-3.13	-3.29	N/A	-2.75	-2.79	N/A	1.6	1.840
		6185		-5.48	-5.27	N/A	-4.52	-4.32	N/A	-4.10	-3.95	N/A	1.6	0.586
		6345		-6.15	-5.61	N/A	-4.97	-4.52	N/A	-4.39	-4.02	N/A	-0.09	-1.281
	6	6505		-6.25	-6.24	N/A	-5.23	-5.23	N/A	-4.86	-4.81	N/A	-0.09	-1.915
	7	6665		-7.32	-7.72	N/A	-6.17	-6.62	N/A	-5.51	-6.11	N/A	-0.09	-2.879
		6825		-6.70	-7.18	N/A	-5.59	-6.13	N/A	-5.07	-5.67	N/A	3.37	1.021
	8	6985		-5.77	-6.24	N/A	-4.78	-5.25	N/A	-4.48	-4.88	N/A	3.37	1.705

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index S37			RU Index S44			RU Index S52				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE160 (80H)	5	6025	52T	-2.76	-2.80	N/A	-3.40	-3.34	N/A	-4.98	-4.88	N/A	1.6	1.830
		6185		-4.11	-3.97	N/A	-4.68	-4.62	N/A	-6.13	-6.16	N/A	1.6	0.571
		6345		-4.42	-4.07	N/A	-4.96	-4.64	N/A	-6.64	-6.22	N/A	-0.09	-1.321
	6	6505		-4.85	-4.82	N/A	-5.50	-5.45	N/A	-7.05	-7.07	N/A	-0.09	-1.915
	7	6665		-5.57	-6.20	N/A	-5.96	-6.71	N/A	-7.25	-8.13	N/A	-0.09	-2.953
		6825		-5.07	-5.72	N/A	-5.65	-6.35	N/A	-7.30	-7.98	N/A	3.37	0.997
	8	6985		-4.48	-4.92	N/A	-5.21	-5.56	N/A	-6.85	-7.13	N/A	3.37	1.686

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Tones: 106T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 53			RU Index 54				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE20	5	5955	106T	0.41	0.52	N/A	0.42	0.51	N/A	1.6	5.076
		6175		-0.66	-0.95	N/A	-0.78	-1.02	N/A	1.6	3.808
		6415		-1.10	-1.64	N/A	-1.23	-1.72	N/A	-0.09	1.559
	6	6435		-1.30	-1.46	N/A	-1.31	-1.52	N/A	-0.09	1.541
		6475		-1.38	-1.62	N/A	-1.46	-1.69	N/A	-0.09	1.422
		6515		-1.45	-1.72	N/A	-1.52	-1.77	N/A	-0.09	1.337
	7	6535		-2.45	-2.69	N/A	-2.49	-2.77	N/A	-0.09	0.352
		6695		-2.94	-2.52	N/A	-2.94	-2.48	N/A	-0.09	0.216
		6855		-2.51	-2.11	N/A	-2.60	-2.20	N/A	3.37	4.075
	8	6875		-2.64	-2.24	N/A	-2.77	-2.35	N/A	3.37	3.945
		6995		-1.59	-1.43	N/A	-1.67	-1.52	N/A	3.37	4.871
		7115		-1.44	-1.16	N/A	-8.24	-7.86	N/A	3.37	5.083

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 53			RU Index 54			RU Index 56				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE40	5	5965	106T	0.34	0.46	N/A	0.39	0.48	N/A	0.35	0.36	N/A	1.6	5.046
		6165		-0.71	-1.06	N/A	-0.76	-1.07	N/A	-0.92	-1.18	N/A	1.6	3.729
		6405		-1.13	-1.63	N/A	-1.14	-1.65	N/A	-1.31	-1.81	N/A	-0.09	1.547
	6	6445		-1.38	-1.57	N/A	-1.37	-1.56	N/A	-1.49	-1.68	N/A	-0.09	1.456
		6485		-1.49	-1.72	N/A	-1.51	-1.74	N/A	-1.66	-1.89	N/A	-0.09	1.317
	7	6525		-1.68	-1.93	N/A	-1.71	-1.97	N/A	-1.86	-2.13	N/A	-0.09	1.117
		6685		-2.97	-2.61	N/A	-2.95	-2.57	N/A	-3.09	-2.60	N/A	-0.09	0.164
		6845		-2.50	-2.12	N/A	-2.53	-2.16	N/A	-2.72	-2.32	N/A	3.37	4.074
	8	6885		-2.76	-2.37	N/A	-2.82	-2.39	N/A	-3.03	-2.60	N/A	3.37	3.820
		7005		-1.69	-1.57	N/A	-1.74	-1.63	N/A	-1.93	-1.81	N/A	3.37	4.751
		7085		-1.33	-1.09	N/A	-1.36	-1.13	N/A	-1.52	-1.28	N/A	3.37	5.172

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 53			RU Index 56			RU Index 60				
				AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}		
802.11ax-HE80	5	5985	106T	0.28	0.00	N/A	0.64	0.49	N/A	-0.07	-0.06	N/A	1.6	5.176
		6145		-1.05	-0.96	N/A	-0.81	-0.73	N/A	-1.37	-1.36	N/A	1.6	3.840
		6385		-1.71	-1.61	N/A	-1.40	-1.35	N/A	-2.05	-2.02	N/A	-0.09	1.545
	6	6465		-1.77	-2.23	N/A	-1.49	-1.94	N/A	-2.09	-2.53	N/A	-0.09	1.211
		6545		-2.15	-2.46	N/A	-1.96	-2.28	N/A	-2.60	-2.98	N/A	-0.09	0.803
	7	6625		-2.87	-3.64	N/A	-2.47	-3.33	N/A	-2.84	-3.84	N/A	-0.09	0.042
		6705		-2.82	-3.91	N/A	-2.42	-3.58	N/A	-2.75	-4.08	N/A	-0.09	-0.041
		6785		-1.82	-2.65	N/A	-1.62	-2.52	N/A	-2.13	-3.13	N/A	-0.09	0.874
	8	6865		-2.20	-3.02	N/A	-2.00	-2.89	N/A	-2.67	-3.58	N/A	3.37	3.958
		6945		-1.14	-1.84	N/A	-0.94	-1.58	N/A	-1.62	-2.19	N/A	3.37	5.132
		7025		-1.69	-2.25	N/A	-1.59	-2.06	N/A	-2.28	-2.71	N/A	3.37	4.562

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 53			RU Index 56			RU Index 60				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	106T	-1.06	-1.27	N/A	-0.16	-0.26	N/A	0.26	0.31	N/A	1.6	4.895
		6185		-2.35	-2.18	N/A	-1.47	-1.33	N/A	-1.03	-0.92	N/A	1.6	3.636
		6345		-2.96	-2.46	N/A	-1.94	-1.52	N/A	-1.35	-1.00	N/A	-0.09	1.749
	6	6505		-2.92	-3.06	N/A	-2.06	-2.16	N/A	-1.66	-1.71	N/A	-0.09	1.235
	7	6665		-4.17	-4.51	N/A	-3.17	-3.57	N/A	-2.59	-3.00	N/A	-0.09	0.130
		6825		-3.67	-3.66	N/A	-2.71	-2.82	N/A	-2.18	-2.35	N/A	3.37	4.116
	8	6985		-2.61	-2.77	N/A	-1.78	-1.92	N/A	-1.48	-1.51	N/A	3.37	4.885

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index S53			RU Index S56			RU Index S60				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE160 (80H)	5	6025	106T	0.19	0.28	N/A	-0.36	-0.19	N/A	-1.85	-1.68	N/A	1.6	4.846
		6185		-1.05	-0.95	N/A	-1.54	-1.49	N/A	-2.94	-3.03	N/A	1.6	3.611
		6345		-1.35	-1.02	N/A	-1.82	-1.52	N/A	-3.34	-3.02	N/A	-0.09	1.738
	6	6505		-1.76	-1.78	N/A	-2.32	-2.34	N/A	-3.86	-3.88	N/A	-0.09	1.150
	7	6665		-2.92	-3.06	N/A	-3.35	-3.50	N/A	-4.72	-4.86	N/A	-0.09	-0.069
		6825		-2.23	-2.42	N/A	-2.78	-2.97	N/A	-4.32	-4.52	N/A	3.37	4.056
	8	6985		-1.48	-1.58	N/A	-2.05	-2.13	N/A	-3.61	-3.67	N/A	3.37	4.851

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Tones: 242T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)			Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 61				
				AUX	Main	Duty Cycle Factor $10\log(1/X)$ ^{Note 3}		
802.11ax-HE20	5	5955	242T	2.27	2.57	0.123	1.6	7.156
		6175		2.16	2.51	0.123	1.6	7.072
		6415		2.05	2.43	0.123	-0.09	5.287
	6	6435		1.52	2.01	0.123	-0.09	4.815
		6475		1.61	1.95	0.123	-0.09	4.827
		6515		1.82	1.84	0.123	-0.09	4.873
	7	6535		1.54	1.74	0.123	-0.09	4.684
		6695		1.64	1.81	0.123	-0.09	4.769
		6855		1.75	1.82	0.123	3.37	8.288
	8	6875		1.24	1.29	0.123	3.37	7.768
		6995		1.03	1.04	0.123	3.37	7.538
		7115		-2.88	-2.45	0.123	3.37	3.844

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5	
				RU Index 61			RU Index 62					
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3			
802.11ax-HE40	5	5965	242T	1.81	1.47	0.123	2.03	1.35	0.123	1.6	2.03	
		6165		1.78	1.53	0.123	1.76	1.36	0.123	1.6	1.76	
		6405		1.20	1.18	0.123	1.82	1.53	0.123	-0.09	1.82	
	6	6445		1.43	1.05	0.123	1.36	1.09	0.123	-0.09	1.36	
		6485		1.54	1.08	0.123	1.13	1.46	0.123	-0.09	1.13	
				7	6525	1.22	0.25	0.123	2.18	1.62	0.123	-0.09
	6685				1.21	0.06	0.123	1.33	0.34	0.123	-0.09	1.33
		6845			0.95	0.03	0.123	1.49	0.31	0.123	3.37	1.49
				8	6885	0.77	-0.19	0.123	0.75	0.03	0.123	3.37
	7005				0.91	0.22	0.123	0.91	-0.11	0.123	3.37	0.91
		7085			1.81	1.47	0.123	1.26	0.61	0.123	3.37	1.26

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 61			RU Index 62			RU Index 64				
				AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}		
802.11ax-HE80	5	5985	242T	2.45	2.75	0.123	2.53	3.05	0.123	2.37	2.58	0.123	1.6	7.531
		6145		2.57	2.64	0.123	2.58	2.71	0.123	2.25	2.41	0.123	1.6	7.379
		6385		2.19	2.23	0.123	2.43	2.43	0.123	2.48	2.40	0.123	-0.09	5.483
	6	6465		2.02	1.75	0.123	3.00	2.84	0.123	1.87	1.83	0.123	-0.09	5.964
		6545		1.43	2.13	0.123	2.31	2.99	0.123	2.06	2.61	0.123	-0.09	5.707
	7	6625		1.01	1.77	0.123	1.21	1.95	0.123	0.93	1.79	0.123	-0.09	4.639
		6705		1.07	1.76	0.123	1.25	1.91	0.123	1.04	1.75	0.123	-0.09	4.636
		6785		1.00	1.67	0.123	1.13	1.82	0.123	1.07	1.84	0.123	-0.09	4.532
	8	6865		0.86	1.51	0.123	1.37	2.01	0.123	0.53	0.97	0.123	3.37	8.205
		6945		0.66	0.97	0.123	1.6	1.97	0.123	0.42	1.04	0.123	3.37	8.292
		7025		0.39	1.03	0.123	1.38	2.01	0.123	0.27	1.24	0.123	3.37	8.210

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 61			RU Index 62			RU Index 64				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	242T	2.01	2.62	0.123	2.41	2.91	0.123	1.74	2.6	0.123	1.6	7.400
		6185		2.04	2.39	0.123	2.33	2.82	0.123	1.85	2.37	0.123	1.6	7.315
		6345		2.03	2.41	0.123	2.42	2.63	0.123	1.80	2.32	0.123	-0.09	5.570
	6	6505		1.63	1.75	0.123	2.65	2.93	0.123	1.56	1.83	0.123	-0.09	5.836
	7	6665		0.20	1.31	0.123	0.79	1.83	0.123	0.34	1.76	0.123	-0.09	4.384
		6825		-0.06	1.39	0.123	0.37	1.61	0.123	-0.09	1.23	0.123	3.37	7.537
	8	6985		-0.29	0.64	0.123	0.87	1.90	0.123	-0.58	0.89	0.123	3.37	7.919

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index S61			RU Index S62			RU Index S64				
				AUX	Main	Duty Cycle Factor $10\log(1/X)$ Note 3	AUX	Main	Duty Cycle Factor $10\log(1/X)$ Note 3	AUX	Main	Duty Cycle Factor $10\log(1/X)$ Note 3		
802.11ax-HE160 (80H)	5	6025	242T	1.67	2.69	0.123	1.72	2.52	0.123	1.92	2.59	0.123	1.6	7.001
		6185		1.86	2.37	0.123	1.81	2.41	0.123	2.03	2.43	0.123	1.6	6.968
		6345		1.78	2.27	0.123	1.82	2.28	0.123	2.1	2.48	0.123	-0.09	5.337
	6	6505		1.48	1.96	0.123	2.15	2.63	0.123	2.09	2.45	0.123	-0.09	5.440
		6665		-0.1	1.38	0.123	-0.29	1.27	0.123	-0.21	1.51	0.123	-0.09	3.778
	7	6825		-0.19	1.3	0.123	0.52	1.38	0.123	-0.12	0.94	0.123	3.37	7.475
		6985		-0.44	0.82	0.123	0.43	1.55	0.123	-0.23	0.9	0.123	3.37	7.529

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Tones: 484T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)			Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 65				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE40	5	5965	484T	5.58	5.58	N/A	1.6	10.190
		6165		5.4	5.56	N/A	1.6	10.091
		6405		5.24	5.45	N/A	-0.09	8.267
	6	6445		5.33	5.65	N/A	-0.09	8.413
		6485		5.44	5.66	N/A	-0.09	8.472
	7	6525		5.52	5.56	N/A	-0.09	8.460
		6685		4.72	4.89	N/A	-0.09	7.726
		6845		4.76	4.79	N/A	3.37	11.155
	8	6885		4.73	4.94	N/A	3.37	11.217
		7005		4.7	4.71	N/A	3.37	11.085
		7085		4.95	5.00	N/A	3.37	11.355

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 65			RU Index 66				
				AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}		
802.11ax-HE80	5	5985	484T	5.55	5.48	N/A	5.4	5.47	N/A	1.6	10.125
		6145		5.58	5.38	N/A	5.51	5.34	N/A	1.6	10.091
		6385		5.22	5.18	N/A	5.47	5.29	N/A	-0.09	8.301
	6	6465		5.67	5.21	N/A	5.56	5.44	N/A	-0.09	8.421
		6545		5.24	5.62	N/A	5.23	5.35	N/A	-0.09	8.354
	7	6625		4.47	4.65	N/A	4.41	4.56	N/A	-0.09	7.481
		6705		4.56	4.62	N/A	4.46	4.73	N/A	-0.09	7.517
		6785		4.31	4.66	N/A	4.41	4.73	N/A	-0.09	7.493
	8	6865		4.29	4.66	N/A	4.62	4.62	N/A	3.37	11.000
		6945		4.72	4.55	N/A	4.47	4.72	N/A	3.37	11.016
		7025		4.34	4.62	N/A	4.63	4.68	N/A	3.37	11.035

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 65			RU Index 66				
				AUX	Main	Duty Cycle Factor ^{Note 3} 10log(1/X)	AUX	Main	Duty Cycle Factor ^{Note 3} 10log(1/X)		
802.11ax-HE160 (80L)	5	6025	484T	5.13	5.32	N/A	4.93	5.31	N/A	1.6	9.836
		6185		5.18	5.26	N/A	5.05	5.16	N/A	1.6	9.830
		6345		4.98	5.21	N/A	5.03	5.12	N/A	-0.09	8.017
	6	6505		5.34	5.05	N/A	5.29	5.41	N/A	-0.09	8.271
	7	6665		4.06	4.44	N/A	3.86	4.32	N/A	-0.09	7.174
		6825		3.94	4.43	N/A	3.95	4.52	N/A	3.37	10.625
		8		6985	4.32	4.38	N/A	4.13	4.68	N/A	3.37

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index S65			RU Index S66				
				AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}		
802.11ax-HE160 (80H)	5	6025	484T	4.79	5.3	N/A	5.01	5.3	N/A	1.6	9.768
		6185		4.84	5.18	N/A	4.96	5.13	N/A	1.6	9.656
		6345		4.81	5.05	N/A	5.05	5.13	N/A	-0.09	8.010
	6	6505		5.12	5.43	N/A	5.08	5.31	N/A	-0.09	8.198
	7	6665		4.11	4.49	N/A	3.94	4.61	N/A	-0.09	7.224
		6825		3.95	4.46	N/A	4.18	4.57	N/A	3.37	10.760
		8		6985	4.09	4.43	N/A	4.23	4.57	N/A	3.37

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi

6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi

7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.

Tones: 996T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)			Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 67				
				AUX	Main	Duty Cycle Factor $10\log(1/X)$ ^{Note 3}		
802.11ax-HE80	5	5985	996T	6.93	7.07	0.128	1.6	11.739
		6145		6.29	6.91	0.128	1.6	11.349
		6385		6.43	6.85	0.128	-0.09	9.693
	6	6465		6.23	6.85	0.128	-0.09	9.599
		6545		6.31	6.8	0.128	-0.09	9.610
	7	6625		5.78	6.16	0.128	-0.09	9.022
		6705		5.79	6.13	0.128	-0.09	9.012
		6785		5.65	5.92	0.128	-0.09	8.835
	8	6865		5.58	5.92	0.128	3.37	12.262
		6945		5.75	6.02	0.128	3.37	12.395
		7025		5.74	6.01	0.128	3.37	12.385

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 67			RU Index S67				
				AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor 10log(1/X) ^{Note 3}		
802.11ax-HE160	5	6025	484T	7.12	7.2	0.128	7	6.94	0.128	1.6	11.898
		6185		6.79	7.24	0.128	7.2	7.28	0.128	1.6	11.978
		6345		7.16	7.5	0.128	6.72	7.06	0.128	-0.09	10.382
	6	6505		6.52	6.89	0.128	6.68	6.91	0.128	-0.09	9.845
	7	6665		6.25	6.39	0.128	6.2	6.41	0.128	-0.09	9.369
		6825		6.11	6.24	0.128	5.68	5.92	0.128	3.37	12.684
	8	6985		5.89	6.06	0.128	5.76	6.04	0.128	3.37	12.484

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: $10 \log[(10^{1.7/10} + 10^{1.5/10})/2] = 1.60$ dBi


6525MHz: $10 \log[(10^{0.2/10} + 10^{0.4/10})/2] = 0.09$ dBi


7125MHz: $10 \log[(10^{2.9/10} + 10^{3.8/10})/2] = 3.37$ dBi


The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).


5. Max EIRP = Max of Average Conducted Output Power [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor]+ Directional gain.


A.4.2 Measurement Plots

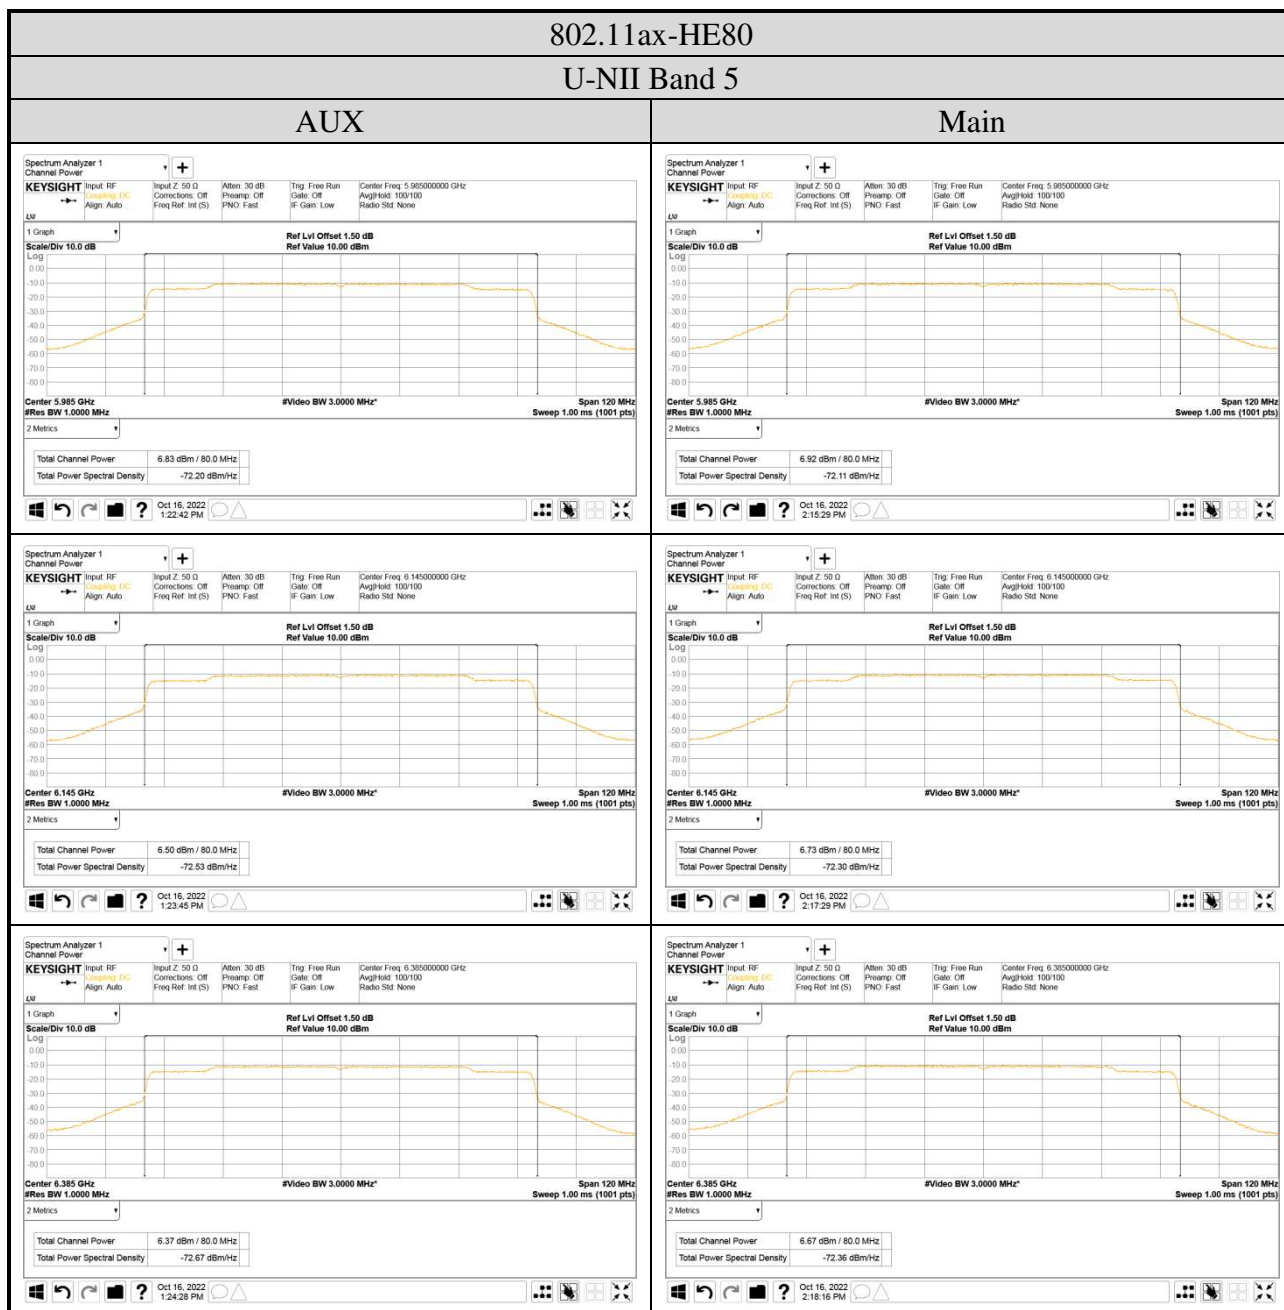

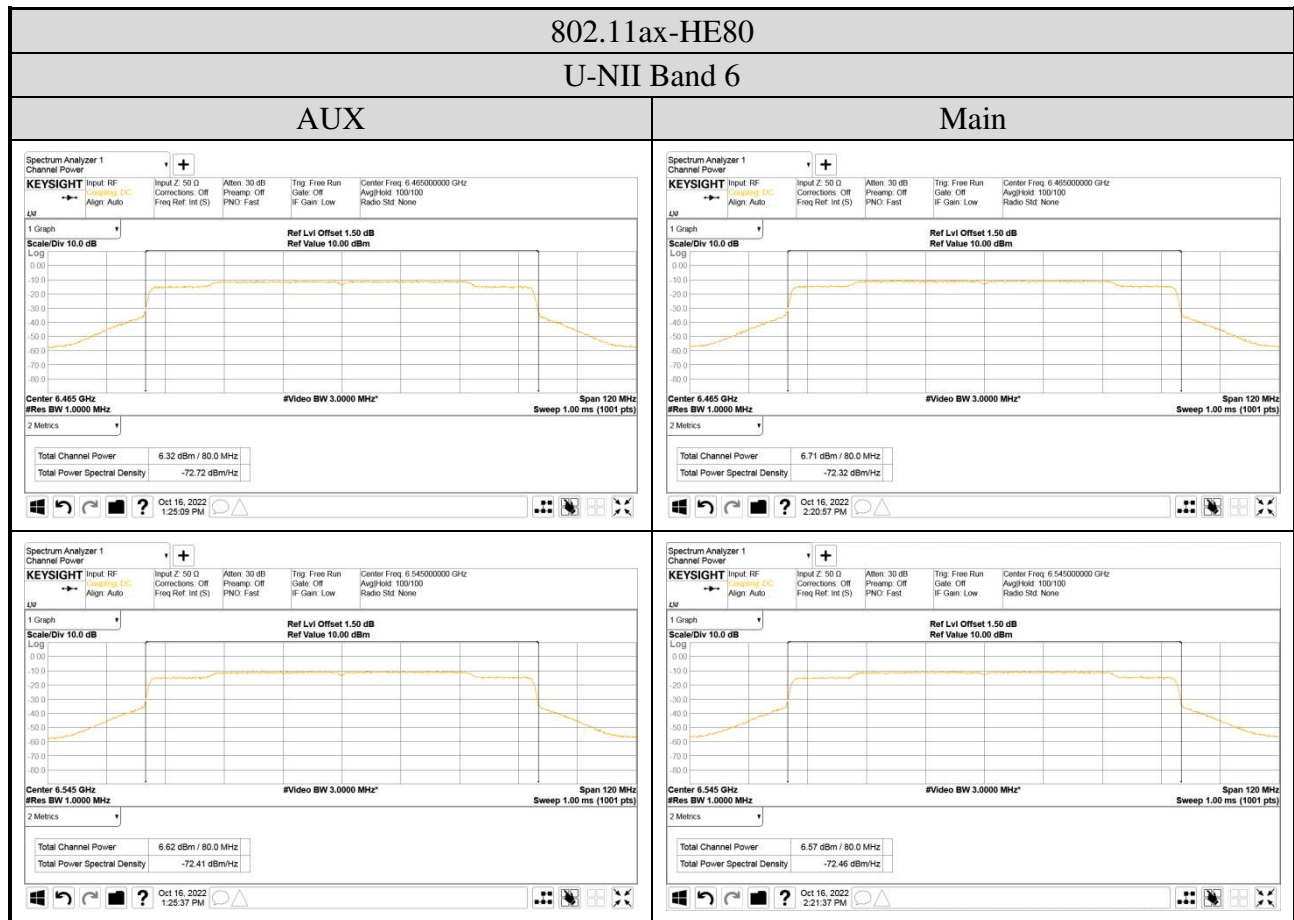


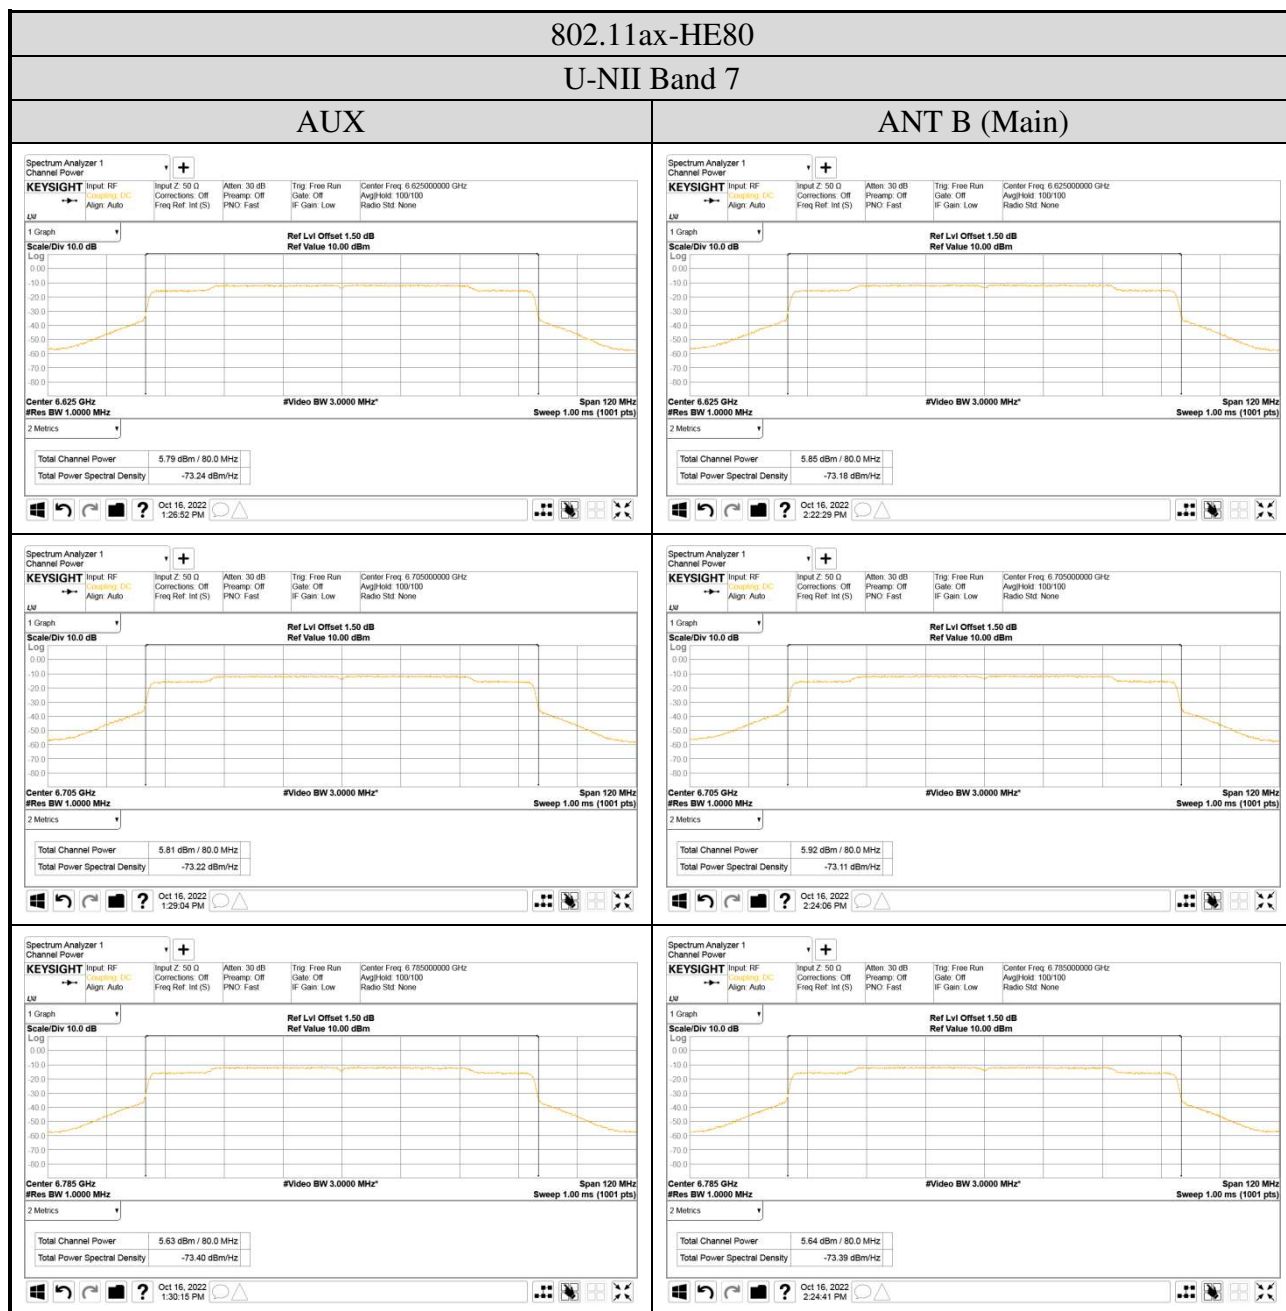


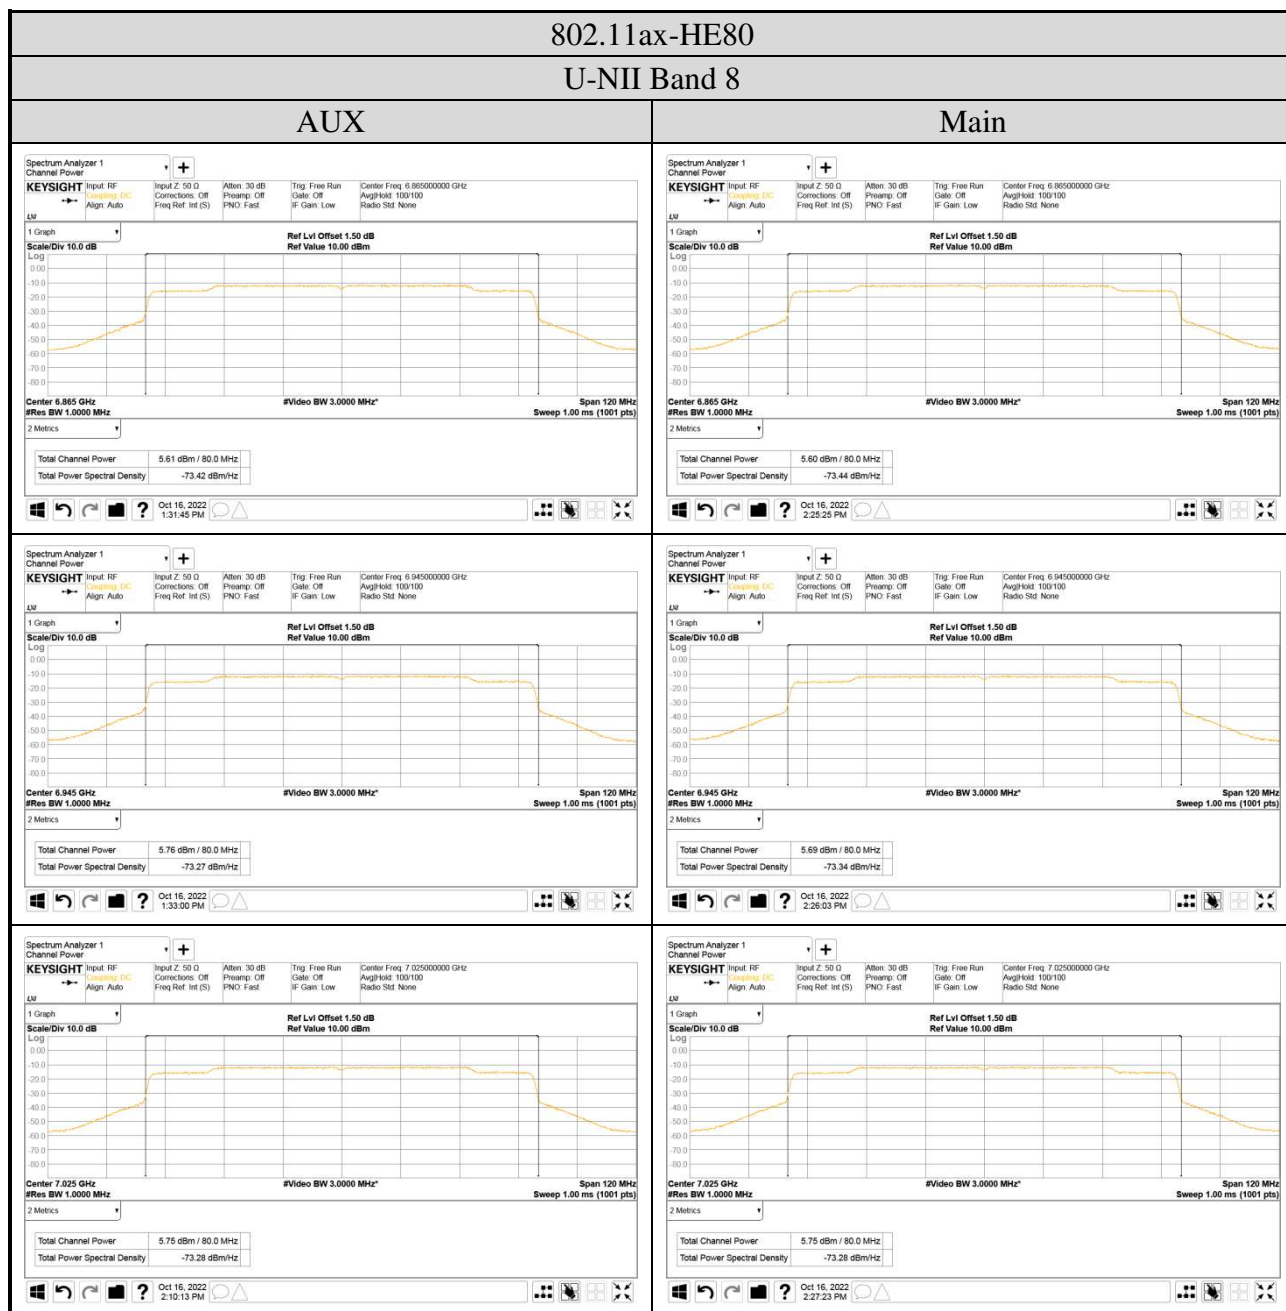

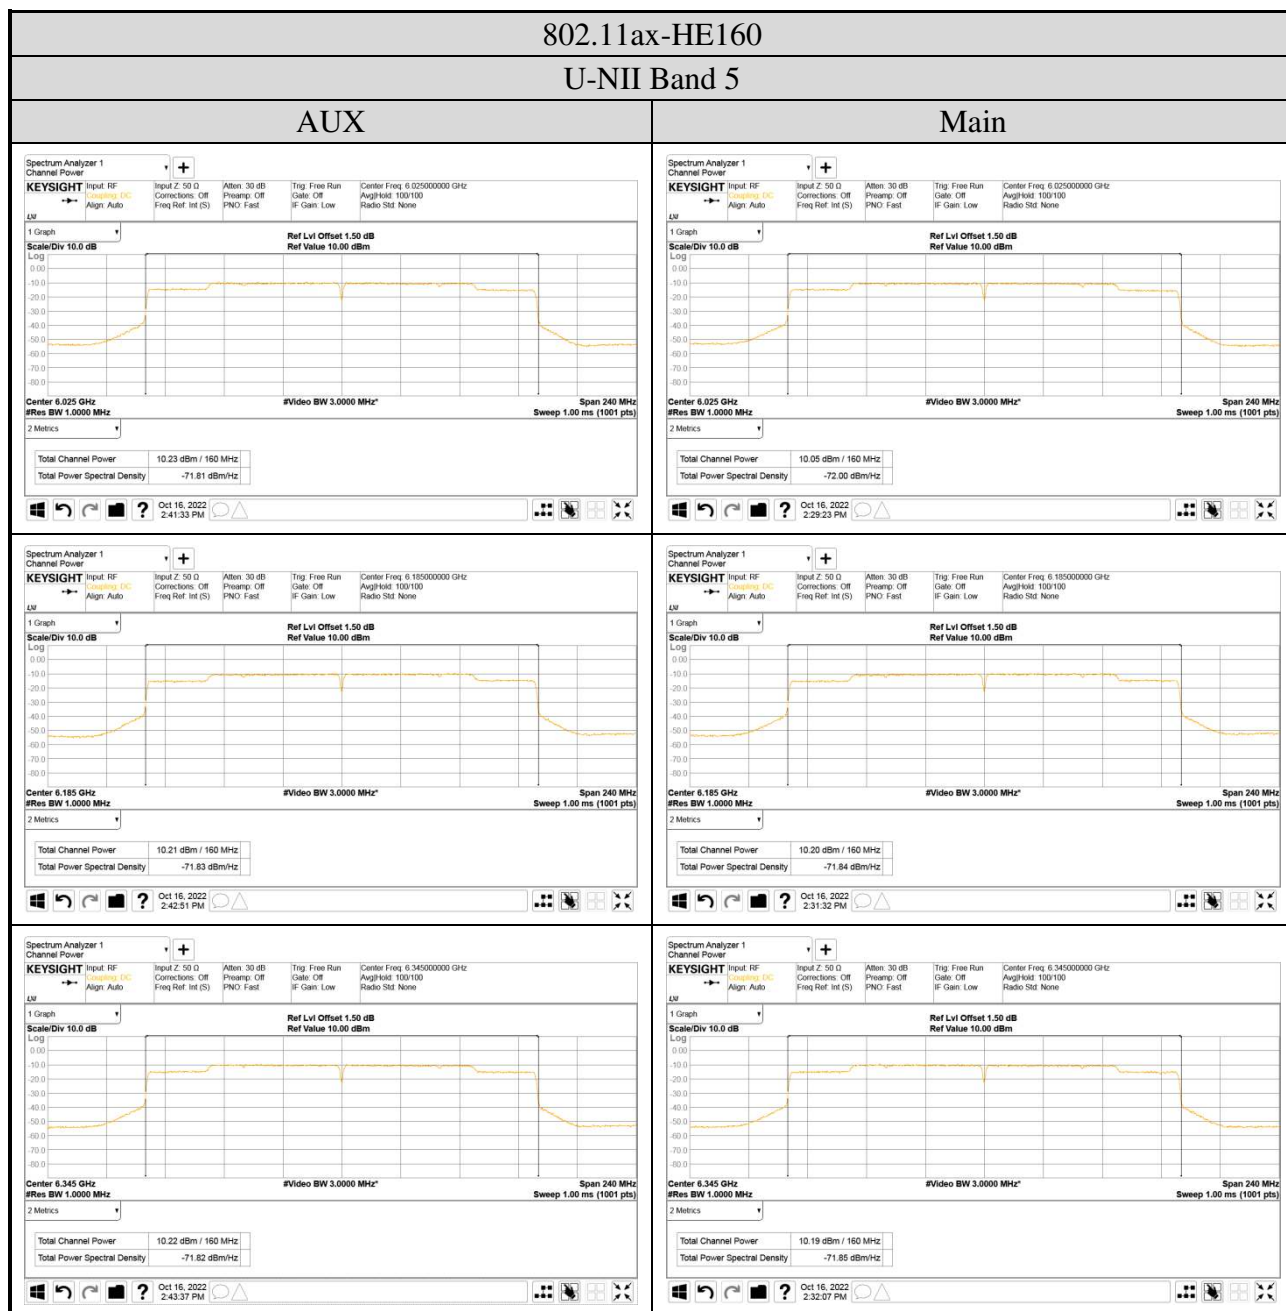


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

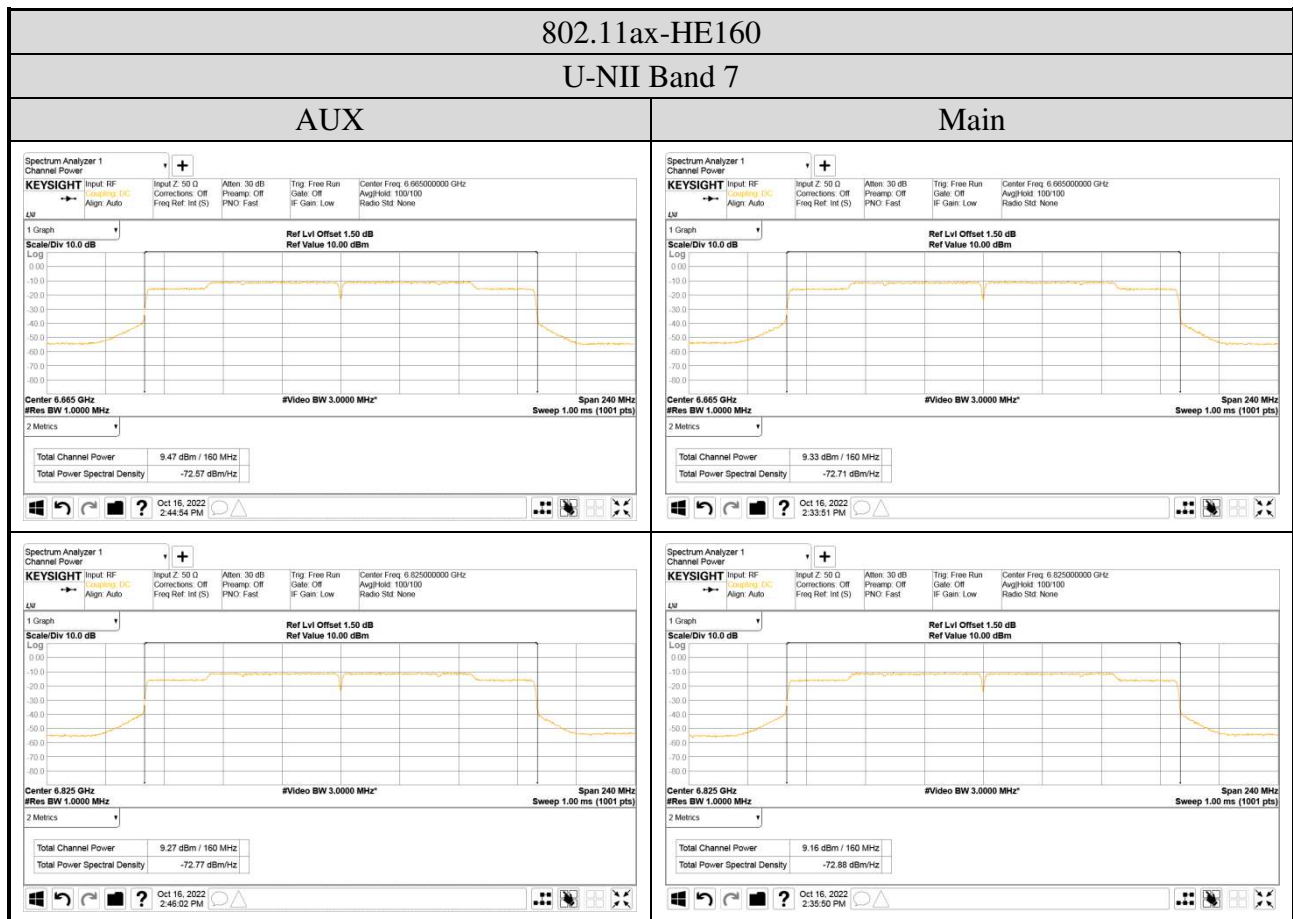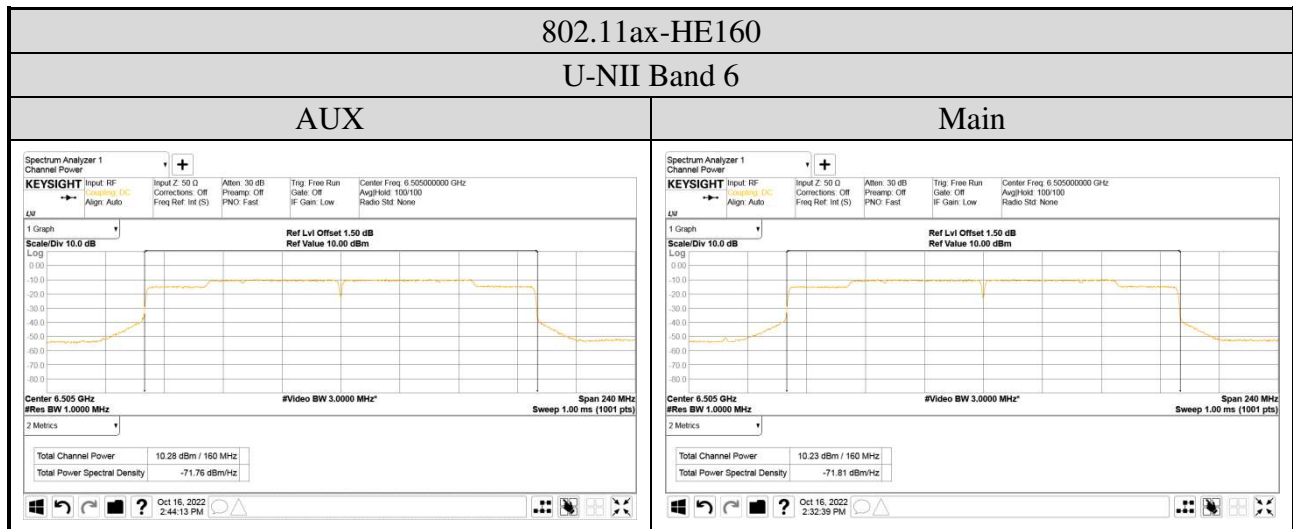


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

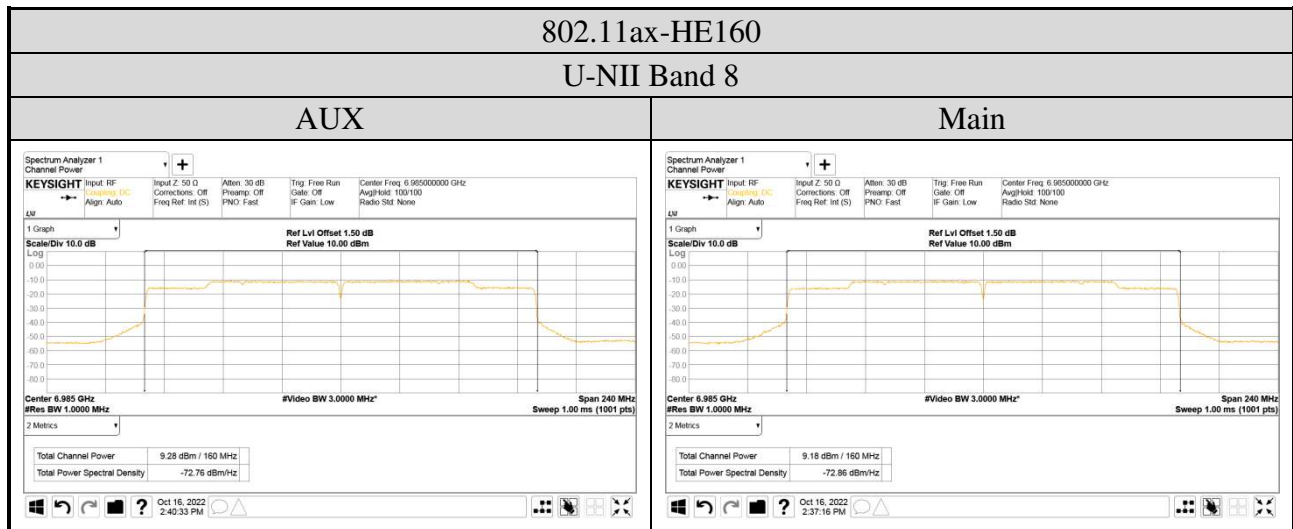


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

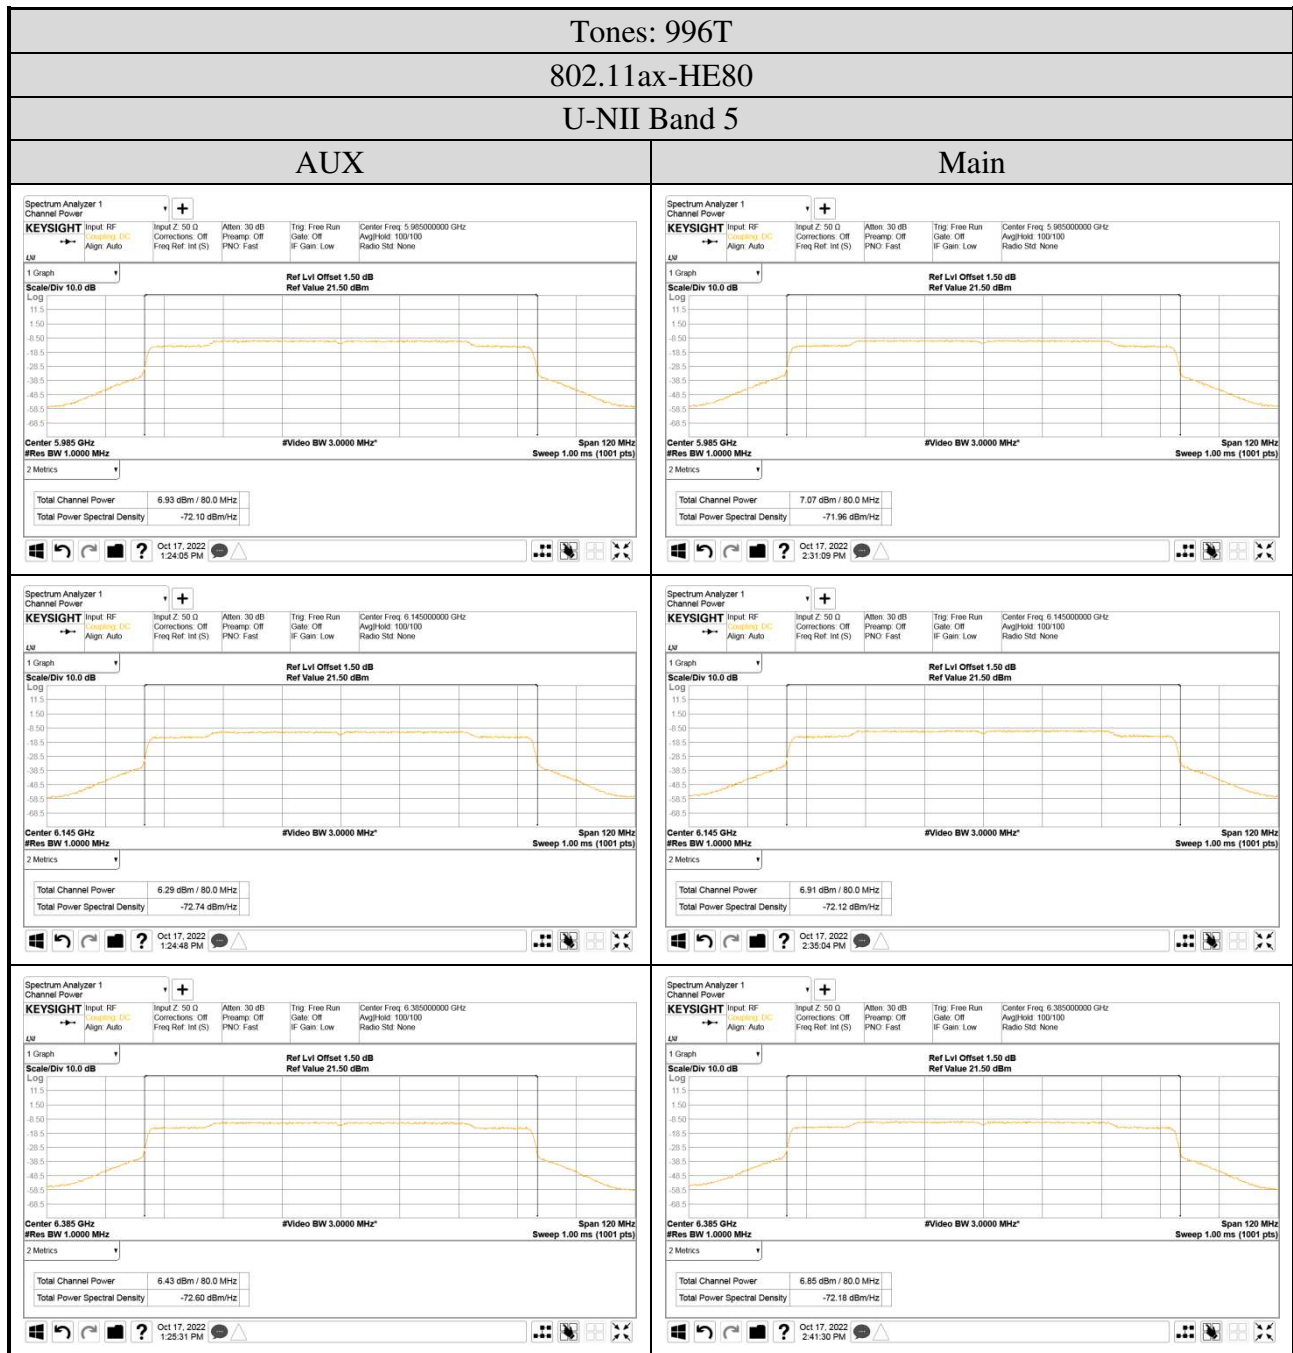


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

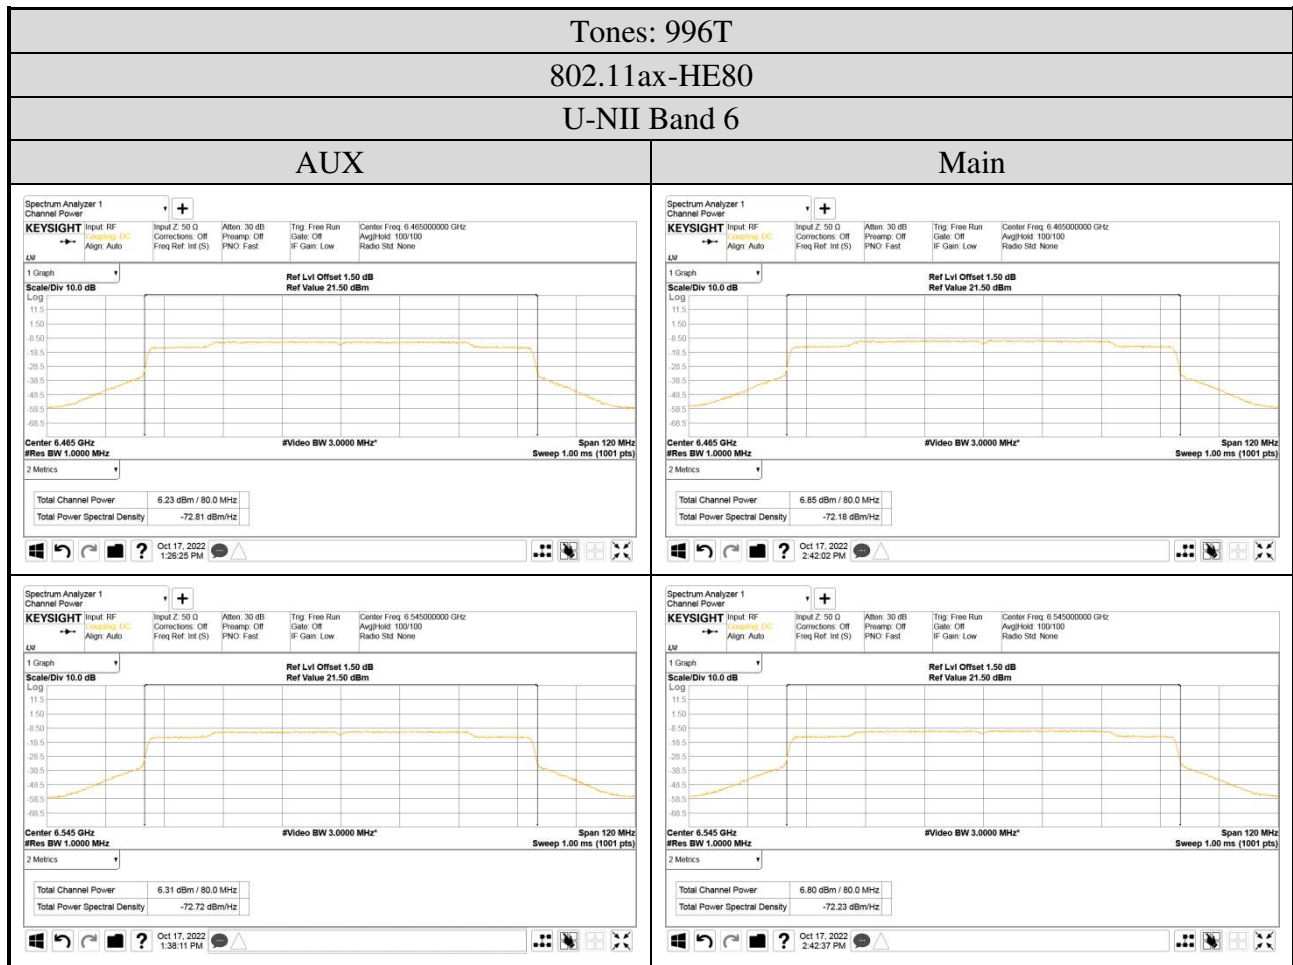


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

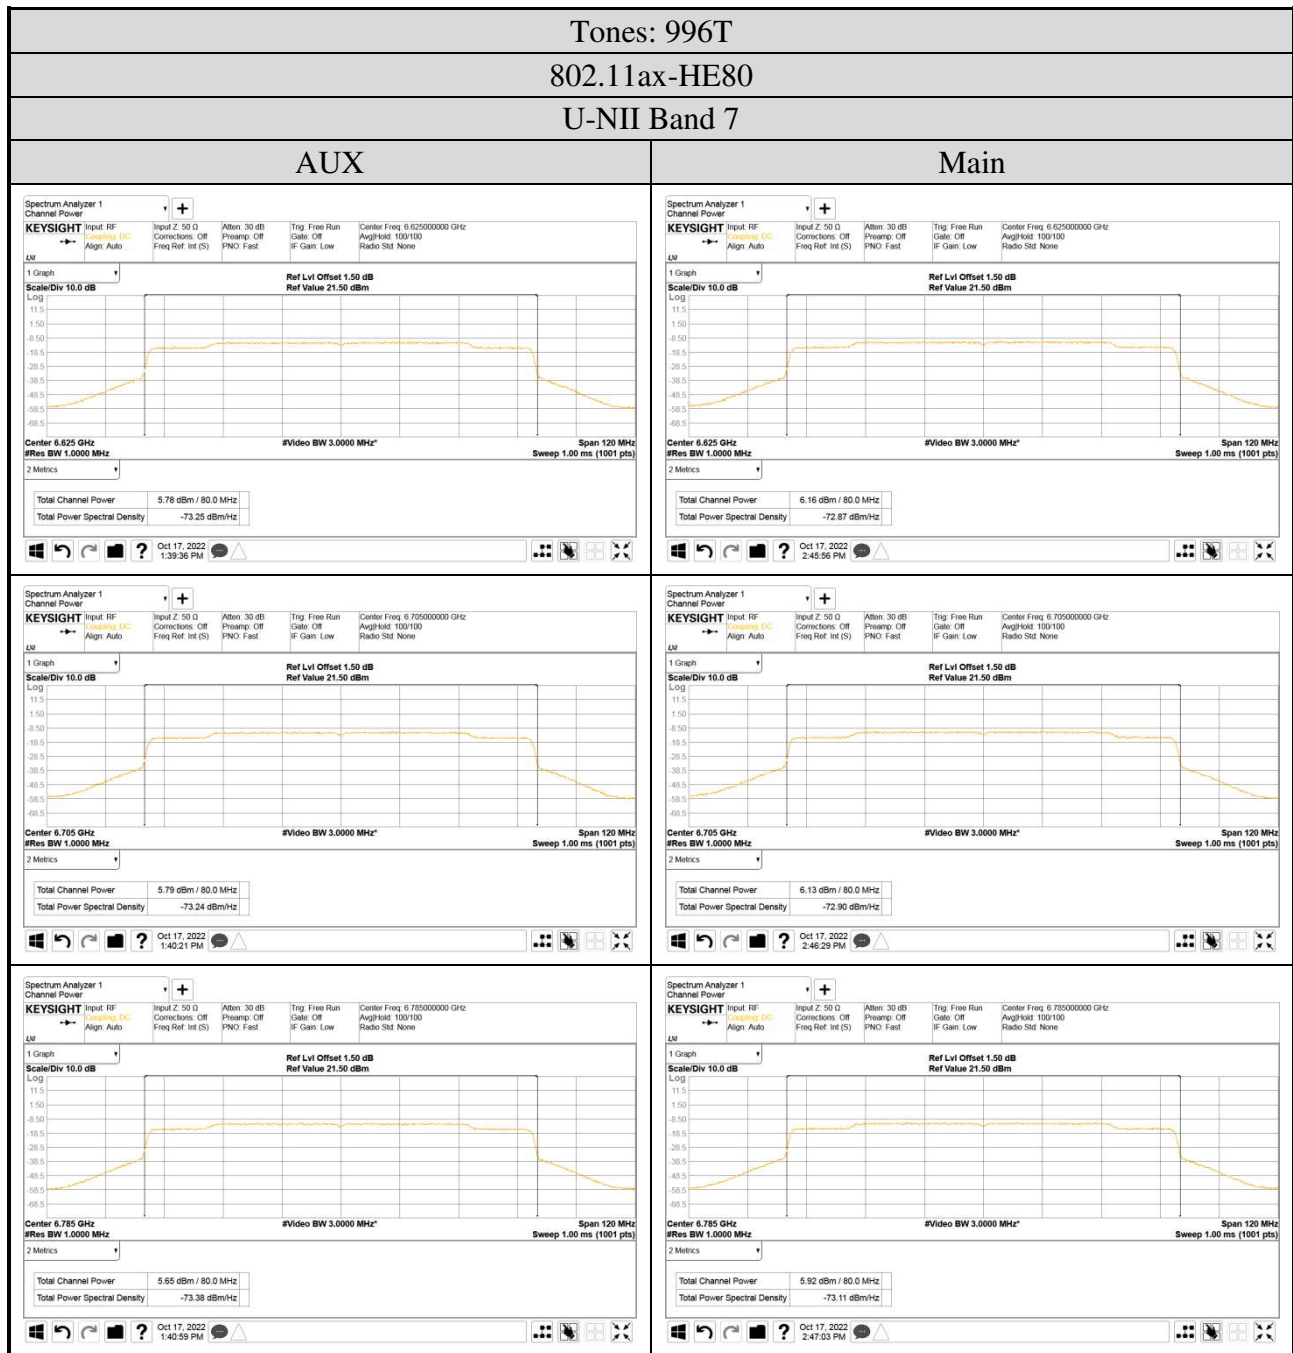

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

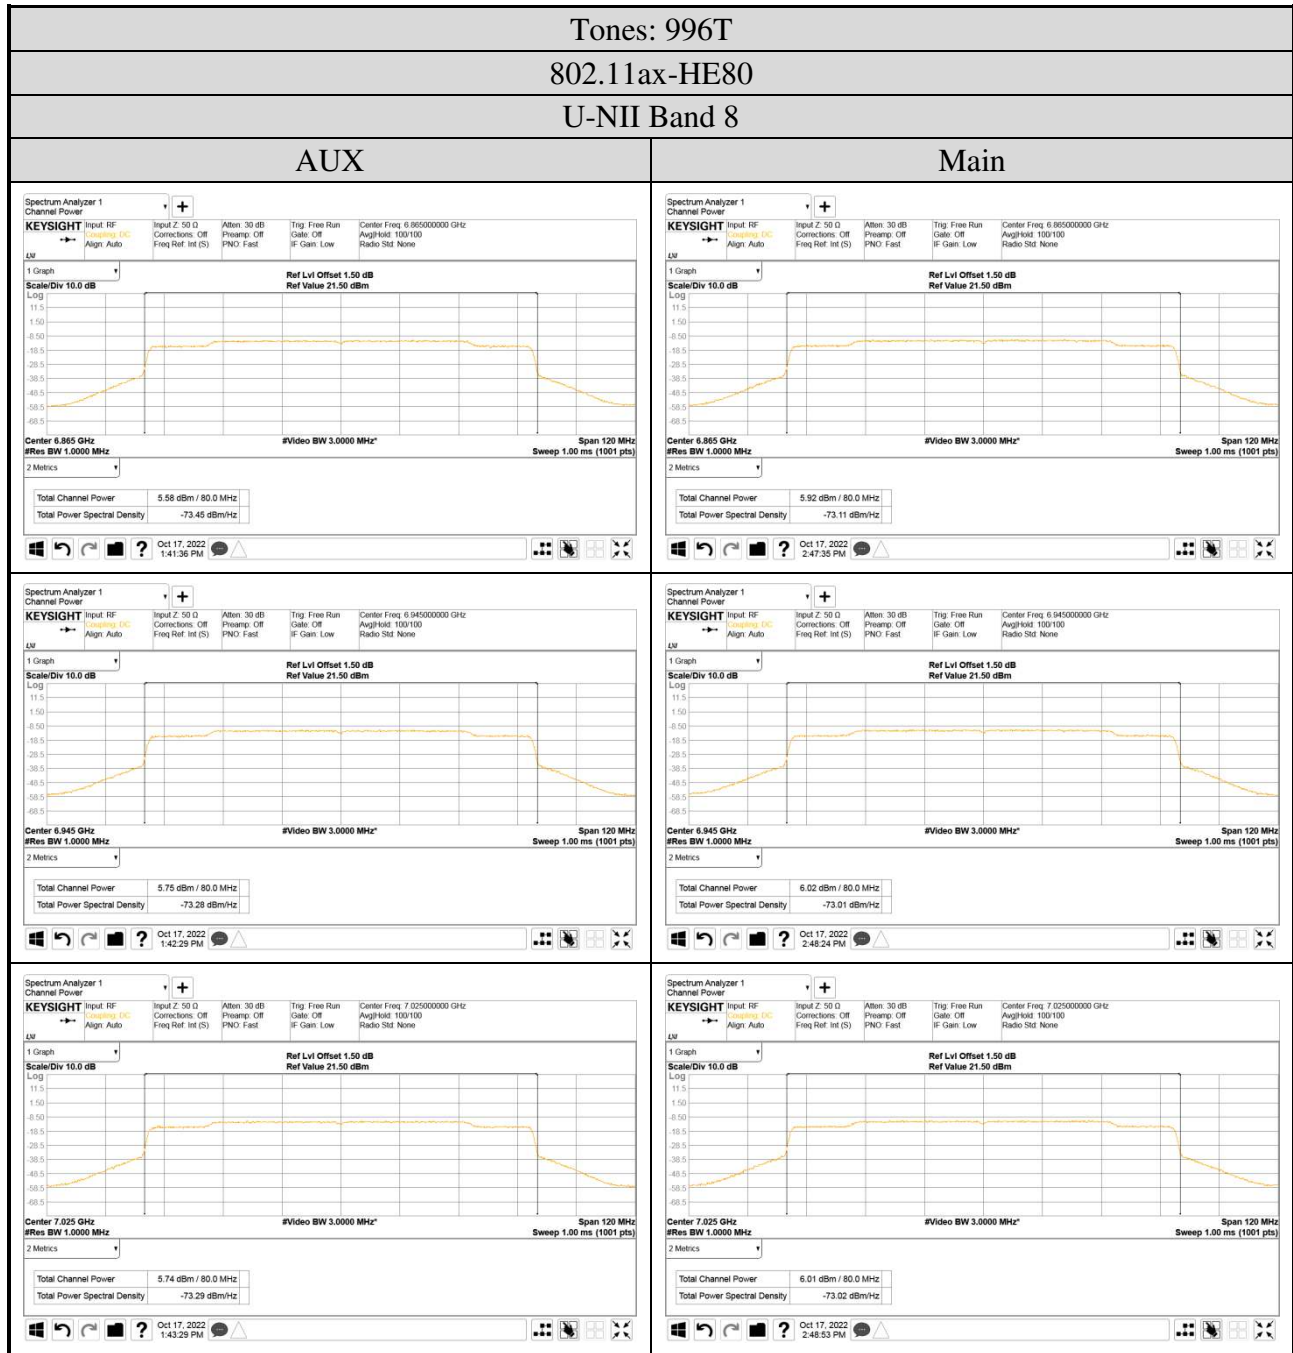






Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

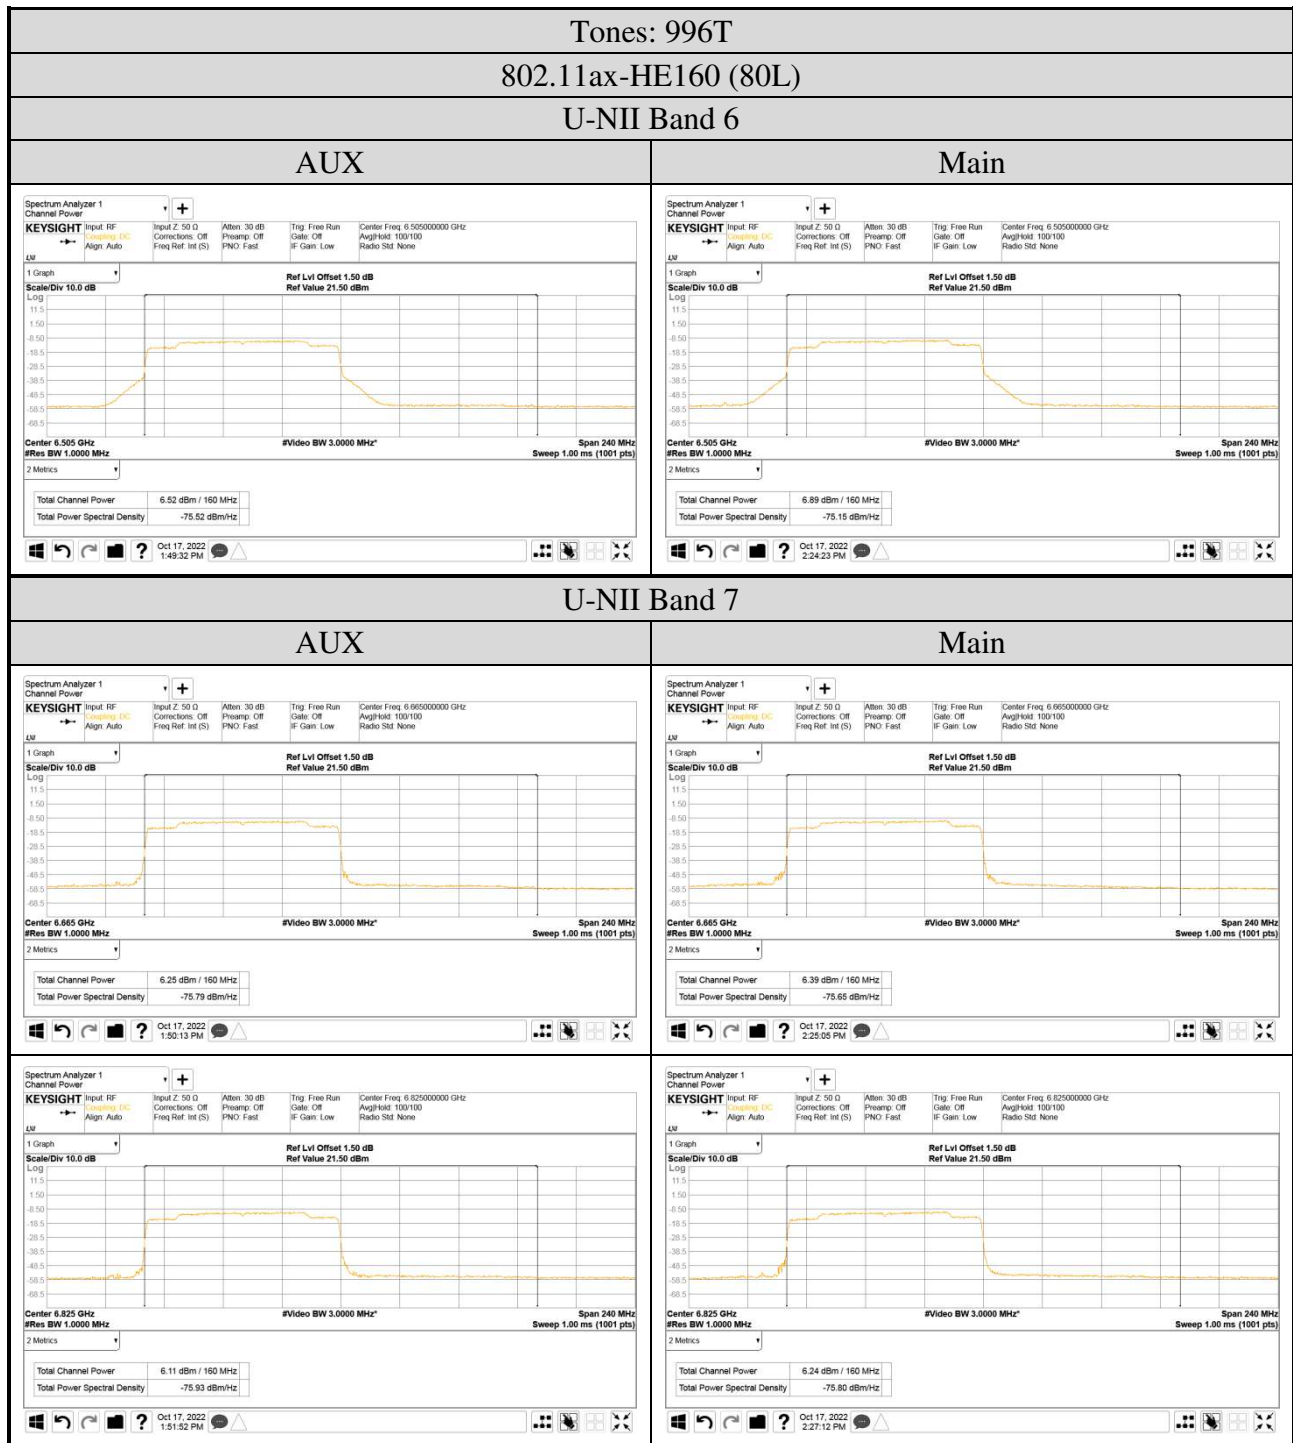

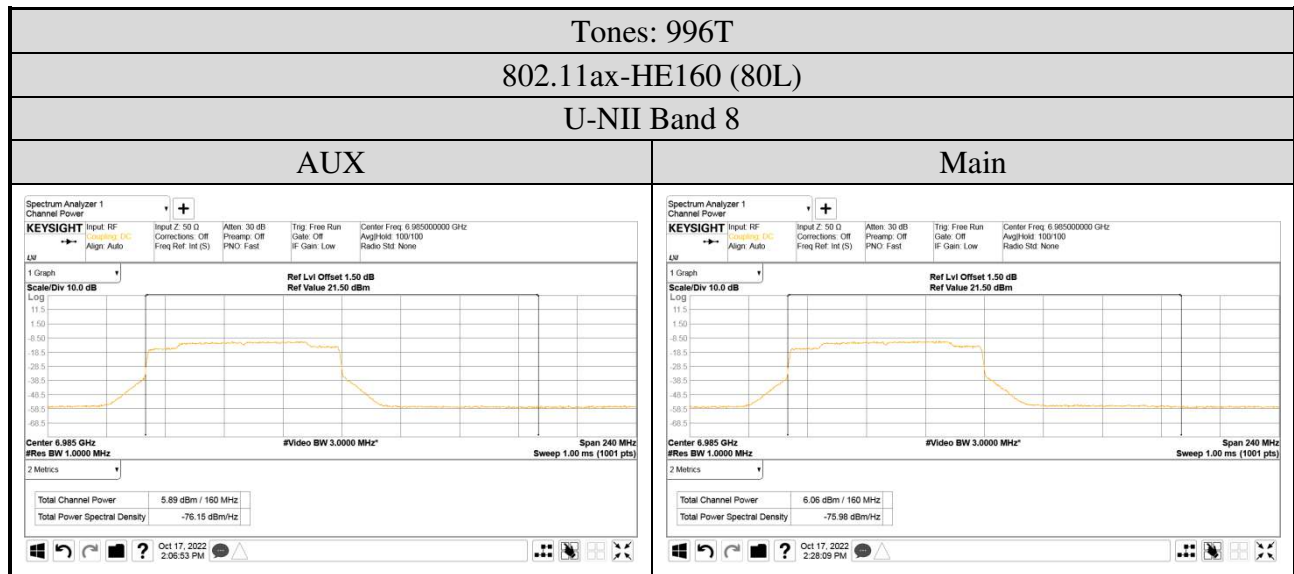

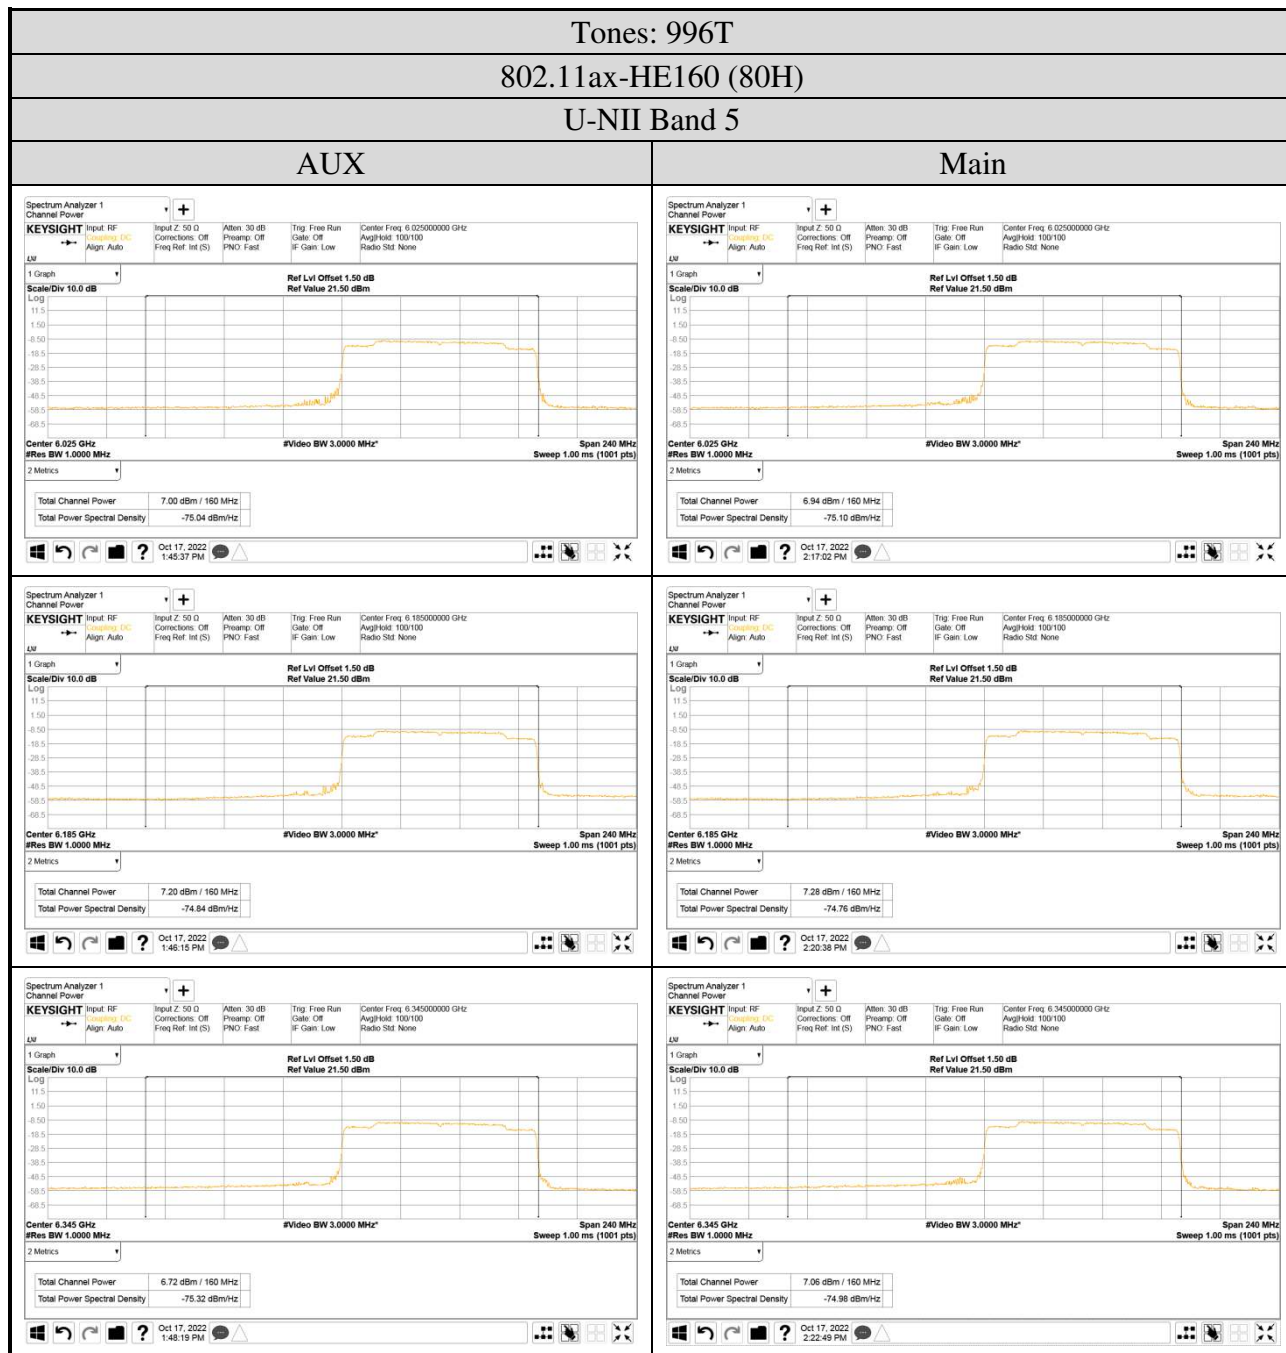

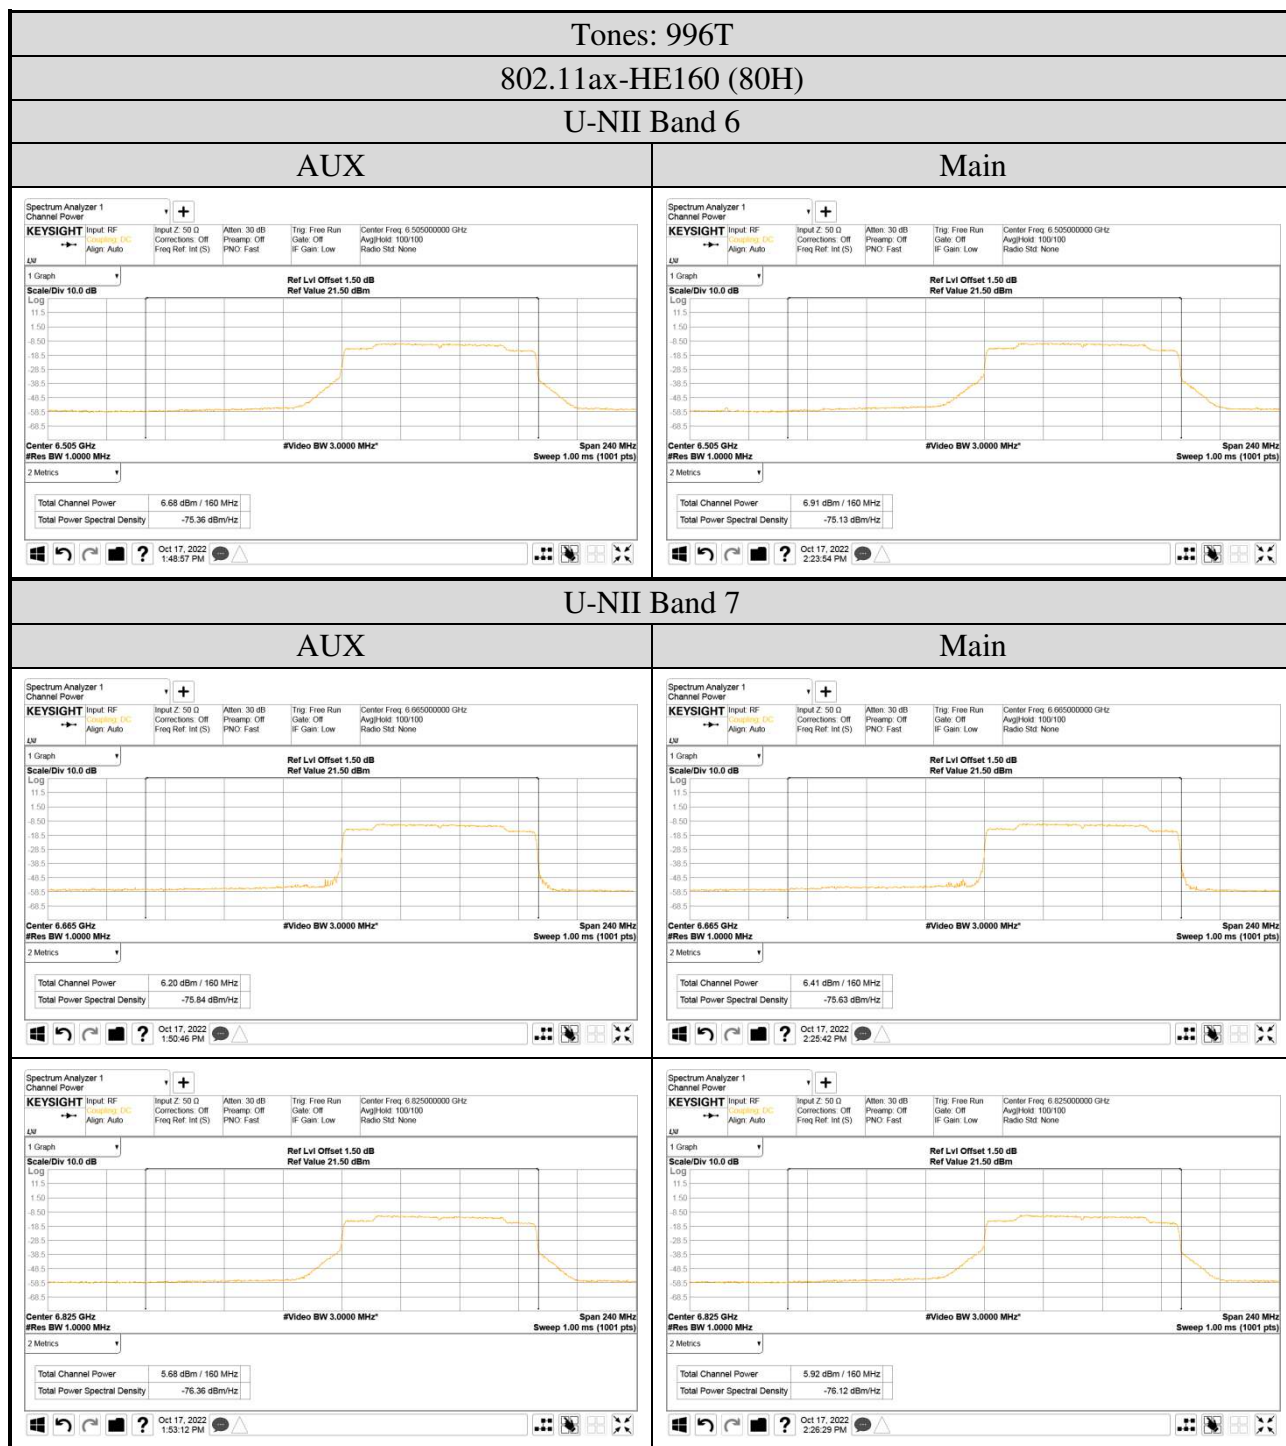

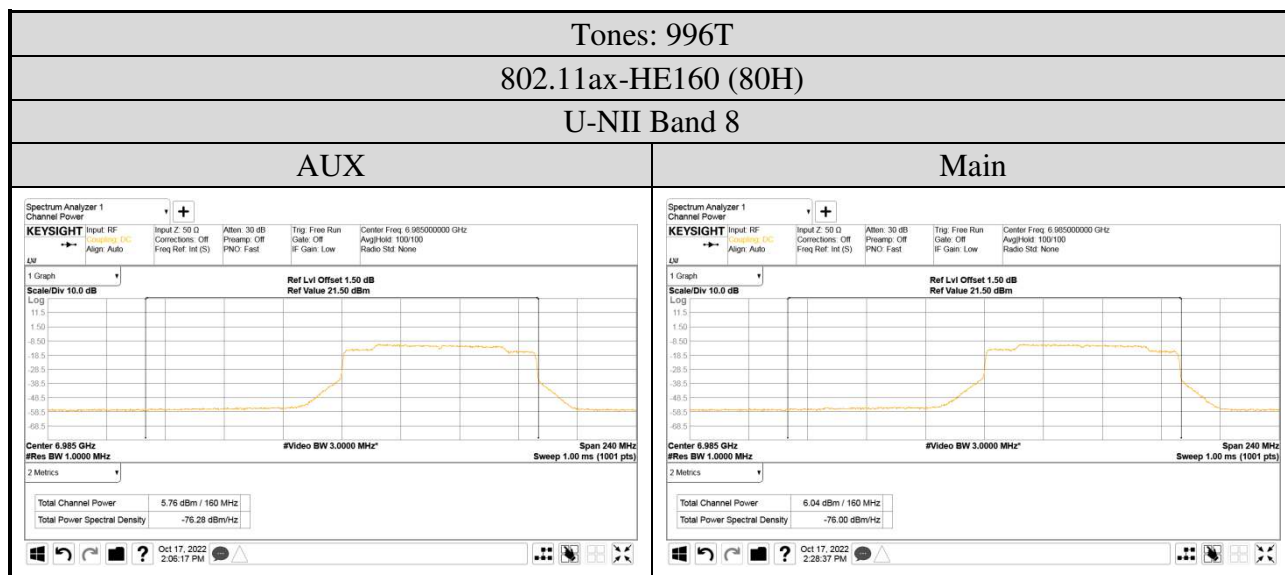

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.5 EMISSION/OCCUPIED BANDWIDTH

Test Date	2022/10/20	Temp./Hum.	22°C/72%
Cable Loss	1.5dB	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.5.1 Emission/Occupied Bandwidth Result

Mode	U-NII Band	Centre Frequency (MHz)	Bandwidth (MHz)				Limit
			AUX		Main		
			26dB	Occupied (99%)	26dB	Occupied (99%)	
802.11ax-HE20	5	5955	24.16	19.170	24.16	19.136	≤320MHz
		6175	24.45	19.078	24.97	19.127	
		6415	24.83	19.118	24.63	19.100	
	6	6435	23.97	19.098	25.17	19.149	
		6475	23.42	19.140	24.41	19.156	
		6515	24.29	19.149	23.90	19.059	
	7	6535	24.87	19.123	23.79	19.086	
		6695	24.00	19.099	23.72	19.044	
		6855	24.24	19.094	23.30	19.080	
	8	6875	23.70	19.102	24.01	19.041	
		6995	23.67	19.089	24.24	19.122	
		7115	24.29	19.094	24.09	19.057	
802.11ax-HE40	5	5965	42.82	37.877	43.83	37.821	≤320MHz
		6165	44.15	37.883	43.43	37.885	
		6405	43.58	37.818	43.70	37.844	
	6	6445	45.03	37.901	43.81	37.807	
		6485	45.45	37.875	44.70	37.875	
	7	6525	42.30	37.847	43.60	37.893	
		6685	44.61	37.850	43.44	37.853	
		6845	42.79	37.952	43.20	37.874	
	8	6885	43.07	37.902	43.22	37.803	
		7005	44.55	37.844	43.70	37.838	
		7085	44.79	37.892	44.72	37.913	
802.11ax-HE80	5	5985	81.33	76.569	82.37	76.656	≤320MHz
		6145	82.54	76.565	81.81	76.325	
		6385	82.52	76.673	81.41	76.606	
	6	6465	81.80	76.582	82.48	76.747	
		6545	82.34	76.555	81.72	76.485	
	7	6625	80.89	76.610	81.78	76.436	
		6705	83.58	76.621	82.43	76.643	
		6785	82.67	76.494	81.43	76.600	
	8	6865	81.67	76.541	82.52	76.701	
		6945	80.85	76.416	81.93	76.531	
		7025	80.86	76.510	82.85	76.636	
802.11ax-HE160	5	6025	163.5	154.68	163.0	154.67	≤320MHz
		6185	162.4	154.43	162.3	154.39	
		6345	162.5	154.51	163.2	154.31	
	6	6505	162.3	154.21	162.3	154.31	
	7	6665	163.5	154.66	153.1	154.62	
		6825	162.2	154.66	162.0	154.46	
	8	6985	162.6	154.46	161.1	154.82	

Note: All results have been included cable loss.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.5.2 Measurement Plots

