



● OFDMA Modulation

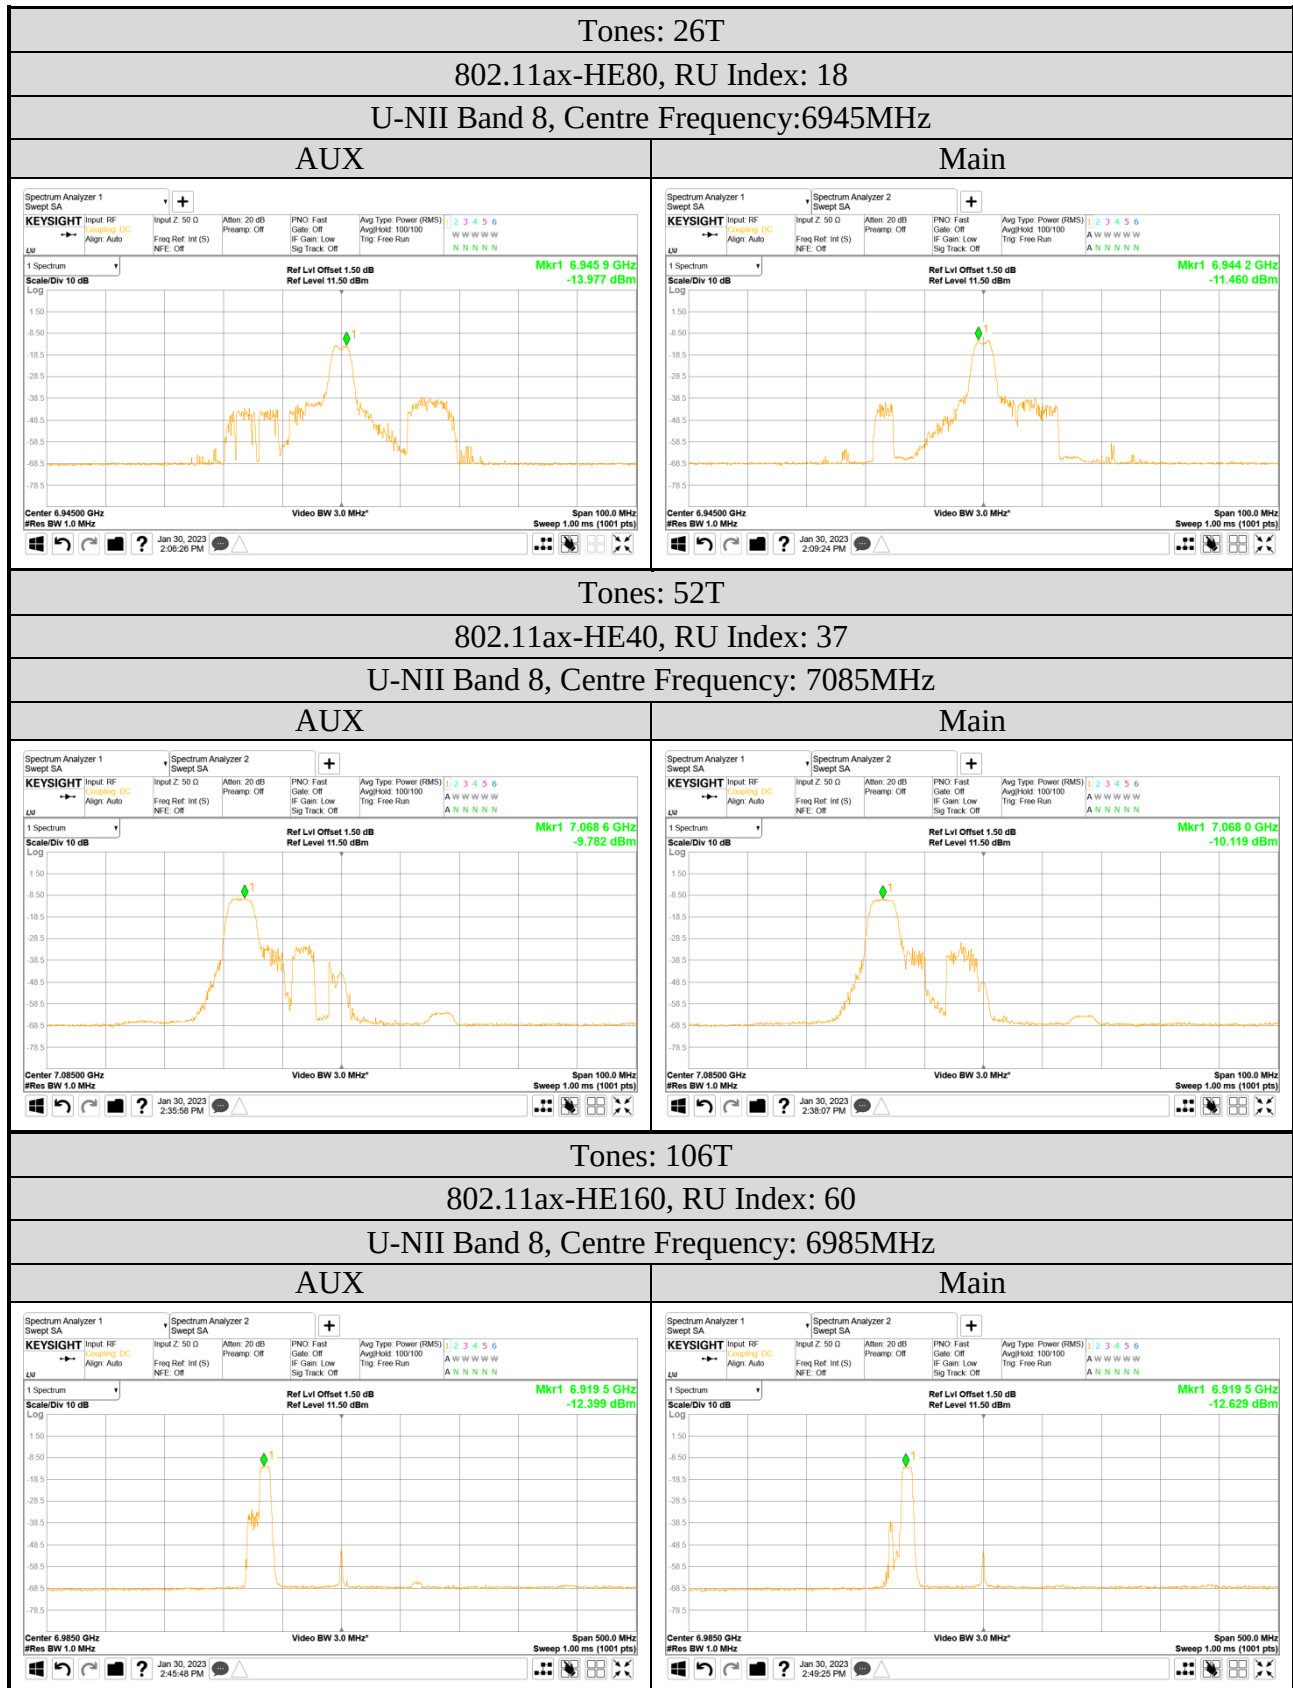

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

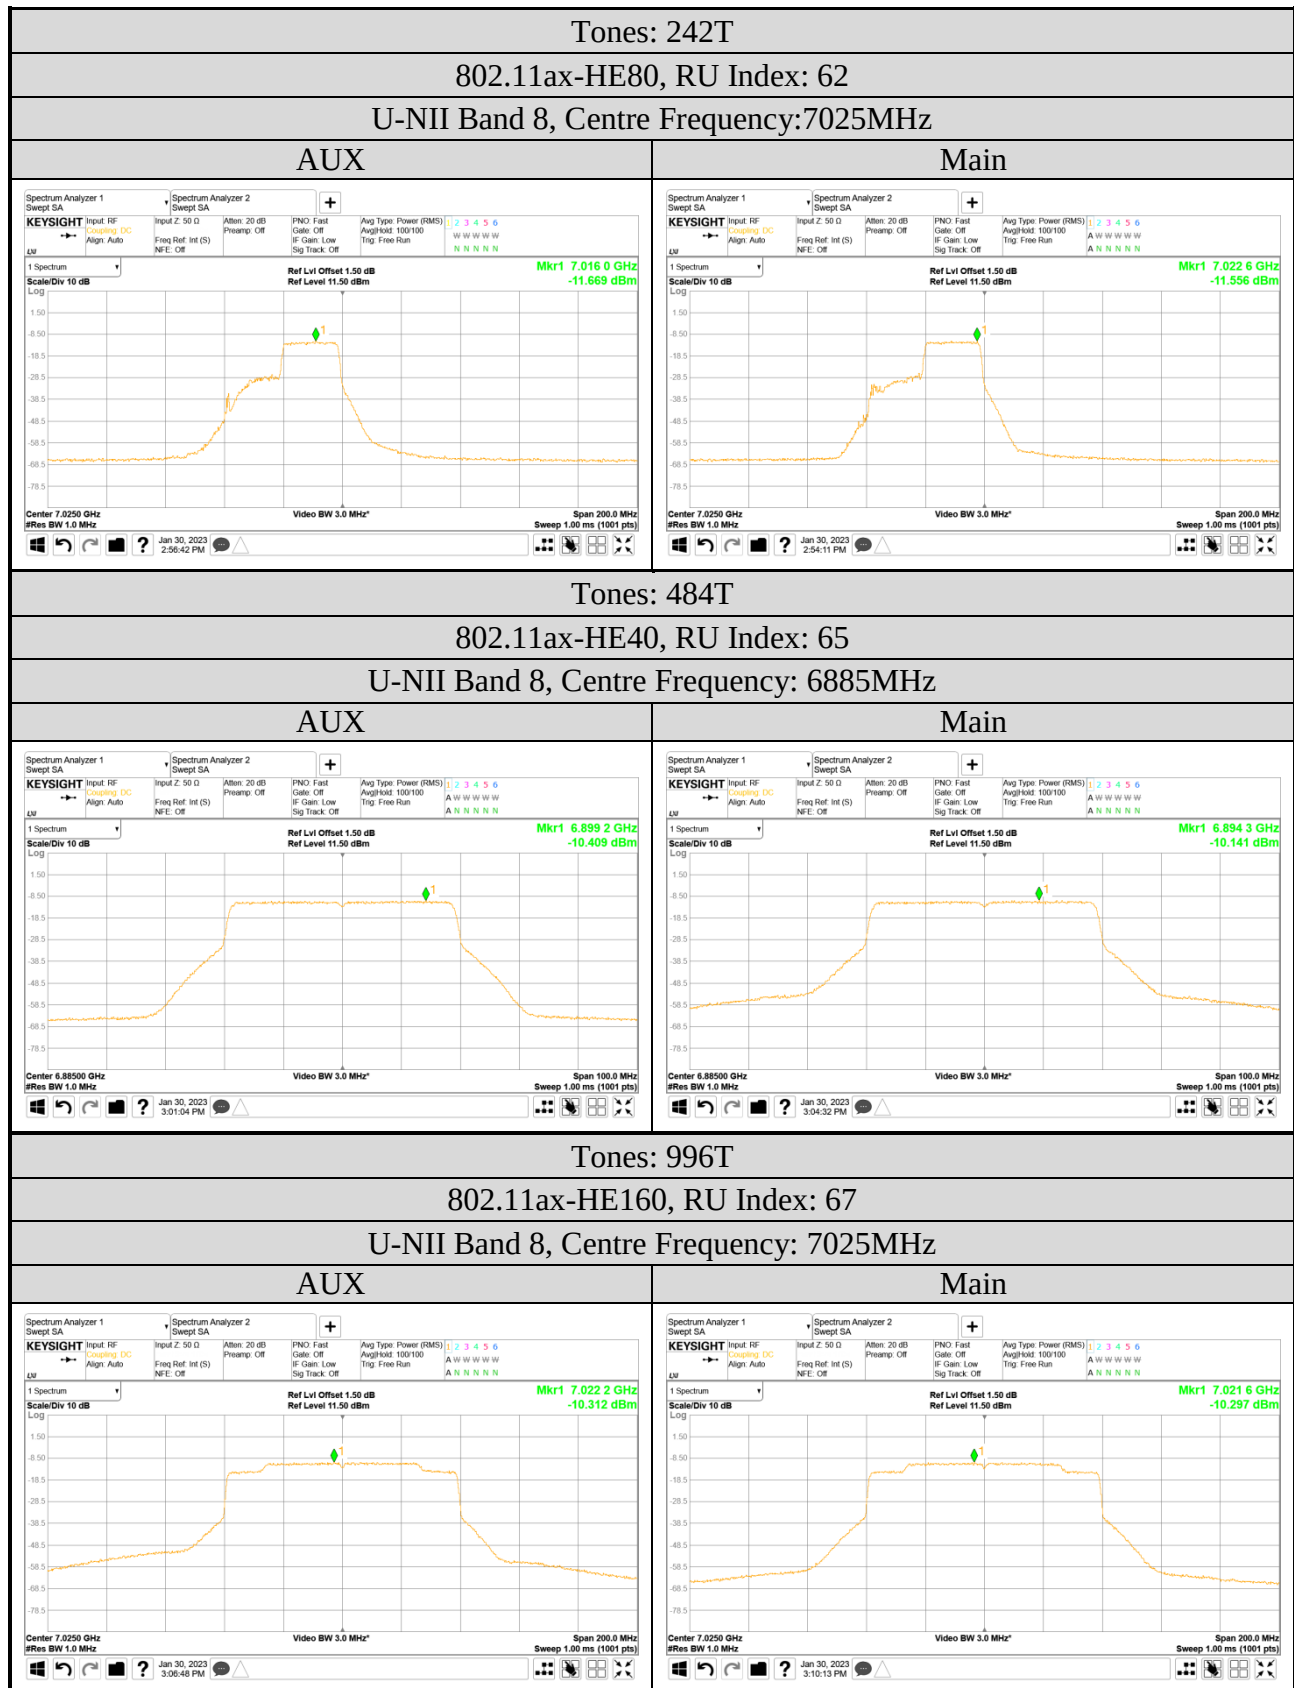

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 MAXIMUM CONDUCTED OUTPUT POWER

Test Date	2023/01/12 ~ 18	Temp./Hum.	16 ~ 23℃/62 ~ 68%
Cable Loss	1.50dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.4.1 Conducted Output Power Result

● OFDM Modulation

Modulation Type	U-NII Band	Centre Frequency (MHz)	Average Coneduted Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total E.I.R.P. (dBm) ^{Note2}	Limit
			AUX	Main				
802.11ax-HE20	5	5955	1.58	1.14	N/A	1.60	5.98	24dBm
		6175	1.43	1.21		1.60	5.93	
		6415	1.49	1.16		-0.08	4.26	
	6	6435	1.38	1.36		-0.08	4.30	
		6475	1.50	1.42		-0.08	4.39	
		6515	1.54	1.45		-0.08	4.43	
	7	6535	0.69	0.62		-0.08	3.59	
		6695	0.88	-0.12		-0.08	3.34	
		6855	0.80	0.07		3.47	6.93	
	8	6875	0.94	0.19		3.47	7.06	
		6995	0.66	0.34		3.47	6.98	
		7115	-3.36	-3.12		3.47	3.24	
802.11ax-HE40	5	5965	5.36	4.97	N/A	1.60	9.78	24dBm
		6165	5.23	4.98		1.60	9.72	
		6405	4.98	5.17		-0.08	8.01	
	6	6445	4.99	5.38		-0.08	8.12	
		6485	5.26	5.31		-0.08	8.22	
	7	6525	5.27	5.00		-0.08	8.07	
		6685	4.46	4.10		-0.08	7.22	
		6845	4.54	3.90		3.47	10.71	
	8	6885	4.40	4.44		3.47	10.90	
		7005	4.45	4.21		3.47	10.81	
		7085	4.52	4.33		3.47	10.91	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Average Coneduted Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total E.I.R.P. (dBm) ^{Note 2}	Limit
			AUX	Main				
802.11ax-HE80	5	5985	8.06	7.97	N/A	1.60	12.63	24dBm
		6145	7.81	7.69		1.60	12.36	
		6385	8.08	7.67		-0.08	10.81	
	6	6465	7.88	7.59		-0.08	10.67	
		6545	7.52	7.41		-0.08	10.40	
		6625	6.78	6.87		-0.08	9.76	
	7	6705	6.84	6.66		-0.08	9.68	
		6785	6.79	6.64		-0.08	9.65	
		6865	6.86	6.65		3.47	13.24	
	8	6945	7.24	6.84		3.47	13.52	
		7025	7.18	6.77		3.47	13.46	
802.11ax-HE160	5	6025	11.02	10.82	N/A	1.60	15.53	24dBm
		6185	10.87	10.54		1.60	15.32	
		6345	11.19	10.67		-0.08	13.87	
	6	6505	10.69	10.51		-0.08	13.53	
		6665	10.07	9.85		-0.08	12.89	
		6825	9.87	9.77		3.47	16.30	
	8	6985	10.38	9.97		3.47	16.66	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● OFDMA Modulation

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 0			RU Index 4			RU Index 8				
				AUX	Main	Duty Cycle Factor (dB) $10\log(1/X)$ Note 3	AUX	Main	Duty Cycle Factor (dB) $10\log(1/X)$ Note 3	AUX	Main	Duty Cycle Factor (dB) $10\log(1/X)$ Note 3		
802.11ax-HE20	5	5955	26T	-5.73	-5.79	0.223	-6.05	-5.82	0.223	-5.84	-5.70	0.223	1.60	-0.93
		6175		-7.13	-7.40	0.223	-7.01	-7.05	0.223	-7.12	-7.68	0.223	1.60	-2.20
		6415		-7.48	-7.81	0.223	-7.39	-7.85	0.223	-7.73	-8.06	0.223	-0.08	-4.46
	6	6435		-7.31	-7.93	0.223	-7.69	-7.50	0.223	-7.83	-8.06	0.223	-0.08	-4.44
		6475		-7.86	-8.18	0.223	-7.62	-7.93	0.223	-7.61	-8.06	0.223	-0.08	-4.62
		6515		-8.18	-8.34	0.223	-7.49	-8.04	0.223	-8.12	-8.12	0.223	-0.08	-4.60
	7	6535		-8.68	-9.12	0.223	-8.78	-9.02	0.223	-8.76	-9.32	0.223	-0.08	-5.74
		6695		-9.15	-8.82	0.223	-9.21	-8.54	0.223	-9.17	-8.97	0.223	-0.08	-5.71
		6855		-8.77	-8.51	0.223	-8.89	-8.39	0.223	-8.63	-8.66	0.223	3.47	-1.93
	8	6875		-9.22	-8.83	0.223	-9.22	-8.45	0.223	-9.23	-8.85	0.223	3.47	-2.11
		6995		-8.02	-7.83	0.223	-7.80	-7.54	0.223	-7.94	-7.91	0.223	3.47	-0.96
		7115		-7.94	-7.69	0.223	-7.84	-7.11	0.223	-7.80	-7.49	0.223	3.47	-0.76

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 0			RU Index 8			RU Index 17				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE40	5	5965	26T	-6.04	-5.98	0.223	-5.75	-5.68	0.223	-6.12	-5.69	0.223	1.60	-0.88
		6165		-6.99	-7.42	0.223	-7.01	-7.26	0.223	-7.10	-7.52	0.223	1.60	-2.30
		6405		-7.35	-8.04	0.223	-7.59	-7.86	0.223	-7.62	-8.24	0.223	-0.08	-4.53
	6	6445		-7.73	-7.83	0.223	-7.88	-7.90	0.223	-7.73	-7.92	0.223	-0.08	-4.63
		6485		-7.89	-7.99	0.223	-7.83	-8.03	0.223	-8.22	-8.05	0.223	-0.08	-4.78
	7	6525		-8.04	-8.20	0.223	-7.96	-8.50	0.223	-8.17	-8.39	0.223	-0.08	-4.97
		6685		-9.37	-8.75	0.223	-9.25	-8.89	0.223	-9.36	-8.67	0.223	-0.08	-5.85
		6845		-8.58	-8.25	0.223	-8.75	-8.25	0.223	-9.19	-8.32	0.223	3.47	-1.71
	8	6885		-9.12	-8.37	0.223	-9.32	-8.68	0.223	-9.35	-9.11	0.223	3.47	-2.03
		7005		-7.78	-7.64	0.223	-7.91	-7.85	0.223	-7.96	-8.06	0.223	3.47	-1.01
		7085		-7.66	-7.44	0.223	-7.44	-7.55	0.223	-8.46	-8.11	0.223	3.47	-0.79

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 0			RU Index 18			RU Index 36				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE80	5	5985	26T	-6.02	-5.54	0.223	-5.25	-5.38	0.223	-6.37	-5.74	0.223	1.60	-0.48
		6145		-6.83	-7.04	0.223	-6.52	-6.82	0.223	-7.53	-7.24	0.223	1.60	-1.83
		6385		-7.52	-7.59	0.223	-7.03	-7.10	0.223	-7.75	-8.24	0.223	-0.08	-3.91
	6	6465		-8.23	-7.65	0.223	-7.47	-7.54	0.223	-8.16	-8.08	0.223	-0.08	-4.35
		6545		-8.47	-8.29	0.223	-7.92	-7.88	0.223	-8.84	-8.80	0.223	-0.08	-4.75
	7	6625		-9.42	-8.73	0.223	-8.89	-8.31	0.223	-9.91	-8.64	0.223	-0.08	-5.44
		6705		-9.72	-8.98	0.223	-9.14	-8.48	0.223	-9.85	-8.73	0.223	-0.08	-5.64
		6785		-8.86	-8.07	0.223	-8.10	-7.55	0.223	-9.11	-8.32	0.223	-0.08	-4.66
	8	6865		-8.79	-8.43	0.223	-8.56	-7.81	0.223	-9.61	-8.82	0.223	3.47	-1.47
		6945		-7.99	-7.40	0.223	-7.28	-6.76	0.223	-8.30	-7.92	0.223	3.47	-0.31
		7025		-8.40	-8.19	0.223	-8.12	-7.42	0.223	-8.77	-8.49	0.223	3.47	-1.05

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 0			RU Index 18			RU Index 36				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	26T	-7.73	-7.53	0.223	-6.46	-6.36	0.223	-6.06	-5.59	0.223	1.60	-0.99
		6185		-8.62	-8.23	0.223	-7.66	-7.66	0.223	-7.21	-7.24	0.223	1.60	-2.39
		6345		-9.30	-8.82	0.223	-8.09	-7.61	0.223	-7.53	-7.20	0.223	-0.08	-4.21
	6	6505		-9.40	-9.37	0.223	-8.75	-7.99	0.223	-8.13	-7.59	0.223	-0.08	-4.70
	7	6665		-10.69	-10.92	0.223	-9.30	-9.25	0.223	-8.90	-9.39	0.223	-0.08	-5.98
		6825		-10.07	-10.02	0.223	-8.77	-8.99	0.223	-8.10	-8.53	0.223	3.47	-1.61
	8	6985		-9.09	-9.22	0.223	-8.13	-8.10	0.223	-7.92	-7.47	0.223	3.47	-0.99

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index S0			RU Index S18			RU Index S36				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) ^{Note 3}		
802.11ax-HE160 (80H)	5	6025	26T	-5.90	-5.85	0.223	-6.81	-6.35	0.223	-8.39	-7.75	0.223	1.60	-1.04
		6185		-7.14	-7.27	0.223	-7.65	-7.46	0.223	-9.13	-9.10	0.223	1.60	-2.37
		6345		-7.45	-7.39	0.223	-8.17	-7.86	0.223	-9.98	-9.17	0.223	-0.08	-4.27
	6	6505		-7.79	-7.69	0.223	-8.79	-8.45	0.223	-10.62	-10.45	0.223	-0.08	-4.59
	7	6665		-8.60	-9.10	0.223	-9.11	-9.53	0.223	-10.58	-10.85	0.223	-0.08	-5.69
		6825		-7.91	-8.62	0.223	-9.01	-9.31	0.223	-10.55	-11.04	0.223	3.47	-1.55
	8	6985		-7.91	-7.90	0.223	-8.36	-8.57	0.223	-9.88	-10.33	0.223	3.47	-1.20

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Tones: 52T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 37			RU Index 39			RU Index 40				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE20	5	5955	52T	-2.77	-2.52	0.146	-2.31	-2.56	0.146	-2.53	-2.73	0.146	1.6	2.323
		6175		-3.75	-4.06	0.146	-3.72	-4.08	0.146	-3.90	-4.34	0.146	1.6	0.860
		6415		-3.96	-4.70	0.146	-4.24	-4.89	0.146	-4.70	-4.90	0.146	-0.08	-1.238
	6	6435		-4.71	-4.47	0.146	-4.38	-4.73	0.146	-4.35	-4.77	0.146	-0.08	-1.475
		6475		-4.58	-5.05	0.146	-4.71	-4.64	0.146	-4.83	-4.97	0.146	-0.08	-1.599
		6515		-4.91	-5.19	0.146	-4.89	-4.81	0.146	-4.62	-4.95	0.146	-0.08	-1.706
	7	6535		-5.23	-5.97	0.146	-5.58	-5.95	0.146	-5.78	-6.09	0.146	-0.08	-2.508
		6695		-5.87	-5.81	0.146	-5.80	-5.44	0.146	-5.88	-5.46	0.146	-0.08	-2.540
		6855		-5.61	-5.10	0.146	-5.41	-5.46	0.146	-5.66	-5.30	0.146	3.47	1.279
	8	6875		-5.91	-5.17	0.146	-5.48	-5.22	0.146	-5.69	-5.53	0.146	3.47	1.278
		6995		-4.95	-4.75	0.146	-4.58	-4.43	0.146	-4.85	-4.81	0.146	3.47	2.122
		7115		-4.36	-4.41	0.146	-4.43	-4.52	0.146	-8.45	-8.21	0.146	3.47	2.241

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 37			RU Index 40			RU Index 44				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE40	5	5965	52T	-2.78	-2.69	0.146	-2.75	-2.74	0.146	-3.02	-2.57	0.146	1.6	2.02
		6165		-3.79	-4.26	0.146	-3.64	-4.40	0.146	-4.06	-4.26	0.146	1.6	0.75
		6405		-4.12	-4.92	0.146	-4.48	-4.79	0.146	-4.39	-4.95	0.146	-0.08	-1.43
	6	6445		-4.42	-4.47	0.146	-4.40	-4.53	0.146	-4.38	-5.05	0.146	-0.08	-1.37
		6485		-4.43	-4.96	0.146	-4.63	-4.91	0.146	-4.47	-5.10	0.146	-0.08	-1.61
	7	6525		-4.91	-4.79	0.146	-4.71	-5.19	0.146	-4.71	-5.01	0.146	-0.08	-1.77
		6685		-6.14	-5.91	0.146	-6.02	-5.57	0.146	-6.03	-5.72	0.146	-0.08	-2.71
		6845		-5.70	-5.34	0.146	-5.75	-5.08	0.146	-5.90	-5.27	0.146	3.47	1.22
	8	6885		-5.77	-5.35	0.146	-6.13	-5.54	0.146	-6.21	-5.77	0.146	3.47	1.07
		7005		-4.75	-4.78	0.146	-5.14	-4.87	0.146	-5.18	-4.81	0.146	3.47	1.86
		7085		-4.25	-4.07	0.146	-4.32	-4.24	0.146	-4.66	-4.45	0.146	3.47	2.47

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 37			RU Index 44			RU Index 52				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE80	5	5985	52T	-2.77	-3.10	0.146	-2.41	-2.46	0.146	-3.04	-3.15	0.146	1.6	2.32
		6145		-4.06	-4.01	0.146	-3.49	-3.79	0.146	-4.34	-4.58	0.146	1.6	1.12
		6385		-4.86	-4.63	0.146	-4.31	-4.08	0.146	-5.37	-5.11	0.146	-0.08	-1.12
	6	6465		-5.03	-5.11	0.146	-4.45	-5.00	0.146	-5.19	-5.46	0.146	-0.08	-1.64
		6545		-5.15	-5.70	0.146	-5.16	-5.23	0.146	-5.73	-6.06	0.146	-0.08	-2.12
	7	6625		-5.91	-6.54	0.146	-5.53	-6.46	0.146	-6.14	-7.14	0.146	-0.08	-2.89
		6705		-6.06	-6.92	0.146	-5.29	-6.74	0.146	-5.92	-7.19	0.146	-0.08	-2.88
		6785		-5.10	-6.08	0.146	-4.96	-5.60	0.146	-5.33	-6.52	0.146	-0.08	-2.19
	8	6865		-5.46	-6.32	0.146	-4.95	-6.00	0.146	-5.74	-7.10	0.146	3.47	1.18
		6945		-4.65	-5.41	0.146	-4.23	-5.05	0.146	-4.81	-5.27	0.146	3.47	2.01
		7025		-5.17	-5.77	0.146	-4.56	-5.46	0.146	-5.43	-6.27	0.146	3.47	1.64

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 37			RU Index 44			RU Index 52				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	52T	-4.35	-4.11	0.146	-3.01	-3.07	0.146	-2.87	-2.75	0.146	1.6	1.95
		6185		-5.72	-5.32	0.146	-4.63	-4.16	0.146	-3.94	-3.90	0.146	1.6	0.84
		6345		-6.00	-5.76	0.146	-4.98	-4.27	0.146	-4.39	-3.63	0.146	-0.08	-0.92
	6	6505		-6.36	-6.40	0.146	-5.57	-5.12	0.146	-4.95	-5.01	0.146	-0.08	-1.90
	7	6665		-7.30	-7.68	0.146	-6.06	-6.50	0.146	-5.66	-5.82	0.146	-0.08	-2.66
		6825		-6.78	-7.19	0.146	-5.48	-6.21	0.146	-5.16	-5.49	0.146	3.47	1.30
	8	6985		-5.55	-5.92	0.146	-5.09	-5.36	0.146	-4.63	-4.84	0.146	3.47	1.89

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index S37			RU Index S44			RU Index S52				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) ^{Note 3}		
802.11ax-HE160 (80H)	5	6025	52T	-2.89	-3.08	0.146	-3.47	-3.48	0.146	-5.21	-4.88	0.146	1.6	1.77
		6185		-4.46	-4.08	0.146	-4.57	-4.33	0.146	-6.32	-6.22	0.146	1.6	0.49
		6345		-4.42	-4.14	0.146	-4.92	-4.33	0.146	-6.98	-5.86	0.146	-0.08	-1.20
	6	6505		-4.83	-4.85	0.146	-5.78	-5.20	0.146	-7.38	-7.15	0.146	-0.08	-1.76
	7	6665		-5.85	-6.04	0.146	-6.17	-6.85	0.146	-7.18	-7.85	0.146	-0.08	-2.87
		6825		-5.25	-5.86	0.146	-5.95	-6.42	0.146	-7.28	-7.89	0.146	3.47	1.08
	8	6985		-4.31	-5.02	0.146	-5.38	-5.57	0.146	-7.04	-7.24	0.146	3.47	1.98

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}] / N_{\text{ANT}} \text{ dBi}$$

Directional gain:

$$5925\text{MHz: Directional gain} = 10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60\text{dBi}$$

$$6525\text{MHz: Directional gain} = 10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08\text{dBi}$$

$$7125\text{MHz: Directional gain} = 10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Tones: 106T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 53			RU Index 54				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE20	5	5955	106T	0.44	0.27	N/A	0.27	0.45	N/A	1.60	4.97
		6175		-0.68	-0.99	N/A	-0.83	-0.93	N/A	1.60	3.78
		6415		-1.01	-1.92	N/A	-1.41	-1.88	N/A	-0.08	1.49
	6	6435		-1.33	-1.30	N/A	-1.46	-1.46	N/A	-0.08	1.62
		6475		-1.44	-1.75	N/A	-1.68	-1.82	N/A	-0.08	1.34
		6515		-1.59	-1.87	N/A	-1.78	-1.67	N/A	-0.08	1.21
	7	6535		-2.62	-2.55	N/A	-2.45	-2.57	N/A	-0.08	0.42
		6695		-3.26	-2.58	N/A	-3.12	-2.47	N/A	-0.08	0.15
		6855		-2.54	-2.17	N/A	-2.56	-2.26	N/A	3.47	4.13
	8	6875		-2.47	-2.32	N/A	-2.90	-2.48	N/A	3.47	4.09
		6995		-1.79	-1.43	N/A	-1.70	-1.82	N/A	3.47	4.87
		7115		-1.61	-1.18	N/A	-8.33	-7.98	N/A	3.47	5.09

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 53			RU Index 54			RU Index 56				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE40	5	5965	106T	0.35	0.13	N/A	0.03	0.50	N/A	0.24	0.33	N/A	1.60	4.90
		6165		-1.03	-1.33	N/A	-1.01	-1.01	N/A	-0.95	-1.09	N/A	1.60	3.60
		6405		-1.02	-1.99	N/A	-1.46	-1.79	N/A	-1.61	-2.13	N/A	-0.08	1.45
	6	6445		-1.41	-1.53	N/A	-1.23	-1.72	N/A	-1.50	-1.60	N/A	-0.08	1.46
		6485		-1.55	-1.88	N/A	-1.40	-1.83	N/A	-1.61	-1.88	N/A	-0.08	1.32
	7	6525		-1.45	-1.90	N/A	-1.52	-2.03	N/A	-1.65	-2.32	N/A	-0.08	1.26
		6685		-2.95	-2.68	N/A	-3.14	-2.59	N/A	-3.27	-2.43	N/A	-0.08	0.12
		6845		-2.74	-2.36	N/A	-2.95	-2.10	N/A	-3.04	-2.44	N/A	3.47	3.98
	8	6885		-3.02	-2.18	N/A	-2.81	-2.31	N/A	-3.28	-2.72	N/A	3.47	3.93
		7005		-1.63	-1.63	N/A	-1.63	-1.76	N/A	-1.85	-2.00	N/A	3.47	4.85
		7085		-1.62	-1.22	N/A	-1.51	-1.23	N/A	-1.76	-1.38	N/A	3.47	5.11

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 53			RU Index 56			RU Index 60				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE80	5	5985	106T	0.35	0.06	N/A	0.62	0.37	N/A	0.04	-0.15	N/A	1.60	5.11
		6145		-1.06	-0.97	N/A	-0.79	-0.69	N/A	-1.51	-1.27	N/A	1.60	3.87
		6385		-1.67	-1.65	N/A	-1.84	-1.41	N/A	-2.25	-2.27	N/A	-0.08	1.31
	6	6465		-1.91	-2.47	N/A	-1.67	-1.79	N/A	-2.02	-2.40	N/A	-0.08	1.20
		6545		-1.92	-2.63	N/A	-1.86	-2.47	N/A	-2.85	-2.79	N/A	-0.08	0.78
	7	6625		-2.81	-3.70	N/A	-2.52	-3.52	N/A	-2.70	-3.72	N/A	-0.08	-0.06
		6705		-2.97	-3.90	N/A	-2.48	-3.47	N/A	-2.76	-4.21	N/A	-0.08	-0.02
		6785		-1.74	-2.72	N/A	-1.38	-2.27	N/A	-2.26	-3.14	N/A	-0.08	1.13
	8	6865		-2.20	-2.97	N/A	-1.92	-2.93	N/A	-2.56	-3.68	N/A	3.47	4.08
		6945		-1.17	-2.05	N/A	-0.81	-1.89	N/A	-1.75	-2.33	N/A	3.47	5.16
		7025		-1.69	-2.06	N/A	-1.31	-1.96	N/A	-2.32	-2.56	N/A	3.47	4.86

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 53			RU Index 56			RU Index 60				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	106T	-1.09	-1.33	N/A	0.04	-0.02	N/A	0.03	0.63	N/A	1.60	4.95
		6185		-2.53	-1.97	N/A	-1.24	-1.07	N/A	-1.03	-1.09	N/A	1.60	3.55
		6345		-3.25	-2.41	N/A	-2.03	-1.21	N/A	-1.37	-0.93	N/A	-0.08	1.79
	6	6505		-3.22	-3.22	N/A	-2.29	-2.05	N/A	-1.69	-1.72	N/A	-0.08	1.23
	7	6665		-4.16	-4.38	N/A	-3.58	-3.54	N/A	-2.79	-3.03	N/A	-0.08	0.02
		6825		-3.82	-3.57	N/A	-3.17	-2.56	N/A	-2.50	-2.41	N/A	3.47	4.03
	8	6985		-2.75	-2.47	N/A	-1.70	-1.80	N/A	-1.24	-1.29	N/A	3.47	5.22

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index S53			RU Index S56			RU Index S60				
				AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor 10log(1/X) Note 3		
802.11ax-HE160 (80H)	5	6025	106T	0.05	0.17	N/A	-0.35	0.12	N/A	-2.16	-1.87	N/A	1.60	4.72
		6185		-1.08	-0.76	N/A	-1.79	-1.40	N/A	-2.98	-2.89	N/A	1.60	3.69
		6345		-1.12	-1.10	N/A	-1.88	-1.47	N/A	-3.38	-2.86	N/A	-0.08	1.82
	6	6505		-2.06	-1.84	N/A	-2.06	-2.46	N/A	-3.73	-3.94	N/A	-0.08	0.98
	7	6665		-3.08	-3.31	N/A	-3.47	-3.45	N/A	-4.76	-4.99	N/A	-0.08	-0.26
		6825		-2.44	-2.25	N/A	-3.08	-2.78	N/A	-4.32	-4.71	N/A	3.47	4.14
	8	6985		-1.60	-1.30	N/A	-2.32	-2.00	N/A	-3.64	-3.51	N/A	3.47	5.03

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Tones: 242T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)			Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 61				
				AUX	Main	Duty Cycle Factor (dB) ^{Note 3} 10log(1/X)		
802.11ax-HE20	5	5955	242T	2.18	2.48	0.150	1.60	7.09
		6175		2.32	2.23	0.150	1.60	7.04
		6415		2.00	2.47	0.150	-0.08	5.32
	6	6435		1.29	1.71	0.150	-0.08	4.59
		6475		1.7	2.05	0.150	-0.08	4.96
		6515		1.7	1.73	0.150	-0.08	4.80
	7	6535		1.37	1.61	0.150	-0.08	4.57
		6695		1.84	1.65	0.150	-0.08	4.83
		6855		1.57	1.76	0.150	3.47	8.30
	8	6875		0.86	1.36	0.150	3.47	7.75
		6995		0.82	0.85	0.150	3.47	7.47
		7115		-2.86	-2.54	0.150	3.47	3.93

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index 61			RU Index 62				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) ^{Note 3}	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) ^{Note 3}		
802.11ax-HE40	5	5965	242T	2.18	1.42	0.150	1.96	1.32	0.15	1.60	6.58
		6165		1.86	1.5	0.150	1.77	1.01	0.15	1.60	6.44
		6405		1.68	1.64	0.150	1.63	1.52	0.15	-0.08	4.74
	6	6445		1.23	1.27	0.150	1.2	1.06	0.15	-0.08	4.33
		6485		1.1	0.76	0.150	1.06	1.64	0.15	-0.08	4.44
	7	6525		1.38	0.72	0.150	2.43	1.42	0.15	-0.08	5.03
		6685		1.29	0.01	0.150	1.27	0.23	0.15	-0.08	3.86
		6845		1.27	0.09	0.150	1.23	-0.02	0.15	3.47	7.35
	8	6885		0.77	-0.02	0.150	0.94	0.11	0.15	3.47	7.18
		7005		0.83	-0.48	0.150	0.77	-0.32	0.15	3.47	6.89
		7085		1.17	0.24	0.150	1.41	0.55	0.15	3.47	7.63

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 61			RU Index 62			RU Index 64				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE80	5	5985	242T	2.52	2.91	0.150	2.23	2.87	0.15	2.55	2.46	0.15	1.60	7.48
		6145		2.47	2.49	0.150	2.57	2.51	0.15	2.16	2.47	0.15	1.60	7.30
		6385		2.14	2.24	0.150	2.18	2.52	0.15	2.33	2.42	0.15	-0.08	5.46
	6	6465		2.03	1.45	0.150	2.91	2.67	0.15	1.71	1.5	0.15	-0.08	5.87
		6545		1.6	1.97	0.150	2.34	2.86	0.15	1.84	2.41	0.15	-0.08	5.69
	7	6625		1.00	1.65	0.150	0.99	1.84	0.15	1.00	1.62	0.15	-0.08	4.52
		6705		1.31	1.97	0.150	1.32	2.05	0.15	0.92	1.65	0.15	-0.08	4.78
		6785		0.93	1.56	0.150	1.12	1.76	0.15	1.07	1.63	0.15	-0.08	4.53
	8	6865		0.82	1.6	0.150	1.18	1.87	0.15	0.41	0.79	0.15	3.47	8.17
		6945		0.69	1.18	0.150	1.28	1.96	0.15	0.24	0.73	0.15	3.47	8.26
		7025		0.21	1.02	0.150	1.3	2.15	0.15	0.19	1.23	0.15	3.47	8.38

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 61			RU Index 62			RU Index 64				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	242T	2.17	2.64	0.150	2.47	2.88	0.15	1.61	2.65	0.15	1.60	7.44
		6185		1.78	2.33	0.150	2.38	3.13	0.15	2.1	2.33	0.15	1.60	7.53
		6345		2.1	2.57	0.150	2.25	2.89	0.15	1.77	2.5	0.15	-0.08	5.66
	6	6505		1.56	1.95	0.150	2.56	2.76	0.15	1.59	1.72	0.15	-0.08	5.74
	7	6665		-0.05	1.38	0.150	0.39	2.01	0.15	0.26	2.11	0.15	-0.08	4.36
		6825		-0.15	1.57	0.150	0.46	1.7	0.15	-0.31	1.37	0.15	3.47	7.75
	8	6985		-0.55	0.49	0.150	0.91	1.86	0.15	-0.63	0.76	0.15	3.47	8.04

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)									Directional Antenna Gain (dBi) ^{Note 4}	Max EIRP (dBm) ^{Note 5}
				RU Index S61			RU Index S62			RU Index S64				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE160 (80H)	5	6025	242T	1.76	2.95	0.150	1.69	2.45	0.15	1.8	2.69	0.15	1.60	7.16
		6185		1.76	2.65	0.150	1.55	2.7	0.15	1.76	2.69	0.15	1.60	7.01
		6345		1.92	2.15	0.150	1.7	2.48	0.15	2.1	2.72	0.15	-0.08	5.50
	6	6505		1.71	1.85	0.150	1.9	2.46	0.15	1.66	2.37	0.15	-0.08	5.27
	7	6665		-0.28	1.42	0.150	-0.36	1.43	0.15	-0.57	1.57	0.15	-0.08	3.73
		6825		-0.21	1.43	0.150	0.17	1.56	0.15	-0.07	0.94	0.15	3.47	7.55
	8	6985		-0.58	0.69	0.150	0.36	1.65	0.15	-0.34	0.87	0.15	3.47	7.68

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}] / N_{\text{ANT}} \text{ dBi}$$

Directional gain:

$$5925\text{MHz: Directional gain} = 10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60\text{dBi}$$

$$6525\text{MHz: Directional gain} = 10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08\text{dBi}$$

$$7125\text{MHz: Directional gain} = 10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Tones: 484T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)			Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 65				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE40	5	5965	484T	5.15	5.51	N/A	1.60	9.94
		6165		5.08	5.5	N/A	1.60	9.91
		6405		5.4	5.2	N/A	-0.08	8.23
	6	6445		5.19	5.68	N/A	-0.08	8.37
		6485		5.49	5.6	N/A	-0.08	8.48
	7	6525		5.33	5.38	N/A	-0.08	8.29
		6685		4.91	4.65	N/A	-0.08	7.71
		6845		4.74	4.65	N/A	3.47	11.18
	8	6885		4.75	4.89	N/A	3.47	11.30
		7005		4.49	4.35	N/A	3.47	10.90
		7085		4.82	4.81	N/A	3.47	11.30

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 65			RU Index 66				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE80	5	5985	484T	5.39	5.62	N/A	5.38	5.38	N/A	1.60	10.12
		6145		5.3	5.11	N/A	5.32	5.12	N/A	1.60	9.83
		6385		5.26	5.23	N/A	5.69	5.41	N/A	-0.08	8.48
	6	6465		5.63	4.94	N/A	5.43	5.39	N/A	-0.08	8.34
		6545		5.41	5.87	N/A	5.05	5.36	N/A	-0.08	8.58
	7	6625		4.54	4.41	N/A	4.12	4.45	N/A	-0.08	7.41
		6705		4.38	4.34	N/A	4.32	4.73	N/A	-0.08	7.46
		6785		4.15	4.46	N/A	4.55	4.68	N/A	-0.08	7.55
	8	6865		4.34	4.57	N/A	4.63	4.47	N/A	3.47	11.03
		6945		4.52	4.34	N/A	4.28	4.61	N/A	3.47	10.93
		7025		4.16	4.39	N/A	4.31	4.75	N/A	3.47	11.02

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 65			RU Index 66				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE160 (80L)	5	6025	484T	5.01	5.32	N/A	4.67	5.32	N/A	1.60	9.78
		6185		5.27	5.55	N/A	5.28	5.55	N/A	1.60	10.03
		6345		4.85	5.26	N/A	5.26	5.49	N/A	-0.08	8.31
	6	6505		5.46	4.96	N/A	5.1	5.42	N/A	-0.08	8.19
	7	6665		3.96	4.49	N/A	3.71	4.34	N/A	-0.08	7.16
		6825		3.97	4.53	N/A	3.5	4.86	N/A	3.47	10.74
	8	6985		4.41	4.58	N/A	4.32	4.59	N/A	3.47	10.98

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index S65			RU Index S66				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE160 (80H)	5	6025	484T	4.77	5.46	N/A	4.83	5.21	N/A	1.60	9.74
		6185		4.86	5.29	N/A	5.07	5.12	N/A	1.60	9.71
		6345		4.44	5.36	N/A	5.03	5.37	N/A	-0.08	8.13
	6	6505		5.2	5.62	N/A	4.85	5.41	N/A	-0.08	8.35
	7	6665		3.97	4.54	N/A	3.78	4.71	N/A	-0.08	7.20
		6825		4.00	4.48	N/A	4.27	4.68	N/A	3.47	10.96
	8	6985		4.2	4.37	N/A	3.95	4.94	N/A	3.47	10.95

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Tones: 996T

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)			Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 67				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE80	5	5985	996T	7.22	6.58	0.159	1.60	11.68
		6145		7.4	6.05	0.159	1.60	11.55
		6385		7.54	6.57	0.159	-0.08	10.17
	6	6465		7.45	6.55	0.159	-0.08	10.11
		6545		7.32	6.34	0.159	-0.08	9.95
	7	6625		6.7	5.58	0.159	-0.08	9.27
		6705		6.59	5.36	0.159	-0.08	9.11
		6785		6.21	5.43	0.159	-0.08	8.93
	8	6865		6.25	5.26	0.159	3.47	12.42
		6945		6.33	5.63	0.159	3.47	12.63
		7025		6.73	5.73	0.159	3.47	12.90

Mode	U-NII Band	Centre Frequency (MHz)	Tones	Average Conducted Output power (dBm)						Directional Antenna Gain (dBi) Note 4	Max EIRP (dBm) Note 5
				RU Index 67			RU Index S67				
				AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3	AUX	Main	Duty Cycle Factor (dB) 10log(1/X) Note 3		
802.11ax-HE160	5	6025	996T	7.61	6.7	0.159	7.25	6.67	0.159	1.60	11.95
		6185		7.59	6.66	0.159	7.65	6.73	0.159	1.60	11.98
		6345		7.79	7.02	0.159	7.59	6.8	0.159	-0.08	10.51
	6	6505		7.25	6.11	0.159	7.06	6.15	0.159	-0.08	9.81
	7	6665		6.82	5.63	0.159	6.64	5.72	0.159	-0.08	9.35
		6825		6.63	5.71	0.159	6.31	5.41	0.159	3.47	12.83
	8	6985		6.53	5.8	0.159	6.45	5.7	0.159	3.47	12.82

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. EIRP limit is 24dBm

3. Duty cycle factor is not applicable for duty cycle > 98%.

4. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = 10 log[(10^{G1/10} + 10^{G2/10} + ... + 10^{GN/10})/N_{ANT}] dBi

Directional gain:

5925MHz: Directional gain = 10 log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60dBi

6525MHz: Directional gain = 10 log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08dBi

7125MHz: Directional gain = 10 log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).


5. Max EIRP (dBm) = Max of Average Conducted Output Power (dBm) [ANT A (AUX)+ ANT B (Main)+ Duty Cycle Factor(dB)]+ Directional gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4.2 Measurement Plots

● OFDM Modulation

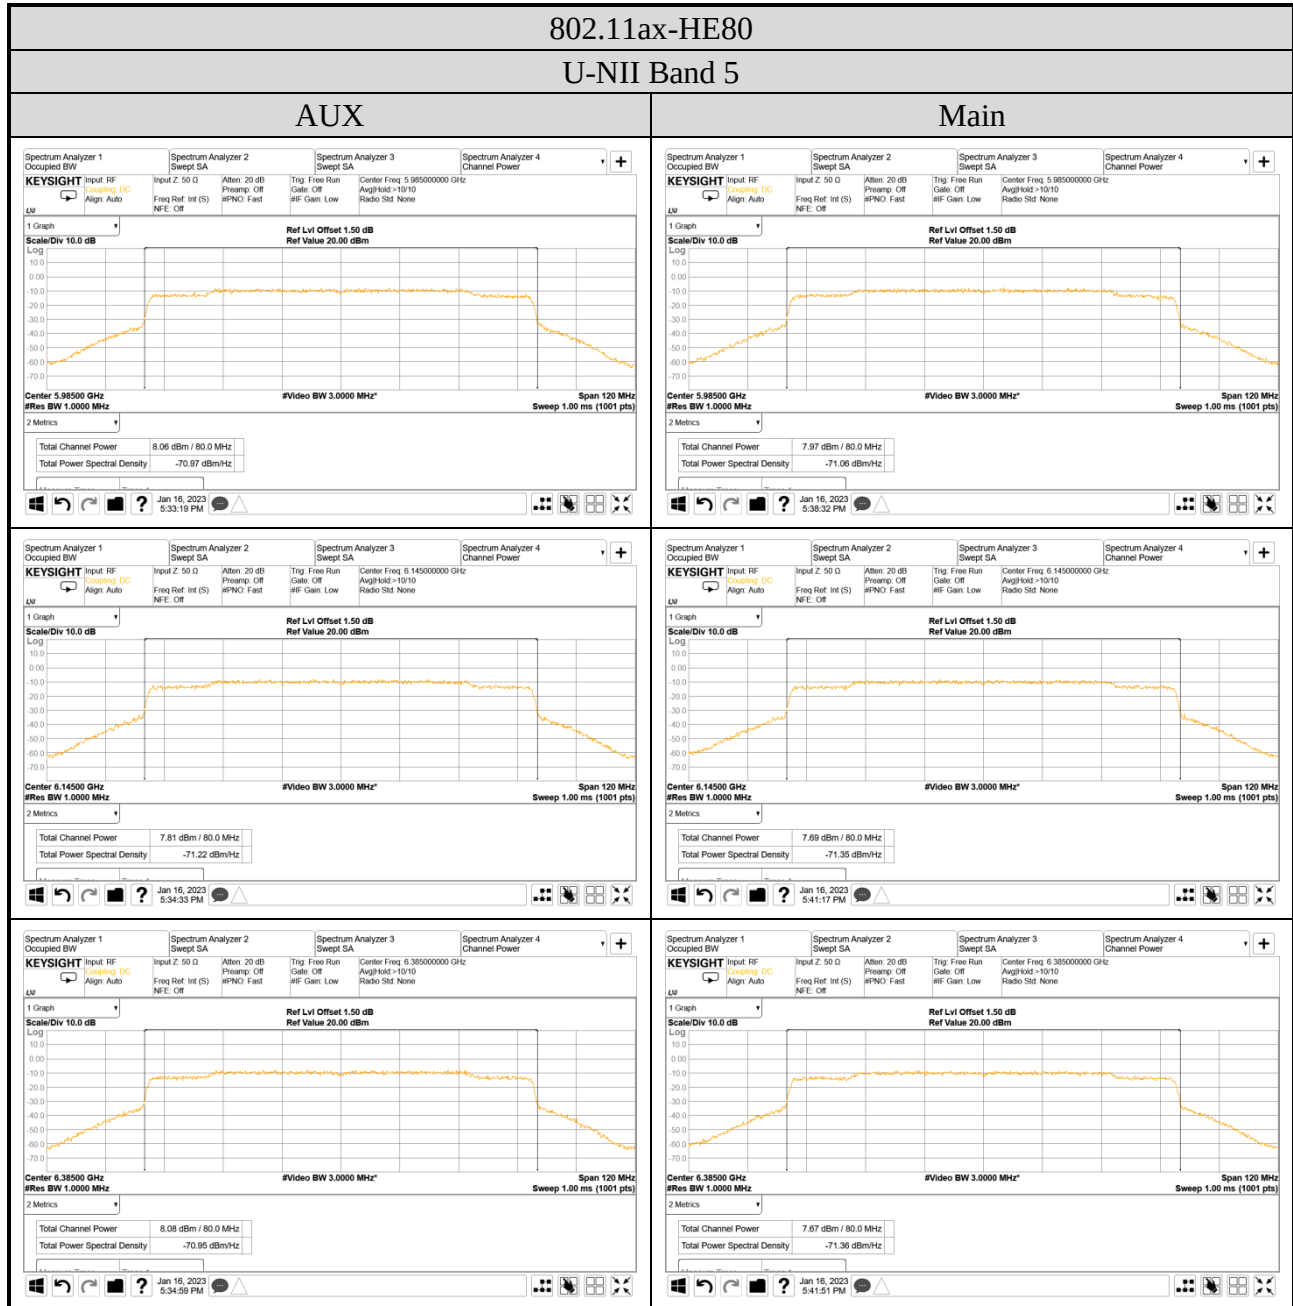


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303




802.11ax-HE80

U-NII Band 6

AUX

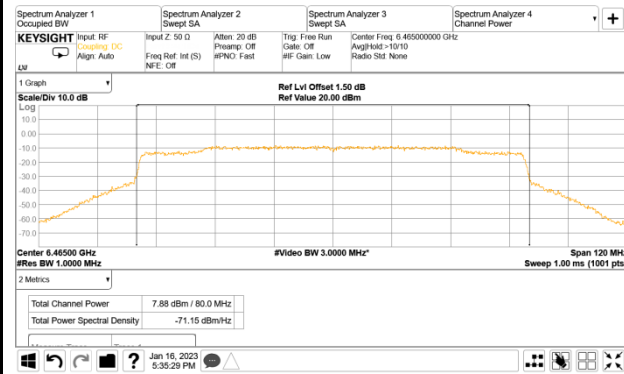


Main

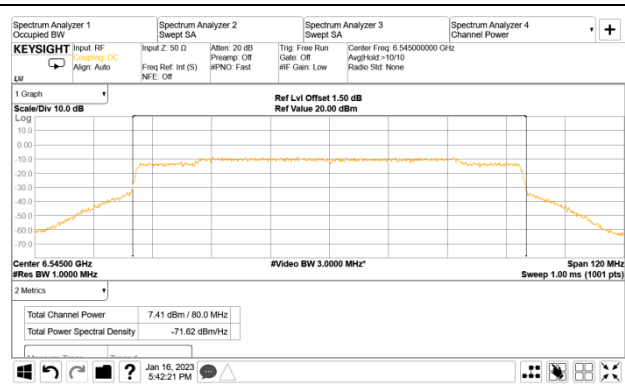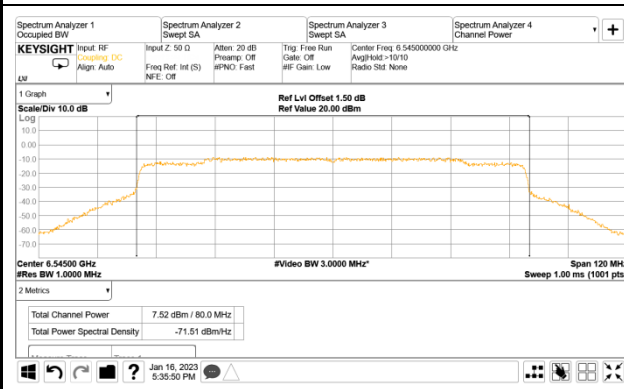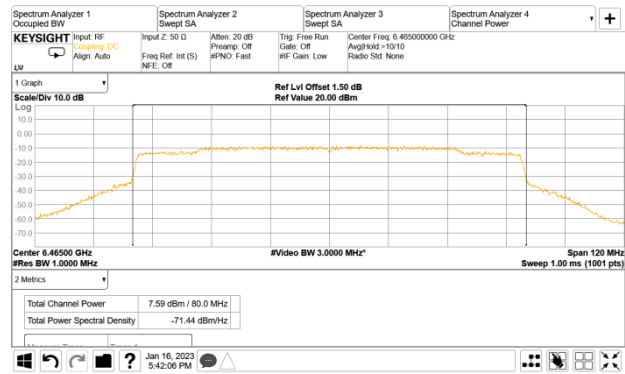


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

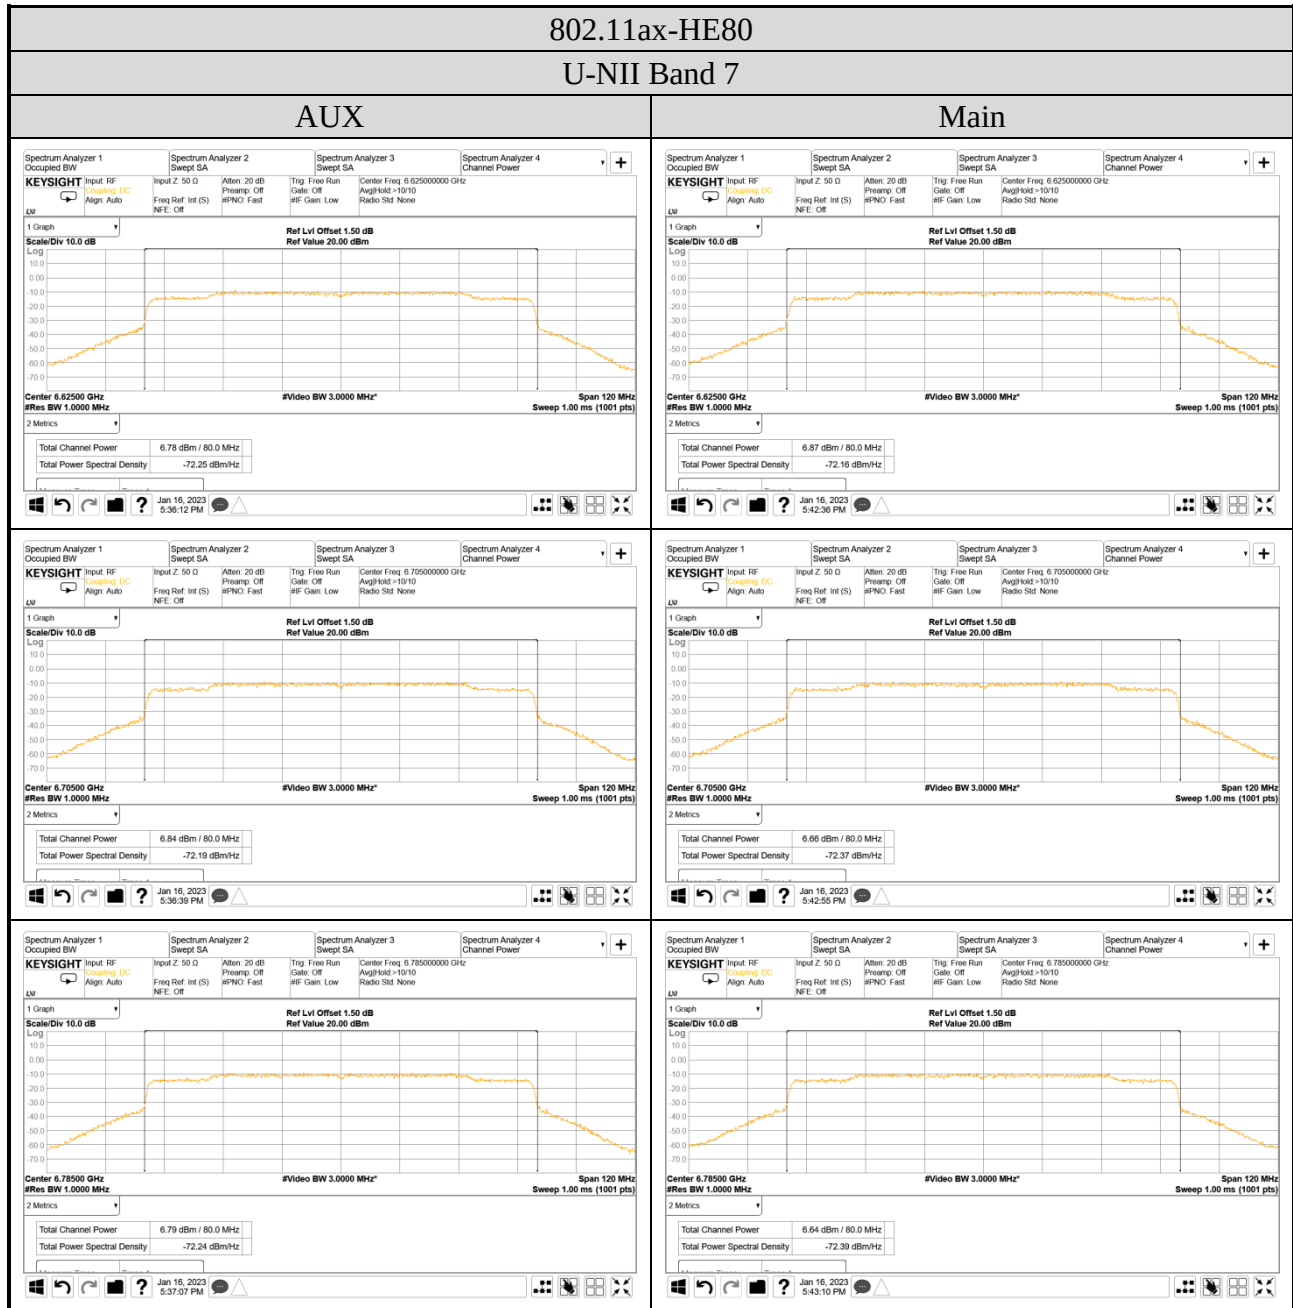

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan



Tel: +886 2 26099301
Fax: +886 2 26099303

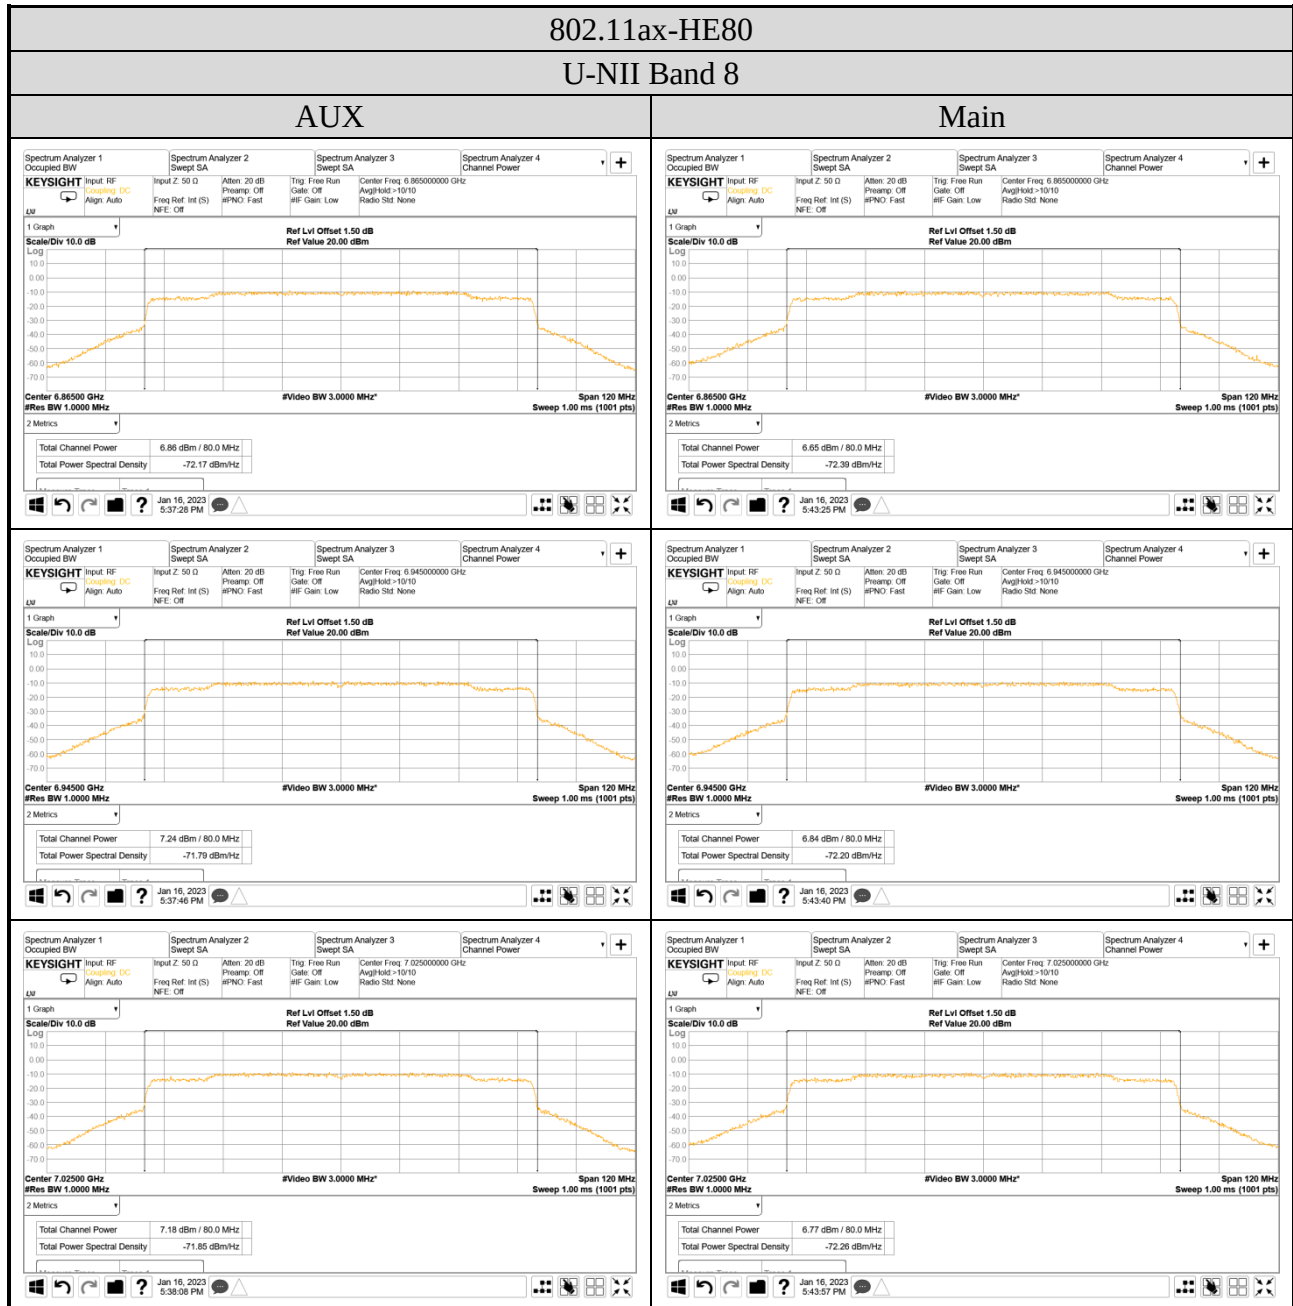

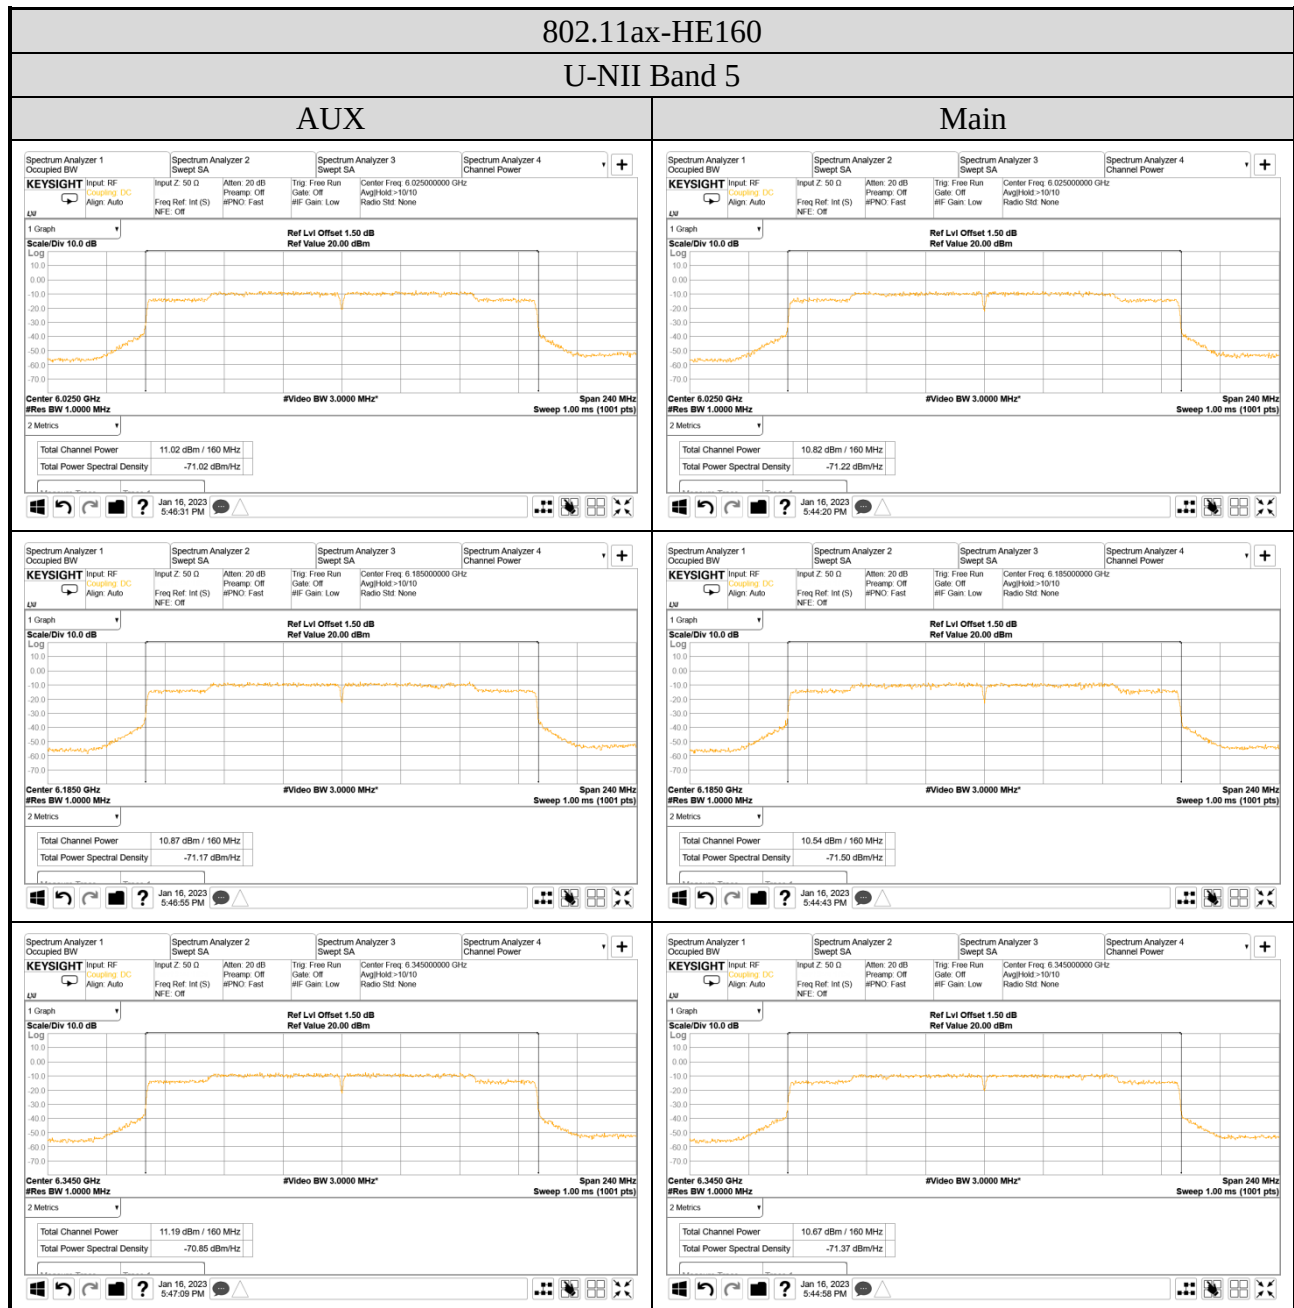

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

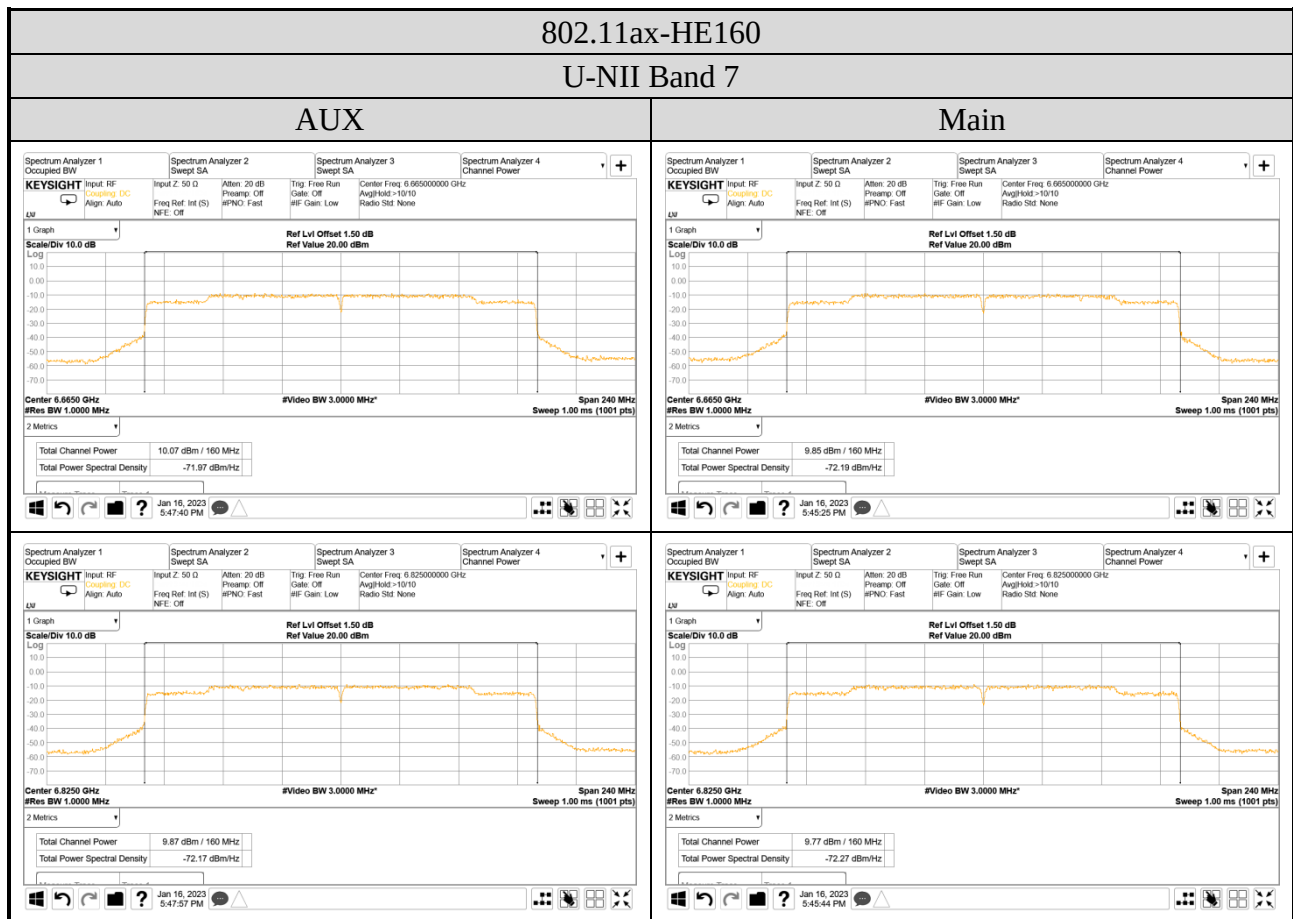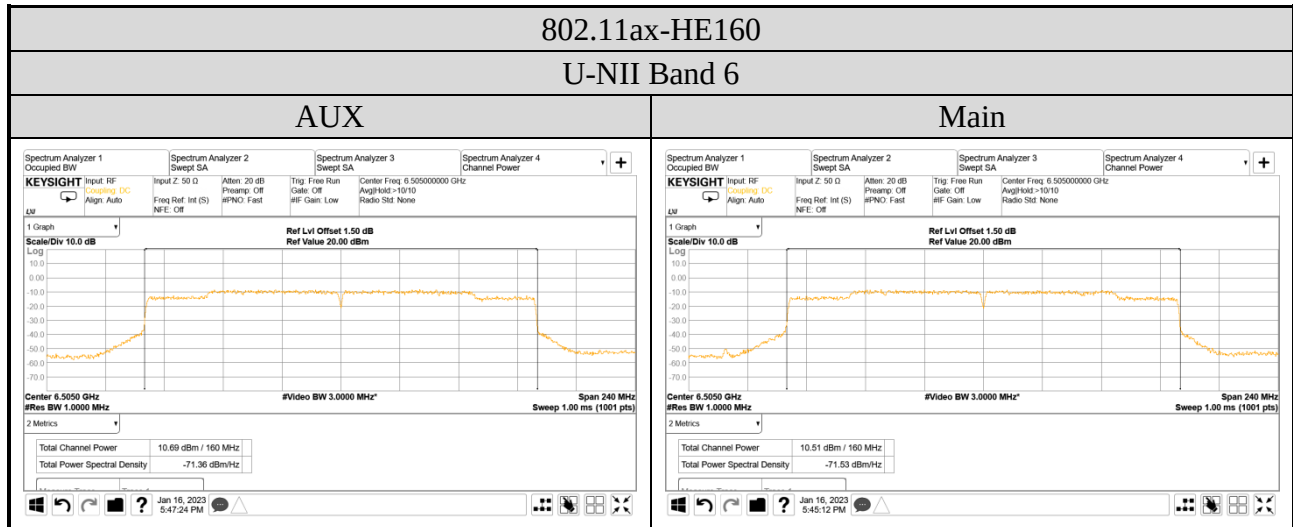

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

