

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3 MAXIMUM POWER SPECTRAL DENSITY

Test Date	2022/10/31 ~ 11/01	Temp./Hum.	22 ~ 23°C/66 ~ 68%
Cable Loss	1.50dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Power Spectral Density Result

- OFDM Modulation
- Test SKU: SKU #1 (With INPAQ ANT)

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE20	5	5955	-11.357	-12.691	N/A	3.920	-5.043	-1
		6175	-13.336	-12.825		3.920	-6.143	
		6415	-12.084	-12.264		3.860	-5.303	
	6	6435	-11.762	-12.257		3.860	-5.132	
		6475	-11.443	-12.334		3.860	-4.995	
		6515	-11.619	-12.113		3.860	-4.989	
	7	6535	-12.241	-13.052		3.860	-5.757	
		6695	-12.161	-13.616		3.860	-5.958	
		6855	-12.196	-13.667		3.290	-6.569	
	8	6875	-12.103	-13.655		3.290	-6.510	
		6995	-11.252	-12.928		3.290	-5.709	
		7115	-14.599	-15.889		3.290	-8.896	
802.11ax-HE40	5	5965	-11.552	-12.072	N/A	3.920	-4.874	
		6165	-11.801	-12.161		3.920	-5.047	
		6405	-11.028	-11.246		3.860	-4.265	
	6	6445	-10.825	-11.326		3.860	-4.198	
		6485	-10.902	-11.699		3.860	-4.412	
	7	6525	-11.153	-11.727		3.860	-4.560	
		6685	-12.155	-12.742		3.860	-5.568	
		6845	-12.163	-13.027		3.290	-6.273	
	8	6885	-12.191	-12.322		3.290	-5.956	
		7005	-11.328	-12.081		3.290	-5.388	
		7085	-11.468	-12.282		3.290	-5.556	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{4.3/10} + 10^{3.5/10})/2] = 3.92\text{dBi}$

6525MHz: Directional gain = $10 \log[(10^{4.2/10} + 10^{3.5/10})/2] = 3.86\text{dBi}$

7125MHz: Directional gain = $10 \log[(10^{4.1/10} + 10^{2.3/10})/2] = 3.29\text{dBi}$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming

and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE80	5	5985	-11.618	-11.351	N/A	3.920	-4.552	-1
		6145	-11.642	-11.762		3.920	-4.771	
		6385	-10.961	-11.411		3.860	-4.310	
	6	6465	-10.845	-11.464		3.860	-4.273	
		6545	-10.918	-11.537		3.860	-4.346	
		6625	-11.482	-12.417		3.860	-5.054	
	7	6705	-11.955	-12.787		3.860	-5.481	
		6785	-12.030	-12.675		3.860	-5.470	
		6865	-12.103	-12.803		3.290	-6.139	
	8	6945	-11.865	-12.291		3.290	-5.772	
		7025	-11.576	-11.656		3.290	-5.316	
802.11ax-HE160	5	6025	-11.776	-11.635	N/A	3.920	-4.775	
		6185	-11.606	-11.712		3.920	-4.728	
		6345	-11.146	-11.520		3.860	-4.459	
	6	6505	-11.228	-11.455		3.860	-4.470	
		6665	-12.135	-12.322		3.860	-5.357	
		6825	-12.102	-12.267		3.290	-5.883	
	8	6985	-11.744	-11.906		3.290	-5.524	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{4.3/10} + 10^{3.5/10})/2] = 3.92\text{dBi}$

6525MHz: Directional gain = $10 \log[(10^{4.2/10} + 10^{3.5/10})/2] = 3.86\text{dBi}$

7125MHz: Directional gain = $10 \log[(10^{4.1/10} + 10^{2.3/10})/2] = 3.29\text{dBi}$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● **Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE20	5	5955	-11.357	-12.691	N/A	3.920	-5.043	-1
		6175	-13.336	-12.825		3.920	-6.143	
		6415	-12.084	-12.264		2.480	-6.683	
	6	6435	-11.762	-12.257		2.480	-6.512	
		6475	-11.443	-12.334		2.480	-6.375	
		6515	-11.619	-12.113		2.480	-6.369	
	7	6535	-12.241	-13.052		2.480	-7.137	
		6695	-12.161	-13.616		2.480	-7.338	
		6855	-12.196	-13.667		-2.990	-12.849	
	8	6875	-12.103	-13.655		-2.990	-12.790	
		6995	-11.252	-12.928		-2.990	-11.989	
		7115	-14.599	-15.889		-2.990	-15.176	
802.11ax-HE40	5	5965	-11.552	-12.072		3.920	-4.874	
		6165	-11.801	-12.161		3.920	-5.047	
		6405	-11.028	-11.246		2.480	-5.645	
	6	6445	-10.825	-11.326		2.480	-5.578	
		6485	-10.902	-11.699		2.480	-5.792	
	7	6525	-11.153	-11.727		2.480	-5.940	
		6685	-12.155	-12.742		2.480	-6.948	
		6845	-12.163	-13.027		-2.990	-12.553	
	8	6885	-12.191	-12.322		-2.990	-12.236	
		7005	-11.328	-12.081		-2.990	-11.668	
		7085	-11.468	-12.282		-2.990	-11.836	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then
Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{4.7/10} + 10^{2.9/10})/2]$ = 3.92dBi

6525MHz: Directional gain = $10 \log[(10^{1.3/10} + 10^{3.4/10})/2]$ = 2.48dBi

7125MHz: Directional gain = $10 \log[(10^{-1.6/10} + 10^{-4.9/10})/2]$ = -2.99dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE80	5	5985	-11.618	-11.351	N/A	3.920	-4.552	-1
		6145	-11.642	-11.762		3.920	-4.771	
		6385	-10.961	-11.411		2.480	-5.690	
	6	6465	-10.845	-11.464		2.480	-5.653	
		6545	-10.918	-11.537		2.480	-5.726	
		6625	-11.482	-12.417		2.480	-6.434	
	7	6705	-11.955	-12.787		2.480	-6.861	
		6785	-12.030	-12.675		2.480	-6.850	
		6865	-12.103	-12.803		-2.990	-12.419	
	8	6945	-11.865	-12.291		-2.990	-12.052	
		7025	-11.576	-11.656		-2.990	-11.596	
802.11ax-HE160	5	6025	-11.776	-11.635	N/A	3.920	-4.775	
		6185	-11.606	-11.712		3.920	-4.728	
		6345	-11.146	-11.520		2.480	-5.839	
	6	6505	-11.228	-11.455		2.480	-5.850	
		6665	-12.135	-12.322		2.480	-6.737	
		6825	-12.102	-12.267		-2.990	-12.163	
	8	6985	-11.744	-11.906		-2.990	-11.804	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{4.7/10} + 10^{2.9/10})/2] = 3.92\text{dBi}$

6525MHz: Directional gain = $10 \log[(10^{1.3/10} + 10^{3.4/10})/2] = 2.48\text{dBi}$

7125MHz: Directional gain = $10 \log[(10^{-1.6/10} + 10^{-4.9/10})/2] = -2.99\text{dBi}$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

- OFDMA Modulation
- Test SKU: SKU #1 (With INPAQ ANT)

Tones	RU Index	Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) Note3	Total Power Spectral Density (dBm/1MHz) Note 2	Limit (dBm/MHz)
					AUX	Main				
26T	18	802.11ax-HE80	5	5985	-10.849	-10.413	0.278	3.92	-3.417	-1
52T	44	802.11ax-HE80	5	5985	-9.471	-9.094	0.146	3.92	-2.202	
106T	56	802.11ax-HE80	5	5985	-9.315	-9.014	N/A	3.92	-2.232	
242T	62	802.11ax-HE80	5	5985	-9.717	-11.702	0.150	3.92	-3.517	
484T	65	802.11ax-HE40	5	5965	-10.003	-10.121	N/A	3.92	-3.131	
996T	67	802.11ax-HE160	5	6345	-9.332	-10.153	0.159	3.86	-2.694	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then
Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{4.3/10} + 10^{3.5/10})/2] = 3.92$ dBi

6525MHz: Directional gain = $10 \log[(10^{4.2/10} + 10^{3.5/10})/2] = 3.86$ dBi

7125MHz: Directional gain = $10 \log[(10^{4.1/10} + 10^{2.3/10})/2] = 3.29$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

- Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Tones	RU Index	Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) Note3	Total Power Spectral Density (dBm/1MHz) Note 2	Limit (dBm/MHz)
					AUX	Main				
26T	18	802.11ax-HE80	5	5985	-10.849	-10.413	0.278	3.92	-3.417	-1
52T	44	802.11ax-HE80	5	5985	-9.471	-9.094	0.146	3.92	-2.202	
106T	56	802.11ax-HE80	5	5985	-9.315	-9.014	N/A	3.92	-2.232	
242T	62	802.11ax-HE80	5	5985	-9.717	-11.702	0.150	3.92	-3.517	
484T	65	802.11ax-HE40	5	5965	-10.003	-10.121	N/A	3.92	-3.131	
996T	67	802.11ax-HE160	5	6345	-9.332	-10.153	0.159	2.48	-4.074	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then
Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{4.7/10} + 10^{2.9/10})/2] = 3.92$ dBi

6525MHz: Directional gain = $10 \log[(10^{1.3/10} + 10^{3.4/10})/2] = 2.48$ dBi

7125MHz: Directional gain = $10 \log[(10^{-1.6/10} + 10^{-4.9/10})/2] = -2.99$ dBi


The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.3.2 Measurement Plots

● OFDM Modulation

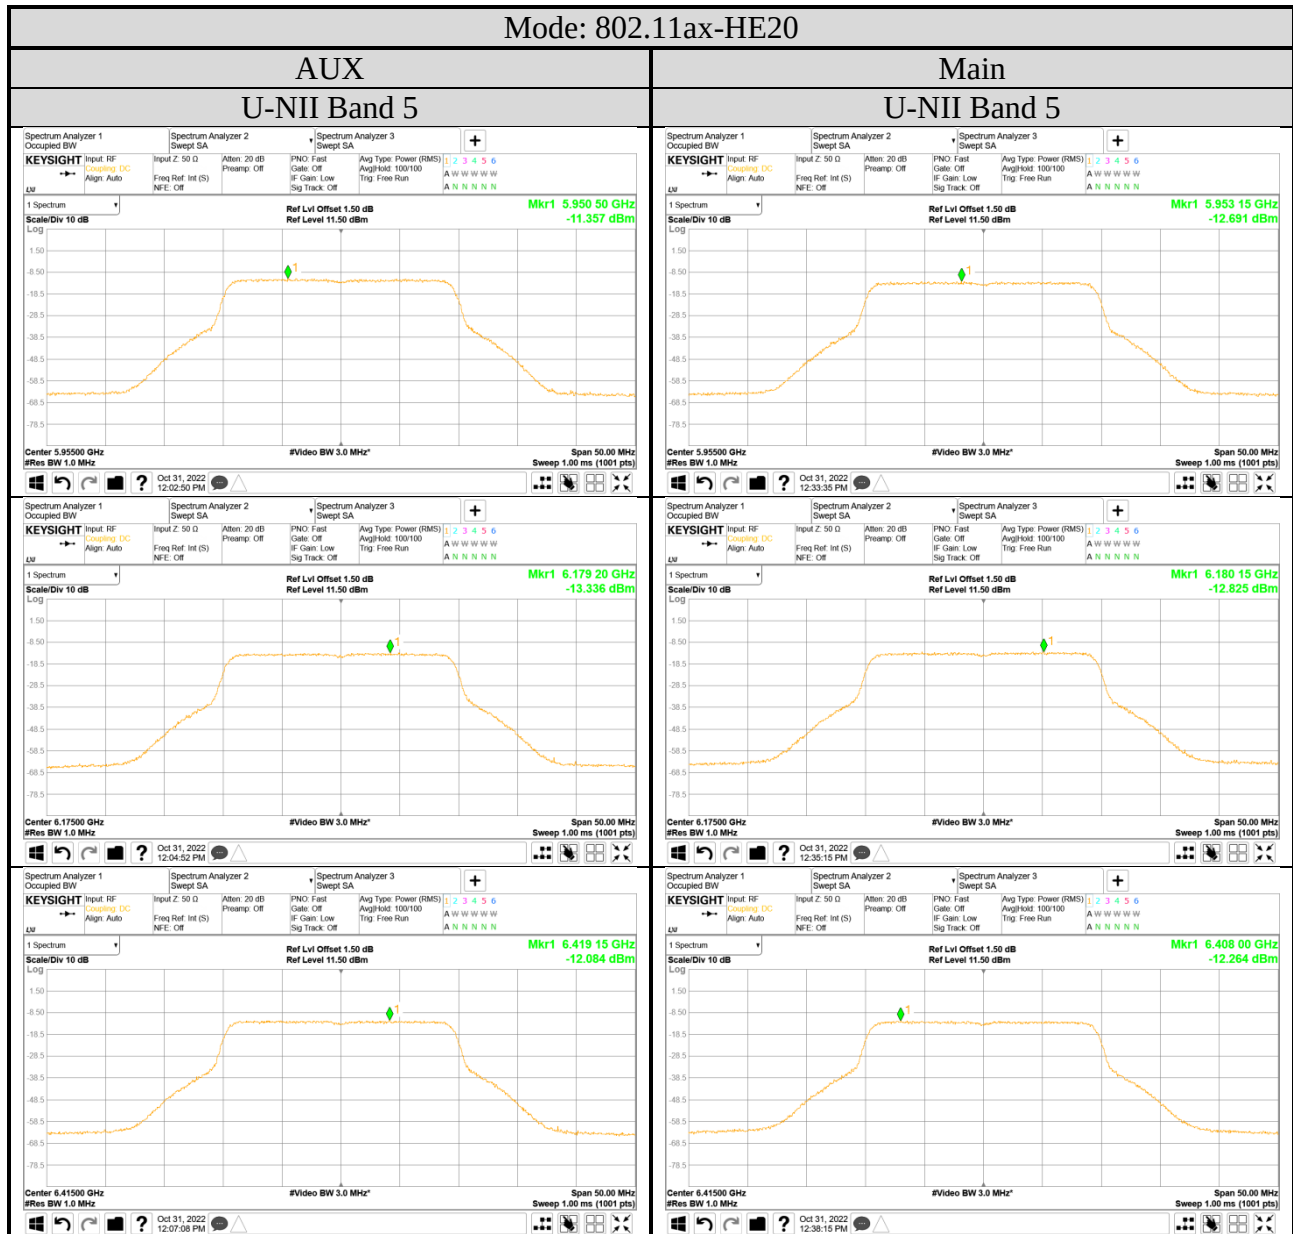


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

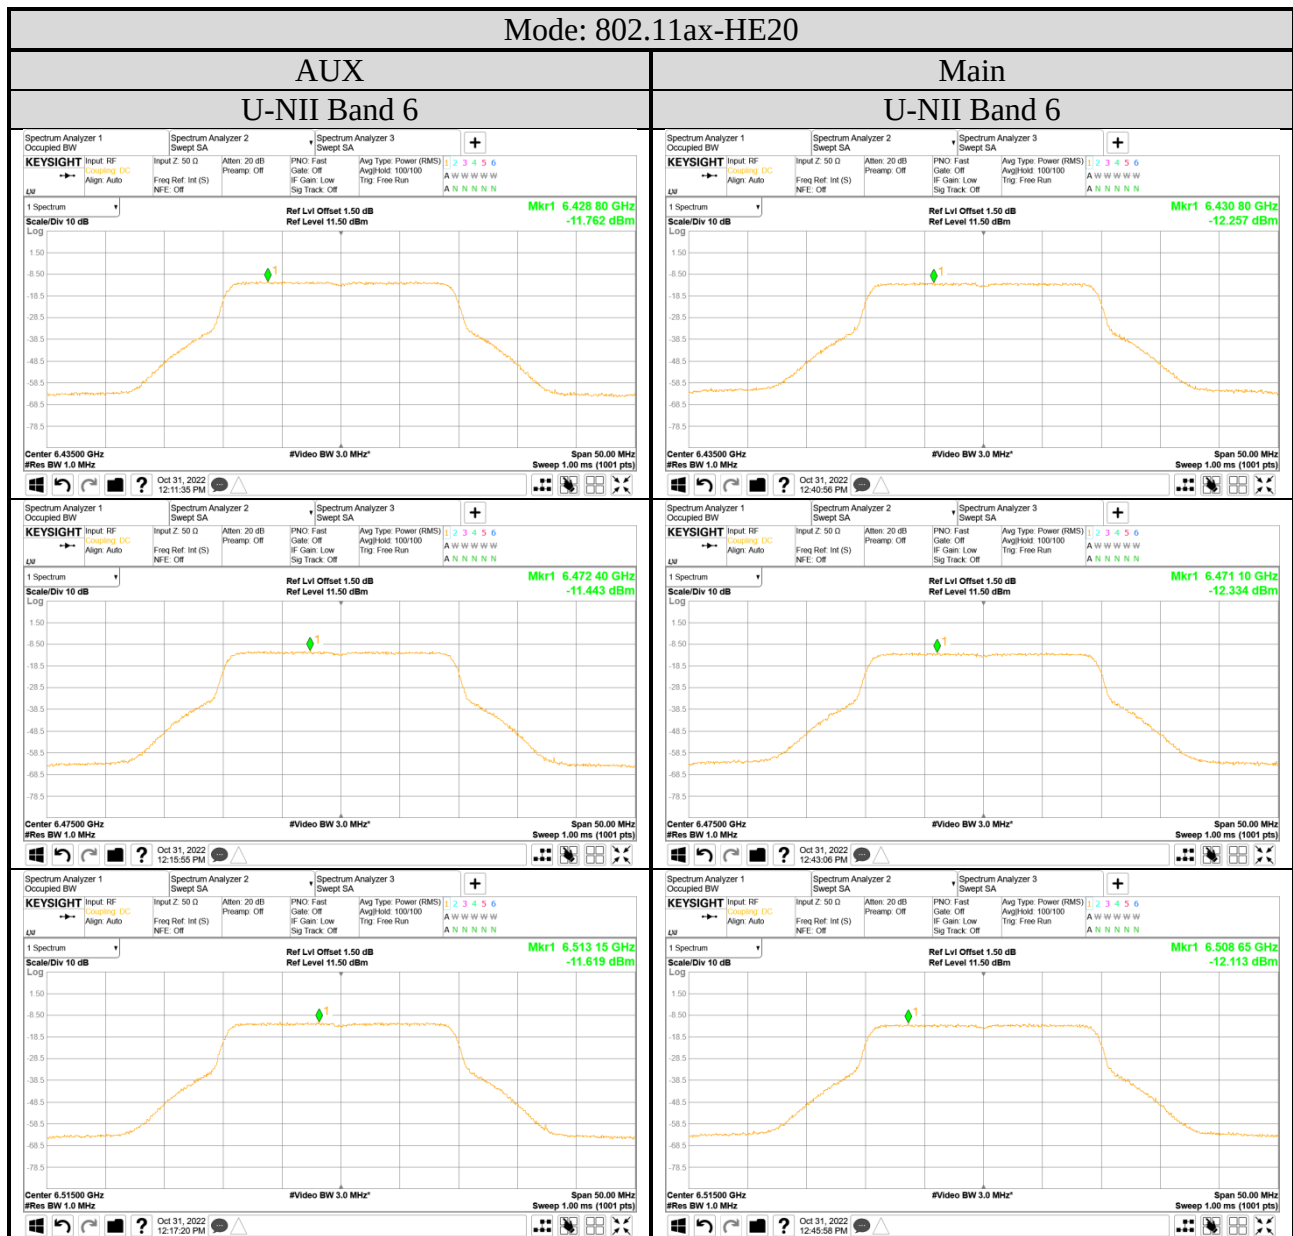


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

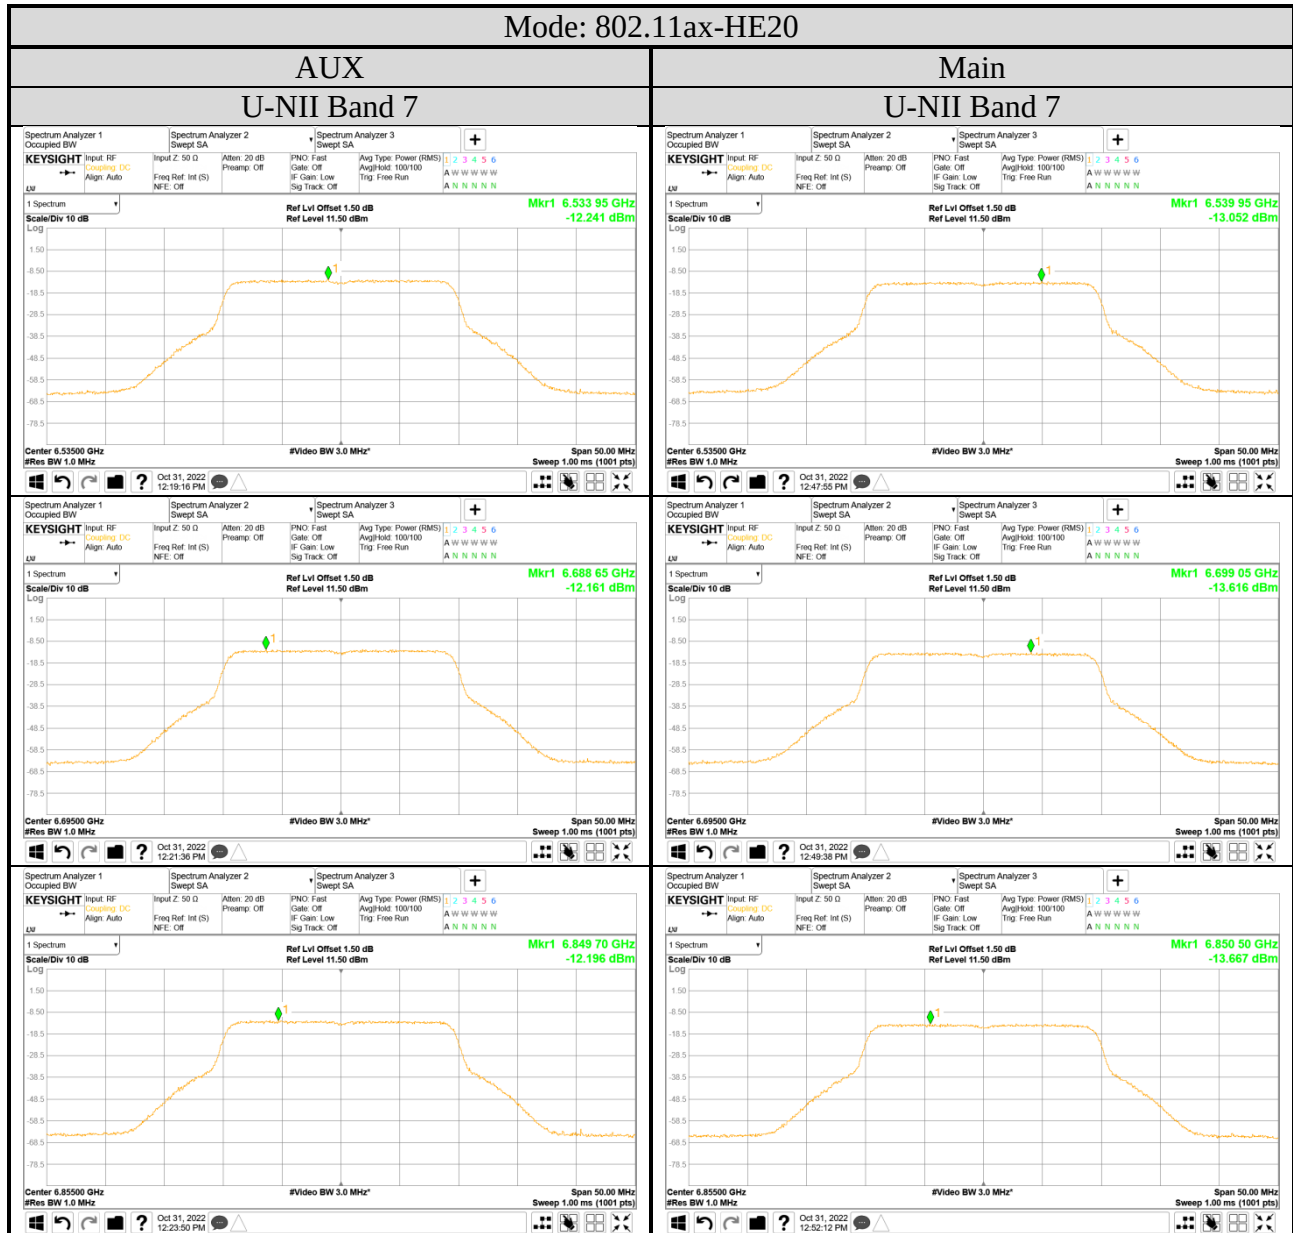


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

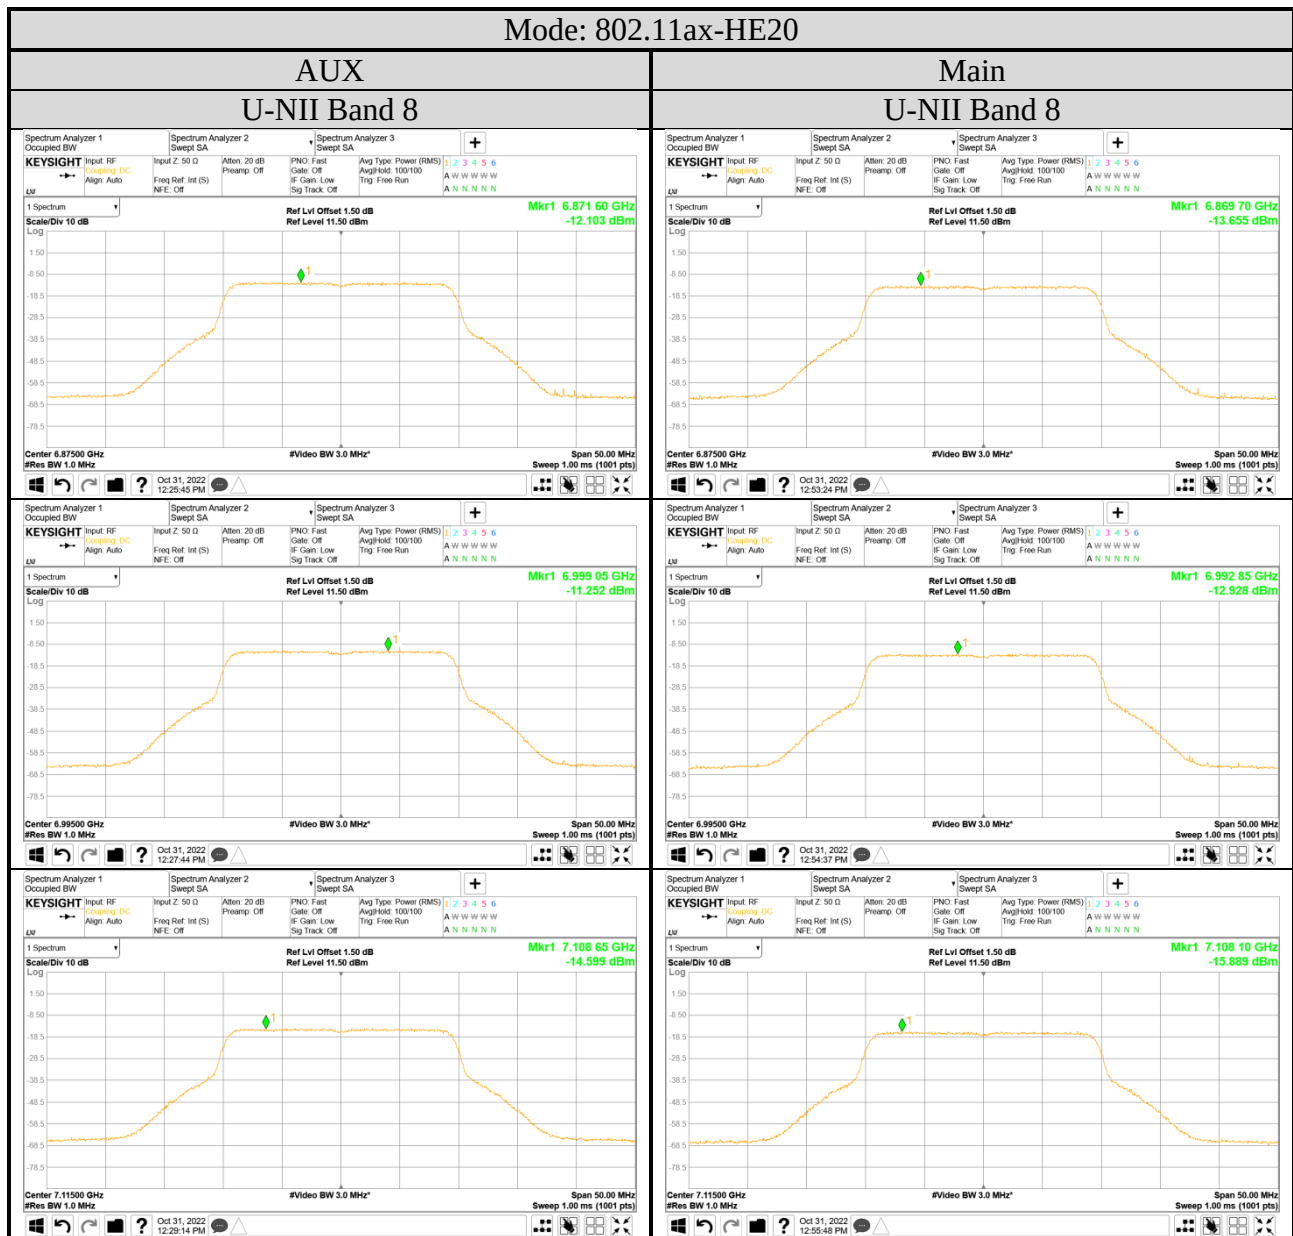


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

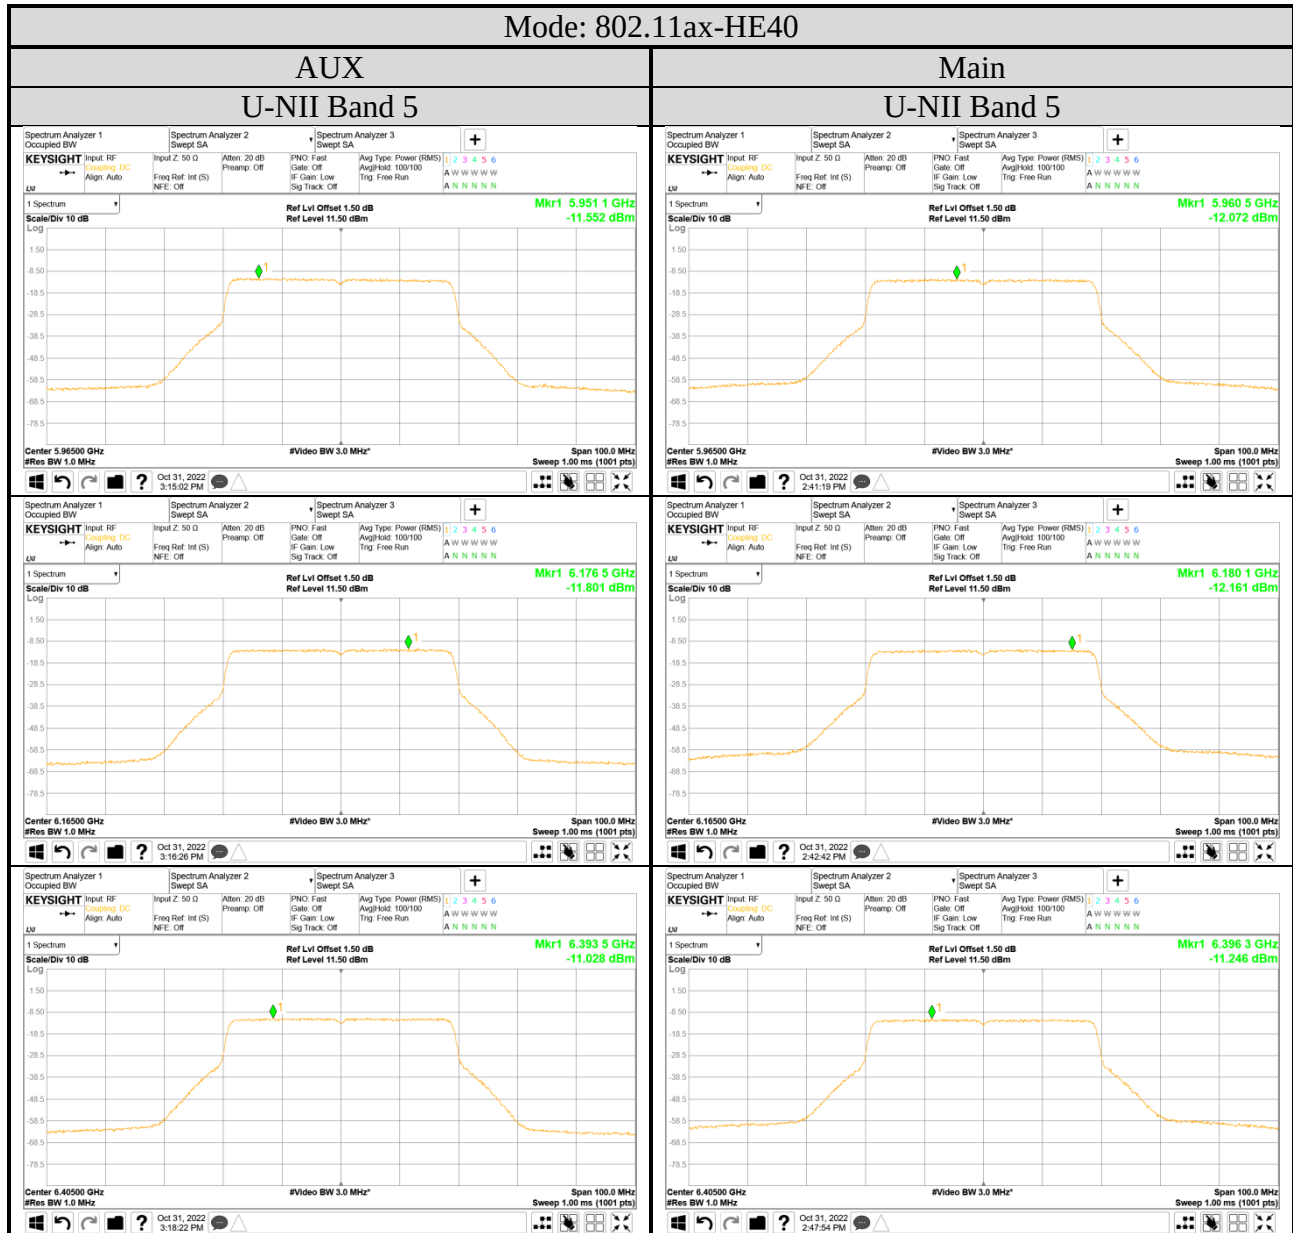


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

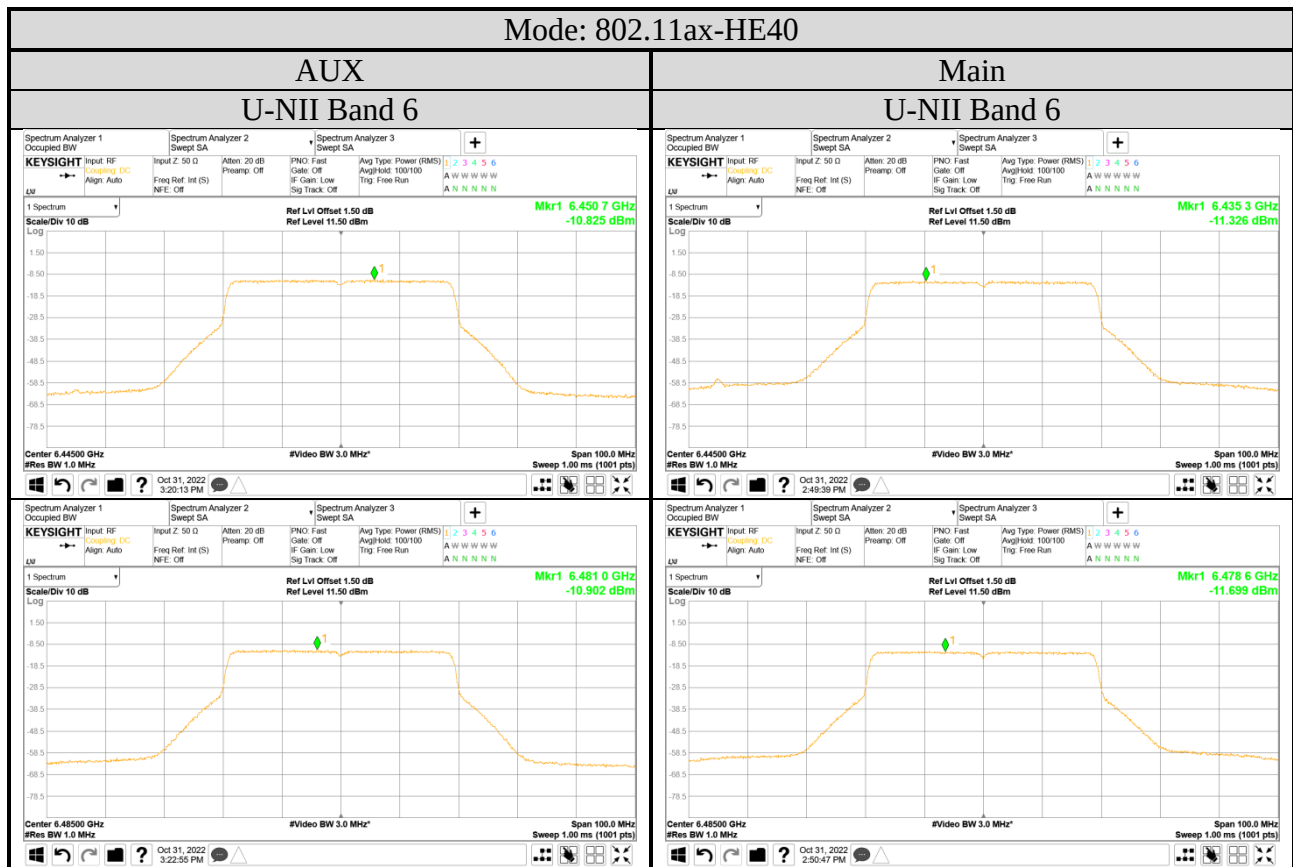


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

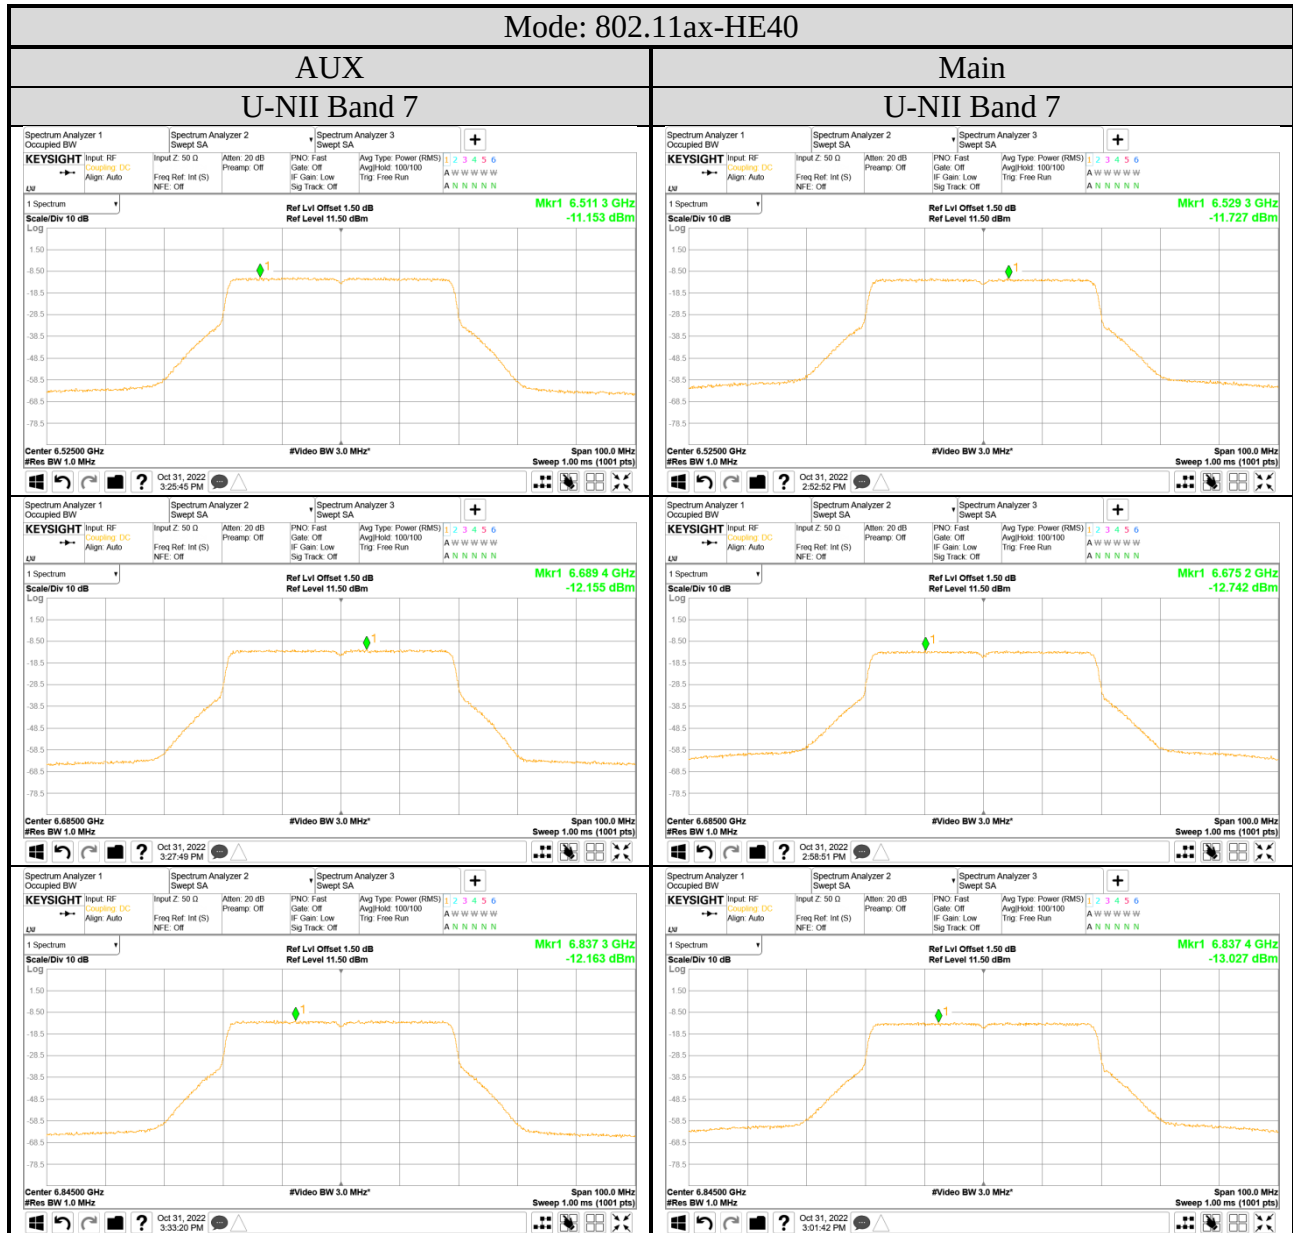


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

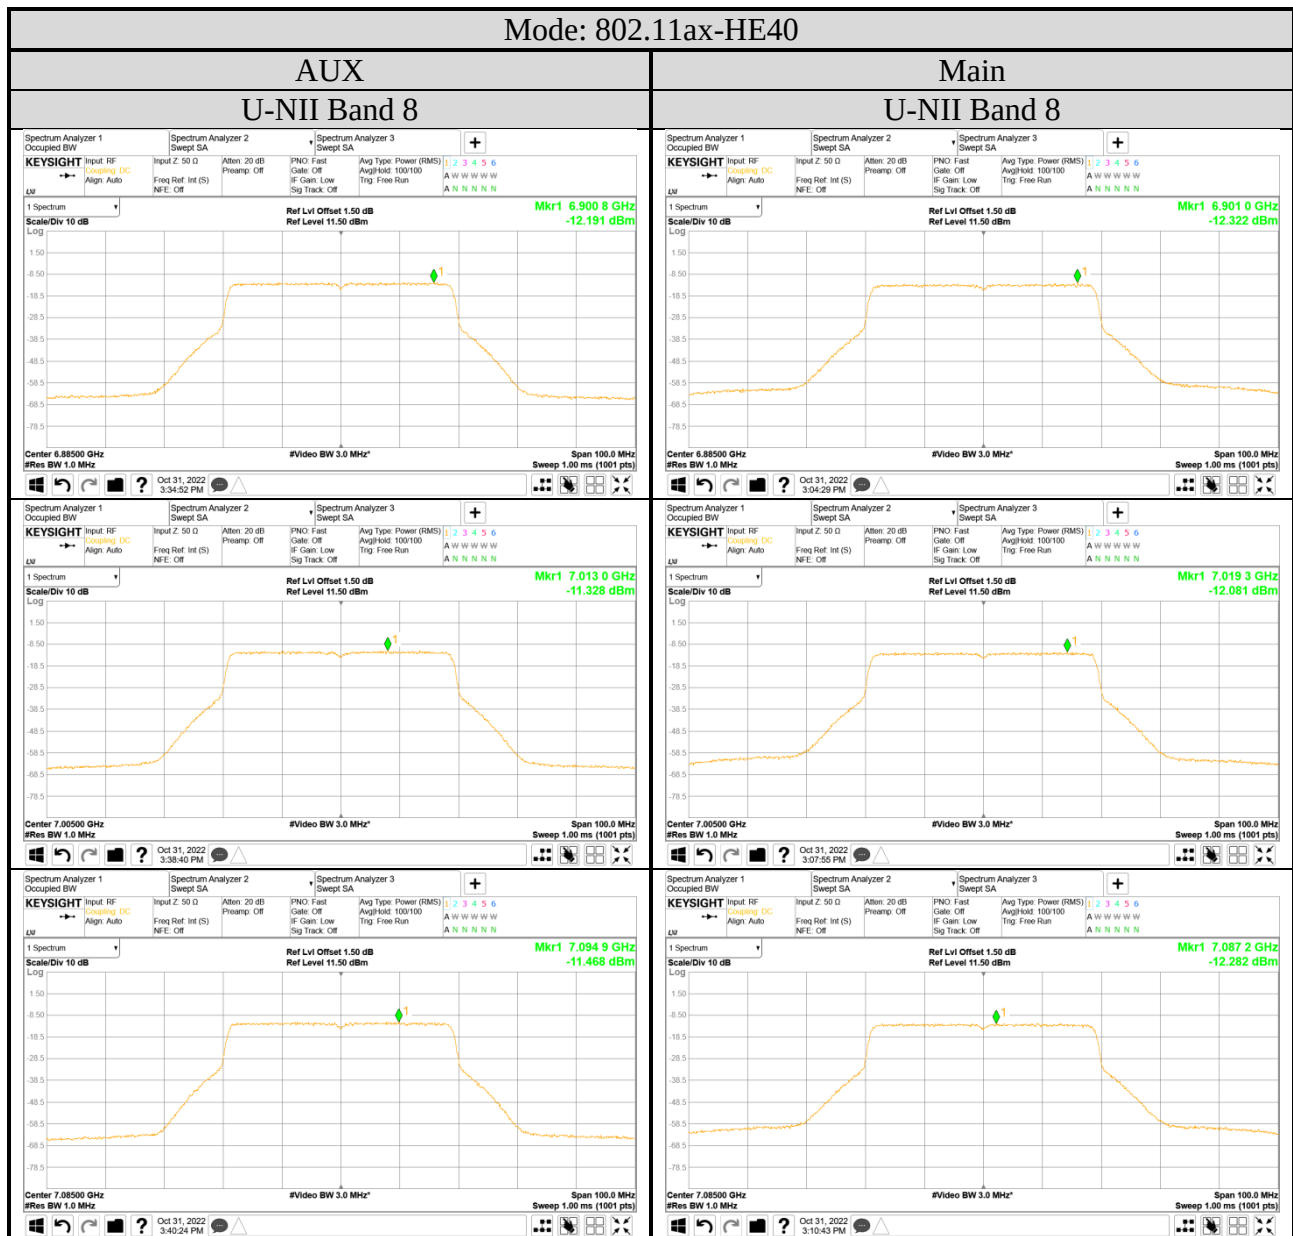


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

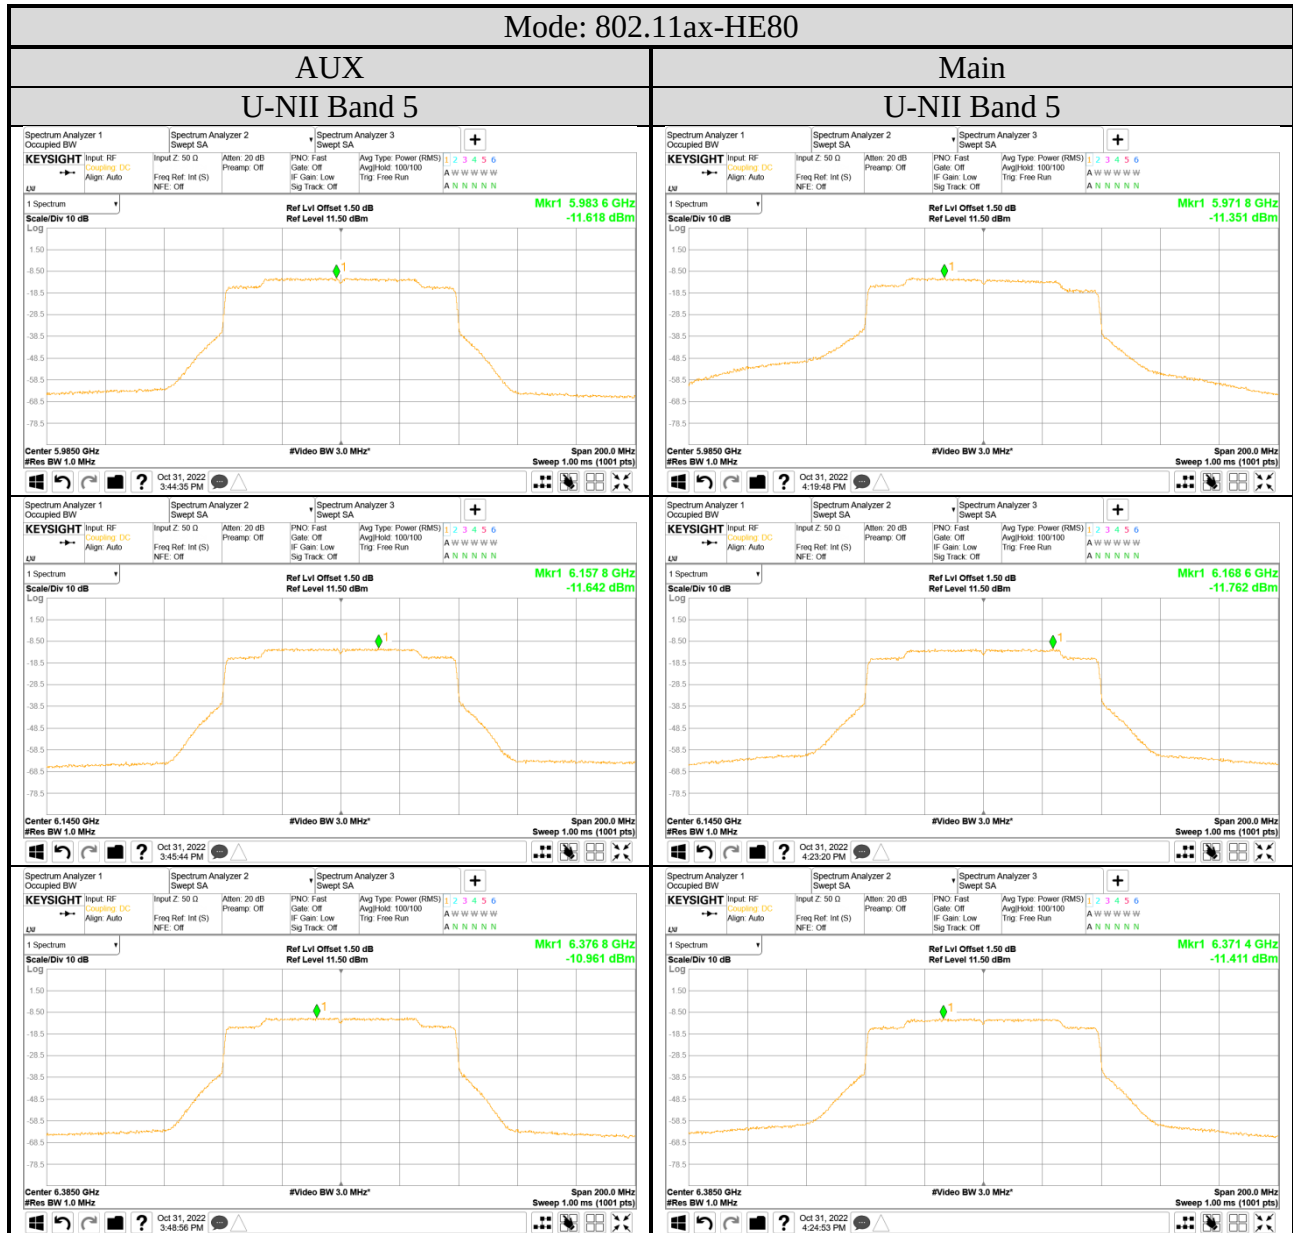


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

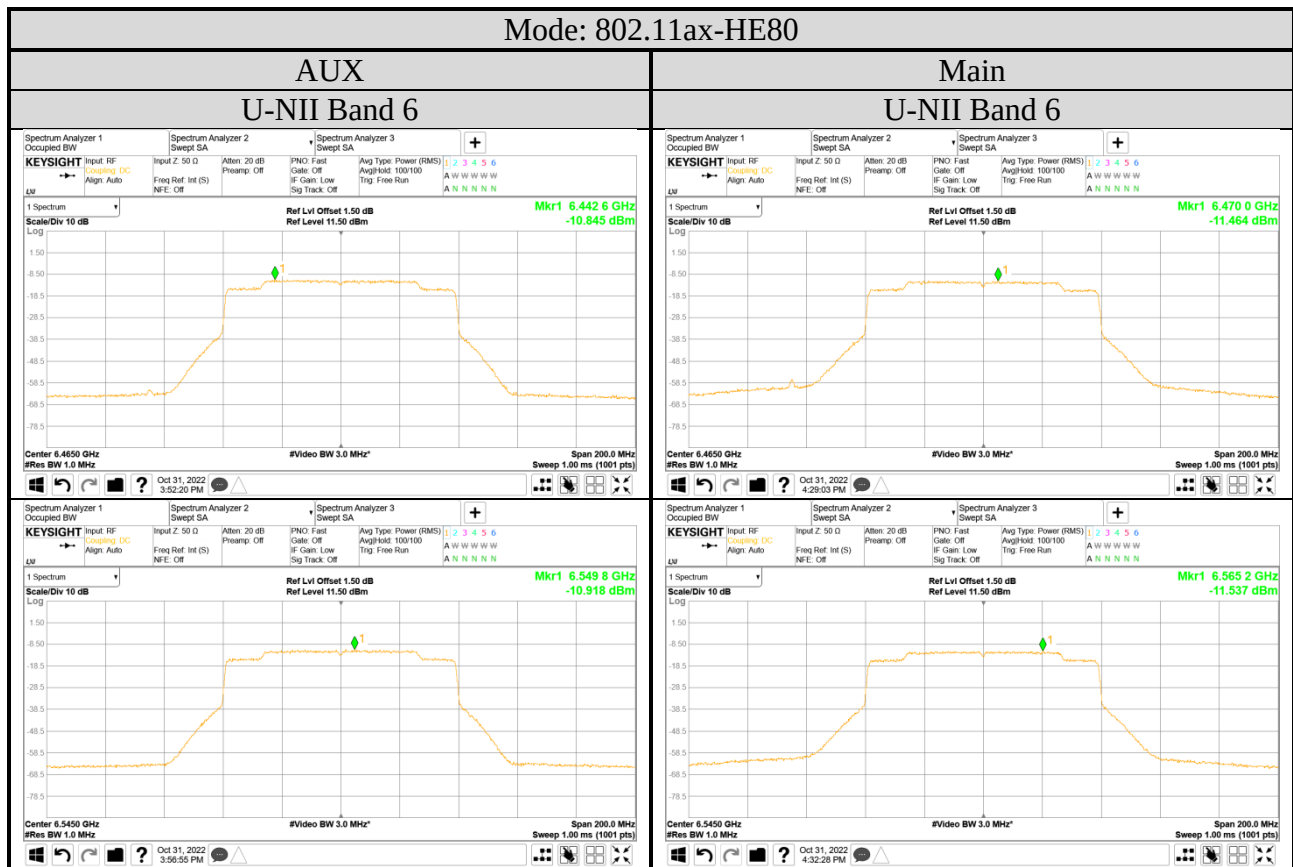


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

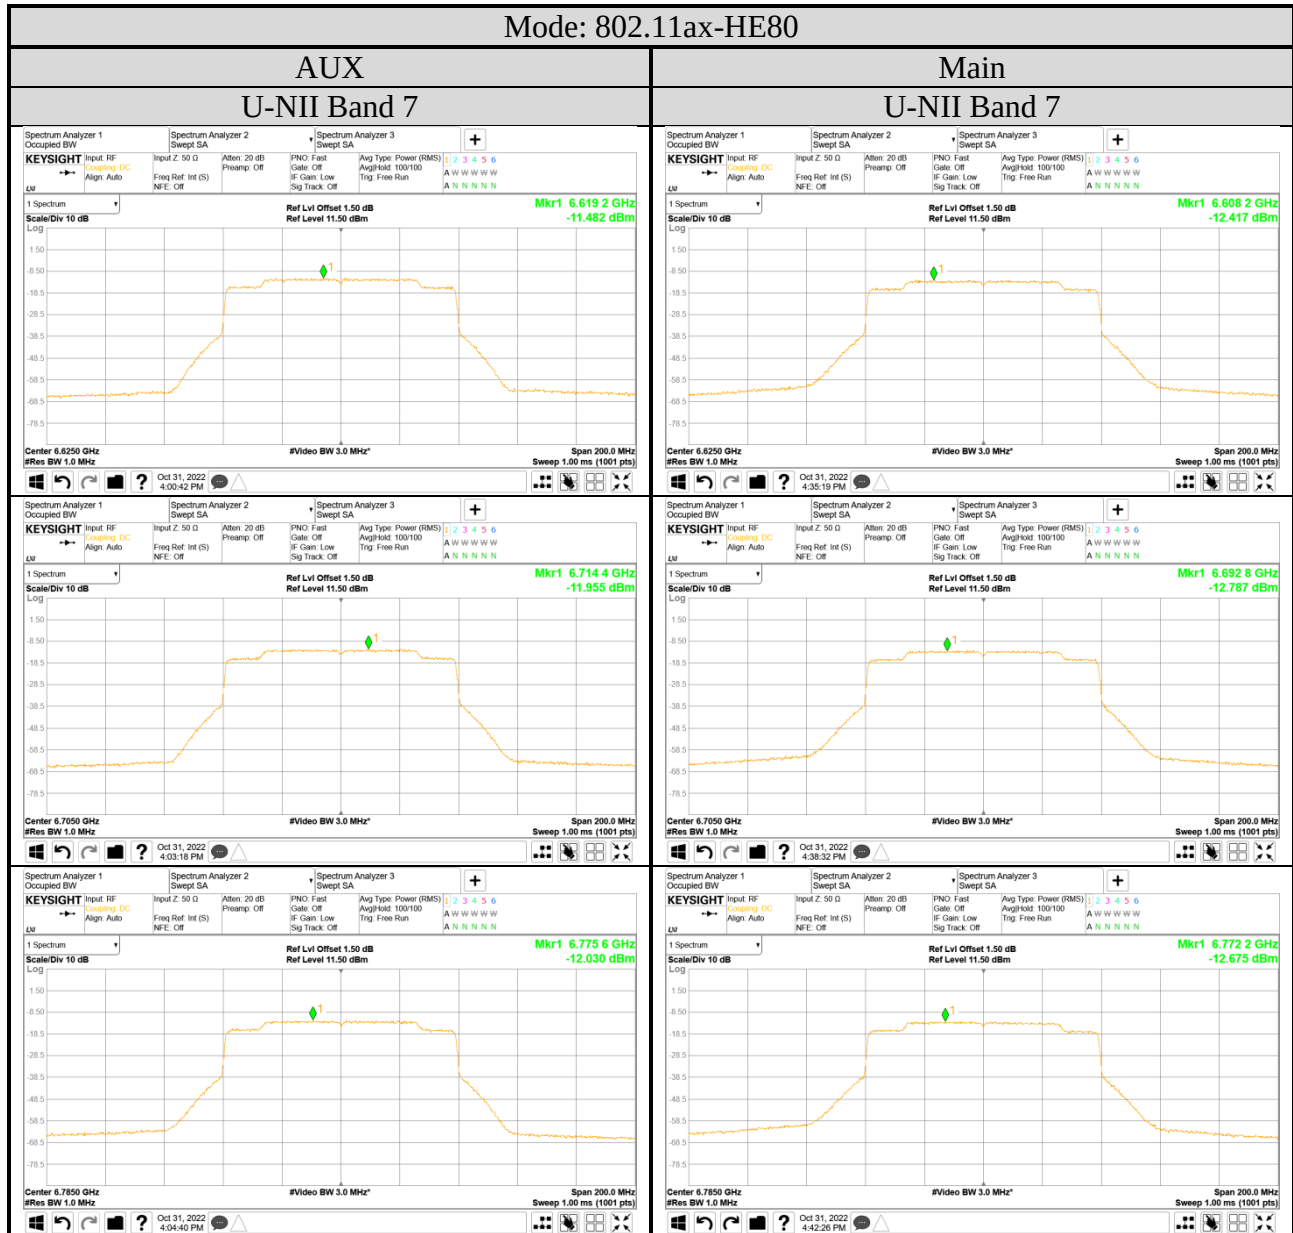



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

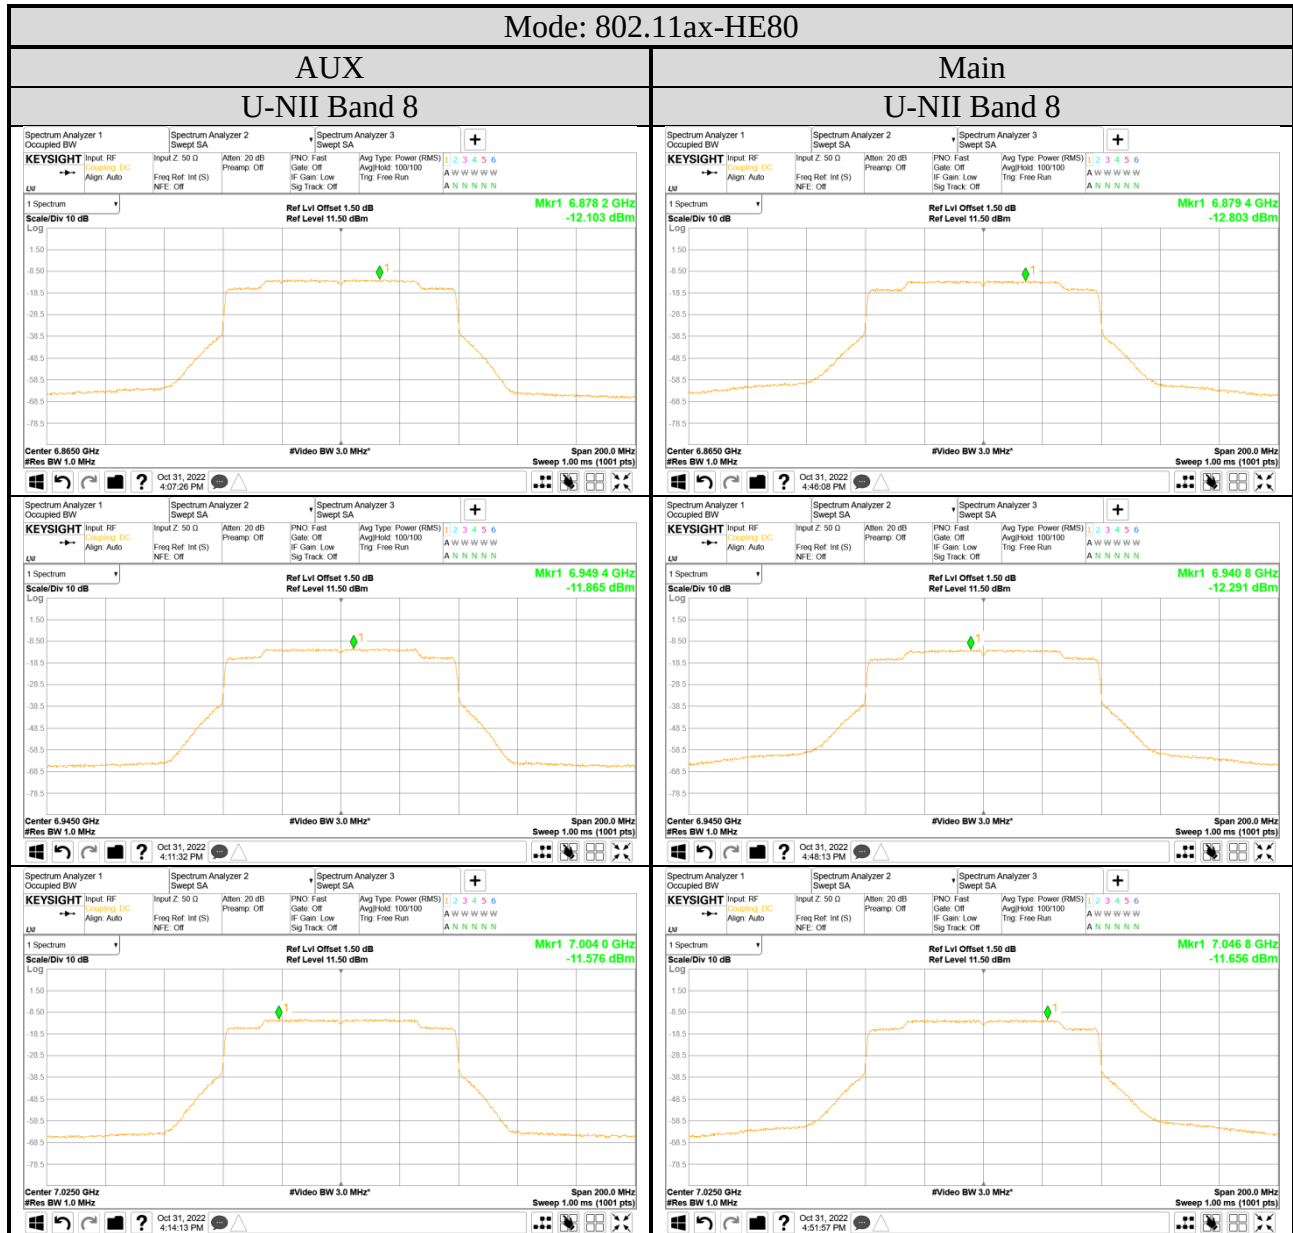

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

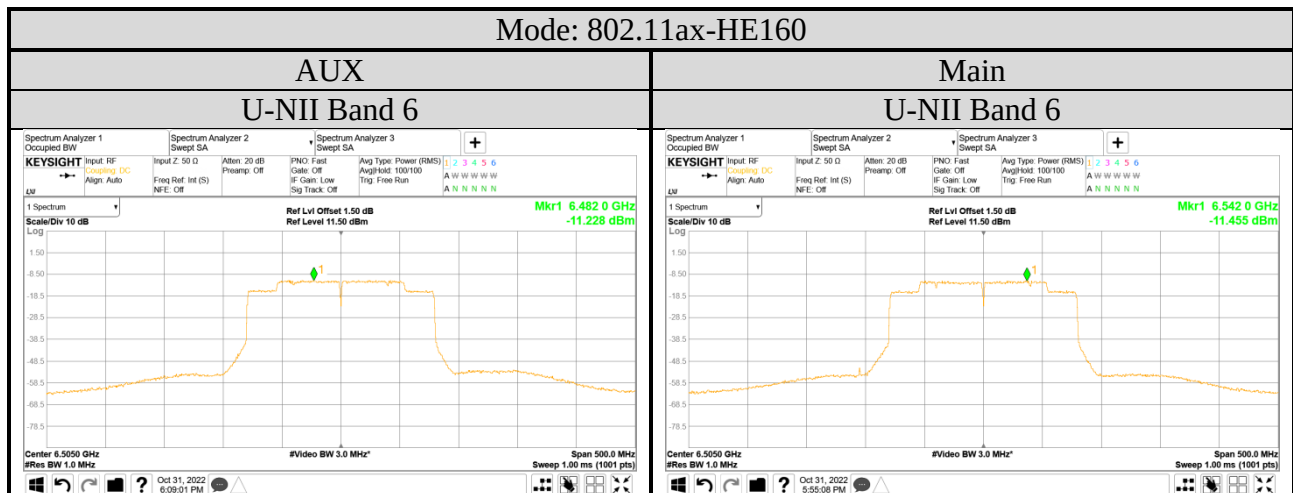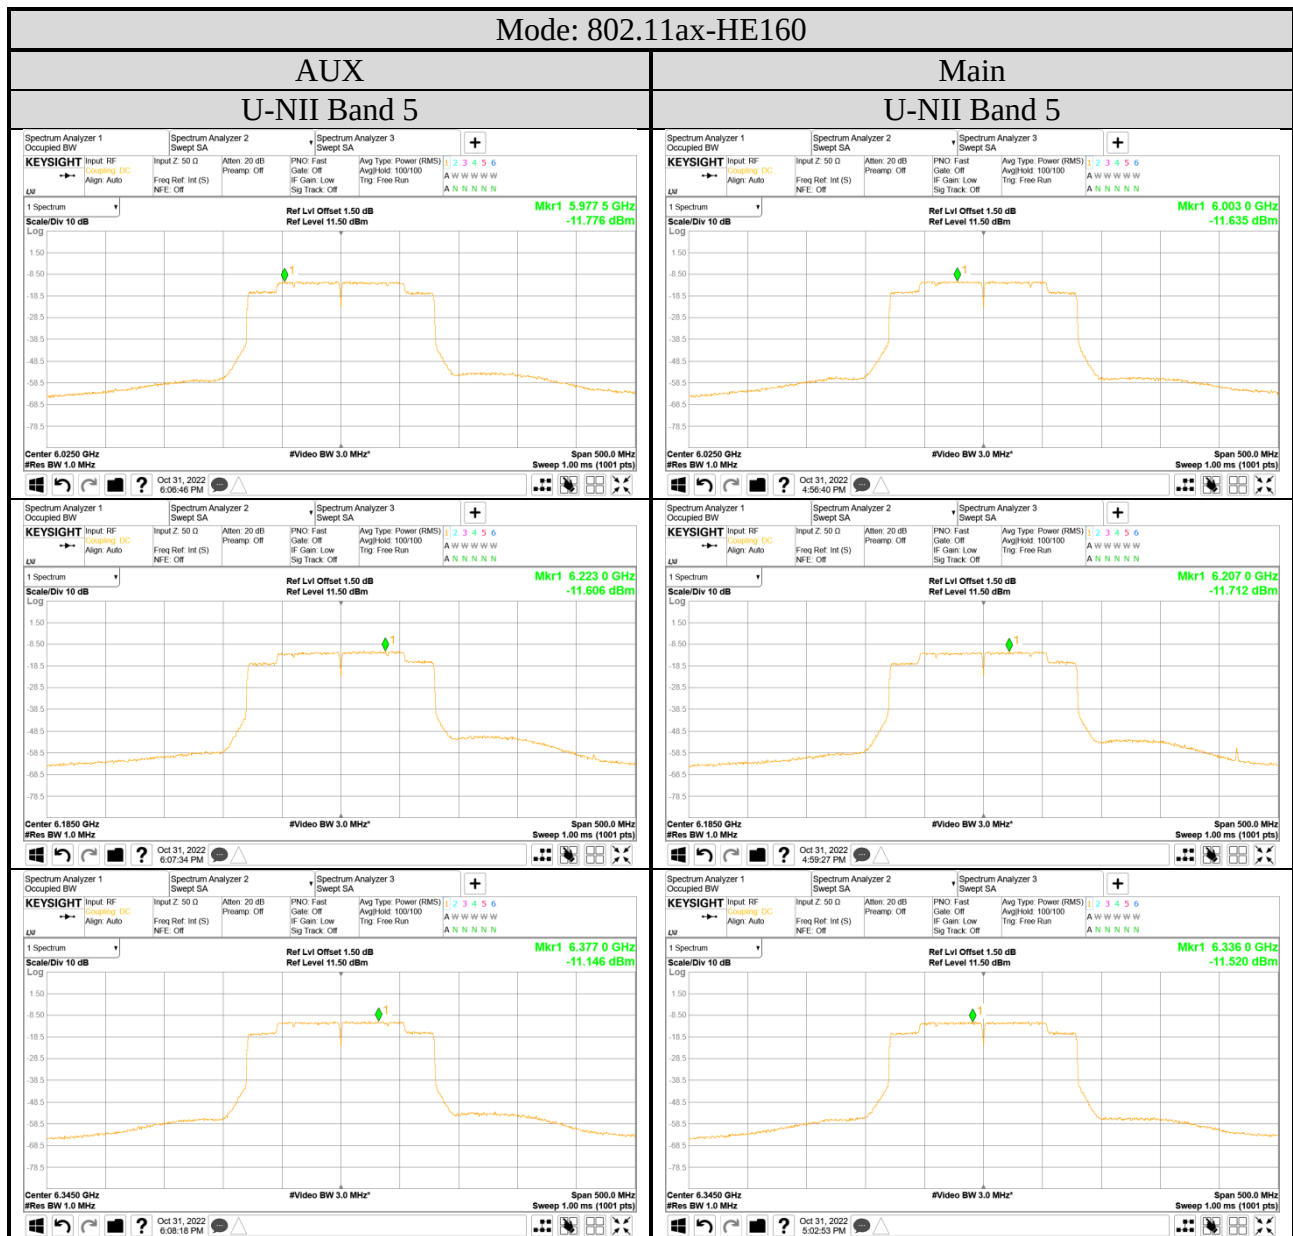



File Number: C1M2210141

Report Number: EM-F220738

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

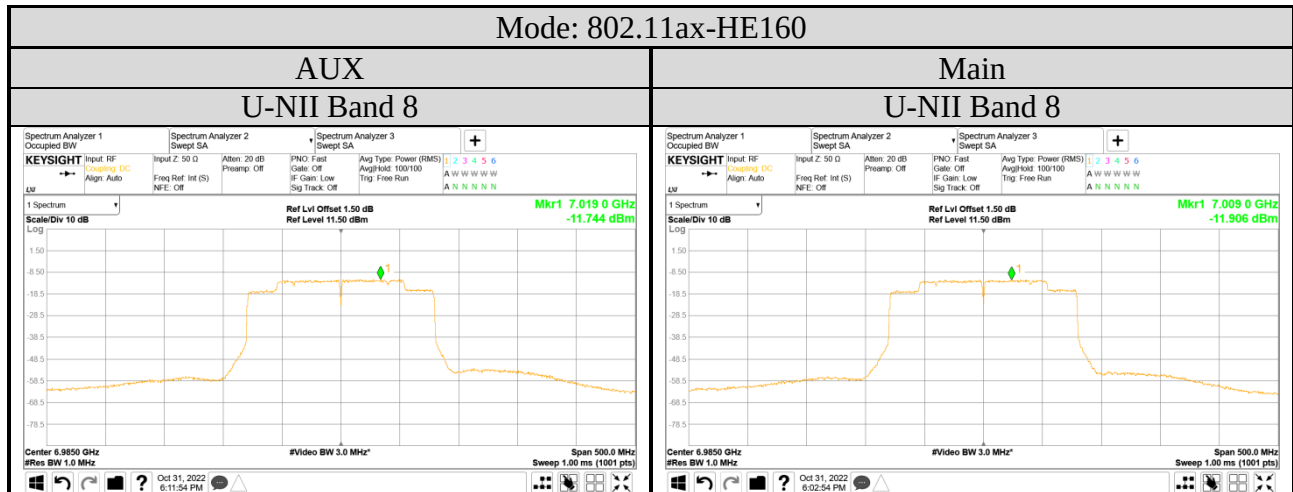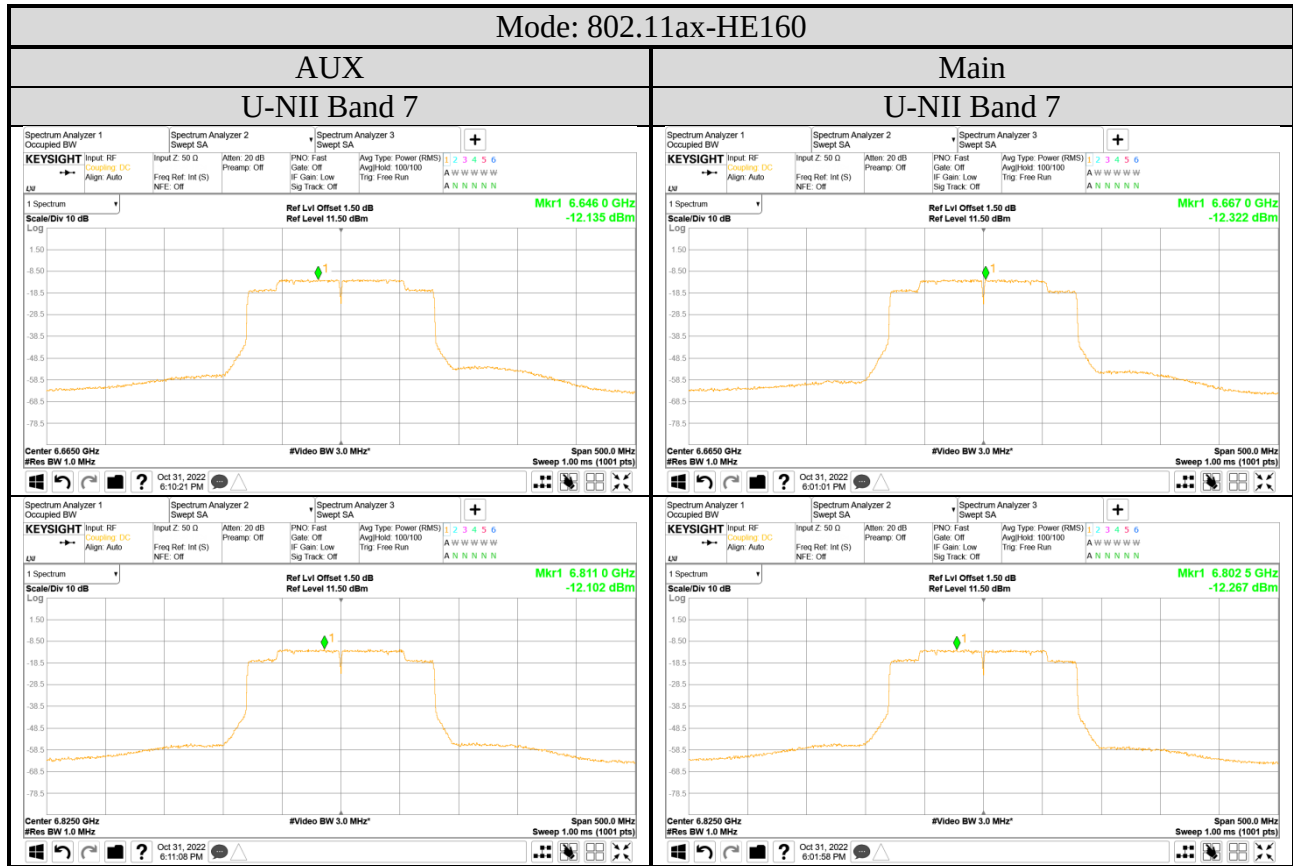

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● OFDMA Modulation

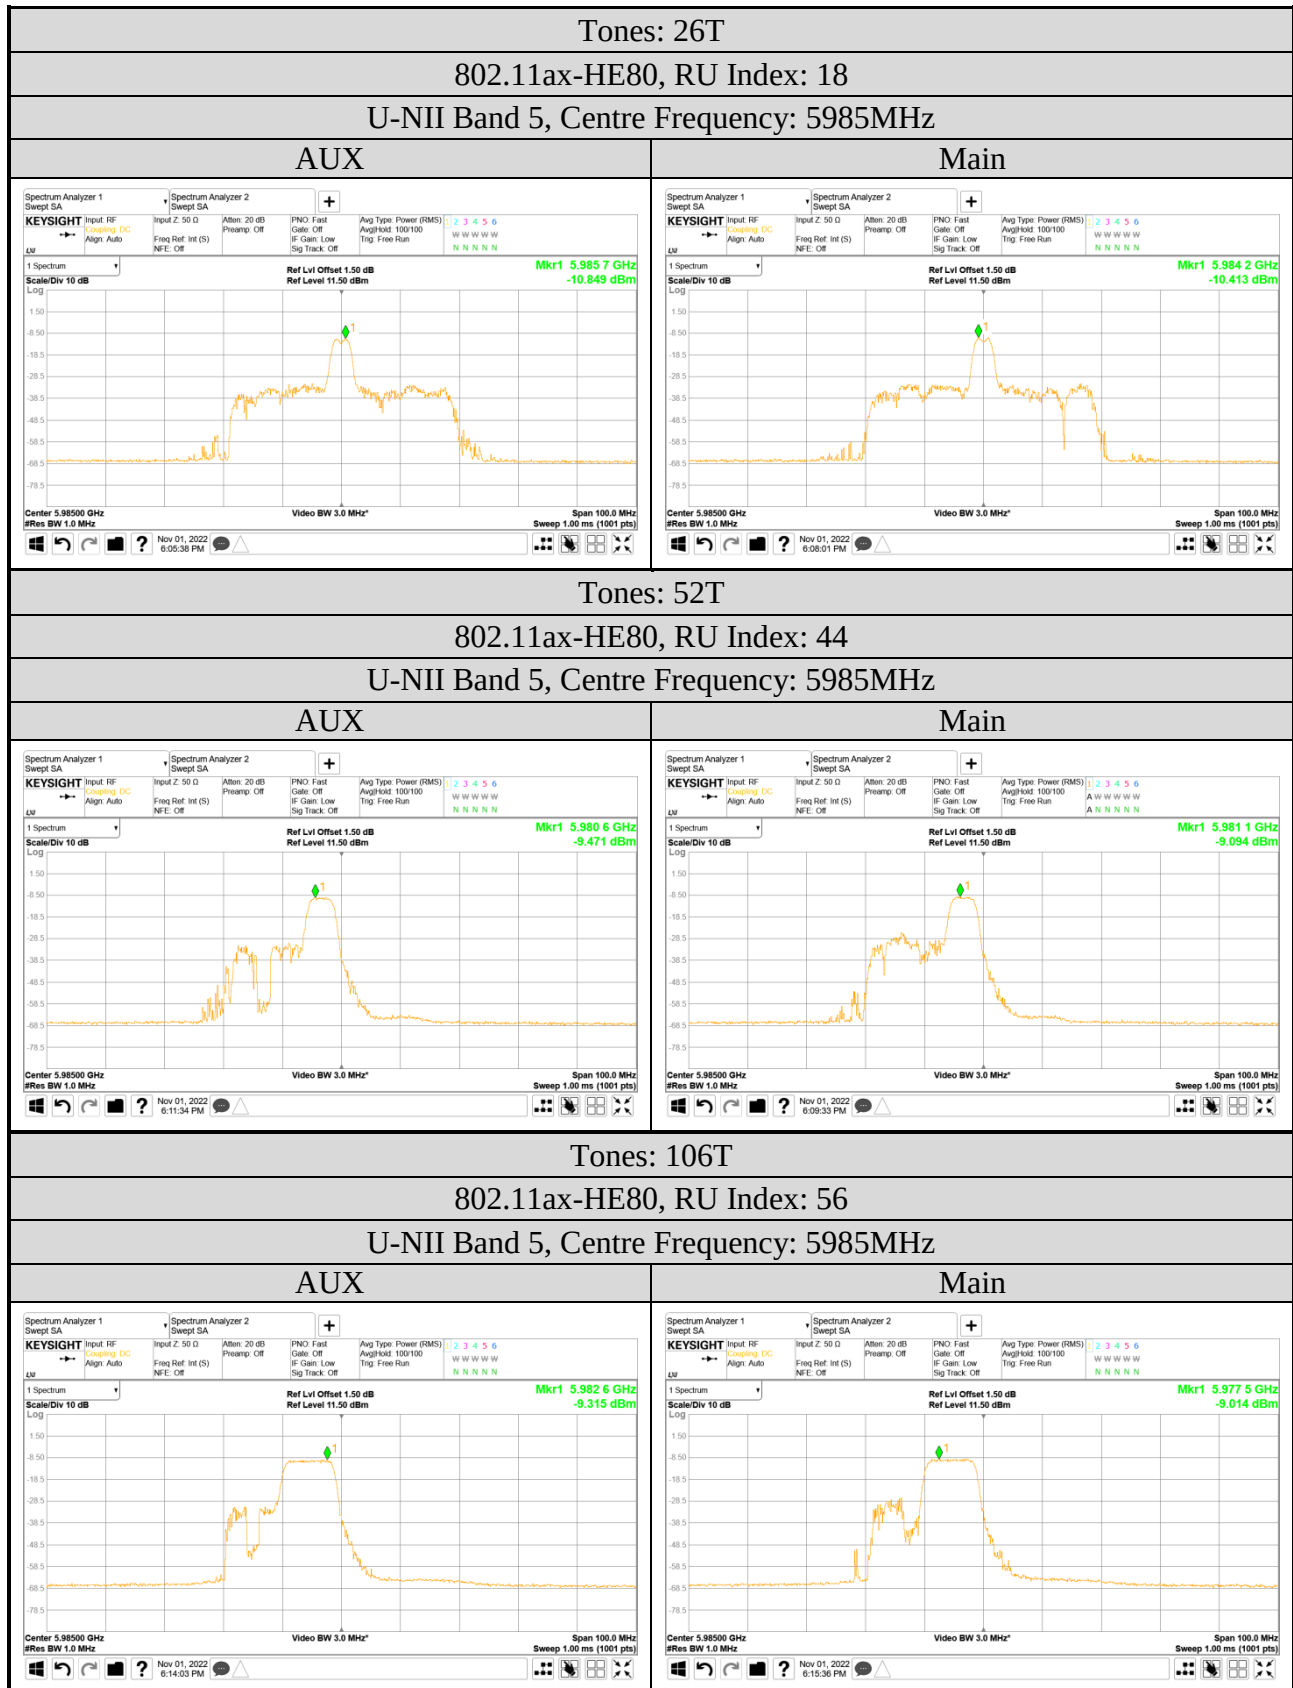

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

