

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3 MAXIMUM POWER SPECTRAL DENSITY

Test Date	2024/08/27 ~ 09/12	Temp./Hum.	24℃/47 ~ 53%
Cable Loss	4.47dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Power Spectral Density Result

● OFDM Modulation

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE20	5	5955	-8.657	-10.142	N/A	3.45	-2.876	-1
		6175	-9.200	-10.139		3.45	-3.184	
		6415	-9.342	-8.999		3.45	-2.707	
	6	6435	-9.375	-9.363		3.45	-2.909	
		6475	-9.909	-9.808		3.45	-3.398	
		6515	-9.307	-8.893		3.45	-2.635	
	7	6535	-8.935	-9.470		3.45	-2.734	
		6695	-9.229	-9.462		3.45	-2.884	
		6855	-9.741	-8.882		3.45	-2.830	
	8	6875	-9.688	-9.170		3.45	-2.961	
		6995	-10.130	-8.836		3.45	-2.975	
		7115	-18.375	-16.754		3.45	-11.029	
802.11ax-HE40	5	5965	-8.301	-10.683	N/A	3.45	-2.870	-1
		6165	-8.801	-10.345		3.45	-3.044	
		6405	-8.282	-9.171		3.45	-2.243	
	6	6445	-8.521	-9.119		3.45	-2.349	
		6485	-8.794	-9.477		3.45	-2.662	
		6525	-8.371	-9.304		3.45	-2.352	
	7	6685	-8.482	-8.960		3.45	-2.254	
		6845	-8.684	-8.771		3.45	-2.267	
		6885	-8.698	-9.492		3.45	-2.617	
	8	7005	-8.624	-8.830		3.45	-2.265	
		7085	-8.722	-8.939		3.45	-2.369	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.6/10} + 10^{3.3/10})/2] = 3.45$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE80	5	5985	-8.679	-10.620	N/A	3.45	-3.082	-1
		6145	-9.241	-10.577		3.45	-3.398	
		6385	-9.005	-10.054		3.45	-3.038	
	6	6465	-9.006	-10.131		3.45	-3.072	
		6545	-8.826	-9.893		3.45	-2.867	
		6625	-8.610	-9.847		3.45	-2.724	
	7	6705	-8.811	-9.923		3.45	-2.871	
		6785	-8.952	-10.334		3.45	-3.128	
	8	6865	-9.319	-10.041		3.45	-3.205	
		6945	-9.251	-9.091		3.45	-2.710	
		7025	-9.207	-9.210		3.45	-2.748	
802.11ax-HE160	5	6025	-9.227	-10.610	N/A	3.45	-3.403	-1
		6185	-9.183	-11.176		3.45	-3.606	
		6345	-9.396	-10.902		3.45	-3.624	
	6	6505	-9.049	-10.693		3.45	-3.333	
		6665	-8.708	-10.151		3.45	-2.910	
		6825	-8.717	-10.084		3.45	-2.887	
	8	6985	-9.082	-9.964		3.45	-3.040	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.6/10} + 10^{3.3/10})/2] = 3.45$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11be-EHT20	5	5955	-8.407	-9.747	N/A	3.45	-2.565	-1
		6175	-9.522	-9.812		3.45	-3.204	
		6415	-9.399	-8.683		3.45	-2.566	
	6	6435	-9.252	-9.171		3.45	-2.751	
		6475	-9.981	-9.620		3.45	-3.336	
		6515	-9.199	-8.609		3.45	-2.434	
	7	6535	-9.078	-9.314		3.45	-2.734	
		6695	-9.360	-9.412		3.45	-2.926	
		6855	-9.840	-8.798		3.45	-2.828	
	8	6875	-9.729	-9.350		3.45	-3.075	
		6995	-10.105	-8.852		3.45	-2.973	
		7115	-17.150	-16.931		3.45	-10.579	
802.11be-EHT40	5	5965	-8.545	-10.426	N/A	3.45	-2.924	-1
		6165	-9.211	-10.397		3.45	-3.303	
		6405	-8.641	-9.183		3.45	-2.443	
	6	6445	-8.840	-9.624		3.45	-2.754	
		6485	-8.835	-9.621		3.45	-2.750	
	7	6525	-8.600	-9.379		3.45	-2.512	
		6685	-8.606	-9.353		3.45	-2.503	
		6845	-8.774	-9.295		3.45	-2.566	
	8	6885	-8.806	-9.550		3.45	-2.702	
		7005	-8.836	-9.129		3.45	-2.520	
		7085	-8.658	-9.016		3.45	-2.373	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.6/10} + 10^{3.3/10})/2] = 3.45$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11be-EHT80	5	5985	-8.419	-10.041	N/A	3.45	-2.694	-1
		6145	-8.840	-10.581		3.45	-3.164	
		6385	-8.619	-10.060		3.45	-2.820	
	6	6465	-9.157	-9.544		3.45	-2.886	
		6545	-8.665	-9.815		3.45	-2.742	
		6625	-8.383	-9.866		3.45	-2.601	
	7	6705	-8.654	-10.075		3.45	-2.846	
		6785	-8.812	-9.946		3.45	-2.882	
		6865	-9.091	-10.029		3.45	-3.074	
	8	6945	-8.893	-9.495		3.45	-2.723	
		7025	-8.952	-9.181		3.45	-2.605	
		7025	-8.952	-9.181		3.45	-2.605	
802.11be-EHT160	5	6025	-9.400	-10.723	N/A	3.45	-3.551	-1
		6185	-9.141	-11.081		3.45	-3.543	
		6345	-9.312	-10.646		3.45	-3.468	
	6	6505	-8.850	-10.406		3.45	-3.098	
		6665	-8.580	-10.050		3.45	-2.793	
		6825	-9.215	-10.095		3.45	-3.172	
	8	6985	-9.071	-9.782		3.45	-2.952	
		6985	-9.071	-9.782		3.45	-2.952	
802.11be-EHT320	5	6105	-8.903	-10.357	N/A	3.45	-3.109	-1
		6265	-8.899	-10.317		3.45	-3.090	
		6425	-8.989	-10.277		3.45	-3.125	
	6	6585	-8.223	-9.731		3.45	-2.452	
		6745	-8.560	-9.787		3.45	-2.670	
		6905	-9.790	-10.622		3.45	-3.726	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.6/10} + 10^{3.3/10})/2] = 3.45$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● OFDMA Modulation

Tones	RU Index	Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) Note3	Total Power Spectral Density (dBm/1MHz) Note2	Limit (dBm/MHz)
					AUX	Main				
26T	18	802.11ax-HE80	7	6625	-7.941	-8.403	N/A	3.45	-1.706	-1
52T	37	802.11ax-HE40	7	6685	-7.974	-9.031	N/A	3.45	-2.010	
106T	53	802.11ax-HE40	7	6685	-8.198	-8.763	N/A	3.45	-2.011	
242T	62	802.11ax-HE160	7	6665	-7.685	-8.702	N/A	3.45	-1.703	
484T	66	802.11ax-HE80	7	6625	-7.785	-8.861	N/A	3.45	-1.829	
996T	67	802.11ax-HE160	7	6665	-8.305	-9.817	N/A	3.45	-2.535	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

Directional gain = $10 \log[(10^{3.6/10} + 10^{3.3/10})/2] = 3.45$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Tones	RU Index	Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) Note3	Total Power Spectral Density (dBm/1MHz) Note2	Limit (dBm/MHz)
					AUX	Main				
26	S0	802.11be-EHT320	7	6745	-8.242	-9.530	N/A	3.45	-2.378	-1
52	T52	802.11be-EHT320	6	6585	-7.993	-9.071	N/A	3.45	-2.038	
106	T60	802.11be-EHT320	6	6585	-8.011	-9.341	N/A	3.45	-2.165	
242	64	802.11be-EHT320	7	6745	-7.759	-9.400	N/A	3.45	-2.042	
484	66	802.11be-EHT80	7	6625	-7.901	-9.301	N/A	3.45	-2.085	
996	67	802.11be-EHT160	7	6665	-8.239	-9.216	N/A	3.45	-2.240	
996x2	W68	802.11be-EHT320	6	6585	-8.763	-9.964	N/A	3.45	-2.862	
26+52	70	802.11be-EHT20	7	6695	-8.089	-8.605	N/A	3.45	-1.879	
26+52	70	802.11be-EHT40	7	6685	-8.110	-9.245	N/A	3.45	-2.180	
26+106	82	802.11be-EHT20	7	6695	-8.404	-8.344	N/A	3.45	-1.914	
26+106	82	802.11be-EH40	7	6685	-8.246	-8.856	N/A	3.45	-2.080	
484+242	90	802.11be-EHT80	7	6625	-7.860	-9.045	N/A	3.45	-1.952	
996+484	94	802.11be-EHT160	7	6665	-8.337	-9.823	N/A	3.45	-2.556	
996+484+242	S99	802.11be-EHT160	8	6985	-8.701	-8.755	N/A	3.45	-2.268	
996x2+484	W103	802.11be-EHT320	6	6585	-7.903	-8.999	N/A	3.45	-1.956	
996x3	W104	802.11be-EHT320	5	6105	-8.317	-10.104	N/A	3.45	-2.659	
996x3+484	W106	802.11be-EHT320	5	6265	-8.497	-10.499	N/A	3.45	-2.923	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi


Directional gain:


Directional gain = $10 \log[(10^{3.6/10} + 10^{3.3/10})/2] = 3.45$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

A.3.2 Measurement Plots


- OFDM Modulation

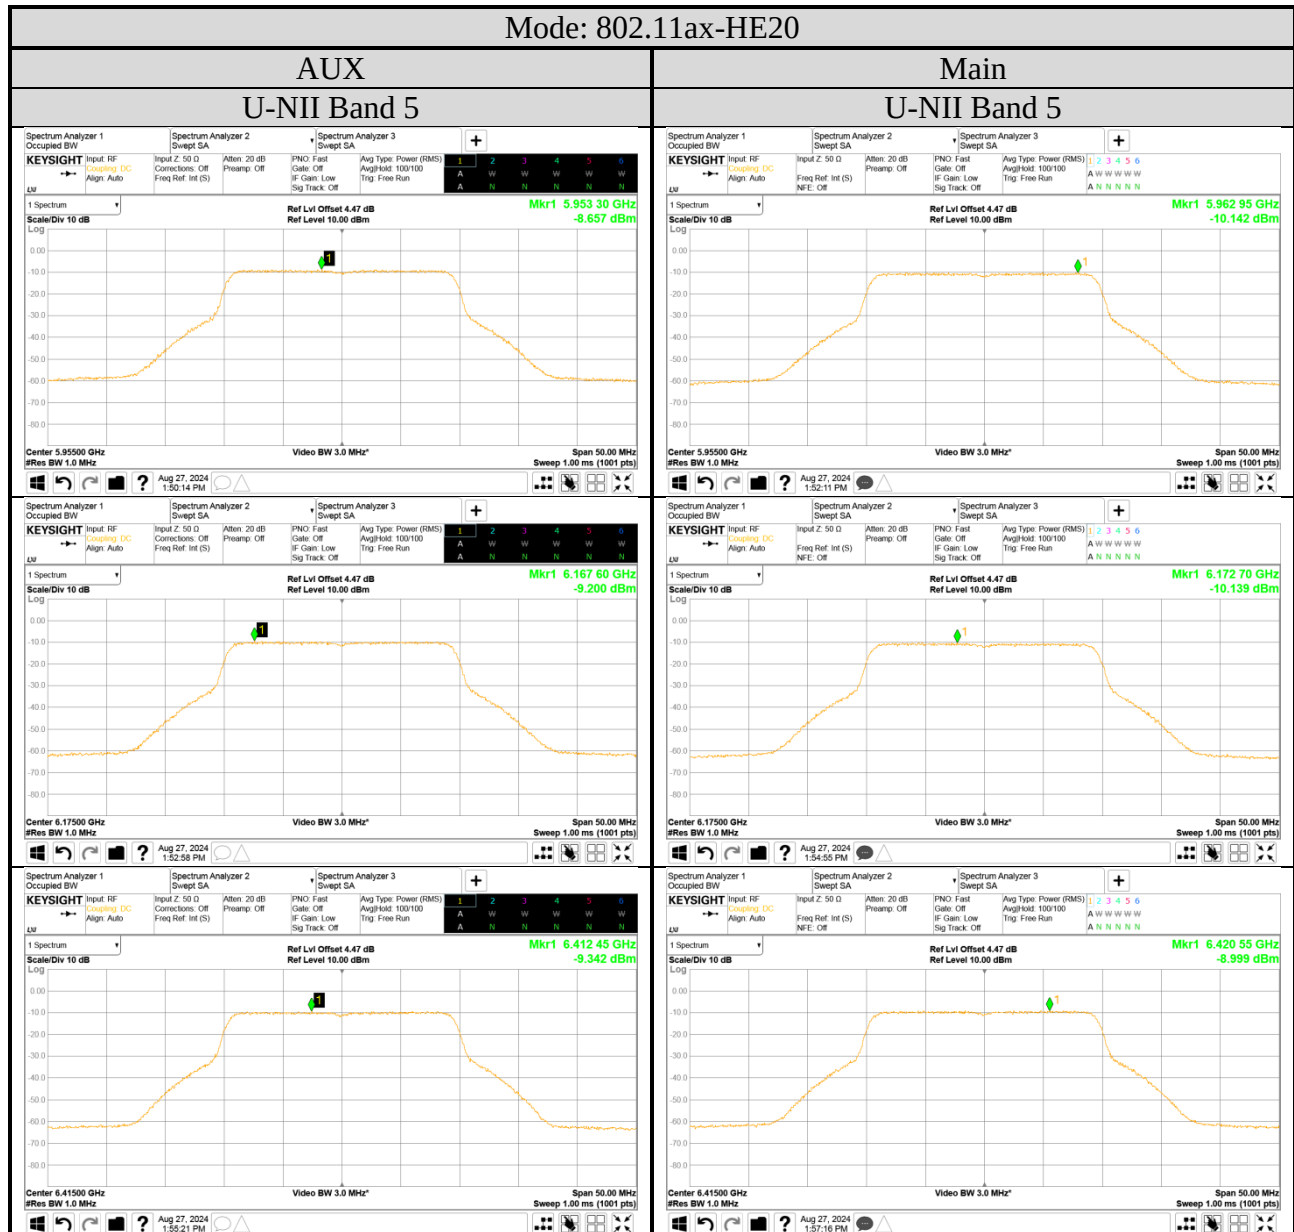

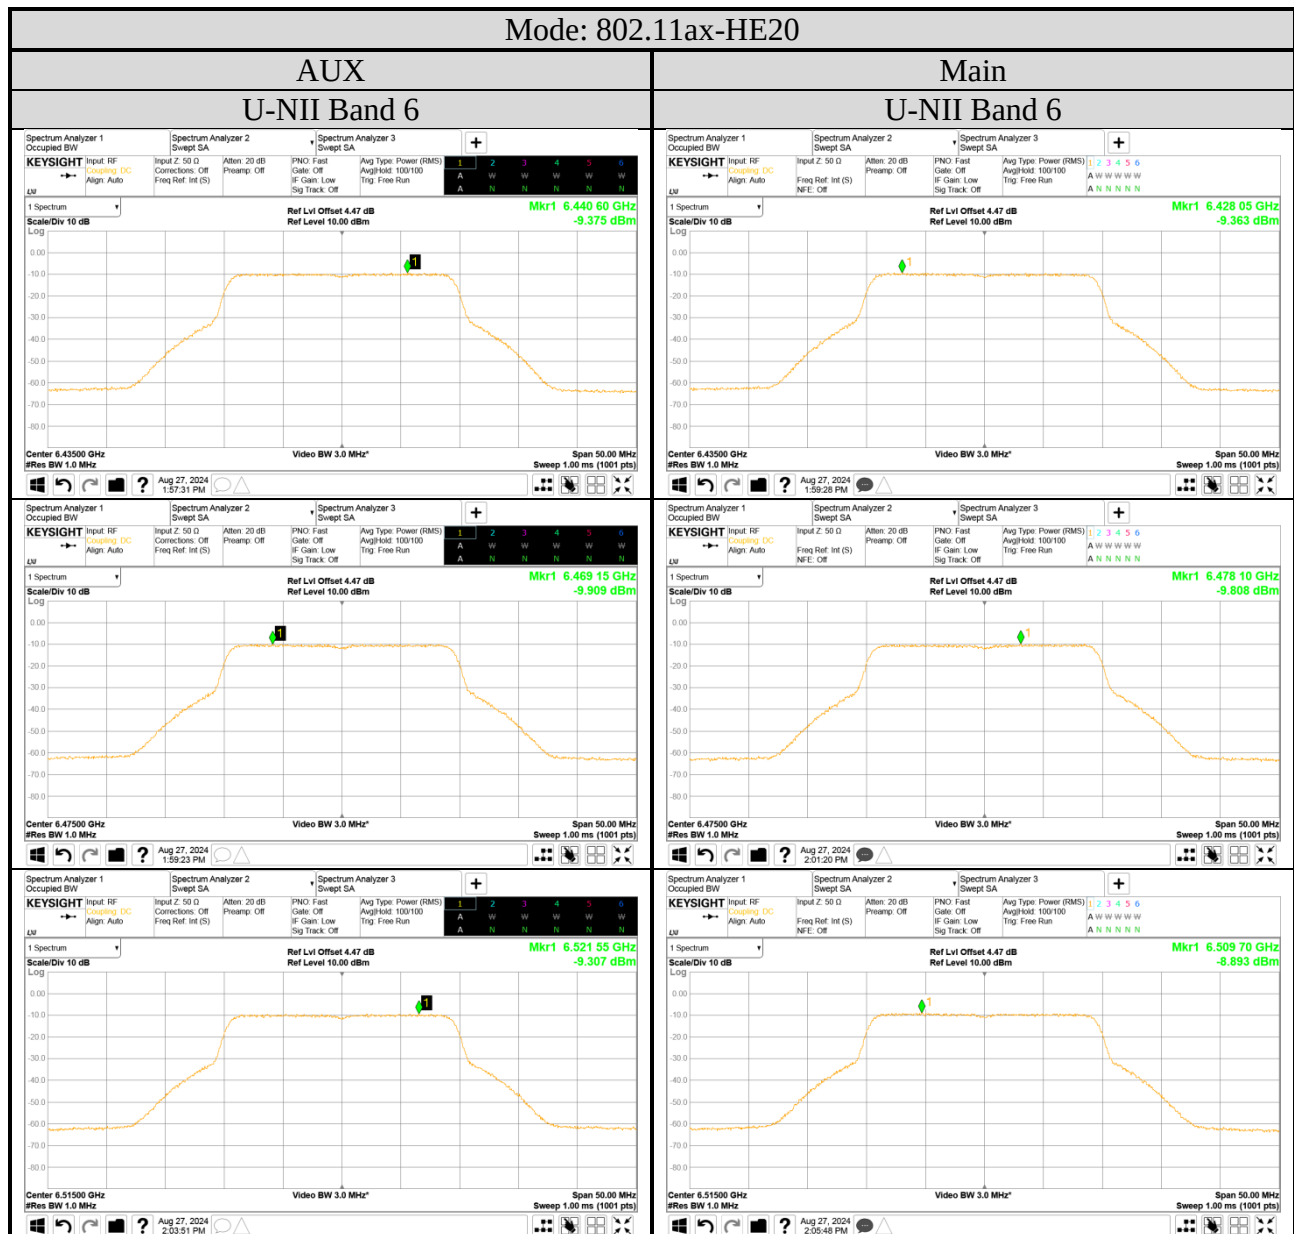


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

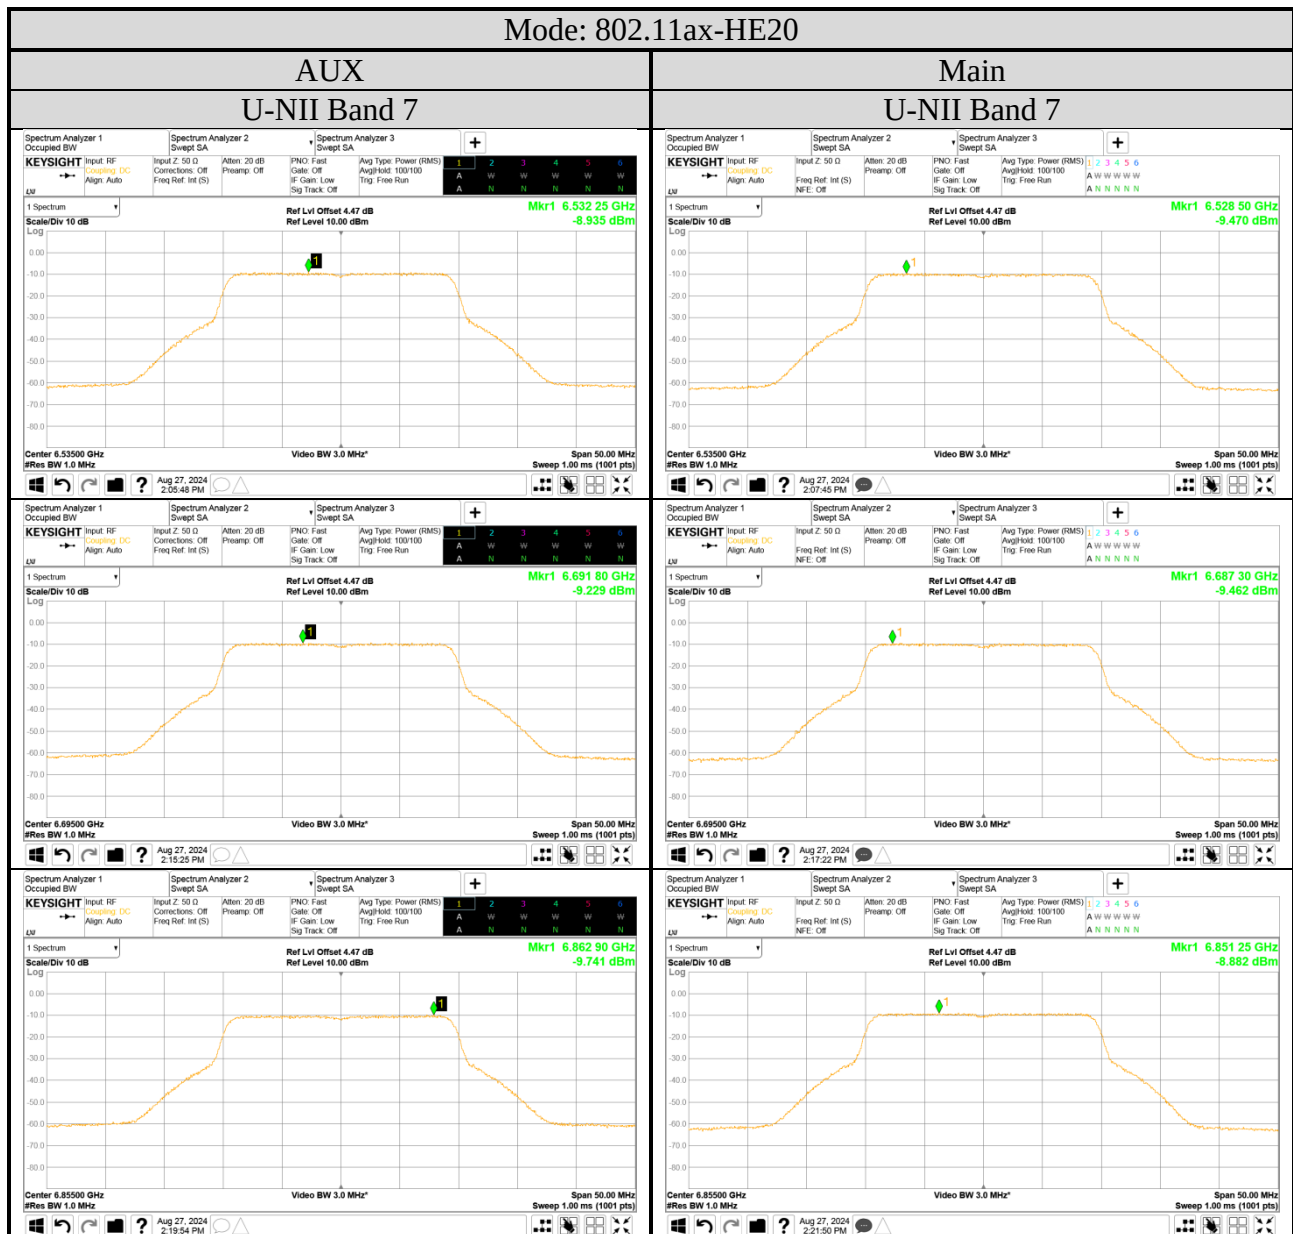


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

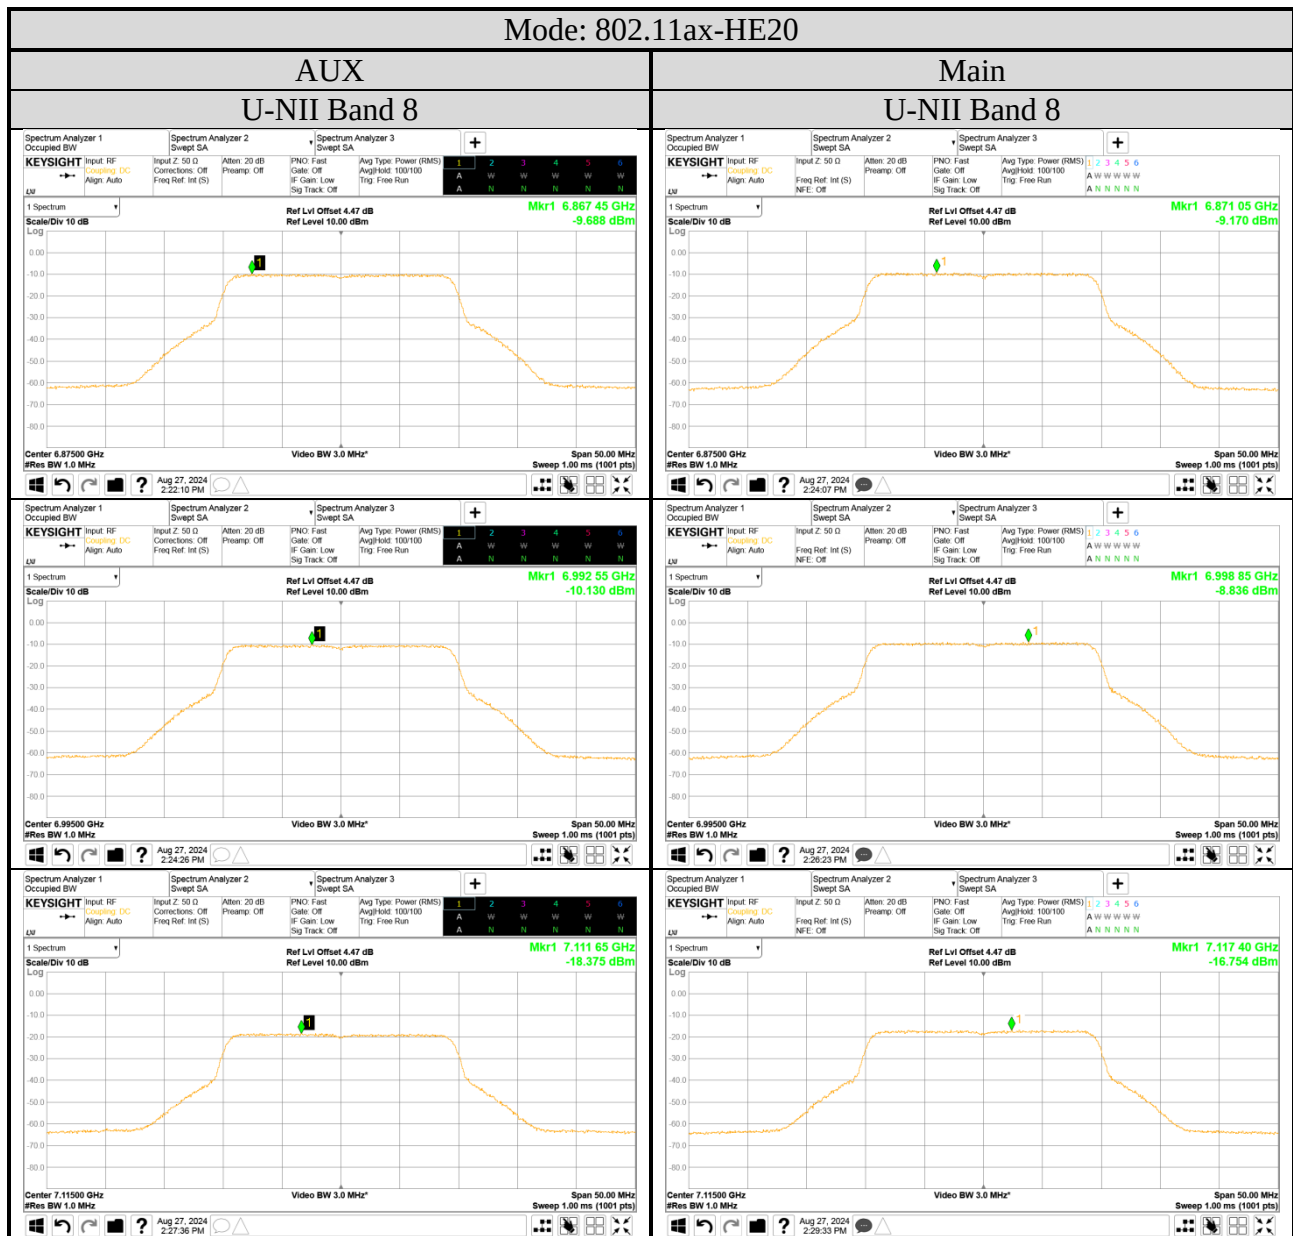


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

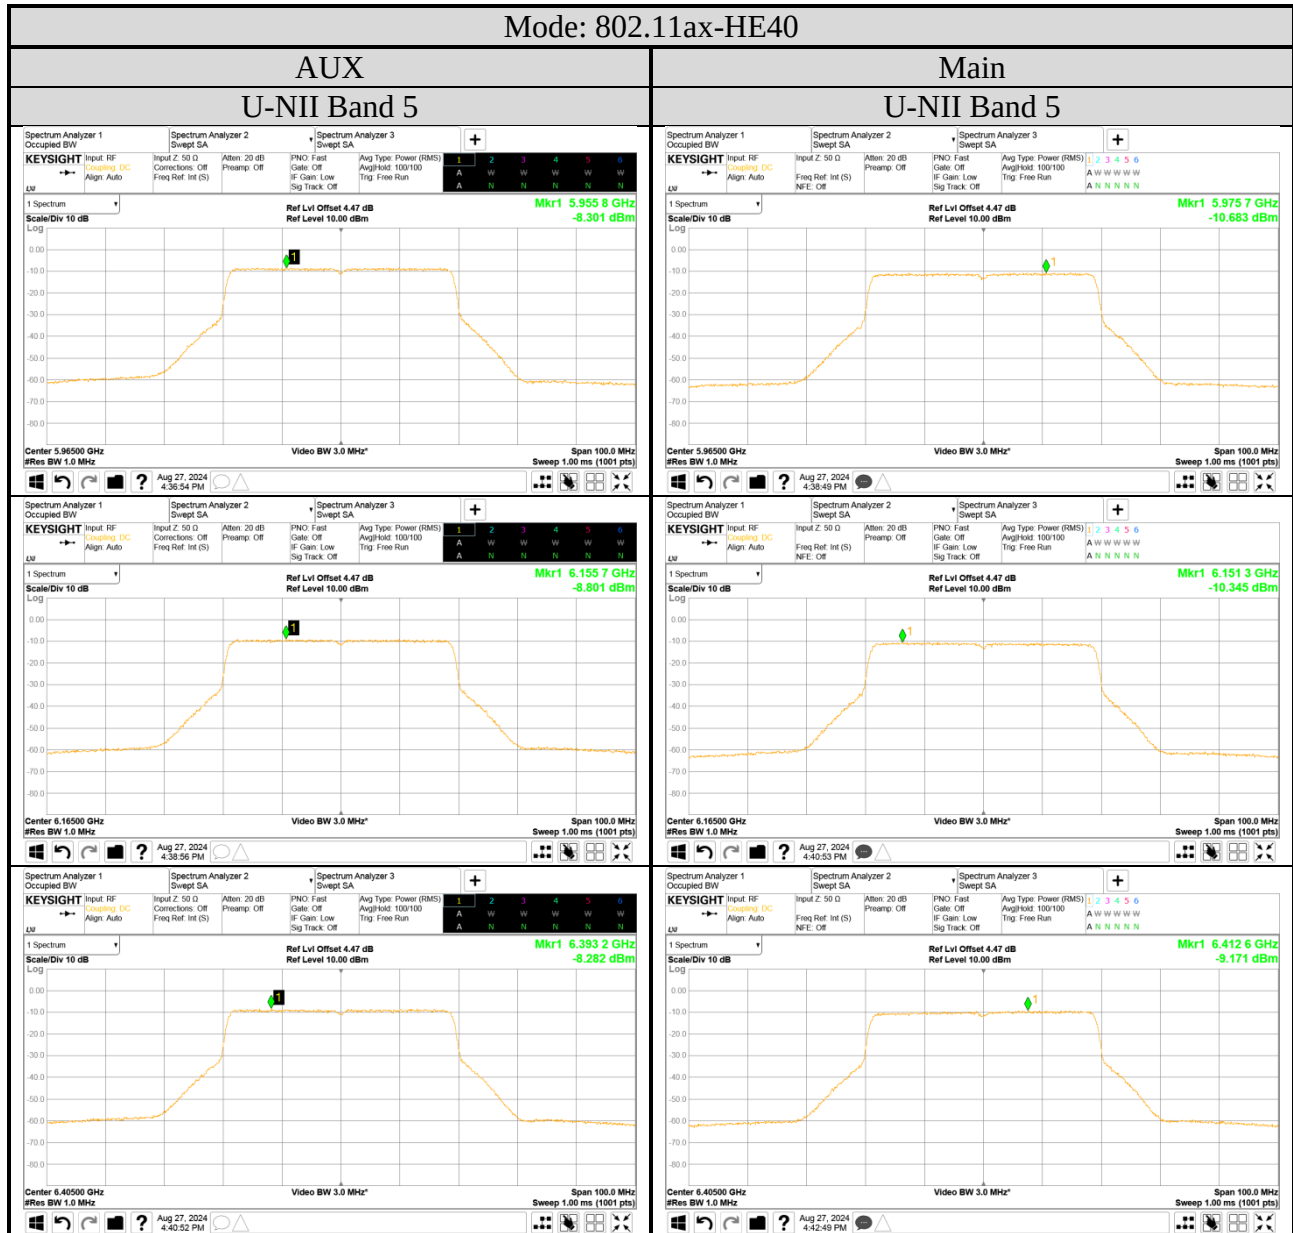


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

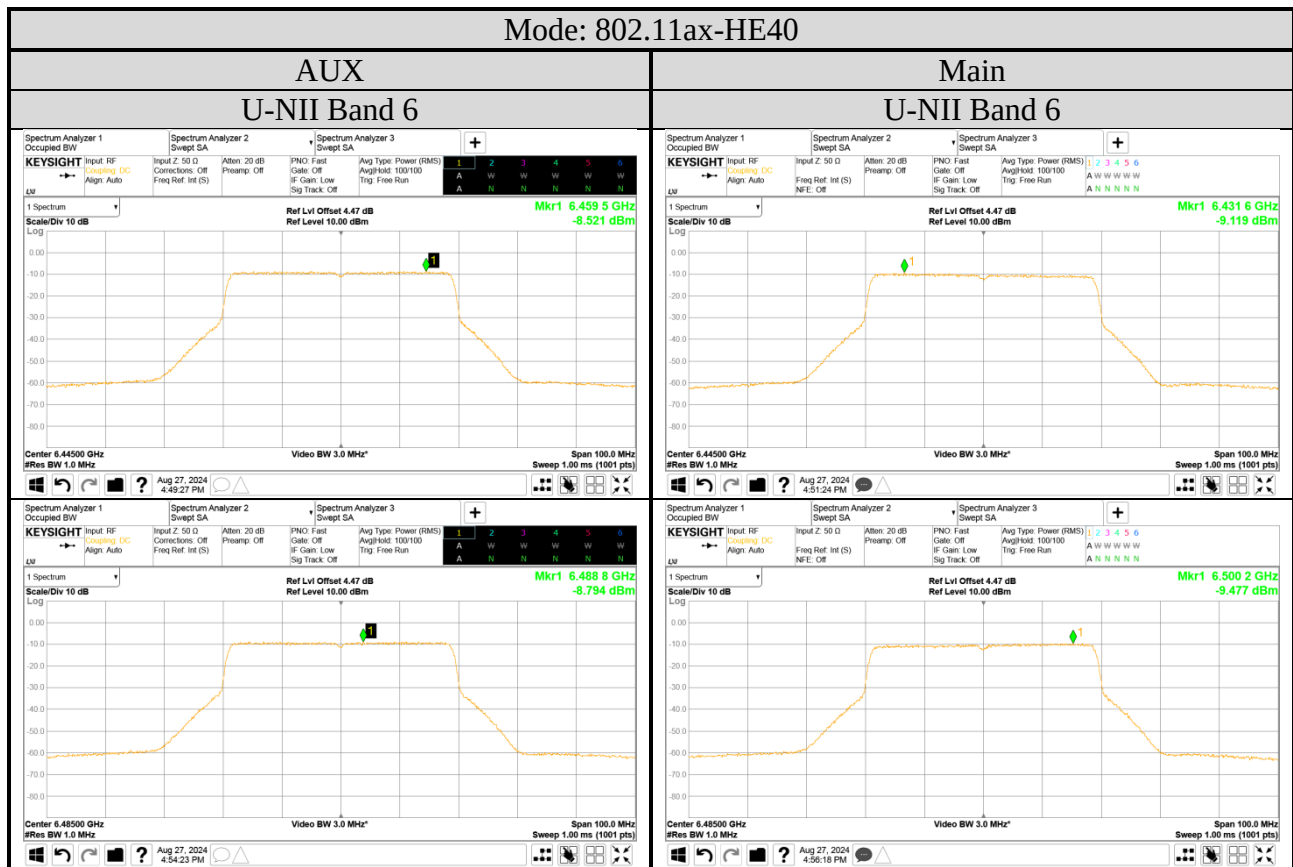


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

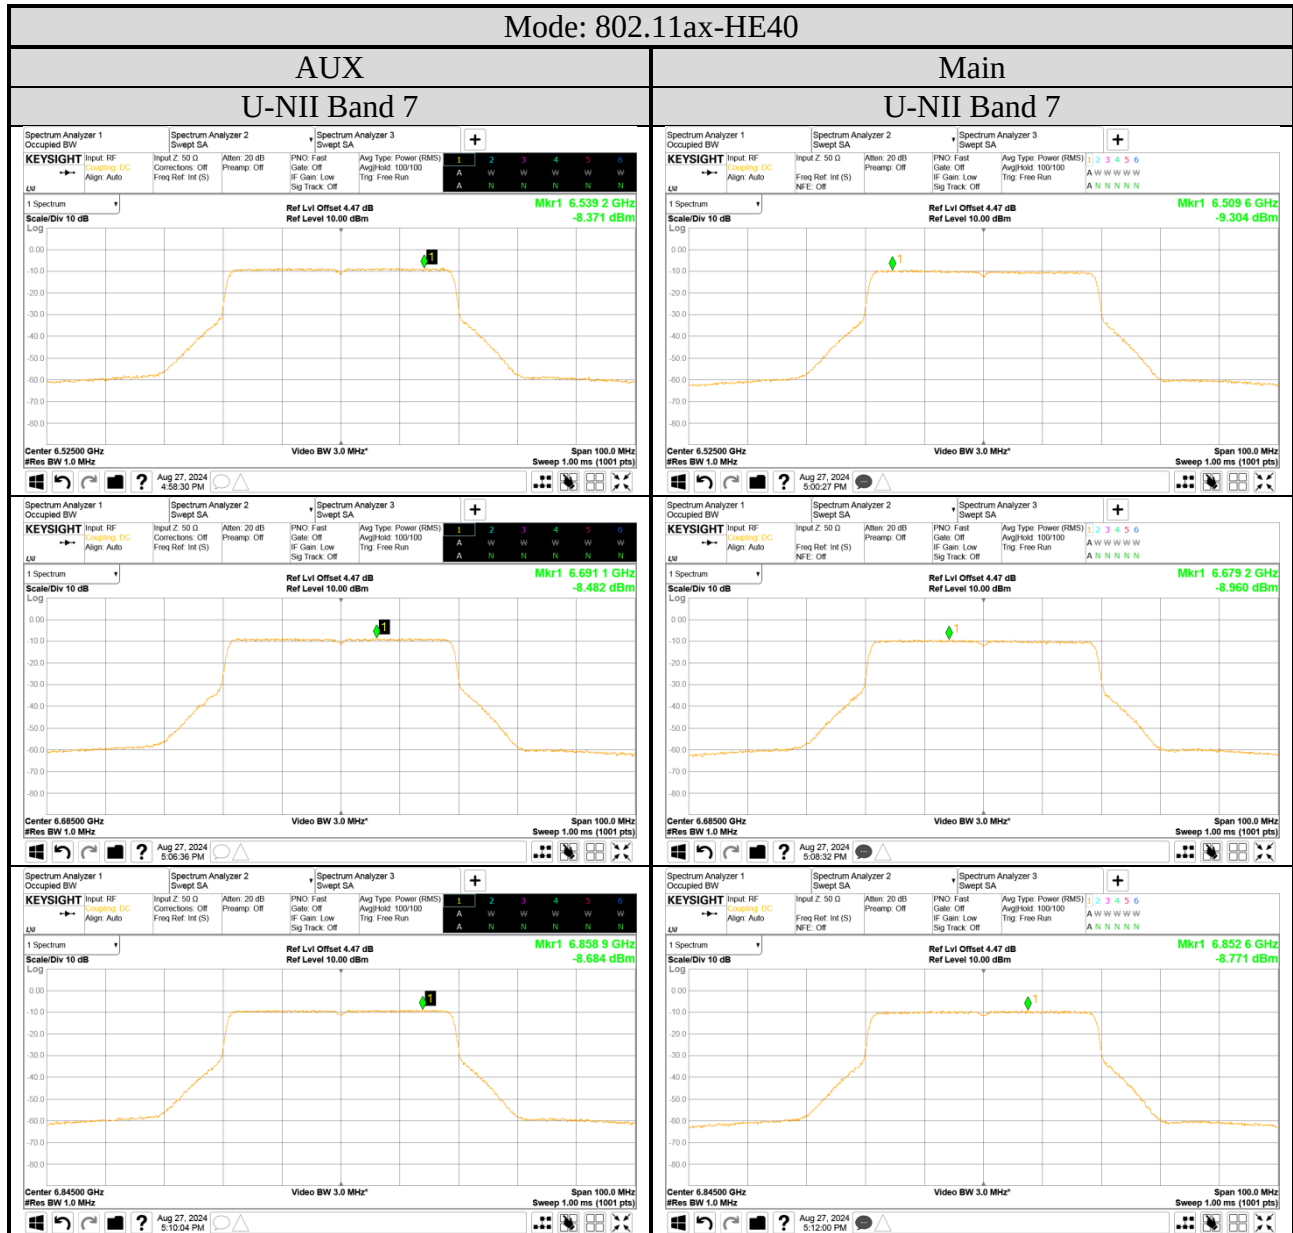


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

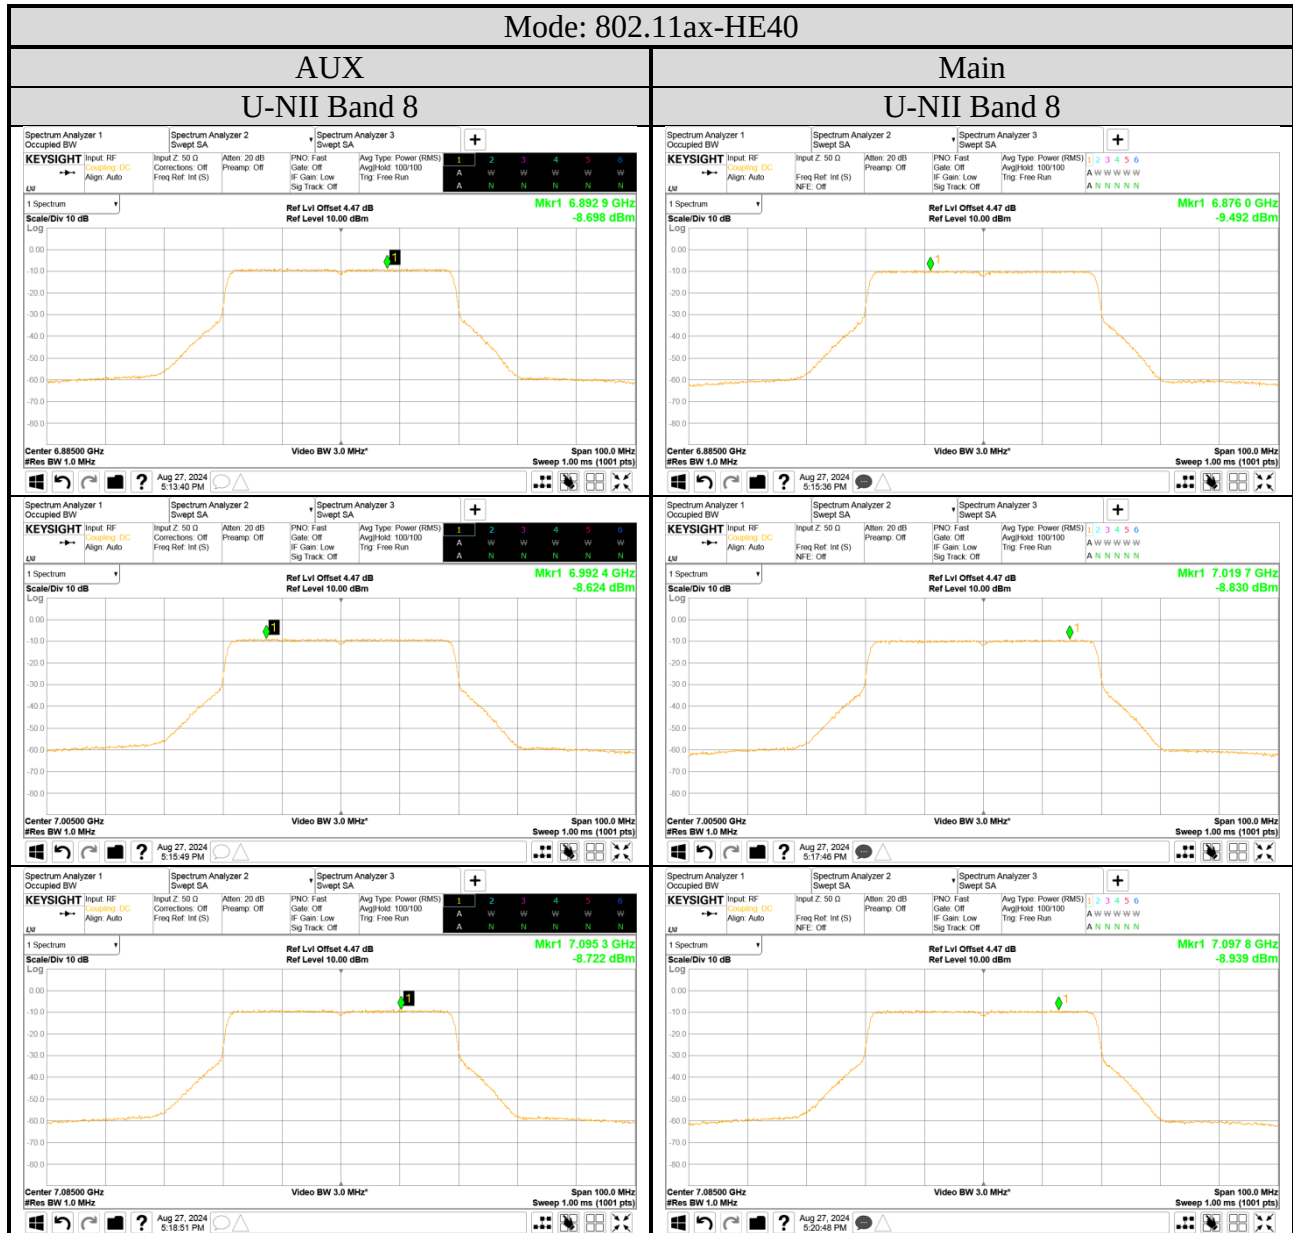


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

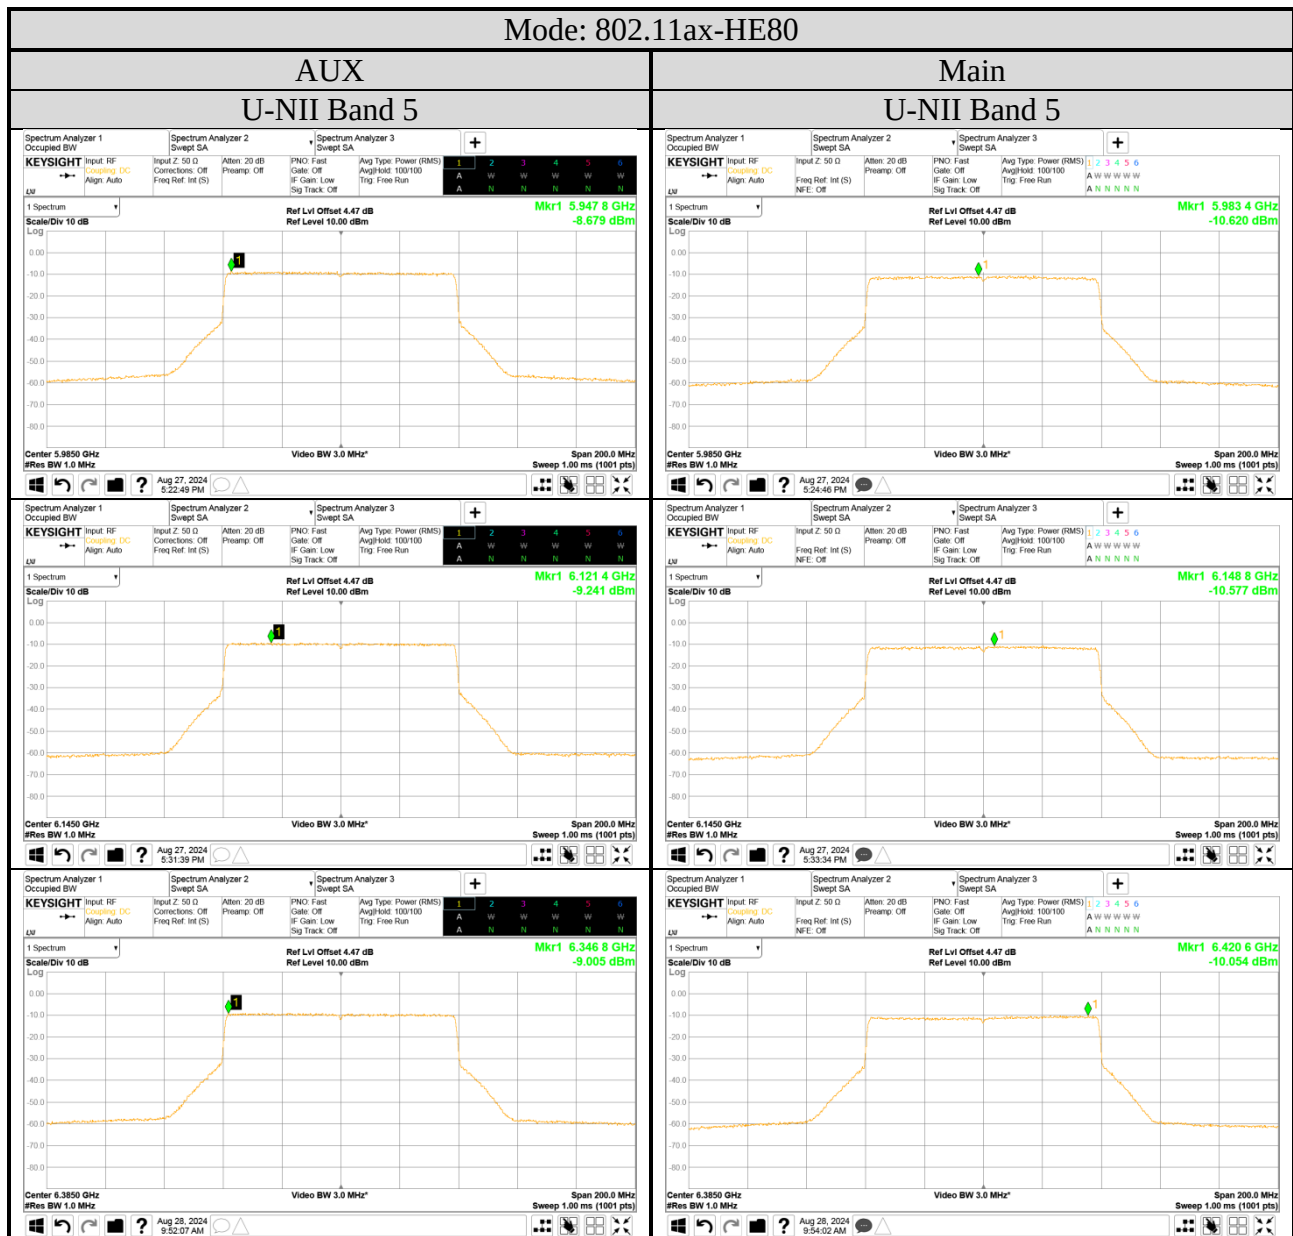


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

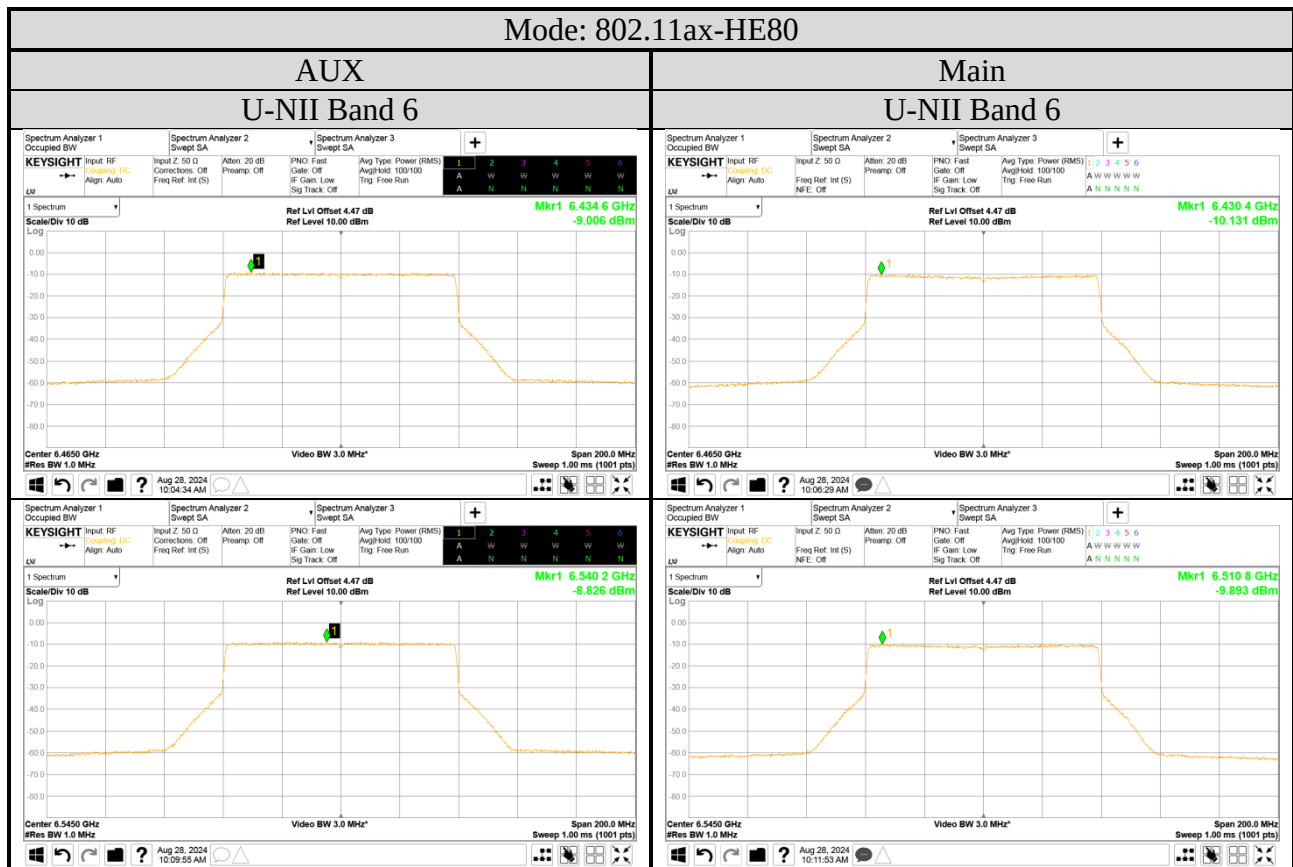

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

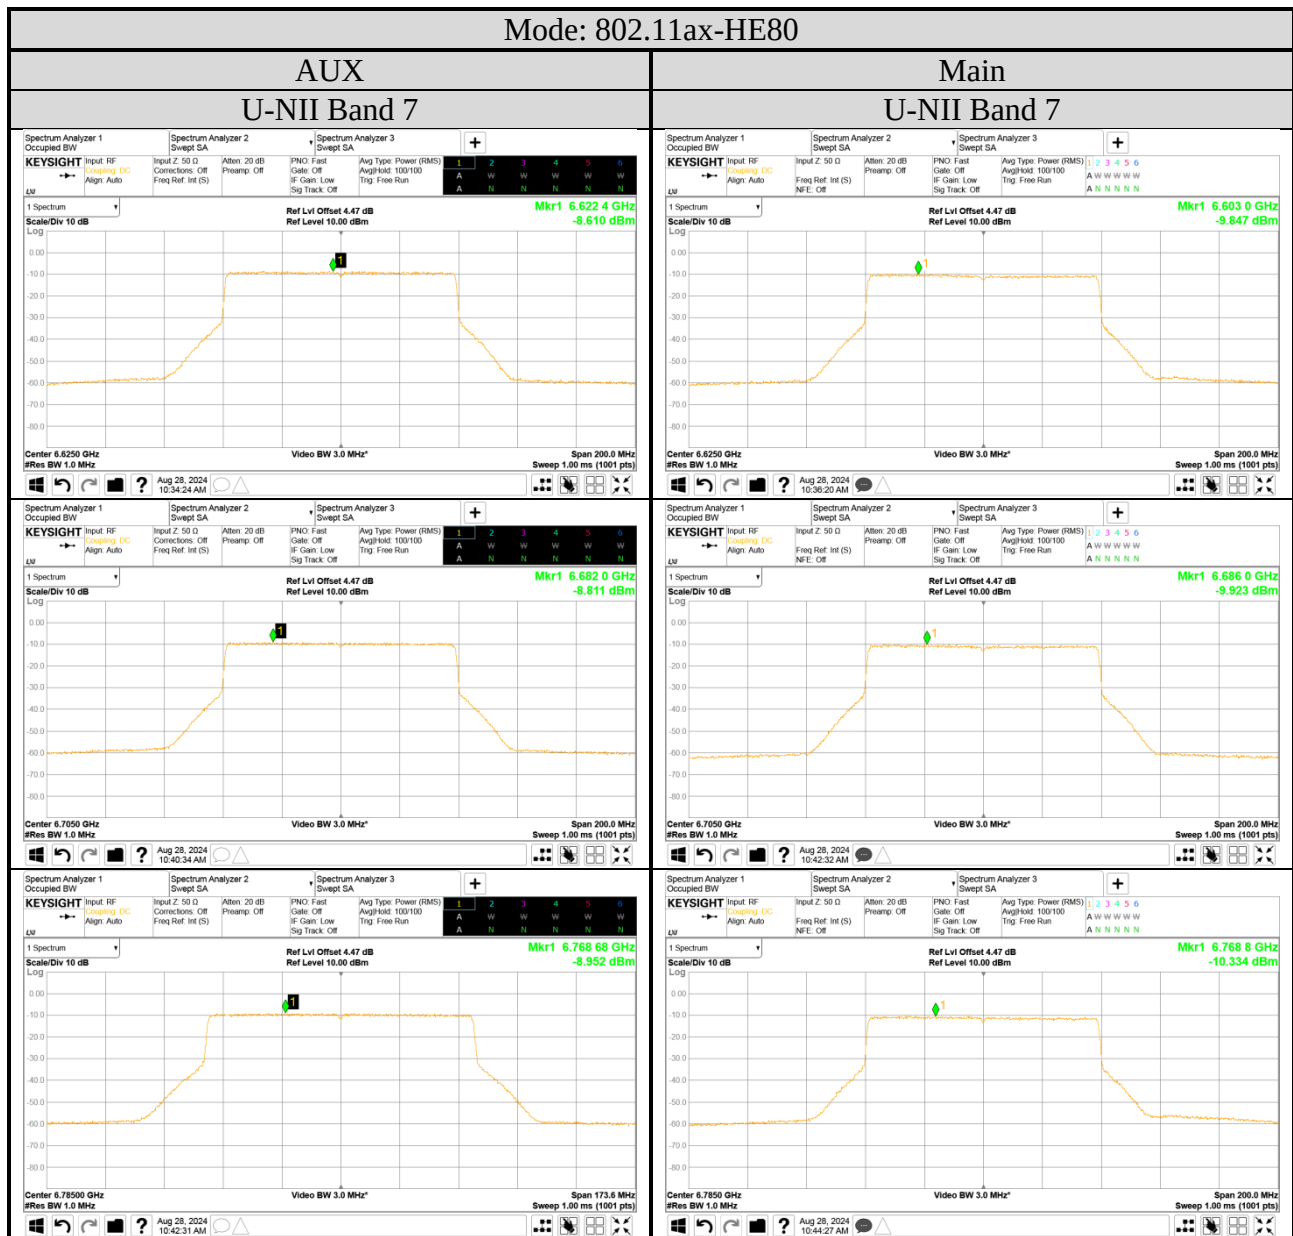

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

