

Acknowledgment

SPECIFICATION FOR APPROVAL

CUSTOMER: ZLGD-A1-0574

PART NO. : ZLGD-Y22X39.5-10-FR

DESCRIPTION: coil+hard ferrite sheet

SPECIFICATION: 22x39.5,0.08× 80P, lead line length10mm,
(measured from edge of ferrite sheet)

DATE: 20260916

TRX APPROVAL		
Production	Audit	Recognition date
Xiaoxian Zeng	Zhihui Qiu	20260916
CUSTOMER APPROVAL		
Project	Approved	Recognition date
Result: ☐ Qualified ☐ Disqualified ☐ Other		

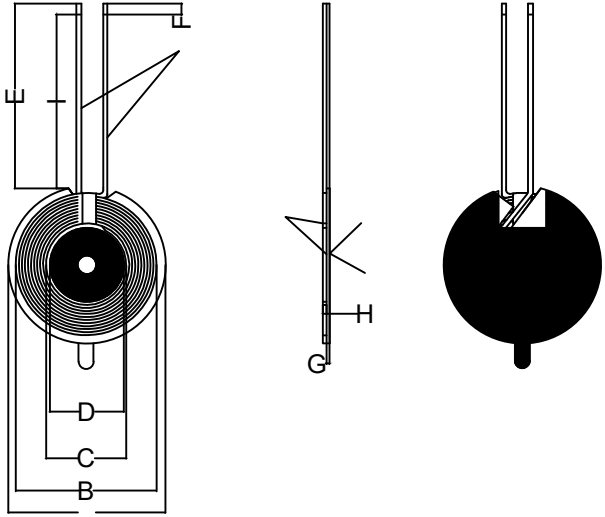
Dongguan city DFL Electronic Technology Co.,LTD

107 Xinfeng West Road, Shijie, Dongguan, Guangdong,

TEL: 0769-86016320 FAX: 0769-86372427

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

SPECIFICATION																																			
DESC :	ZLGD-Y22X39.5-10-FR	version Rev:A	Customer:	ZLGD-A1-0574																															
			Description:	coil+hard ferrite sheet																															
			Date:	20260106																															
1、 DIMENSION:(mm) 				A	42.5±1.0																														
				B	39.5±2.0																														
				C	22.0±1.0																														
				D	20.0±0.5																														
				E	80.0±4.0																														
				F	3.0±2.0																														
				G	0.8±0.2																														
				H																															
				I																															
				J																															
				K																															
				L																															
				M																															
				N																															
				O																															
P																																			
				Note:																															
				1. The coil is pasted with G43*0.8 hard ferrite																															
				2. Wrap 5MM high-temperature tape around the coil outlet position.																															
				3. Double-sided tape for ears attached to the back of the ferite sheet																															
				4. The coil cannot be loosened																															
2、 schematic diagram:																																			
3、 WindingSpecification:																																			
<table><tr><th>NO.</th><th colspan="2">TERMINAL</th><th>WIRE</th><th>Turns</th><th>Winding Direction</th></tr><tr><td>1</td><td></td><td></td><td>0.08×80 P Silk covered wire</td><td>11TS</td><td>Counterclockwise</td></tr></table>						NO.	TERMINAL		WIRE	Turns	Winding Direction	1			0.08×80 P Silk covered wire	11TS	Counterclockwise																		
NO.	TERMINAL		WIRE	Turns	Winding Direction																														
1			0.08×80 P Silk covered wire	11TS	Counterclockwise																														
4、 ELECTRICAL CHARACTERISTICS:																																			
TEMPERATURE:25±10°C,RELATIVE HUMIDITY:65±20%																																			
<table><tr><th>NO.</th><th>ITEM</th><th>TERMINAL</th><th>SPECIFICATION</th><th>TEST FREQUENCY</th><th>TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td></td><td>8.3UH ± 10% with hard ferrite added</td><td>100KHz/1.0V</td><td>SHDA 1062</td></tr><tr><td>2</td><td>IND.</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>Q value</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>DCR</td><td></td><td></td><td></td><td></td></tr></table>						NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS	1	IND.		8.3UH ± 10% with hard ferrite added	100KHz/1.0V	SHDA 1062	2	IND.					3	Q value					4	DCR				
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS																														
1	IND.		8.3UH ± 10% with hard ferrite added	100KHz/1.0V	SHDA 1062																														
2	IND.																																		
3	Q value																																		
4	DCR																																		
PREPARED BY/DATE			CHECKED BY/DATE		CUSTOMEU/DATE																														