

Go to www.vtechphones.com to register your product for enhanced warranty support and the latest VTech product news.


DS6251
DS6251-2
DS6251-3
DS6251-4

2-Line Cordless Answering System
with Smart Call Blocker



Quick start guide

What's in the box

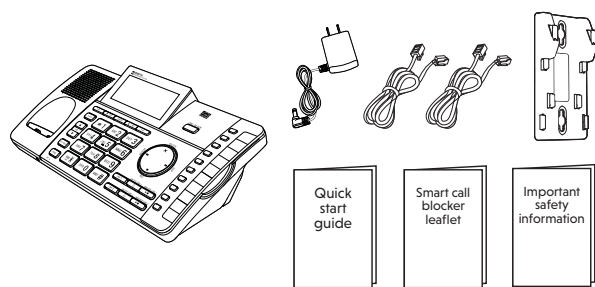

Quick start guide
Smart call blocker leaflet
Important safety information


1 set for DS6251
2 sets for DS6251-2
3 sets for DS6251-3
4 sets for DS6251-4

1 set for DS6251-2
2 sets for DS6251-3
3 sets for DS6251-4


1 Connect and install

1 Connect the telephone base


If you subscribe to digital subscriber line (DSL) high-speed Internet service through your telephone line, make sure you connect a DSL filter (not included) to the telephone wall jack.

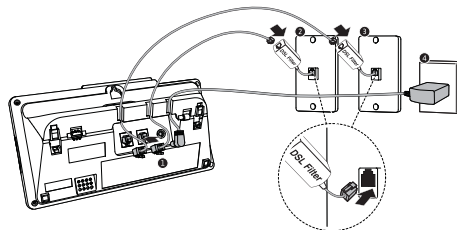


2 Install the battery

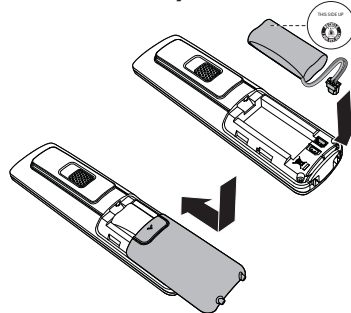

3 Connect the charger



4 Charge the battery

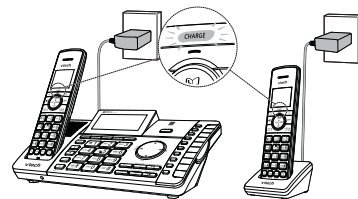


Display

Handset:



Telephone base:



	The battery is low and needs charging.		Line 1 or line 2 is in use.
	The battery is charging.		Telephone base ringer on line 1 and/or line 2 is off.
	The battery is fully charged.		New voicemail received on line 1 and/or line 2 from your telephone service provider.
	Line 1 or line 2 is in use.		There are new answering system message(s) on line 1 and/or line 2.
	Handset ringer on line 1 and/or line 2 is off.		The microphone is muted.
	New voicemail received on line 1 and/or line 2 from your telephone service provider.		New caller ID log entries.
	There are new answering system message(s) on line 1 and/or line 2.		You can perform 3-character alphabetical search.
	Answering system of line 1 and/or line 2 is on.		
	The microphone is muted.		
	New caller ID log entries.		
	You can perform 3-character alphabetical search.		

2 Setup


After you install your telephone or power returns following a power outage and battery depletion, the handset and telephone base will prompt you to set the date and time, Smart call blocker, and to configure the answering system through voice guide.

Date and time

Follow the steps below to set the date and time. For example, if the date is 25 July, 2018, and the time is 12:05 PM:



When the handset and telephone base prompts you to set the date and time



Enter the date



Enter the time

Voice guide for Smart call blocker

After setting the date and time, the handset and telephone base will prompt you if you want to set Smart call blocker. For more details, see **Use voice guide to set Smart call blocker** in the **Smart call blocker** leaflet.

When the handset and telephone base prompt you to set up the Smart call blocker via voice guide



Choose to set for all lines or a specific line

"Hello! This voice guide will assist you with the basic setup of Smart call blocker"



Setup your Smart call blocker by inputting the designated numbers as instructed in the voice guide.

Voice guide for answering system

After setting the Smart call blocker, the handset and telephone base will display **Start voice guide to set up Answering system now?**

This feature assists you to do the basic setup of the answering system. You can follow the voice guide to record your own announcement, set the number of rings and the message alert tone.

When the handset and telephone base prompt you to set up the answering system via voice guide




Choose to set for a specific line

"Hello! This voice guide will assist you with the basic setup of your answering system"


Setup your answering system by inputting the designated numbers as instructed in the voice guide.

3 Operate


Make a call

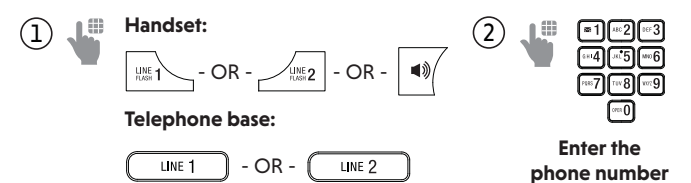

Answer a call

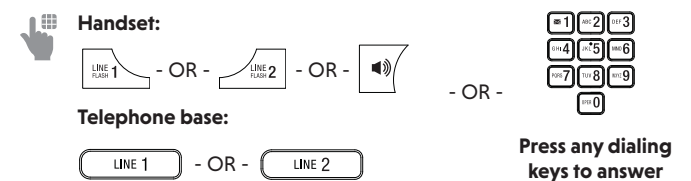

End a call

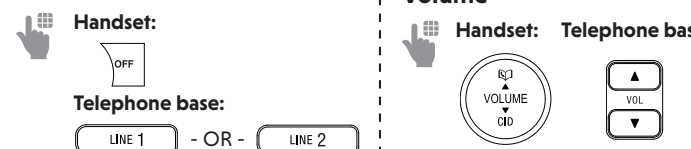

For detailed instructions, read the online user's manual or frequently asked questions at www.vtechphones.com.



Document order number: 96-011957-010-100
All rights reserved. 05/18_DS6251-X_OSG_V1.0
Specifications are subject to change without notice.



The ENERGY STAR® program (www.energystar.gov) recognizes and encourages the use of products that save energy and help protect our environment. We are proud to mark this product with the ENERGY STAR® label indicating it meets the latest energy efficiency guidelines. Telephones identified with this logo have reduced noise and interference when used with most T-coil equipped hearing aids and cochlear implants. The TIA-1083 Compliant Logo is a trademark of the Telecommunications Industry Association. Used under license.



Memory

Phonebook: 50 memory locations;
Caller ID log: 50 memory locations;
up to 24 digits and 15 characters

Call block: 1000 entries

Power

Handset: 2.4V Ni-MH battery
Telephone base: 6V DC @ 600mA

Requirement

Maximum power allowed by FCC and IC.
Actual operating range may vary according to environmental conditions at the time of use.

Channels

5

Frequency

Handset: 1921.536-1928.448 MHz
Telephone base: 1921.536-1928.448 MHz

Transmit

Crystal controlled PLL synthesizer

Control

Technical specifications




Caller ID


If you subscribe to caller ID service, information about each caller appears after the first or second ring.

The caller ID log stores up to 50 entries. Each entry has up to 24 digits for the phone number and 15 characters for the name.

Review caller ID log entries

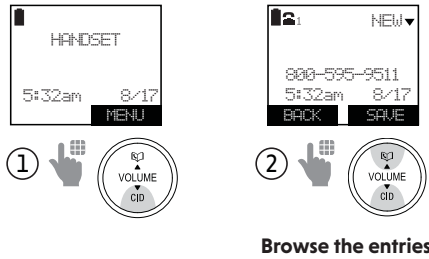


Dial a caller ID log entry

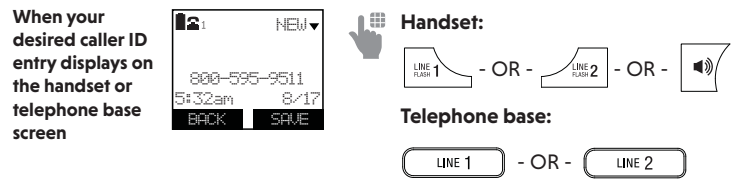


Save a caller ID log entry to the phonebook

When your desired caller ID entry displays on the handset or telephone base screen

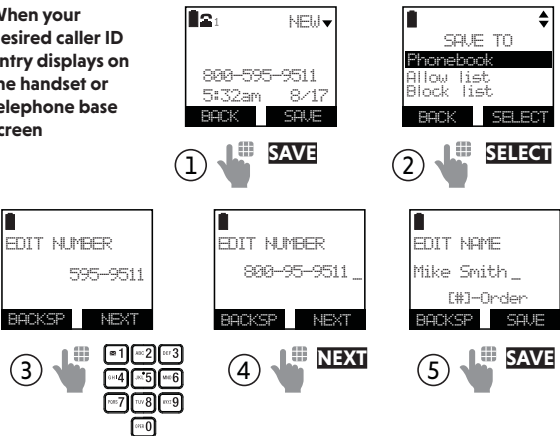


Delete a caller ID log entry

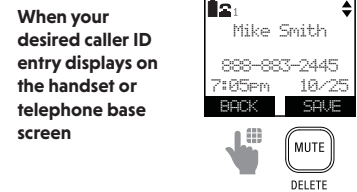


Phonebook

The phonebook can store up to 50 entries, which are shared by all handsets. Each entry may consist of a telephone number up to 30 digits, and a name up to 15 characters.

Add a phonebook entry

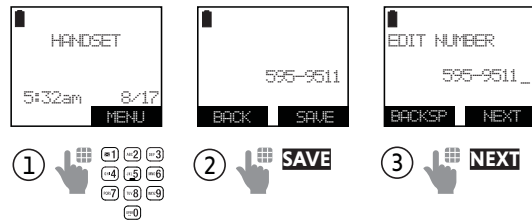


Enter the phone number




Enter the name

Review phonebook entries

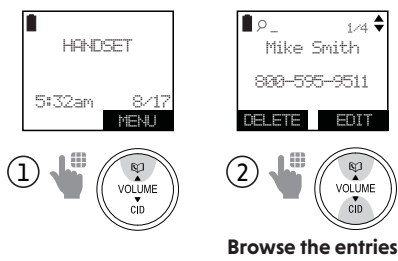

Delete a phonebook entry


When your desired phonebook entry displays on the handset or telephone base screen

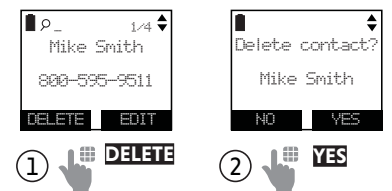

Speed dial


The telephone system has 10 speed dial locations where you can store the telephone numbers you wish to dial more quickly. All speed dial assignments can only be selected from the existing phonebook entries.

Assign a speed dial entry

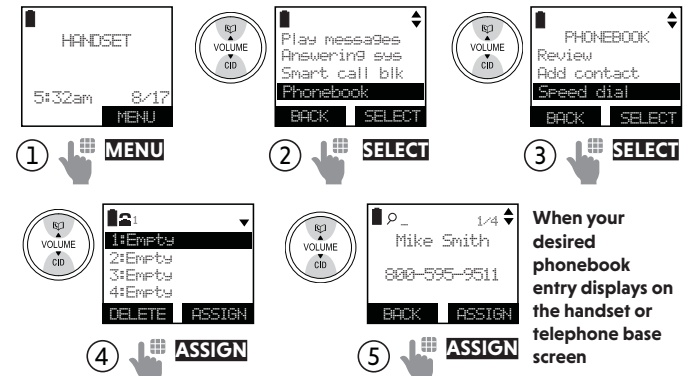

Choose a speed dial location

Dial a speed dial entry




*The 10 speed dial keys represents speed dial locations, 1-9 and 0, from top to bottom.



Smart call blocker

If you have subscribed to caller ID service, you can use the Smart call blocker feature to screen incoming calls. Smart call blocker is on, and to allow all incoming calls by default.

Turn the smart call blocker on or off

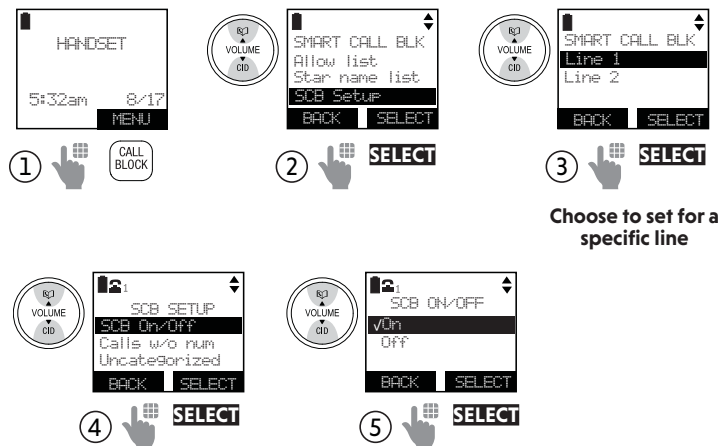

For more details, refer to the **Smart call blocker** leaflet.



About the built-in answering system and voicemail service


For message recording, your telephone has a built-in answering system, and it also supports voicemail service offered by your telephone service provider (subscription is required, and fee may apply).

Built-in answering system VS Voicemail service


	BUILT-IN ANSWERING SYSTEM	VOICEMAIL SERVICE
SUPPORTED BY	Telephone system	Telephone service provider
SUBSCRIPTION	No	Yes
FEES	No	May apply
ANSWER INCOMING CALLS	- After 4 rings by default. - It can be changed in the handset or the telephone base menu.	- Usually after 2 rings. - It can be changed by contacting your telephone service provider.
STORAGE	Telephone base	Server or System
DISPLAY NEW MESSAGES	- Handset - QO and XX New Msg - Telephone base - QO and XX New Msg	- Handset - ✉ - Telephone base - ✉
RETRIEVE MESSAGES	- Press ▶/■ on the telephone base; OR - Press MENU on the handset; OR - Access remotely with an access code.	Press ✉ on the dialpad, and enter an access number and/or passcode from your telephone service provider.

Turn the built-in answering system on or off


On the telephone base

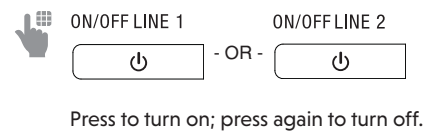


Message playback on the telephone base




Skip a message



Repeat the playing message



Play the previous message

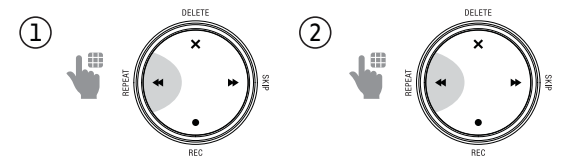

Delete all messages

