

ASTRO[®] XTS[™] 5000

VHF

UHF Range 1

UHF Range 2

700 — 800 MHz

Digital Portable Radios

Detailed Service Manual



MOTOROLA

intelligence everywhere[™]





MOTOROLA
intelligence everywhere™

ASTRO® XTS™ 5000
VHF/UHF Range 1/Range 2/700–800 MHz
Digital Portable Radios
Detailed Service Manual

Motorola, Inc.
8000 West Sunrise Boulevard
Fort Lauderdale, Florida 33322

6881094C31-D

Foreword

The information contained in this manual relates to all ASTRO® XTS™ 5000 digital portable radios, unless otherwise specified. This manual provides sufficient information to enable qualified service shop technicians to troubleshoot and repair an ASTRO XTS 5000 digital portable radio to the component level.

For details on the operation of the radio or level 1 or 2 maintenance procedures, refer to the applicable manuals, which are available separately. A list of related publications is provided in the section, "Related Publications," on page xii.

Product Safety and RF Exposure Compliance



Before using this product, read the operating instructions for safe usage contained in the Product Safety and RF Exposure booklet enclosed with your radio.

ATTENTION!

This radio is restricted to occupational use only to satisfy FCC RF energy exposure requirements. Before using this product, read the RF energy awareness information and operating instructions in the Product Safety and RF Exposure booklet enclosed with your radio (Motorola Publication part number 6881095C98) to ensure compliance with RF energy exposure limits.

For a list of Motorola-approved antennas, batteries, and other accessories, visit the following web site which lists approved accessories: <http://www.motorola.com/cqiss/index.shtml>

Manual Revisions

Changes which occur after this manual is printed are described in FMRs (Florida Manual Revisions). These FMRs provide complete replacement pages for all added, changed, and deleted items, including pertinent parts list data, schematics, and component layout diagrams. To obtain FMRs, contact the Customer Care and Services Division (refer to "Appendix A Replacement Parts Ordering").

Computer Software Copyrights

The Motorola products described in this manual may include copyrighted Motorola computer programs stored in semiconductor memories or other media. Laws in the United States and other countries preserve for Motorola certain exclusive rights for copyrighted computer programs, including, but not limited to, the exclusive right to copy or reproduce in any form the copyrighted computer program. Accordingly, any copyrighted Motorola computer programs contained in the Motorola products described in this manual may not be copied, reproduced, modified, reverse-engineered, or distributed in any manner without the express written permission of Motorola. Furthermore, the purchase of Motorola products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Motorola, except for the normal non-exclusive license to use that arises by operation of law in the sale of a product.

Document Copyrights

No duplication or distribution of this document or any portion thereof shall take place without the express written permission of Motorola. No part of this manual may be reproduced, distributed, or transmitted in any form or by any means, electronic or mechanical, for any purpose without the express written permission of Motorola.

Disclaimer

The information in this document is carefully examined, and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies. Furthermore, Motorola reserves the right to make changes to any products herein to improve readability, function, or design. Motorola does not assume any liability arising out of the applications or use of any product or circuit described herein; nor does it cover any license under its patent rights nor the rights of others.

Trademarks

MOTOROLA, the Stylized M logo, and ASTRO are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners.

Table of Contents

Foreword ii

Product Safety and RF Exposure Compliance	ii
Manual Revisions	ii
Computer Software Copyrights	ii
Document Copyrights	ii
Disclaimer	ii
Trademarks	ii

List of Figures vii

List of Tables xi

Commercial Warranty xiii

Limited Warranty	xiii
------------------------	------

Model Numbering, Charts, and Specifications xvii

Portable Radio Model Numbering System	xvii
ASTRO XTS 5000 VHF Model Chart	xviii
ASTRO XTS 5000 R (Ruggedized) VHF Model Chart	xix
ASTRO XTS 5000 UHF Range 1 Model Chart	xx
ASTRO XTS 5000 R (Ruggedized) UHF Range 1 Model Chart	xxi
ASTRO XTS 5000 UHF Range 2 Model Chart	xxii
ASTRO XTS 5000 R (Ruggedized) UHF Range 2 Model Chart	xxiii
ASTRO XTS 5000 700–800 MHz Model Chart	xxiv
ASTRO XTS 5000 R (Ruggedized) 700–800 MHz Model Chart	xxv
Specifications for VHF Radios	xxvi
Specifications for UHF Range 1 Radios	xxvii
Specifications for UHF Range 2 Radios	xxviii
Specifications for 700–800 MHz Radios	xxix

Chapter 1 Introduction 1-1

1.1 General	1-1
1.2 Notations Used in This Manual	1-2

Chapter 2 Radio Power 2-1

2.1 General	2-1
2.2 DC Power Routing—Transceiver Board	2-3
2.3 DC Power Routing—VOCON Board	2-3

Chapter 3	Theory of Operation	3-1
3.1	Transceiver Board	3-2
3.2	VOCON Board	3-16
3.3	Encryption Module	3-34
Chapter 4	Troubleshooting Procedures	4-1
4.1	Handling Precautions	4-1
4.2	Recommended Service Tools	4-2
4.3	Voltage Measurement and Signal Tracing	4-3
4.4	Standard Bias Table	4-4
4.5	Power-Up Self-Check Errors	4-5
4.6	Power-Up Self-Check Diagnostics and Repair (Not for Field Use)	4-6
Chapter 5	Troubleshooting Charts	5-1
5.1	List of Troubleshooting Charts	5-1
5.2	Main Troubleshooting Flowchart	5-2
5.3	Power-Up Failure	5-3
5.4	DC Supply Failure	5-5
5.5	Display Failure (NNTN4563, NNTN4819, & NNTN4717 VOCON Kits)	5-8
5.6	Display Failure (NTN9564)	5-11
5.7	Volume Set Error	5-14
5.8	Channel/Zone Select Error	5-15
5.9	Button Test	5-16
5.10	Top/Side Button Test	5-17
5.11	VCO TX/RX Unlock	5-18
5.12	VOCON TX Audio—Page 1	5-19
5.13	VOCON RX Audio	5-21
5.14	RX RF	5-23
5.15	TX RF (VHF and UHF Range 2)	5-28
5.16	TX RF (UHF R1/700-800 MHz)	5-31
5.17	Keyload Failure	5-34
5.18	Secure Hardware Failure	5-35
Chapter 6	Troubleshooting Waveforms	6-1
6.1	List of Waveforms	6-1
6.2	13 MHz Clock	6-2
6.3	16.8 MHz Buffer Input and Output	6-3
6.4	32.768 kHz Clock Outputs	6-4
6.5	SPI B Data	6-5
6.6	Receive Serial Audio Port (SAP)	6-6
6.7	Receive Baseband Interface Port (RX BBP)	6-7
6.8	Transmit Baseband Interface Port (TX BBP)	6-8
Chapter 7	Troubleshooting Tables	7-1
7.1	List of Board and IC Signals	7-1

Chapter 8 Schematics, Board Overlays, and Parts Lists 8-1

8.1	List of Transceiver Schematics and Board Overlays	8-1
8.2	List of VOCON Schematics and Board Overlays.....	8-1
8.3	Transceiver (RF) Boards	8-3
8.4	VOCON Boards	8-96

Notes

List of Figures

Figure 2-1.	DC Power Distribution—UHF Range 1 and 700–800 MHz Radios	2-2
Figure 2-2.	DC Power Distribution—VHF and Range 2 Radios	2-2
Figure 3-1.	XTS 5000 Overall Block Diagram	3-2
Figure 3-2.	Transceiver (VHF) Block Diagram (Power and Control Omitted)	3-2
Figure 3-3.	Transceiver (UHF Range 1, UHF Range 2 and 700–800 MHz) Block Diagram (Power and Control Omitted)3-3	3-5
Figure 3-4.	Receiver Block Diagram	3-7
Figure 3-5.	Abacus III (AD9874) Functional Block Diagram (from data sheet)	3-9
Figure 3-6.	Transmitter Block Diagram	3-16
Figure 3-7.	VOCON Board Interconnections	3-21
Figure 3-8.	Patriot EIM and Memory Block Diagram	3-28
Figure 3-9.	Universal (Side) Connector	3-28
Figure 3-10.	VOCON Board Connector—J101	3-31
Figure 3-11.	Control Top Flex	3-32
Figure 3-12.	VOCON Transmit Audio Path	3-33
Figure 3-13.	VOCON Receive Audio Path	6-2
Figure 6-1.	13 MHz Clock Waveform	6-3
Figure 6-2.	16.8 MHz Buffer Input and Output Waveforms	6-4
Figure 6-3.	32.768 kHz Clock Outputs Waveforms	6-5
Figure 6-4.	SPI B Data Waveforms	6-6
Figure 6-5.	Receive Serial Audio Port (SAP) Waveforms	6-7
Figure 6-6.	Receive Baseband Interface Port (RX BBP) Waveforms	6-8
Figure 6-7.	Transmit Baseband Interface Port (TX BBP) Waveforms	8-3
Figure 8-1.	NUF3577 700–800 MHz Transceiver (RF) Board Overall Circuit Schematic	8-4
Figure 8-2.	NUF3577 700–800 MHz Antenna Switch and Harmonic Filter Circuits	8-5
Figure 8-3.	NUF3577 700–800 MHz Receiver Front End Circuit	8-6
Figure 8-4.	NUF3577 700–800 MHz Receiver Back End Circuit	8-7
Figure 8-5.	NUF3577 700–800 MHz Transmitter and Automatic Level Control Circuits	8-8
Figure 8-6.	NUF3577 700–800 MHz Frequency Generation Unit (Synthesizer) Circuit—1 of 2	8-9
Figure 8-7.	NUF3577 700–800 MHz Frequency Generation Unit (VCO) Circuit—2 of 2	8-10
Figure 8-8.	NUF3577 700–800 MHz Transceiver (RF) Board Layout—Side 1	8-11
Figure 8-9.	NUF3577 700–800 MHz Transceiver (RF) Board Layout—Side 2	8-17
Figure 8-10.	NUF3577C 700–800 MHz Transceiver (RF) Board Overall Circuit Schematic	8-18
Figure 8-11.	NUF3577C 700–800 MHz Antenna Switch and Harmonic Filter Circuits	8-19
Figure 8-12.	NUF3577C 700–800 MHz Receiver Front End Circuit	8-20
Figure 8-13.	NUF3577C 700–800 MHz Receiver Back End Circuit	8-21
Figure 8-14.	NUF3577C 700–800 MHz Transmitter and Automatic Level Control Circuits	8-22
Figure 8-15.	NUF3577C 700–800 MHz Frequency Generation Unit (Synthesizer) Circuit	8-23
Figure 8-16.	NUF3577C 700–800 MHz Frequency Generation Unit (VCO) Circuit	8-24
Figure 8-17.	NUF3577C 700–800 MHz Transceiver (RF) Board Layout—Side 1	8-25
Figure 8-18.	NUF3577C 700–800 MHz Transceiver (RF) Board Layout—Side 2	8-31
Figure 8-19.	NLD8910B VHF Transceiver (RF) Board Overall Circuit Schematic	8-32
Figure 8-20.	NLD8910B VHF DC Power Circuits	8-33
Figure 8-21.	NLD8910B VHF Antenna Switch and Harmonic Filter Circuits	8-34
Figure 8-22.	NLD8910B VHF Receiver Front End Circuit	8-35
Figure 8-23.	NLD8910B VHF Receiver Amplifier and Filter Circuit	8-36
Figure 8-24.	NLD8910B VHF Mixer and IF Filter Circuits	8-37
Figure 8-25.	NLD8910B VHF Receiver Back End Circuit	

Figure 8-26. NLD8910B VHF Transmitter and Automatic Level Control Circuits	8-38
Figure 8-27. NLD8910B VHF Frequency Generation Unit (Synthesizer) Circuit.....	8-39
Figure 8-28. NLD8910B VHF Frequency Generation Unit (VCO) Circuit.....	8-40
Figure 8-29. NLD8910B VHF Transceiver (RF) Board Layout—Side 1	8-41
Figure 8-30. NLD8910B VHF Transceiver (RF) Board Layout—Side 2	8-42
Figure 8-31. NLE4272A UHF Range 1 Transceiver (RF) Board Overall Circuit Schematic.....	8-48
Figure 8-32. NLE4272A UHF Range 1 Antenna Switch and Harmonic Filter Circuits	8-49
Figure 8-33. NLE4272A UHF Range 1 Receiver Front End (RX_FE) Circuit.....	8-50
Figure 8-34. NLE4272A UHF Range 1 Receiver Back End (RX_BE) Circuit.....	8-51
Figure 8-35. NLE4272A UHF Range 1 Transmitter Power Amplifier and Automatic Level Control (TX_ALC) Circuit8-52	
Figure 8-36. NLE4272A UHF Range 1 Frequency Generation Unit (Synthesizer) Circuit	8-53
Figure 8-37. NLE4272A UHF Range 1 Frequency Generation Unit (VCO) Circuit	8-54
Figure 8-38. NLE4272A UHF Range 1 Transceiver (RF) Board Layout—Side 1.....	8-55
Figure 8-39. NLE4272A UHF Range 1 Transceiver (RF) Board Layout—Side 2.....	8-56
Figure 8-40. NLE4278A UHF Range 1 Transceiver (RF) Board Overall Circuit Schematic.....	8-64
Figure 8-41. NLE4278A UHF Range 1 Antenna Switch and Harmonic Filter Circuits	8-65
Figure 8-42. NLE4278A UHF Range 1 Receiver Front End Circuit.....	8-66
Figure 8-43. NLE4278A UHF Range 1 Receiver Back End Circuit.....	8-67
Figure 8-44. NLE4278A UHF Range 1 Transmitter Power Amplifier and Automatic Level Control Circuit. 8-68	
Figure 8-45. NLE4278A UHF Range 1 Frequency Unit (Synthesizer) Circuit.....	8-69
Figure 8-46. NLE4278A UHF Range 1 Frequency Generation Unit (VCO) Circuit	8-70
Figure 8-47. NLE4278A UHF Range 1 Transceiver (RF) Board Layout—Side 1.....	8-71
Figure 8-48. NLE4278A UHF Range 1 Transceiver (RF) Board Layout—Side 2.....	8-72
Figure 8-49. NLE 4273A UHF Range 2 Tranceiver (RF) Board Overall Circuit Schematic.....	8-79
Figure 8-50. NLE 4273A UHF Range 2 D/C Power Circuit Schematic	8-80
Figure 8-51. NLE 4273A UHF Range 2 Antenna Switch and Harmonic Filter Circuit Schematic	8-81
Figure 8-52. NLE 4273A UHF Range 2 Receiver Front End Circuit Schematic.....	8-82
Figure 8-53. NLE 4273A UHF Range 2 Receiver Back End Circuit Schematic	8-83
Figure 8-54. NLE 4273A UHF Range 2 Receiver Amplifier and Filter Circuit Schematic.....	8-84
Figure 8-55. NLE 4273A UHF Range 2 Mixer and IF Filter Circuit Schematic.....	8-85
Figure 8-56. NLE 4273A UHF Range 2 Transmitter and Automatic Level Control Circuit Schematic	8-86
Figure 8-57. NLE 4273A UHF Range 2 Frequency Generation Unit (Synthesizer) Circuit Schematic ...	8-87
Figure 8-58. NLE 4273A UHF Range 2 Frequency Generation Unit (VCO) Circuit Schematic	8-88
Figure 8-59. NLE 4273A UHF Range 2 Transceiver Board Layout (Side 1) Schematic	8-89
Figure 8-60. NLE 4273A UHF Range 2 Transceiver (RF) Board Layout (Side 2) Schematic.....	8-90
Figure 8-61. NTN9564B VOCON Board Overall Schematic—1 of 2.....	8-96
Figure 8-62. NTN9564B VOCON Board Overall Schematic—2 of 2.....	8-97
Figure 8-63. NTN9564B VOCON Universal Connector Circuit	8-98
Figure 8-64. NTN9564B VOCON Flipper Circuit.....	8-99
Figure 8-65. NTN9564B VOCON Controller and Memory Circuits—1 of 2.....	8-100
Figure 8-66. NTN9564B VOCON Controller and Memory Circuits—2 of 2.....	8-101
Figure 8-67. NTN9564B VOCON Audio and DC Circuits.....	8-102
Figure 8-68. NTN9564B VOCON Board Layout—Side 1	8-103
Figure 8-69. NTN9564B VOCON Board Layout—Side 2	8-104
Figure 8-70. NTN9564C VOCON Board Overall Schematic—1 of 2.....	8-110
Figure 8-71. NTN9564C VOCON Board Overall Schematic—2 of 2.....	8-111
Figure 8-72. NTN9564C VOCON Universal Connector Circuit	8-112
Figure 8-73. NTN9564C VOCON Flipper Circuit.....	8-113
Figure 8-74. NTN9564C VOCON Controller and Memory Circuits—1 of 2.....	8-114
Figure 8-75. NTN9564C VOCON Controller and Memory Circuits—2 of 2.....	8-115
Figure 8-76. NTN9564C VOCON Audio and DC Circuits.....	8-116
Figure 8-77. NTN9564C VOCON Board Layout—Side 1	8-117

Figure 8-78. NTN9564C VOCON Board Layout—Side 2.....	8-118
Figure 8-79. NNTN4563A/B VOCON Board Overall Schematic—1 of 2.....	8-124
Figure 8-80. NNTN4563A/B VOCON Board Overall Schematic—2 of 2.....	8-125
Figure 8-81. NNTN4563A/B VOCON Universal Connector Circuit	8-126
Figure 8-82. NNTN4563A/B VOCON Flipper Circuit.....	8-127
Figure 8-83. NNTN4563A/B VOCON Controller and Memory Circuits—1 of 2.....	8-128
Figure 8-84. NNTN4563A/B VOCON Controller and Memory Circuits—2 of 2.....	8-129
Figure 8-85. NNTN4563A/B VOCON Audio and DC Circuits.....	8-130
Figure 8-86. NNTN4563A/B VOCON Board Layout—Side 1.....	8-131
Figure 8-87. NNTN4563A/B VOCON Board Layout—Side 2.....	8-132
Figure 8-88. NNTN4819A VOCON Board Overall Schematic—Sheet 1 of 2.....	8-139
Figure 8-89. NNTN4819A VOCON Board Overall Schematic—Sheet 2 of 2.....	8-140
Figure 8-90. NNTN4819A VOCON Universal Connector and ESD Circuits	8-141
Figure 8-91. NNTN4819A VOCON Flipper Circuit	8-142
Figure 8-92. NNTN4819A VOCON Controller and Memory Circuits—Sheet 1 of 2.....	8-143
Figure 8-93. NNTN4819A VOCON Controller and Memory Circuits—Sheet 2 of 2.....	8-144
Figure 8-94. NNTN4819A VOCON Audio/DC Circuits.....	8-145
Figure 8-95. NNTN4819A VOCON Board Layout—Side 1	8-146
Figure 8-96. NNTN4819A VOCON Board Layout—Side 2	8-147
Figure 8-97. NNTN4717D VOCON Board Overall Schematic—Sheet 1 of 2	8-153
Figure 8-98. NNTN4717D VOCON Board Overall Schematic—Sheet 2 of 2	8-154
Figure 8-99. NNTN4717D VOCON Board Universal Connector Circuit Schematic.....	8-155
Figure 8-100. NNTN4717D VOCON Board Flipper Circuit	8-156
Figure 8-101. NNTN4717D VOCON Board Controller and Memory Circuits—Sheet 1 of 2.....	8-157
Figure 8-102. NNTN4717D VOCON Board Controller and Memory Circuits—Sheet 2 of 2.....	8-158
Figure 8-103. NNTN4717D VOCON Board Audio/DC Circuits	8-159
Figure 8-104. NNTN4717D VOCON Board Layout—Side 1	8-160
Figure 8-105. NNTN4717D VOCON Board Layout—Side 2	8-161

Notes

List of Tables

Table 2-1.	Conventional Batteries.....	2-1
Table 2-2.	Smart Batteries	2-1
Table 2-3.	Transceiver Voltage Regulators.....	2-3
Table 2-4.	VOCON Board DC Power Distribution.....	2-4
Table 3-1.	Battery Connector J3.....	3-3
Table 3-2.	VOCON Connector P1.....	3-4
Table 3-3.	Power Control IC (U104) Pin Descriptions.....	3-11
Table 3-4.	Audio PA Status	3-24
Table 3-5.	Option-Select Functions	3-29
Table 3-6.	Encryption Module Software Kits and Algorithms	3-34
Table 4-1.	Recommended Service Tools	4-2
Table 4-2.	Standard Operating Bias.....	4-4
Table 4-3.	Power-Up Self-Check Error Codes	4-5
Table 4-4.	Power-Up Self-Check Diagnostic Actions.....	4-6
Table 5-1.	Troubleshooting Charts List	5-1
Table 6-1.	List of Waveforms	6-1
Table 7-1.	List of Tables of Board and IC Signals.....	7-1
Table 7-2.	J101 VOCON Board to Controls Flex Assembly.....	7-1
Table 7-3.	J107 VOCON Board to Keypad Module	7-3
Table 7-4.	J701 VOCON Board to Encryption Module.....	7-3
Table 7-5.	U402 FLASH Pinouts.....	7-5
Table 7-6.	U403 SRAM Pinouts.....	7-7
Table 7-7.	U401 Patriot MCU/DSP IC Pinouts.....	7-9
Table 7-8.	U301 Flipper IC Pinouts.....	7-18
Table 7-9.	U501 GCAP II IC Pinouts.....	7-20
Table 8-1.	List of Transceiver Schematics and Board Overlays	8-1
Table 8-2.	List of VOCON Schematics and Board Overlays.....	8-1

Notes

Commercial Warranty

Limited Warranty

MOTOROLA COMMUNICATION PRODUCTS

I. What This Warranty Covers And For How Long

MOTOROLA INC. ("MOTOROLA") warrants the MOTOROLA manufactured Communication Products listed below ("Product") against defects in material and workmanship under normal use and service for a period of time from the date of purchase as scheduled below:

ASTRO XTS 5000 Digital Portable Units	One (1) Year
Product Accessories	One (1) Year

Motorola, at its option, will at no charge either repair the Product (with new or reconditioned parts), replace it (with a new or reconditioned Product), or refund the purchase price of the Product during the warranty period provided it is returned in accordance with the terms of this warranty. Replaced parts or boards are warranted for the balance of the original applicable warranty period. All replaced parts of Product shall become the property of MOTOROLA.

This express limited warranty is extended by MOTOROLA to the original end user purchaser only and is not assignable or transferable to any other party. This is the complete warranty for the Product manufactured by MOTOROLA. MOTOROLA assumes no obligations or liability for additions or modifications to this warranty unless made in writing and signed by an officer of MOTOROLA. Unless made in a separate agreement between MOTOROLA and the original end user purchaser, MOTOROLA does not warrant the installation, maintenance or service of the Product.

MOTOROLA cannot be responsible in any way for any ancillary equipment not furnished by MOTOROLA which is attached to or used in connection with the Product, or for operation of the Product with any ancillary equipment, and all such equipment is expressly excluded from this warranty. Because each system which may use the Product is unique, MOTOROLA disclaims liability for range, coverage, or operation of the system as a whole under this warranty.

II. General Provisions

This warranty sets forth the full extent of MOTOROLA's responsibilities regarding the Product. Repair, replacement or refund of the purchase price, at MOTOROLA's option, is the exclusive remedy. THIS WARRANTY IS GIVEN IN LIEU OF ALL OTHER EXPRESS WARRANTIES. IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. IN NO EVENT SHALL MOTOROLA BE LIABLE FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF THE PRODUCT, FOR ANY LOSS OF USE, LOSS OF TIME, INCONVENIENCE, COMMERCIAL LOSS, LOST PROFITS OR SAVINGS OR OTHER INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE SUCH PRODUCT, TO THE FULL EXTENT SUCH MAY BE DISCLAIMED BY LAW.

III. State Law Rights

SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION OR EXCLUSIONS MAY NOT APPLY.

This warranty gives specific legal rights, and there may be other rights which may vary from state to state.

IV. How To Get Warranty Service

You must provide proof of purchase (bearing the date of purchase and Product item serial number) in order to receive warranty service and, also, deliver or send the Product item, transportation and insurance prepaid, to an authorized warranty service location. Warranty service will be provided by Motorola through one of its authorized warranty service locations. If you first contact the company which sold you the Product, it can facilitate your obtaining warranty service. You can also call Motorola at 1-888-567-7347 US/Canada.

V. What This Warranty Does Not Cover

- A. Defects or damage resulting from use of the Product in other than its normal and customary manner.
- B. Defects or damage from misuse, accident, water, or neglect.
- C. Defects or damage from improper testing, operation, maintenance, installation, alteration, modification, or adjustment.
- D. Breakage or damage to antennas unless caused directly by defects in material workmanship.
- E. A Product subjected to unauthorized Product modifications, disassemblies or repairs (including, without limitation, the addition to the Product of non-Motorola supplied equipment) which adversely affect performance of the Product or interfere with Motorola's normal warranty inspection and testing of the Product to verify any warranty claim.
- F. Product which has had the serial number removed or made illegible.
- G. Rechargeable batteries if:
 - any of the seals on the battery enclosure of cells are broken or show evidence of tampering.
 - the damage or defect is caused by charging or using the battery in equipment or service other than the Product for which it is specified.
- H. Freight costs to the repair depot.
- I. A Product which, due to illegal or unauthorized alteration of the software/firmware in the Product, does not function in accordance with MOTOROLA's published specifications or the FCC type acceptance labeling in effect for the Product at the time the Product was initially distributed from MOTOROLA.
- J. Scratches or other cosmetic damage to Product surfaces that does not affect the operation of the Product.
- K. Normal and customary wear and tear.

VI. Patent And Software Provisions

MOTOROLA will defend, at its own expense, any suit brought against the end user purchaser to the extent that it is based on a claim that the Product or parts infringe a United States patent, and MOTOROLA will pay those costs and damages finally awarded against the end user purchaser in any such suit which are attributable to any such claim, but such defense and payments are conditioned on the following

- A. that MOTOROLA will be notified promptly in writing by such purchaser of any notice of such claim;
- B. that MOTOROLA will have sole control of the defense of such suit and all negotiations for its settlement or compromise; and
- C. should the Product or parts become, or in MOTOROLA's opinion be likely to become, the subject of a claim of infringement of a United States patent, that such purchaser will permit MOTOROLA, at its option and expense, either to procure for such purchaser the right to continue using the Product or parts or to replace or modify the same so that it becomes noninfringing or to grant such purchaser a credit for the Product or parts as depreciated and accept its return. The depreciation will be an equal amount per year over the lifetime of the Product or parts as established by MOTOROLA.

MOTOROLA will have no liability with respect to any claim of patent infringement which is based upon the combination of the Product or parts furnished hereunder with software, apparatus or devices not furnished by MOTOROLA, nor will MOTOROLA have any liability for the use of ancillary equipment or software not furnished by MOTOROLA which is attached to or used in connection with the Product. The foregoing states the entire liability of MOTOROLA with respect to infringement of patents by the Product or any parts thereof.

Laws in the United States and other countries preserve for MOTOROLA certain exclusive rights for copyrighted MOTOROLA software such as the exclusive rights to reproduce in copies and distribute copies of such Motorola software. MOTOROLA software may be used in only the Product in which the software was originally embodied and such software in such Product may not be replaced, copied, distributed, modified in any way, or used to produce any derivative thereof. No other use including, without limitation, alteration, modification, reproduction, distribution, or reverse engineering of such MOTOROLA software or exercise of rights in such MOTOROLA software is permitted. No license is granted by implication, estoppel or otherwise under MOTOROLA patent rights or copyrights.


VII. Governing Law

This Warranty is governed by the laws of the State of Illinois, USA.

Notes

Model Numbering, Charts, and Specifications

Portable Radio Model Numbering System

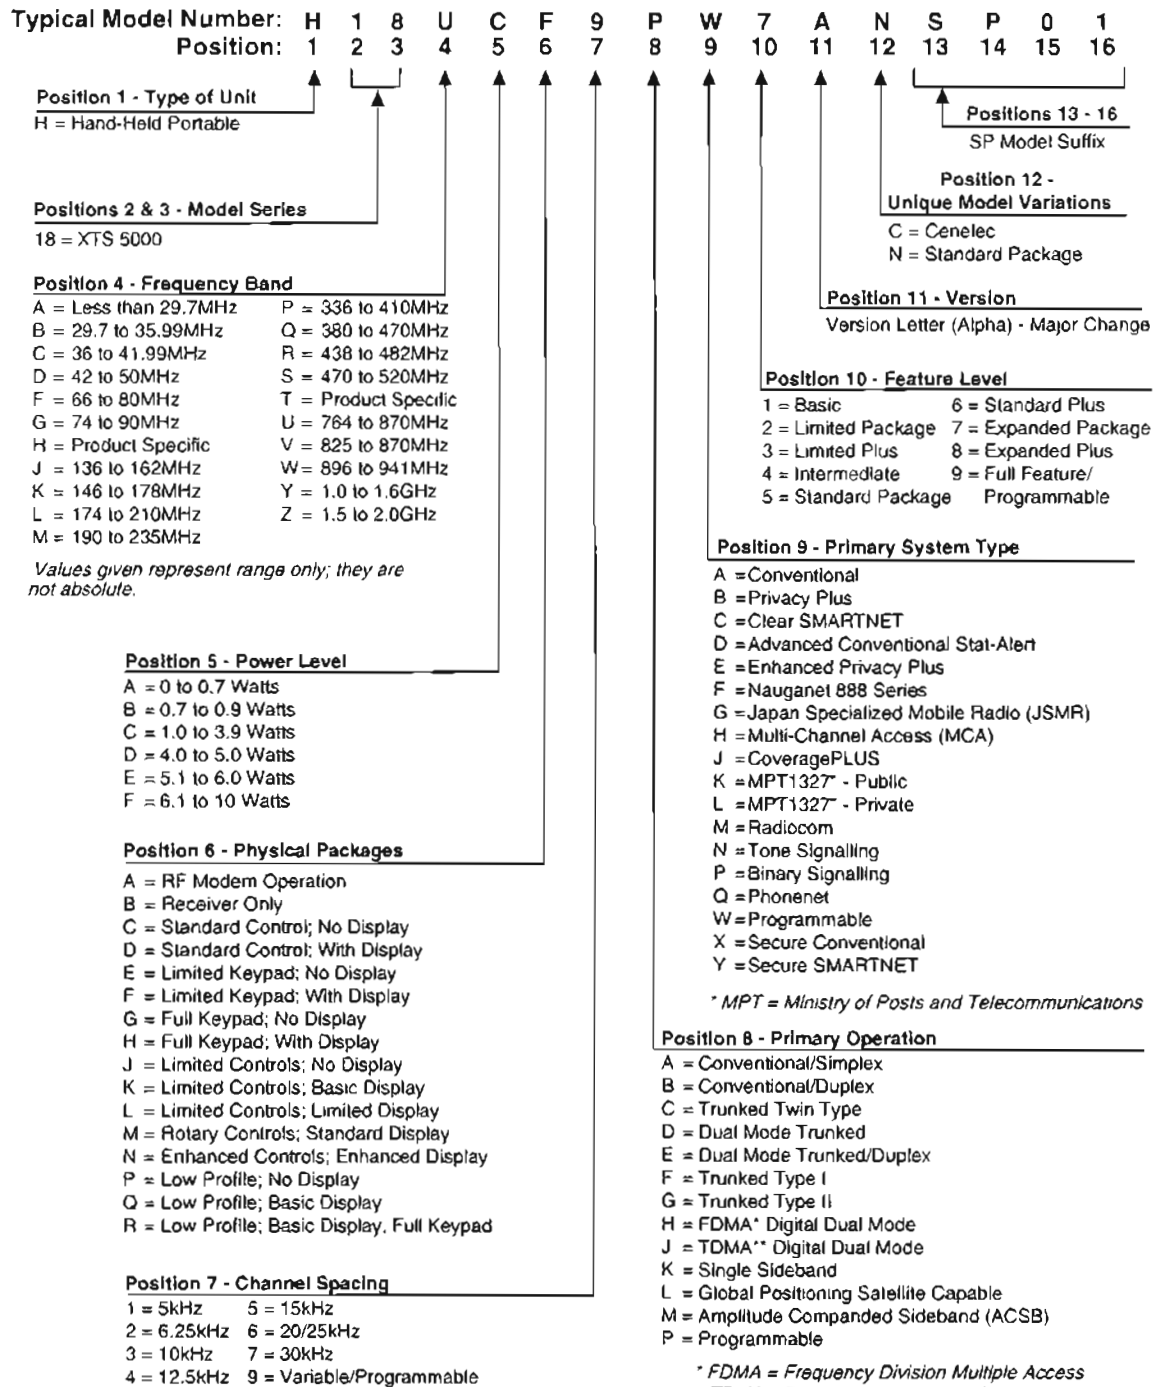

ASTRO XTS 5000 VHF Model Chart

MODEL NUMBER				DESCRIPTION
			H18KEC9PW5AN	VHF 1-6 Watts ASTRO XTS 5000 Model I
			H18KEF9PW6AN	VHF 1-6 Watts ASTRO XTS 5000 Model II
			H18KEH9PW7AN	VHF 1-6 Watts ASTRO XTS 5000 Model III
ITEM NUMBER				DESCRIPTION
X	X	X	NLD8910_	Board, Transceiver (VHF)
X	X	X	NNTN4563_ or, NNTN4717_	Board, VOCON* Board, VOCON*
X	X	X	—	Belt Clip Kit (Refer to the Basic Service Manual accessories appendix)
X	X	X	—	Battery (Refer to Table 2-1 and Table 2-2 on page 2-1)
X			NTN9682_	Kit, Front Cover, Model I
	X		NTN9681_	Kit, Front Cover, Model II
		X	NTN9680_	Kit, Front Cover, Model III
X	X	X	—	Antenna, VHF (Refer to the Basic Service Manual accessories appendix)
X	X	X	0985973B02	Assembly, B+ Connector
X	X	X	1505579Z01	Cover, Accessory Connector
X			2685567D01	Assembly, VOCON Shield, Model I
	X		2685567D02	Assembly, VOCON Shield-Keypad, Model II
		X	2685567D03	Assembly, VOCON Shield-Keypad, Model III
X	X	X	2685220D08	Shield, RF (Transceiver) Board
X	X	X	2785219D01	Assembly, Casting
X	X	X	2885866A01	Connector, Compression, 26-Pin
X	X	X	3285900E01	Gasket, Antenna O-Ring
X	X	X	3205349Z03	Seal, Main
X	X	X	3205351Z02	Seal, B+
X	X	X	3285877B02	Seal, Port
X	X	X	3385873B01	Label, Port
	X	X	7285726C02	Module, LCD Display
	X	X	7585189D01	Pad, Display Locator
X	X	X	7585936D02	Pad, RF
X	X	X	7585139E01	Pad, Battery holder
	X		7585104D02	Keypad, Model II
		X	7585104D01	Keypad, Model III

Notes:

X = Item Included

- * = The radio's model number, FLASHcode, Host code, and DSP code are required when placing an order for the VOCON Board.
 - The model number and (sometimes) the FLASHcode can be found on the FCC label on the back of the radio.
 - The model number, Host code, DSP code, and (sometimes) the FLASHcode can be found by putting a Model II or III radio into the Test Mode.
 - The model number, Host code, DSP code, and FLASHcode can be found by using the Programming Cable (RKN4105_ or RKN4106_) and the CPS to read a Model I, II, or III radio.

ASTRO XTS 5000 R (Ruggedized) VHF Model Chart

MODEL NUMBER							DESCRIPTION	
H18KEC9PW5AN	w/Q155FE	Opt					Ruggedized VHF 1-6 Watts ASTRO XTS 5000 Model I	
H18KEF9PW6AN	w/Q155FF	Opt					Ruggedized VHF 1-6 Watts ASTRO XTS 5000 Model II	
H18KEH9PW7AN	w/Q155FG	Opt					Ruggedized VHF 1-6 Watts ASTRO XTS 5000 Model III	
H18KEC9PW5AN	w/Q155FS	Opt					Ruggedized Yellow VHF 1-6 Watts ASTRO XTS 5000 Model I	
H18KEF9PW6AN	w/Q155FT	Opt					Ruggedized Yellow VHF 1-6 Watts ASTRO XTS 5000 Model II	
H18KEH9PW7AN	w/Q155FU	Opt					Ruggedized Yellow VHF 1-6 Watts ASTRO XTS 5000 Model III	
							ITEM NUMBER	DESCRIPTION
X	X	X	X	X	X	X	NLD8910_	Board, Transceiver (VHF)
X	X	X	X	X	X	X	NNTN4563_ or, NNTN4717_	Board, VOCON* Board, VOCON*
X	X	X	X	X	X	X	—	Belt Clip Kit (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X	X	—	Battery (Refer to Table 2-1 and Table 2-2 on page 2-1)
X							NNTN4059_	Kit, Front Cover, Model I, Ruggedized
	X						NNTN4060_	Kit, Front Cover, Model II, Ruggedized
		X					NNTN4061_	Kit, Front Cover, Model III, Ruggedized
			X				NTN9685_	Kit, Yellow Front Cover, Model I, Ruggedized
				X			NTN9684_	Kit, Yellow Front Cover, Model II, Ruggedized
					X		NTN9683_	Kit, Yellow Front Cover, Model III, Ruggedized
X	X	X	X	X	X	X	—	Antenna, VHF (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X	X	0985973B02	Assembly, B+ Connector
X	X	X	X	X	X	X	1505579Z01	Cover, Accessory Connector
X			X				2685567D01	Assembly, VOCON Shield, Model I
	X			X			2685567D02	Assembly, VOCON Shield-Keypad, Model II
		X			X		2685567D03	Assembly, VOCON Shield-Keypad, Model III
X	X	X	X	X	X	X	2685220D08	Shield, RF (Transceiver) Board
X	X	X	X	X	X	X	2785219D04	Assembly, Ruggedized Casting
X	X	X	X	X	X	X	2885866A01	Connector, Compression, 26-Pin
X	X	X	X	X	X	X	3285900E01	Gasket, Antenna O-Ring
X	X	X	X	X	X	X	3205349Z03	Seal, Main
X	X	X	X	X	X	X	3205351Z02	Seal, B+
X	X	X	X	X	X	X	3285877B02	Seal, Port
X	X	X	X	X	X	X	3385873B01	Label, Port
	X	X		X	X		7285726C02	Module, LCD Display
	X	X		X	X		7585189D01	Pad, Display Locator
X	X	X	X	X	X	X	7585936D02	Pad, RF
X	X	X	X	X	X	X	7585139E01	Pad, Battery holder
X	X	X	X	X	X	X	3285688D01	Plug, Vacuum test port
	X			X			7585104D02	Keypad, Model II
		X			X		7585104D01	Keypad, Model III

Notes:

X = Item Included

- * The radio's model number, FLASHcode, Host code, and DSP code are required when placing an order for the VOCON Board.
- The model number and (sometimes) the FLASHcode can be found on the FCC label on the back of the radio.
- The model number, Host code, DSP code, and (sometimes) the FLASHcode can be found by putting a Model II or III radio into the Test Mode.
- The model number, Host code, DSP code, and FLASHcode can be found by using the Programming Cable (RKN4105_ or RKN4106_) and the CPS to read a Model I, II, or III radio.

ASTRO XTS 5000 UHF Range 1 Model Chart

MODEL NUMBER							DESCRIPTION	
H18QDC9PW5AN							UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model I	
H18QDF9PW6AN							UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model II	
H18QDH9PW7AN							UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model III	
H18QCC9PW5AN							UHF Range 1, Low Power, 20 mW - 2 Watts ASTRO XTS 5000 Model I	
H18QCF9PW6AN							UHF Range 1, Low Power, 20 mW - 2 Watts ASTRO XTS 5000 Model II	
H18QCH9PW7AN							UHF Range 1, Low Power, 20 mW - 2 Watts ASTRO XTS 5000 Model III	
							ITEM NUMBER	DESCRIPTION
X	X	X					NLE4272_	Board, Transceiver (UHF)
			X	X	X		NLE4278_	Board, Transceiver (UHF) Low Power
X	X	X	X	X	X		NNTN4819_ or, NNTN4717_	Board, VOCON* Board, VOCON*
X	X	X	X	X	X		—	Belt Clip Kit (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X		—	Battery (Refer to Table 2-1 and Table 2-2 on page 2-1)
X			X				NTN9682_	Kit, Front Cover, Model I
	X			X			NTN9681_	Kit, Front Cover, Model II
		X			X		NTN9680_	Kit, Front Cover, Model III
X	X	X	X	X	X		—	Antenna, UHF (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X		0985973B02	Assembly, B+ Connector
X	X	X	X	X	X		1505579Z01	Cover, Accessory Connector
X			X				2685567D01	Assembly, VOCON Shield, Model I
	X			X			2685567D02	Assembly, VOCON Shield-Keypad, Model II
		X			X		2685567D03	Assembly, VOCON Shield-Keypad, Model III
X	X	X	X	X	X		2685220D08	Shield, RF (Transceiver) Board
X	X	X	X	X	X		2785219D01	Assembly, Casting
X	X	X	X	X	X		2885866A01	Connector, Compression, 26-Pin
X	X	X	X	X	X		3285900E01	Gasket, Antenna O-Ring
X	X	X	X	X	X		3205349Z03	Seal, Main
X	X	X	X	X	X		3205351Z02	Seal, B+
X	X	X	X	X	X		3285877B02	Seal, Port
X	X	X	X	X	X		3385873B01	Label, Port
	X	X		X	X		7285726C03	Module, LCD Display
	X	X		X	X		7585189D01	Pad, Display Locator
X	X	X	X	X	X		7585936D04	Pad, RF
X	X	X	X	X	X		7585139E01	Pad, Battery holder
	X			X			7585104D02	Keypad, Model II
		X			X		7585104D01	Keypad, Model III

Notes:

X = Item Included

- * = The radio's model number, FLASHcode, Host code, and DSP code are required when placing an order for the VOCON Board.
- The model number and (sometimes) the FLASHcode can be found on the FCC label on the back of the radio.
- The model number, Host code, DSP code, and (sometimes) the FLASHcode can be found by putting a Model II or III radio into the Test Mode.
- The model number, Host code, DSP code, and FLASHcode can be found by using the Programming Cable (RKN4105_ or RKN4106_) and the CPS to read a Model I, II, or III radio.

ASTRO XTS 5000 R (Ruggedized) UHF Range 1 Model Chart

MODEL NUMBER										DESCRIPTION	
H18QDC9PW5AN	w/Q155FE	Opt								Ruggedized UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model I	
H18QDF9PW6AN	w/Q155FF	Opt								Ruggedized UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model II	
H18QDH9PW7AN	w/Q155FG	Opt								Ruggedized UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model III	
H18QDC9PW5AN	w/Q155FS	Opt								Ruggedized Yellow UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model I	
H18QDF9PW6AN	w/Q155FU	Opt								Ruggedized Yellow UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model II	
H18QDH9PW7AN	w/Q155FU	Opt								Ruggedized Yellow UHF Range 1, 1-5 Watts ASTRO XTS 5000 Model III	
H18QCC9PW5AN	w/Q155HW	Opt								Ruggedized UHF R1, Low Pwr, 20 mW-2 Watts ASTRO XTS 5000 Model I	
H18QCF9PW6AN	w/Q155HX	Opt								Ruggedized UHF R1, Low Pwr, 20 mW-2 Watts ASTRO XTS 5000 Model II	
H18QCH9PW7AN	w/Q155HY	Opt								Ruggedized UHF R1, Low Pwr, 20 mW-2 Watts ASTRO XTS 5000 Model III	
ITEM NUMBER										DESCRIPTION	
X	X	X	X	X	X	X	X	X	X	NLE4272_	Board, Transceiver (UHF)
X	X	X	X	X	X	X	X	X	X	NLE4278_	Board, Transceiver (UHF) Low Power
X	X	X	X	X	X	X	X	X	X	NNTN4819_ or, NNTN4717_	Board, VOCON* Board, VOCON*
X	X	X	X	X	X	X	X	X	X	—	Belt Clip Kit (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X	X	X	X	X	—	Battery (Refer to Table 2-1 and Table 2-2 on page 2-1)
X						X				NNTN4059_	Kit, Front Cover, Model I, Ruggedized
	X						X			NNTN4060_	Kit, Front Cover, Model II, Ruggedized
		X						X		NNTN4061_	Kit, Front Cover, Model III, Ruggedized
			X							NTN9685_	Kit, Yellow Front Cover, Model I, Ruggedized
				X						NTN9684_	Kit, Yellow Front Cover, Model II, Ruggedized
					X					NTN9683_	Kit, Yellow Front Cover, Model III, Ruggedized
X	X	X	X	X	X	X	X	X	X	—	Antenna, UHF (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X	X	X	X	X	0985973B02	Assembly, B+ Connector
X	X	X	X	X	X	X	X	X	X	1505579Z01	Cover, Accessory Connector
X			X			X				2685567D01	Assembly, VOCON Shield, Model I
	X			X			X			2685567D02	Assembly, VOCON Shield-Keypad, Model II
		X			X			X		2685567D03	Assembly, VOCON Shield-Keypad, Model III
X	X	X	X	X	X	X	X	X	X	2685220D08	Shield, RF (Transceiver) Board
X	X	X	X	X	X	X	X	X	X	2785219D04	Assembly, Ruggedized Casting
X	X	X	X	X	X	X	X	X	X	2885868A01	Connector, Compression, 26-Pin
X	X	X	X	X	X	X	X	X	X	3285900E01	Gasket, Antenna O-Ring
X	X	X	X	X	X	X	X	X	X	3205349Z03	Seal, Main
X	X	X	X	X	X	X	X	X	X	3205351Z02	Seal, B+
X	X	X	X	X	X	X	X	X	X	3285877B02	Seal, Port
X	X	X	X	X	X	X	X	X	X	3385873B01	Label, Port
	X	X		X	X		X	X		7285726C03	Module, LCD Display
	X	X		X	X		X	X		7585189D01	Pad, Display Locator
X	X	X	X	X	X	X	X	X	X	7585936D04	Pad, RF
X	X	X	X	X	X	X	X	X	X	7585139E01	Pad, Battery holder
X	X	X	X	X	X	X	X	X	X	3285688D01	Plug, Vacuum test port
	X			X			X			7585104D02	Keypad, Model II
		X			X			X		7585104D01	Keypad, Model III

Notes:

X = Item Included

* = The radio's model number, FLASHcode, Host code, and DSP code are required when placing an order for the VOCON Board.

• The model number and (sometimes) the FLASHcode can be found on the FCC label on the back of the radio.

• The model number, Host code, DSP code, and (sometimes) the FLASHcode can be found by putting a Model II or III radio into the Test Mode.

• The model number, Host code, DSP code, and FLASHcode can be found by using the Programming Cable (RKN4105_ or RKN4106_) and the CPS to read a Model I, II, or III radio.

ASTRO XTS 5000 R (Ruggedized) UHF Range 2 Model Chart

MODEL NUMBER							DESCRIPTION
X	X	X	X	X	X	X	Ruggedized UHF Range 2, 1-5 Watts ASTRO XTS 5000 Model I
X	X	X	X	X	X	X	Ruggedized UHF Range 2, 1-5 Watts ASTRO XTS 5000 Model II
X	X	X	X	X	X	X	Ruggedized UHF Range 2, 1-5 Watts ASTRO XTS 5000 Model III
X	X	X	X	X	X	X	Ruggedized Yellow UHF Range 2, 1-5 Watts ASTRO XTS 5000 Model I
X	X	X	X	X	X	X	Ruggedized Yellow UHF Range 2, 1-5 Watts ASTRO XTS 5000 Model II
X	X	X	X	X	X	X	Ruggedized Yellow UHF Range 2, 1-5 Watts ASTRO XTS 5000 Model III
ITEM NUMBER							DESCRIPTION
X	X	X	X	X	X	X	NLE4273_ Board, Transceiver (UHF R2)
X	X	X	X	X	X	X	NNTN4717_ Board, VOCON*
X	X	X	X	X	X	X	— Belt Clip Kit (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X	X	— Battery (Refer to Table 2-1 and Table 2-2 on page 2-1)
X							NNTN4059_ Kit, Front Cover, Model I, Ruggedized
	X						NNTN4060_ Kit, Front Cover, Model II, Ruggedized
		X					NNTN4061_ Kit, Front Cover, Model III, Ruggedized
			X				NTN9685_ Kit, Yellow Front Cover, Model I, Ruggedized
				X			NTN9684_ Kit, Yellow Front Cover, Model II, Ruggedized
					X		NTN9683_ Kit, Yellow Front Cover, Model III, Ruggedized
X	X	X	X	X	X	X	— Antenna, UHF (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X	X	0985973B02 Assembly, B+ Connector
X	X	X	X	X	X	X	1505579Z01 Cover, Accessory Connector
X			X				2685567D01 Assembly, VOCON Shield, Model I
	X			X			2685567D02 Assembly, VOCON Shield-Keypad, Model II
		X			X		2685567D03 Assembly, VOCON Shield-Keypad, Model III
X	X	X	X	X	X	X	2685220D02 Shield, RF (Transceiver) Board
X	X	X	X	X	X	X	2785219D04 Assembly, Ruggedized Casting
X	X	X	X	X	X	X	2885866A01 Connector, Compression, 26-Pin
X	X	X	X	X	X	X	3205082E96 Gasket, Antenna O-Ring
X	X	X	X	X	X	X	3205349Z03 Seal, Main
X	X	X	X	X	X	X	3205351Z02 Seal, B+ Ruggedized
X	X	X	X	X	X	X	3285877B02 Seal, Port
X	X	X	X	X	X	X	3385873B01 Label, Port
	X	X		X	X		7285726C03 Module, LCD Display
	X	X		X	X		7585189D01 Pad, Display Locator
	X			X			7585104D02 Keypad, Model II
		X			X		7585104D01 Keypad, Model III

Notes:

X = Item Included

- * = The radio's model number, FLASHcode, Host code, and DSP code are required when placing an order for the VOCON Board.
- The model number and (sometimes) the FLASHcode can be found on the FCC label on the back of the radio.
- The model number, Host code, DSP code, and (sometimes) the FLASHcode can be found by putting a Model II or III radio into the Test Mode.
- The model number, Host code, DSP code, and FLASHcode can be found by using the Programming Cable (RKN4105_ or RKN4106_) and the CPS to read a Model I, II, or III radio.

ASTRO XTS 5000 700–800 MHz Model Chart

MODEL NUMBER				DESCRIPTION
H18UCC9PW5AN				700/800 MHz 1-3 Watts ASTRO XTS 5000 Model I
H18UCF9PW6AN				700/800 MHz 1-3 Watts ASTRO XTS 5000 Model II
H18UCH9PW7AN				700/800 MHz 1-3 Watts ASTRO XTS 5000 Model III
ITEM NUMBER				DESCRIPTION
X	X	X	NUF3577_	Board, Transceiver (700/800 MHz)
X	X	X	NTN9564_ or, NNTN4717_	Board, VOCON* Board, VOCON*
X	X	X	—	Belt Clip Kit (Refer to the Basic Service Manual accessories appendix)
X	X	X	—	Battery (Refer to Table 2-1 and Table 2-2 on page 2-1)
X			NTN9682_	Kit, Front Cover, Model I
	X		NTN9681_	Kit, Front Cover, Model II
		X	NTN9680_	Kit, Front Cover, Model III
X	X	X	—	Antenna, 700/800 MHz (Refer to the Basic Service Manual accessories appendix)
X	X	X	0985973B02	Assembly, B+ Connector
X	X	X	1505579Z01	Cover, Accessory Connector
X			2685567D01	Assembly, VOCON Shield, Model I
	X		2685567D02	Assembly, VOCON Shield-Keypad, Model II
		X	2685567D03	Assembly, VOCON Shield-Keypad, Model III
X	X	X	2685220D08	Shield, RF (Transceiver) Board
X	X	X	2785219D01	Assembly, Casting
X	X	X	2885866A01	Connector, Compression, 26-Pin
X	X	X	3285900E01	Gasket, Antenna O-Ring
X	X	X	3205349Z03	Seal, Main
X	X	X	3205351Z02	Seal, B+
X	X	X	3285877B02	Seal, Port
X	X	X	3385873B01	Label, Port
	X	X	7285726C01 or, 7285726C02	Module, LCD Display (for use only with the NTN9564_VOCON board) Module, LCD Display (for use only with the NNTN4717_VOCON board)
	X	X	7585189D01	Pad, Display Locator
X	X	X	7585936D04	Pad, RF
X	X	X	7585139E01	Pad, Battery holder
	X		7585104D02	Keypad, Model II
		X	7585104D01	Keypad, Model III

Notes:

X = Item Included

- * = The radio's model number, FLASHcode, Host code, and DSP code are required when placing an order for the VOCON Board.
- The model number and (sometimes) the FLASHcode can be found on the FCC label on the back of the radio.
- The model number, Host code, DSP code, and (sometimes) the FLASHcode can be found by putting a Model II or III radio into the Test Mode.
- The model number, Host code, DSP code, and FLASHcode can be found by using the Programming Cable (RKN4105_ or RKN4106_) and the CPS to read a Model I, II, or III radio.

ASTRO XTS 5000 R (Ruggedized) 700–800 MHz Model Chart

MODEL NUMBER							DESCRIPTION	
H18UCC9PW5AN w/Q155FP Opt							Ruggedized 700/800 MHz 1-3 Watts ASTRO XTS 5000 Model I	
H18UCF9PW6AN w/Q155FQ Opt							Ruggedized 700/800 MHz 1-3 Watts ASTRO XTS 5000 Model II	
H18UCH9PW7AN w/Q155FR Opt							Ruggedized 700/800 MHz 1-3 Watts ASTRO XTS 5000 Model III	
H18UCC9PW5AN w/Q155GB Opt							Ruggedized Yellow 700/800 MHz 1-3 Watts ASTRO XTS 5000 Model I	
H18UCF9PW6AN w/Q155GC Opt							Ruggedized Yellow 700/800 MHz 1-3 Watts ASTRO XTS 5000 Model II	
H18UCH9PW7AN w/Q155GD Opt							Ruggedized Yellow 700/800 MHz 1-3 Watts ASTRO XTS 5000 Model III	
							ITEM NUMBER	DESCRIPTION
X	X	X	X	X	X		NUF3577_	Board, Transceiver (700/800 MHz)
X	X	X	X	X	X		NTN9564_ or, NNTN4717_	Board, VOCON* Board, VOCON*
X	X	X	X	X	X		—	Belt Clip Kit (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X		—	Battery (Refer to Table 2-1 and Table 2-2 on page 2-1)
X							NNTN4059_	Kit, Front Cover, Model I, Ruggedized
	X						NNTN4060_	Kit, Front Cover, Model II, Ruggedized
		X					NNTN4061_	Kit, Front Cover, Model III, Ruggedized
			X				NTN9685_	Kit, Yellow Front Cover, Model I, Ruggedized
				X			NTN9684_	Kit, Yellow Front Cover, Model II, Ruggedized
					X		NTN9683_	Kit, Yellow Front Cover, Model III, Ruggedized
X	X	X	X	X	X		—	Antenna, 700/800 MHz (Refer to the Basic Service Manual accessories appendix)
X	X	X	X	X	X		0985973B02	Assembly, B+ Connector
X	X	X	X	X	X		1505579Z01	Cover, Accessory Connector
X			X				2685567D01	Assembly, VOCON Shield, Model I
	X			X			2685567D02	Assembly, VOCON Shield-Keypad, Model II
		X			X		2685567D03	Assembly, VOCON Shield-Keypad, Model III
X	X	X	X	X	X		2685220D08	Shield, RF (Transceiver) Board
X	X	X	X	X	X		2785219D04	Assembly, Ruggedized Casting
X	X	X	X	X	X		2885866A01	Connector, Compression, 26-Pin
X	X	X	X	X	X		3285900E01	Gasket, Antenna O-Ring
X	X	X	X	X	X		3205349Z03	Seal, Main
X	X	X	X	X	X		3205351Z02	Seal, B+
X	X	X	X	X	X		3285877B02	Seal, Port
X	X	X	X	X	X		3385873B01	Label, Port
	X	X		X	X		7285726C01 or, 7285726C02	Module, LCD Display (for use only with the NTN9564_VOCON board) Module, LCD Display (for use only with the NNTN4717_VOCON board)
	X	X		X	X		7585189D01	Pad, Display Locator
X	X	X	X	X	X		7585936D04	Pad, RF
X	X	X	X	X	X		7585139E01	Pad, Battery holder
X	X	X	X	X	X		3285688D01	Plug, Vacuum test port
	X			X			7585104D02	Keypad, Model II
		X			X		7585104D01	Keypad, Model III

Notes:

X = Item Included

- * = The radio's model number, FLASHcode, Host code, and DSP code are required when placing an order for the VOCON Board.
- The model number and (sometimes) the FLASHcode can be found on the FCC label on the back of the radio.
- The model number, Host code, DSP code, and (sometimes) the FLASHcode can be found by putting a Model II or III radio into the Test Mode.
- The model number, Host code, DSP code, and FLASHcode can be found by using the Programming Cable (RKN4105_ or RKN4106_) and the CPS to read a Model I, II, or III radio.

Specifications for VHF Radios

All specifications are per Telecommunications Industries Association TIA-603 unless otherwise noted.

GENERAL		RECEIVER	TRANSMITTER
FCC Designation:	AZ489FT3804	Frequency Range:	136-174 MHz
Temperature Range:			
Operating:	-30°C to +80°C	Bandwidth:	38 MHz
Storage:	-40°C to +85°C		
Power Supply: Nickel-Cadmium Battery (NiCd) or Nickel-Metal-Hydride Battery (NiMH) or Lithium-Ion Battery (Li-Ion)		Usable Sensitivity (typical) (12 dB SINAD):	0.20 µV
		Intermodulation (typical):	-75 dB
Battery Voltage:		Selectivity (typical):	
Nominal:	7.5 Vdc	(25/30 kHz Channel):	-75 dB
Range:	6 to 9 Vdc	(12.5 kHz Channel):	-63 dB
Transmit Current Drain (Typical):	2100 mA	Spurious Rejection (typical):	-75 dB
Receive Current Drain (Rated Audio):	240 mA	Frequency Stability (-30/+60°C; 25°C reference):	±0.0002%
Standby Current Drain:	80 mA		
Recommended Battery:		Rated Audio:	500 mW
Smart NiMH:	NNTN4435_	FM Hum and Noise (typical):	
or Ultra-High-Capacity NiCd:	NTN8294_	25 kHz	-55 dB
or Extended-Capacity NiMH:	NTN8293_	12.5 kHz	-49 dB
or Li-Ion:	NTN8610_		
or Ultra-High-Capacity NiCd FM:	NTN8295_	Distortion (typical):	1.5%
or Ultra-High-Capacity NiMH FM:	NTN8299_	Channel Spacing:	12.5/25 kHz
Optional FM (Factory Mutual) Battery:			
FM Intrinsically Safe: Class I, II, III, Division 1, Groups C, D, E, F, and G. FM Non-incendive. Class 1, Division 2, Groups A, B, C, and D.			
Dimensions (H x W x D):			
Note: 2.44" = width at PTT; 2.34" = width at bottom; 1.83" = depth at speaker; 0.97" = depth at keypad			
Without Battery (Radio Only):			
6.58" x 2.44" x 1.83"/6.58" x 2.34" x 0.97"			
(167.13 mm x 61.90 mm x 48.42 mm/ 167.13 mm x 59.49 mm x 24.56 mm)			
With Battery:			
6.58" x 2.44" x 1.83"/6.58" x 2.34" x 1.65"			
(167.13 mm x 61.90 mm x 48.42 mm/ 167.13 mm x 59.49 mm x 41.97 mm)			
Weight: (w/ Antenna):			
Less Battery:	14.10 oz (383 gm)		
With Ultra-High Cap. NiCd:	25.19 oz (693 gm)		
With Li-Ion:	20.41 oz (583 gm)		
With Ultra-High Cap. NiMH:	23.45 oz (644 gm)		
With Extended-Cap. NiMH:	24.04 oz (682 gm)		

Specifications subject to change without notice.

Specifications for UHF Range 1 Radios

All specifications are per Telecommunications Industries Association TIA-603 unless otherwise noted.

GENERAL		RECEIVER	TRANSMITTER
FCC Designation:	AZ489FT4855	Frequency Range:	380-470 MHz
Temperature Range:			
Operating:	-30°C to +60°C	Bandwidth:	90 MHz
Storage:	-40°C to +85°C	Usable Sensitivity (typical) (12 dB SINAD):	0.25 µV
Power Supply: Nickel-Cadmium Battery (NiCd) or Nickel-Metal-Hydride Battery (NiMH) or Lithium-Ion Battery (Li-Ion)		Intermodulation (typical):	-75 dB
Battery Voltage:		Selectivity (typical): (25/30 kHz Channel):	-78 dB
Nominal:	7.5 Vdc	(12.5 kHz Channel):	-80 dB
Range:	6 to 9 Vdc	Spurious Rejection (typical):	-80 dB
Transmit Current Drain (Typical):	2100 mA	Frequency Stability (-30/+60°C; 25°C reference):	±0.0002%
Receive Current Drain (Rated Audio):	240 mA	Rated Audio:	500 mW
Standby Current Drain:	80 mA	FM Hum and Noise (typical):	25 kHz -54 dB 12.5 kHz -45 dB
Recommended Battery:		Distortion (typical):	1.0%
Smart NIMH:	NNTN4435	Channel Spacing:	12.5/25 kHz
or Ultra-High-Capacity NiCd:	NTN8294		
or Extended-Capacity NIMH:	NTN8293		
or Li-Ion:	NTN8610		
or Ultra-High-Capacity NiCd FM:	NTN8295*		
or Ultra-High-Capacity NIMH FM:	NTN8299*		
Optional FM (Factory Mutual) Battery:			
* FM Intrinsically Safe.			
Dimensions (H x W x D):			
Note 2.44" = width at PTT; 2.34" = width at bottom, 1.83" = depth at speaker; 0.97" = depth at keypad			
Without Battery (Radio Only):			
6.58" x 2.44" x 1.83"/6.58" x 2.34" x 0.97"			
(167.13 mm x 61.90 mm x 46.42 mm/ 167.13 mm x 59.49 mm x 24.56 mm)			
With Battery:			
6.58" x 2.44" x 1.83"/6.58" x 2.34" x 1.65"			
(167.13 mm x 61.90 mm x 46.42 mm/ 167.13 mm x 59.49 mm x 41.97 mm)			
Weight: (w/ Antenna):			
Less Battery:	14.10 oz (383 gm)		
With Ultra-High Cap. NiCd:	25.19 oz (693 gm)		
With Li-Ion:	20.41 oz (583 gm)		
With Ultra-High Cap. NIMH:	23.45 oz (644 gm)		
With Extended-Cap. NIMH:	24.04 oz (682 gm)		

Specifications subject to change without notice.

Specifications for UHF Range 2 Radios

All specifications are per Telecommunications Industries Association TIA-603 unless otherwise noted.

GENERAL		RECEIVER	TRANSMITTER
FCC Designation:	AZ489FT4864	Frequency Range:	450-520 MHz
Temperature Range:			
Operating:	-30°C to +60°C	Bandwidth:	70 MHz
Storage:	-40°C to +85°C		
Power Supply: Nickel-Cadmium Battery (NiCd) or Nickel-Metal-Hydride Battery (NiMH) or Lithium-Ion Battery (Li-Ion)		Usable Sensitivity (typical) (12 dB SINAD):	0.19 µV
		Intermodulation (typical):	-77 dB
Battery Voltage:		Selectivity (typical): (25/30 kHz Channel):	-79 dB
Nominal:	7.5 Vdc	(12.5 kHz Channel):	-65 dB
Range:	6 to 9 Vdc	Spurious Rejection (typical):	-85 dB
Transmit Current Drain (Typical):	2100 mA	Frequency Stability (-30 to +60°C; 25°C reference):	±0.0002%
Receive Current Drain (Rated Audio):	240 mA		
Standby Current Drain:	80 mA	Rated Audio:	500 mW
Recommended Battery:		FM Hum and Noise (typical):	25 kHz -53 dB 12.5 kHz -45 dB
Smart NiMH:	NNTN4435		
or Ultra-High-Capacity NiCd:	NTN8294	Distortion (typical):	1.0%
or Extended-Capacity NiMH:	NTN8293	Channel Spacing:	12.5/25 kHz
or Li-Ion:	NTN8810		
or Ultra-High-Capacity NiCd FM:	NTN8295*		
or Ultra-High-Capacity NiMH FM:	NTN8299*		
Optional FM (Factory Mutual) Battery:			
* FM Intrinsically Safe.			
Dimensions (H x W x D):			
Note 2.44" = width at PTT, 2.34" = width at bottom, 1.83" = depth at speaker, 0.97" = depth at keypad			
Without Battery (Radio Only):			
6.58" x 2.44" x 1.83"/6.58" x 2.34" x 0.97"			
(167.13 mm x 61.90 mm x 46.42 mm/ 167.13 mm x 59.49 mm x 24.56 mm)			
With Battery:			
8.58" x 2.44" x 1.83"/8.58" x 2.34" x 1.65"			
(167.13 mm x 61.90 mm x 46.42 mm/ 167.13 mm x 59.49 mm x 41.97 mm)			
Weight: (w/ Antenna):			
Less Battery:	13.0 oz (368 gm)		
With Ultra-High Cap. NiCd:	25.19 oz (693 gm)		
With Li-Ion:	20.41 oz (583 gm)		
With Ultra-High Cap. NiMH:	23.45 oz (644 gm)		
With Extended-Cap. NiMH:	24.04 oz (682 gm)		

Specifications subject to change without notice.

Specifications for 700–800 MHz Radios

All specifications are per Telecommunications Industries Association TIA-603 unless otherwise noted.

GENERAL	RECEIVER	TRANSMITTER
FCC Designation: AZ489FT5806 Temperature Range: Operating: –30°C to +60°C Storage: –40°C to +85°C Power Supply: Nickel-Cadmium Battery (NiCd) or Nickel-Metal-Hydrate Battery (NiMH) or Lithium-Ion Battery (Li-Ion) Battery Voltage: Nominal: 7.5 Vdc Range: 6 to 9 Vdc Transmit Current Drain (Typical) 1400 mA Receive Current Drain (Rated Audio): 240 mA Standby Current Drain: 80 mA Recommended Battery: Ultra-High-Capacity Smart NiCd: HNN9031_ or Ultra-High-Capacity NiCd: NTN8294_ or Extended-Capacity NiMH: NTN8293_ or Li-Ion: NTN8610_ or Ultra-High-Capacity NiCd FM: NTN8295_ or Ultra-High-Capacity NiMH FM: NTN8299_ Optional FM (Factory Mutual) Battery: • FM Intrinsically Safe Class I, II, III, Division 1, Groups C, D, E, F, and G. FM Non-incendive. Class 1, Division 2, Groups A, B, C, and D. Dimensions (H x W x D): Note: 2.44" = width at PTT, 2.34" = width at bottom; 1.83" = depth at speaker; 0.97" = depth at keypad Without Battery (Radio Only): 6.58" x 2.44" x 1.83"/6.58" x 2.34" x 0.97" (167.13 mm x 61.90 mm x 46.42 mm/ 167.13 mm x 59.49 mm x 24.56 mm) With Battery: 6.58" x 2.44" x 1.83"/6.58" x 2.34" x 1.65" (167.13 mm x 61.90 mm x 46.42 mm/ 167.13 mm x 59.49 mm x 41.97 mm) Weight: (w/ Antenna): Less Battery: 14.10 oz (383 gm) With Ultra-High Cap. NiCd: 25.19 oz (693 gm) With Li-Ion: 20.41 oz (583 gm) With Ultra-High Cap. NiMH: 23.45 oz (644 gm) With Extended-Cap. NiMH: 24.04 oz (682 gm)	Frequency Range: 700 MHz: 764 to 767, 773 to 776 MHz 800 MHz: 851 to 870 MHz Bandwidth: 106 MHz Usable Sensitivity (typical) (12 dB SINAD): 0.20 µV Intermodulation (typical): –75 dB Selectivity (typical): (25/30 kHz Channel): –72 dB (12.5 kHz Channel): –63 dB Spurious Rejection (typical): –75 dB Frequency Stability (–30/+60°C; 25°C reference): ±0.00015% Rated Audio: 500 mW FM Hum and Noise (typical): 25 kHz –48 dB 12.5 kHz –40 dB Distortion (typical): 1.5% Channel Spacing: 12.5/25 kHz	Frequency Range: 700 MHz: 764 to 767, 773 to 776, 794 to 797, 803 to 806 MHz 800 MHz: 808 to 824, 851 to 870 MHz RF Power: 764–806 MHz: 2.5 Watts 806–870 MHz: 3 Watts Frequency Stability (typical) (–30 to +60°C; 25°C ref.): ±0.00015% Emission (typical conducted): –75 dBc FM Hum and Noise (typical) (Companion Receiver): 25 kHz –45 dB 12.5 kHz –40 dB Distortion (typical): 1.5% (typical) Modulation Limiting: 25 kHz chnls ±5.0 kHz 12.5 kHz chnls ±2.5 kHz Emissions Designators: 20K0F1E, 16K0F3E, 11K0F3E, 8K10F1D, and 8K10F1E

Specifications subject to change without notice.

Notes

Chapter 1 Introduction

1.1 General

This manual includes all the information needed to maintain peak product performance and maximum working time for the ASTRO XTS 5000 radio. This detailed level of service (component level) is typical of the service performed by some service centers, self-maintained customers, and distributors.

Use this manual in conjunction with the *ASTRO XTS 5000 VHF/UHF Range 1/700–800 MHz Digital Portable Radios Basic Service Manual* (Motorola part number 6881094C28), which can help in troubleshooting a problem to a particular printed circuit (PC) board.

Conduct the basic performance checks outlined in the basic service manual first to verify the need to analyze the radio and to help pinpoint the functional problem area. In addition, you will become familiar with the radio test mode of operation, which is a helpful tool. If any basic receive or transmit parameters fail to be met, the radio should be aligned according to the radio alignment procedure.

Included in other areas of this manual are functional block diagrams, detailed theory of operation, troubleshooting charts and waveforms, schematics, and parts lists. You should become familiar with these sections to aid in determining circuit problems. Also included are component location diagrams to aid in locating individual circuit components and some IC diagrams, which identify some convenient probe points.

"Chapter 3, Theory of Operation," on page 3-1, contains detailed descriptions of the operations of many circuits. Once you locate the problem area, review the troubleshooting flowchart for that circuit to fix the problem.

1.2 Notations Used in This Manual

Throughout the text in this publication, you will notice the use of warnings, cautions, and notes. These notations are used to emphasize that safety hazards exist, and care must be taken and observed.

NOTE: An operational procedure, practice, or condition that is essential to emphasize.



Caution

CAUTION indicates a potentially hazardous situation which, if not avoided, might result in equipment damage.



WARNING

WARNING indicates a potentially hazardous situation which, if not avoided, could result in death or injury.



DANGER

DANGER indicates an imminently hazardous situation which, if not avoided, will result in death or injury.

Chapter 2 Radio Power

This chapter provides a detailed circuit description of the power distribution of an ASTRO XTS 5000 radio.

2.1 General

In the ASTRO XTS 5000 radio, power (B+) is distributed to two boards: the transceiver (RF) board and the VOCON board (see Figure 2-1 on page 2-2 for UHF Range 1 (R1) and 700–800 MHz, and Figure 2-2 on page 2-2 for VHF). In the case of a secure model radio, B+ is also supplied to the encryption module.

Power for the radio is provided through a battery supplying a nominal 7.5 Vdc directly to the transceiver. The following battery types and capacities are available:

Table 2-1. Conventional Batteries

Part Number	Description
NTN8294	1525 NiCd, Ultra-High Capacity
NTN8295	1525 NiCd High-Capacity Factory Mutual (FM) Intrinsically Safe
NTN8297	1525 NiCd High-Capacity Factory Mutual (FM) Intrinsically Safe, Rugged
NTN8299	1750 NiMH Ultra-Capacity FM
NTN8610	1650 Lithium Ion
NTN8923	1800 NiMH Ultra-Capacity
NTN9177	Battery Holder, Clamshell, Black
NTN9183	Battery Holder, Clamshell, Orange
RNN4006	3000 NiMH
RNN4007	3000 NiMH FM

Table 2-2. Smart Batteries

Part Number	Description
HNN9031	1525 NiCd Smart
HNN9032	1525 NiCd Smart FM
NNTN4435_R	1800 mAh, NiMH Smart
NNTN4436	1750 NiMH Smart FM (VHF use only)

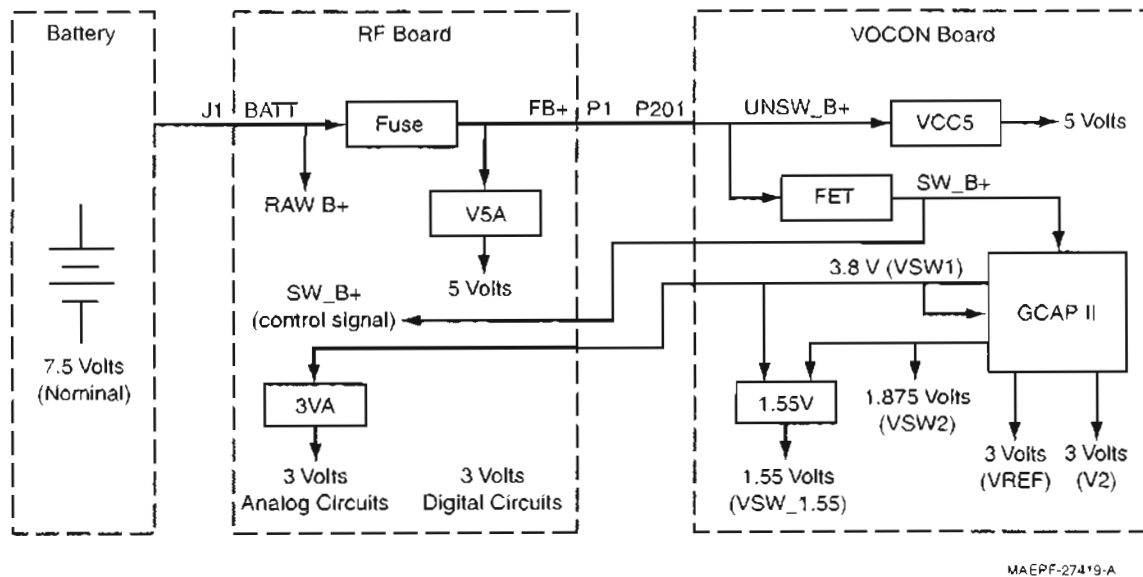


Figure 2-1. DC Power Distribution—UHF Range 1 and 700–800 MHz Radios

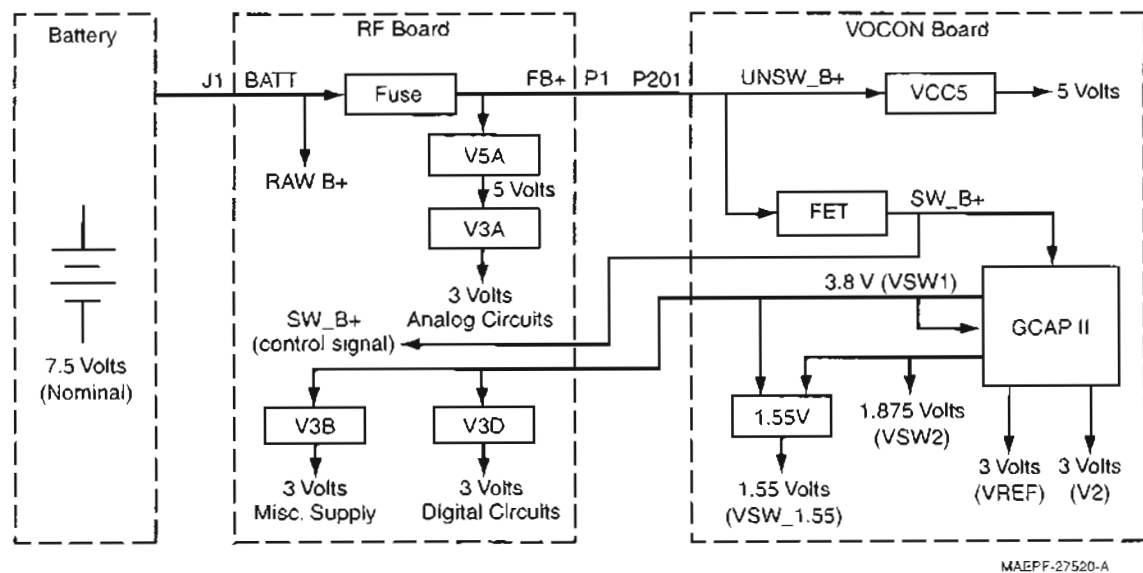


Figure 2-2. DC Power Distribution—VHF and Range 2 Radios

B+ from the battery is electrically switched to most of the radio, rather than routed through the On/Off/volume control knob, S1. The electrical switching of B+ supports a *keep-alive* mode. Under software control, even when the On/Off/volume control knob has been turned to the Off position, power remains on until the MCU completes its power-down, at which time the radio is physically powered down.

2.2 DC Power Routing—Transceiver Board

NOTE: Refer to Table 8-1, "List of Transceiver Schematics and Board Overlays," on page 8-1 for a listing of schematics showing the transceiver board DC power routing components.

Connector J1, the B-plus assembly, connects the battery to the transceiver board. Capacitors C1, C2, and C3 provide protection against momentary breaks at the B-plus connector due to contact bounce when the radio is dropped.

UHF R1 and 700–800 MHz: Components C5, E4, C7, and E1 form a power-line filter for signal RAWB+, which supplies battery voltage to the transmitter PA.

UHF R2 and VHF: Component E1 forms a power-line filter for signal RAWB+, which supplies battery voltage to the transmitter PA.

Transistor Q1, controlled by signal SWB+ (SB+ for VHF) from the VOCON board, turns on XB+, which supplies to the 5-V linear regulator and TX_ALC block.

Fuse F901 and filter C11, L1, C10 (C14, L1, C13 for VHF) supply fused B-plus to the VOCON board. In turn, the VOCON board supplies VSW1, regulated 3.8 Vdc, from the Global Control Audio and Power (GCAP) switching regulator to the XCVR. Switch Q99 (Q503 for VHF), controlled by SWB+, turns on V38 to the XCVR 3-V linear regulators. The XCVR regulated power supplies are summarized in Table 2-3.

Table 2-3. Transceiver Voltage Regulators

Ref. Desig.	IC Name	Output Signal Name	Description
U1	LP2989	V5A	Regulated 5.0 Vdc
U2	LP3985	V3D	Regulated 3.0 Vdc digital
U3	LP3985	V3A	UHF R1 and 700–800 MHz: Regulated 3.0 Vdc analog for the RX FE UHF R2 and VHF: Regulated 3.0 Vdc analog for synthesizer
U5	LP3985	V3B	UHF R2 and VHF only: Regulated 3.0 Vdc miscellaneous supply

2.3 DC Power Routing—VOCON Board

NOTE: Refer to Table 8-2, "List of VOCON Schematics and Board Overlays," on page 8-1 for a listing of schematics showing the VOCON board DC power routing components.

Raw B+, or unswitched B+, (UNSW_B+) is routed to connector P1 on the transceiver board, and then on to P201 on the VOCON board. Here the UNSW B+ is forwarded to the radio's control top On/Off/volume knob through connector J101 and a flex circuit, as well as to regulator U505 (VCC5).

The On/Off/volume knob controls B+SENSE to Q502, which in turn controls Q501. Transistor Q501 is a solid-state power switch that provides SW B+ to the VOCON board, the audio PA, the GCAP II IC (via GCAP_B+), and back to the transceiver board.

In the case of a secure radio model, SW B+ and UNSW B+ are also supplied to the encryption module through connector J701.

Transistor Q501 is also under the control of the microcontroller unit (MCU) via Vref from U501. This allows the MCU to follow an orderly power-down sequence when it senses that B+SENSE is off. This sense is provided through MECH_SW_BAR (inverted B+SENSE, see Q508).

The digital circuits in the VOCON board are powered from regulators located in the GCAP II IC (U501), an external 5 Vdc regulator (VCC5, U505), and an external 1.55 Vdc regulator (VSW_1.55V, on NNTN4717 VOCON kit only). The GCAP II IC provides three supplies: VSW1, VSW2, and V2. These regulators are software programmable. Table 2-4 lists the supply voltages and the circuits that use these voltages.

Table 2-4. VOCON Board DC Power Distribution

Supply Name	Output Voltage	Supply Type	Unprogrammed Output Voltage	Circuits Supplied
UNSW_B+	9 to 6 Vdc 7.5 Vdc nominal	Battery	N/A	VCC5 input Mechanical switch Power switch (FET) Secure module Real-time clock battery
SW_B+	9 to 6 Vdc 7.5 Vdc nominal	Battery	N/A	VSW1 input (GCAP) Audio power amplifier Side connector SW_B+ to transceiver board GCAP IC Secure module USB circuitry
VCC5	5Vdc	Linear Regulator	N/A	Smart battery circuitry Int. / ext. microphone bias Audio preamplifier Flipper IC Keypad / Display LEDs
VSW1	3.8 Vdc	Switching regulator software programmable	3.2 Vdc	3-V regulators (RF) VSW2 input V2 input
VSW2	1.8 Vdc	Switching regulator software programmable	2.2 Vdc	Patriot core FLASH IC SRAM Display (only on NTN9564 VOCON board)
V2	3 Vdc* 2.9 Vdc**	Linear regulator software programmable	2.775 Vdc	Patriot I/O ring Flipper IC EEPOT Display 16.8 MHz buffer
VSW_1_55V	1.55 Vdc	Linear regulator	N/A	Patriot core (only on NNTN4717 VOCON board)

* = NTN9564, NNTN4563 & NNTN4819 VOCON kits

** = NNTN4717 VOCON kit

2.2 DC Power Routing—Transceiver Board

NOTE: Refer to Table 8-1, “List of Transceiver Schematics and Board Overlays,” on page 8-1 for a listing of schematics showing the transceiver board DC power routing components.

Connector J1, the B-plus assembly, connects the battery to the transceiver board. Capacitors C1, C2, and C3 provide protection against momentary breaks at the B-plus connector due to contact bounce when the radio is dropped.

UHF R1 and 700–800 MHz: Components C5, E4, C7, and E1 form a power-line filter for signal RAWB+, which supplies battery voltage to the transmitter PA.

UHF R2 and VHF: Component E1 forms a power-line filter for signal RAWB+, which supplies battery voltage to the transmitter PA.

Transistor Q1, controlled by signal SWB+ (SB+ for VHF) from the VOCON board, turns on XB+, which supplies to the 5-V linear regulator and TX_ALC block.

Fuse F901 and filter C11, L1, C10 (C14, L1, C13 for VHF) supply fused B-plus to the VOCON board. In turn, the VOCON board supplies VSW1, regulated 3.8 Vdc, from the Global Control Audio and Power (GCAP) switching regulator to the XCVR. Switch Q99 (Q503 for VHF), controlled by SWB+, turns on V38 to the XCVR 3-V linear regulators. The XCVR regulated power supplies are summarized in Table 2-3.

Table 2-3. Transceiver Voltage Regulators

Ref. Desig.	IC Name	Output Signal Name	Description
U1	LP2989	V5A	Regulated 5.0 Vdc
U2	LP3985	V3D	Regulated 3.0 Vdc digital
U3	LP3985	V3A	UHF R1 and 700–800 MHz: Regulated 3.0 Vdc analog for the RX FE UHF R2 and VHF: Regulated 3.0 Vdc analog for synthesizer
U5	LP3985	V3B	UHF R2 and VHF only: Regulated 3.0 Vdc miscellaneous supply

2.3 DC Power Routing—VOCON Board

NOTE: Refer to Table 8-2, “List of VOCON Schematics and Board Overlays,” on page 8-1 for a listing of schematics showing the VOCON board DC power routing components.

Raw B+, or unswitched B+, (UNSW_B+) is routed to connector P1 on the transceiver board, and then on to P201 on the VOCON board. Here the UNSW B+ is forwarded to the radio's control top On/Off/volume knob through connector J101 and a flex circuit, as well as to regulator U505 (VCC5).

The On/Off/volume knob controls B+SENSE to Q502, which in turn controls Q501. Transistor Q501 is a solid-state power switch that provides SW B+ to the VOCON board, the audio PA, the GCAP II IC (via GCAP_B+), and back to the transceiver board.

In the case of a secure radio model, SW B+ and UNSW B+ are also supplied to the encryption module through connector J701.

Transistor Q501 is also under the control of the microcontroller unit (MCU) via Vref from U501. This allows the MCU to follow an orderly power-down sequence when it senses that B+SENSE is off. This sense is provided through MECH_SW_BAR (inverted B+SENSE, see Q508).

The digital circuits in the VOCON board are powered from regulators located in the GCAP II IC (U501), an external 5 Vdc regulator (VCC5, U505), and an external 1.55 Vdc regulator (VSW_1.55V, on NNTN4717 VOCON kit only). The GCAP II IC provides three supplies: VSW1, VSW2, and V2. These regulators are software programmable. Table 2-4 lists the supply voltages and the circuits that use these voltages.

Table 2-4. VOCON Board DC Power Distribution

Supply Name	Output Voltage	Supply Type	Unprogrammed Output Voltage	Circuits Supplied
UNSW_B+	9 to 6 Vdc 7.5 Vdc nominal	Battery	N/A	VCC5 input Mechanical switch Power switch (FET) Secure module Real-time clock battery
SW_B+	9 to 6 Vdc 7.5 Vdc nominal	Battery	N/A	VSW1 input (GCAP) Audio power amplifier Side connector SW_B+ to transceiver board GCAP IC Secure module USB circuitry
VCC5	5Vdc	Linear Regulator	N/A	Smart battery circuitry Int. / ext. microphone bias Audio preamplifier Flipper IC Keypad / Display LEDs
VSW1	3.8 Vdc	Switching regulator software programmable	3.2 Vdc	3-V regulators (RF) VSW2 input V2 input
VSW2	1.8 Vdc	Switching regulator software programmable	2.2 Vdc	Patriot core FLASH IC SRAM Display (only on NTN9564 VOCON board)
V2	3 Vdc* 2.9 Vdc**	Linear regulator software programmable	2.775 Vdc	Patriot I/O ring Flipper IC EEPOT Display 16.8 MHz buffer
VSW_1_55V	1.55 Vdc	Linear regulator	N/A	Patriot core (only on NNTN4717 VOCON board)

* = NTN9564, NNTN4563 & NNTN4819 VOCON kits

** = NNTN4717 VOCON kit

Chapter 3 Theory of Operation

This chapter provides a detailed circuit description of the ASTRO XTS 5000 transceiver and VOCON boards. When reading the theory of operation, refer to the appropriate schematic and component location diagrams located in the back of this manual. This detailed theory of operation can help isolate the problem to a particular component.

The ASTRO XTS 5000 radio is a dual-mode (digital/analog), microcontroller-based transceiver incorporating a digital signal processor (DSP). The microcontroller handles the general radio control, monitors status, and processes commands input from the keypad or other user controls. The DSP processes the typical analog signals, and generates the standard signaling digitally to provide compatibility with existing analog systems. In addition, the DSP provides digital modulation techniques, utilizing voice encoding techniques with error correction schemes. This provides the user with enhanced range and audio quality, all in a reduced bandwidth channel requirement. It allows embedded signaling, which can mix system information and data with digital voice to support a multitude of system features.

The three ASTRO XTS 5000 radio models (I, II, and III) are available in the VHF (136 to 174 MHz), UHF Range 1 (380 to 470 MHz), UHF Range 2 (450 to 520 MHz), and 700–800 MHz (764 to 870 MHz) frequency bands.

The ASTRO XTS 5000 radio (Figure 3-1) consists of the following:

- Band-dependent transceiver (RF) board
- Vocoder/controller (VOCON) board
- Universal flex assembly
- Display and keypad assemblies (Models II and III only)
- Encryption board (secure models only)

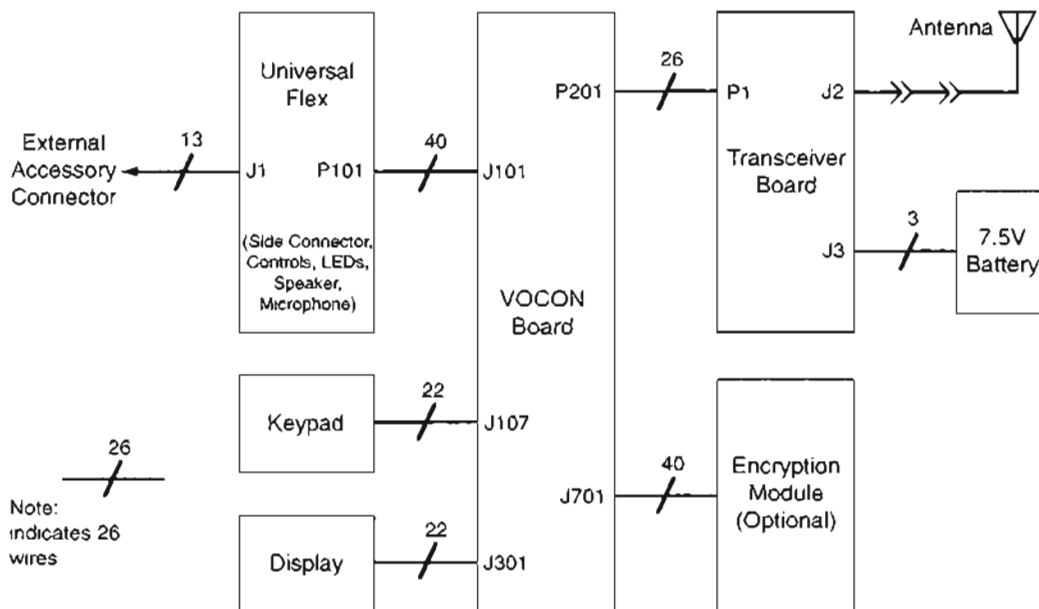


Figure 3-1. XTS 5000 Overall Block Diagram

3.1 Transceiver Board

The transceiver (XCVR) board performs the transmitter and receiver functions necessary to translate between voice and data from the VOCON board and the modulated radio-frequency (RF) carrier at the antenna. The transceiver board contains all the radio's RF circuits for the following major components:

- Receiver
- Transmitter
- Frequency Generation Unit (FGU)

Figure 3-2 illustrates the VHF transceiver board block diagram while Figure 3-3 on page 3-3 illustrates the transceiver UHF Range 1 and 700–800 MHz transceiver block diagrams.

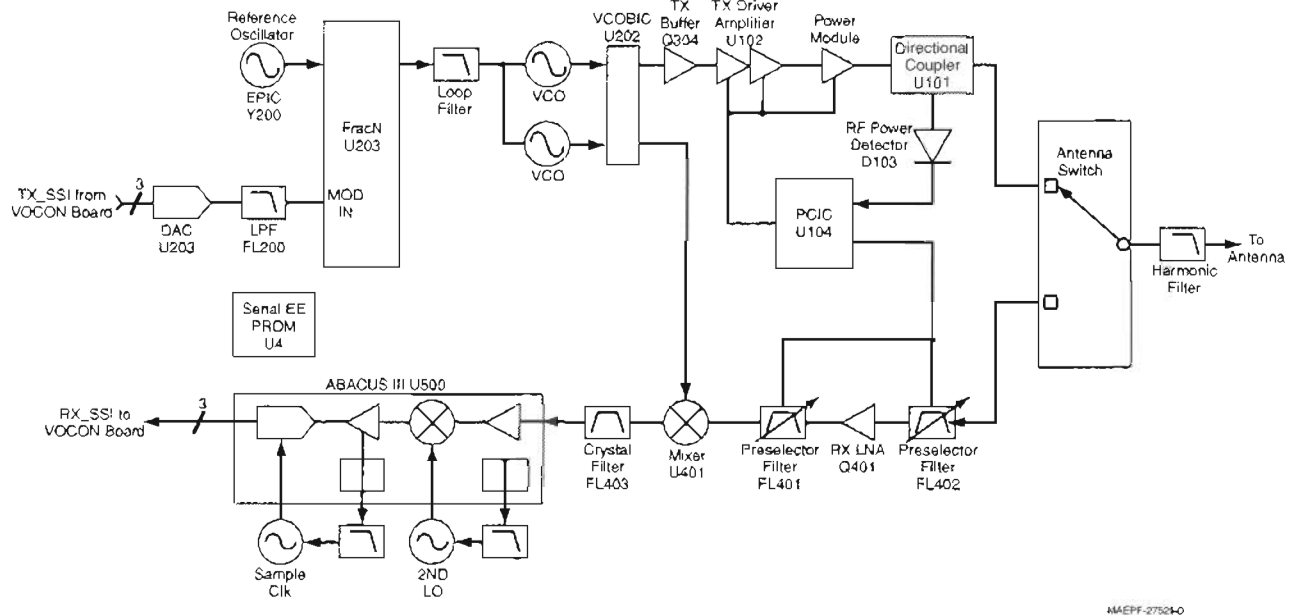


Figure 3-2. Transceiver (VHF) Block Diagram (Power and Control Omitted)

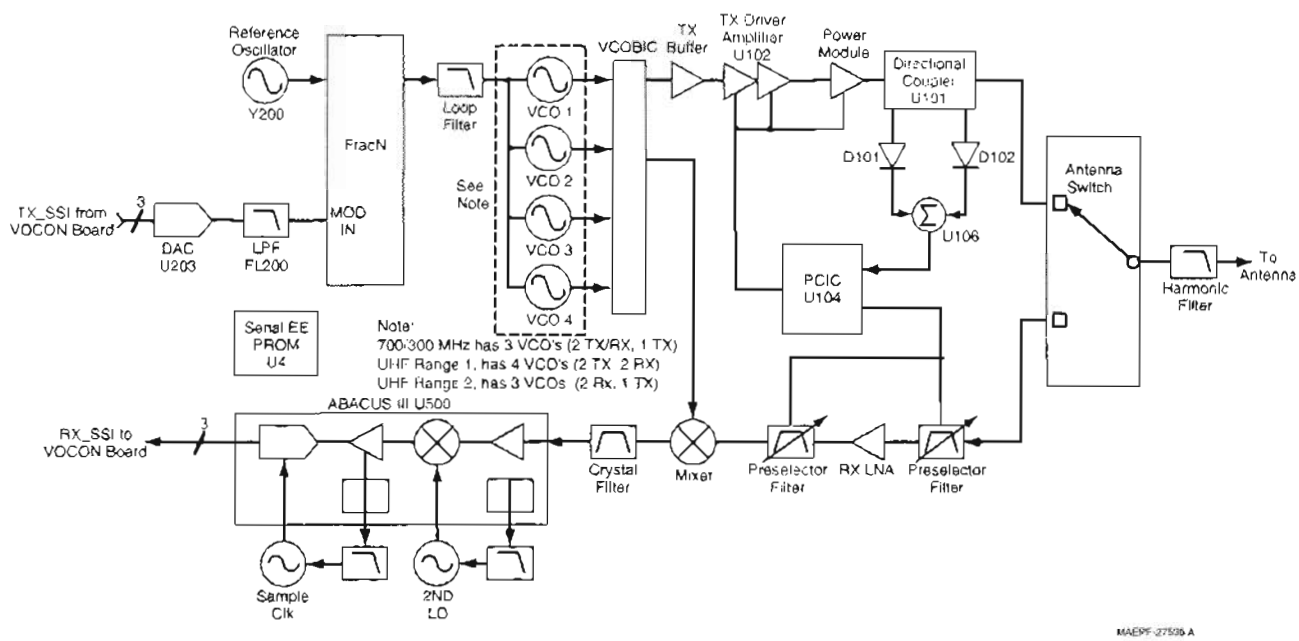


Figure 3-3. Transceiver (UHF Range 1, UHF Range 2 and 700-800 MHz) Block Diagram (Power and Control Omitted)

3.1.1 Interconnections

This section describes the various interconnections for the transceiver board.

3.1.1.1 Battery Connector J3

Battery connector J3 consists of three gold-plated contacts on the printed circuit board that mate with a B-plus connector assembly. Signal descriptions are in Table 3-1.

Table 3-1. Battery Connector J3

Pin No.	Signal	Description
1	BATT	Battery positive terminal, nominally 7.5 Vdc
2	BSTAT	Battery status, from battery to VOCON
3	BAT_RTN	Battery negative terminal, tied to PCB ground

3.1.1.2 VOCON Connector P1

VOCON connector P1 (located on the XCVR board) consists of 26 gold-plated pads for the 26-pin compression connector, and one plated tool hole (pin 27) used for connector alignment. This is a digital interface carrying DC power, control, and data between the XCVR and VOCON boards. P1 connects through the compression connector to P201 on the VOCON board.

Table 3-2 lists the connector pins, their signals, and functions. SPI refers to serial peripheral interface, which is the control bus from the microprocessor. SSI is the serial synchronous interface bus for data to and from the DSP. There is a RX SSI bus for demodulated data from the receiver and a TX SSI bus for modulation data to the transmitter.

Table 3-2. VOCON Connector P1

Pin No.	VOCON Signal	XCVR Signal	XCVR I/O	Type	Description
1	UNSW_B+	FUB+	O	dc	Fused B+ to VOCON
2	UNSW_B+	FUB+	O	dc	Fused B+ to VOCON
3	LOCK_DET*	LOCK	O	status	FGU lock detect
4	TX_SSI_DATA	TXTD	O	ssi	TX SSI data
5	SSI_CLK	RXCK	O	ssi	RX SSI clock
6	SSI_FSYNC	SSFS	O	ssi	RX SSI frame sync
7	16.8MHz	F168	O	RF	16.8 MHz reference clock
8	SW_B+	SWB+	I	dc	Switch control
9	TX_SSI_FSYNC	TXFS	I	ssi	TX SSI frame sync
10	TX_SSI_CLK	TXCK	I	ssi	TX SSI clock
11	GND	GND			
12	RX_SSI_DATA	RXDO	O	ssi	RX SSI data
13	ABACUS3_CS	ABCS	I	ssi	SPI Abacus chip select
14	GND	GND			
15	VSW1	VSW1	I	dc	Regulated 3.8 V
16	SPI_CLK_A	SPCK	I	spi	SPI clock
17	SPI_MISO_A	MISO	O	spi	SPI data out
18	EEPROM_SEL*	EECS	I	spi	SPI EEPROM chip select
19	TX_INHIBIT	TXINH	I	control	TX inhibit control for secure
20	GND	GND			
21	BAT_STATUS	BSTAT	O	dc	Battery status
22	GND	GND			
23	SPI_MOSI_A	MOSI	I/O	spi	SPI data I/O
24	UNI_CS	USEL	I	spi	SPI universal chip select
25	AD_CS	ADCS	I	spi	SPI ADC chip select
26	POR*	RSTL	I/O	control	asynchronous reset, active low

3.1.1.3 Antenna Port J2

Antenna port J2 is a surface-mount, miniature coaxial connector for the antenna cable.

3.1.1.4 Serial EEPROM

The serial, electrostatically erasable, programmable, read-only memory (EEPROM), U907 in VHF and 700–800 MHz or U4 in UHF Range 1, holds all of the transceiver tuning data. This allows transceivers to be tuned in the factory and installed in the field without retuning.

3.1.1.5 Power Conditioning Components

DC power-conditioning components include zener diodes, capacitors, ferrite beads, a power inductor, and the fuse. Diodes VR1 and VR2 provide over-voltage protection. Ferrite beads (designated E1, etc.) and capacitors suppress electromagnetic interference from the transceiver. The power-line filter consisting of L1, C13, and C14 for VHF radios or L1, C10, and C11 for UHF Range 1 and 700–800 MHz radios, suppresses digital noise from the VOCON board switching power supplies that could degrade the transmitter spectral purity.

Pass transistor Q1 switches the battery voltage to the transceiver when control signal SWB+ or SB+ from the VOCON board is asserted high. This increases the transceiver's immunity to conducted interference that might be present on SWB+ or SB+, such as from switching voltage regulators on the VOCON board.

Ground clips G1 through G12 make contact between the transceiver board ground and the radio chassis. The chassis connection is a necessary electrical reference point to complete the antenna circuit path. Shields SH101 through SH700 and the tool hole appear on the schematic to show their connection to ground.

3.1.2 Receiver

The XTS 5000 transceiver has a dual-conversion superheterodyne receiver. Figure 3-4 illustrates the major receiver components:

- Receiver Front End
- Receiver Back End

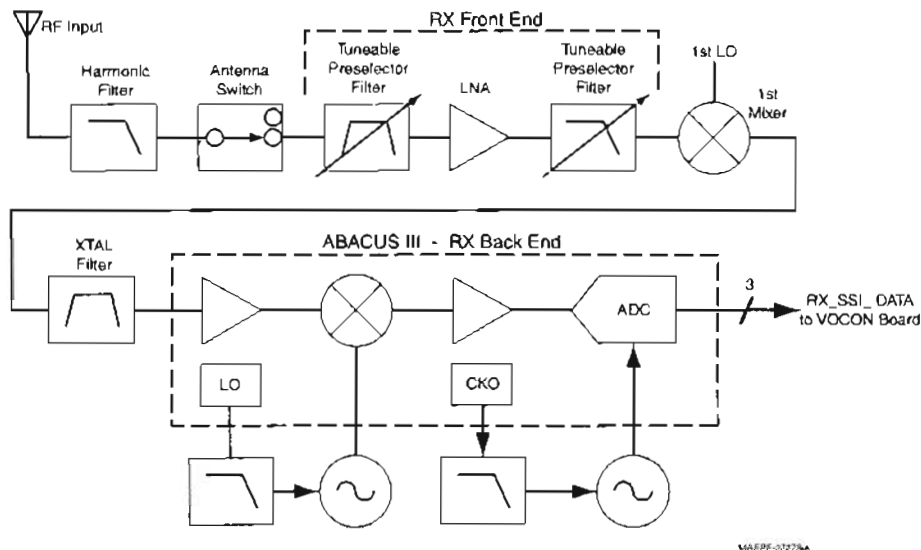


Figure 3-4. Receiver Block Diagram

3.1.2.1 Receiver Front End

NOTE: Refer to Table 8-1, "List of Transceiver Schematics and Board Overlays," on page 8-1 for a listing of receiver front end schematics.

The receiver front end tunes to the desired channel and down converts the RF signal to the first intermediate frequency (IF). Channel selection is by way of a tunable local oscillator, RXLO, from the FGU.

The receiver front end consists of a preselector filter, an RF amplifier, a second preselector, mixer, and an IF crystal filter. VHF, UHF Range 1 and UHF Range 2 radios also contain a switchable attenuator between the antenna switch and the first preselector filter. The RF amplifier is a discrete RF transistor with associated circuitry. The mixer is a double-balanced, active mixer IC, coupled by transformers. The receiver (RX) local oscillator (LO) is provided by the FGU.

3.1.2.1.1 Preselector Filters

VHF, UHF Range 1, and UHF Range 2: The receiver front end uses two discrete, tunable, bandpass filters to achieve its required out-of-band rejection. The first preselector filter precedes the RF amplifier, while the second preselector filter follows the RF amplifier. DAC2, from the PCIC, is used to simultaneously tune both preselector filters by applying voltage to the varactors.

700–800 MHz: The receiver front end uses two, multi-layer, ceramic, tunable, bandpass filters to achieve its required out-of-band rejection. The first preselector filter, FL401, precedes the discrete RF amplifier. To tune the center frequency of the first filter, voltage from port DAC1 is applied to pin 3 of FL401. Pin 3 connects to the surface-mounted varactor diodes placed on each filter. A second identical filter, FL402, follows the discrete RF amplifier. The second filter is tuned by applying voltage from port DAC2 to pin 3 of FL402. Capacitors C409 and C410 are RF bypasses. Capacitors C400 and C411 are used to filter out noise from the DAC1 and DAC2 control lines.

3.1.2.1.2 LNA (Low-Noise Amplifier)

The XTS 5000 radio uses a discrete transistor for the low-noise amplifier (Q428 in VHF, Q430 in UHF Range 1, Q428 in UHF Range 2, and Q401 in 700–800 MHz). A feedback network between the collector and base improves stability and gain balance across the frequency band. Input and output LC networks match the LNA impedance to 50 ohms.

A diode limiter (D722 in VHF, D400 in UHF Range 1, D722 in UHF Range 2, and D401 in 700–800 MHz) protects the amplifier damage by strong input signals.

3.1.2.1.3 Mixer

The mixer (U45 in VHF, U470 in UHF Range 1, U451 in UHF Range 2 and U401 in 700–800 MHz) down-converts the received RF to the first intermediate frequency (IF). The IF is 44.85 MHz for VHF, 73.35 MHz for UHF Range 1 and UHF Range 2, and 109.65 MHz for 700–800 MHz. High-side LO injection is used for VHF and 700 MHz, low-side for the UHF bands and 800 MHz. Transformers are used as baluns to convert signals from single-ended to balanced at pins MI, MIX, LO, and LOX. An output transformer converts the balanced signal at pins MO and MOX to a single-ended output.

3.1.2.1.4 IF Filter

The IF filter (FL451 in VHF, FL490 in UHF Range 1, FL451 in UHF Range 2, and FL403 in 700–800 MHz) is a leadless, surface-mount, 3-pole, quartz crystal filter. This narrow bandpass filter gives the radio its adjacent-channel and alternate-channel rejection performance.

Input and output LC networks match the filter impedance to 50 ohms. Exceptions are the VHF and UHF Range 2, where the output is matched to 50 ohms, but the input is not.

UHF Range 1: Input signal RXIF is 73.35 MHz. Components L547 and C547 match the input impedance to 50 ohms.

UHF Range 2: Input signal RXIF is 73.35 MHz. L542, C515, and C547 match the Abacus input to 50 Ohms.

700–800 MHz: Input signal RXIF is the 109.65 MHz IF from crystal filter FL403 in the receiver front end. Components L547 and C542 match the input impedance from 50 ohms at RXIF to approximately 420 ohms in parallel with a 1 pF capacitance at the Abacus input IFIN. Formatted SSI data is output to the VOCON board on ports FS, DOUTA, and CLKOUT.

3.1.2.2.2 Second Local Oscillator

The second LO is controlled by the Abacus LO synthesizer, which mixes with IFIN to produce a 2.25 MHz final IF. The external VCO consists of Q502 and its bias network and frequency-determining elements. Signal FREF is the 16.8 MHz reference from the FGU. Darlington transistor Q501 with C550 and R501 form an active power-line filter.

VHF: The second LO frequency is 42.6 MHz by default, or 47.1 MHz in special cases as needed to avoid radio self-quieters. The loop filter is composed of R507, C558, C559, and C503.

UHF Range 1: The second LO frequency is 71.1 MHz by default or 75.6 MHz in special cases as needed to avoid radio self-quieters. The loop filter is composed of R551, C558, C559, R552, and C512.

UHF Range 2: The 2nd LO frequency is 71.1 Mhz. C558, R507, and C559 form the loop filter.

700–800 MHz: The second LO frequency is 107.4 MHz by default or 111.9 MHz in special cases as needed to avoid radio self-quieters. The loop filter is composed of R507, C558, C559, R505, and C512.

3.1.2.2.3 Sampling Clock Oscillator

The Abacus sampling clock synthesizer operates at 18 MHz = 8 x 2.25 MHz. The VCO uses an internal transistor and external resonator. The resonator is composed of L503, C535, and D501.

VHF: The loop filter is composed of R514, C536, C570, and C571.

UHF Range 1 and 700–800 MHz: The loop filter is composed of R514, C570, and C571.

UHF Range 2: C503, C536, R415, C570, and C571 form the loop filter.

3.1.3 Transmitter

The transmitter takes modulated RF from the FGU and amplifies it to the radio's rated output power to produce the modulated transmitter carrier at the antenna.

NOTE: Refer to Table 8-1, "List of Transceiver Schematics and Board Overlays," on page 8-1 for a listing of transmitter-related schematics that will aid in the following discussion.

The transmitter (Figure 3-6 on page 3-9) consists of an RF driver IC that receives its input signal from the voltage-controlled oscillator (VCO) and a high-power output transistor. Transmitter power is controlled by a power-control IC (PCIC) that senses the output of a directional coupler and adjusts PA control voltages to maintain a constant power level. The signal passes through an antenna switch and harmonic filter to the antenna.

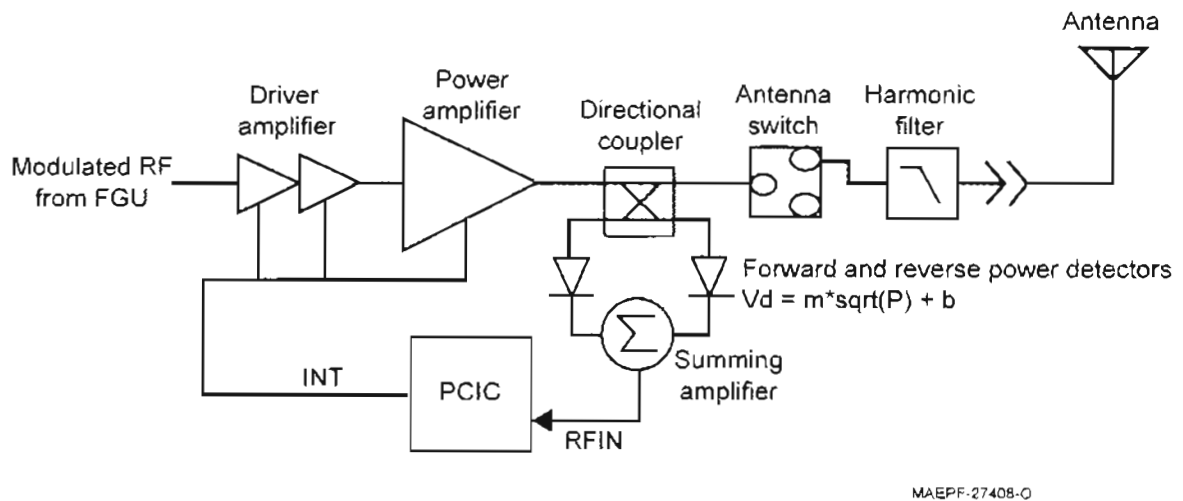


Figure 3-6. Transmitter Block Diagram

3.1.3.1 Power Distribution

To minimize voltage drop to the power amplifiers, net RAWB+ connects to power module Q107 and the second stage of driver amplifier U102 through components having minimal series resistance—ferrite beads and chokes only. During receive, no RF or DC bias is applied, and leakage current through U102 and Q107 is less than 100 microamps. The first stage of U102 uses less than 50 mA and is supplied by TX7V, which is switched on during TX, and switched off during RX or whenever TXINH, the transmitter inhibit control line, is high.

VHF: At a transmitter power of 6 Watts, the radio consumes approximately 2000 mA. Bias TX7V is controlled by transistors Q101, Q102, Q103, and Q106.

UHF Range 1 and Range 2: At the rated transmitter power of 5 Watts, the radio consumes approximately 2000 mA. Bias TX7V is controlled by transistors Q101, Q102, Q103, and Q106.

700–800 MHz: At a transmitter power of 3 Watts, the radio consumes approximately 1200 mA. Bias TX7V is controlled by transistors Q101, Q102, Q103, and Q107.

3.1.3.2 Driver Amplifier

The driver amplifier IC (U102) contains two LDMOS FET amplifier stages and two internal resistor bias networks. Pin 16 is the RF input. Modulated RF from the FGU, at a level of +3 dBm ±2 dB, is coupled through a blocking capacitor to the gate of FET-1. An LC interstage matching network connects the first stage output VD1 to the second stage input G2. The RF output from the drain of FET-2 is pin 6 (RFOUT1). Gain control is provided by a voltage applied to pin 1 (VCNTRL). Typical output power is about +27 dBm (500 mW) with VCNTRL at 5.0 V.

VHF: L109 and C113 are the interstage matching network. Components C108–C111 and L106–L107 match the output impedance to maximize power transfer to Q107; capacitor C107 is a DC block.

UHF Range 2: L109 and C113 are the interstage matching network. Components C108–C111 and L105, L107, and L108 match the output impedance to maximize power transfer to Q107.

UHF Range 1 and 700–800 MHz: L109 and C116 are the interstage matching network. Components L105 and C110 match the output impedance to 50 ohms; capacitor C107 is a DC block.

3.1.3.3 Power Amplifier Transistor Q107

The power amplifier transistor, Q107, is an LDMOS FET housed in a high-power, surface-mount, ring package. To prevent thermal damage, it is essential that the heat sink of the power module be held in place against the radio chassis. The input impedance-matching network uses discrete inductors and capacitors. The low-pass output matching network uses both transmission lines and lumped LCs. Drain bias is applied through E101 and L101. Gain is dynamically controlled by adjusting the gate bias. The gate is insulated from the drain and source so that gate bias current is essentially zero.

VHF: The input and output impedance-matching networks consist of L112–L114 and C137–C140. Gate bias is applied through R105, R106, and L108.

UHF Range 2: The input and output impedance-matching networks consist of L113, L114 and C137, C139, C140, C149, and C151.

Gate bias is applied through R105, R106, and L720.

UHF Range 1 and 700–800 MHz: The input impedance-matching network is L106, L107, C108, and C109. A transmission-line structure and C137, C111, and C112 form the output-matching network. Gate bias applied through R106 and L110.

3.1.3.4 Directional Coupler

A directional coupler senses the transmitter forward and reverse power as control signals in the transmitter's automatic level control (ALC) loop. Isolated ports are terminated with external resistors.

VHF and UHF Range 1: The directional coupler consists of three embedded transmission lines.

UHF Range 1 and 700–800 MHz: The directional coupler is U101, a low-loss, bidirectional coupler.

3.1.3.5 Antenna Switch

NOTE: Refer to Table 8-1, "List of Transceiver Schematics and Board Overlays," on page 8-1 for a listing of schematics that will aid in the following discussion.

The antenna switch is a single-pole, double-throw, positive-intrinsic-negative (PIN) diode, transmit/receive (T/R) antenna switch. Forward DC bias turn the diodes ON, reverse or zero bias turns them OFF.

VHF and UHF Range 2: PIN diodes D707 and D717 form a narrow-band, quarter-wave, T/R switch. In transmit mode, both diodes are forward-biased, and the signal goes from the transmitter to the antenna through the low resistance of the series PIN diode, while the low resistance of the shunt diode shorts the receiver. In receive mode, neither diode is biased and both behave as small-value capacitors, creating a high blocking impedance, in effect disconnecting the transmitter circuitry from the antenna.

UHF Range 1: Diodes D701 and D702 form a broadband switch. Inductors L706 and L707 resonate with the OFF diode parasitic capacitance to improve isolation.

700–800 MHz: PIN diodes D701 and D702 form a narrow-band, quarter-wave, T/R switch. When the PIN diodes are OFF, parallel inductors L706 and L707 resonate with the diode parasitic capacitance to increase isolation at the signal frequency.

The switch control circuit consists of transistors Q101, Q103, Q106, and associated resistors. The input signals are TXINH from the VOCON board and RXH (RX for VHF) from the PCIC. When TXINH is low and RXH (RX for VHF) is high, the switch is in the receive state. When TXINH and RXH (RX for VHF) are low, the switch is in its transmitter state. When TXINH is held high, the radio is inhibited from transmitting. This is a secure-module control feature.

3.1.3.6 Harmonic Filter

The harmonic filter is a high-power, low-loss, low-pass filter. Its purpose is to suppress transmitter harmonics. The filter also improves receiver out-of-band rejection. Shield SH700 must be in place to achieve the required stop band rejection.

VHF: The harmonic filter uses discrete components. The pass band is up to 190 MHz, and the stop band is above 260 MHz.

UHF Range 1: The harmonic filter is discrete, the pass band is up to 470 MHz, and the stop band is above 760 MHz.

UHF Range 2: The harmonic filter uses discrete components. The pass band is up to 595 MHz, and the stop band is above 900 MHz.

700–800 MHz: The harmonic filter uses both discrete components and transmission lines. The pass band is up to 870 MHz, and the stop band is above 1500 MHz.

3.1.3.7 RF Detectors D101 and D102

Two Schottky diodes, D101 and D102, are used as forward- and reverse-power detectors. Forward-coupled RF from the power amplifier, and reverse-coupled RF from the antenna are converted to DC voltages FWD and RVS. Detector output is a positive DC voltage, proportional to the amplitude of the RF signal at the input.

3.1.3.8 Summing Amplifier U106

This op-amp circuit is a non-inverting buffer. Signals FWD and RVS are summed and sent to the ALC input of the PCIC. When the antenna port is loaded with a low VSWR (voltage standing wave ratio), as in normal operation, RVS is far less than FWD, the amplifier output is a function of FWD, and the radio maintains a constant output power. Under high VSWR conditions, such as when the antenna is damaged or held near a large metal surface, the amplitude of RVS becomes a large fraction of FWD, the amplifier output increases proportionally, and the radio cuts back the transmitter power by up to 50%. This reduces high battery current into a large VSWR transmitter to extend battery life.

3.1.3.9 Power-Control IC (PCIC) U104

The PCIC, U104, contains all of the digital, and most of the analog, circuits needed to control the transmitter power amplifier. Host control is through a 3-wire, smart SPI interface. Pin descriptions are shown in Table 3-3.

Table 3-3. Power Control IC (U104) Pin Descriptions

Pin	Name	Description
1	RFIN	Detector voltage input to ALC
2	T1	Test point
3	CI	External capacitor for integrator time constant
4	INT	Integrator output; control voltage to amplifiers
5	CJ	External capacitor for PA rise and fall times
6, 7	VL, CL	External capacitor for PA rise and fall times
8	GND1	Ground