


PHILIPS

User's Manual

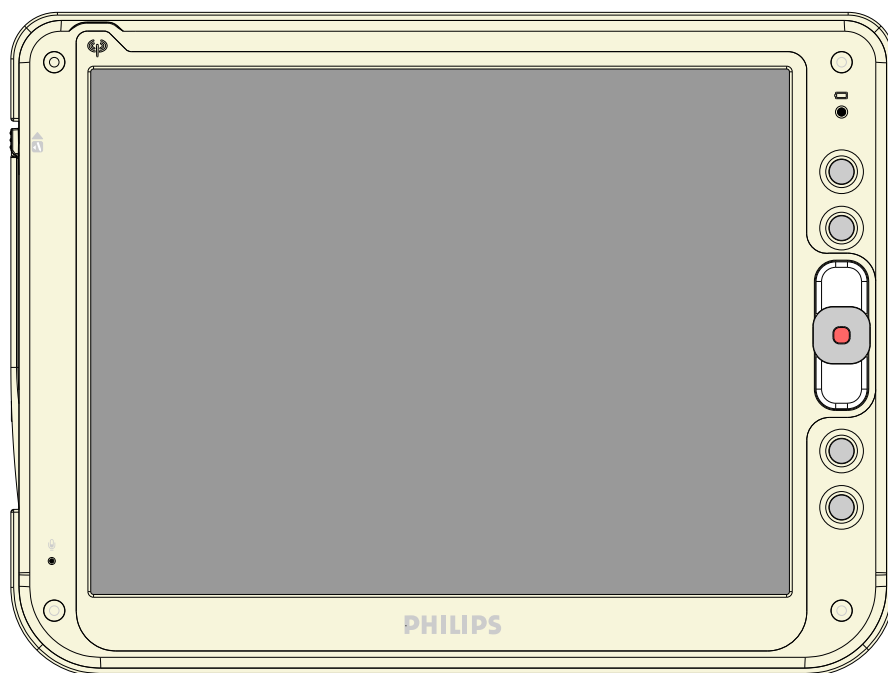

LCD 12" COLOR PROSCRIBE

CMPD12

Copyright © 2005 FIMI S.r.l. Saronno - Italy

All rights are reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright owner
Printed in Italy (Rev. 0,1)



Copyright ©

This manual is copyrighted with all rights reserved. Under the copy rights law, this manual may not be copied, in whole or part, without written consent of Philips. Under the law, copying includes translating into another language or format.

The monitor described in this manual, has been certified/registered by the safety agencies/regulatory authorities as model n° : CMPD12

FCC Notice

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and , if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, while can be determined by turning the equipment Off and On, the user is encouraged to try to correct the interference by one or more of the following measures.

- Re orient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio TV technician for help.

Modification



The FCC requires the user to be notified that any changes or modifications made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

Cables

Connections to this device must be made with shielded signals cables with metallic RFI/EMI connector hoods to maintain compliance with FCC Rules and Regulations.

 The lightning flash with arrowhead symbol is intend to alert the user of the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be sufficient magnitude to constitute a risk of electrical shock to people.

 The exclamation mark is intended to alert the user of the presence of important operating and maintenance (servicing) instructions in literature accompanying the appliance.

	CAUTION RISK OF ELECTRICAL SHOCK DO NOT OPEN ATTENTION RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR	
CAUTION: TO AVOID THE RISK OF ELECTRICAL SHOCK. DO NOT REMOVE COVER (OR BACK) NO USER SERVICEABLE PARTS INSIDE REFER SERVICING TO QUALIFIED SERVICE PERSONNEL		

WARNING:
THE ENCLOSURE HAS TO BE CHECKED UPON COLLISION DAMAGE; REFER TO QUALIFIED SERVICE PERSONNEL

RF Exposure Statement

This EUT is compliance with SAR for general population /uncontrolled exposure limits in ANSI/IEEE C95.1-1999 and had been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 1.5 cm during normal operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.


1.1.0 TECHNICAL INFORMATION

Processor	VIA Low Voltage VIA Eden or C3™-M running at 800MHz and 1GHz (BGA, 133MHz FSB, 64KB L2 cache, 0.13 micron process with 7watt-Thermal-Design-Power)
Chipset	VIA CN400 + VT8237R
Bios	Insyde version VA03, with the kernel-code-base V4.31
Operating System	Microsoft Windows XP Embedded with SP2
Networking	Built-in 802.11g mini-PC WLAN module with integral antenna
Remote Protocol	Microsoft RDP / Citrix ICA
Memory	256 MB SDRAM on board
Flash ROM	512 MB flash memory module
LCD Panel Characteristic	12.1 “ TFT LCD panel (Mini required : XGA 1024 x 768 resolution for 12.1”) , LVDS I/F
Audio System	AC97 internal microphone and speaker; stereo (supported via earphone jack)
Durability	Rugged anti-shock design with standing 3 feet drop / IP53 water and dust resistant construction
PAD I/O	• 1 x VGA out • 2 x USB • 1 x Network connector (RJ45) • 1 x Audio jack for external earphone • 1 x Audio jack for external microphone • 1 x DC-in jack • 1 x PCMCIA • 1 x SMART card • 1 x Docking connector • 1 x Speaker • 1 x Modular connector • 1 x Internal microphone
Docking device I/O	• 1 x DC-in jack • 1 x PAD connector • 3 x USB • 1 x Network connector (RJ45)
LED indicator	• 1 x WLAN LED • 1 x Power LED
Button AND Controls	• 4 x Customized hot key • 1 x Input panel • 1 x Four-way direction key with Enter • 1 x Power switch • 1 x Stylus release • 2 x Battery latch
Power Supply	• Battery: Swappable smart Li-ion battery pack • AC_IN 100 ~ 240V (1,5A) 50/60Hz - DC_Out 19V (3.42A)
Included Accessory	• Battery • AC adapetr and power cord • 1 x Stylus
Optional accessories	• Hand strip • Kickstand

6.1.0 INPUT INSTRUCTION


6.1.1 RIGHT VIEW

1. Power button
2. Network connector (RJ45)
3. RGB video connector
4. USB 2.0 port type A
5. USB 2.0 port type B
6. External ear set jack
7. External microphone jack
8. AC/DC adapter connector

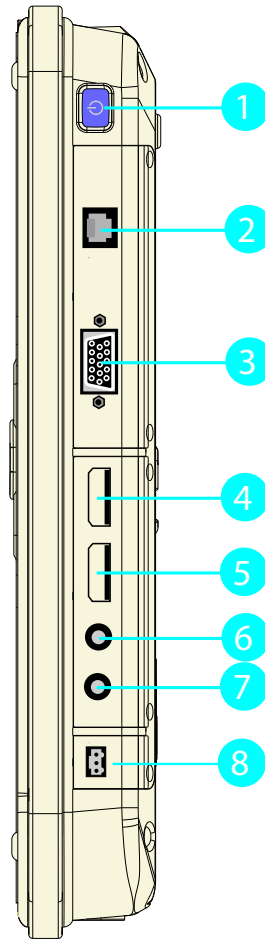


6.1.2 LEFT VIEW

1. Smart card slot
2. Stylus pen latch release
3. Flash slot
4. Stylus pen
5. PCMCIA slot
6. Security cable slot

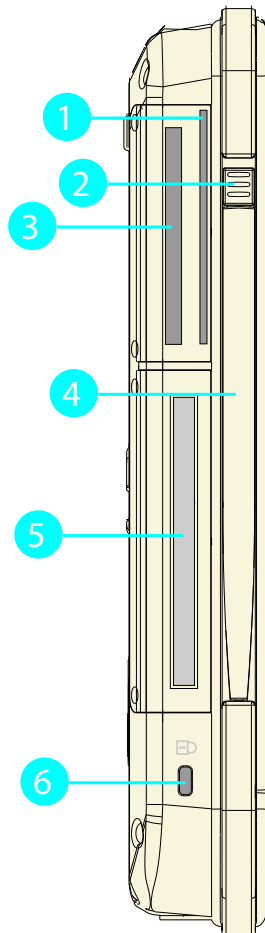


6.1.3 BOTTOM VIEW

1. Docking device slot

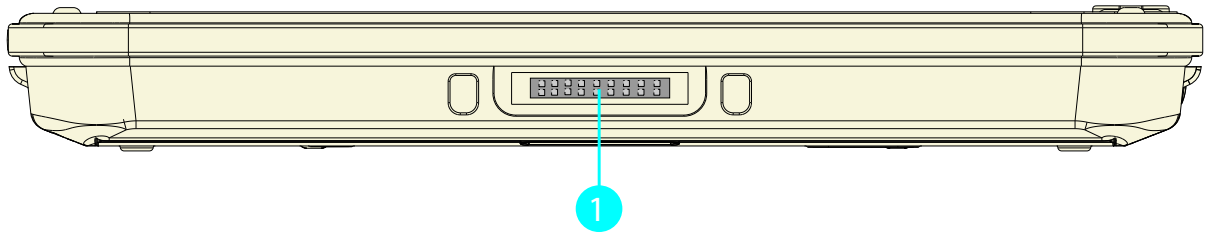


6.1.4 BACK VIEW

1. Speakers
2. Mounting screw holes (x4) M2,5
3. Battery latch 1 (lock)
4. Hand strip (optional)
5. Battery
6. Battery latch 2
7. Kickstand (optional)
8. Memory module cover
9. Processor fanless heatsink air vent

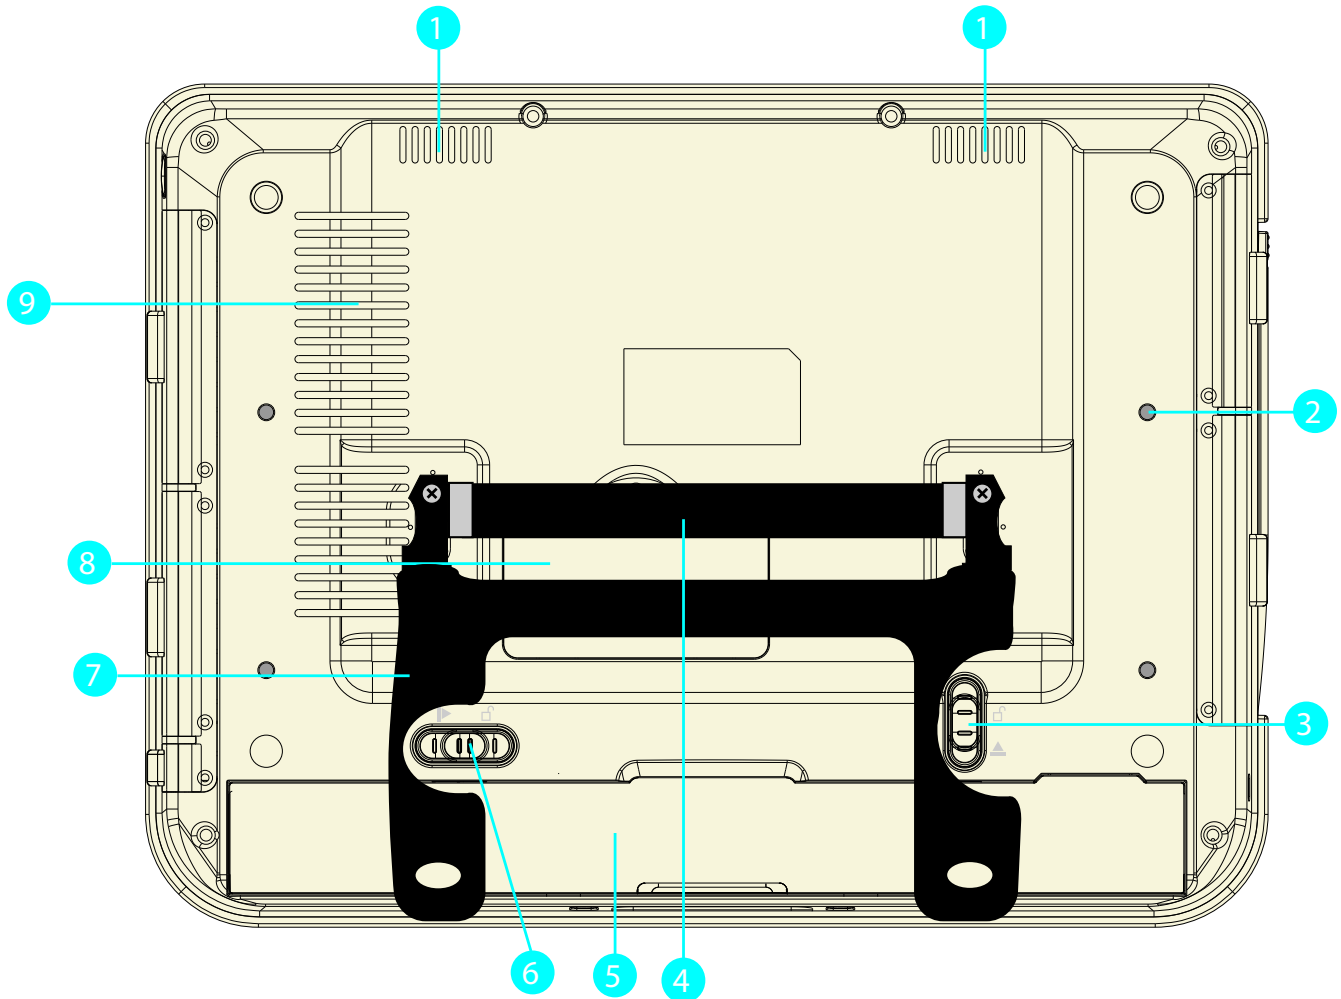

7.1.0 CONTROL PANEL DESCRIPTION

1. Battery LED
2. Programmable buttons
3. Track stick buttons
4. Track stick
5. Programmable buttons
6. OSD keyboard (default)
7. Microphone
8. WLAN status LED

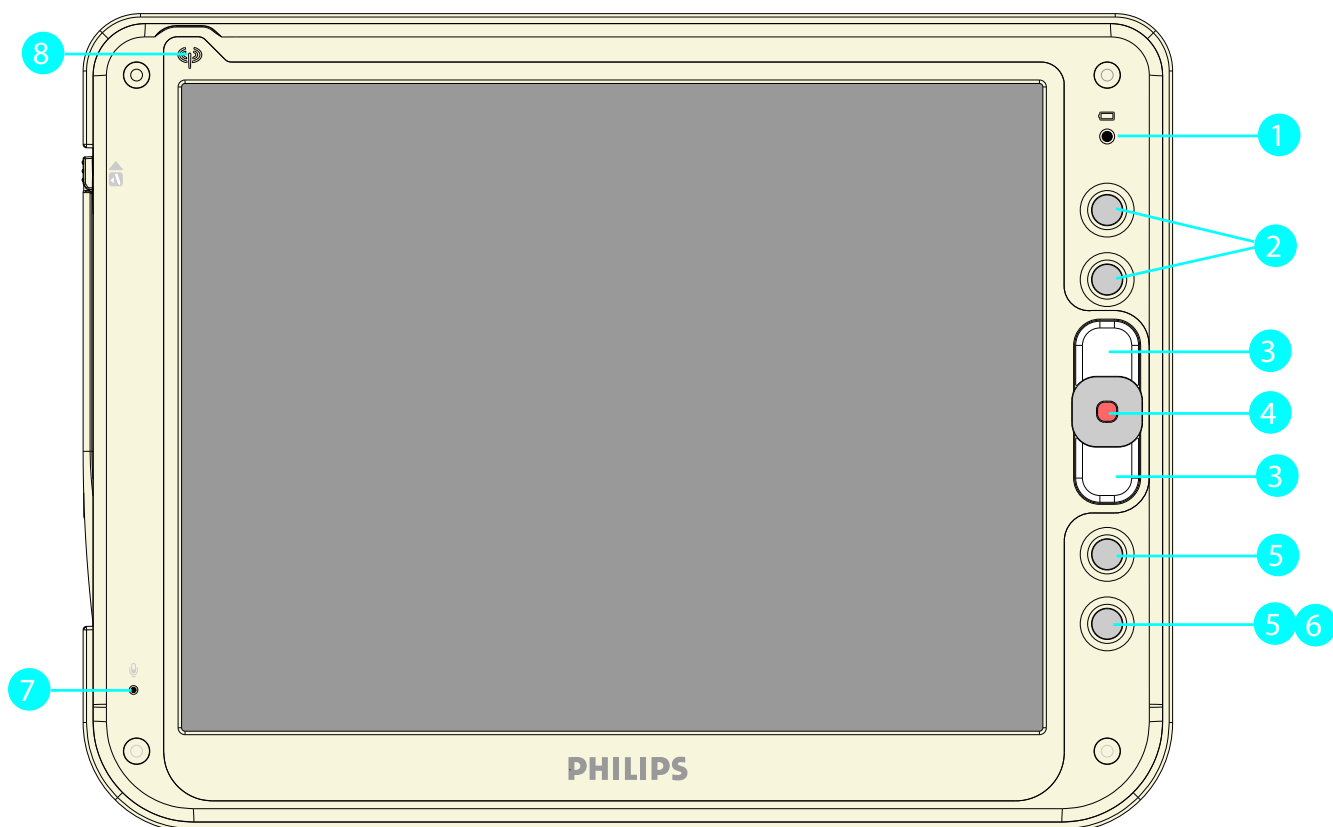

7.1.0 GETTING STARTED

7.1.1 BASE STATION SETUP

Connect power cord to the AC power adaptor.

Plug the cord into the base station first and then plug the other end into a power outlet.

7.1.2 LOAD BATTERY

Make sure the power switch at lower-left corner of your CMPD12 is in the OFF position.

Install the battery.

- Place CMPD12 on your desk with its face down.
- Place the battery in the battery slot then press it down to fit in.
- Push battery latch 1 into the locked position.
- For first time use, the battery requires five hours to become fully charged.

7.1.3 STYLUS RECALIBRATION

When the pad is powered on for the first time, the recalibration protocol will automatically launch.

Follow the instructions to walk through the process.

7.1.4 WLAN SETUP

- Tap START
- Tap Network and Dial-up Connections
- Tap 'Internal Wireless LAN' Settings icon
- A dialog box pops up. Choose the Wireless Networks tab. Tap the Refresh button in the Available Networks panel. In a few seconds, a list of available networks is displayed
- Select the network to which you wish to connect
- Tap CONFIGURE
- Tap OK

8.1.0 Power supply

There are two sources of power for CMPD12 operation: the battery and the AC adapter.

8.1.1 AC

You may operate your CMPD12 with AC power in two different ways. Mounted in the base station, or connected directly to the AC adapter. To run your CMPD12 on the base station, place the pad into and connect the AC adapter to the jack at the rear of the base station. To plug the product directly to the AC adapter, locate and plug into the DC adapter at the lower left corner of the product, under the orange rubber protector.

8.1.2 BATTERY

When using the CMPD12 for the first time, it is advisable to charge the battery for at least 5 hours.

After the initial charging, when not in use, the CMPD12 takes approximately two hours to fully charged; it takes 3 hours to fully charged while in use. A fully charged battery lasts up to 4 hours.

The power light on the top right indicates the level of battery charge.

Turn on the power to see the power light.

- **Full charge** The power light is solid green.
- **Low charge** The power light is blinking green when the battery's remaining charged falls to less than 6 percent.
- **Critical low charge** The power light blinks amber when the charge falls under 3 percent.

If your CMPD12 is powered up and immediately enters the suspend mode, it means the battery is uncharged. To avoid loss of data in memory, fully charge the unit within 24 hours.

*CAUTION: Recharge the CMPD12 any time a low charge warning appears.
Failure to recharge the battery will result in loss of data contained in internal memory (RAM).*

In order to optimize battery operation, open only the applications you are actually using.
To conserve battery power, disable WLAN when it's not in use.

To change battery

- Suspend your CMPD12 by turning the power switch to the OFF position.
- Unlock  the battery latch 1
- While one hand holds the battery latch two in the unlocked position, use the other hand to pull the battery out of the slot.
- Replace with another battery

NOTE: When fully charged and not in use, your CMPD12 has a life of one week.

CAUTION:

1. Suspend your CMPD12 before removing or changing the battery pack.
2. To avoid loss of data in memory, insert a charged battery in 24 hours.

11.0.0 PRECAUTIONS

11.1.0 Installation

The equipment should be installed near an easily accessible outlet.

Do not install or leave the monitor:

In places subject to extreme temperatures, for example near a radiator, heating vent, or in direct sunlight. Subjecting the LCD monitor to extreme temperatures, could cause deformations of the casing or malfunctions.

In places subject to mechanical vibration or shock.

Near any equipment that generates a strong magnetic field, such as a TV or various other medical appliances.

In places subject to inordinate amounts of dust, dirt, or sand, for example near an open window or an outdoor exit.

If setting up temporarily in an outdoor environment, be sure to take adequate precautions against airborne dust and dirt. Otherwise irreparable malfunctions could occur.

11.2.0 Handling

Do not press on or scratch the LCD screen. Do not place a heavy object on the LCD screen. This may cause the screen to lose uniformity or cause LCD panel malfunctions.

If the monitor is used in a cold place, a residual image may appear in the screen. This is not a malfunction.

The screen returns to normal as the temperature rises to a normal operating level.

If a still picture is displayed for a long time, a residual image may appear for a while. The residual image will eventually disappear.

The LCD panel becomes warm during operation. This is not a malfunction.

11.3.0 Maintenance

Be sure to unplug the power cord from the mains when cleaning your LCD monitor.

The front polarizer can be easily damaged. Take care not to scratch the front surface with any hard or abrasive material. Dust, finger marks, grease etc. can be removed with a soft damp cloth (a small amount of mild detergent can be used on the damp cloth). Do not apply water or detergent directly to the front surface as this may cause staining or damage the electronic components. Never use any solvent on the front polarizer or module as this may cause permanent damage. Wipe off water drop immediately. Long contact with water may cause discoloration spots. When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth."

11.4.0 Transportation

Disconnect all cables from the monitor when transporting.

When you transport this LCD display, hold the base sections of the display stand firmly in both hands. If you drop the monitor, you may be injured or the monitor may be damaged.

When you transport this monitor for repair or shipment, use the original cardboard box and packing materials.

11.5.0 Replacement of the backlight

A specially designed fluorescent tube is installed as the lighting apparatus for this monitor. If the screen becomes dark, unstable, or does not come on, consult your Customer service for replacing the fluorescent tube

11.6.0 Disposal of the LCD monitor

Do not dispose of this monitor with general household waste.

The fluorescent tube used in this LCD monitor contains mercury. Disposal of this monitor must be carried out in accordance with the regulations of your local sanitation authority.

For countries in the European Union



This symbol indicates that this product (including the cables, plugs and accessory) must not be disposed of with the other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the collection of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, or your supplier's office.


WEEE Symbol

("crossed-out wheeled bin")

For countries outside the European Union

Disposal of electrical products in countries outside the European Union should be done in line with local regulations.

INTENTIONALLY LEFT BLANK



4519 206 1007.1

Q802UWG
USB Wireless Adapter
User Manual

Contents

REVISION HISTORY	3
INTRODUCTION	4
◆ <i>Package Contents</i>	
◆ <i>Minimum System Requirements</i>	
CONNECTING THE WIRELESS ADAPTER	5
STATUS LEDS	6
INSTALLING THE WIRELESS ADAPTER	7
◆ Windows XP Service Pack 2	7
➤ <i>Install the Wireless Adapter Driver and Utility</i>	
➤ <i>Configuring the Winbond Wireless Utility</i>	
➤ <i>Configuration</i>	
➤ <i>Uninstalling the Wireless Adapter Driver and Utility</i>	
◆ Windows 2000	19
➤ <i>Install the Wireless Adapter Driver and Utility</i>	
➤ <i>Configuring the Winbond Wireless Utility</i>	
➤ <i>Configuration</i>	
➤ <i>Uninstalling the Wireless Adapter Driver and Utility</i>	
TROUBLE SHOOTING	30

Revision History

Revision	Updated	Notes
1.00	08/15/2005	Initial Release

Introduction

Thank you for purchasing the Wireless Adapter. This Wireless Adapter is easy to use and easy to setup. If you are tired of all those messy wires needed to connect a lap-top to your Home network, then take your networking to the next level with the Wireless Adapter. You will be able to share files, printers and even your High-Speed Internet access wirelessly.

Package Contents

Make sure the following items came in this package:

- Wireless Adapter
- Wireless Adapter Installation and User's Manual CD

Minimum System Requirements

- Microsoft Windows 98 Second Edition (SE), Windows ME, Windows XP, or Windows 2000 installed

Connecting the Wireless Adapter

1. Your computer can be on or off; it will not affect the installation process. Locate an available USB slot on your PC. If you are not sure where this may be, please consult your computer's User Manual.
2. Insert the Wireless Adapter into the appropriate USB slot. Your hardware is now installed.

Status LEDs

LED	MEANING
POWER	Indicates that the Wireless Adapter is powered on when the LED lights up.
LINK	Indicates link status. If the light is blinking, it means there is data sending or receiving via wireless.

Installing the Wireless Adapter

Windows XP:

Note: If you have installed the Wireless Adapter driver before, please uninstall the old version first.

1. After you have installed the Wireless Adapter your computer will display a **Found New Hardware Wizard** screen, click **Cancel** to continue.




2. Insert **Wireless Adapter Installation and User's Manual** CD into your CD-ROM, then the installation will be activated automatically. Click the **Driver Install** icon to begin the installation.




3. **Winbond Wireless Setup** will install the driver and utility on your system, click **Next** to continue.




4. On the **Select Destination Directory** screen, click **Next** to accept the Destination Directory for driver installation.

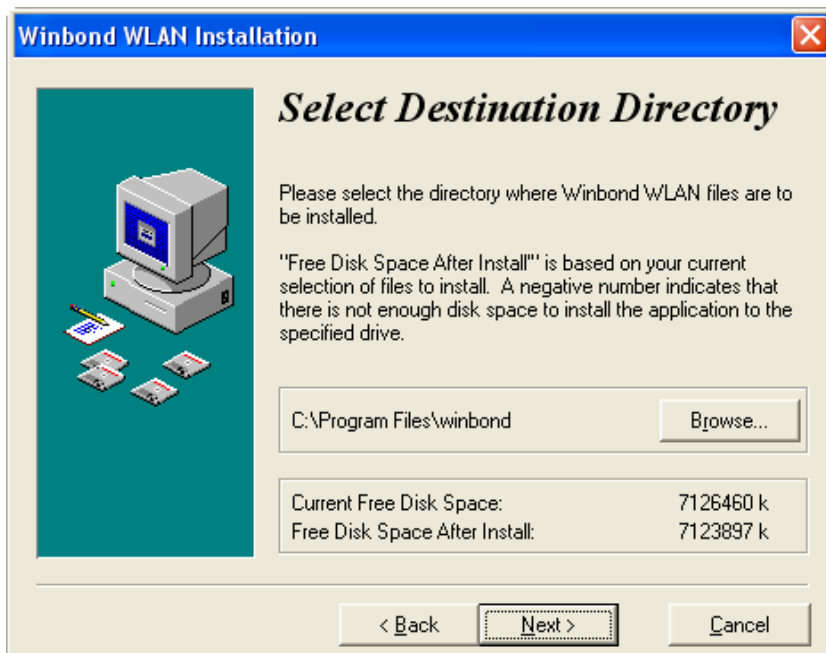


5. Press the **Next** button to begin the installation.

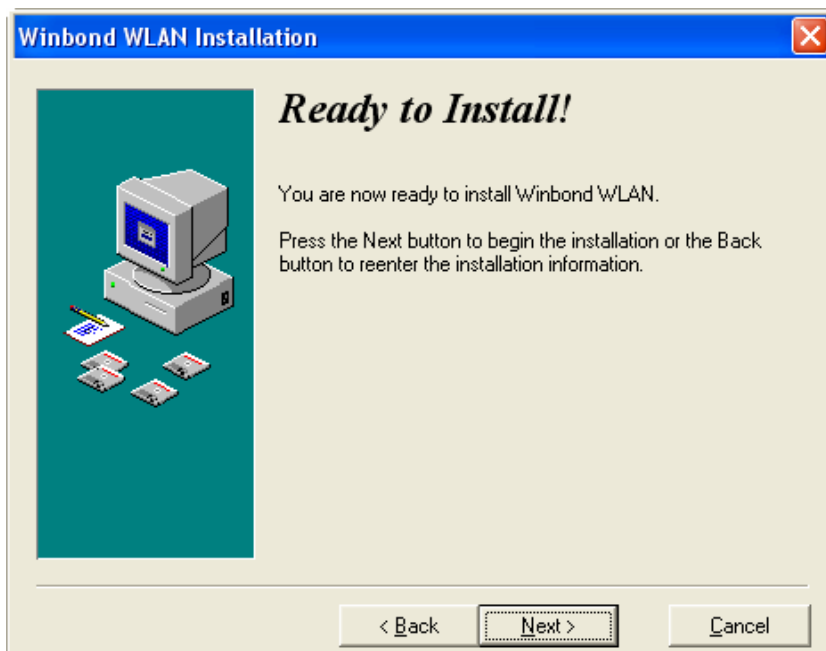

6. Wireless Adapter Driver and Utility are installing.

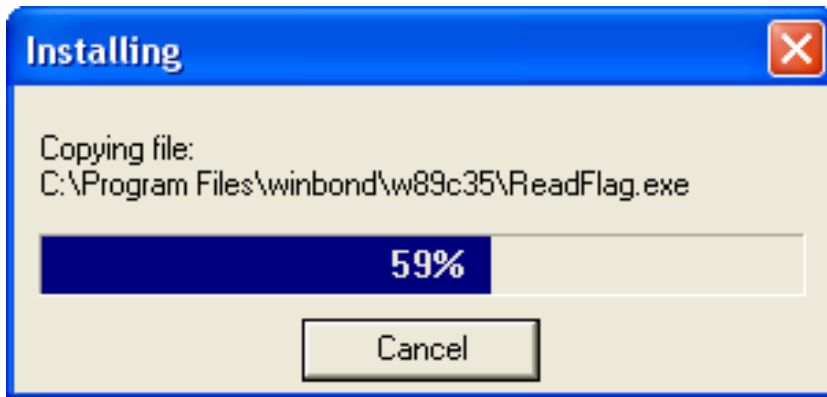


7. The installation is now complete, please click **Finish**.

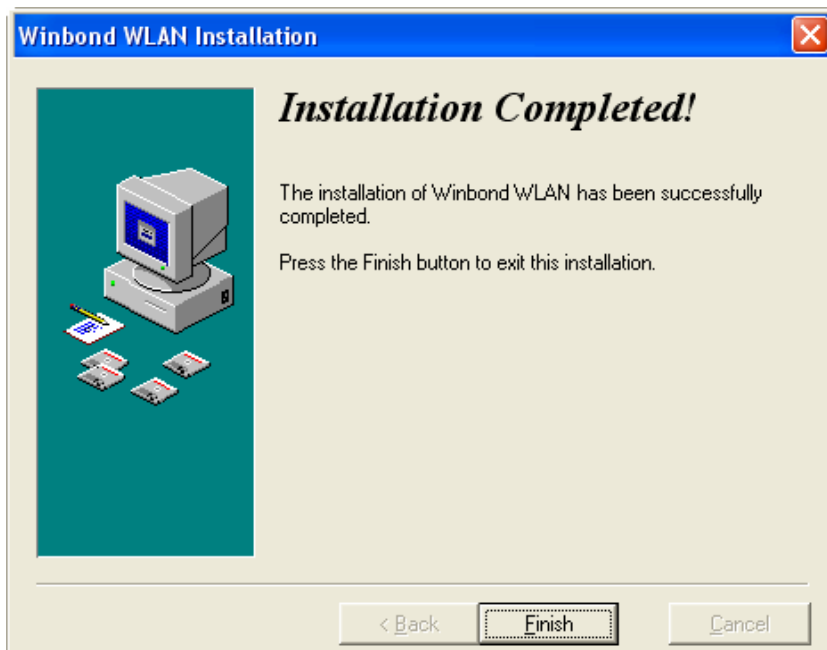


Configuring the Winbond Wireless Utility

Note: If you have installed the **Windows XP Service Pack 2**. You can use the **Windows Zero Configuration** for Wireless Configuring.


1. On the **Notification Area**, right-click the **Winbond Utility** icon.

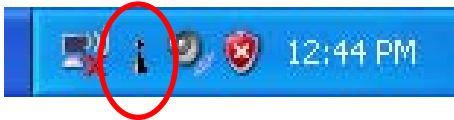


2. **Winbond Utility Selection** screen will be displayed, click **Stop Windows Zero Configuration**.

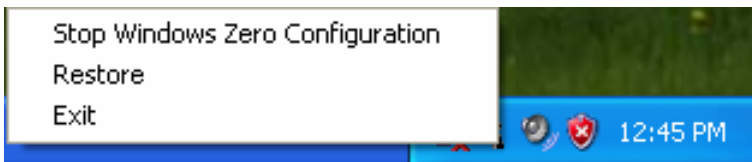

3. Select **Site Survey** Tab, all available Access Points would be listed. Click on the desired Access Point, and click the **Config** button for Wireless configuring.

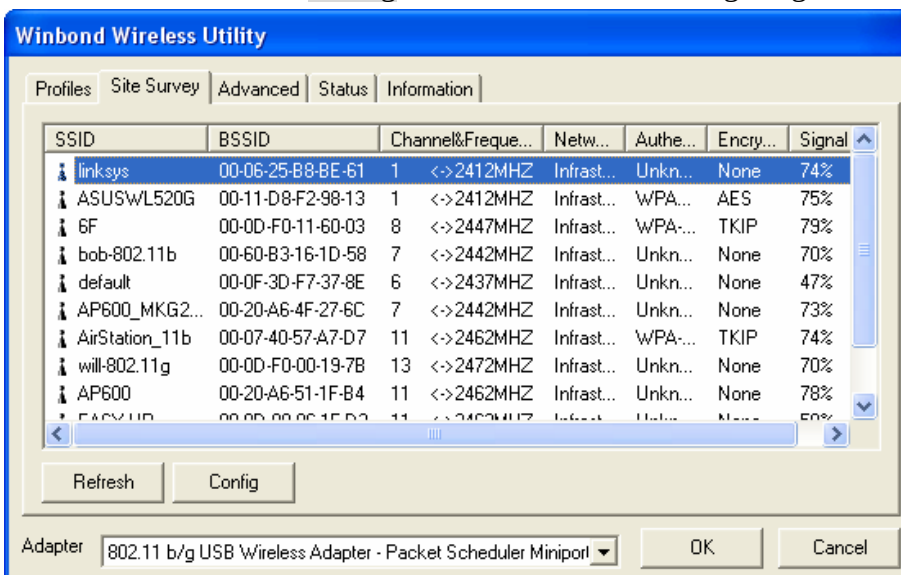


4. On the **Wireless Network Properties** screen, you may set Network Name (SSID), Wireless Network Security Key or AD-HOC network.

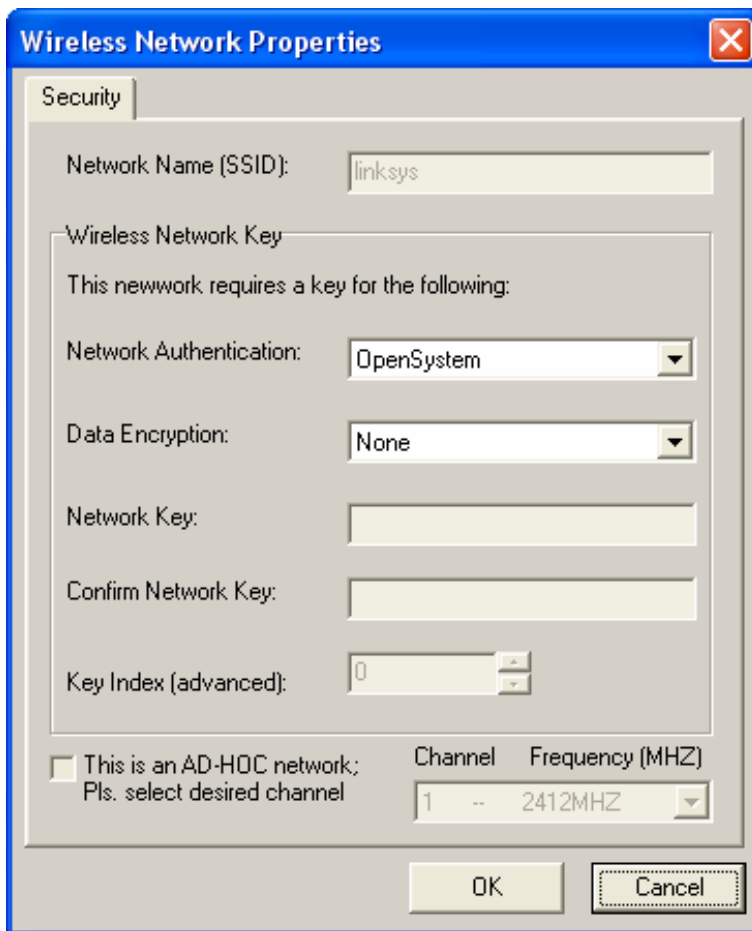

The **Wireless Network Properties** dialog box is shown with the **Security** tab selected. It contains the following fields and controls:

- Network Name (SSID):** A text box containing the value "linksys".
- Wireless Network Key:** A section header.
- This network requires a key for the following:** A text label.
- Network Authentication:** A dropdown menu set to "OpenSystem".
- Data Encryption:** A dropdown menu set to "None".
- Network Key:** A text box.
- Confirm Network Key:** A text box.
- Key Index (advanced):** A spinner box set to "0".
- AD-HOC Network:** A checkbox labeled "This is an AD-HOC network; Pls. select desired channel" which is currently unchecked.
- Channel:** A dropdown menu set to "1".
- Frequency (MHZ):** A dropdown menu set to "2412MHZ".
- Buttons:** "OK" and "Cancel" buttons at the bottom right.

5. Click on the desired profile, and click the **Connect** button to take effect.

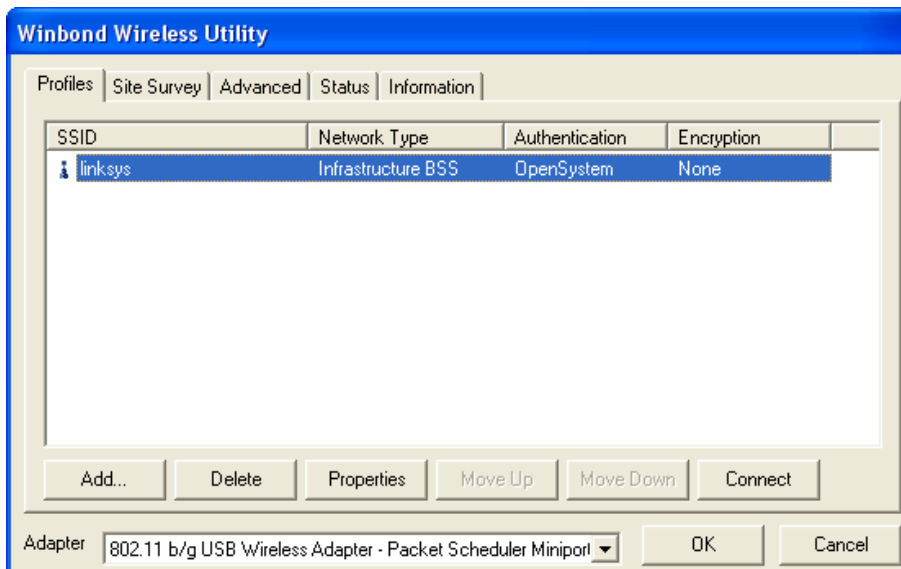

The **Winbond Wireless Utility** window is shown with the **Profiles** tab selected. It displays a table of wireless profiles and includes several control buttons at the bottom.

SSID	Network Type	Authentication	Encryption
linksys	Infrastructure BSS	OpenSystem	None

Buttons at the bottom: Add..., Delete, Properties, Move Up, Move Down, Connect.


Adapter: 802.11 b/g USB Wireless Adapter - Packet Scheduler Miniport

Buttons at the bottom right: OK, Cancel.

Configuration

- **Profile**


The **Profile Tab** allows you to set values for all parameters by selecting a previously defined profile. To create a profile, click **Add**, type a profile name and set the corresponding parameters. If one of the profiles is no longer used, you may remove it by clicking the **Delete** button. After changing parameters, click the **Connect** button to take effect. You can have multiple profiles and modify the profile at any time.

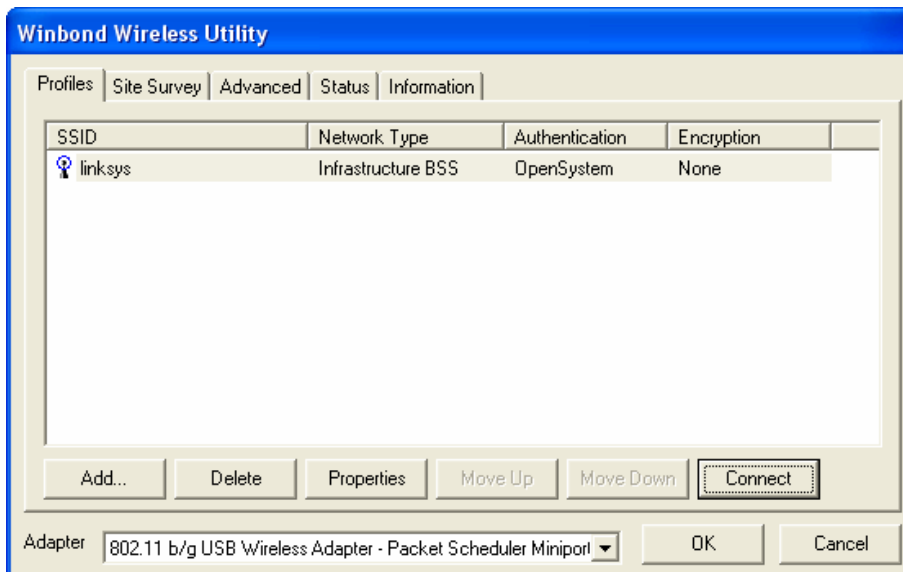

- **Site Survey**


Site Survey Tab lists the features of the available Access Points within range of the Wireless Adapter's signal.

Click on the desired Access Point, and click **Config** for Wireless Configuration. You may click **Refresh** to refresh the list.

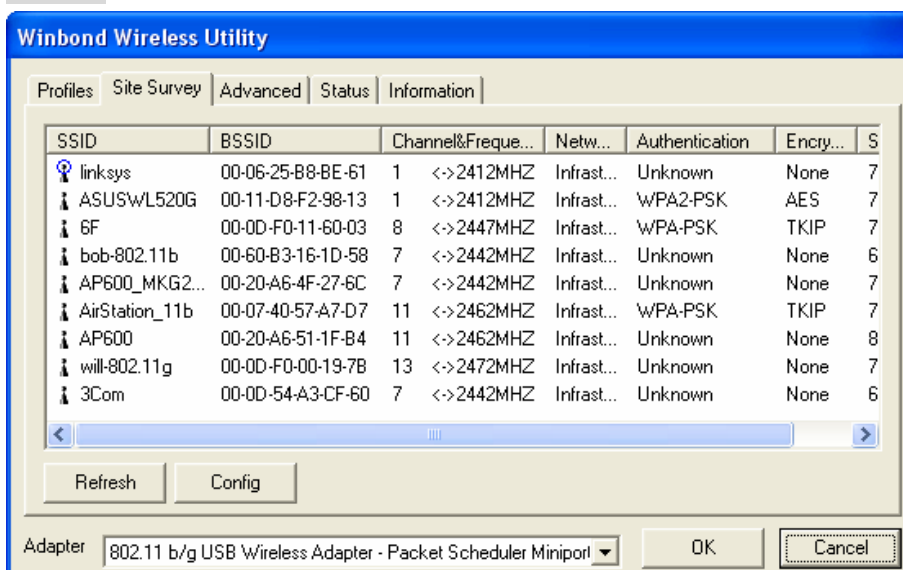

- **Advance**

The Configuration Utility also offers the advanced configuration for user to set the Wireless Adapter under certain network environment. These advanced options include RTS Threshold, Fragmentation Threshold, Preamble Type, Tx Rate, Power Save, and Region.

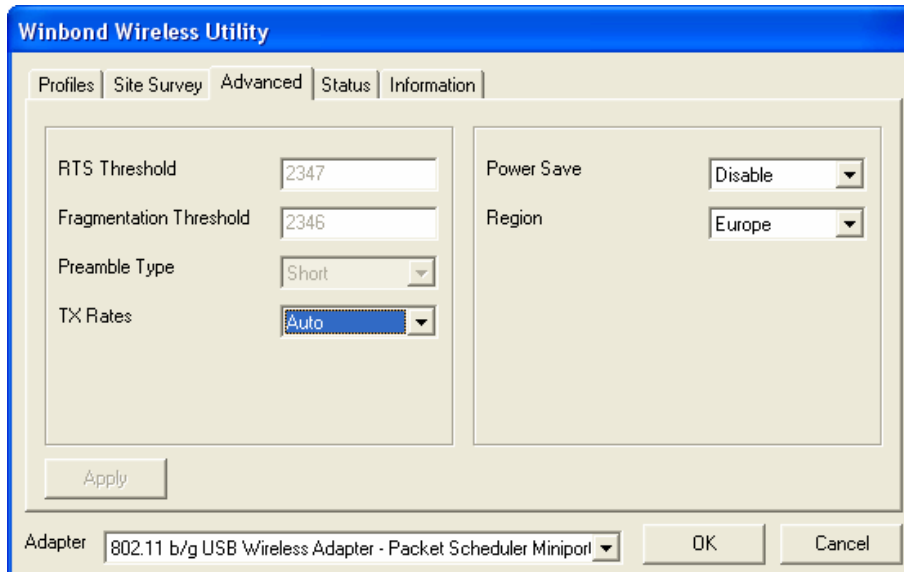

The image shows the 'Winbond Wireless Utility' window with the 'Advanced' tab selected. The window has a blue title bar and a tabbed interface with 'Profiles', 'Site Survey', 'Advanced', 'Status', and 'Information'. The 'Advanced' tab contains two columns of settings. The left column includes 'RTS Threshold' (text box with '2347'), 'Fragmentation Threshold' (text box with '2346'), 'Preamble Type' (dropdown menu with 'Short'), and 'TX Rates' (dropdown menu with 'Auto'). The right column includes 'Power Save' (dropdown menu with 'Disable') and 'Region' (dropdown menu with 'Europe'). Below these settings is an 'Apply' button. At the bottom of the window, there is an 'Adapter' dropdown menu showing '802.11 b/g USB Wireless Adapter - Packet Scheduler Miniport', and 'OK' and 'Cancel' buttons.

Setting	Value
RTS Threshold	2347
Fragmentation Threshold	2346
Preamble Type	Short
TX Rates	Auto
Power Save	Disable
Region	Europe

Adapter: 802.11 b/g USB Wireless Adapter - Packet Scheduler Miniport

- **Status**

Network Name

The field shows the association status to available Access Point with SSID of the Access Point.

Link Status

Shows the whether the link is Connect or Disconnected.

Current Channel

Shows the channel on which the connection is made.

Current Speed


Shows the highest transmit rate of the current association.

Link Quality / Signal Strength

The Link Quality and Signal Strength bar graph is only active when the node is in Infrastructure Mode. The bar graph displays the quality and strength of the link between the node and its Access Point.

Singnal Noise

This displays the noise level of the link between the node and its Access Point.

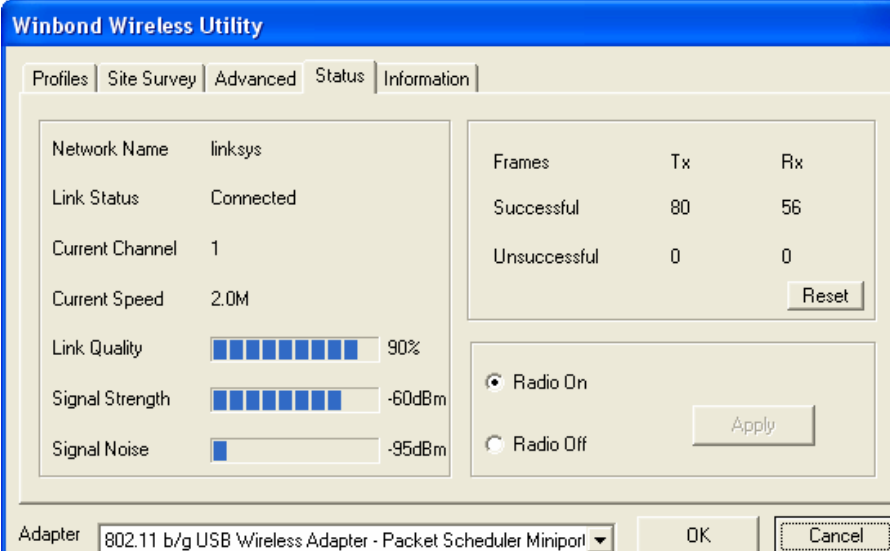

The screenshot shows the 'Status' tab of the Winbond Wireless Utility. It displays various connection metrics for a 'linksys' network. The 'Link Status' is 'Connected'. The 'Current Channel' is '1' and the 'Current Speed' is '2.0M'. The 'Link Quality' is shown as a bar graph at 90%. The 'Signal Strength' is shown as a bar graph at -60dBm. The 'Signal Noise' is shown as a bar graph at -95dBm. A table shows 'Frames' with 'Tx' and 'Rx' counts: 'Successful' (80, 56) and 'Unsuccessful' (0, 0). There are 'Radio On' and 'Radio Off' radio buttons, and 'Reset', 'Apply', 'OK', and 'Cancel' buttons.


Network Name	linksys
Link Status	Connected
Current Channel	1
Current Speed	2.0M
Link Quality	90%
Signal Strength	-60dBm
Signal Noise	-95dBm

Frames	Tx	Rx
Successful	80	56
Unsuccessful	0	0

Adapter: 802.11 b/g USB Wireless Adapter - Packet Scheduler Miniport

- **Information**

About Tab shows the product version including the detail of Configuration Utility, Driver, and NIC MAC Address.

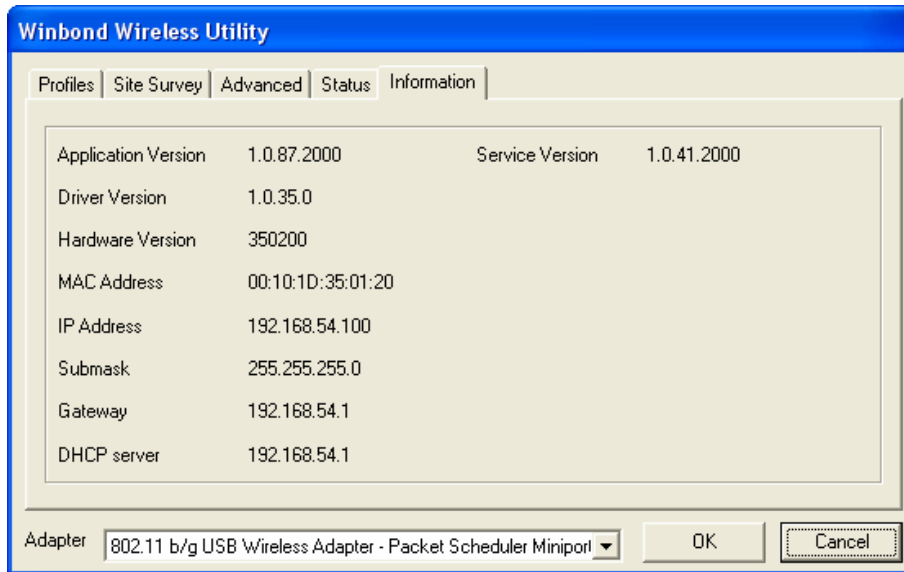


Uninstalling the Wireless Adapter Driver and Utility


1. For uninstalling the Wireless Adapter, please go to:**Start->Settings->Control Panel->Add or Remove Programs->Winbond WLAN** under Windows environment. Then click **Remove**.





Add or
Remove
Programs

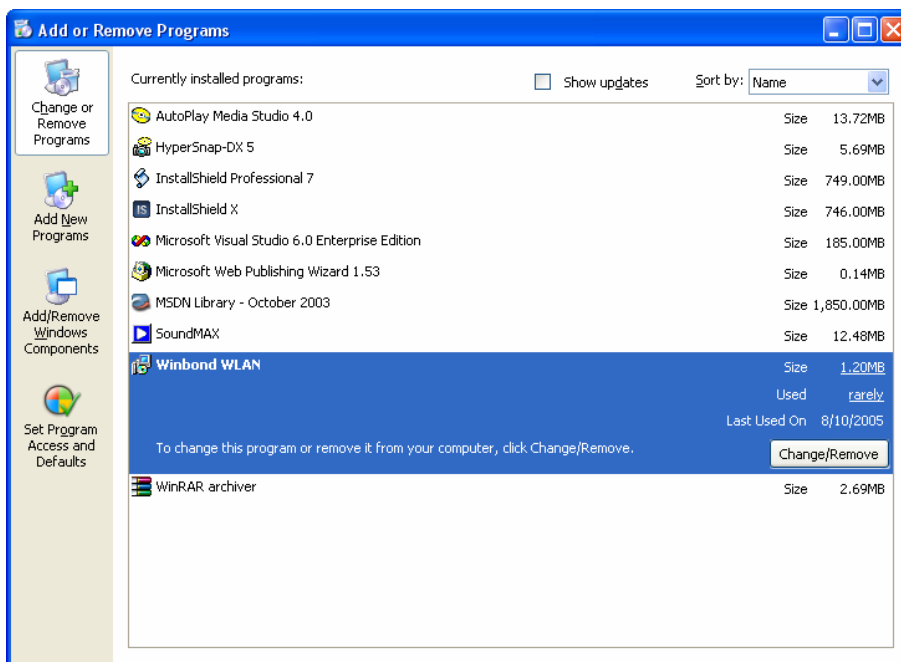

2. On the next screen, click **Next** button to accept automatically uninstall for Wireless LAN Driver.

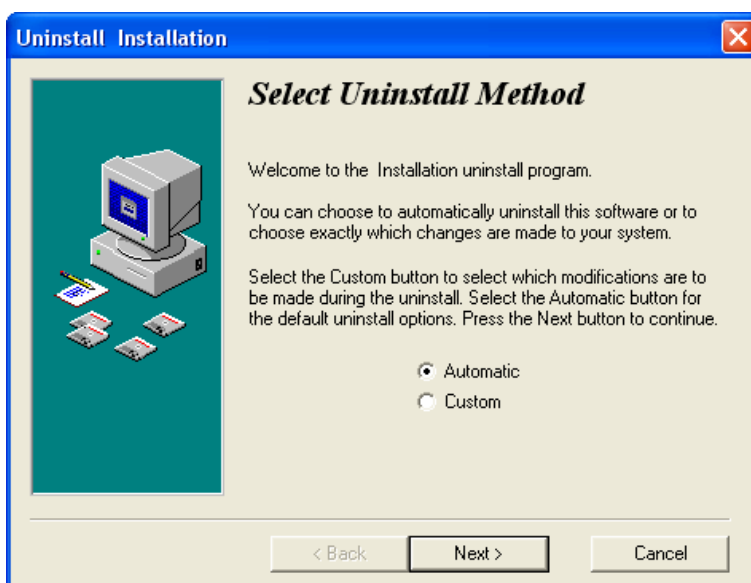

3. Click **Finish** button.

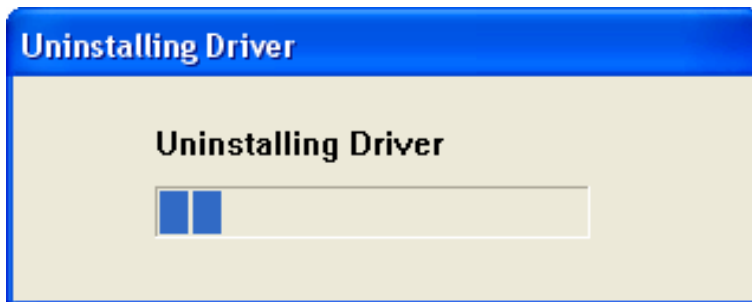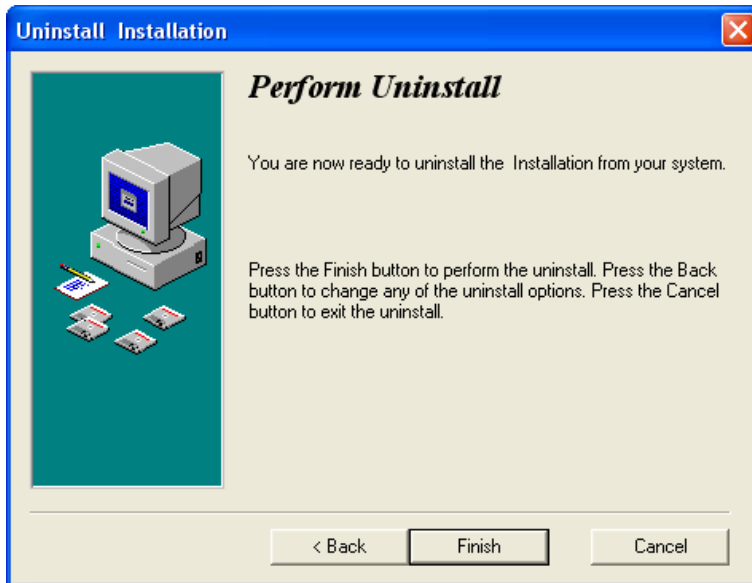

4. The **USB Wireless Adapter** can now be safely removed from the system when the un-installation is done.

Windows 2000:

1. After you have installed the Wireless Adapter your computer will display a **Found New Hardware Wizard** screen, click **Cancel** to continue.




2. Insert **Wireless Adapter Installation and User's Manual** CD into your CD-ROM; then the installation will be activated automatically. Click the **Driver Install** icon to begin the installation.




3. **Winbond Wireless Setup** will install the driver and utility on your system, click **Next** to continue.




4. On the **Select Destination Directory** screen, click **Next** to accept the Destination Directory for driver installation..

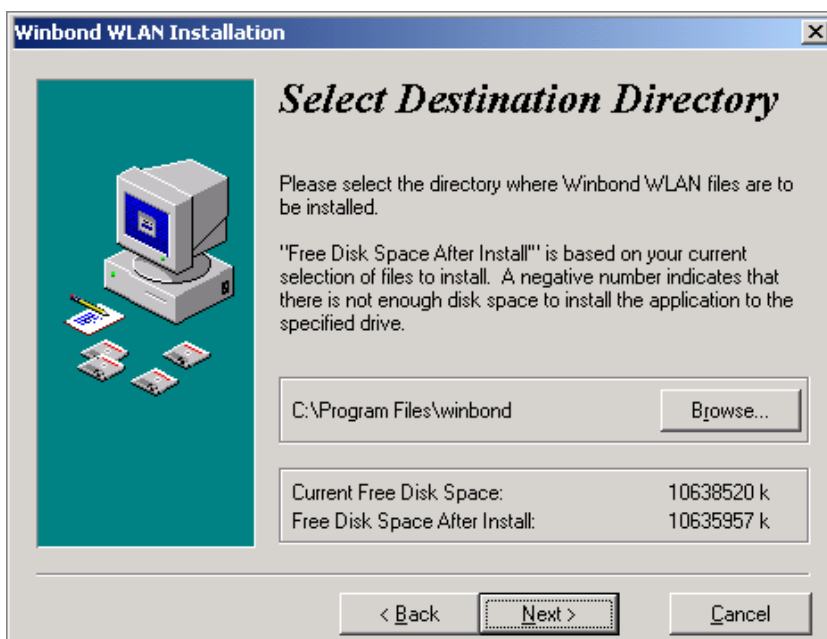


5. Press the **Next** button to begin the installation.

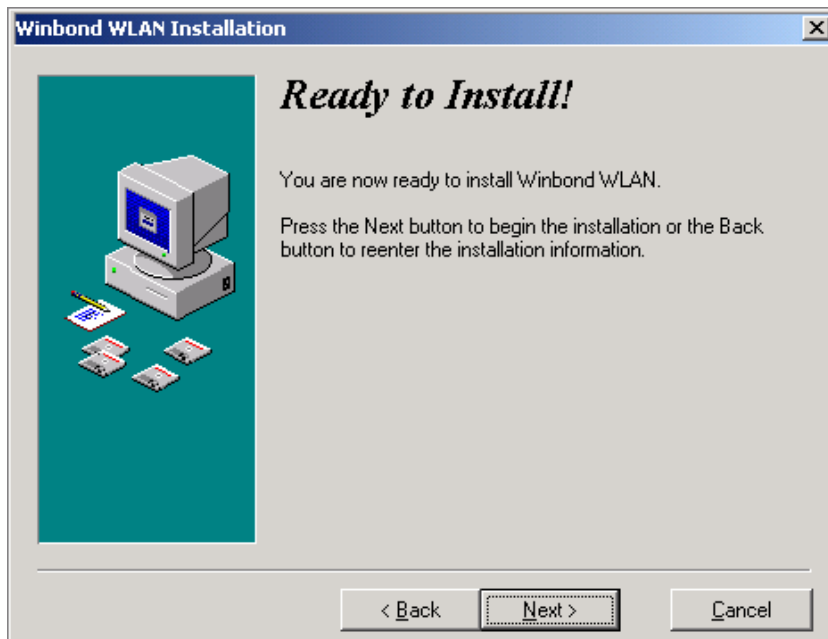

6. Wireless Adapter Driver and Utility are installing.

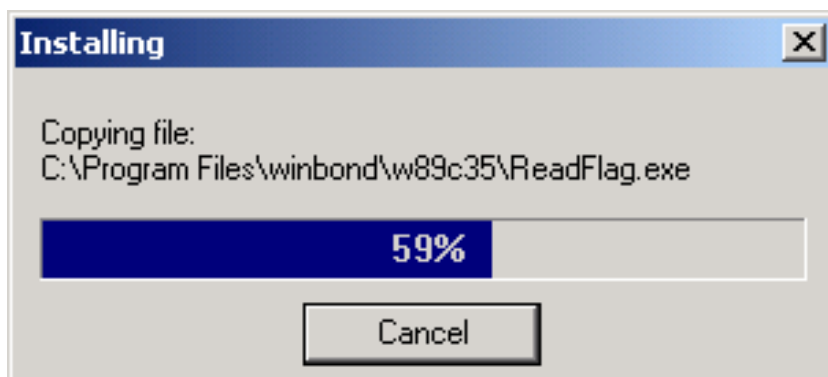


7. The installation is now complete, please click **Finish**.

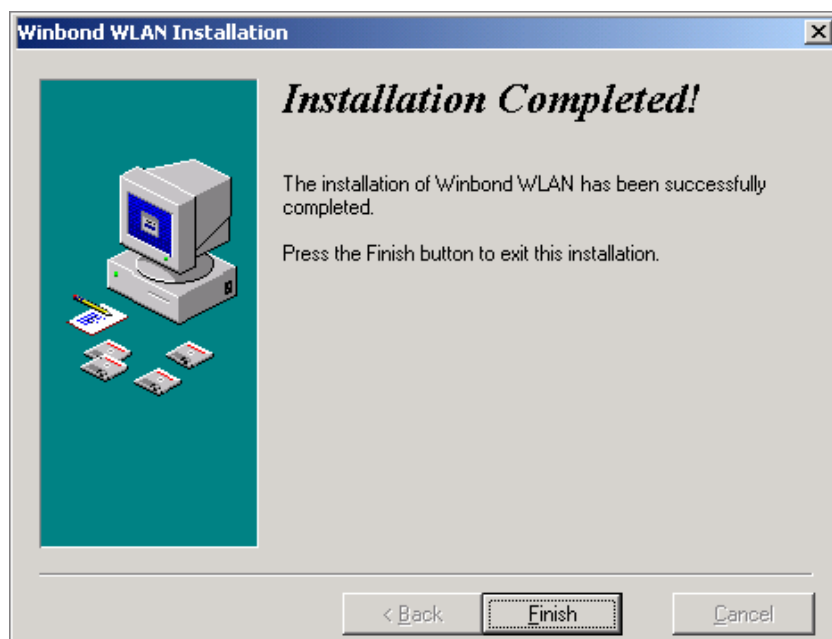


Configuring the Winbond Wireless Utility


1. On the **Notification Area**, right-click the **Winbond Utility** icon.

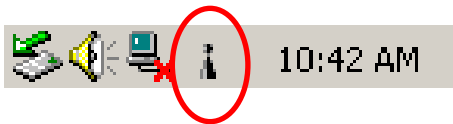

2. Select **Site Survey** Tab, all available Access Points would be listed. Click on the desired Access Point, and click **Config** button for Wireless configuring.

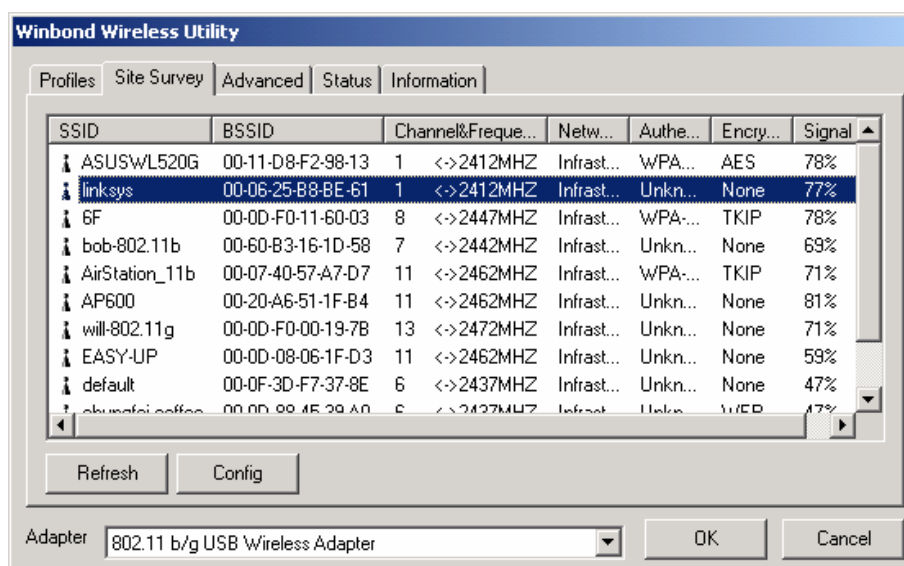


3. On the **Wireless Network Properties** screen, you may set Network Name (SSID), Wireless Network Security Key or AD-HOC network.

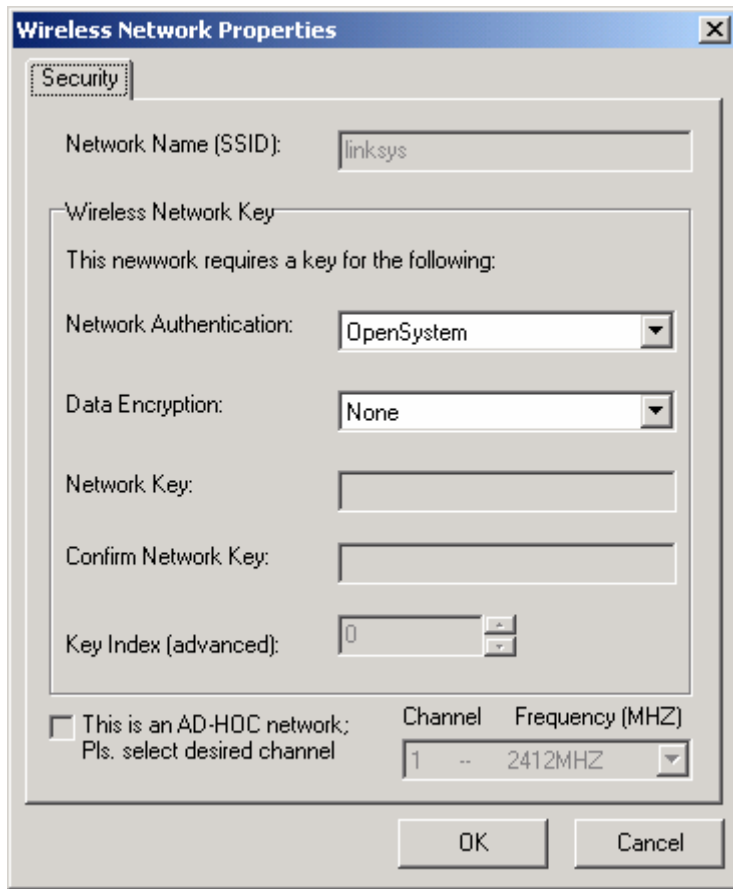

The **Wireless Network Properties** dialog box is shown with the **Security** tab selected. It contains the following fields and controls:

- Network Name (SSID):** A text box containing the value "linksys".
- Wireless Network Key:** A section header.
- This network requires a key for the following:** A text label.
- Network Authentication:** A dropdown menu set to "OpenSystem".
- Data Encryption:** A dropdown menu set to "None".
- Network Key:** An empty text box.
- Confirm Network Key:** An empty text box.
- Key Index (advanced):** A spinner box set to "0".
- AD-HOC network:** A checkbox labeled "This is an AD-HOC network; Pls. select desired channel" which is currently unchecked.
- Channel:** A dropdown menu set to "1".
- Frequency (MHZ):** A dropdown menu set to "2412MHZ".
- Buttons:** "OK" and "Cancel" buttons at the bottom.

4. Click on the desired profile, and click the **Connect** button to take effect.

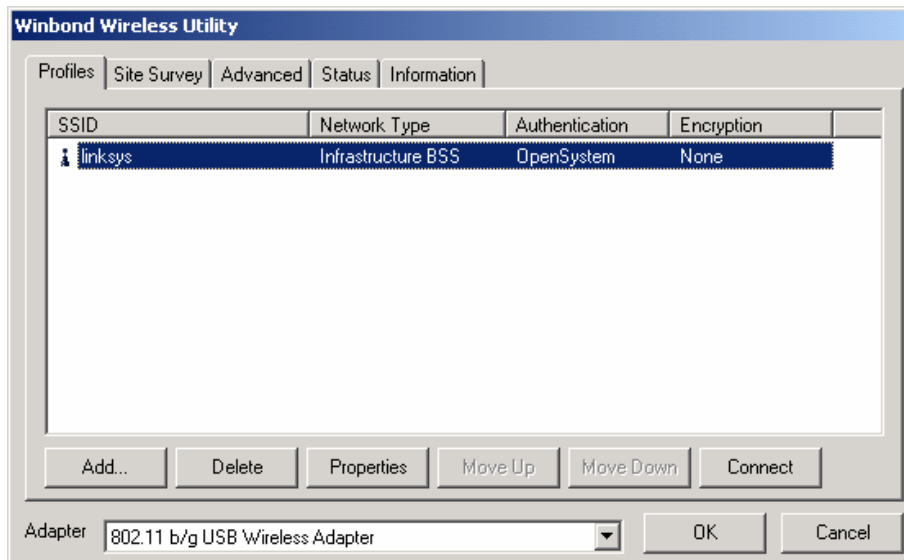

The **Winbond Wireless Utility** window is shown with the **Profiles** tab selected. It displays a table of wireless profiles and includes control buttons at the bottom.

SSID	Network Type	Authentication	Encryption
linksys	Infrastructure BSS	OpenSystem	None


Below the table are the following buttons: **Add...**, **Delete**, **Properties**, **Move Up**, **Move Down**, and **Connect**.

At the bottom of the window, there is an **Adapter** dropdown menu set to "802.11 b/g USB Wireless Adapter", and **OK** and **Cancel** buttons.

Configuration

- **Profile**

The **Profile Tab** allows you to set values for all parameters by selecting a previously defined profile. To create a profile, click **Add**, type a profile name and set the corresponding parameters. If one of the profiles is no longer used, you may remove it by clicking the **Delete** button. After changing parameters, click the **Connect** button to take effect. You can have multiple profiles and modify the profile at any time.

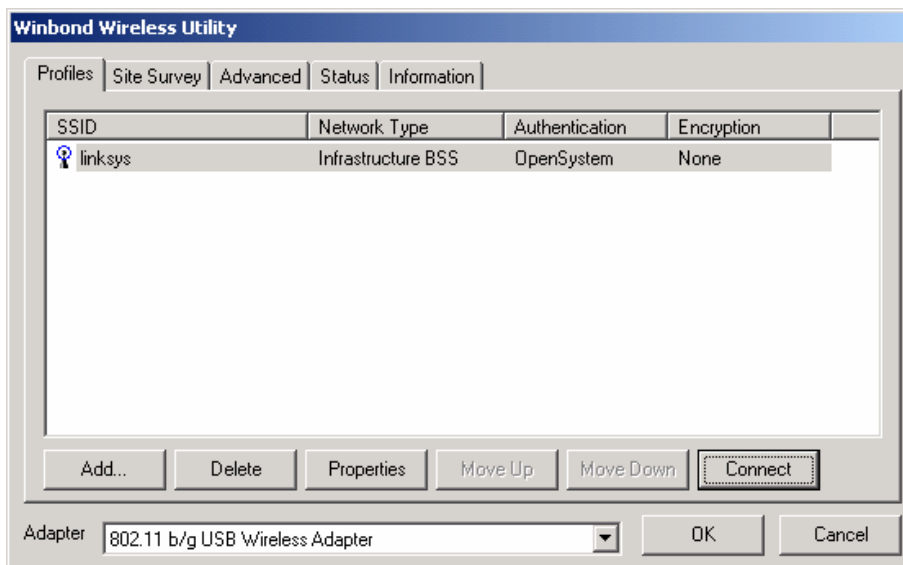

- **Site Survey**

Site Survey Tab lists the features of the available Access Points within range of the Wireless Adapter's signal.

Click on the desired Access Point, and click **Config** for Wireless Configuration. You may click **Refresh** to refresh the list.

Winbond Wireless Utility

Profiles

Site Survey

Advanced

Status

Information

SSID	BSSID	Channel&Freque...	Netw...	Authe...	Encry...	Signal
ASUSWL520G	00-11-D8-F2-98-13	1 <->2412MHZ	Infrast...	WPA...	AES	78%
linksys	00-06-25-B8-BE-61	1 <->2412MHZ	Infrast...	Unkn...	None	77%
6F	00-0D-F0-11-60-03	8 <->2447MHZ	Infrast...	WPA...	TKIP	73%
bob-802.11b	00-60-B3-16-1D-58	7 <->2442MHZ	Infrast...	Unkn...	None	68%
AirStation_11b	00-07-40-57-A7-D7	11 <->2462MHZ	Infrast...	WPA...	TKIP	75%
AP600	00-20-A6-51-1F-B4	11 <->2462MHZ	Infrast...	Unkn...	None	80%
will-802.11g	00-0D-F0-00-19-7B	13 <->2472MHZ	Infrast...	Unkn...	None	72%
EASY-UP	00-0D-08-06-1F-D3	11 <->2462MHZ	Infrast...	Unkn...	None	59%
default	00-0F-3D-F7-37-8E	6 <->2437MHZ	Infrast...	Unkn...	None	47%
chunghwa-net	00-0D-08-4E-39-A0	6 <->2437MHZ	Infrast...	Unkn...	WEP	47%

Refresh

Config

Adapter


802.11 b/g USB Wireless Adapter

OK

Cancel

- **Advance**

The Configuration Utility also offers the advanced configuration for user to set the Wireless Adapter under certain network environment. These advanced options include RTS Threshold, Fragmentation Threshold, Preamble Type, Tx Rate, Power Save, and Region.

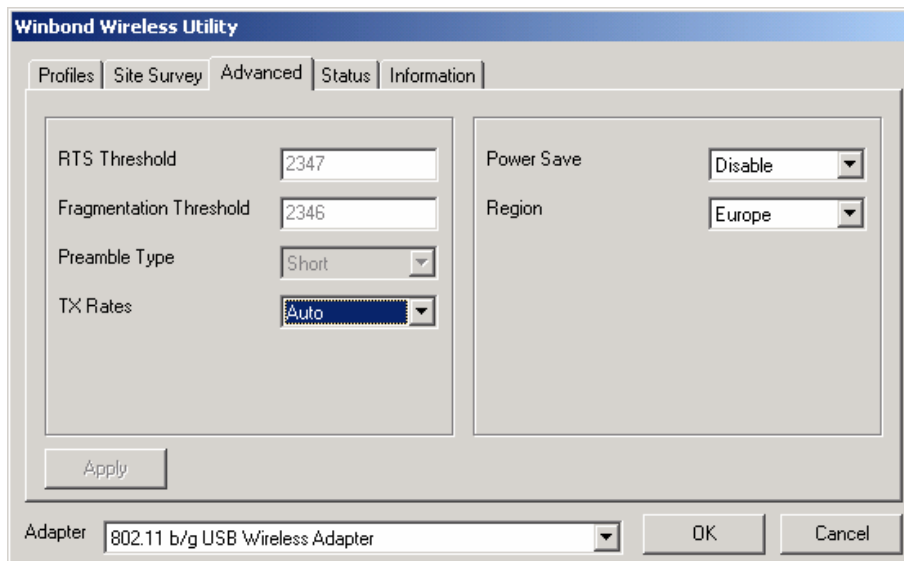

The image shows a screenshot of the 'Winbond Wireless Utility' window, specifically the 'Advanced' tab. The window has a title bar with the text 'Winbond Wireless Utility'. Below the title bar are five tabs: 'Profiles', 'Site Survey', 'Advanced' (which is selected), 'Status', and 'Information'. The main area of the window is divided into two columns. The left column contains four settings: 'RTS Threshold' with a text box containing '2347', 'Fragmentation Threshold' with a text box containing '2346', 'Preamble Type' with a dropdown menu showing 'Short', and 'TX Rates' with a dropdown menu showing 'Auto'. The right column contains two settings: 'Power Save' with a dropdown menu showing 'Disable', and 'Region' with a dropdown menu showing 'Europe'. Below these settings is an 'Apply' button. At the bottom of the window is a label 'Adapter' followed by a dropdown menu showing '802.11 b/g USB Wireless Adapter', and two buttons: 'OK' and 'Cancel'.

Setting	Value
RTS Threshold	2347
Fragmentation Threshold	2346
Preamble Type	Short
TX Rates	Auto
Power Save	Disable
Region	Europe

Adapter: 802.11 b/g USB Wireless Adapter

- **Status**

Network Name

The field shows the association status to available Access Point with SSID of the Access Point.

Link Status

Shows the whether the link is Connect or Disconnected.

Current Channel

Shows the channel on which the connection is made.

Current Speed


Shows the highest transmit rate of the current association.

Link Quality / Signal Strength

The Link Quality and Signal Strength bar graph is only active when the node is in Infrastructure Mode. The bar graph displays the quality and strength of the link between the node and its Access Point.

Singnal Noise

This displays the noise level of the link between the node and its Access Point.

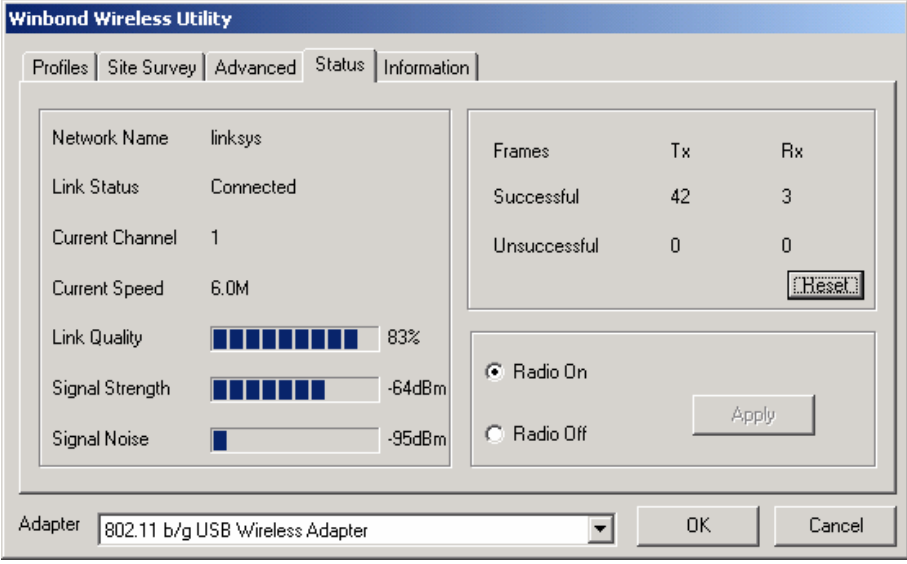

The screenshot shows the 'Winbond Wireless Utility' window with the 'Status' tab selected. The window displays various connection metrics for a 'linksys' network. On the left, a list of fields includes Network Name, Link Status, Current Channel, Current Speed, Link Quality, Signal Strength, and Signal Noise, each with a corresponding bar graph or value. On the right, a table shows frame statistics (Successful, Unsuccessful) for both Tx and Rx. Below this table are radio control options (Radio On/Off) and an 'Apply' button. At the bottom, there is an 'Adapter' dropdown menu and 'OK'/'Cancel' buttons.

Network Name	linksys
Link Status	Connected
Current Channel	1
Current Speed	6.0M
Link Quality	83%
Signal Strength	-64dBm
Signal Noise	-95dBm


Frames	Tx	Rx
Successful	42	3
Unsuccessful	0	0

Radio On (selected) / Radio Off

Adapter: 802.11 b/g USB Wireless Adapter


Information

About Tab shows the product version including the detail of Configuration Utility, Driver, and NIC MAC Address.

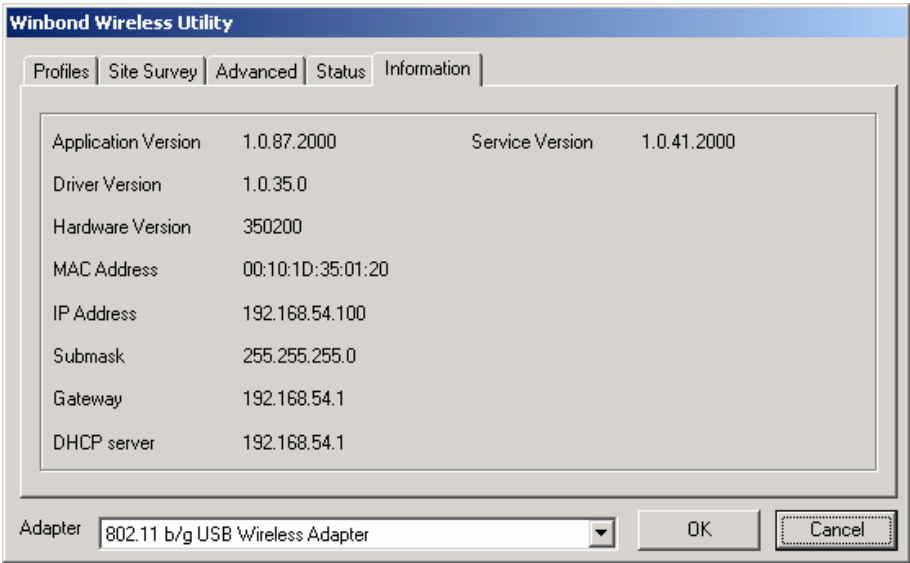


Uninstalling the Wireless Adapter Driver and Utility



1. For uninstalling the Wireless Adapter, please go to:**Start->Settings->Control Panel->Add or Remove Programs->Winbond WLAN** under Windows environment. Then click **Remove**.

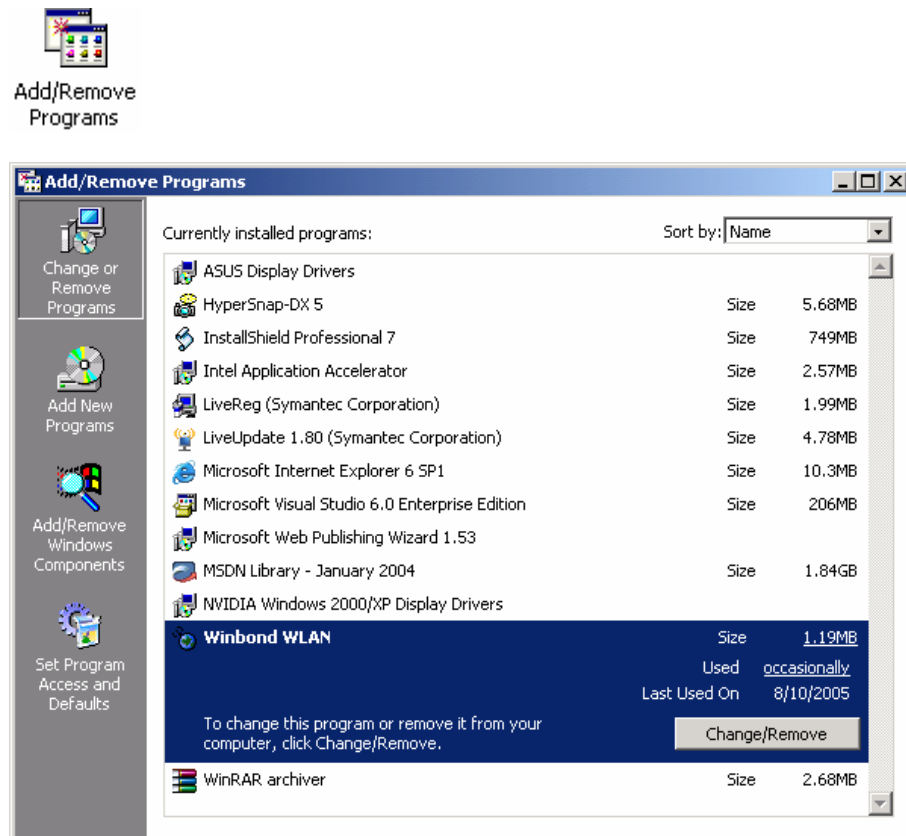

2. On the next screen, click **Next** button to accept automatically uninstall for Wireless LAN Driver.

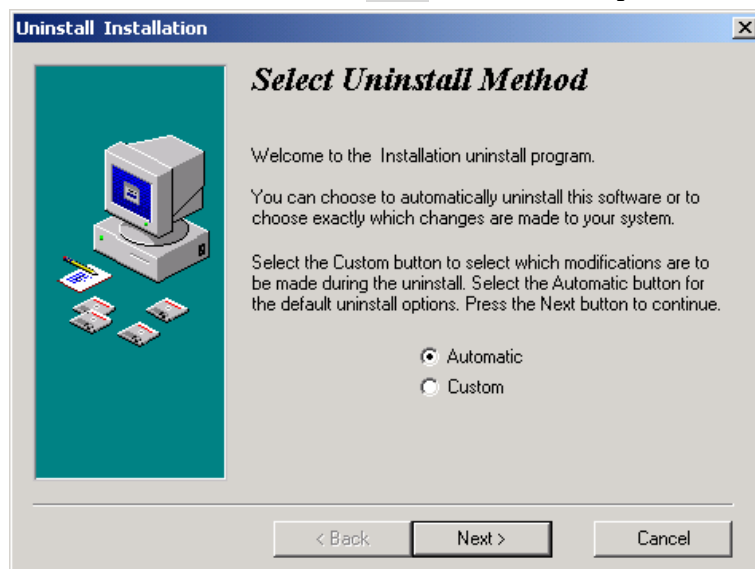

3. Click **Finish** button.

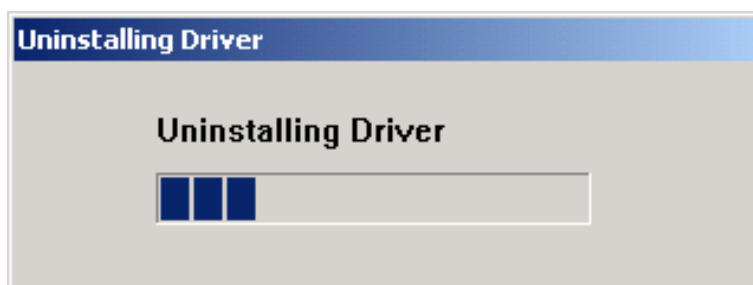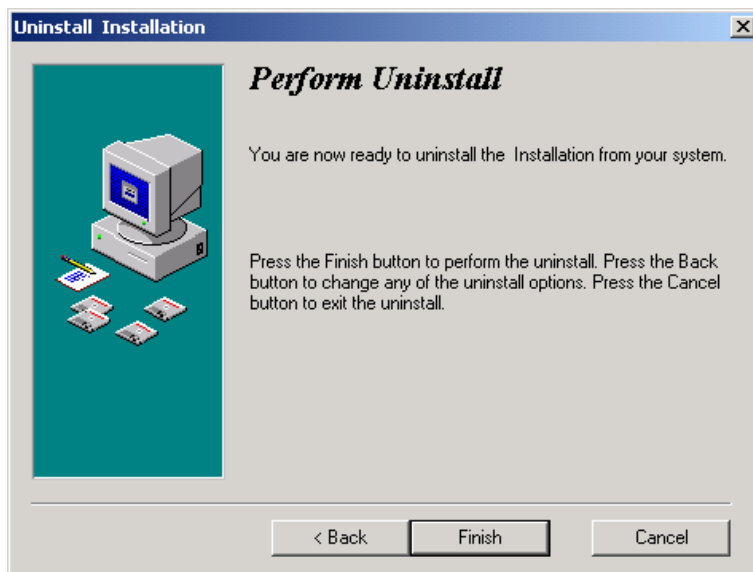

4. The **USB Wireless Adapter** can now be safely removed from the system when the un-installation is done.

Trouble shooting

PING

This section discusses possible solutions using ping command to find your problem if you can't connect to the network.

1. Check if you have a valid IP address
2. Test if your TCP/IP works. Under MS-DOS (command prompt), type "ping localhost". If you didn't receive a reply, then you need to re-install your TCP/IP. Proceed to next step if you have received replies.
3. Using the same procedure, try to ping your Wireless Adapter's IP. If the Ping command fails, check the following:
 - Your WLAN is connected
 - Check that your driver is correctly installed.

Checking Valid IP Addresses

There are restrictions on which IP and addresses you can and cannot use. Some IP addresses are reserved for testing, multicasting and some IP are restricted by your ISP.

Following IP addresses **cannot** be used:

- **127.x.x.x** – this is a loop back address, used for testing
- **0.0.0.0** – this IP address represent the host address
- **255.255.255.255** – this is local broadcast address
- First portion of IP cannot exceed 224, that is, IP addresses which is in the range of 224~239.x.x.x is not valid. This range of IP is for multicasting. IP range from 240~255.x.x.x are reserved IP addresses and cannot be used.
- 0 or 255 in host ID portion of your IP are not valid. This represent local host or broadcast address for your class of IP

IP has five classes, namely class A, B, C, D and E. For each class, the host ID portion in the IP field is different for each of the classes. Figure below illustrate this.

Class A:	1 ~ 127	.		Host ID
Class B:	128 ~ 191	.	X	Host ID
Class C:	192 ~ 223	.	X	X
Class D:	224 ~ 239	.	Used for Multicasting (no Host ID)	
Class E:	240 ~ 255	.	Reserved IP address	

Host ID cannot be all 0's or all 255's.

Note: X denote don't cares in the above example.