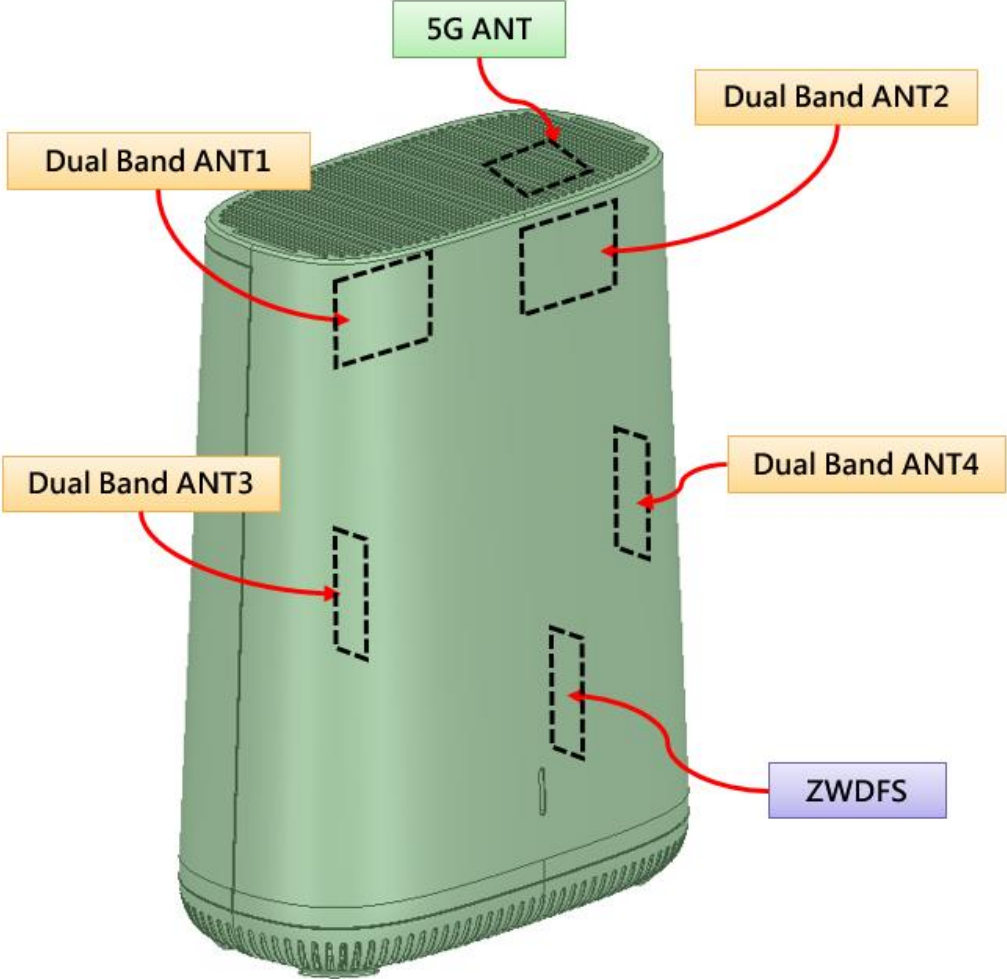
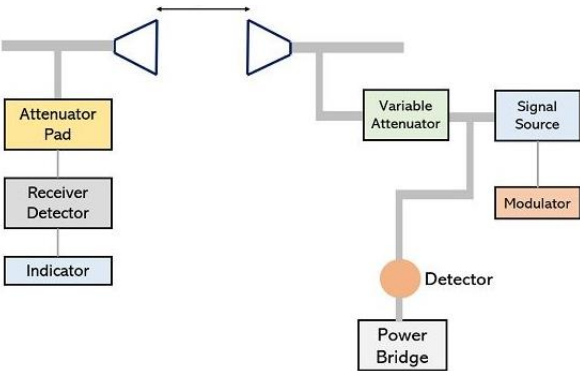
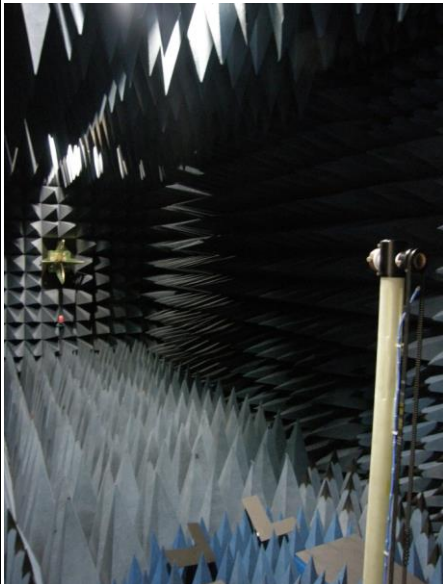
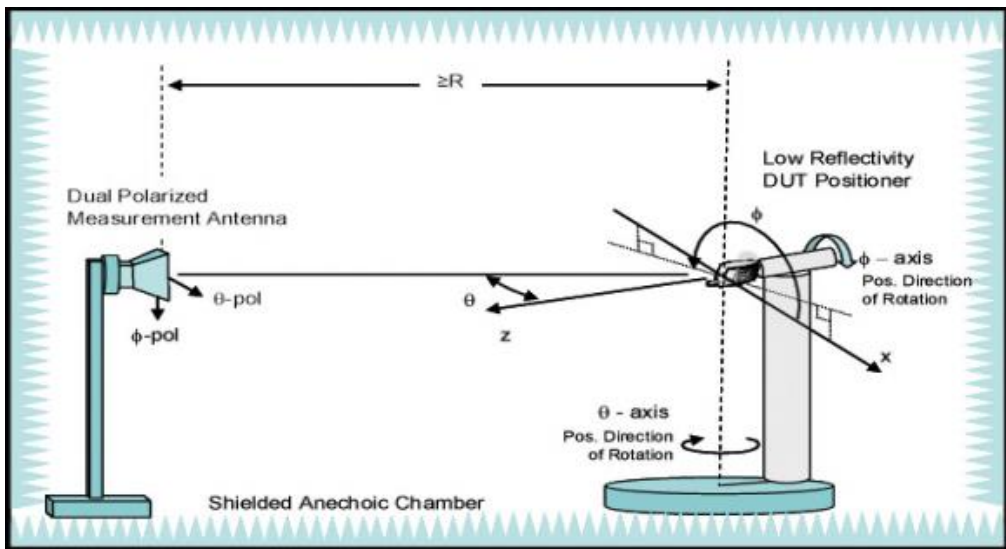


Antenna Test Report

Antenna System Description				
Brand name	Gemtek			
Model name	WRTM-407BE			
Manufacturer	Gemtek Technology Co., Ltd. No. 15-1 Zhonghua Road, Hsinchu Industrial Park, Hukou, Hsinchu, Taiwan, 30352.			
Geometric placement				
	Ant NO	Tx-Rx	Type	connector
	Dual Band ANT1	2.4G/5G Tx-Rx	PIFA	UFL
	Dual Band ANT2		PIFA	UFL
	Dual Band ANT3		PIFA	UFL
	Dual Band ANT4		PIFA	UFL
	5G ANT	5G Tx-Rx	PIFA	UFL
	ZWDFS	5G Rx	PIFA	UFL
Support Band	2.4GHz/5GHz			
	5GHz			
Generate multiple beams	Not support			


Measurement Quantity	
Operation bands of EUT Wi-Fi 2.4GHz : 2.412 / 2.4835 GHz Wi-Fi 5GHz : UNII-1 / 2A / 2C / 3	
Measurement Method	
	Absolute gain  Suppose the two antennas (transmitting and receiving) are separated at a distance r. Here, P_t and P_r represent the transmitted and received power respectively. While A_{et} and A_{er} are the effective apertures of transmitting and receiving antennas. As the two antennas are identical. Therefore, $A_{et} = A_{er} = \frac{G_0 \lambda^2}{4\pi}$ By Friis's transmission equation, $\frac{P_r}{P_t} = \left(\frac{A_{et} A_{er}}{\lambda^2 r^2} \right) = \left(\frac{G_0 \lambda^2}{4\pi} \right) \left(\frac{G_0 \lambda^2}{4\pi} \right) \frac{1}{\lambda^2 r^2}$ $\frac{P_r}{P_t} = \left(\frac{G_0 \lambda}{4\pi r} \right)^2$ $\sqrt{\frac{P_r}{P_t}} = \frac{G_0 \lambda}{4\pi r}$ Thus, $G_0 = \frac{4\pi r}{\lambda} \sqrt{\frac{P_r}{P_t}}$ While if we consider the effect of direct and indirect rays in case of ground reflection then, $G_0 = \frac{4\pi r}{\lambda F} \sqrt{\frac{P_r}{P_t}}$: F is the propagation constant due to interference. <i>Gain = $\frac{\text{Maximum amount of power received from subject antenna}}{\text{Maximum amount of power received from reference antenna}}$</i> Hence, $G = \frac{P_1}{P_2}$

--	--

Measurement Environment																			
Chamber type	Operation Band: 700 MHz ~ 18 GHz Chamber Size: 7m(L) * 3.5m(W) * 3.5m(H)   R&S ZNB 8																		
Antenna type	Types of measurement antennas (Frequency Range)																		
Test Equipment	<table><tr><th>Instrument</th><th>Brand</th><th>Model No.</th></tr><tr><td>VNA</td><td>ROHDE & SCHWARZ</td><td>ZNB8</td></tr><tr><td>Test Software</td><td>Atenlab</td><td>Maxwell 3.8.2</td></tr><tr><td>Switch</td><td>Atenlab</td><td>4SW_P_2019</td></tr><tr><td>Turntable</td><td>Atenlab</td><td>Aten Dual Axis</td></tr><tr><td>Horn Antenna</td><td>ETS-Lindgren</td><td>3164-10</td></tr></table>	Instrument	Brand	Model No.	VNA	ROHDE & SCHWARZ	ZNB8	Test Software	Atenlab	Maxwell 3.8.2	Switch	Atenlab	4SW_P_2019	Turntable	Atenlab	Aten Dual Axis	Horn Antenna	ETS-Lindgren	3164-10
Instrument	Brand	Model No.																	
VNA	ROHDE & SCHWARZ	ZNB8																	
Test Software	Atenlab	Maxwell 3.8.2																	
Switch	Atenlab	4SW_P_2019																	
Turntable	Atenlab	Aten Dual Axis																	
Horn Antenna	ETS-Lindgren	3164-10																	
Coordinate difinition																			

Dual Band
ANT1 Gain
Total (dBi)
Pattern


Dual Band ANT1 Gain Total (dBi) Pattern @2.4GHz

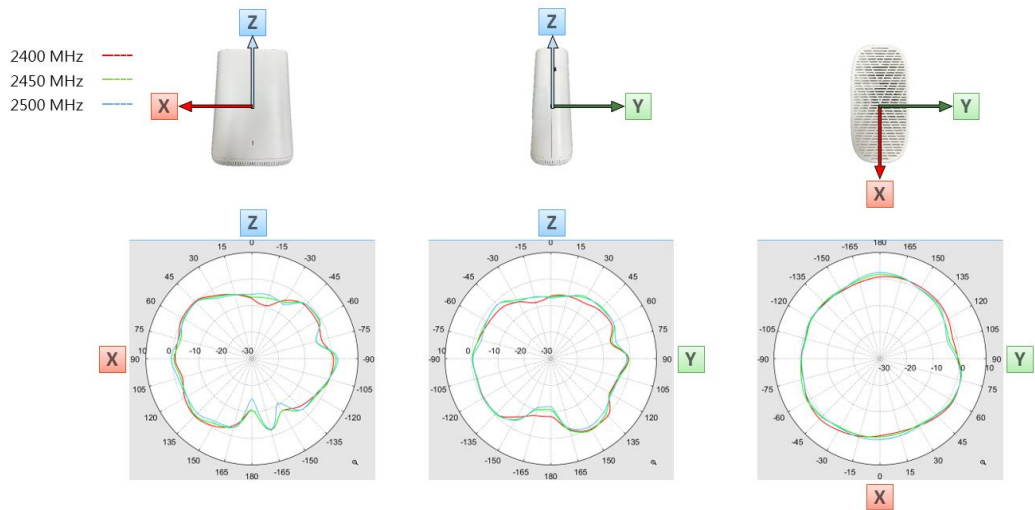

Gemtek ©2024 Gemtek Technology Co., Ltd. - Confidential & Proprietary

Dual Band
ANT2 Gain
Total (dBi)
Pattern


Dual Band ANT2 Gain Total (dBi) Pattern @2.4GHz

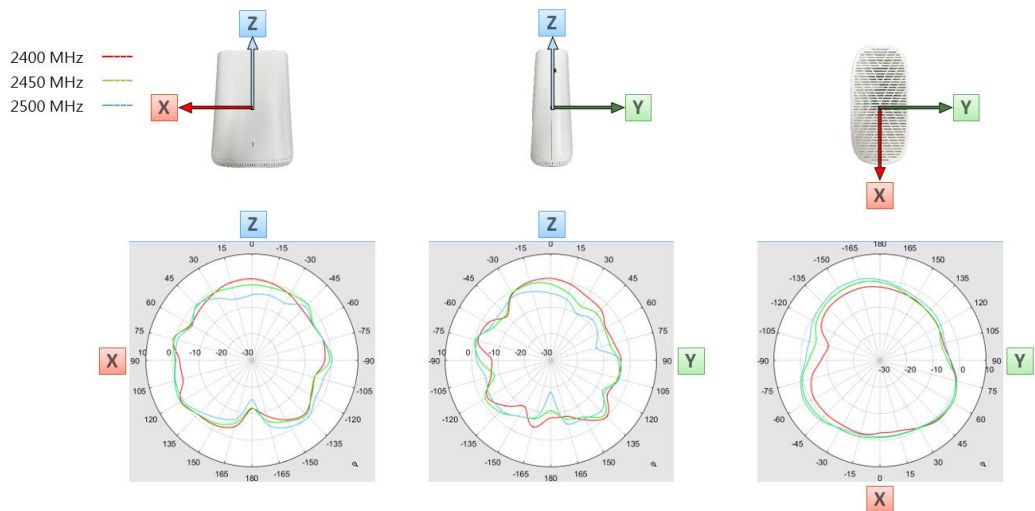

Gemtek ©2024 Gemtek Technology Co., Ltd. - Confidential & Proprietary

Dual Band
ANT3 Gain
Total (dBi)
Pattern


Dual Band ANT3 Gain Total (dBi) Pattern @2.4GHz

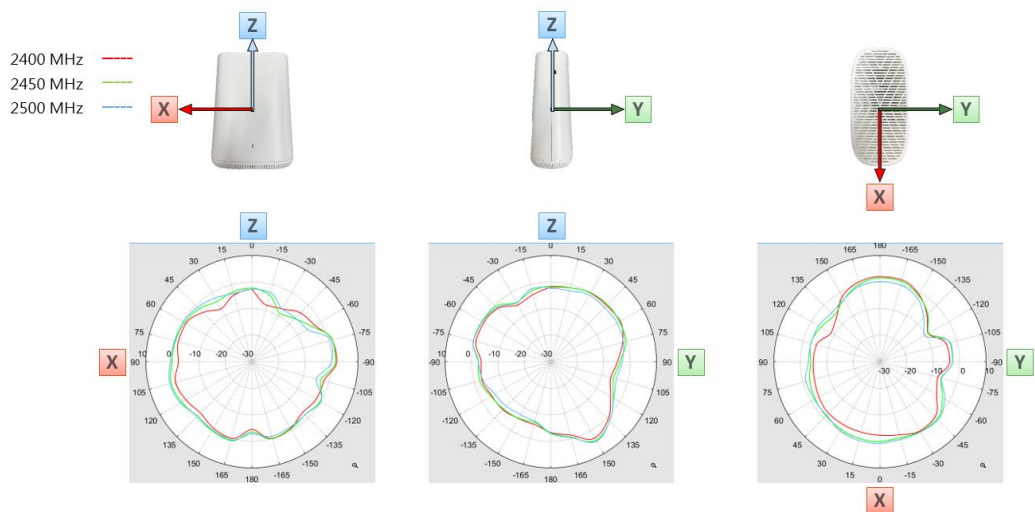

Gemtek ©2024 Gemtek Technology Co., Ltd. - Confidential & Proprietary


Dual Band
ANT4 Gain
Total (dBi)
Pattern

Dual Band ANT4 Gain Total (dBi) Pattern @2.4GHz

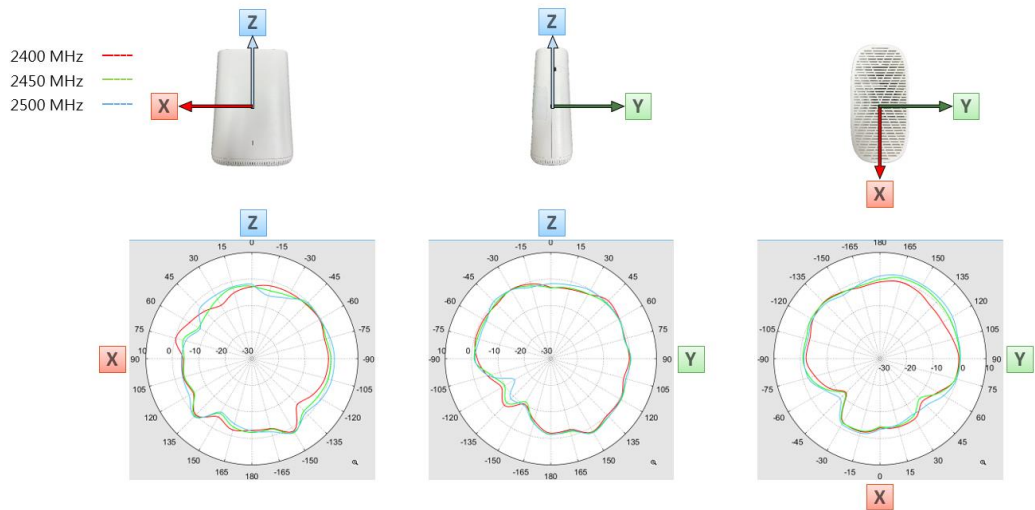


Dual Band
ANT1 Gain
Total (dBi)
Pattern

Dual Band ANT1 Gain Total (dBi) Pattern @5GHz

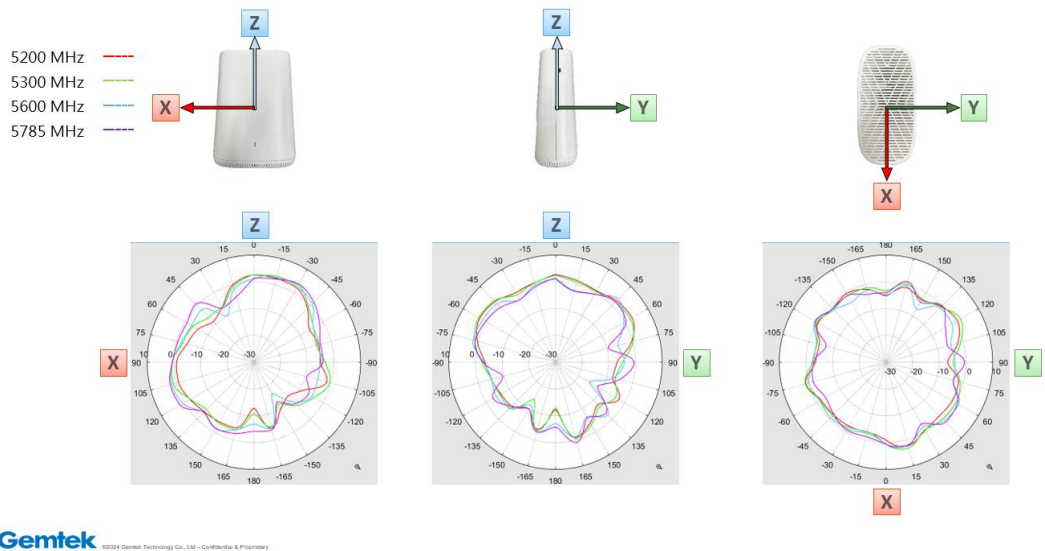


Dual Band
ANT2 Gain
Total (dBi)
Pattern

Dual Band ANT2 Gain Total (dBi) Pattern @5GHz

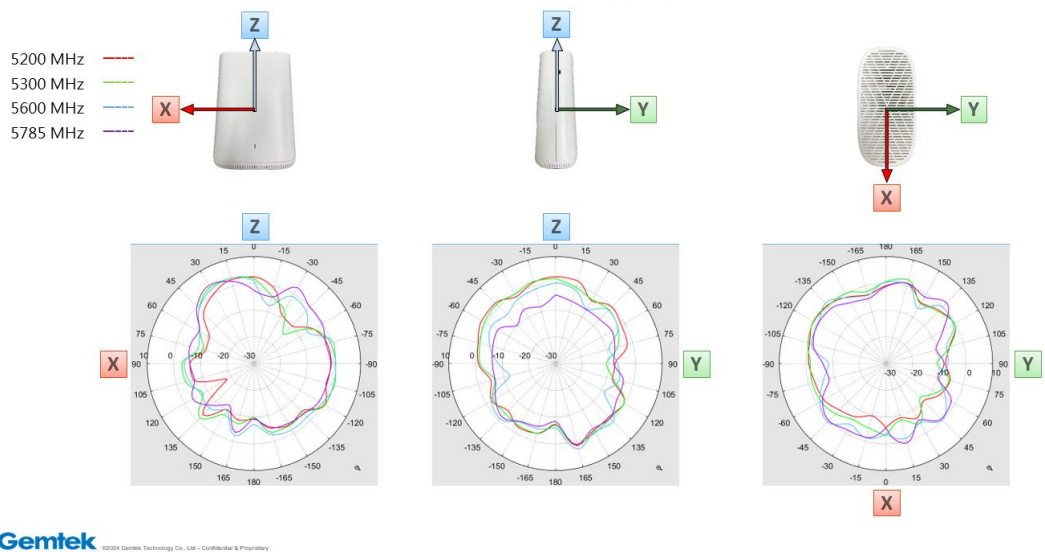

Dual Band
ANT3 Gain
Total (dBi)
Pattern


Dual Band ANT3 Gain Total (dBi) Pattern @5GHz

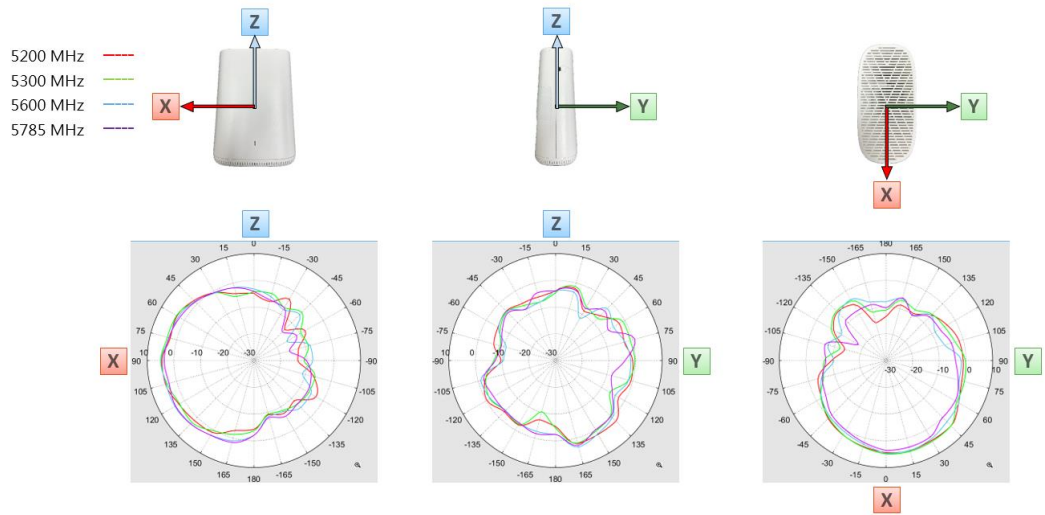

Gemtek
©2024 Gemtek Technology Co., Ltd. - Confidential & Proprietary

Dual Band
ANT4 Gain
Total (dBi)
Pattern


Dual Band ANT4 Gain Total (dBi) Pattern @5GHz

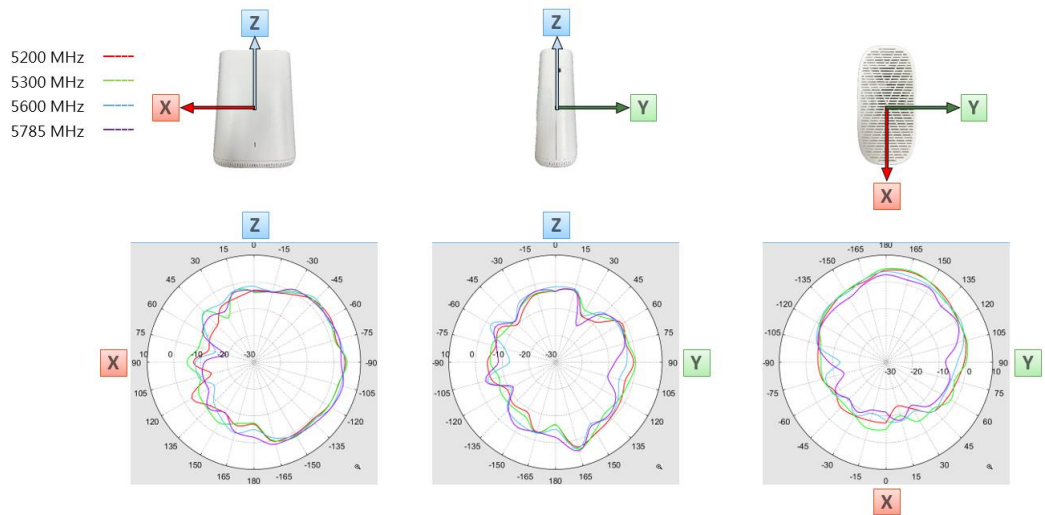


Gemtek
©2024 Gemtek Technology Co., Ltd. - Confidential & Proprietary

5G ANT Gain
Total (dBi)
Pattern

5G ANT Gain Total (dBi) Pattern

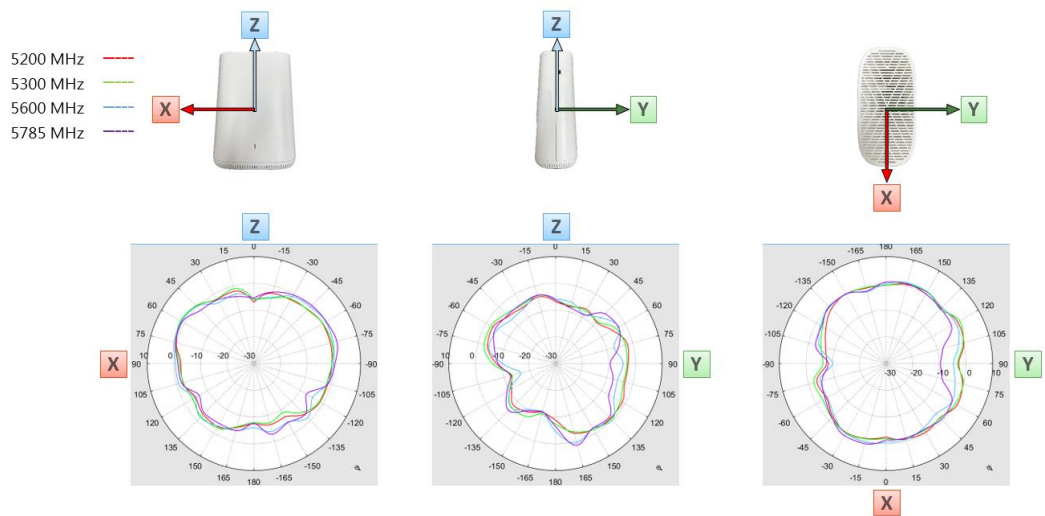

Gemtek
©2024 Gemtek Technology Co., Ltd. - Confidential & Proprietary

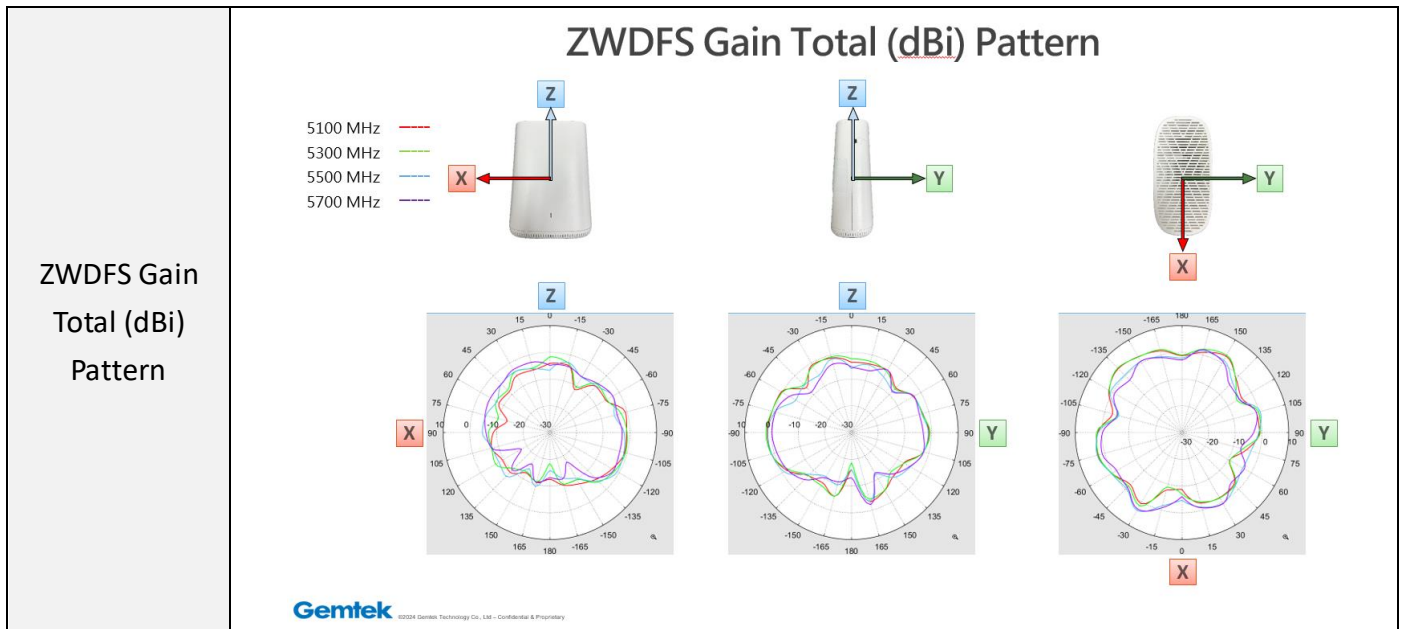

ZWDFS Antenna Efficiency & Peak Gain

WIFI A Band Antenna Efficiency (%)

Frequency (GHz)	5.1	5.3	5.5	5.7
ZWDFS	66.5	67.2	69.5	68.4

WIFI A Band Antenna Peak Gain (dB)

Frequency (GHz)	5.1	5.3	5.5	5.7
ZWDFS	4.0	4.1	4.5	4.3

Peak Gain @2.4G/5G

Frequency (GHz)	2.45	5.2	5.3	5.6	5.785
Dual Band ANT1.Max Gain(dBi)	1.43	3.03	3.98	3.6	3.54
Dual Band ANT2.Max Gain(dBi)	0.71	2.71	3.53	3.3	4.01
Dual Band ANT3.Max Gain(dBi)	2.83	3.07	2.88	3.83	4.05
Dual Band ANT4.Max Gain(dBi)	1.62	2.93	3.07	3.52	4.9
5G ANT.Max Gain(dBi)	N/A	1.59	2.04	2.95	2.41
Dual Band ANT1 Polarization/Θ(°)/Φ(°)	theta/90/165	phi/60/90	theta/30/165	theta/105/15	theta/45/180
Dual Band ANT2 Polarization/Θ(°)/Φ(°)	theta/90/315	theta/15/180	theta/30/15	theta/15/15	theta/30/15
Dual Band ANT3 Polarization/Θ(°)/Φ(°)	theta/150/75	theta/165/60	phi/60/15	theta/165/60	theta/165/45
Dual Band ANT4 Polarization/Θ(°)/Φ(°)	phi/150/165	theta/165/120	theta/165/120	theta/165/120	theta/165/120
5G ANT Polarization/Θ(°)/Φ(°)	N/A	phi/75/315	phi/75/330	phi/75/330	phi/75/330
Max Gain (dBi)	2.83	3.07	3.98	3.83	4.9
DG [1SS] (dBi)	5.37	5.29	5.79	5.85	5.91
DG [2SS] (dBi)	2.83	3.07	2.79	3.83	4.9
DG [4SS] (dBi)	2.83	3.07	2.79	3.83	4.9

D.G @2.4G/5G

Frequency (GHz)	2.45	5.2	5.3	5.6	5.785
Dual Band ANT1 (dBi)	-0.15	0.1	-1.13	0.89	-2.55
Dual Band ANT2 (dBi)	-2.57	1.23	0.16	-0.7	0.81
Dual Band ANT3 (dBi)	1.2	-2.83	0.16	0.89	1.48
Dual Band ANT4 (dBi)	-1.55	-6.76	-1.91	-4.72	-2.23
5G ANT (dBi)	N/A	-2.3	-3.89	-3.5	-4.28
DG [1SS] (dBi)	5.37	5.29	5.79	5.85	5.91
Polarization	theta	phi	phi	phi	phi
Theta	135	60	165	165	165
Phi	75	300	75	60	75
Dual Band ANT1 [10^(G/20)]	10^(-0.15/20)	10^(0.1/20)	10^(-1.13/20)	10^(0.89/20)	10^(-2.55/20)
Dual Band ANT2 [10^(G/20)]	10^(-2.57/20)	10^(1.23/20)	10^(0.16/20)	10^(-0.7/20)	10^(0.81/20)
Dual Band ANT3 [10^(G/20)]	10^(1.2/20)	10^(-2.83/20)	10^(0.16/20)	10^(0.89/20)	10^(1.48/20)
Dual Band ANT4 [10^(G/20)]	10^(-1.55/20)	10^(-6.76/20)	10^(-1.91/20)	10^(-4.72/20)	10^(-2.23/20)
5G ANT [10^(G/20)]	N/O	10^(-2.3/20)	10^(-3.89/20)	10^(-3.5/20)	10^(-4.28/20)
Dual Band ANT1 [10^(G/20)] Value	0.98	1.01	0.88	1.11	0.75
Dual Band ANT2 [10^(G/20)] Value	0.74	1.15	1.02	0.92	1.10
Dual Band ANT3 [10^(G/20)] Value	1.15	0.72	1.02	1.11	1.19
Dual Band ANT4 [10^(G/20)] Value	0.84	0.46	0.80	0.58	0.77
5G ANT [10^(G/20)] Value	N/A	0.77	0.64	0.67	0.61
Sum All Antenna [Amax]	3.71	4.11	4.36	4.39	4.41
DG [10*log(Amax^2/Nant)]	5.37	5.29	5.79	5.85	5.91