

EcoFlow Inc.

TEST REPORT

SCOPE OF WORK

FCC TESTING— EF-TX-288P

REPORT NUMBER

250728023SZN-003

ISSUE DATE

10 October 2025

[REVISED DATE]

[-----]

PAGES

103

DOCUMENT CONTROL NUMBER

FCC ID 247_b

© 2017 INTERTEK




Intertek Report No.: 250728023SZN-003

EcoFlow Inc.Application
For
Certification**FCC ID: 2A2P9-EFTX288****EcoFlow TRAIL Plus 300 DC Portable Power Station (288Wh)****Model: EF-TX-288P****Brand Name: EF ECOFLOW, ECOFLOW****2.4GHz Wi-Fi Transceiver**

Report No.: 250728023SZN-003

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-24]

Prepared and Checked by:**Robin Zhou**
Senior Project Engineer**Approved by:**

Johnny Wang
Project Engineer
Date: 10 October 2025

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one) Original Grant ☒ Class II Change ☐

Equipment Type: DTS - Part 15 Digital Transmission Systems (Wi-Fi transmitter portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-24] Edition] provision.

Report prepared by:

Robin Zhou

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue,

Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6661

Table of Contents

1.0	<u>Summary of Test results</u>	4
2.0	<u>General Description</u>	5
2.1	Product Description	5
2.2	Related Submittal(s) Grants	5
2.3	Test Methodology	6
2.4	Test Facility	6
3.0	<u>System Test Configuration</u>	7
3.1	Justification	7
3.2	EUT Exercising Software	7
3.3	Special Accessories	8
3.4	Measurement Uncertainty	8
3.5	Equipment Modification	8
3.6	Support Equipment List and Description	8
4.0	<u>Measurement Results</u>	9
4.1	Maximum Conducted Output Power at Antenna Terminals	9
4.2	Minimum 6 dB RF Bandwidth	11
4.3	Maximum Power Density Reading	23
4.4	Out of Band Conducted Emissions	35
4.5	Out of Band Radiated Emissions	76
4.6	Transmitter Radiated Emissions in Restricted Bands	77
4.7	Field Strength Calculation	78
4.8	Radiated Spurious Emission	79
4.9	Conducted Emission	97
4.10	Radiated Emissions from Digital Section of Transceiver	100
4.11	Transmitter Duty Cycle Calculation and Measurements	101
5.0	<u>Equipment Photographs</u>	102
6.0	<u>Product Labelling</u>	102
7.0	<u>Technical Specifications</u>	102
8.0	<u>Instruction Manual</u>	102
9.0	<u>Confidentiality Request</u>	102
10.0	<u>Discussion of Pulse Desensitization</u>	102
11.0	<u>Test Equipment List</u>	103

1.0 Summary of Test results

Applicant: EcoFlow Inc.

Applicant Address: RM 401,Plant #1,Runheng Industrial Zone, Fuhai Street,Bao'an District, Shenzhen 518000, China

Manufacturer: EcoFlow Inc.

Manufacturer Address: RM 401,Plant #1,Runheng Industrial Zone, Fuhai Street,Bao'an District, Shenzhen 518000, China

Model: EF-TX-288P
FCC ID: 2A2P9-EFTX288

TEST ITEM	REFERENCE	RESULTS
Max. Output power	15.247(b)(3)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d), 15.209, FCC 15.205	Pass
AC Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a EcoFlow TRAIL Plus 300 DC Portable Power Station (288Wh), EF-TX-288P with Wi-Fi function operating at 2412-2462MHz for 802.11b/g/n-HT20/ax-VHT20, 11 channels with 5MHz channel spacing and 2422-2452MHz for 802.11n-HT40, 7 channels with 5MHz channel spacing.

Ratings:

Lithium Battery Energy: 2000mAh, 14.4V/288Wh

Rated Capacity: 50Ah(DC 5V, 3A)

USB-C1/C2/C3 Input: DC 9V/12V/15V, 3A, DC 20/28V, 5A, 140W Max

Solar Input: DC 10-30V, 10A Max, 110W Max

USB-A1/A2 Output: DC 5V, 2.4A, 12W Max per port, 24W total

USB-C1/C2/C3 Output: DC 5V/9V/12V/15V, 3A, DC 20/28V, 5A, 140W Max

Car Outlet: DC 12V, 10A

Total Output Power: 300W Max

Type of Modulation: BPSK, QPSK, 16QAM, 64QAM for OFDM; BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM for OFDMA; CCK, DQPSK, DBPSK for DSSS.

Antenna Type: PCB antenna

Antenna Gain: 4.3dBi (This information is provided by applicant, and the applicant is responsible for the authenticity of the provided information.)

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of:

DTS- Part 15 Digital Transmission Systems (2.4GHz Wi-Fi transmitter portion).

Remaining portions are subject to the following procedures:

1. Receiver portion of WiFi: exempt from technical requirement of this Part.
2. Other Digital Function: Subject to FCC Part 15B SDOC.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10-2020 + Cor.1-2023 and KDB 558074 D01 v05r02. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

2.4 Test Facility

The Semi-anechoic chamber and shielded room used to collect the radiated data and conducted data are Shenzhen NTEK Testing Technology Co., Ltd. and located at No. 24 Xinfu East Road Xiangshan Community, Xinqiao St, Baoan District, Shenzhen, Guangdong, China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1184).

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology.

The EUT can be powered by DC 14.4 V from battery, or 10V-30V from solar energy or USB-C1 DC 28V powered by adapter from AC mains 120V60Hz during the test. Only presents the worst data.

On 802.11b/g/n-HT20/n-HT40/ax-VHT20 mode, only one antenna is used, and all data rate were tested and only the worst case data is shown in the report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.8m up to 1GHz and 1.5 m above 1GHz. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

The EUT and transmitting antenna was centered on the turntable.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The fixed frequency software uses ESP32, version v3.6.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

3.3 Special Accessories

N/A.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Measurement Uncertainty	Uncertainty
Conducted Emission Test	±2.80dB
RF power, conducted, PSD	±0.16dB
Spurious emissions, conducted	±0.21dB
All emissions, radiated(30MHz~1GHz)	±2.64dB
All emissions, radiated(1GHz~6GHz)	±2.40dB
All emissions, radiated(>6GHz)	±2.52dB
Temperature	±0.5°C
All emissions, radiated(9KHz~30MHz)	±6dB
Occupied bandwidth	±4.7dB

3.5 Equipment Modification

Any modifications installed previous to testing by EcoFlow Inc. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Shenzhen NTEK Testing Technology Co., Ltd.

3.6 Support Equipment List and Description

Description	Manufacturer	Remark
Adapter	Ugreen, CD333	Input: AC 100-240V, 50/60Hz, 4.2A Max. Output: USB-C1: DC 5V/9V/12V/15V, 3A, DC 20V/28V, 5A, 140W Max. USB-C2/C3: DC 5V/9V/12V/15V, 3A, DC 20V, 5A, 100W Max. USB-C4: DC 5V/9V/12V/15V, 3A / DC 20V, 2.25A, 45W Max. USB-A: DC 5V, 3A, DC 9V, 2A, DC 12V, 1.5A, DC 10V, 2.25A, 22.5W Max.
Adapter	Lenovo, LA140	Input: AC 100-130V, 50/60Hz, 2.5A Output: DC 5V/9V/12V/15V, 3A, DC 20V, 5A, 100W Max. Input: AC 200-240V, 50/60Hz, 2.5A Output: DC 5V/9V/12V/15V, 3A, DC 20V/28V, 5A, 140W Max.

Applicant: EcoFlow Inc.

Date of Test: 22 September 2025

Worst Case Model: EF-TX-288P

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a broadband peak RF power meter. The power meter has a video bandwidth that is greater than DTS bandwidth and utilize a fast-responding diode detector. Power was read directly at the EUT antenna terminals with cable loss added.

For antennas with a gain less than 6 dBi, the maximum transmitter output allowed is 30 dBm.

IEEE 802.11b (Antenna Gain = 4.3dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm (Average Reading)	Output in mWatt
Low Channel: 2412	0.23	1.0544
Middle Channel: 2437	0.29	1.0691
High Channel: 2462	0.32	1.0765

IEEE 802.11g (Antenna Gain = 4.3dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Average Reading)	Output in mWatt
Low Channel: 2412	0.29	1.0691
Middle Channel: 2437	0.39	1.0940
High Channel: 2462	0.24	1.0568

IEEE 802.11n-HT20 (Antenna Gain = 4.3dBi) (64QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Average Reading)	Output in mWatt
Low Channel: 2412	0.26	1.0617
Middle Channel: 2437	0.24	1.0568
High Channel: 2462	0.15	1.0351

IEEE 802.11n-HT40 (Antenna Gain = 4.3dBi) (64QAM, 13.5Mbps)		
Frequency (MHz)	Output in dBm (Average Reading)	Output in mWatt
Low Channel: 2422	0.25	1.0593
Middle Channel: 2437	0.32	1.0765
High Channel: 2452	0.21	1.0495

IEEE 802.11ax-VHT20 (Antenna Gain = 4.3dBi) (64QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Average Reading)	Output in mWatt
Low Channel: 2412	0.22	1.0520
Middle Channel: 2437	0.35	1.0839
High Channel: 2462	0.32	1.0765

Cable loss: 1.5 dB External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = 0.39dBm

EUT max. E.I.R.P = 0.39dBm + 4.3dBi = 4.69dBm = 2.94mW

For RF Exposure, the information is saved with filename: RF exposure.pdf.

Applicant: EcoFlow Inc.

Date of Test: 22 September 2025

Worst Case Model: EF-TX-288P

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a) (2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074 D01 v05r02. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	8.58
2437	9.27
2462	9.522

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	16.383
2437	16.041
2462	16.458


IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	17.535
2437	17.592
2462	17.562


IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2422	30.048
2437	27.6
2452	30.798

IEEE 802.11ax-VHT20 (64QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	16.263
2437	16.524
2462	17.841


The test plots are attached as below.


802.11b

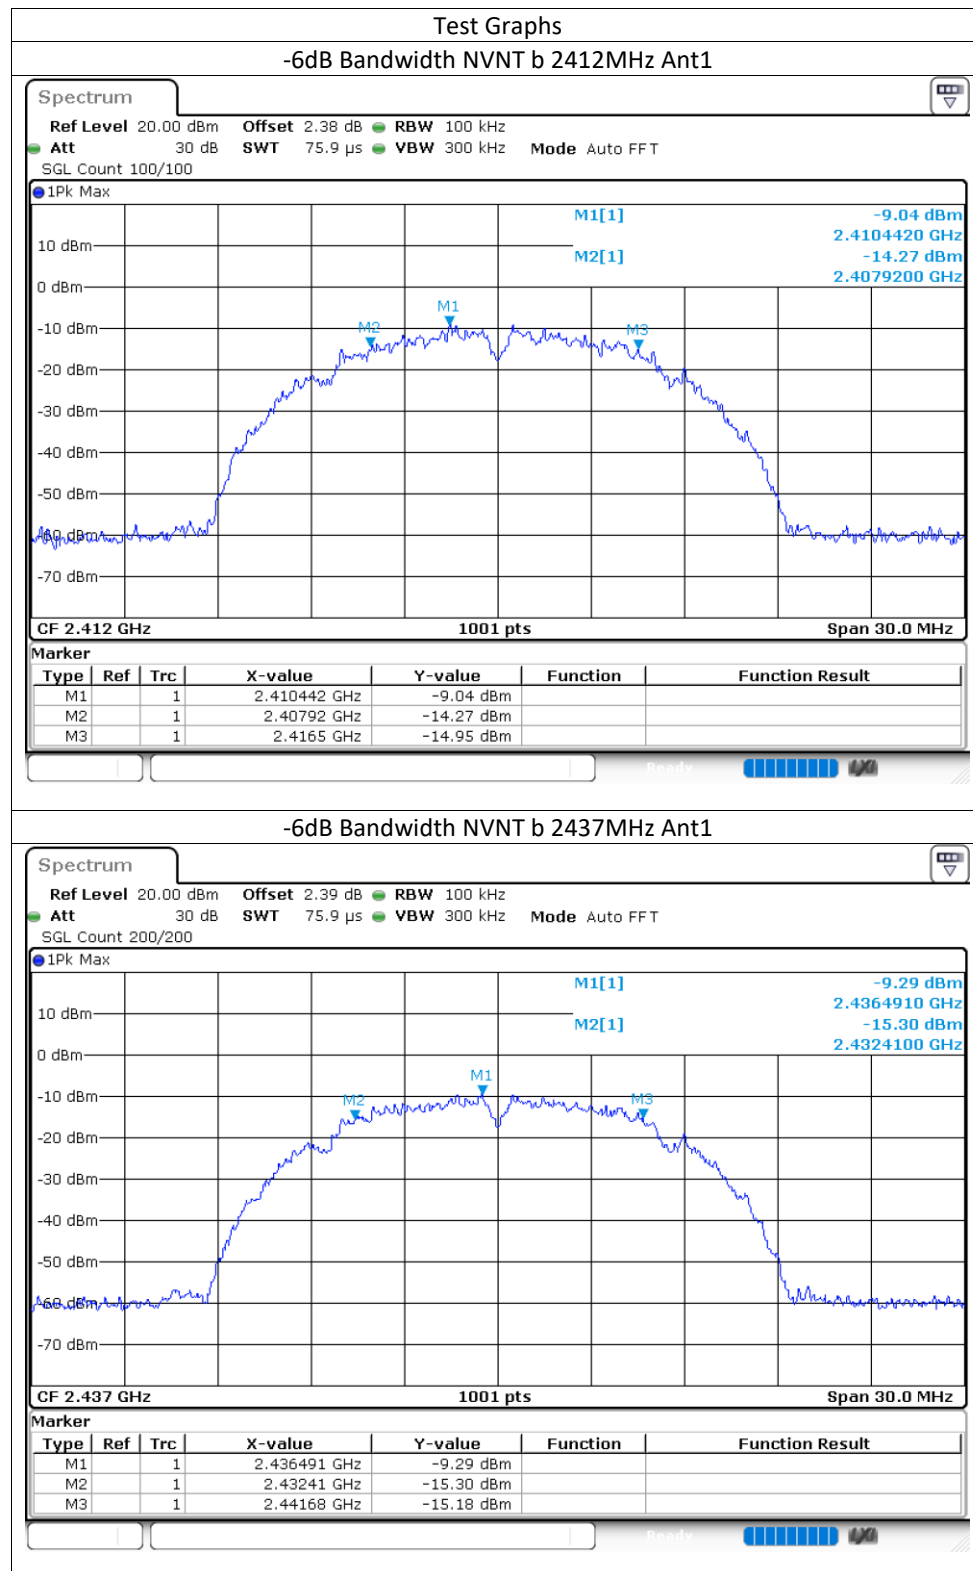

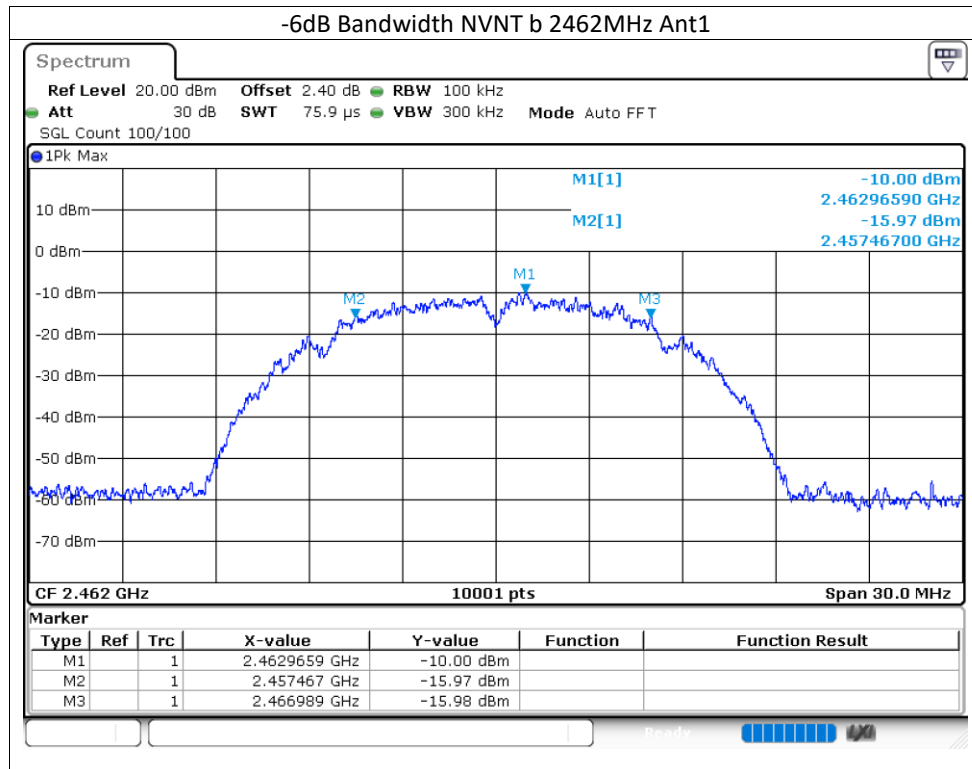



802.11g

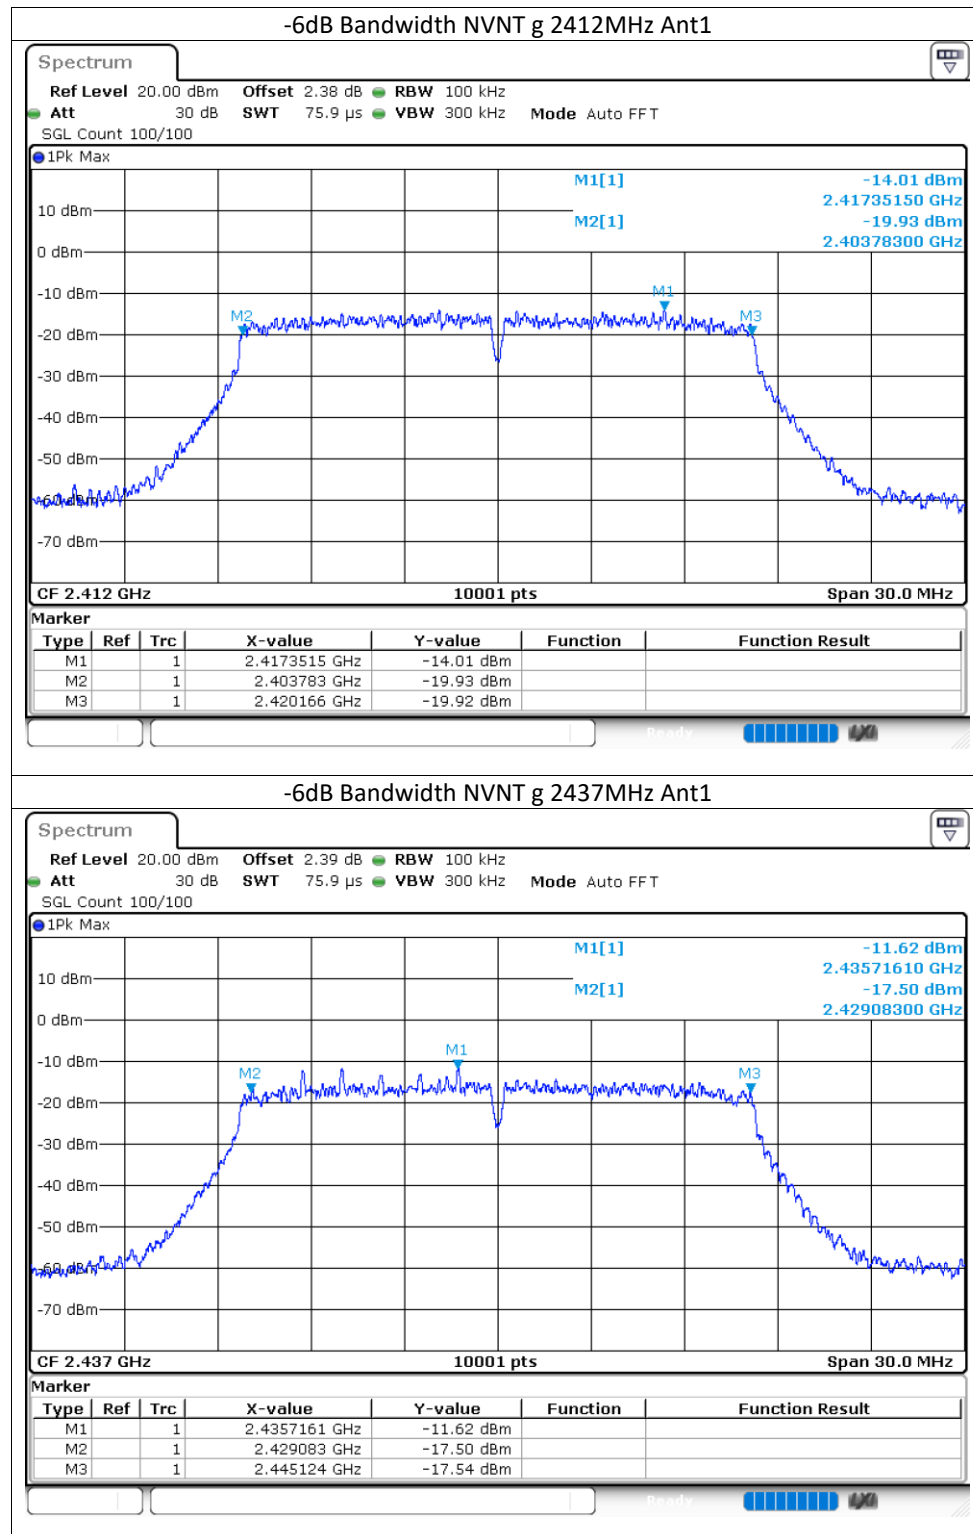

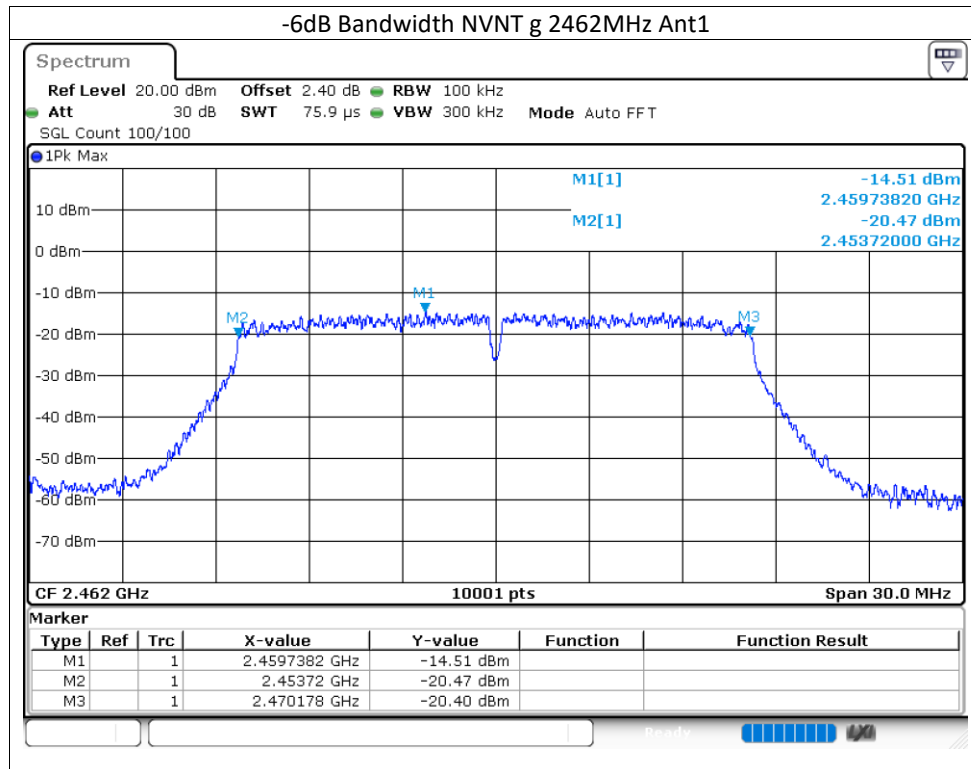



802.11n-HT20

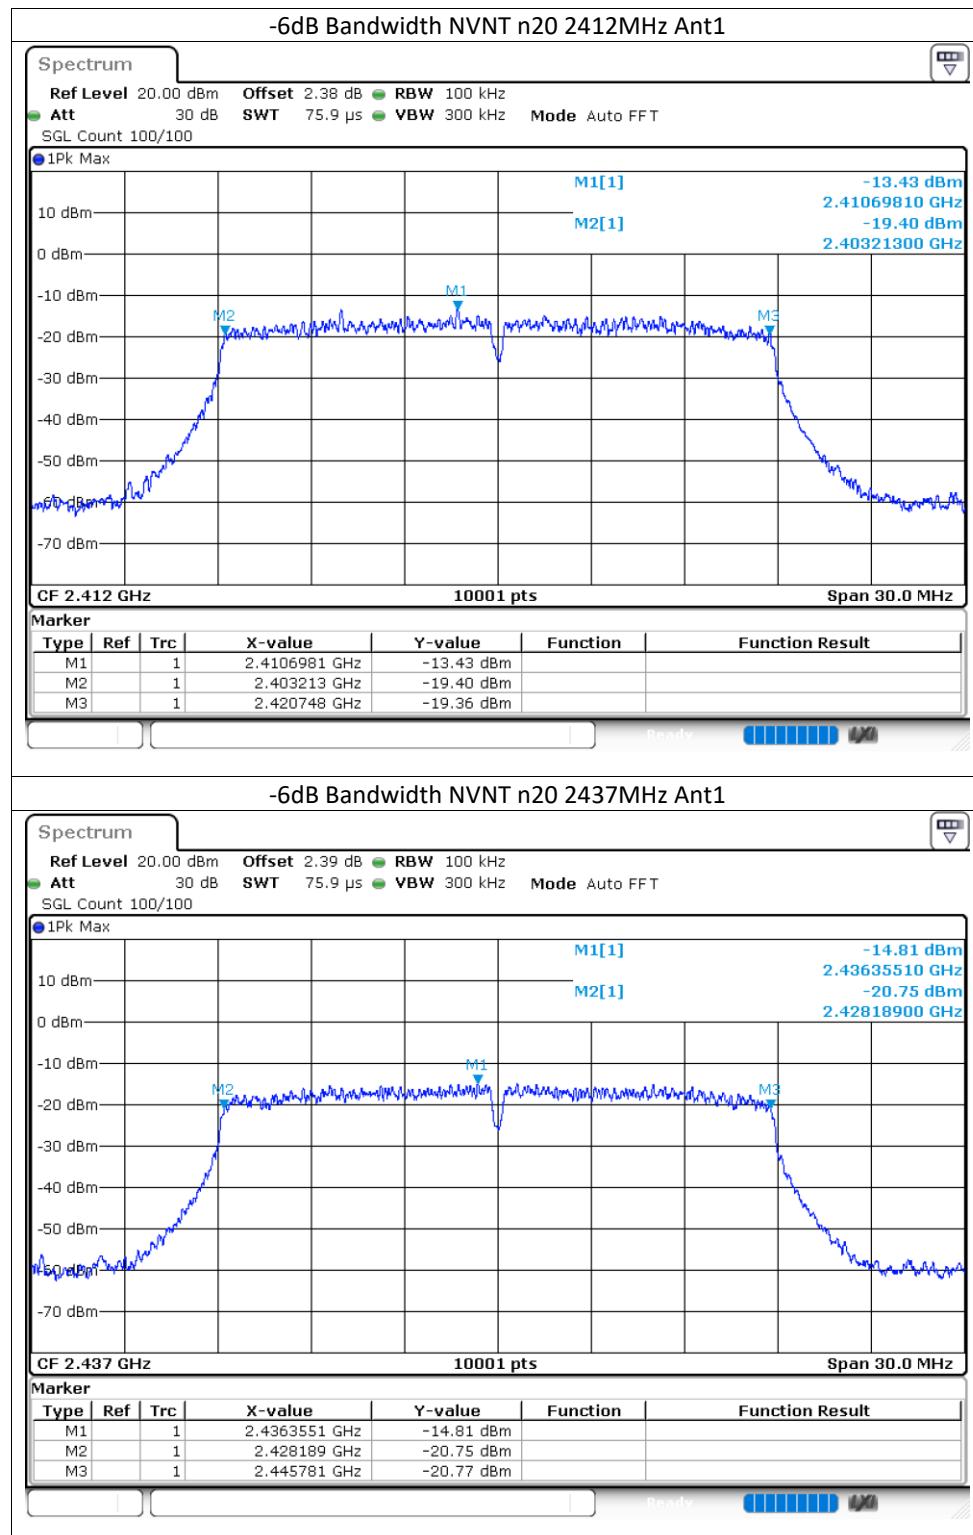

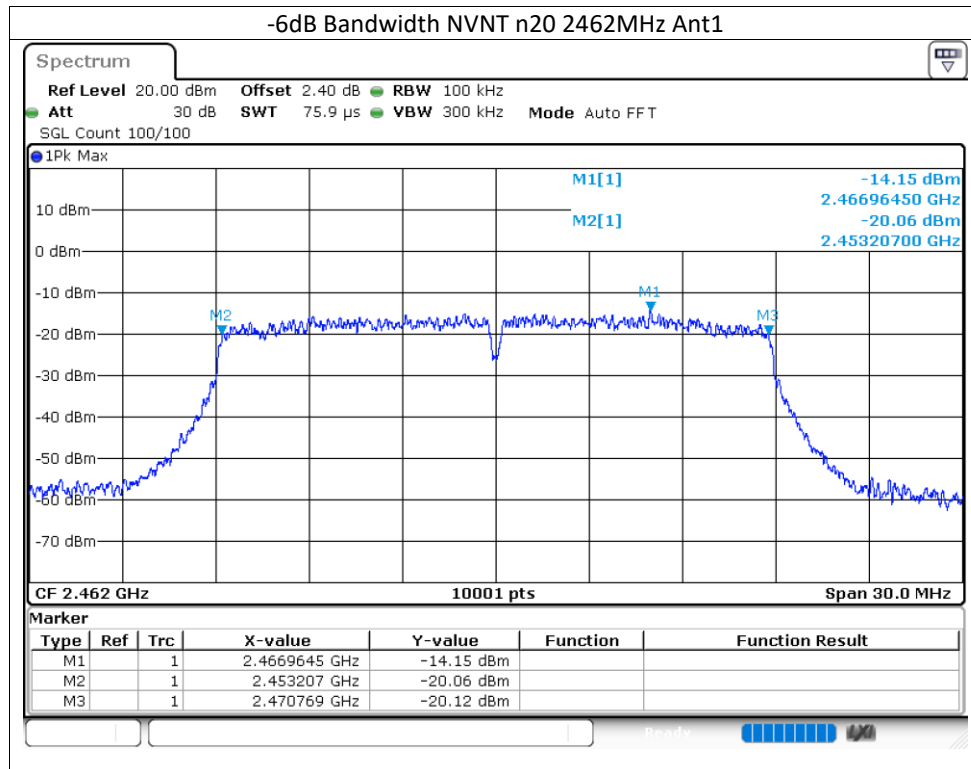



802.11n-HT40

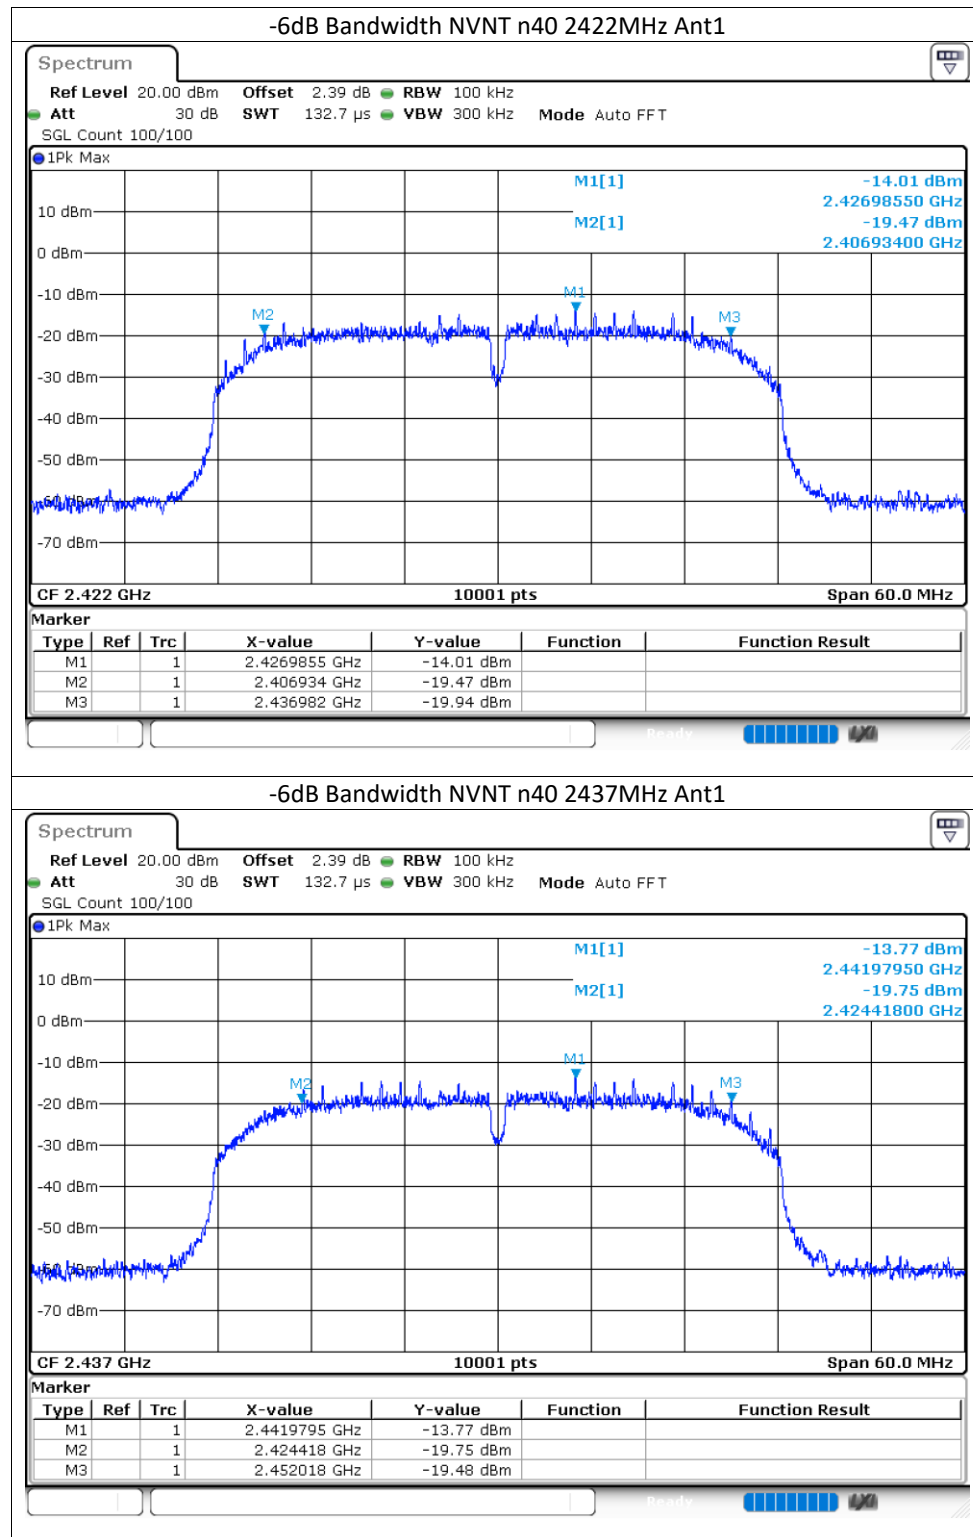

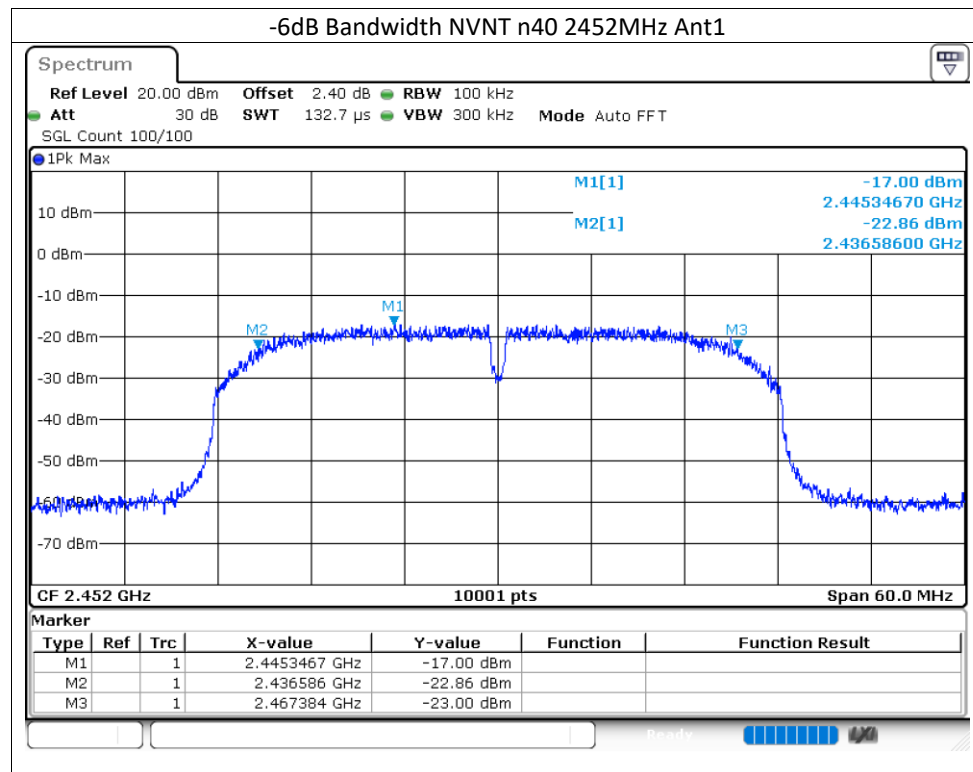

802.11ax-VHT20

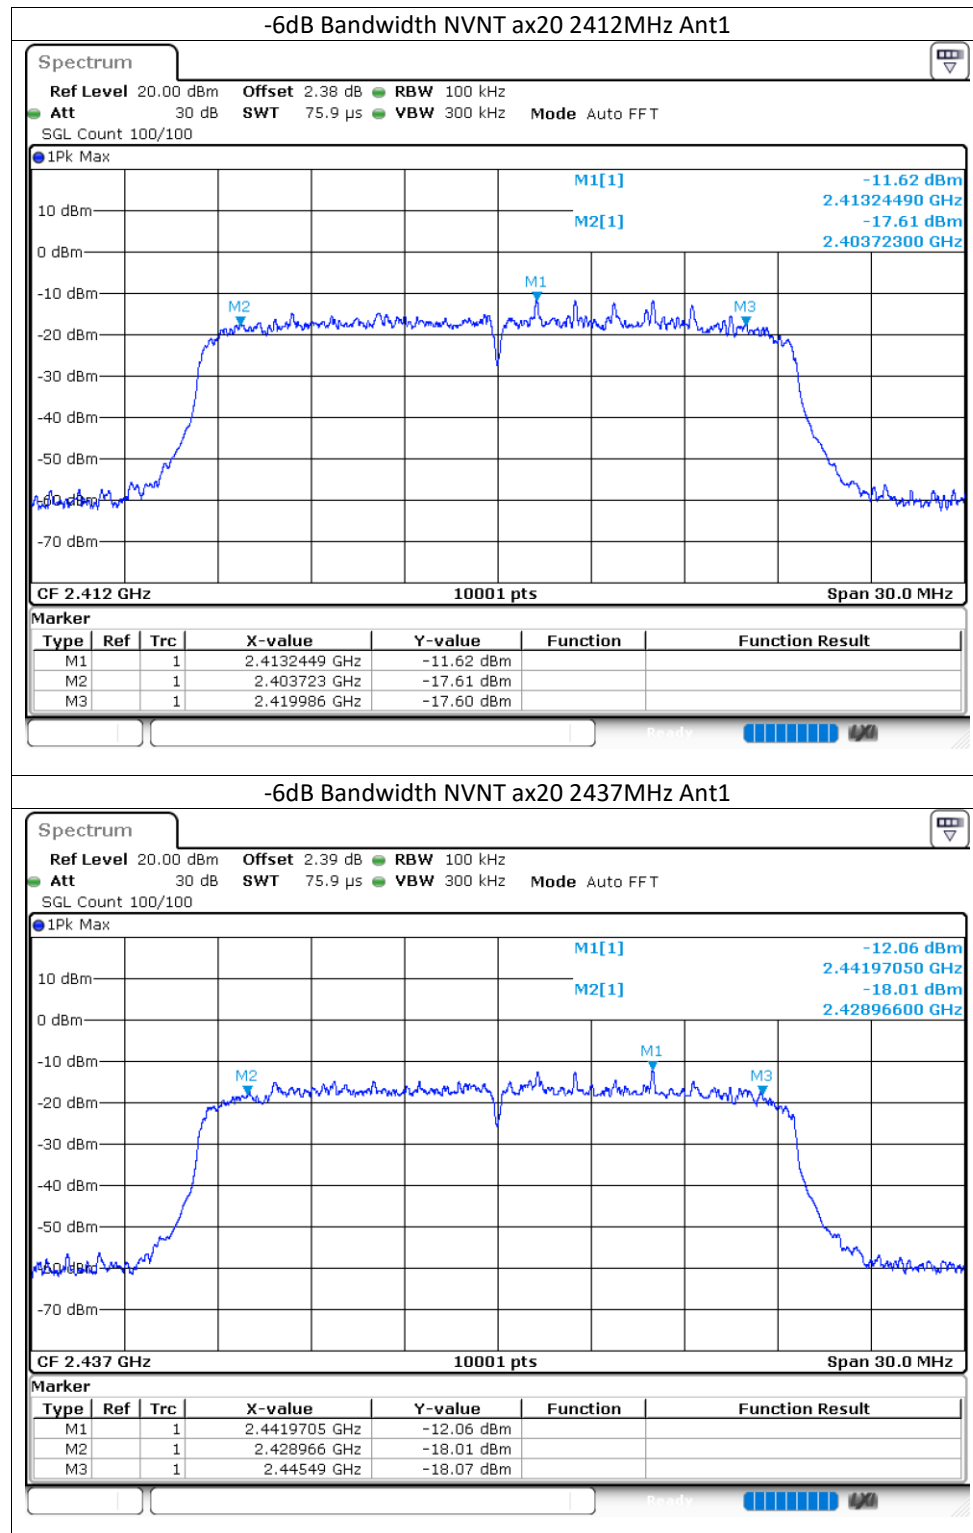

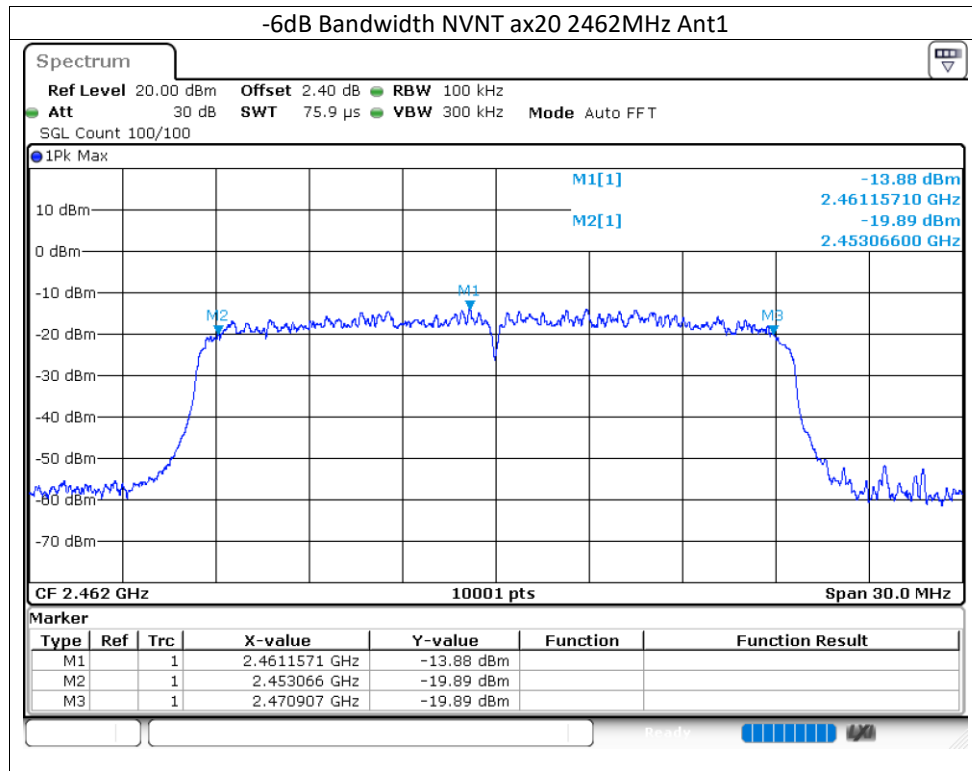

Applicant: EcoFlow Inc.

Date of Test: 22 September 2025

Worst Case Model: EF-TX-288P

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure AVPSD was set according to the FCC KDB 558074 D01 v05r02.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/3 kHz.

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-19.39
2437	-19.13
2462	-19.16

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-20.55
2437	-20.7
2462	-20.92


IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-21.41
2437	-21.14
2462	-21.46


IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2422	-23.77
2437	-23.48
2452	-23.58

IEEE 802.11ax-VHT20 (64QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-22.75
2437	-22.43
2462	-22.51


The test plots are attached as below.


802.11b

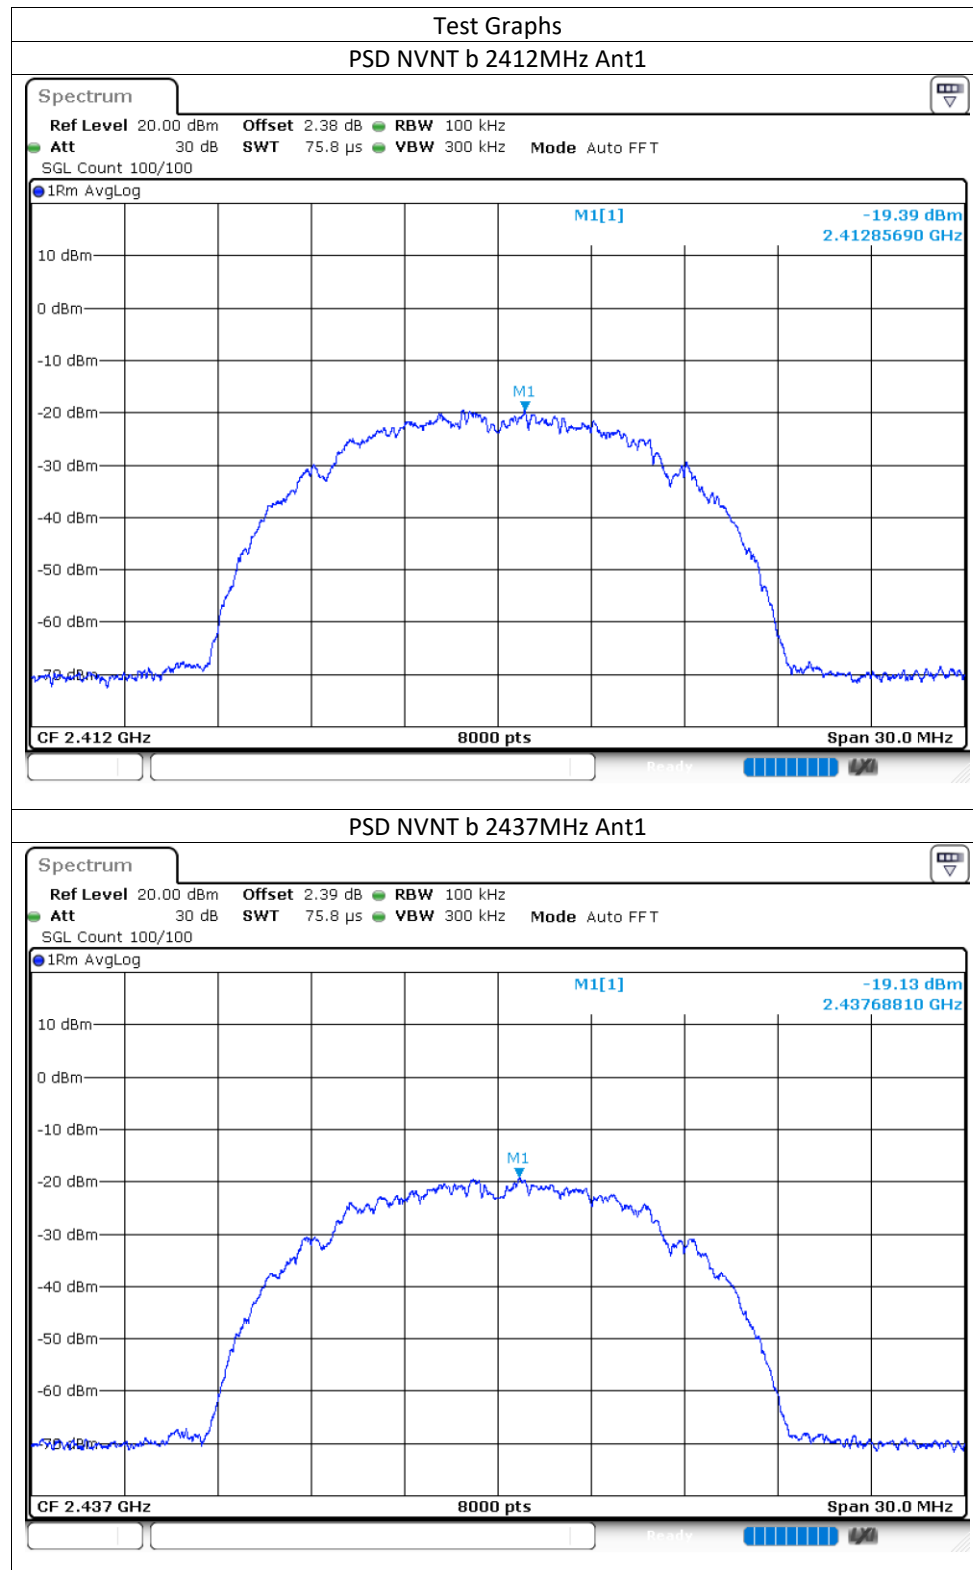

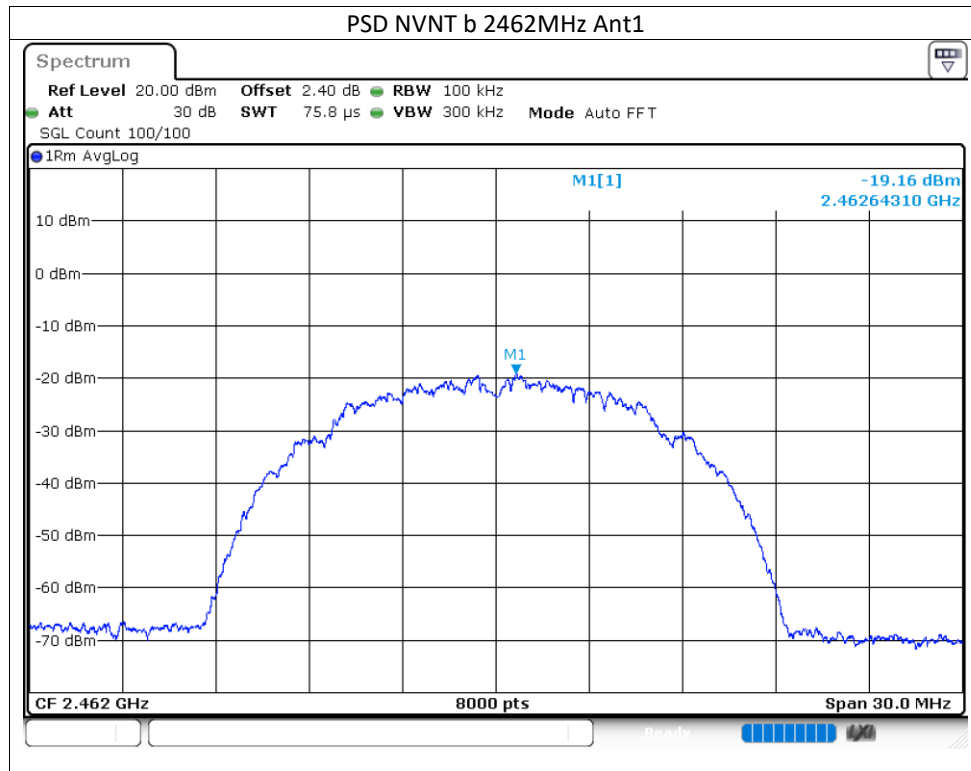



802.11g

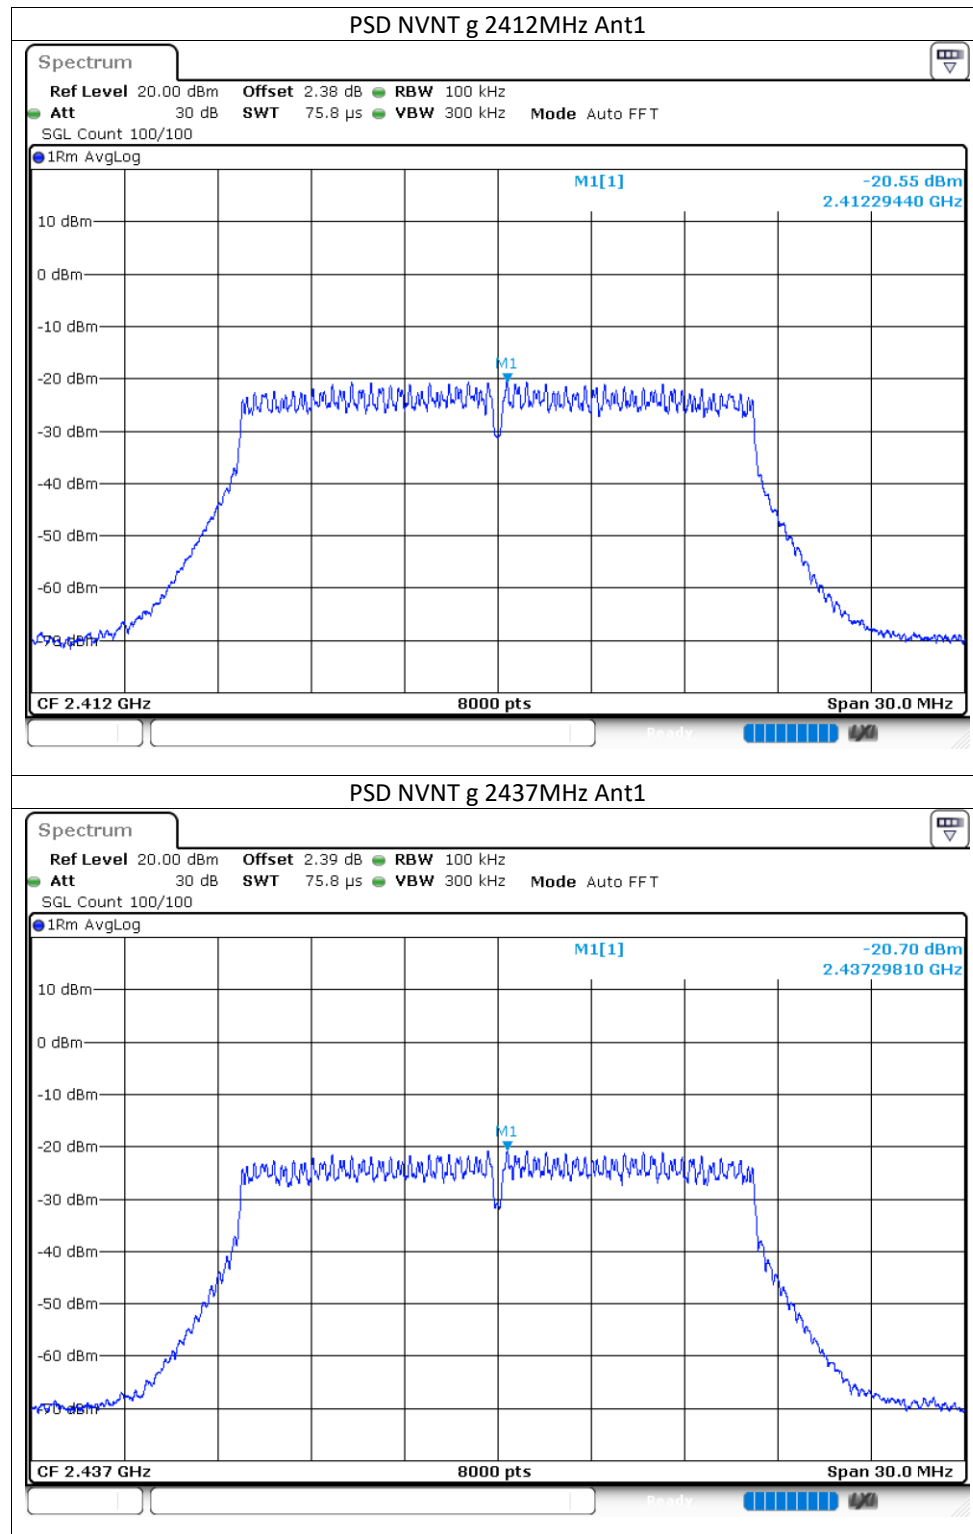

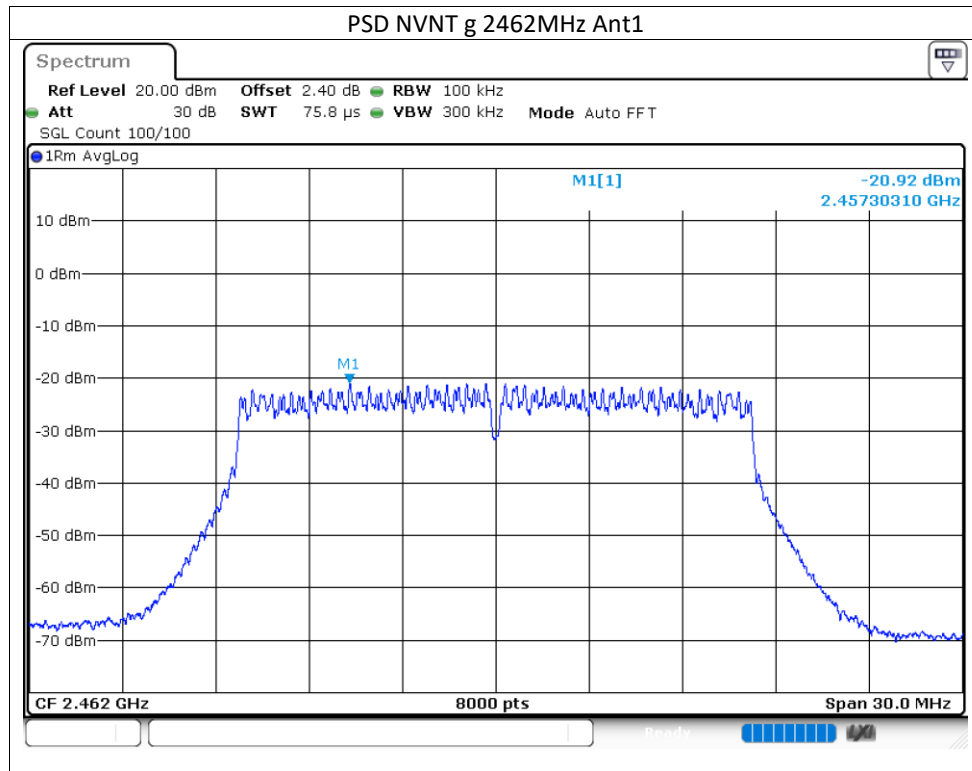



802.11n-HT20

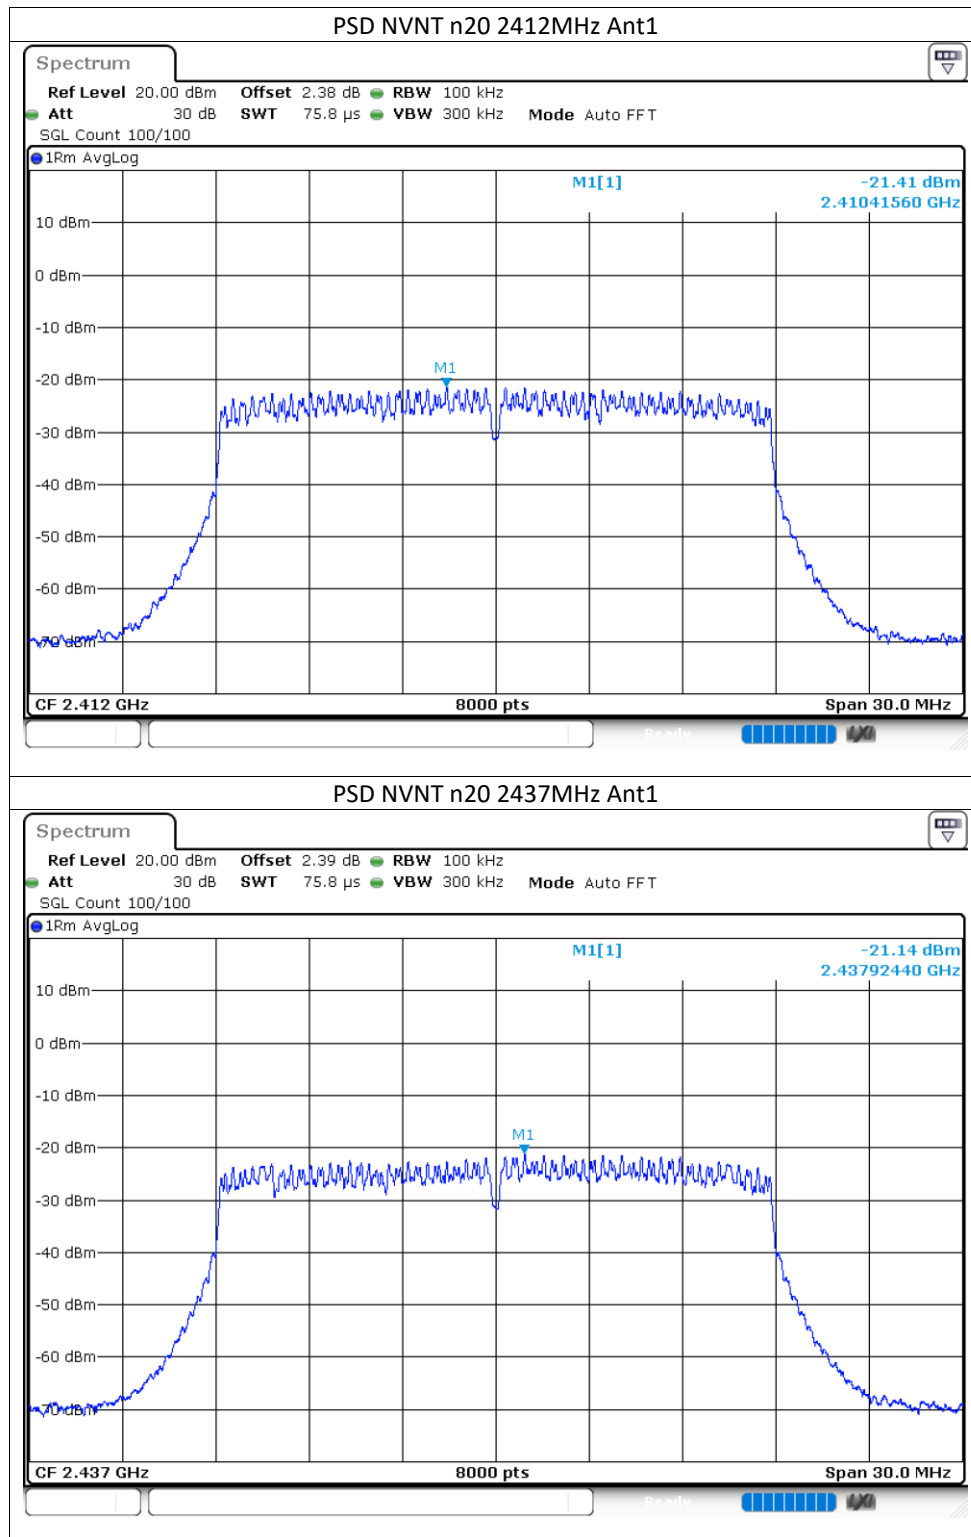

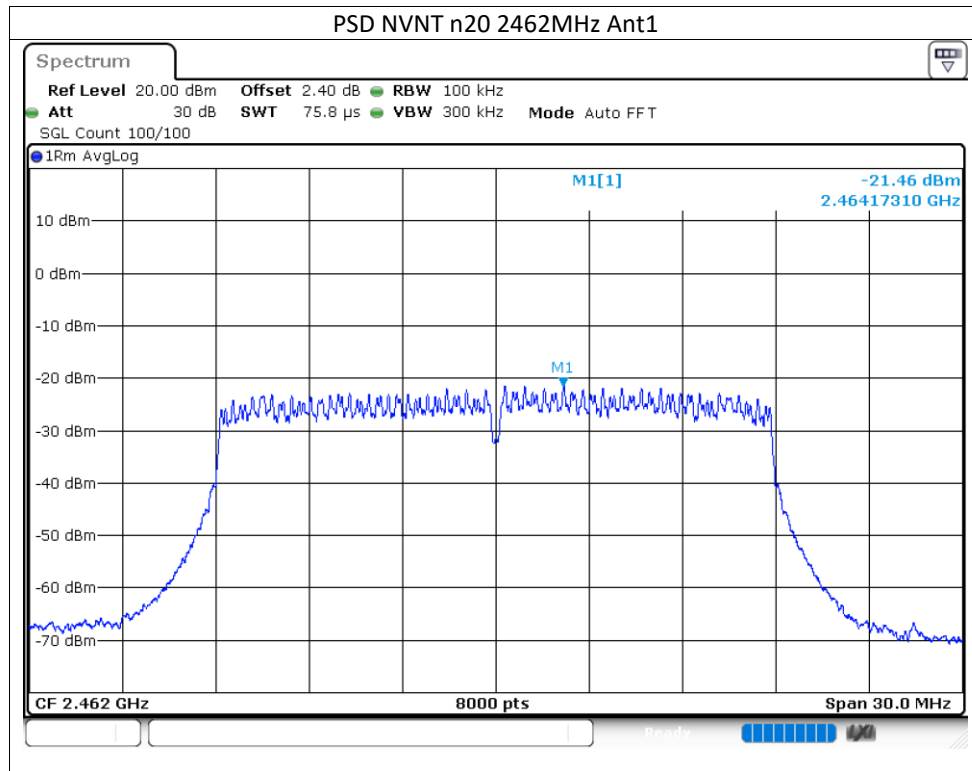



802.11n-HT40

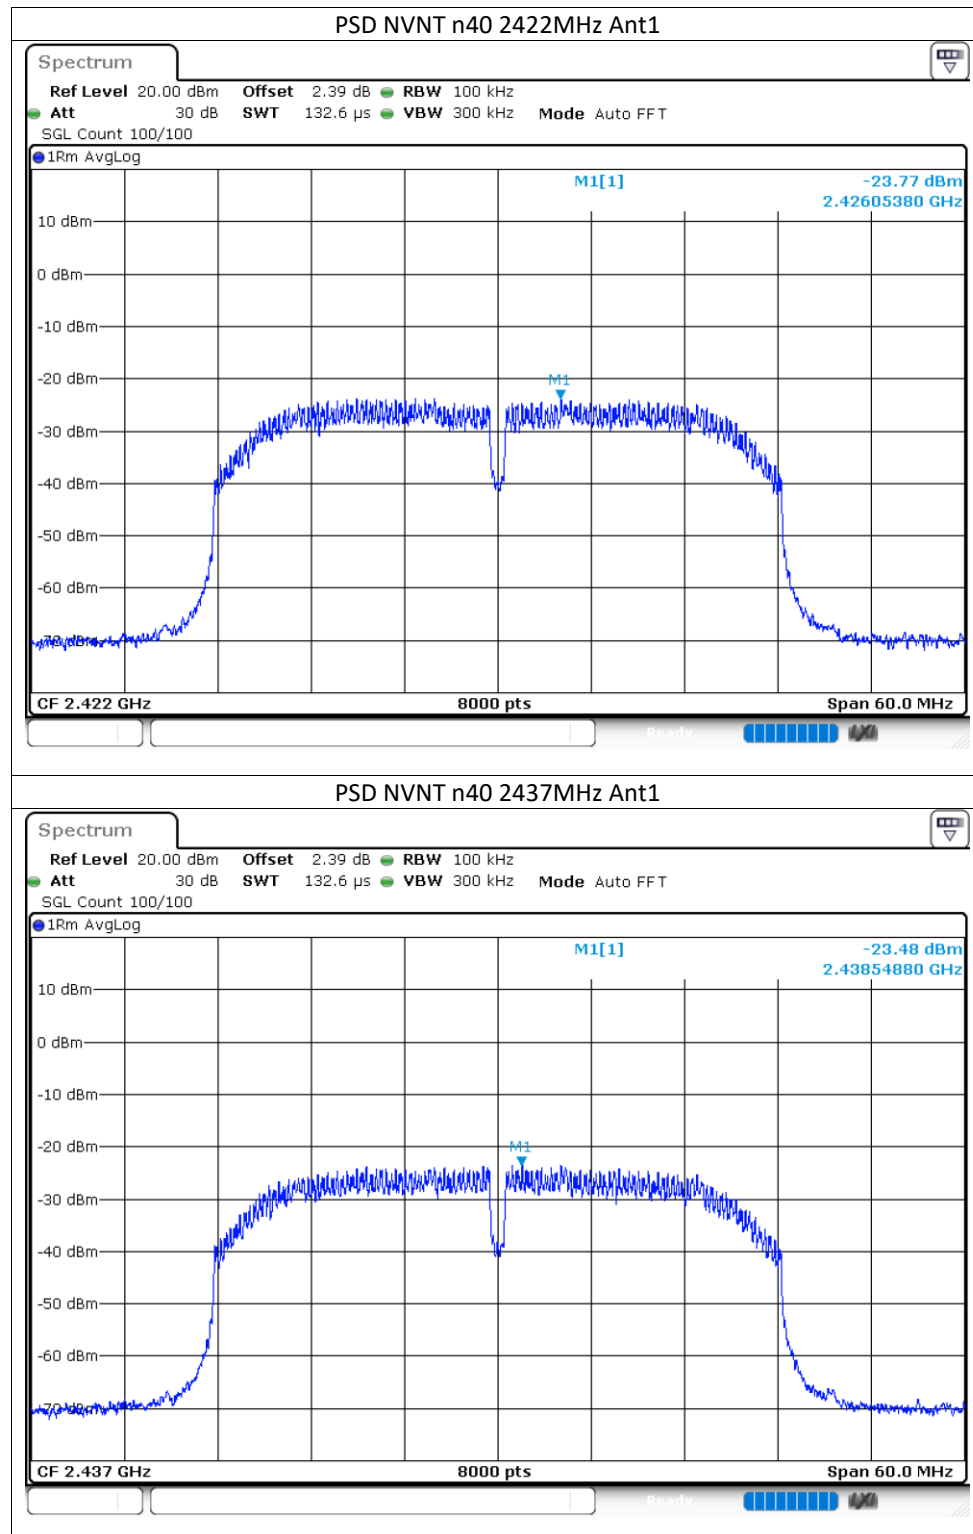

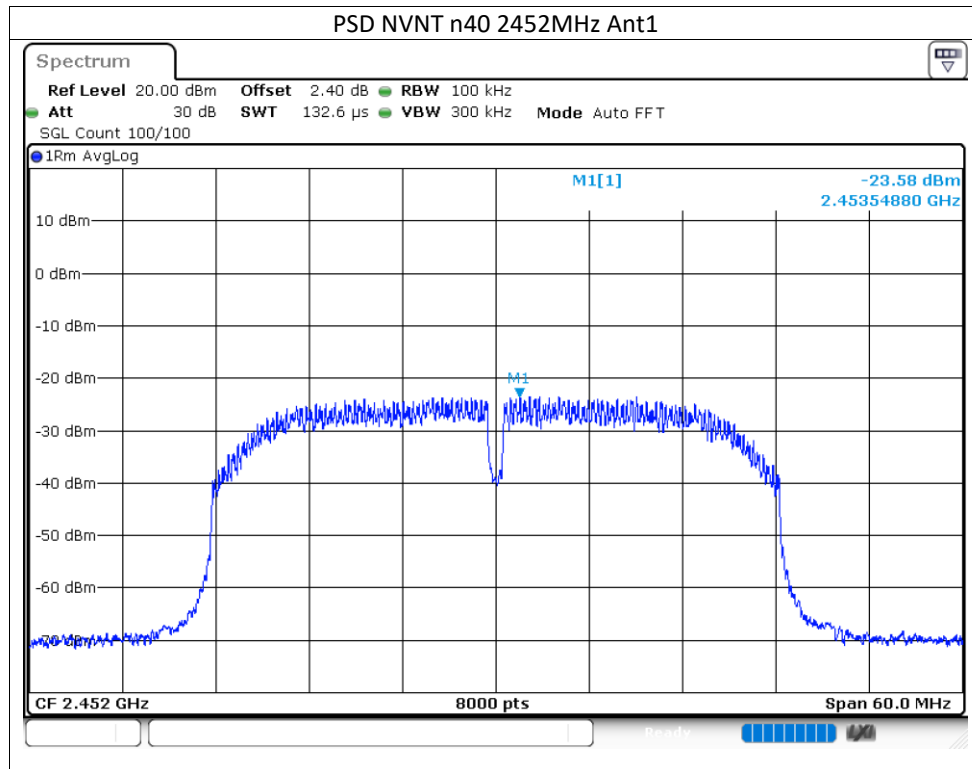

802.11ax-VHT20

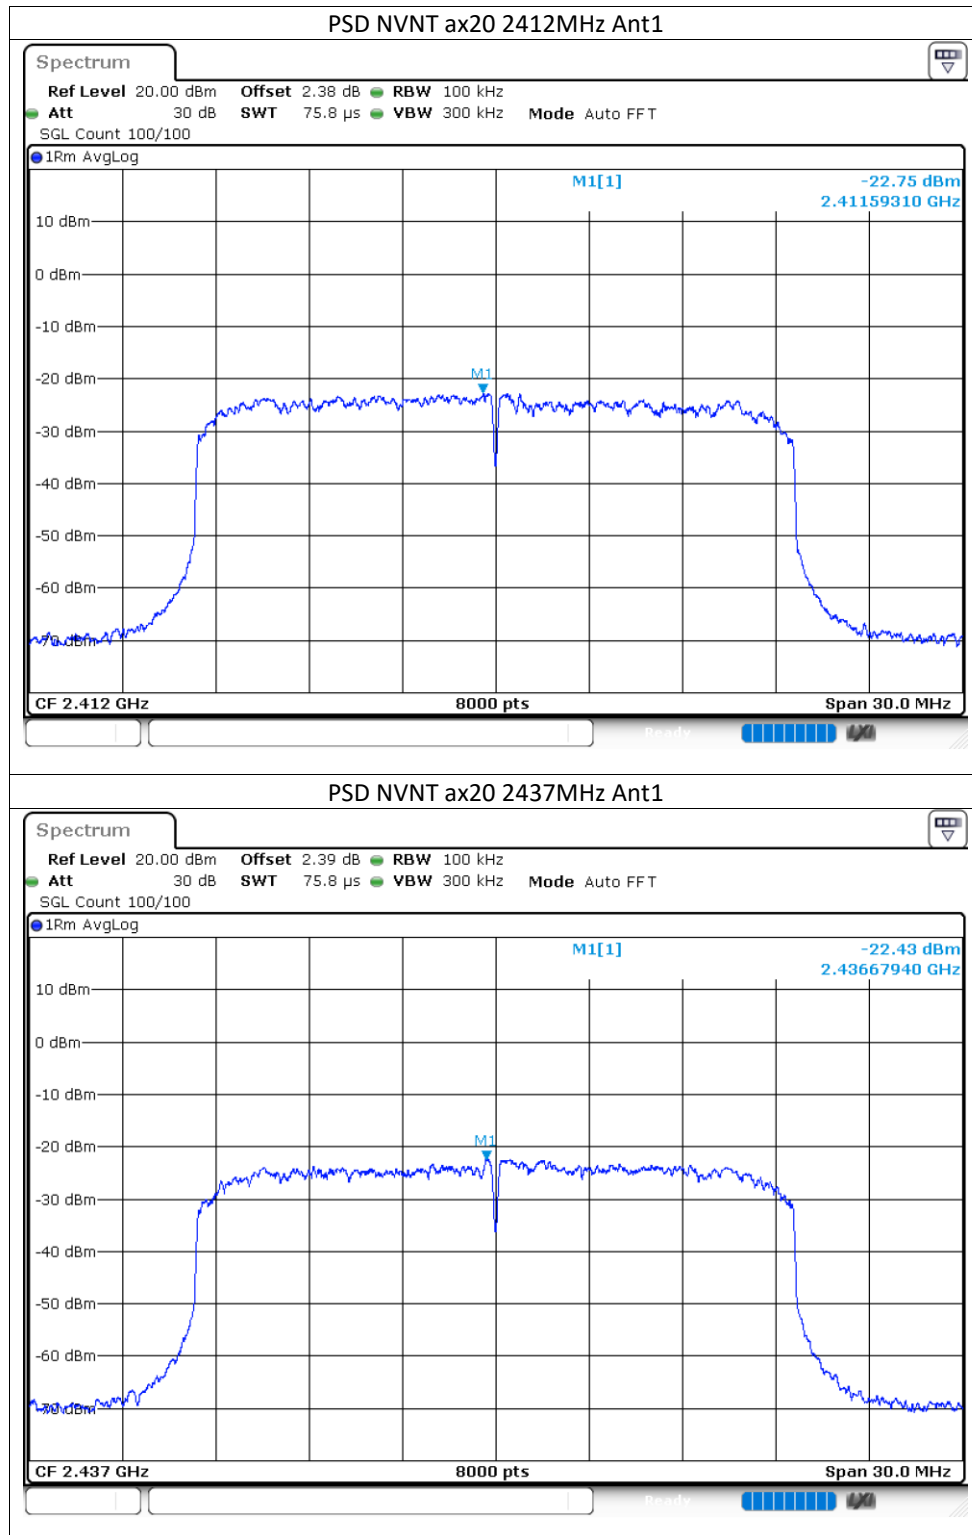

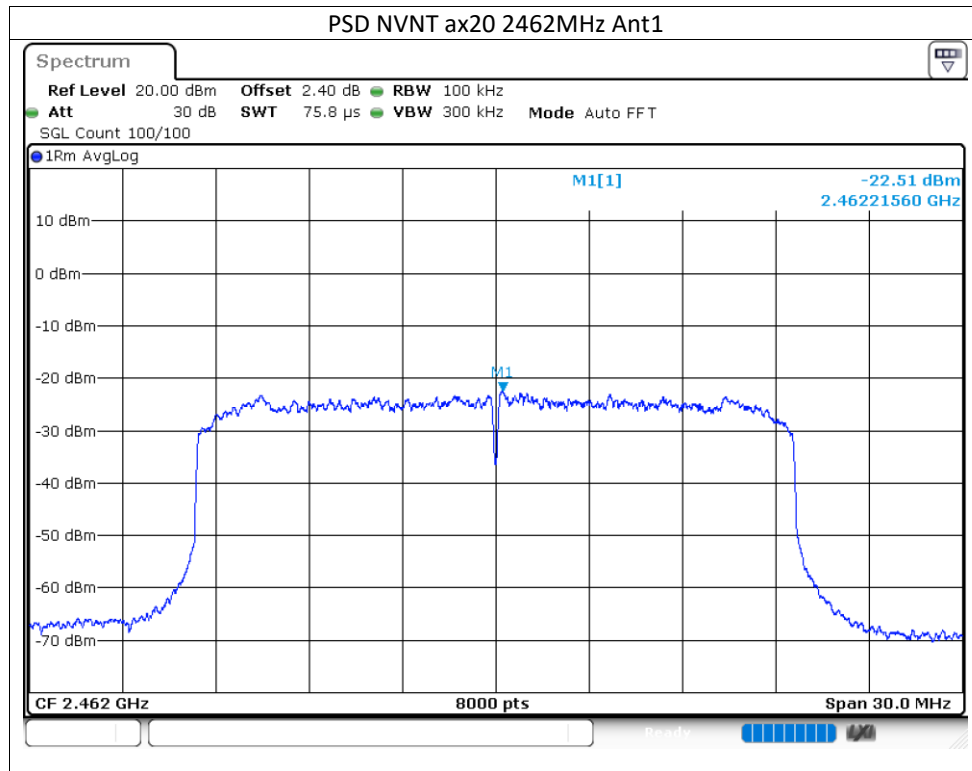

Applicant: EcoFlow Inc.

Date of Test: 22 September 2025

Worst Case Model: EF-TX-288P

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074 D01 v05r02.


All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.


Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for 802.11b and 6Mbps for 802.11g and 6Mbps for 802.11n-HT20 and 13.5Mbps for 802.11n-HT40.

The test plots showed all spurious emission up to the tenth harmonic were measured and they were found to be at least 30 dB below the highest level of the desired power in the passband.


The test plots are attached as below.


Channel 01 (2412MHz)

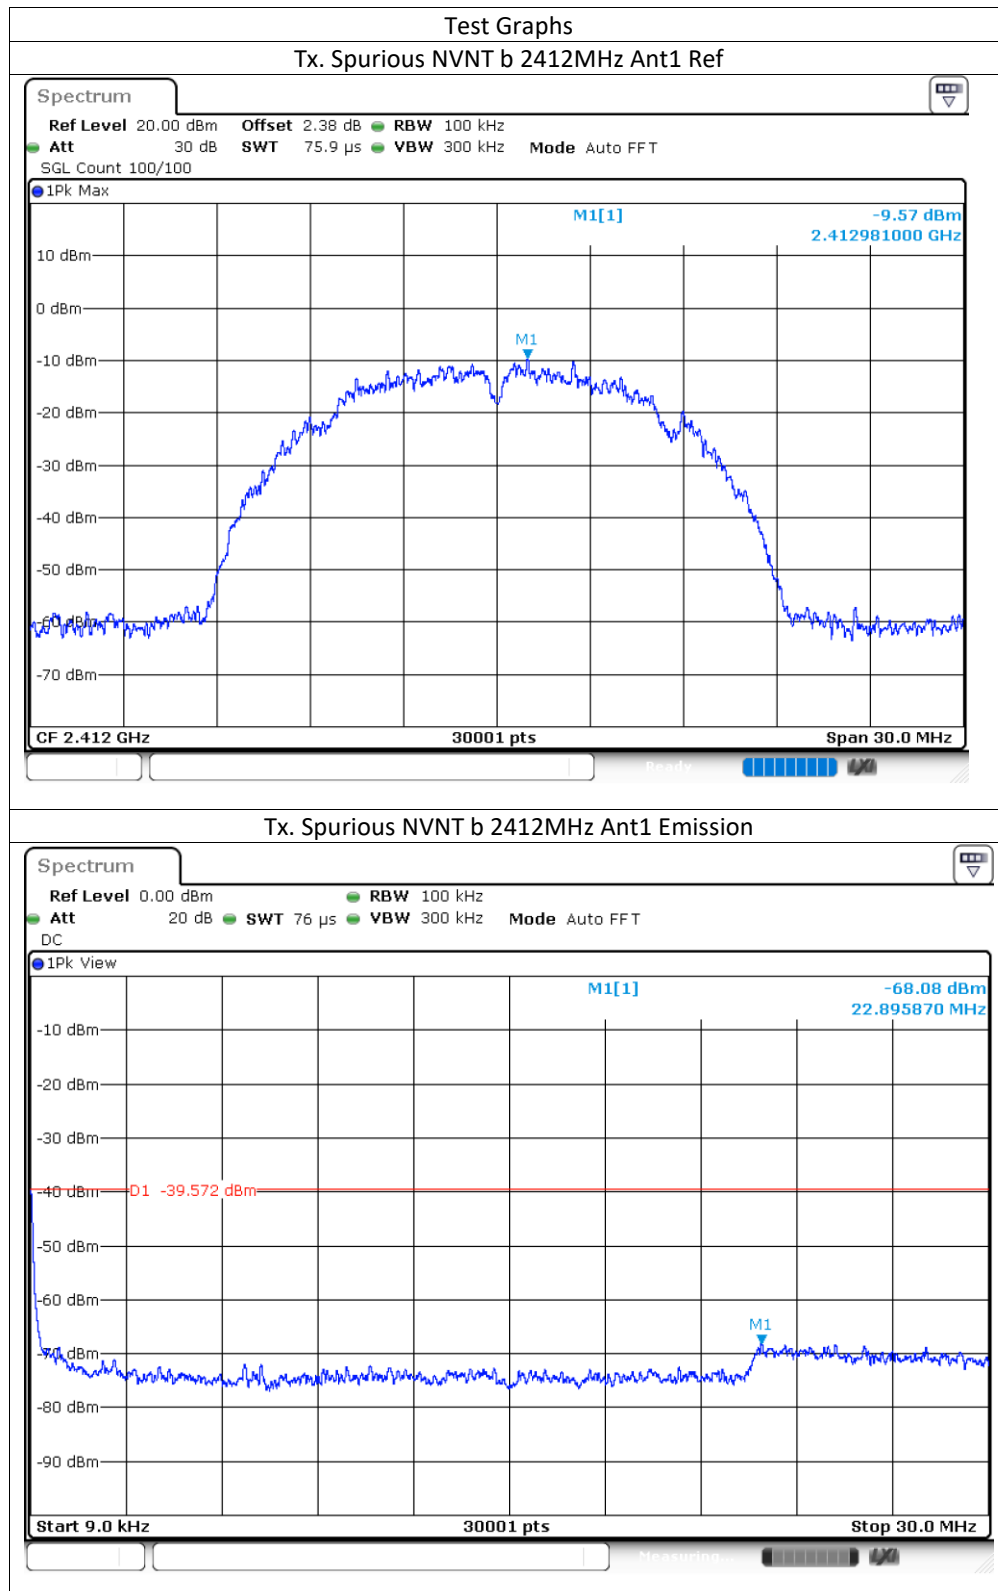

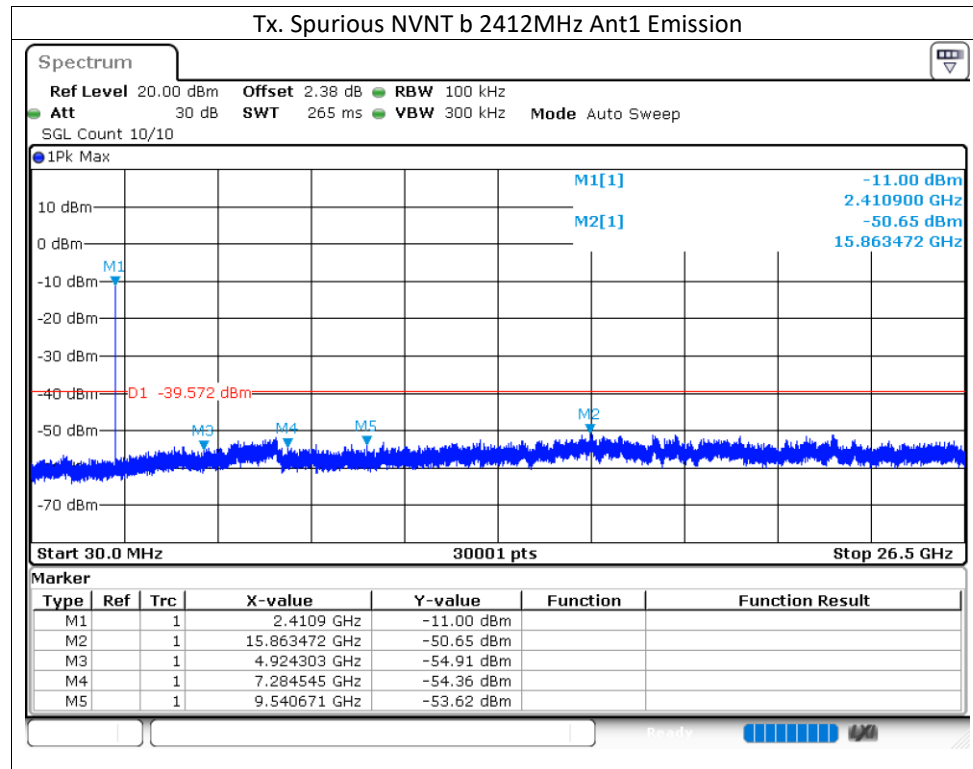



Channel 06 (2437MHz)

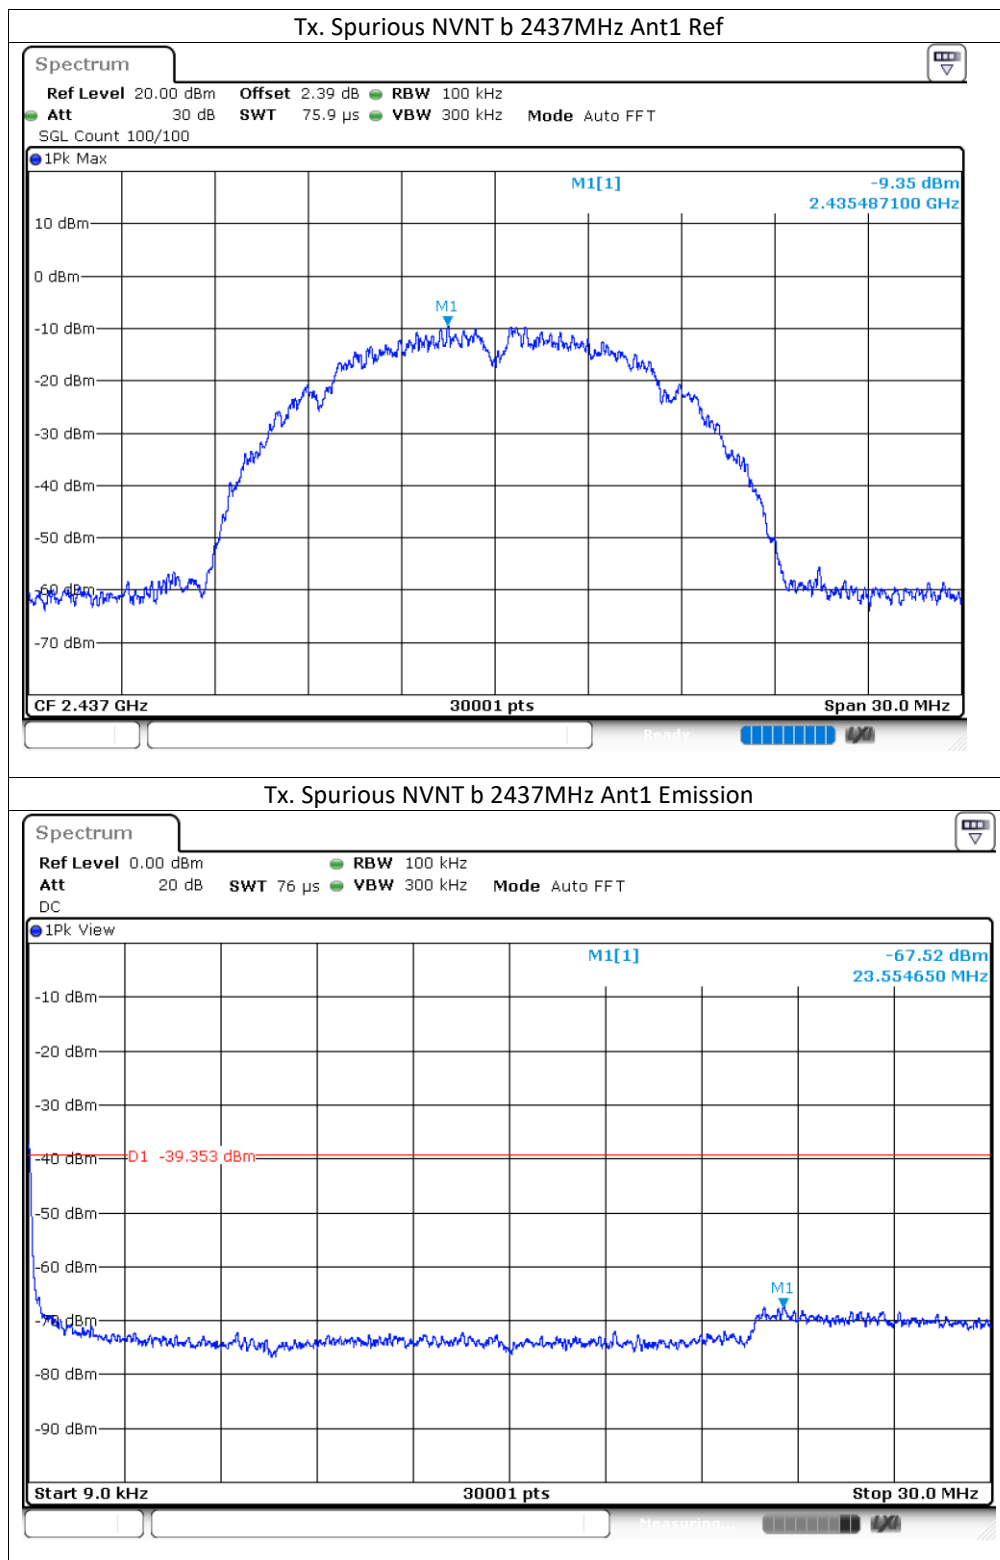

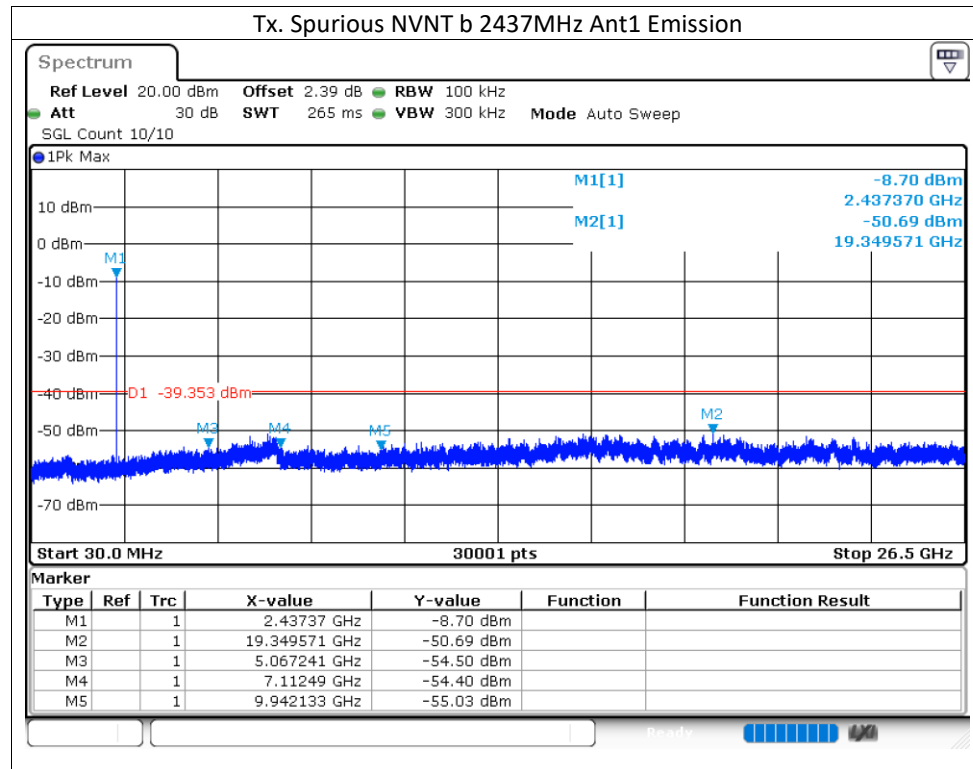


Channel 11 (2462MHz)

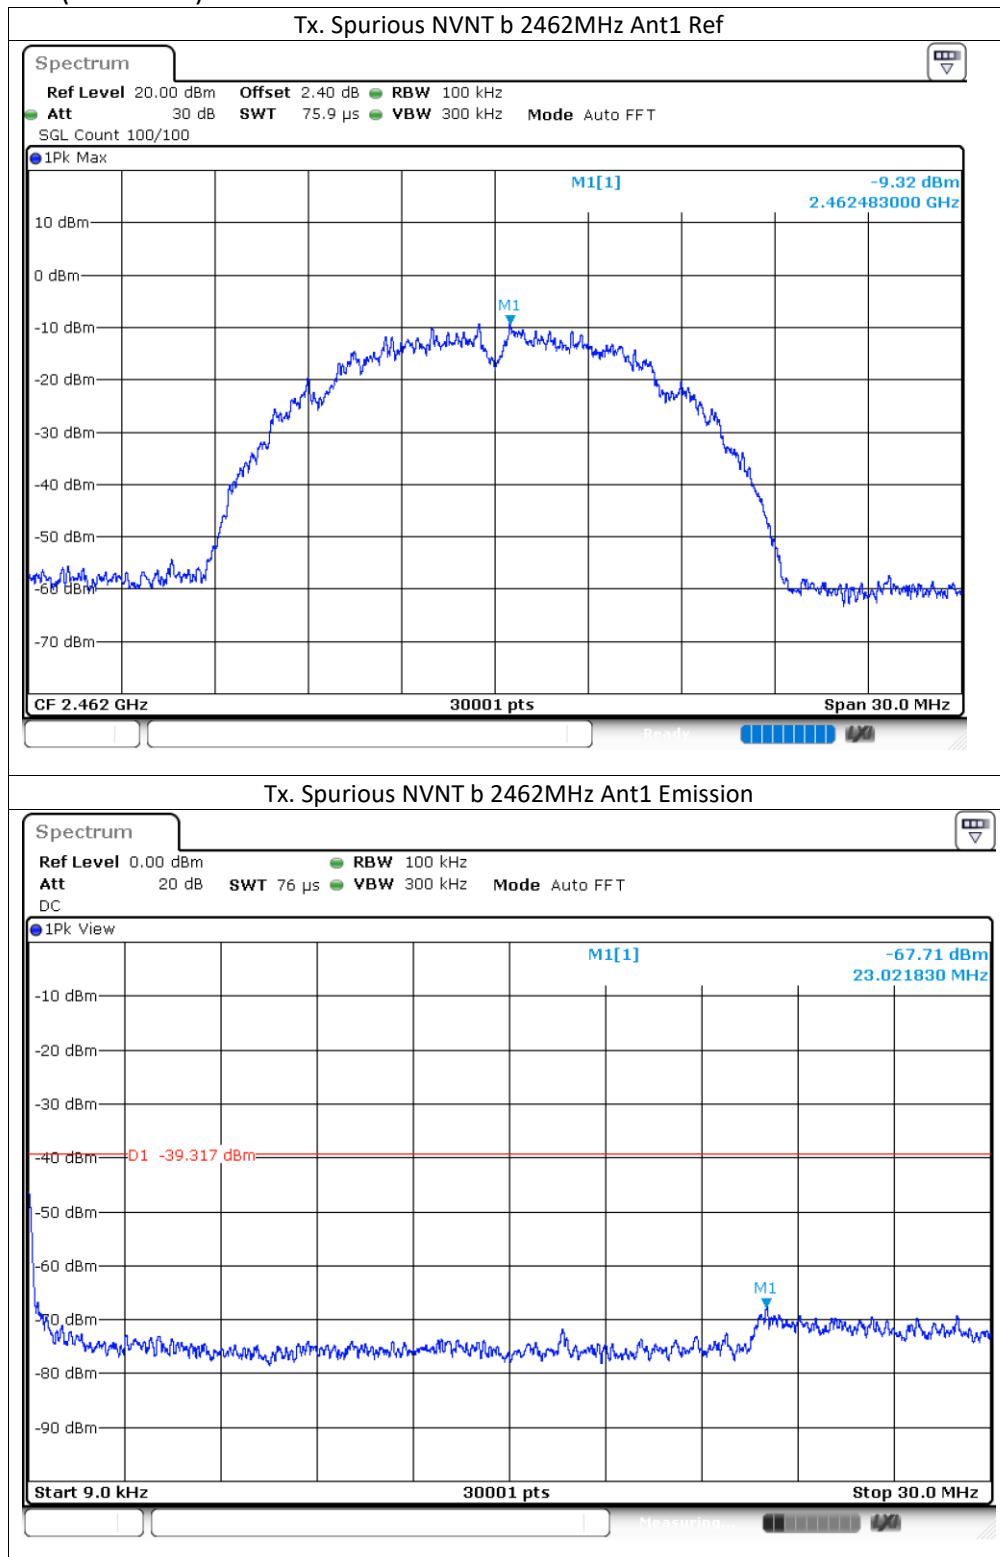


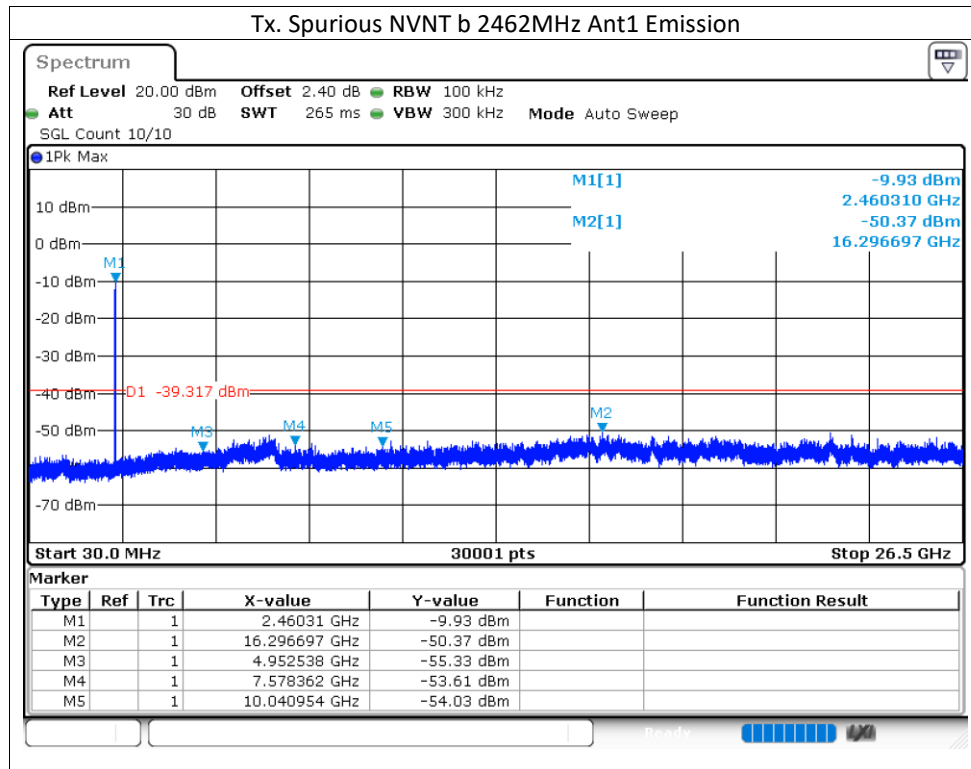


802.11g


Channel 01 (2412MHz)

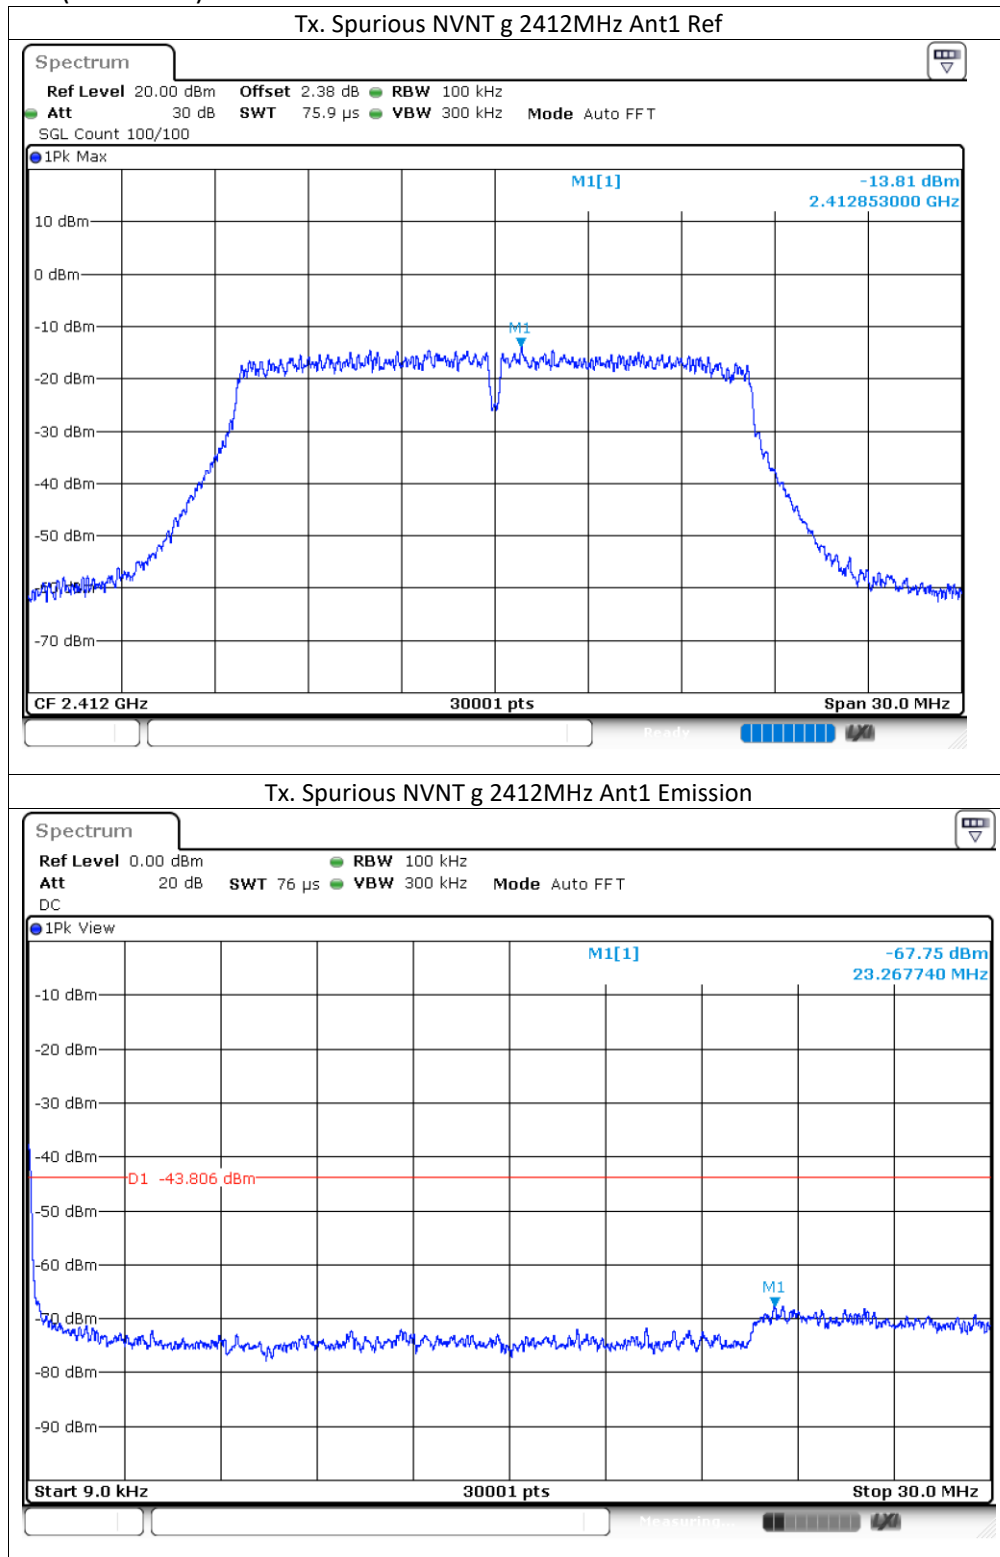

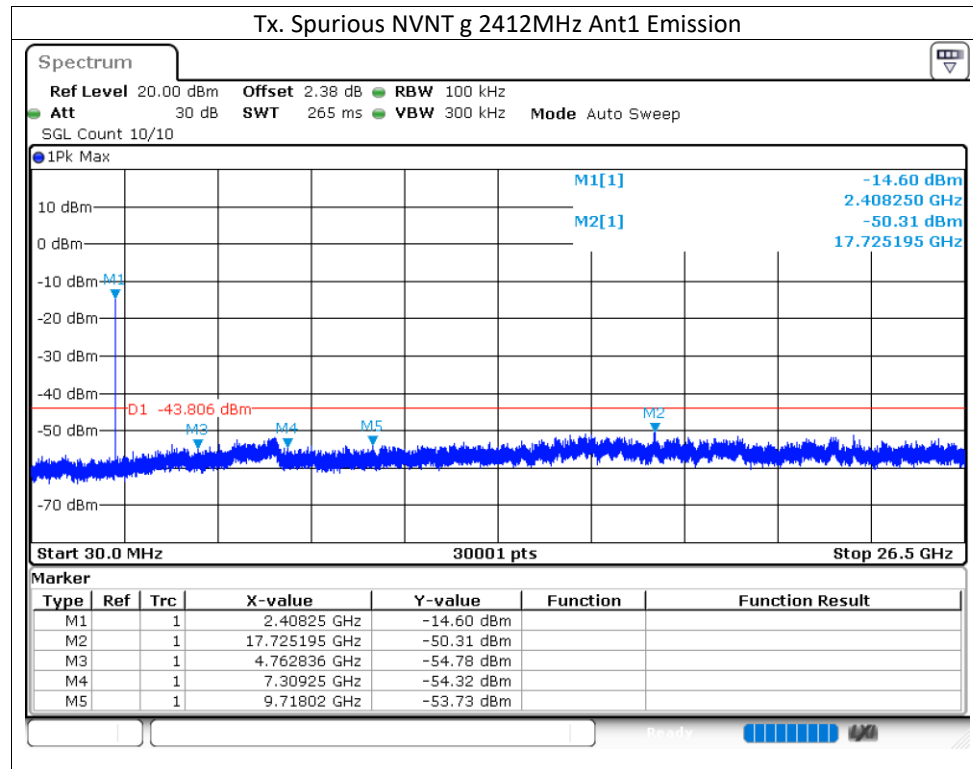



Channel 06 (2437MHz)

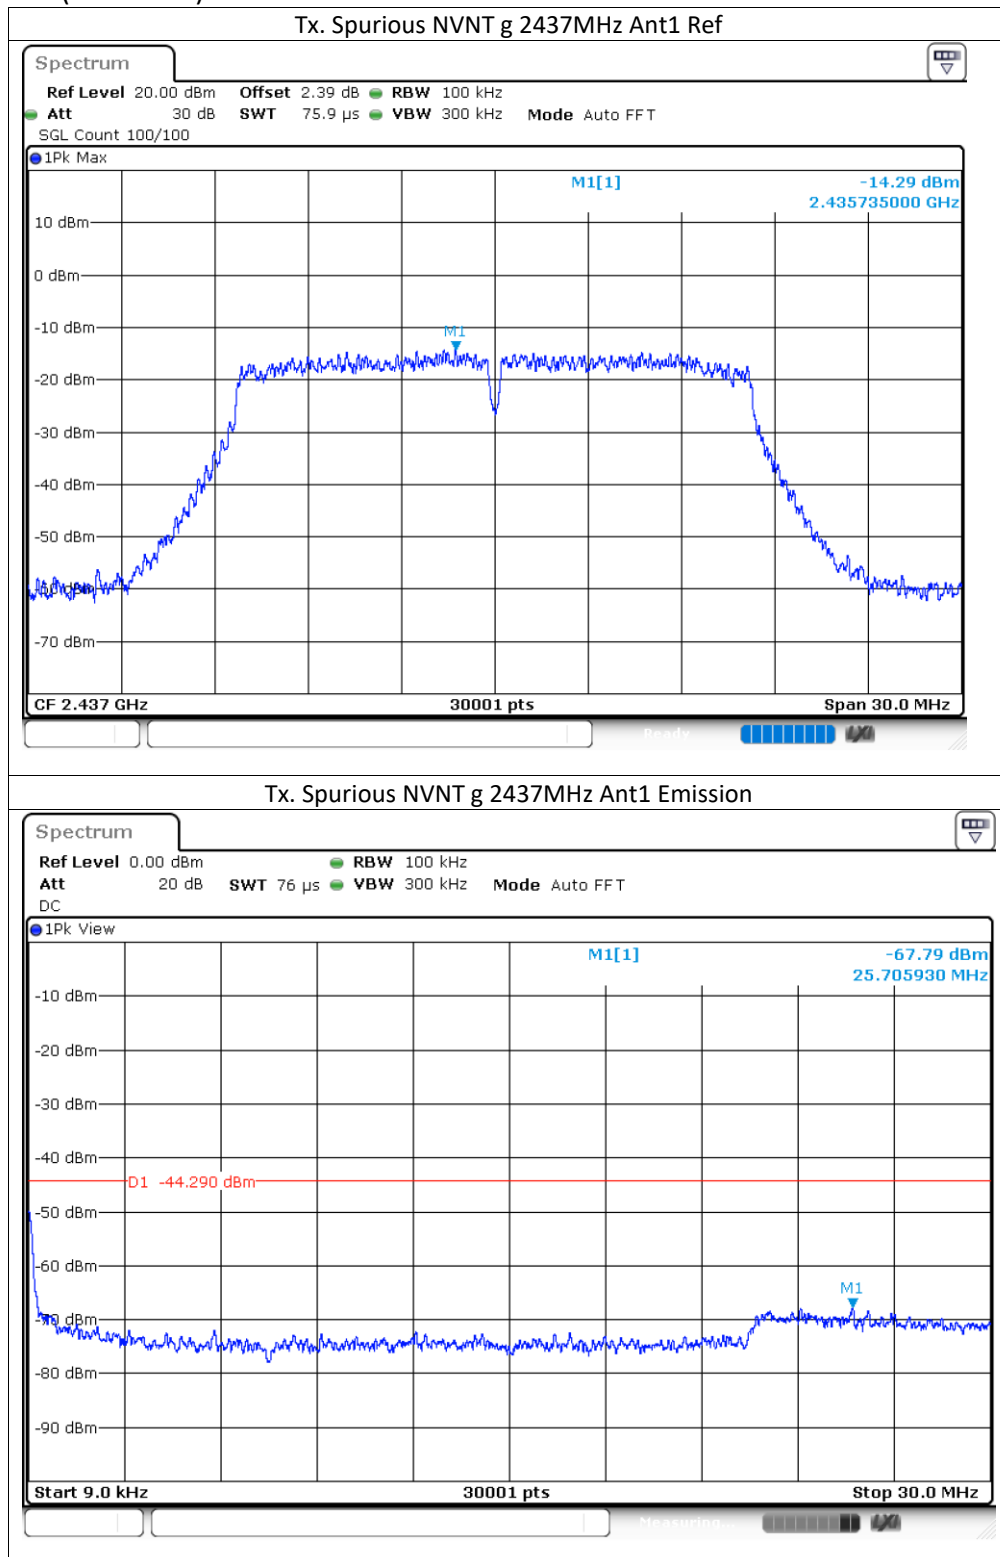

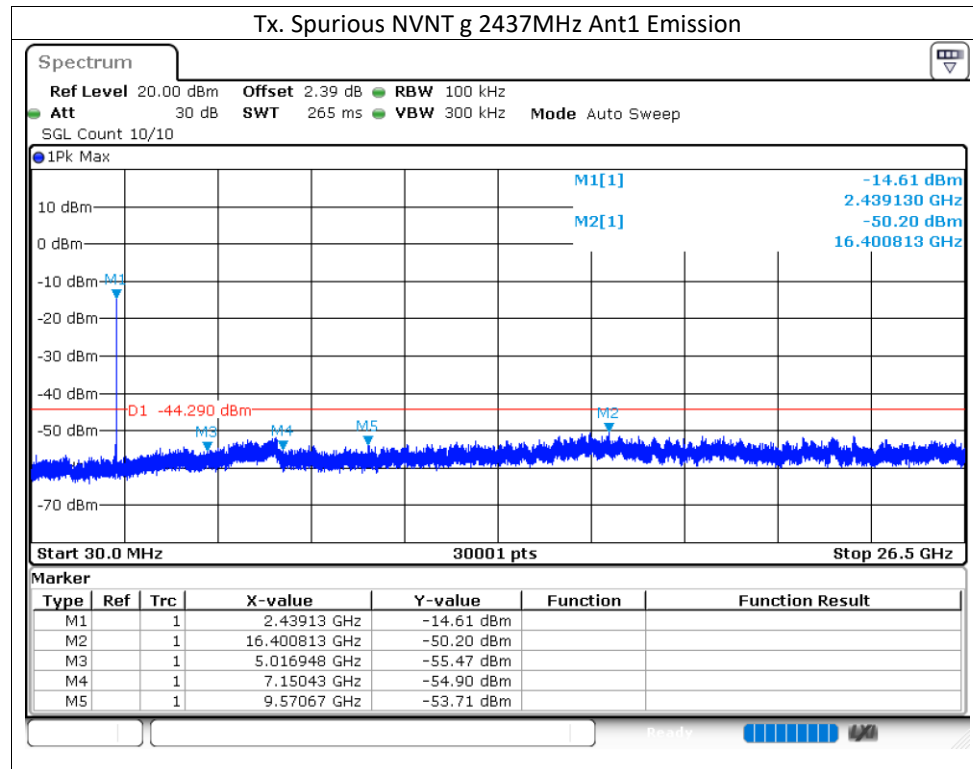


Channel 11 (2462MHz)

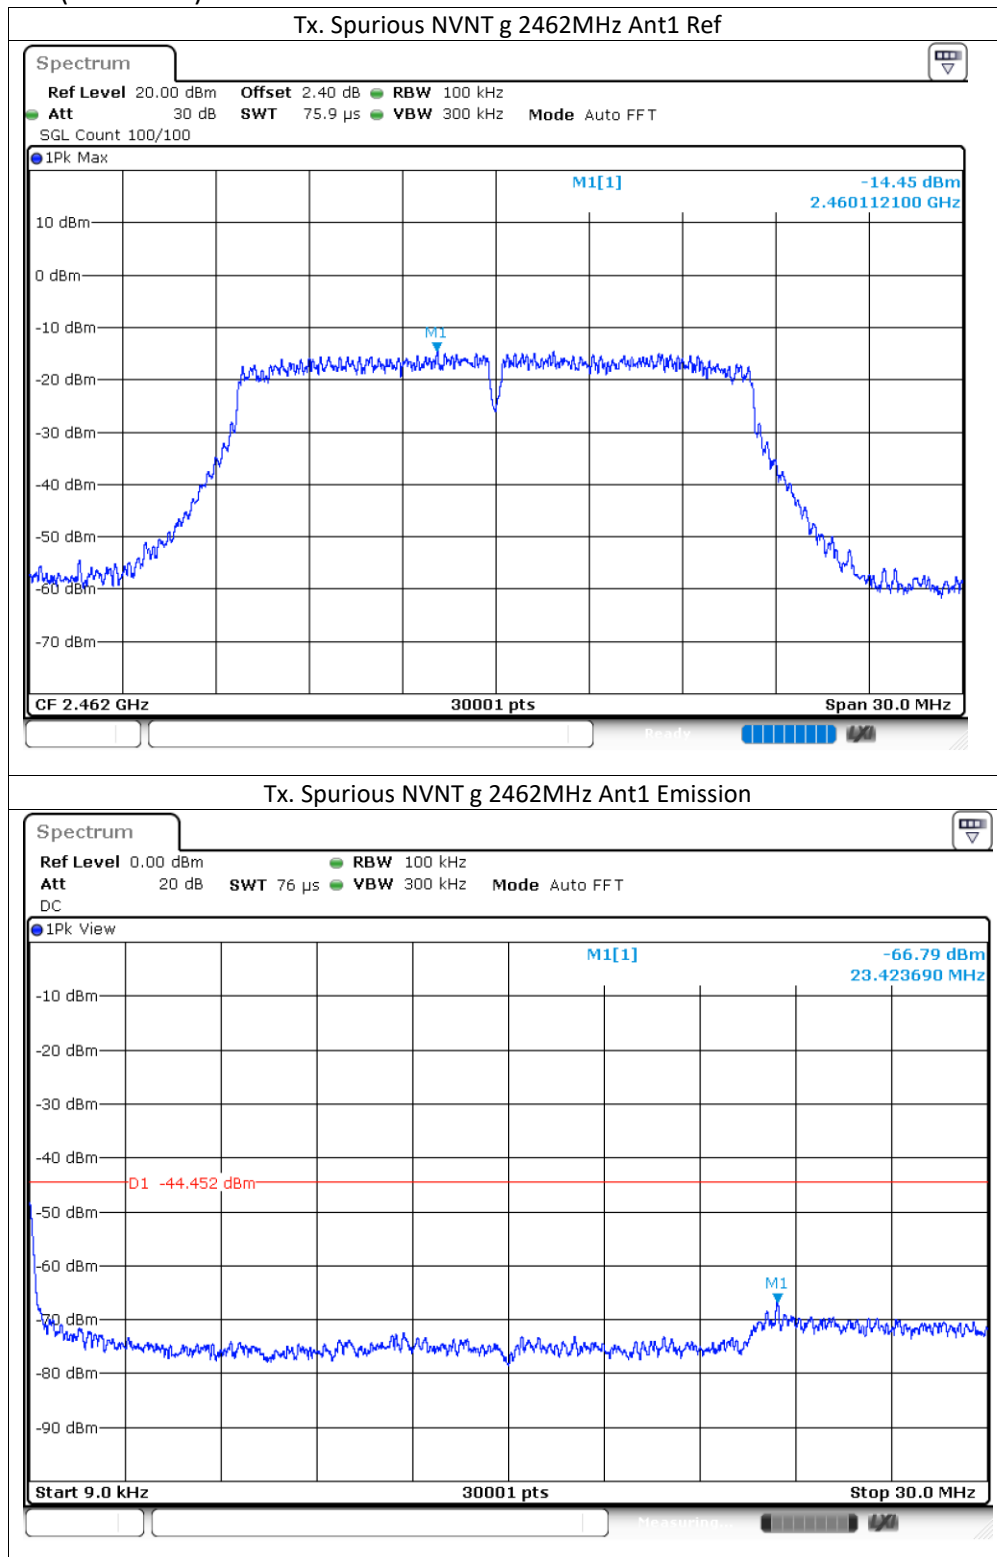


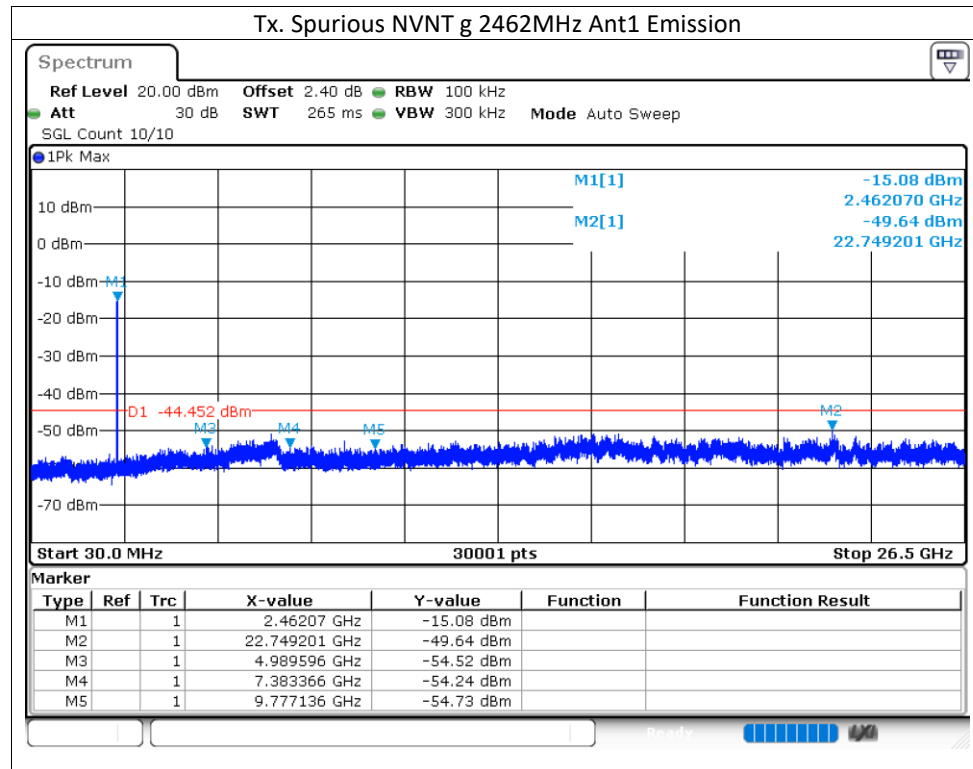


802.11n-HT20


Channel 01 (2412MHz)

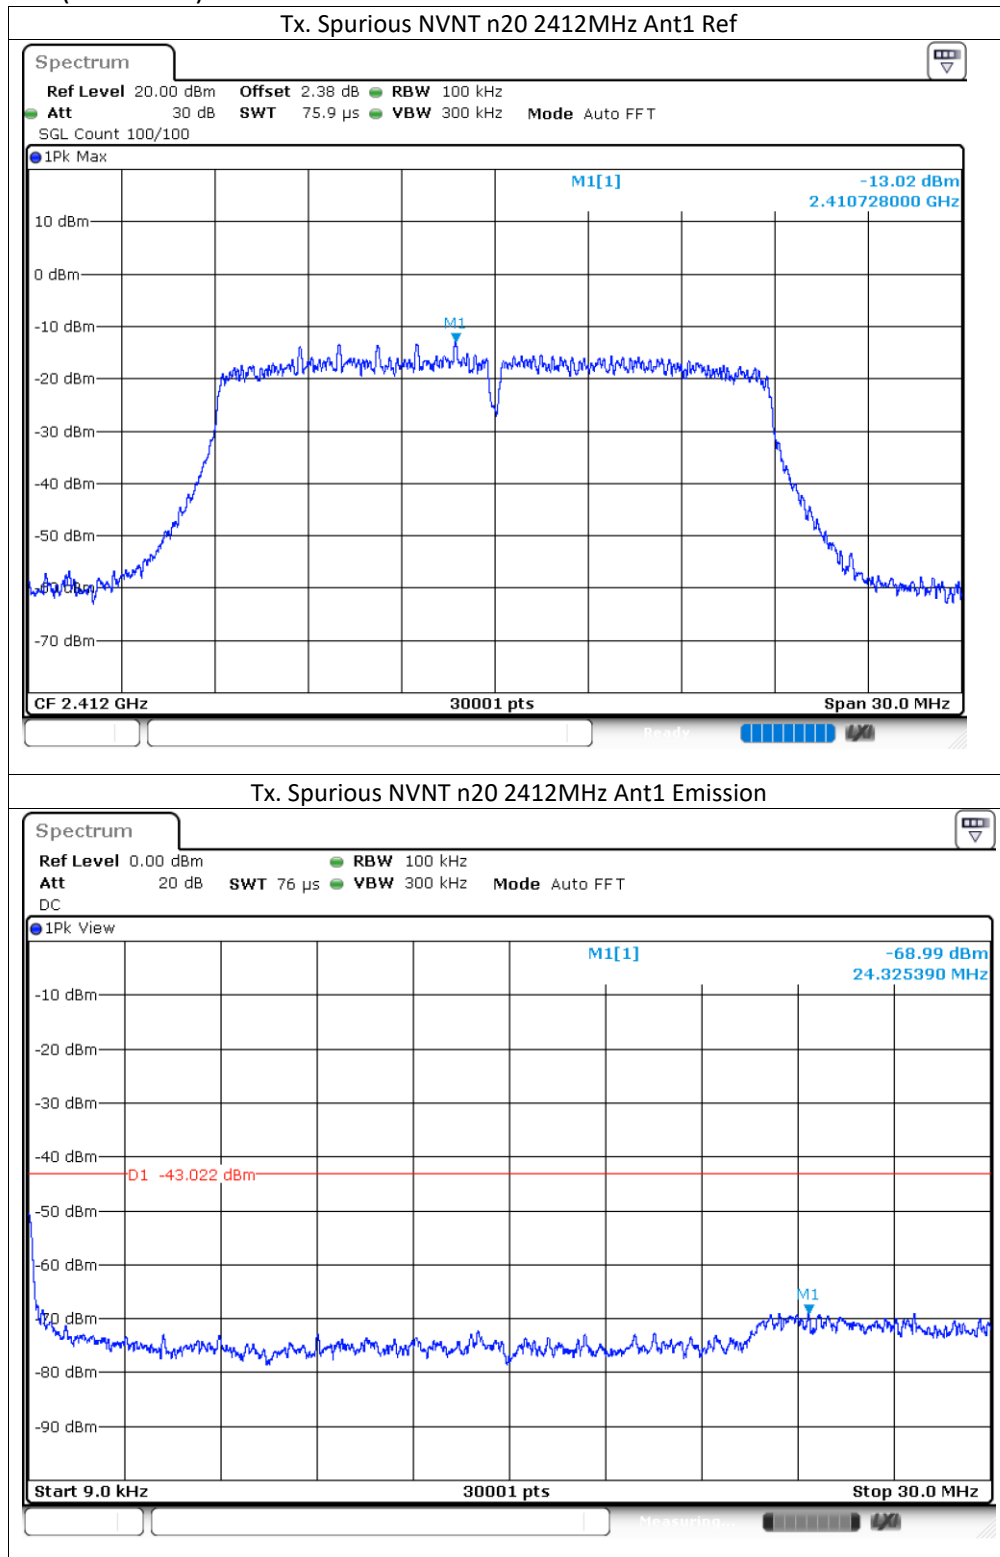

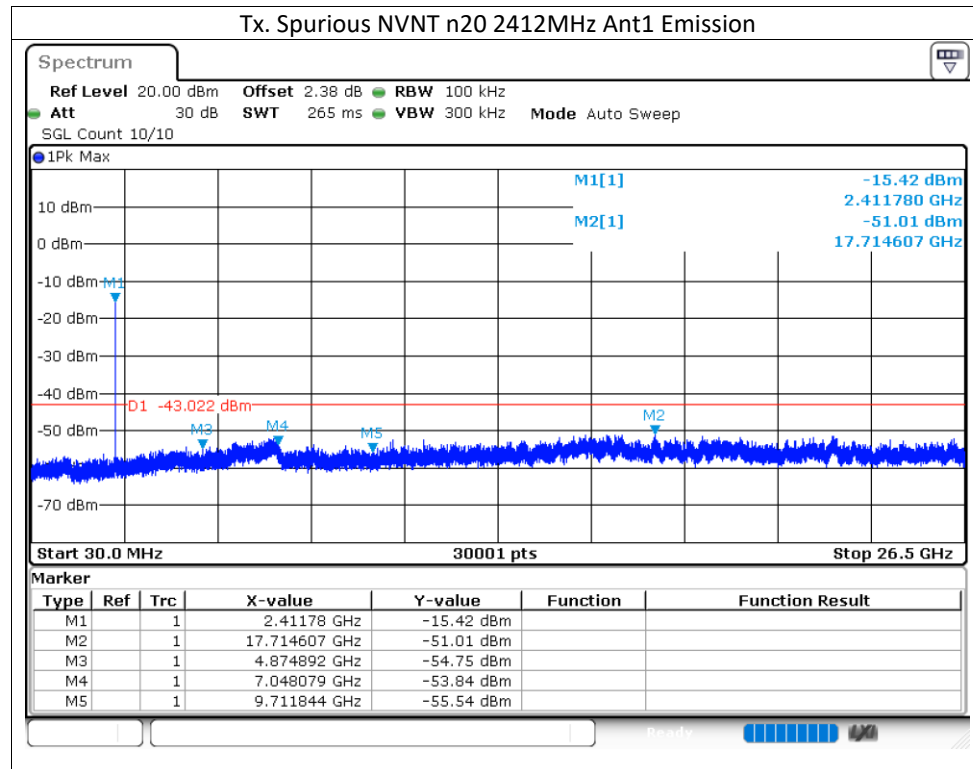



Channel 06 (2437MHz)

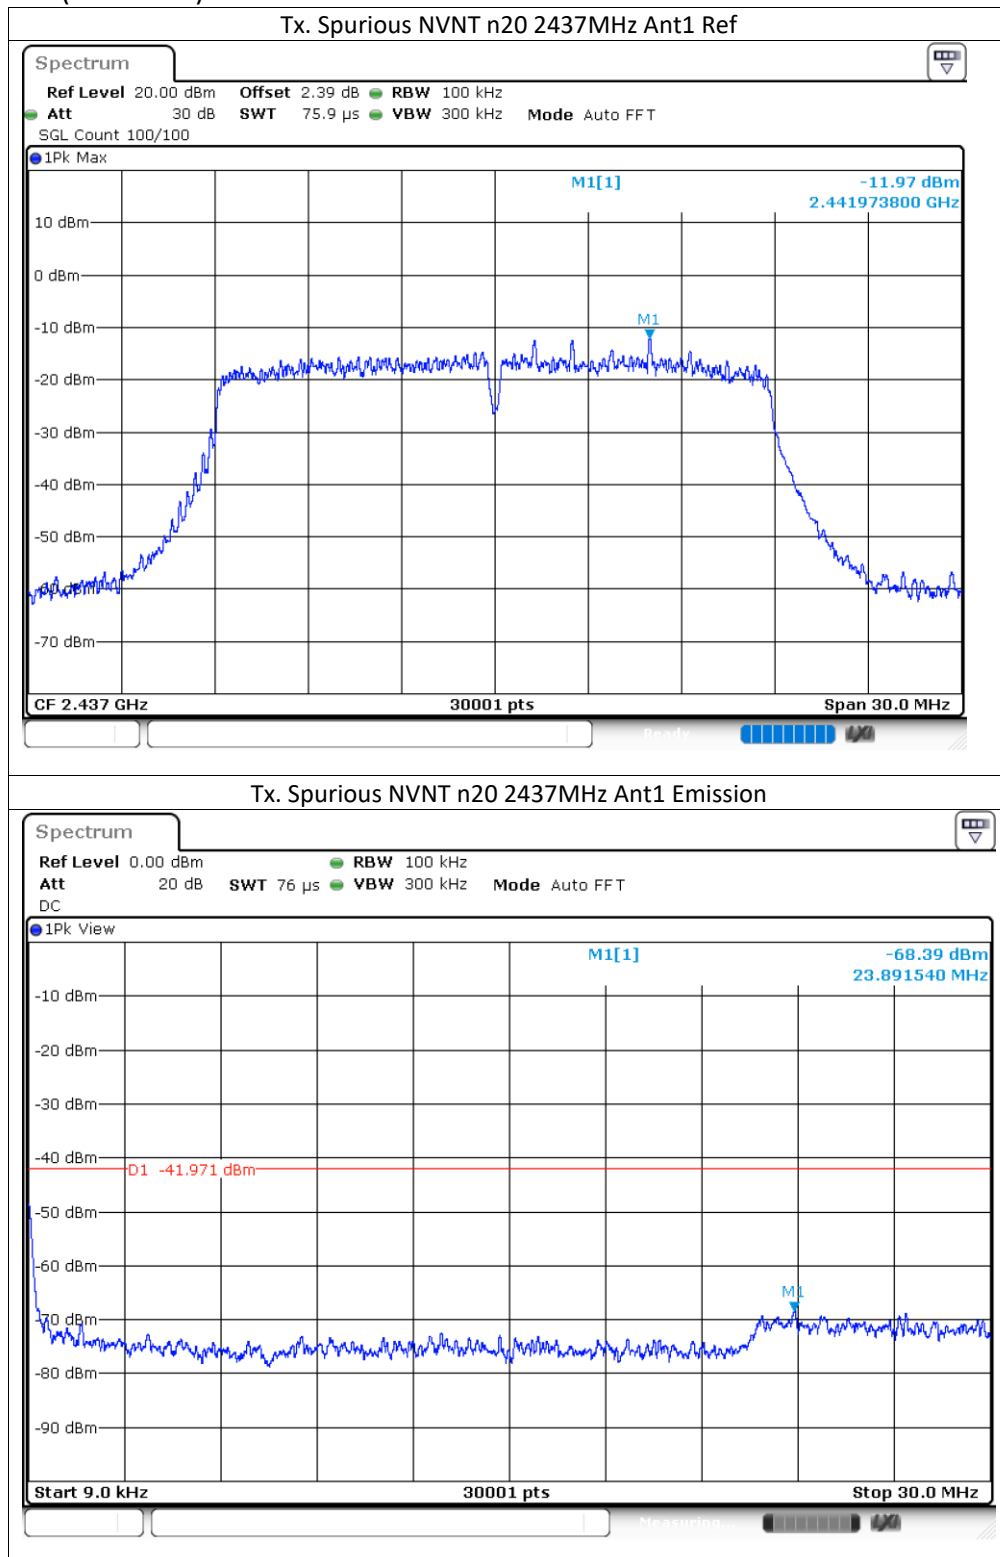

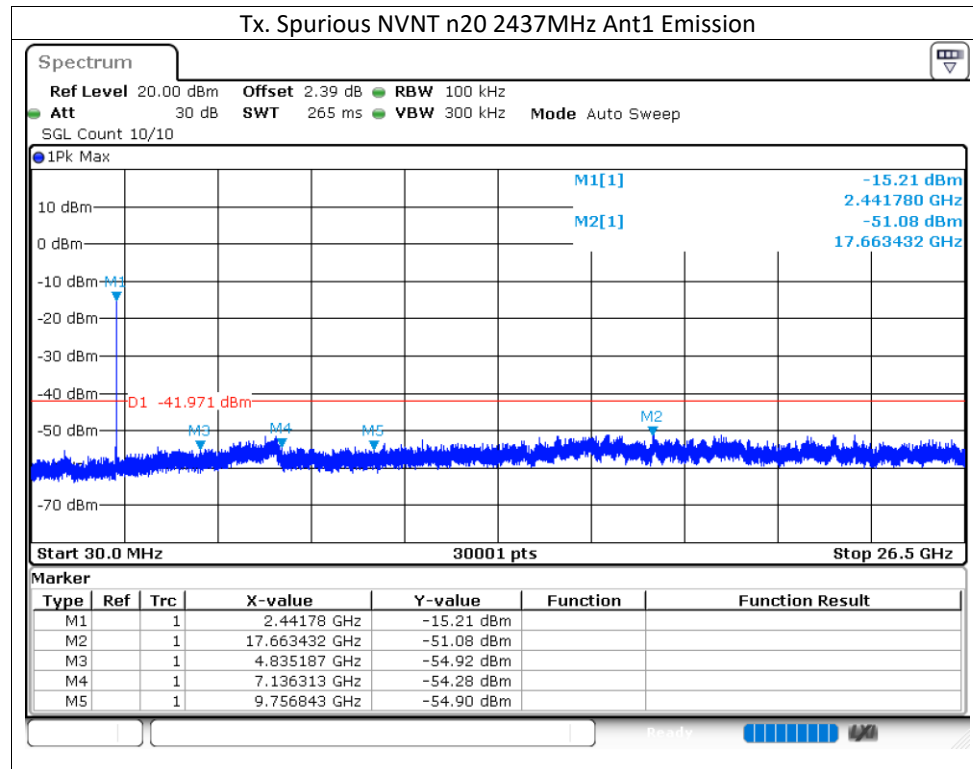


Channel 11 (2462MHz)

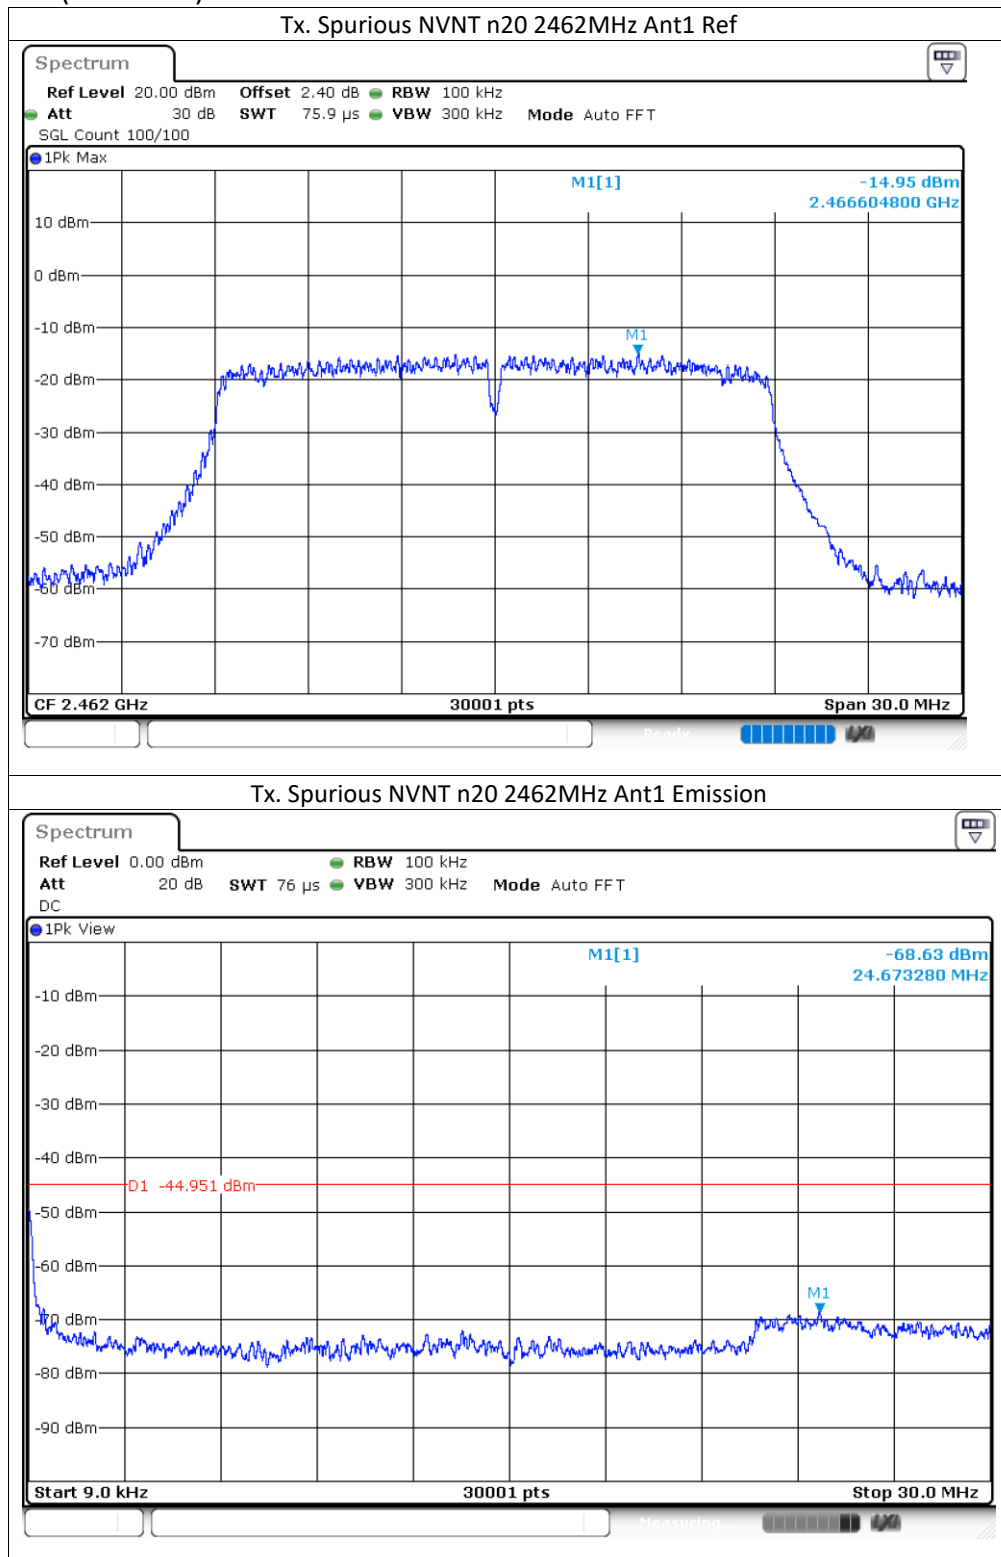


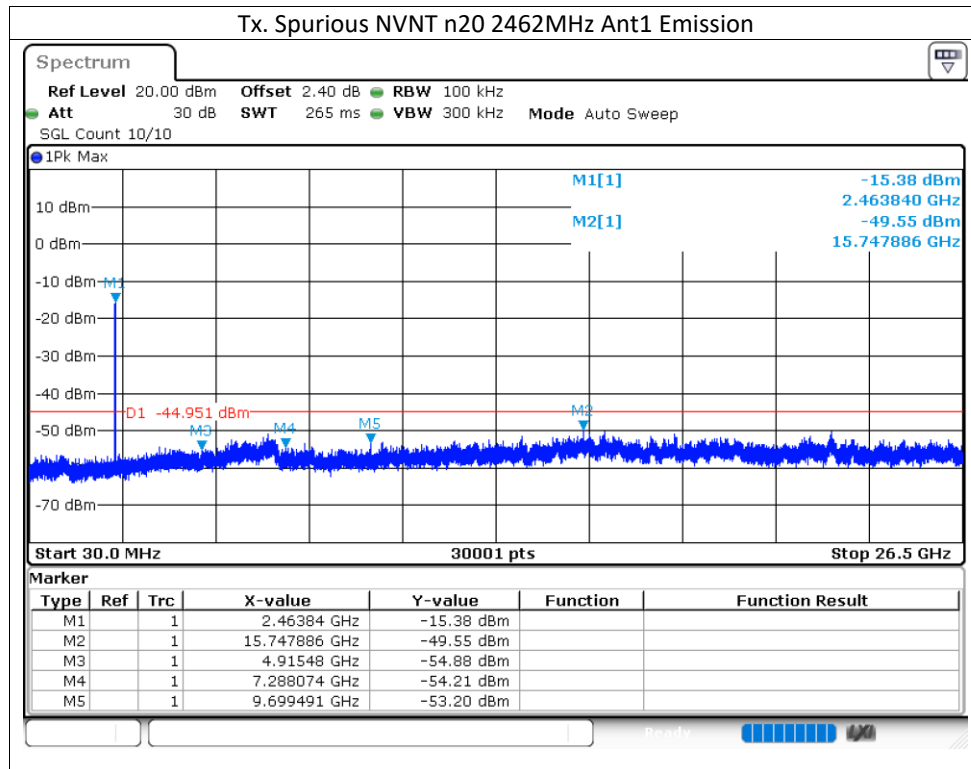


802.11n-HT40


Channel 01 (2422MHz)

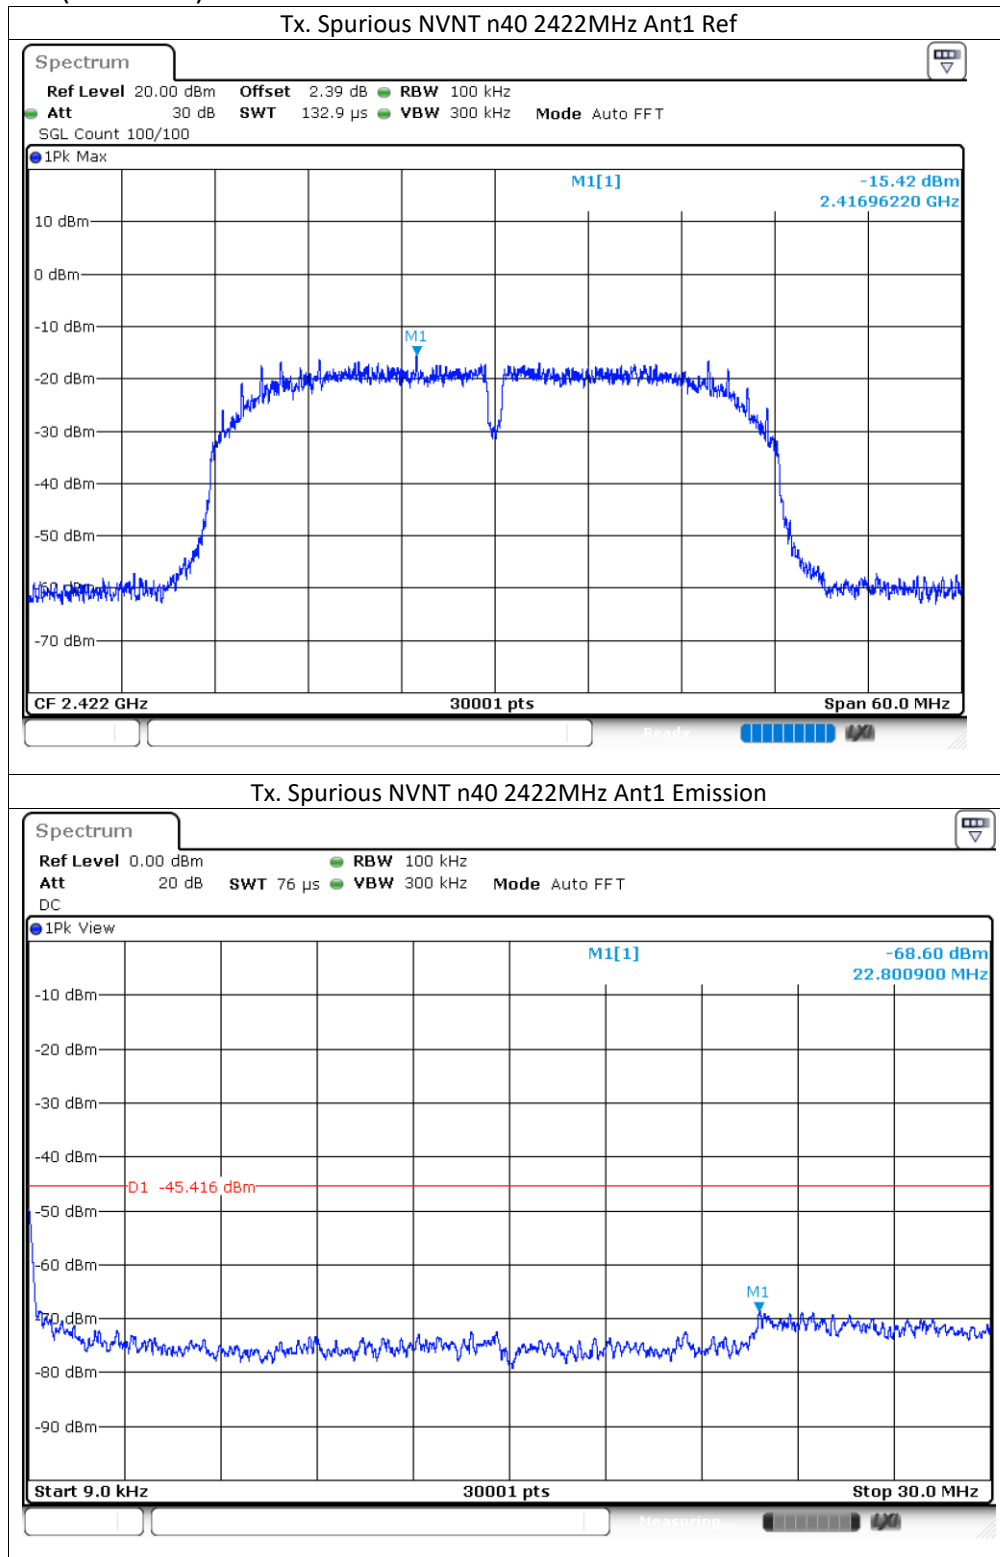

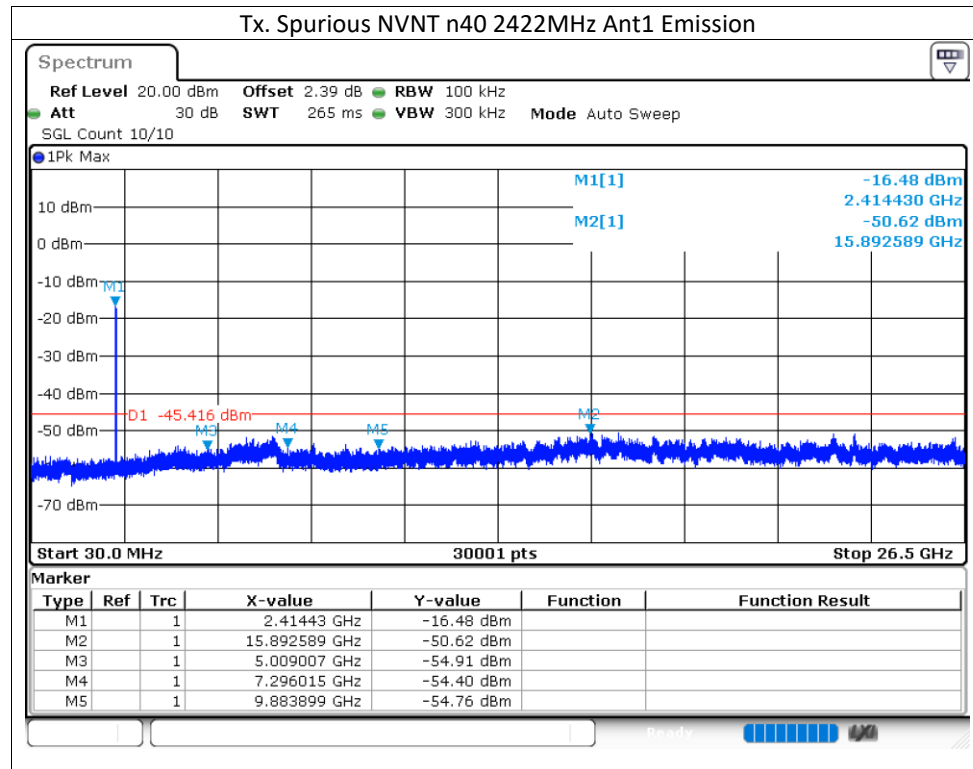



Channel 06 (2437MHz)

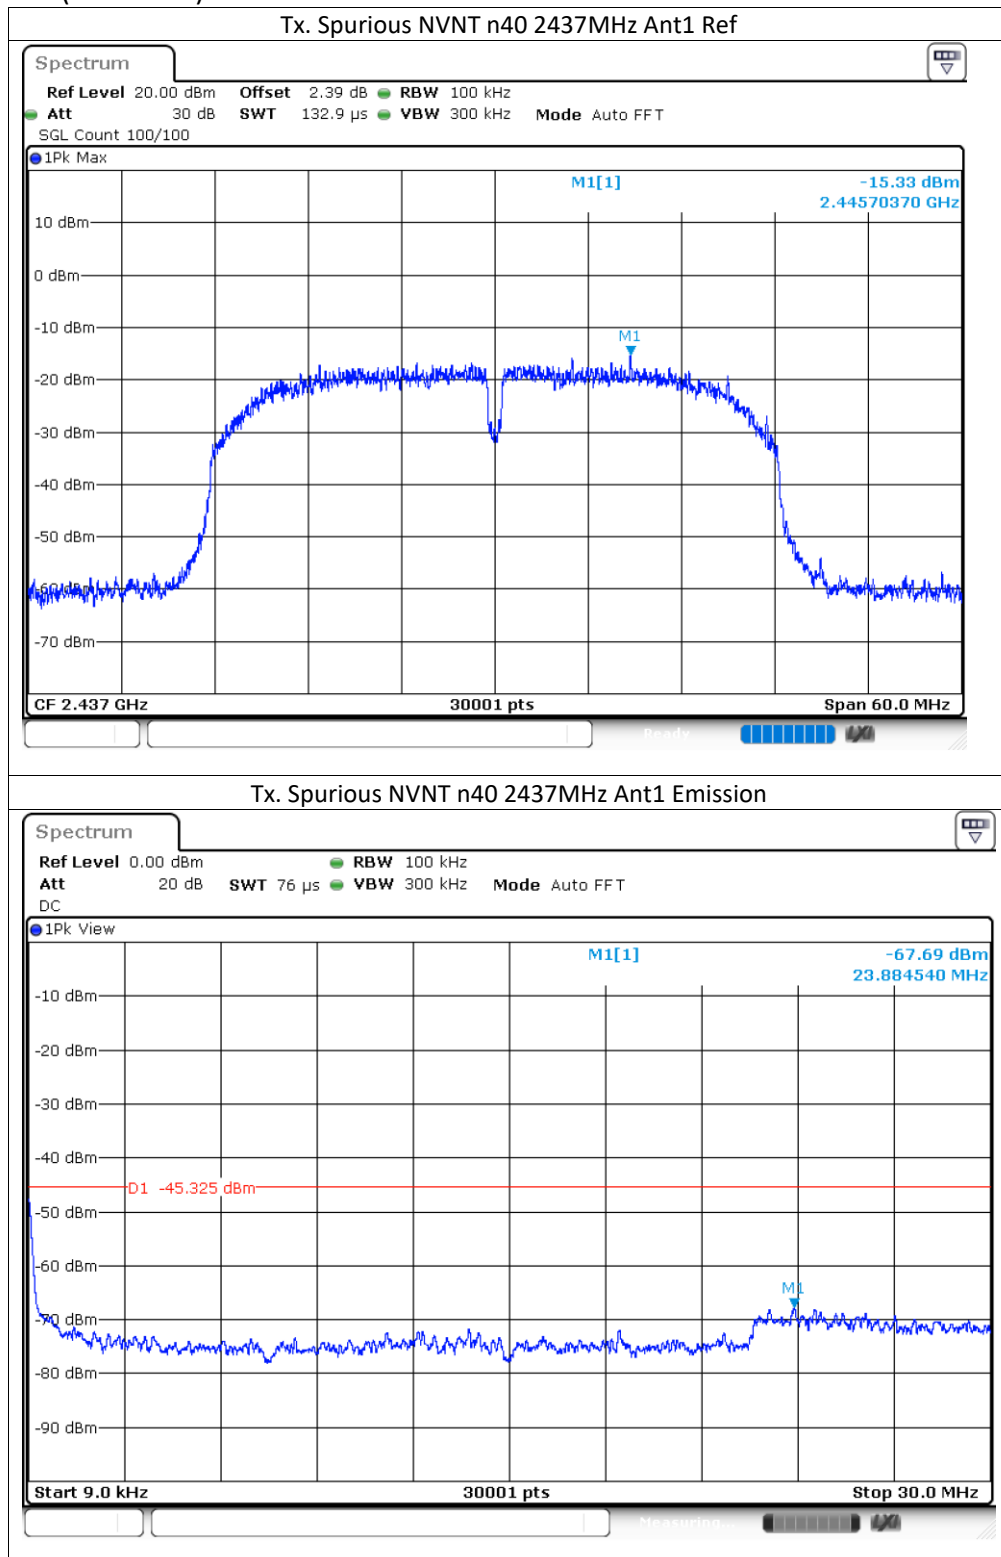

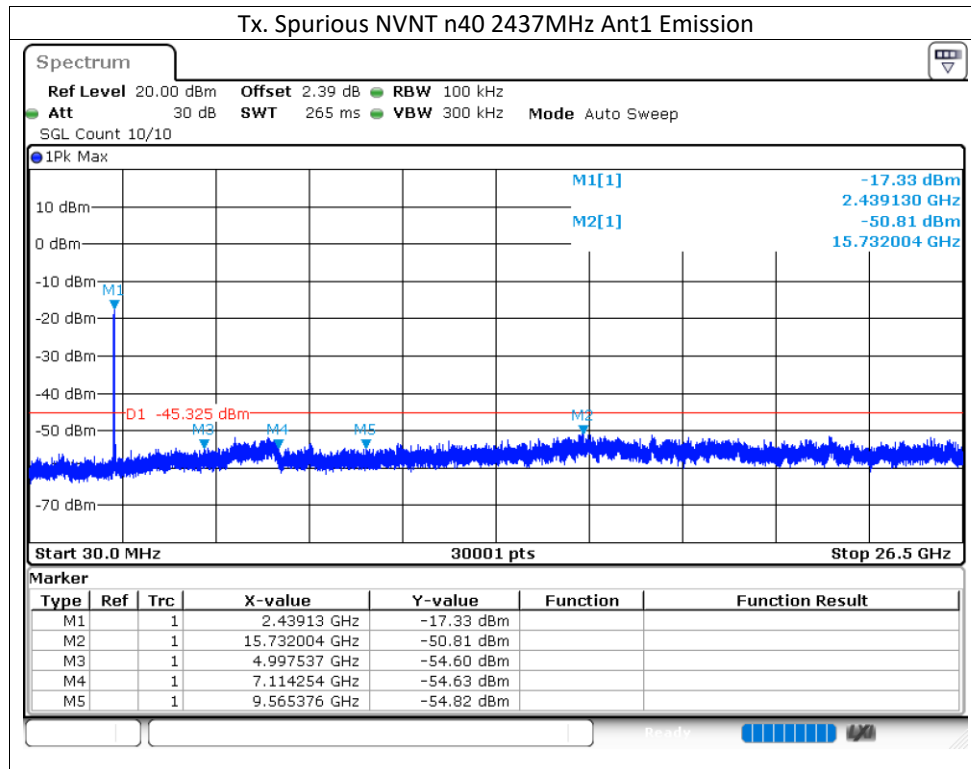


Channel 11 (2452MHz)

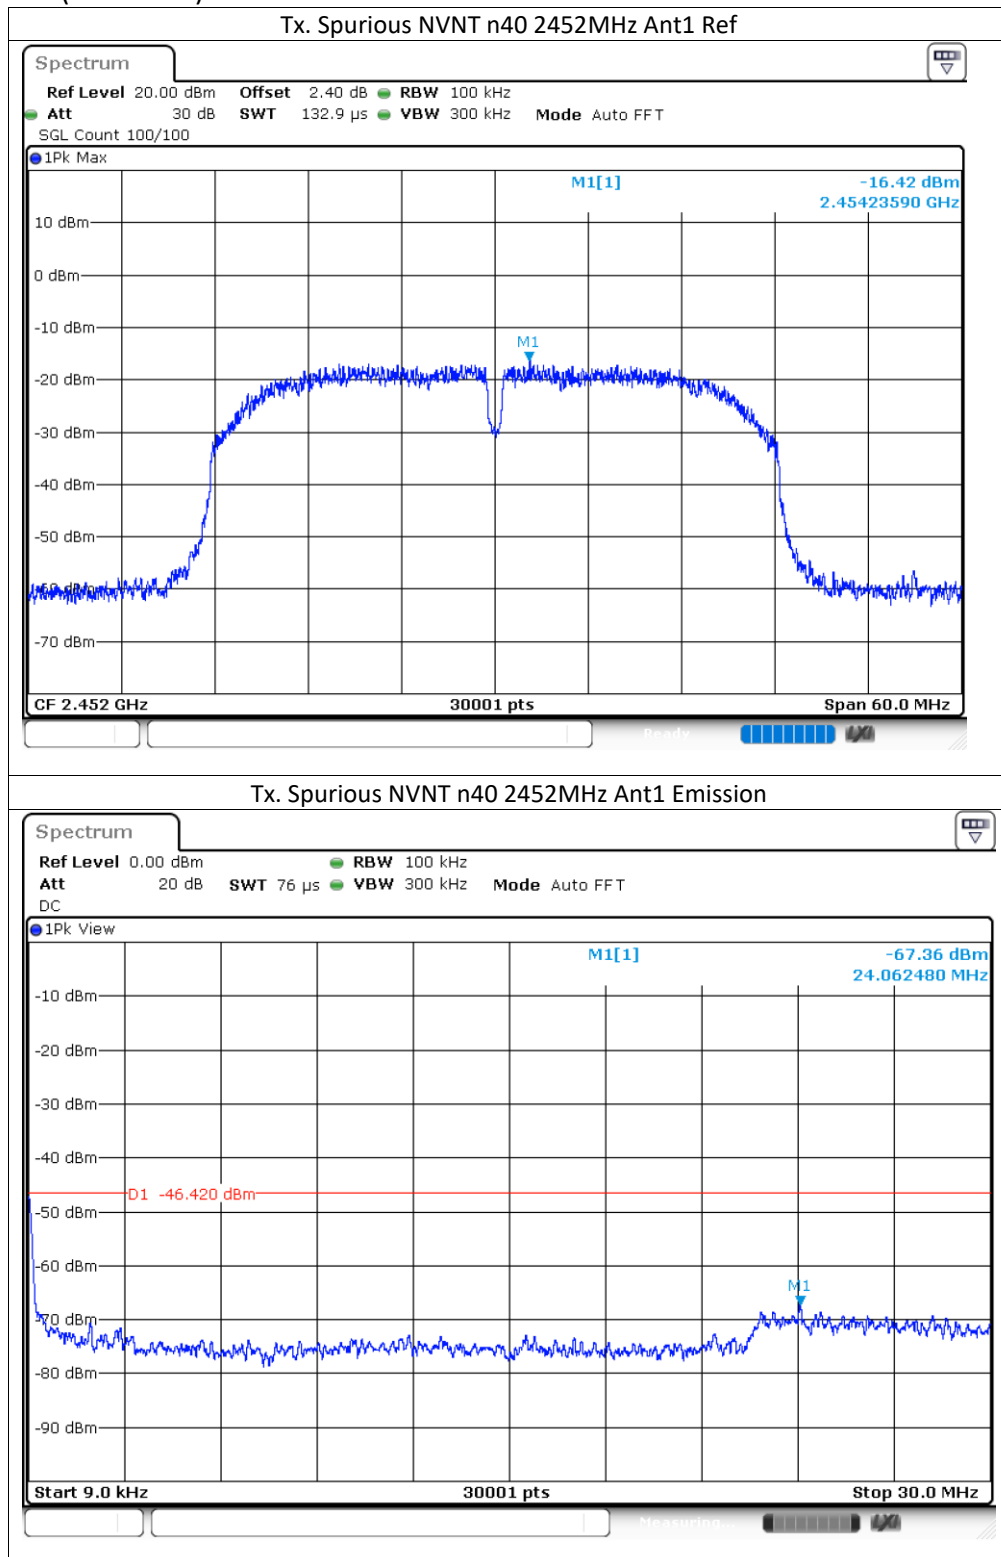


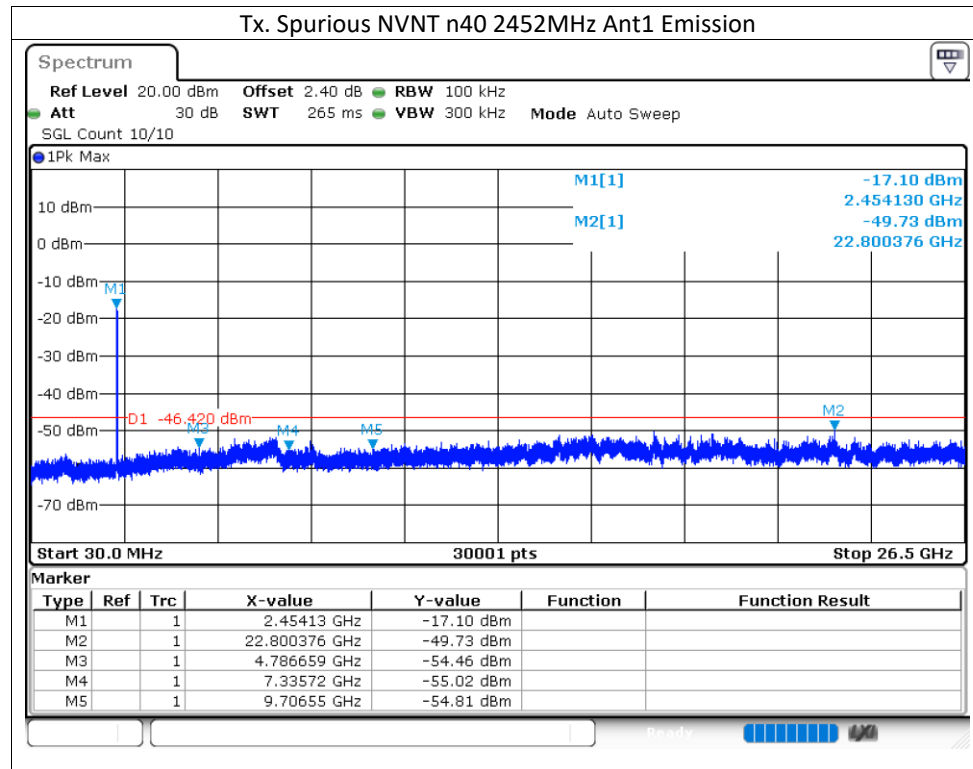


802.11ax-VHT20


Channel 01 (2412MHz)

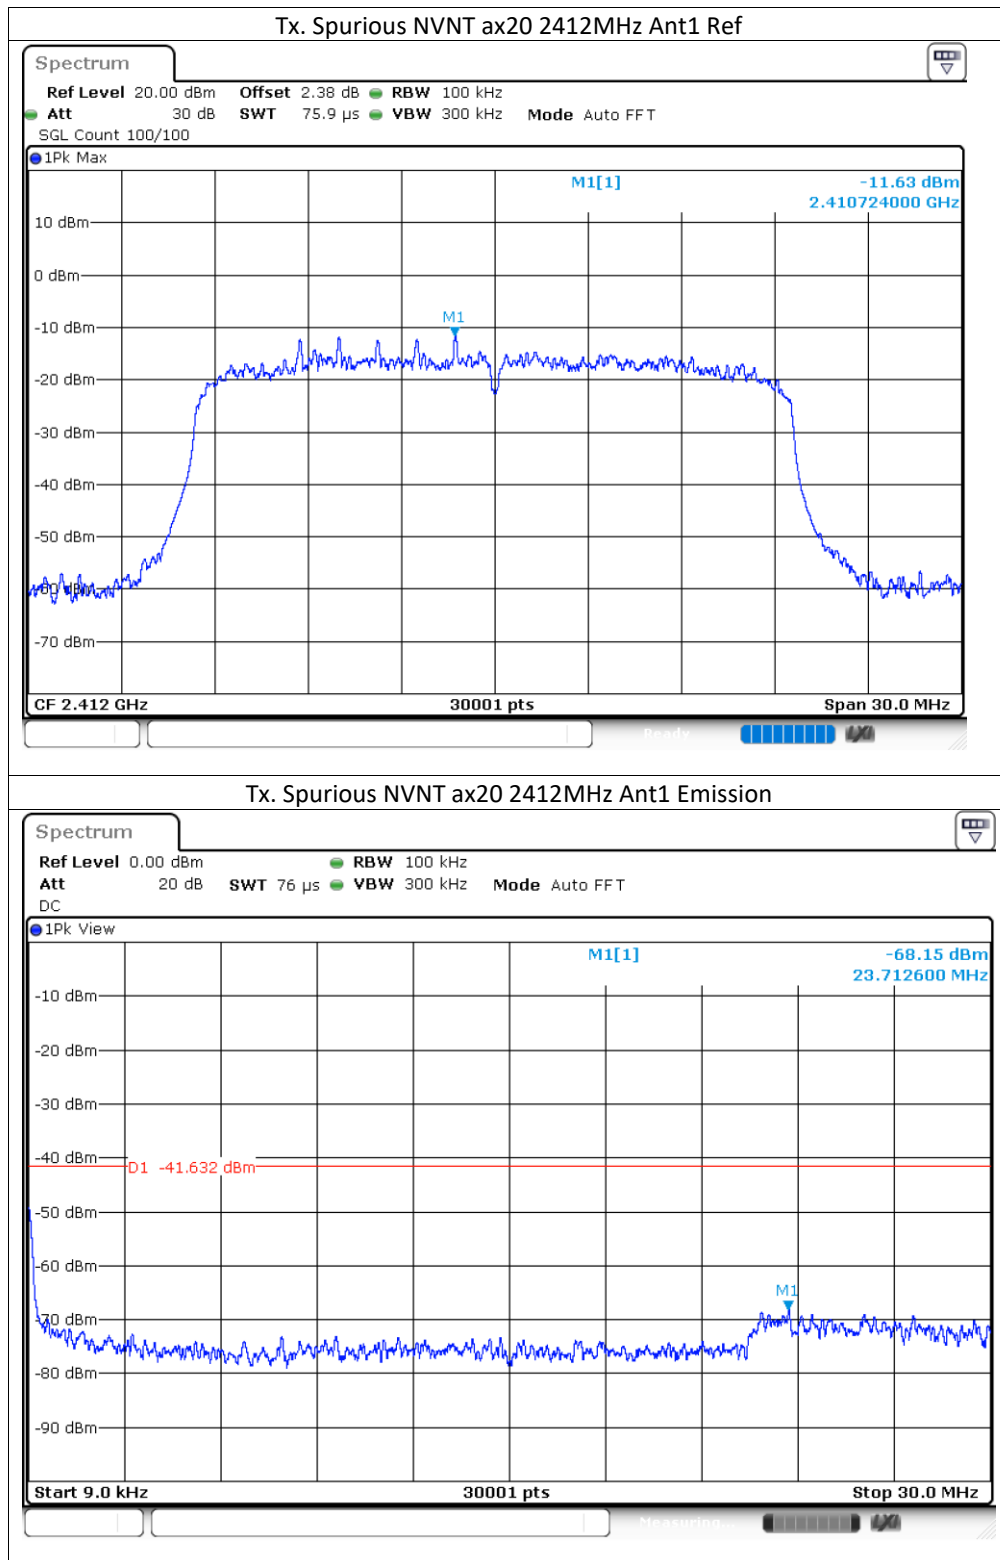

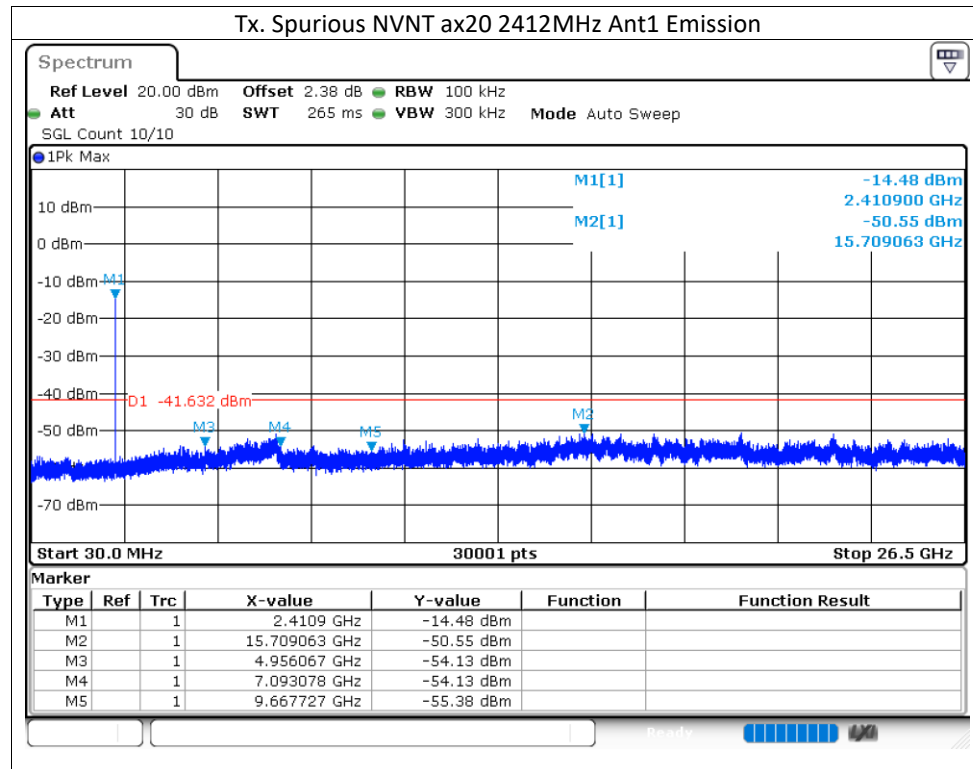

Channel 06 (2437MHz)

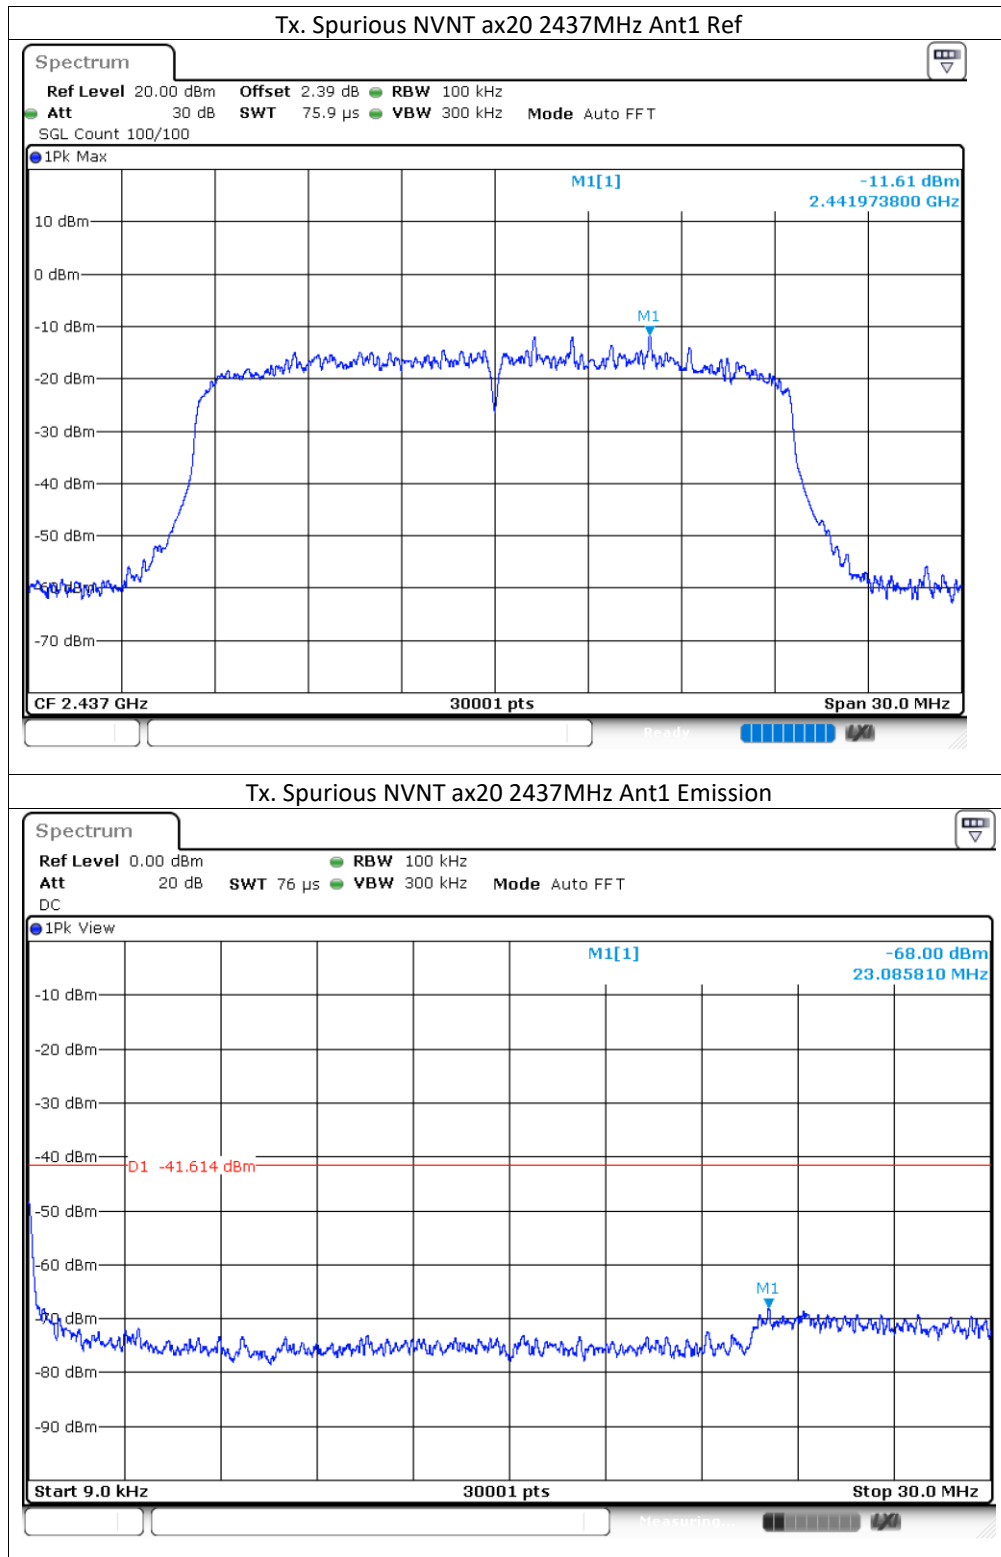

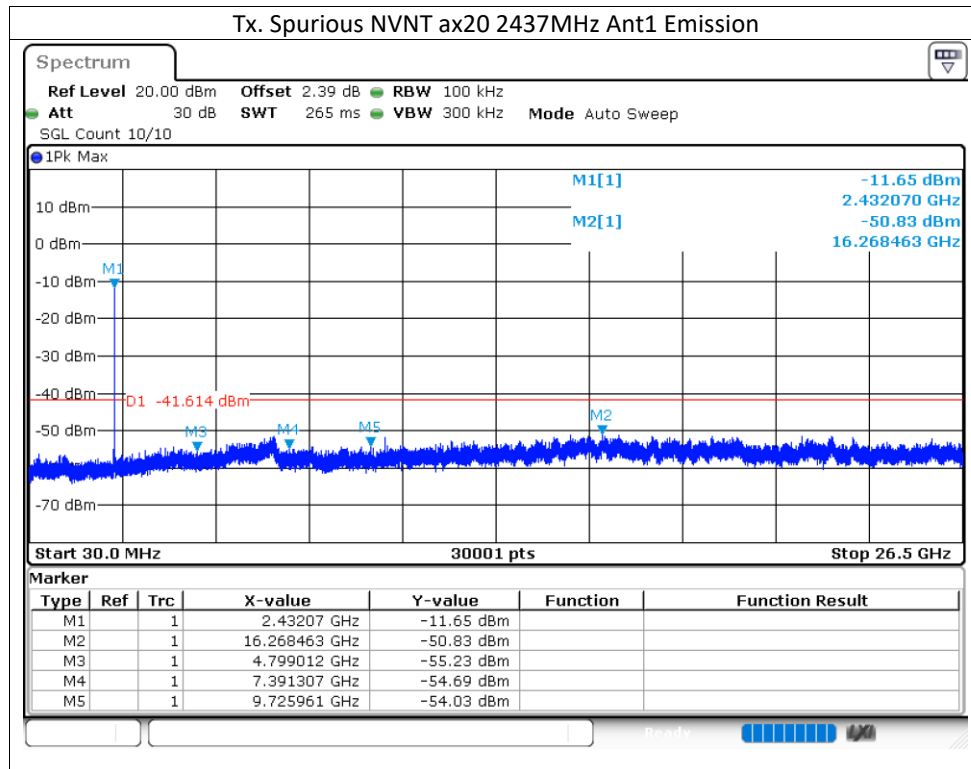

Channel 11 (2462MHz)

