

eyeWAVE™ Wireless PIR Camera

Model: RWX95CM/RWX95CMP

EN

Installation instructions



EN

1 General Description

The eyeWAVE™ Wireless PIR Camera Detector is a battery powered PIR detector that includes an integrated camera for visual verification and is compatible with RISCO security systems.

2 Installation

Step 1: Preliminary Considerations

Select the mounting location for best coverage of the area that is to be protected (see Coverage Patterns).

Step 2: Quick Device Allocation at the Control Panel

The detector is automatically programmed to your control panel during the on-line installation wizard setup. If you later purchase an extra detector you can enroll it as follows:

To quickly allocate the detector at the control panel:

If the control panel is not already in Learn mode, press the  button on the control panel for 5 seconds; the unit beeps once as it enters Learn mode (all the LEDs also light up, one after the other).

Remove the plastic wrapping from the batteries before installation and make sure the cover is removed so the internal tamper switch is accessible.

Send a signal transmission from the detector by pressing the tamper button for at least 2 seconds; the control panel beeps once to accept or beeps three times to reject. Once accepted, the system announces the device type and its zone (for example, "Detector, zone 1").

When the detectors have been enrolled, short-press the control panel button  to exit Learn mode; the unit beeps once and the LEDs stop flashing.

Note: For future use, it is recommended to write down the detector description, zone number, and installation location of each allocated detector.

Step 3: Mounting the Detector

Attach the unit to the surface using the two-sided adhesive tape.

For Pet friendly model:

In order to optimize pet immunity the following guide lines are recommended:

Mount the detector vertically at right angles to the floor.

Make sure an animal cannot get above height of 1.5m (5') by climbing on furniture, shelving or stairs.

3 Replacing the Batteries

Remove the battery's red strip to activate the battery.

CAUTION – Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to local regulations

4 Technical Specifications

Electrical	
Battery Type:	2 x CR 123, 3V Lithium Battery
Battery Life:	2 batteries – 3 year typical lifetime
Current Consumption:	58 µA standby; 200 mA max. peak at capture with flash
Supervision Transmission:	0-255 minutes
RF transmitting frequencies:	915 MHz, 916MHz
Optical	
Filtering:	White Light Protection
Pet friendly:	Up to a 36 kg (80lb) animal (pet model)
Physical	
Size:	132 x 67,5 x 56 mm (5.1 x 2.6 x 2.2 in)
Weight:	169 grams (5.96 oz.)
Environmental	
Operating Temperature:	-10°C a 55°C (14°F a 140°F)
Storage Temperature:	-20°C a 60°C (-4°F a 140°F)
Camera	
Type:	CMOS digital image sensor
Lux:	0 Lux (total darkness)
View Angle:	H 90° V 71°

RISCO Group Limited Warranty

RISCO Group and its subsidiaries and affiliates ("Seller") warrants its products to be free from defects in materials and workmanship under normal use for 24 months from the date of production. Because Seller does not install or connect the product and because the product may be used in conjunction with products not manufactured by the Seller, Seller can not guarantee the performance of the security system which uses this product. Sellers obligation and liability under this warranty is expressly limited to repairing and replacing, at Sellers option, within a reasonable time after the date of delivery, any product not meeting the specifications. Seller makes no other warranty, expressed or implied, and makes no warranty of merchantability or of fitness for any particular purpose. In no case shall seller be liable for any consequential or incidental damages for breach of this or any other warranty, expressed or implied, or upon any other basis of liability whatsoever. Sellers obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect, or not be compromised or circumvented; that the product will prevent any persons; injury or property loss by intruder, robbery, fire or otherwise; or that the product will in all cases provide adequate warning or protection. Buyer understands that a properly installed and maintained alarm may only reduce the risk of intruder, robbery or fire without warning, but is not insurance or a guaranty that such will not occur or that there will be no personal injury or property loss as a result. Consequently seller shall have no liability for any personal injury, property damage or loss based on a claim that the product fails to give warning. However, if seller is held liable, whether directly or indirectly, for any loss or damage arising from under this limited warranty or otherwise, regardless of cause or origin, sellers maximum liability shall not exceed the purchase price of the product, which shall be complete and exclusive remedy against seller. No employee or representative of Seller is authorized to change this warranty in any way or grant any other warranty.

WARNING: This product should be tested at least once a week.

CAUTION: Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to local regulations.

FCC ID: JE4RWX95CM915

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this equipment which are not expressly approved by the party responsible for compliance (RISCO Group's.) could void the user's authority to operate the equipment.

FCC Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.


These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- ♦ Reorient or relocate the receiving antenna.
- ♦ Increase the separation between the equipment and the receiver.
- ♦ Connect the equipment into an outlet on a different circuit from that to which the receiver is connected.
- ♦ Consult the dealer or an experienced radio/TV technician for help.

Preliminary Considerations

Do not install outside	Do not install near windows	Do not install near vents (air, heat, or AC)	Do not install near ceiling fans	Do not install in extreme temperatures	Do not install in direct sunlight	Ok for sites with small pets

PIR Coverage Patterns

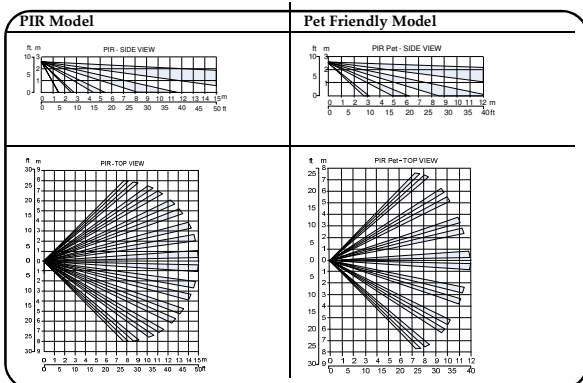

Camera FOV

