

Trimble® SNR900 Radio-Modem

Operation Manual



**Part Number 52357-00-ENG
Revision B
December 2004**

Contact Information

Trimble Geomatics and Engineering Division
5475 Kellenburger Road
Dayton, Ohio 45424-1099
U.S.A.

800-538-7800 (toll free in USA)
+1-937-233-8921 Phone
+1-937-233-9004 Fax
www.trimble.com

Copyright and Trademarks

© 2001–2004, Caterpillar Trimble Control Technologies LLC. All rights reserved.

Trimble, the Globe & Triangle logo, BladePro, and SiteVision are trademarks of Trimble Navigation Limited, registered in the United States Patent and Trademark Office and other countries.

CMR+, MS750, MS860, SiteNet, and TRIMCOMM are trademarks of Trimble Navigation Limited.

Microsoft, Windows, and Windows NT are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

All other trademarks are the property of their respective owners.

Release Notice

This is the December 2004 release (Revision B) of the *SNR900 Operation Manual*, part number 52357-00-ENG. It applies to version 1.0 of the SNR900 radio-modem.

Hardware Limited Warranty

Trimble Navigation Limited warrants that this hardware product (the "Product") will perform substantially in accordance with published specifications and be substantially free of defects in material and workmanship for a period of one (1) year starting from the date of delivery. The warranty set forth in this paragraph shall not apply to software products.

Software License, Limited Warranty

This Trimble software product, whether provided as a stand-alone computer software product, built into hardware circuitry as firmware, embedded in flash memory, or stored on magnetic or other media, (the "Software") is licensed and not sold, and its use is governed by the terms of the relevant End User License Agreement ("EULA") included with the Software. In the absence of a separate EULA included with the Software providing different limited warranty terms, exclusions and limitations, the following terms and conditions shall apply. Trimble warrants that this Trimble Software product will substantially conform to Trimble's applicable published specifications for the Software for a period of one (1) year, starting from the date of delivery.

Warranty Remedies

Trimble's sole liability and your exclusive remedy under the warranties set forth above shall be, at Trimble's option, to repair or replace any Product or Software that fails to conform to such warranty ("Nonconforming Product") or refund the purchase price paid by you for any such Nonconforming Product, upon your return of any Nonconforming Product to Trimble in accordance with Trimble's standard return material authorization procedures.

Warranty Exclusions and Disclaimer

These warranties shall be applied only in the event and to the extent that (i) the Products and Software are properly and correctly installed, configured, interfaced, maintained, stored, and operated in accordance with Trimble's relevant operator's manual and specifications, and; (ii) the Products and Software are not modified or misused. The preceding warranties shall not apply to, and Trimble shall not be responsible for defects or performance problems resulting from (i) the combination or utilization of the Product or Software with hardware or software products, information, data, systems, interfaces or devices not made, supplied or specified by Trimble; (ii) the operation of the Product or Software under any specification other than, or in addition to, Trimble's standard specifications for its products; (iii) the unauthorized, installation, modification, or use of the Product or Software; (iv) damage caused by accident, lightning or other electrical discharge, fresh or salt water immersion or spray; or (v) normal wear and tear on consumable parts (e.g., batteries). Trimble does not warrant or guarantee the results obtained through the use of the Product.

THE WARRANTIES ABOVE STATE TRIMBLE'S ENTIRE LIABILITY, AND YOUR EXCLUSIVE REMEDIES, RELATING TO PERFORMANCE OF THE PRODUCTS AND SOFTWARE, EXCEPT AS OTHERWISE EXPRESSLY PROVIDED HEREIN, THE PRODUCTS, SOFTWARE, AND ACCOMPANYING DOCUMENTATION AND MATERIALS ARE PROVIDED "AS-IS" AND WITHOUT EXPRESS OR IMPLIED WARRANTY OF ANY

KIND BY EITHER TRIMBLE NAVIGATION LIMITED OR ANYONE WHO HAS BEEN INVOLVED IN ITS CREATION, PRODUCTION, INSTALLATION, OR DISTRIBUTION INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NONINFRINGEMENT. THE STATED EXPRESS WARRANTIES ARE IN LIEU OF ALL OBLIGATIONS OR LIABILITIES ON THE PART OF TRIMBLE ARISING OUT OF, OR IN CONNECTION WITH, ANY PRODUCTS OR SOFTWARE. SOME STATES AND JURISDICTIONS DO NOT ALLOW LIMITATIONS ON DURATION OR THE EXCLUSION OF AN IMPLIED WARRANTY, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

TRIMBLE NAVIGATION LIMITED IS NOT RESPONSIBLE FOR THE OPERATION OR FAILURE OF OPERATION OF GPS SATELLITES OR THE AVAILABILITY OF GPS SATELLITE SIGNALS.

Limitation of Liability

TRIMBLE'S ENTIRE LIABILITY UNDER ANY PROVISION HEREIN SHALL BE LIMITED TO THE AMOUNT PAID BY YOU FOR THE PRODUCT OR SOFTWARE LICENSE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL TRIMBLE OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES WHATSOEVER UNDER ANY CIRCUMSTANCE OR LEGAL THEORY RELATING IN ANY WAY TO THE PRODUCTS, SOFTWARE AND ACCOMPANYING DOCUMENTATION AND MATERIALS, (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS), REGARDLESS WHETHER TRIMBLE HAS BEEN ADVISED OF THE POSSIBILITY OF ANY SUCH LOSS AND REGARDLESS OF THE COURSE OF DEALING WHICH DEVELOPS OR HAS DEVELOPED BETWEEN YOU AND TRIMBLE. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

NOTE: THE ABOVE LIMITED WARRANTY PROVISIONS MAY NOT APPLY TO PRODUCTS OR SOFTWARE PURCHASED IN THE EUROPEAN UNION. PLEASE CONTACT YOUR TRIMBLE DEALER FOR APPLICABLE WARRANTY INFORMATION.

Notices

Class B Statement – Notice to Users. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes and modifications not expressly approved by the manufacturer or registrant of this equipment can void your authority to operate this equipment under Federal Communications Commission rules.

The SNR900 operates in the 902 to 928 MHz frequency band. It is certified for unlicensed use in this band as a transmitter pursuant to 47 C.F.R. §§ 15.247, 15.249 (1993) (unlicensed, low-power devices) Subpart C of Part 15 of FCC Rules regarding Spread Spectrum Systems for the United States. License-free operation in Canada is covered by RSS-210 of Industrie Canada.

Contents

1 Introduction

Welcome	2
Related Information	2
Technical Assistance	3
Your Comments	3

2 Getting Started

Introduction	6
Hardware Specification	6
SNR900 Description	7
Features.	7
Frequency Band	8

3 Configuring the SNR900

Introduction	10
Default Settings	10
WinFlash Configuration Software	10
Connecting to the SNR900.	11
Configuring the SNR900.	11
Network	14
Mode	14
Serial Port Baud Rate and Parity.	14
Defaults.	15
Diagnostics and Firmware Upgrade	15

4 Installing the SNR900 Network

 Introduction 18

 Physical Description 18

 Connectors and Indicators 18

 Mounting the SNR900 on a Machine 20

 Machine Mount Kit (PN 35087-00) 21

 Cabling Configurations 24

 Power and I/O Cable for Machine Installations 24

 Infrastructure/Base Station Power and I/O Cable 26

 Machine Service Cable. 30

 Antenna Description 31

 Antenna Considerations 32

A Technical Specifications

 Technical Information. 34

 Pinout Information 36

Index

Introduction

In this chapter:

- Welcome
- Related Information
- Technical Assistance
- Your Comments

Welcome

This manual describes how to set up and use the SNR900 radio-modem.

This publication assumes that you know how to use the Microsoft® Windows® operating system.

Related Information

Sources of related information include the following:

- Readme.txt file – a Readme.txt file contains information added after the documentation was completed. To read this file, double-click it or use a text editor to open it. The installation program also copies it into the program directory.
- Release notes – the release notes describe new features of the product, information not included in the manuals, and any changes to the manuals. They are provided as a .pdf file on the CD and are installed in the program directory (typically C:\Program Files\Trimble\<Folder>) when you install the software.
- Update notes – there is a warranty activation sheet with this product. Send it in to automatically receive update notes containing important information about software and hardware changes. Contact your local Trimble dealer for more information about the support agreement contracts for software and firmware, and an extended warranty program for hardware.
- Trimble training courses – Consider a training course to help you use your GPS system to its fullest potential. For more information, go to the Trimble website at www.trimble.com/training.html.

Technical Assistance

If you have a problem and cannot find the information you need in the product documentation, *contact your local dealer*. Alternatively, do one of the following actions:

- Request technical support using the Trimble website at www.trimble.com/support.html
- Send an e-mail to trimble_support@trimble.com

Your Comments

Your feedback about the supporting documentation helps us to improve it with each revision. E-mail your comments to ReaderFeedback@trimble.com.

Getting Started

In this chapter:

- Introduction
- Hardware Specification
- SNR900 Description

Introduction

The SNR900 radio-modem broadcasts raw GPS data in Compact Measurement Record (CMR) format from a reference receiver to one or more roving receivers for precise machine positioning.

The SNR900 is compatible with the Trimble SiteNet™ 900 and TRIMCOMM™ 900 radio for broadcasting and receiving Radio Technical Commission for Maritime Services (RTCM) or CMR data.

Trimble recommends that you use the Trimble CMR+™ format whenever possible. This requires version 1.40 or later software in all of your radios.

Hardware Specification

The SNR900 meets stringent hardware requirements and is designed to survive in harsh environments. It has the following features:

- Integrated low-profile antenna for machine installations.
- Physical connection by means of the same 8-pin male Bendix connector previously used on SiteNet 900 and TRIMCOMM radios. For a description of the connector pinout, see Pinout Information, page 36.

In addition, SNR900 is designed for use with unconditioned 10 VDC to 32 VDC power.

SNR900 Description

The SNR900 is a frequency-hopping, spread-spectrum radio unit and data modem packaged in a rugged, waterproof, metal case and is designed to withstand severe environmental stress.

Features

- Low latency CMR transmission
- Compatible with SiteNet and TRIMCOMM radio networks
- Upgradeable software
- Forty selectable networks
- License-free operation in the U.S., Canada, Australia, and New Zealand
- Ruggedized, weatherproof casing
- Typical 3–5 km range
- Low power consumption
- One CAN (J1939) port
- Two RS-232 interfaces at either 9600, 38400, or 57600 baud
- Low-profile antenna for machine applications
- Machine mounting kit option (for more information, see Mounting the SNR900 on a Machine, page 20)

Frequency Band

The SNR900 operates in the 902 to 928 MHz frequency band. It is certified for unlicensed use in this band as a transmitter pursuant to 47 C.F.R. §§ 15.247, 15.249 (1993) (unlicensed, low-power devices) Subpart C of Part 15 of FCC Rules regarding Spread Spectrum Systems for the United States. License-free operation in Canada is covered by RSS-210 of Industrie Canada.

The SNR900 can be purchased with a reduced frequency range for use in Australia and New Zealand. It is available in single-frequency mode for other countries.

***Note** – The 902–928 MHz band is a shared-use band and as such is subject to interfering signals.*

This frequency band is allocated to other uses in other parts of the world, including cellular telephony. Regulations regarding its use vary greatly from country to country. Use of the SNR900 outside the United States must be approved by the local radio authority. Contact your local radio communications governing authority for regulations and restrictions on operation in the country or area where you want to use the SNR900.

Configuring the SNR900

In this chapter:

- Introduction
- Default Settings
- WinFlash Configuration Software
- Diagnostics and Firmware Upgrade

Introduction

The SNR900 is a data modem and a radio in one unit. Two units can provide a radio data link between Trimble GPS receivers.

Default Settings

The SNR900 serial ports are initially configured with the following settings:

- 38400 baud
- 8 data bits, no parity
- 1 stop bit

The SNR900 is also initially configured as a rover; its network setting is Network 1.

When the SNR900 powers up, it retrieves its default settings from its nonvolatile memory. The default settings can be changed whenever necessary.

WinFlash Configuration Software

The Trimble WinFlash software is a Microsoft Windows-based application that configures the SNR900 for use in a network. Use WinFlash to configure all SNR900 radios required for a project.

***Note** – The Trimble CommSet software is required to configure Trimble SiteNet 900 radios.*

To configure a SNR900 using WinFlash, complete the following procedures:

1. Connect the office computer to the SNR900.
2. Configure the SNR900 using WinFlash.

These procedures are discussed in the following sections.

Connecting to the SNR900


1. Connect a SNR900 machine service cable to the SNR900.
2. Connect the I/O DB-9 connector of the service cable to a serial port on your office computer.

***Note** – Figure 4.7 on page 27 shows an infrastructure cable (PN 38968-25) connected to the SNR900. Figure 4.10 on page 30 shows the service cable (PN 40942-xx) connected to the SNR900 and an office computer.*

3. Provide power to the radio through the power lead of the service cable.


Configuring the SNR900

1. Start WinFlash on your office computer. The following dialog appears:

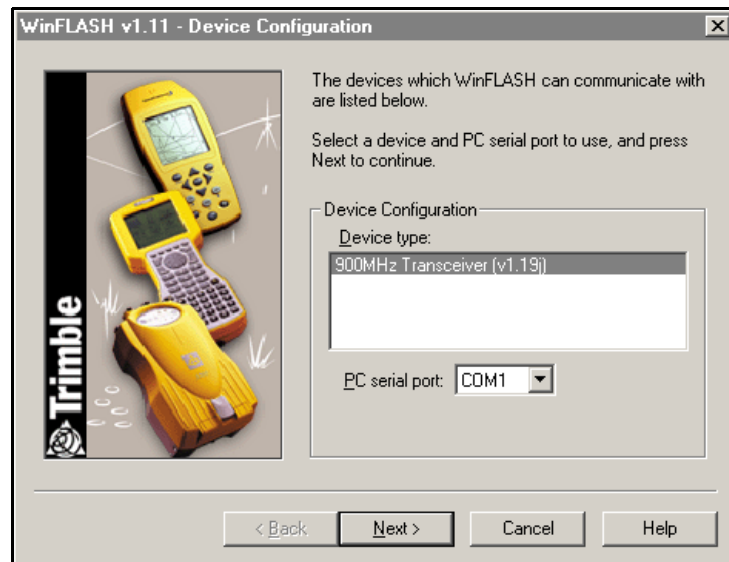


2. Select the appropriate *Device type* option and *PC serial port* option and click **Next**.


The following dialog appears:

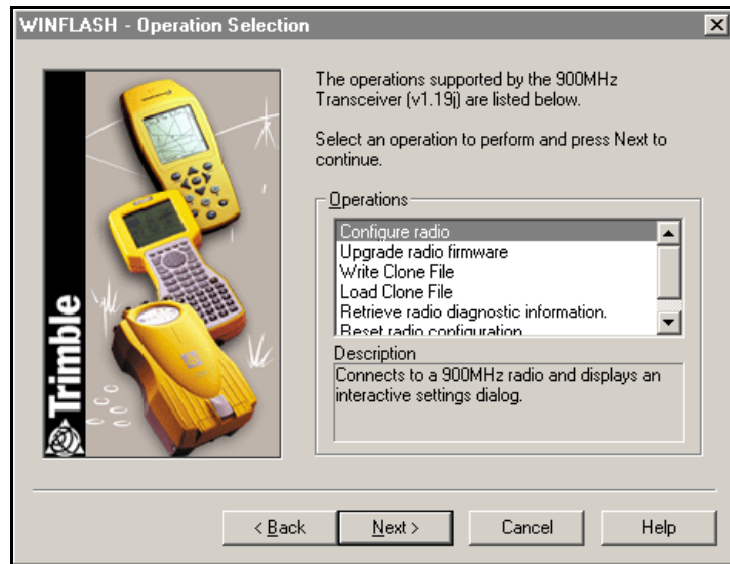

3. Select the *Configure radio* option in the *Operations* group and click **Next**.
4. Click **Finish** on the next screen to establish a connection with the radio. The following dialog appears while WinFlash is connecting to the radio:

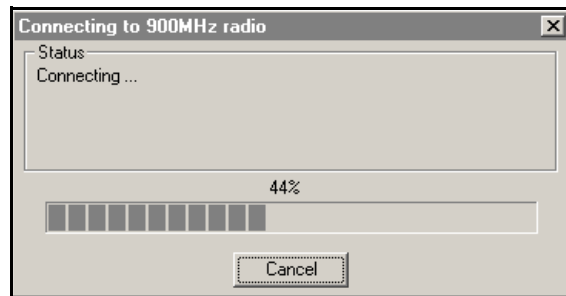

5. When WinFlash has successfully connected to the radio, the *Properties* window appears:

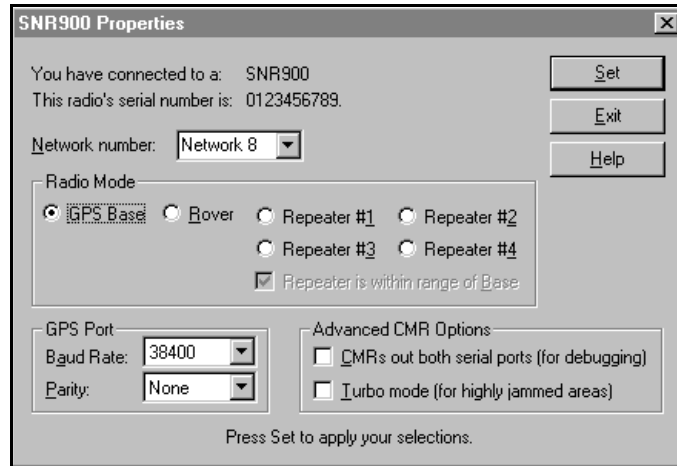

6. From the *Properties* window, configure the *Network number*, *Radio Mode*, and *Port settings*. Once these settings are correct, click **Set** to send the settings to the radio. The following dialog appears:



7. To finish, click **Exit**. To make further changes, click **Menu**. The *Operation Selection* dialog shown in Step 2 on page 11 appears.

The following sections describe the settings that are available for the SNR900.

Network

To change which GPS base station a SNR900 listens to, set the Network number. The SNR900 offers 40 different Network numbers.

Note – *If you only have one GPS base station on your site, set all your radios to the same Network number. If you have more than one GPS base station on your site, each GPS base station must be on a separate radio network. Select a different Network number for each radio network.*

When you initially set up a radio network for your site, configure a rover to the Network number you require and listen to see if anyone is currently using this network in your area. If the rover sync light glows, you must select a different Network number for your site. This will avoid interfering with the other network user.

Mode

Each radio in a SNR900 network can be set to one of three operational modes:

- GPS Base – when it is connected to the base station GPS receiver that is generating CMR corrections
- Rover – when it is mounted on a machine that is connected to a receiver required to generate RTK positions
- Repeater – when it is used in a network to increase coverage

Note – *A network can have many rovers but only one base radio. It can also have up to four repeaters, each uniquely identified by a different repeater number (#1, #2, #3, and #4). Repeater can be chained two in a row.*

Serial Port Baud Rate and Parity

The serial port baud rate list and the serial port parity setting list configure the baud rate and parity of the radio port that is connected to the GPS receiver. Set the baud rate to 38400 and the parity to None.

Defaults

Table 3.1 shows the default factory settings for the SNR900.

Table 3.1 SNR900 default settings

Item	Default setting
Network number	Network 1
Radio mode	Rover
Baud rate	38400
Parity	None

Diagnostics and Firmware Upgrade

Use WinFlash to download a diagnostics file from the SNR900 to an office computer or to upgrade the radio firmware. These options are available in the *WinFlash Operation Selection* window.

For firmware upgrades, contact your Trimble dealer. The dealer will supply a new software file to perform the upgrade.

Installing the SNR900 Network

In this chapter:

- Introduction
- Physical Description
- Mounting the SNR900 on a Machine
- Cabling Configurations
- Antenna Description

Introduction

Trimble recommends that you read this chapter before installing your SNR900 radios.

Physical Description

The SNR900 radio-modem is encased in a rugged, waterproof metal case. It has an antenna mount on the top cap, and a connector and LED on the bottom cap. The physical aspects of SNR900 hardware are outlined below, followed by details covering interface connections and antenna installations.

Connectors and Indicators

The SNR900 bottom cap is fitted with an 8-pin male Bendix connector and an LED indicator light. See Figure 4.1.

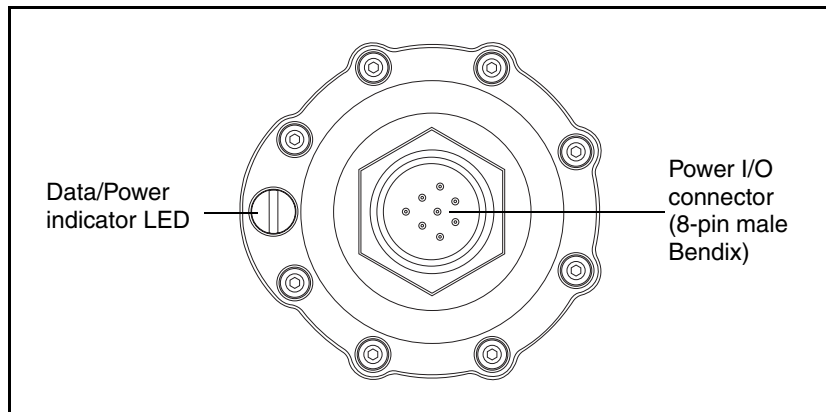


Figure 4.1 SNR900 bottom cap

The LED can be orange and/or green depending on the situation, as shown in Table 4.1.

Table 4.1 Operational status

LED Color	Status
Orange (solid)	Power is available.
Orange and green (both solid)	With the SNR900 configured as a base radio (that is, a source of GPS), power is available. The base is always considered to be synchronized. “Synchronized” means that the radio can receive and transmit data. With the SNR900 configured as a repeater or rover, power is available and the radio is synchronized. Even if the radio is synchronized, the radio may not be receiving data.
Orange and green (both flashing at 1 Hz together)	Radio is in flashloader mode. To resolve this, turn the power off and on. If this mode repeats when the radio is turned back on, reload the firmware.

Note – The top cap of the SNR900 has an antenna contact tip. The tip is designed for maximum efficiency and very low loss. Please take care not to damage this tip. Keep the low-profile antenna or flexible antenna base screwed on to the top of the radio when storing the SNR900, see page 32.

Figure 4.2 shows the top cap.

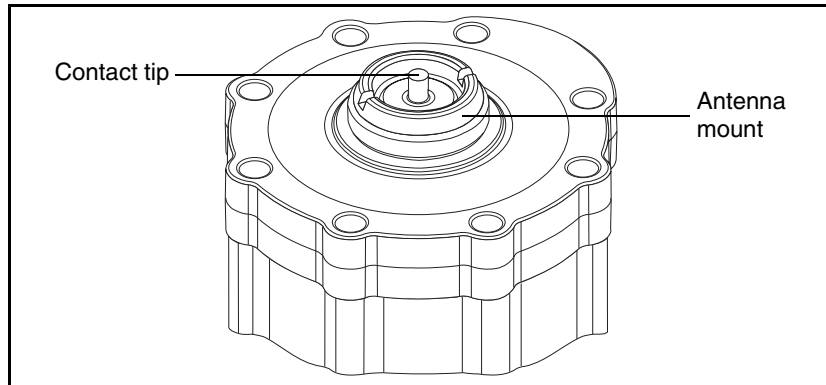


Figure 4.2 SNR900 top cap

Mounting the SNR900 on a Machine

When mounting the SNR900 on a machine consider the following:

- Reduce damage by minimizing shock and vibration to the SNR900: Mount the radio-modem on a solid part of the cab.
- Locate the best antenna position: Mount the entire antenna above the roofline so that it has an uninterrupted view. This improves the performance of the SNR900.
- Prevent signal interference: Position the antenna away from other antennas (particularly if the other antenna is a two-way radio), rotating beacons and strobe lights.

Figure 4.4 shows a typical installation.

Machine Mount Kit (PN 35087-00)

The machine mounting kit for the SNR900 comprises:

- Radio mount bracket (upper)
- Radio mount bracket (lower)
- Machine mount adapter plate (with U-bolts)
- Rubber shock mount kit

Figure 4.3 shows the SNR900 mounting kit and how the parts fit together.

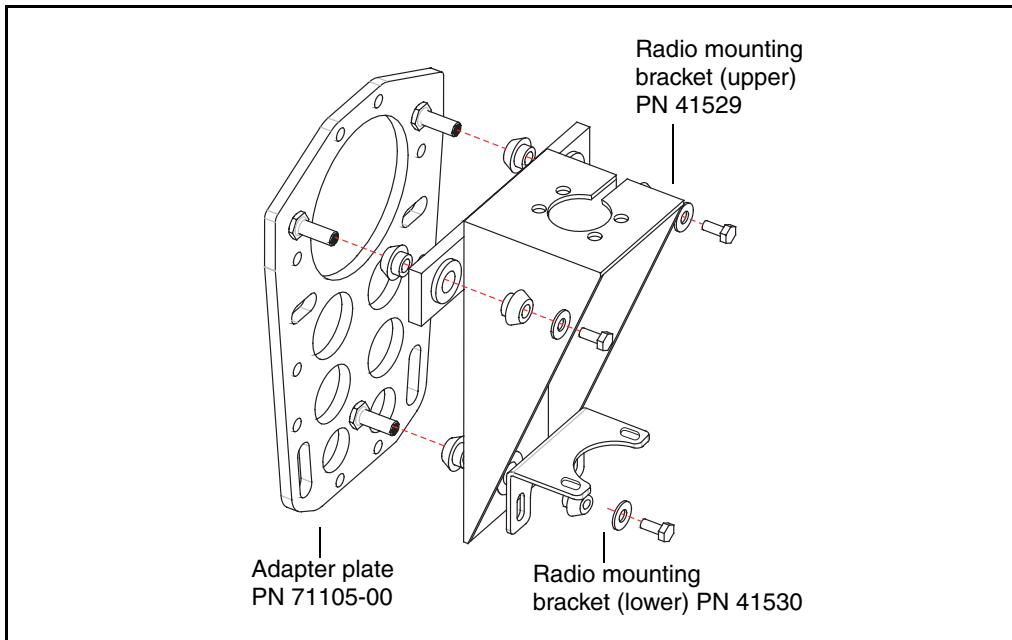


Figure 4.3 SNR900 mounting kit

Mounting the SNR900

To mount the SNR900 onto a machine:

1. Bolt the SNR900 into the radio mounting bracket (upper and lower brackets).

Ensure that the radio mounting screws are all fitted with washers and lock washers.
2. Securely mount the adapter plate to the machine. Do one of the following actions:
 - Use existing weld bosses (see Figure 4.4)
 - Weld some weld bosses to the cab
 - Clamp the plate to the top of a handrail at the top of the cab using the U-bolts
3. Bolt the radio mounting bracket to the adapter plate using the rubber shock mount kit. The bolts are included with the adapter plate.



Tip – Use threadlocking Loctite (PN 33803) or equivalent to secure the bolts when you assemble the shock mounts.

Figure 4.4 shows a SNR900 mounted at the rear of a cab roof. Notice how this installation ensures that all of the antenna is above the roof of the cab.



Figure 4.4 SNR900 mounted at the rear of a cab roof

Cabling Configurations

The SNR900 is typically configured as a rover, but the cables and adapters necessary for other configurations are also available. Table 4.2 summarizes the cabling items available or provided with the SNR900 unit or available accessories.

Table 4.2 SNR900 cabling and power accessories

Item	Part number
Power and I/O cable for machine installations, 5 m (17 ft) 8-pin female Bendix connector on each end	32942-17
Infrastructure/Base Station power and I/O cable, 7.5 m (25 ft) 8-pin female Bendix, with Y-split to TA-3 power connector, DBF-9, plus 12-pin Conxall	38968-25
Machine service cable (21-pin female Bendix, with Y-split to bare power leads and dual DBF-9 connector	36938
DC power adapter cable with TA-3 connector and battery clips	44087-00
Reference Station/Configuration cable, 30 m (99 ft)	40942-99

Power and I/O Cable for Machine Installations

The cable shown in Figure 4.5 connects the SNR900 to either the Trimble MS850 or the Trimble MS860™ GPS receiver on the machine. The GPS receiver outputs power to the SNR900 through this cable.

The straight connector attaches to the bottom cap of the SNR900, and the angled connector attaches to the 8-pin Bendix connector of the GPS receiver.

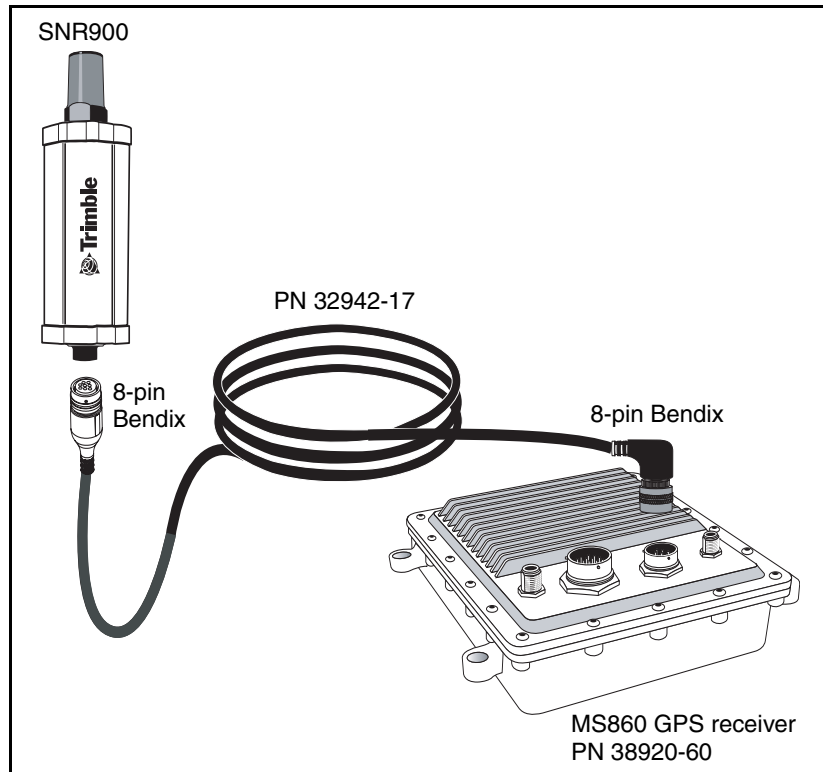


Figure 4.5 Power and I/O cable (PN 32942-17)

Infrastructure/Base Station Power and I/O Cable

The cable shown in Figure 4.6 is used for base station and repeater installations of SNR900s. Cables come in the lengths shown in Table 4.3.

Table 4.3 Available cable lengths

Part number	Cable length
38968-25	7.5 m (25 ft)
40942-03	1 m (3 ft)
40942-40	12 m (40 ft)
40942-99	30 m (99 ft)

Note – Most installations of infrastructure radios require either a 7.5 m (25 ft) or a 30 m (99 ft) length.

Seal unused connectors by covering them with plastic tape.

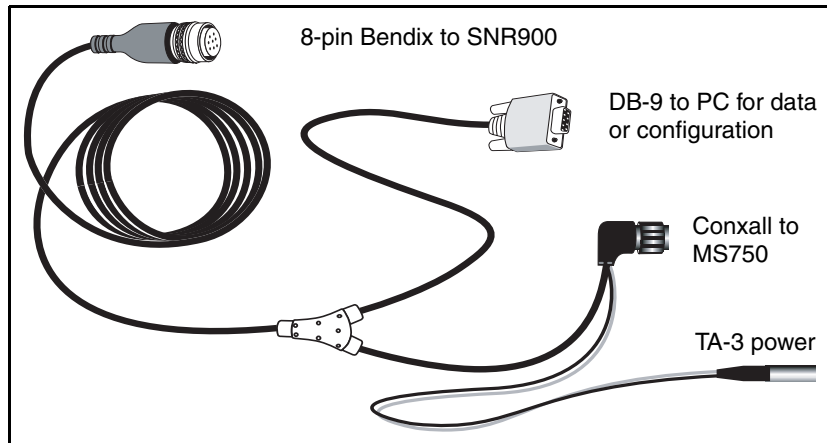


Figure 4.6 Radio power and I/O cable (PN 38968-25)

The 7.5 m (25 ft) infrastructure cable (PN 38968-25) connects directly to the SNR900. The 12-pin Conxall connector connects directly to the Trimble MS750™ GPS receiver with a split to power via a TA-3 connector. This cable also splits to a DBF-9, which can be used to configure the SNR900.

When you install this cable with a MS750 base station, the complete cabling configuration looks similar to that shown in Figure 4.7.

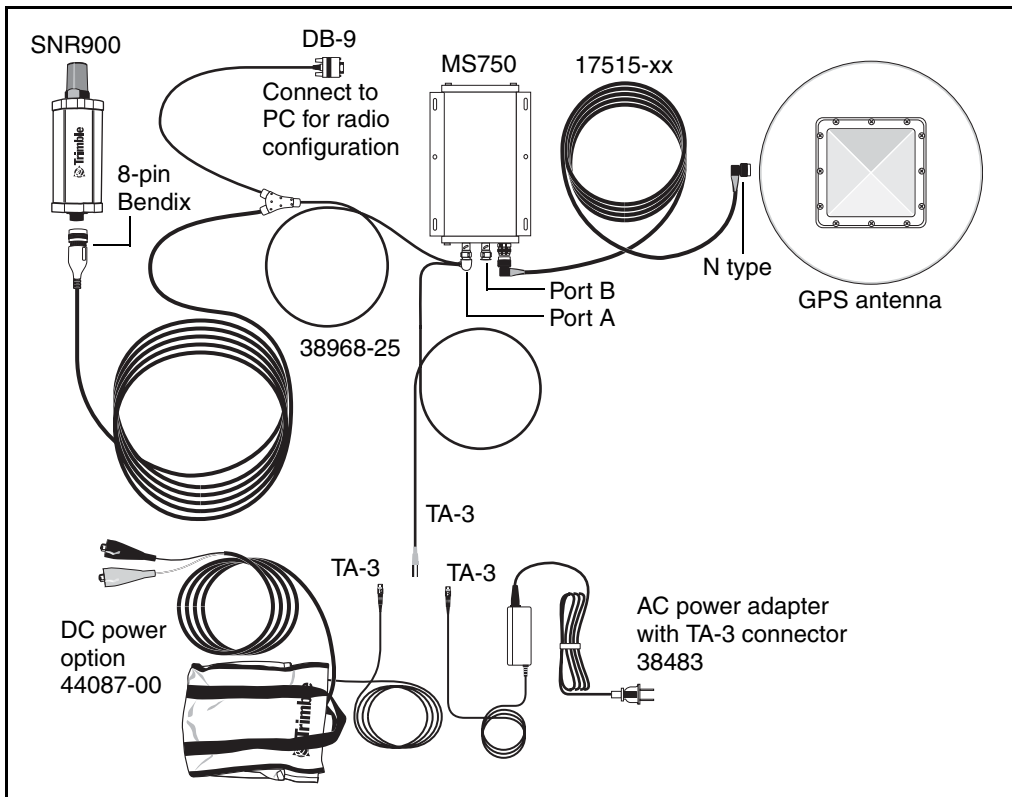


Figure 4.7 MS750 base station using cable PN 38968-25

The 30 m (99 ft) infrastructure cable (PN 40942-99) connects directly to the SNR900 and splits out to power via a TA-3 connector and communications via dual female DB-9 connectors.

The DB-9 connectors can connect to a GPS receiver and to a PC at the same time. This is particularly useful for troubleshooting. This cable requires its own power for the radio. It has no Conxall connector for the MS750 GPS receiver. You can connect it to the MS750 with the hammerhead connector B1/B2 cable PN 37382 that comes with the base (reference) station kit. The cable has a TA-3 connector for power to the radio only. The MS750 must be powered separately with the cables provided in the base station. See Figure 4.8.

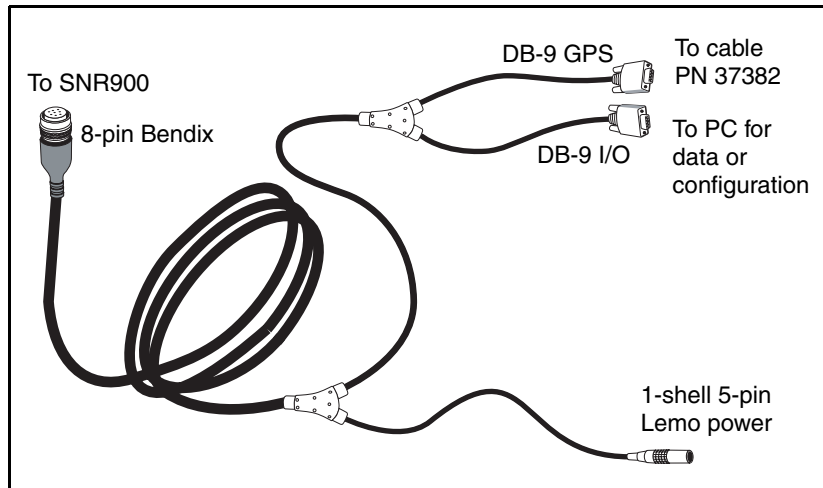


Figure 4.8 Service cable assembly (PN 40942-03, -40, -99)

The 1 m (3 ft) cable (PN 40942-03) is designed for use with a survey backpack.

When you install cable 40942-xx with a MS750 base station, the complete cabling configuration looks similar to that shown in Figure 4.9.

Note – The 40942-99 cable is the 99 ft base station cable for the SNR900 radio. To fit the SNB900 radio, you need an adapter.

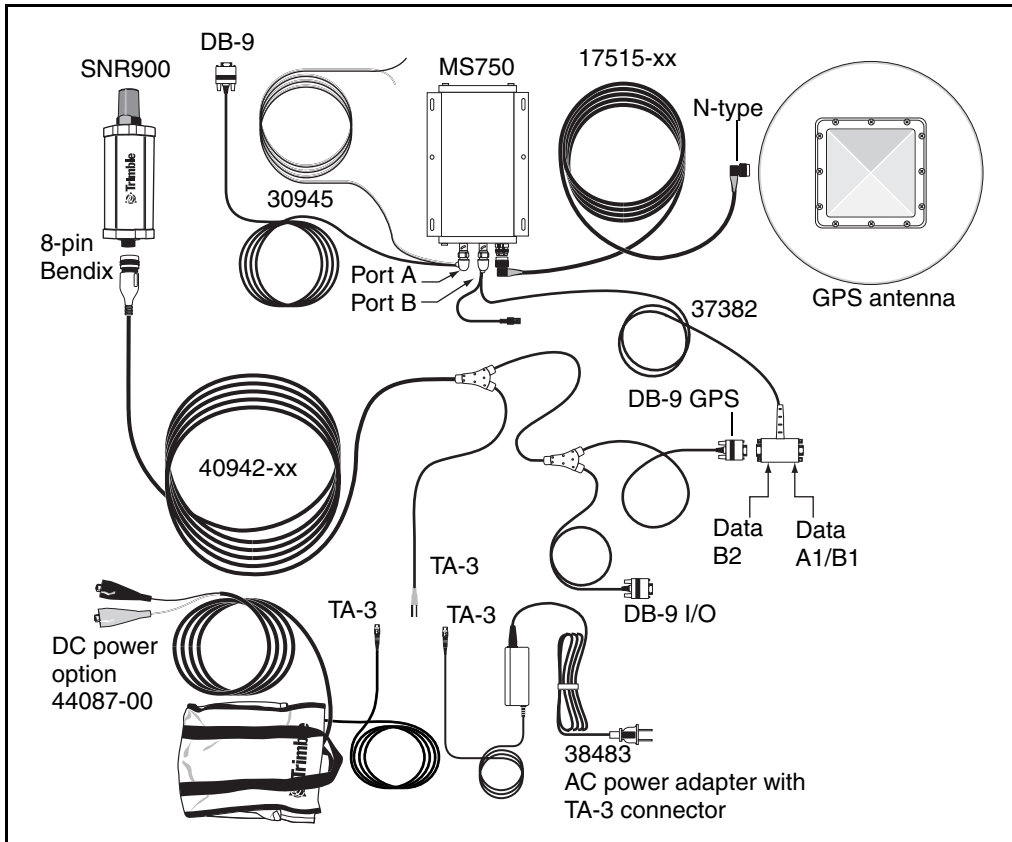


Figure 4.9 MS750 base station using cable PN 40942-xx

Machine Service Cable

Figure 4.10 shows cable 40942-xx when used to configure SNR900 radios with a laptop.

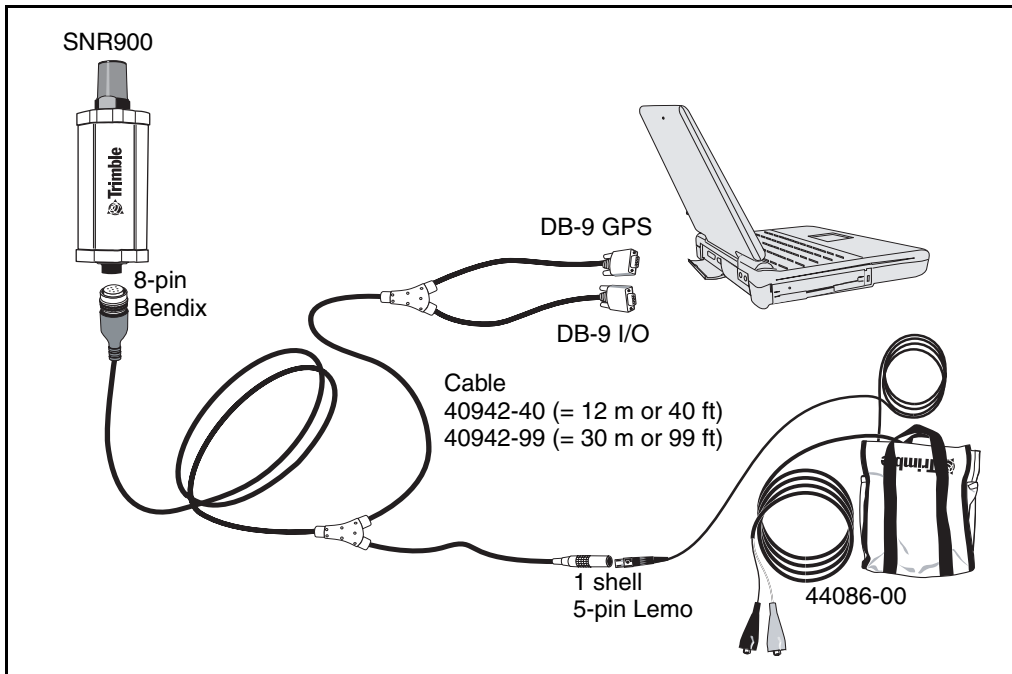


Figure 4.10 Machine service cable (PN 40942-xx)

Antenna Description

The standard SNR900 antenna is a 0 dB, low-profile antenna. An optional infrastructure installation kit comes with an antenna base and 5 dB whip antenna tip. The 5 dB antenna measures 81 cm (32") in length, including the base. See Figure 4.11.

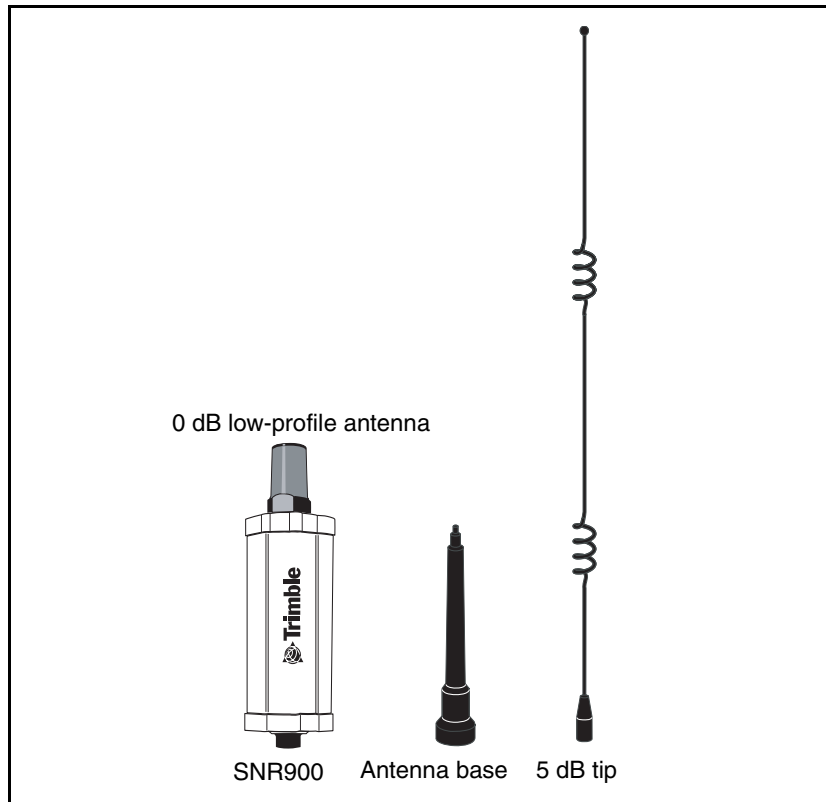


Figure 4.11 SNR900 with antennas

Antenna Considerations

***Note** – Please use care when removing the radio antenna. The SNR900 antenna contact tip is designed for maximum efficiency and very low loss. To maintain its integrity, do **not** remove the top cap from the radio housing.*

Make sure that you mount the base and repeater radios as high as possible. An increase in the antenna height increases your line of sight and is the most effective way to increase the radio's range.

Figure 4.12 shows the optional infrastructure antenna mounting for the SNR900.

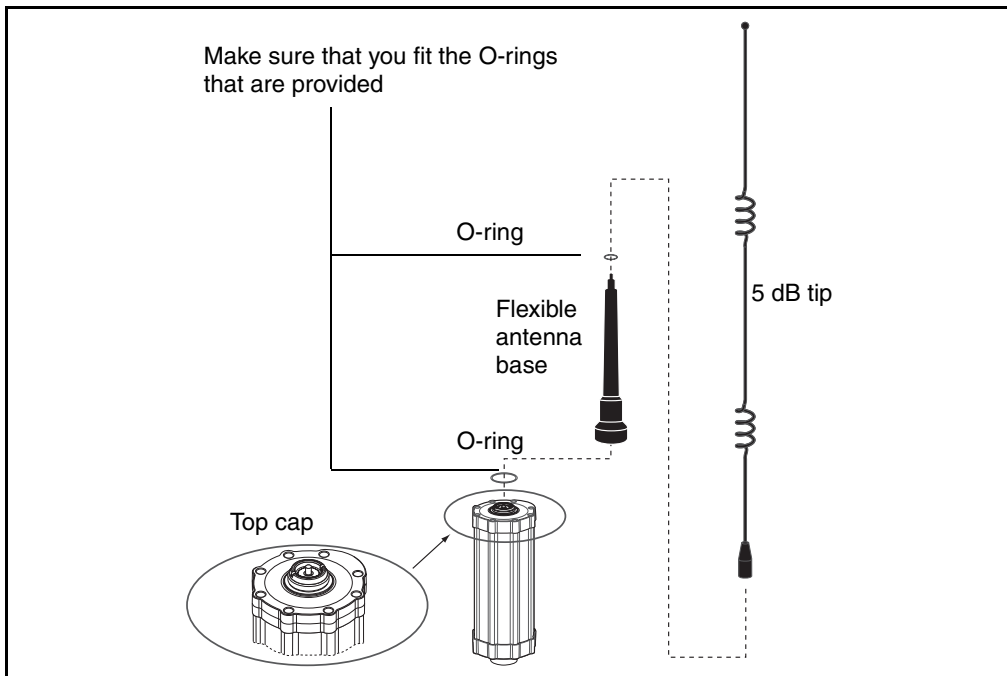


Figure 4.12 Infrastructure antenna mounting

A

Technical Specifications

In this chapter:

- Technical Information
- Pinout Information

Technical Information

Table A.1 shows the technical information for the SNR900 radio-modem. This information is subject to change without notice.

Table A.1 Technical information

Specification	
Physical:	
Size	85 mm (3.4") W x 250 mm (10") H
Weight	0.9 kg (2.0 lb)
Environmental:	
Operating temperature	−40° to +70°C
Storage temperature	−40° to +85°C
Humidity	Exceeds MIL-STD-810E (aggravated cyclic humidity), sealed to ±34.5 kPa ±5 psi), immersible to 1 m
Vibration	8 gRMS, 20–2000 Hz random vibration
Shock:	
Operational	±40 g 10 msec
Survival	±75 g 6 msec
Electrical	
Power consumption:	
Receive	380 mA (4.6 W at 12 VDC) ¹
Transmit (peak current)	1100 mA (13.2 W at 12 VDC) ¹
Protection	Reverse polarity; load dump
Input range	10 VDC to 32 VDC unconditioned
Connector:	
Type	8-pin male Bendix
Provides	Power, 2 serial ports, CAN interface
Indicators	Power, status, and network sync LED

Table A.1 Technical information (continued)

Specification	
Radio-modem performance	
Range	
Optimal	10 km (6 miles), line-of-sight
Typical	3–5 km (2–3 miles)
	Varies with terrain and operating conditions. Repeaters may be used to extend range.
Frequency range	902–928 MHz ²
Networks	Forty user selectable networks
Transmit power	Meets FCC requirements of 1 W maximum power output
Wireless data rates	128 kbps
Modes	Base/Repeater/Rover

¹ Power consumption, as well as the permissible number of repeaters in a network, depends on the information content and wireless data rate (that is, CMR vs RTCM SC-104 Ver. 2.x packets at 1 Hz epoch rates).

² Broadcast frequency and radiated power are regulated by countries-of-use. These are unique on a per country basis. The broadcast frequencies, and country-of-use for the radio-modem must be specified at time of order.

Pinout Information

Figure A.1 shows the pinout information for the 8-pin male Bendix connector on the base of the SNR900 radio-modem.

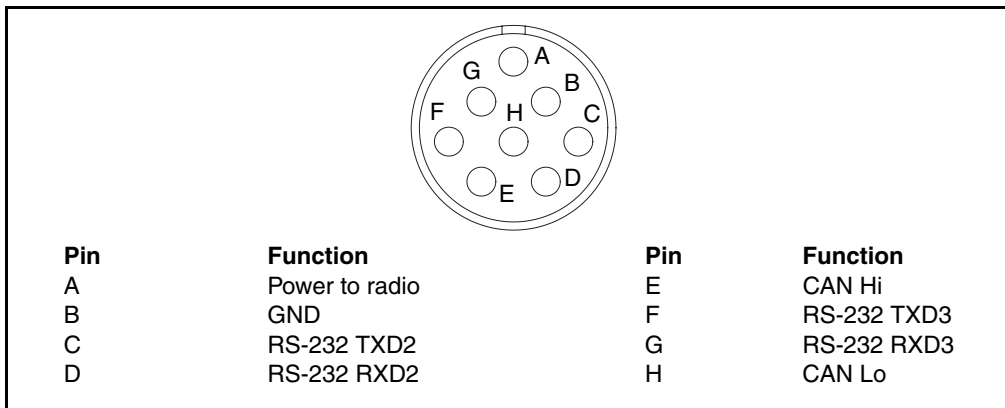


Figure A.1 SNR900 connector (8-pin Mil-Spec)

Note – This pinout is the same as that on the SiteNet 900 radio. The SNR900 is a plug-in replacement for any application using the SiteNet 900 radio.

Index

Numerics

8-pin Bendix connector 36

A

antenna

- contact tip 19
- description of 31
- location of 18, 32

B

base station

- installations 26
- SNR900 listens to 14
- using SNR900 as 14

baud rate 14

C

cables

- infrastructure power 26
- machine installations 24
- machine service 11, 30
- SNR900 configurations 24
- troubleshooting for 28

cap

- bottom 36
- top 19, 32

CMR, format 6

configuration settings

SNR900 10

connectors and indicators 18, 34

Bendix 36

infrastructure cable 28

pinout 36

power and I/O cable 25

D

data, raw GPS 6

default settings 10

E

electrical specification 34

environmental specification 34

F

frequency band 8

frequency range, specification 35

G

green LED 19

H

hardware, performance 6
humidity, specification 34

I

indicator, LED 19
installing. *See* mounting the SNR900

L

LED indicator light 19, 34

M

machine mounting 21, 22
modem
 description 18
 technical specifications 34
mounting the SNR900
 antenna, considerations 32
 machine 21, 22

N

network
 mode (base, rover, repeater) 14
 number, selecting 14

O

operating temperature 34
operational mode 14
orange LED 19

P

parity 14
performance specification 35
pinout information 36
power 19
 cables 24
 consumption 34
 I/O cable 25
 infrastructure/base station 26
 requirements 6

R

radios
 configuring 10
 operational modes 14
range specification 35
readme.txt file 2
release notes 2
repeater 14
rover 14

S

serial port baud rate and parity 14
serial port, default settings 10, 14
shock specification 34
size 34
SNR900
 additional options to 7
 configuring 11
 connecting to 11
 features of 7
 options of 7
 technical specifications 34
specifications 34
storage temperature 34
support 3

T

- technical specifications 34
- technical support 3
- temperature
 - operating range 34
 - storage range 34
- TRIMCOMM 900 radio 6

U

- update notes 2

V

- vibration specification 34

W

- weight 34
- WinFlash
 - configuring SNR900 11
 - connecting to the SNR900 11
 - main properties window 13

