

FCC Radio Test Report

FCC ID: 2A2QB-FWOS

Report No.	: BTL-FCCP-4-2510T110
Equipment	: (1) Firewalla Orange USA (2) Firewalla Orange World
Model Name	: (1) FWOS (2) FWOS-W
Brand Name	: Firewalla
Applicant	: Firewalla INC
Address	: 19630 Allendale Ave #2217, Saratoga, CA 95070, United States
Radio Function	: RLAN 5 GHz (U-NII 1, U-NII 2A, U-NII 2C, U-NII 3)
FCC Rule Part(s)	: FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement Procedure(s)	: ANSI C63.10-2020
Date of Receipt	: 2025/10/22
Date of Test	: 2025/11/20 ~ 2025/12/9
Issued Date	: 2025/12/30

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

: Brett Shen
Brett Shen, Engineer

Approved by

: Jerry Chuang
Jerry Chuang, Vice Manager



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihsu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	8
1.5 DUTY CYCLE	10
2 GENERAL INFORMATION	13
2.1 DESCRIPTION OF EUT	13
2.2 TEST MODES	18
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	20
2.4 SUPPORT UNITS	21
3 AC POWER LINE CONDUCTED EMISSIONS TEST	22
3.1 LIMIT	22
3.2 TEST PROCEDURE	22
3.3 DEVIATION FROM TEST STANDARD	22
3.4 TEST SETUP	23
3.5 TEST RESULT	23
4 RADIATED EMISSIONS TEST	24
4.1 LIMIT	24
4.2 TEST PROCEDURE	25
4.3 DEVIATION FROM TEST STANDARD	25
4.4 TEST SETUP	26
4.5 EUT OPERATING CONDITIONS	27
4.6 TEST RESULT – 9 KHZ TO 30 MHZ	27
4.7 TEST RESULT – 30 MHZ TO 1 GHZ	27
4.8 TEST RESULT – ABOVE 1 GHZ	27
5 BANDWIDTH TEST	28
5.1 LIMIT	28
5.2 TEST PROCEDURE	28
5.3 DEVIATION FROM TEST STANDARD	28
5.4 TEST SETUP	28
5.5 EUT OPERATING CONDITIONS	28
5.6 TEST RESULT	28
6 OUTPUT POWER TEST	29
6.1 LIMIT	29
6.2 TEST PROCEDURE	29
6.3 DEVIATION FROM TEST STANDARD	29
6.4 TEST SETUP	29
6.5 EUT OPERATING CONDITIONS	29
6.6 TEST RESULT	29
7 POWER SPECTRAL DENSITY	30
7.1 LIMIT	30
7.2 TEST PROCEDURE	30
7.3 DEVIATION FROM TEST STANDARD	30
7.4 TEST SETUP	30
7.5 EUT OPERATING CONDITIONS	30

7.6	TEST RESULT	30
8	LIST OF MEASURING EQUIPMENTS	31
9	EUT TEST PHOTO	33
10	EUT PHOTOS	33
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	34
APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ	39
APPENDIX C	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	44
APPENDIX D	RADIATED EMISSIONS - ABOVE 1 GHZ	47
APPENDIX E	BANDWIDTH	348
APPENDIX F	CONDUCTED OUTPUT POWER	417
APPENDIX G	POWER SPECTRAL DENSITY	443

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2510T110	R00	Original Report.	2025/12/30	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass	-----
15.407(a)	Bandwidth	APPENDIX E	Pass	-----
15.407(a)	Output Power	APPENDIX F	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX G	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----
15.407(c)	Automatically Discontinue Transmission	-----	Pass	NOTE (3)

Statement of Conformity

The statement of conformity is based on the binary decision rule according to IEC Guide 115 and ILAC G8 "simple acceptance" principle. Without considering measurement uncertainty, its specific risk is less than 50% PFA. (PFA: Probability of False Accept)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C05 ☐ CB08 ☐ CB11 ☐ SR10 ☒ SR11

No. 68-2, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☒ SR05

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C06 ☒ CB21 ☐ CB22

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

A. AC power line conducted emissions test:

Test Site	Measurement Frequency Range	U_{Lab} (dB)	U_{CISPR} (dB)
SR05	150 kHz ~ 30 MHz	3.22	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range (GHz)	U (dB)
CB21 (3m)	0.03~0.2	4.35
	0.02~1	4.78
	1 ~ 6	5.45
	6 ~ 18	5.04
	18 ~ 26	4.03
	26 ~ 40	4.33

C. Conducted test :

Test Item	U
Occupied Bandwidth	0.83 %
Output power	0.8672 dB
Power Spectral Density	0.8886 dB
Conducted Spurious emissions	1.83 dB
Conducted Band edges	1.83 dB
Frequency Stability	166.77 Hz
DFS	2.11 %
Timing	2.12 %

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	22 °C, 52 %	AC 120V	Ken Lan
Radiated emissions below 1 GHz	Refer to data	AC 120V	Mark Wang
Radiated emissions above 1 GHz	Refer to data	AC 120V	Mark Wang
Bandwidth	23.6 °C, 58 %	AC 120V	Ken Lan
Output Power	23.4 °C, 52 %	AC 120V	Ken Lan
Power Spectral Density	23.2 °C, 54 %	AC 120V	Ken Lan

1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

Test Software	MT7993 QA 0.0.2.106
---------------	---------------------

UNII-1				
Mode	5180 MHz	5200 MHz	5240 MHz	Data Rate
IEEE 802.11a	18	19	20.5	6 Mbps
IEEE 802.11n (HT20)	19.5	15	21.5	MCS 0
IEEE 802.11ac (VHT20)	19.5	15	21.5	MCS 0
IEEE 802.11ax (HE20)	20	22	25	MCS 0
IEEE 802.11be (EHT20)	21.5	22.5	25	MCS 0
Mode	5190 MHz	5230 MHz		Data Rate
IEEE 802.11n (HT40)	15	17		MCS 0
IEEE 802.11ac (VHT40)	15	17		MCS 0
IEEE 802.11ax (HE40)	16.5	19.5		MCS 0
IEEE 802.11be (EHT40)	18	18.5		MCS 0
Mode	5210 MHz			Data Rate
IEEE 802.11ac (VHT80)	14.5			MCS 0
IEEE 802.11ax (HE80)	13.5			MCS 0
IEEE 802.11be (EHT80)	14.5			MCS 0
Mode	5250 MHz			Data Rate
IEEE 802.11ax (HE160)	15.5			MCS 0
IEEE 802.11be (EHT160)	16			MCS 0

UNII-2A				
Mode	5260 MHz	5300 MHz	5320 MHz	Data Rate
IEEE 802.11a	16	16.5	16.5	6 Mbps
IEEE 802.11n (HT20)	16	16.5	17	MCS 0
IEEE 802.11ac (VHT20)	16	16.5	17	MCS 0
IEEE 802.11ax (HE20)	19	19	19.5	MCS 0
IEEE 802.11be (EHT20)	19	19.5	19.5	MCS 0
Mode	5270 MHz	5310 MHz		Data Rate
IEEE 802.11n (HT40)	18	16		MCS 0
IEEE 802.11ac (VHT40)	18	16		MCS 0
IEEE 802.11ax (HE40)	19	19		MCS 0
IEEE 802.11be (EHT40)	20	18		MCS 0
Mode	5290 MHz			Data Rate
IEEE 802.11ac (VHT80)	16.5			MCS 0
IEEE 802.11ax (HE80)	15.5			MCS 0
IEEE 802.11be (EHT80)	16			MCS 0

UNII-2C					
Mode	5500 MHz	5580 MHz	5700 MHz	5720 MHz	Data Rate
IEEE 802.11a	16.5	16	17	15.5	6 Mbps
IEEE 802.11n (HT20)	17	16	17.5	15.5	MCS 0
IEEE 802.11ac (VHT20)	17	16	17.5	15.5	MCS 0
IEEE 802.11ax (HE20)	19.5	19	20	17.5	MCS 0
IEEE 802.11be (EHT20)	19.5	19	20	17.5	MCS 0
Mode	5510 MHz	5550 MHz	5670 MHz	5710 MHz	Data Rate
IEEE 802.11n (HT40)	17	18.5	18.5	18	MCS 0
IEEE 802.11ac (VHT40)	17	18.5	18.5	18	MCS 0
IEEE 802.11ax (HE40)	19	20.5	21	20	MCS 0
IEEE 802.11be (EHT40)	19.5	20	21	19.5	MCS 0
Mode	5530 MHz	5610 MHz	5690 MHz		Data Rate
IEEE 802.11ac (VHT80)	16.5	21	23.5		MCS 0
IEEE 802.11ax (HE80)	15	20.5	23		MCS 0
IEEE 802.11be (EHT80)	16	21	23		MCS 0
Mode	5570 MHz				Data Rate
IEEE 802.11ax (HE160)	15.5				MCS 0
IEEE 802.11be (EHT160)	16.5				MCS 0


UNII-3				
Mode	5745 MHz	5785 MHz	5825 MHz	Data Rate
IEEE 802.11a	21.5	21.5	22	6 Mbps
IEEE 802.11n (HT20)	23.5	25.5	24	MCS 0
IEEE 802.11ac (VHT20)	23.5	25.5	24	MCS 0
IEEE 802.11ax (HE20)	26	28.5	26.5	MCS 0
IEEE 802.11be (EHT20)	26.5	28.5	27.5	MCS 0
Mode	5755 MHz	5795 MHz		Data Rate
IEEE 802.11n (HT40)	21.5	24.5		MCS 0
IEEE 802.11ac (VHT40)	21.5	24.5		MCS 0
IEEE 802.11ax (HE40)	24	24		MCS 0
IEEE 802.11be (EHT40)	23.5	24.5		MCS 0
Mode	5775 MHz			Data Rate
IEEE 802.11ac (VHT80)	22.5			MCS 0
IEEE 802.11ax (HE80)	21.5			MCS 0
IEEE 802.11be (EHT80)	22			MCS 0

1.5 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


Remark	Delta 2			Delta 3	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	1.383	1	1.383	1.454	95.12%	0.22
IEEE 802.11n (HT20)	1.288	1	1.288	1.359	94.78%	0.23
IEEE 802.11n (HT40)	0.626	1	0.626	0.698	89.68%	0.47
IEEE 802.11ac (VHT20)	1.299	1	1.299	1.374	94.54%	0.24
IEEE 802.11ac (VHT40)	0.619	1	0.619	0.705	87.80%	0.56
IEEE 802.11ac (VHT80)	0.289	1	0.289	0.385	75.06%	1.25
IEEE 802.11ax (HE20)	0.301	1	0.301	0.373	80.70%	0.93
IEEE 802.11ax (HE40)	0.319	1	0.319	0.418	76.32%	1.17
IEEE 802.11ax (HE80)	0.254	1	0.254	0.344	73.84%	1.32
IEEE 802.11ax (HE160)	0.275	1	0.275	0.360	76.39%	1.17
IEEE 802.11be (EHT20)	0.355	1	0.355	0.416	85.34%	0.69
IEEE 802.11be (EHT40)	0.320	1	0.320	0.426	75.12%	1.24
IEEE 802.11be (EHT80)	0.311	1	0.311	0.401	77.56%	1.10
IEEE 802.11be (EHT160)	0.344	1	0.344	0.414	83.09%	0.80

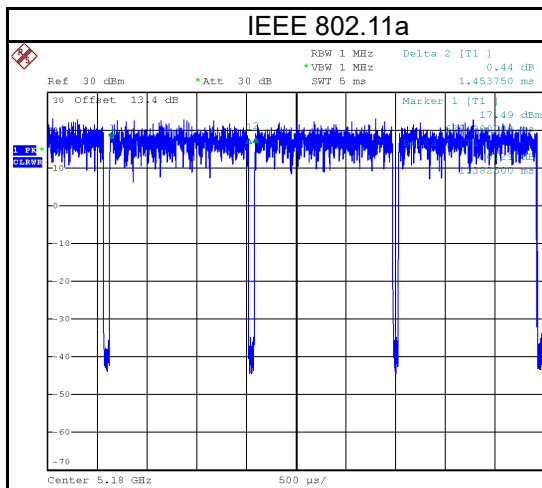


Date: 20.NOV.2025 17:24:27

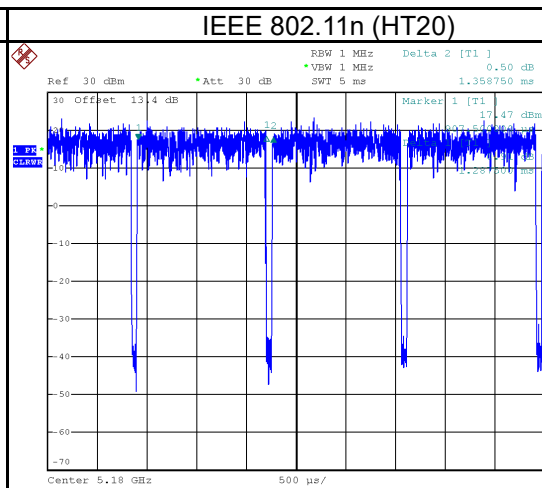


Date: 20.NOV.2025 17:24:52

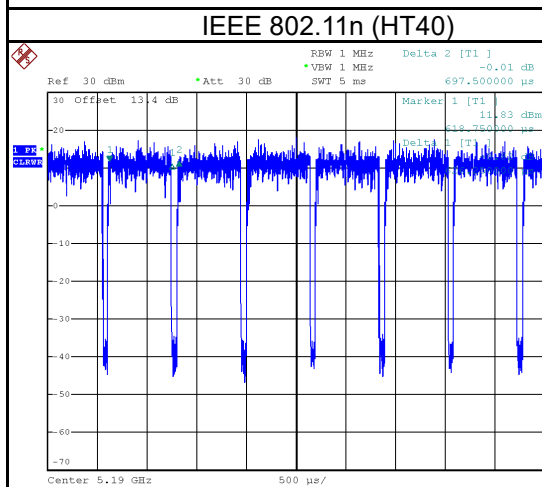


Date: 20.NOV.2025 17:26:49

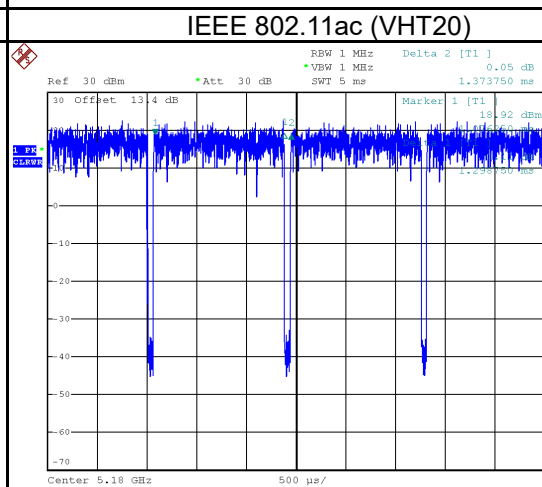

Date: 20.NOV.2025 17:25:16

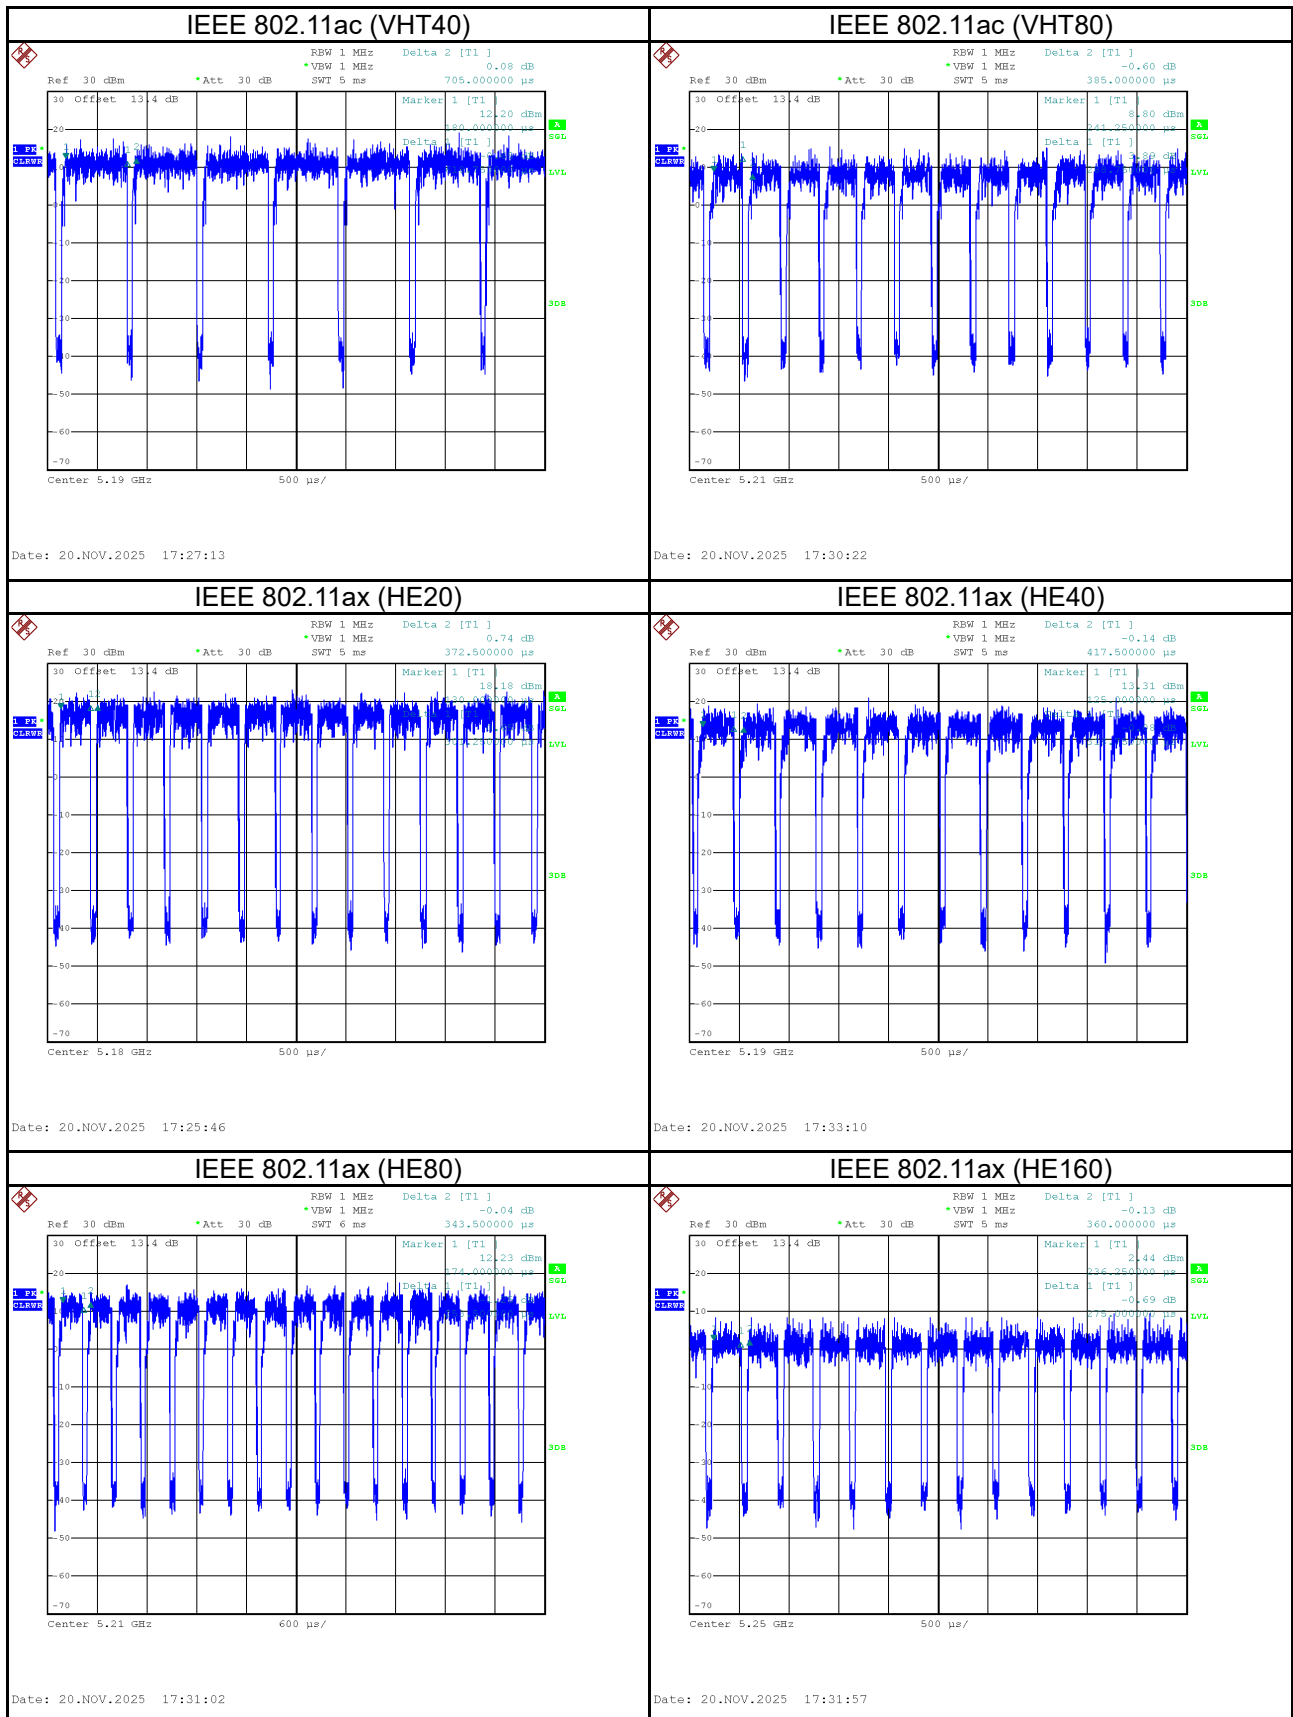

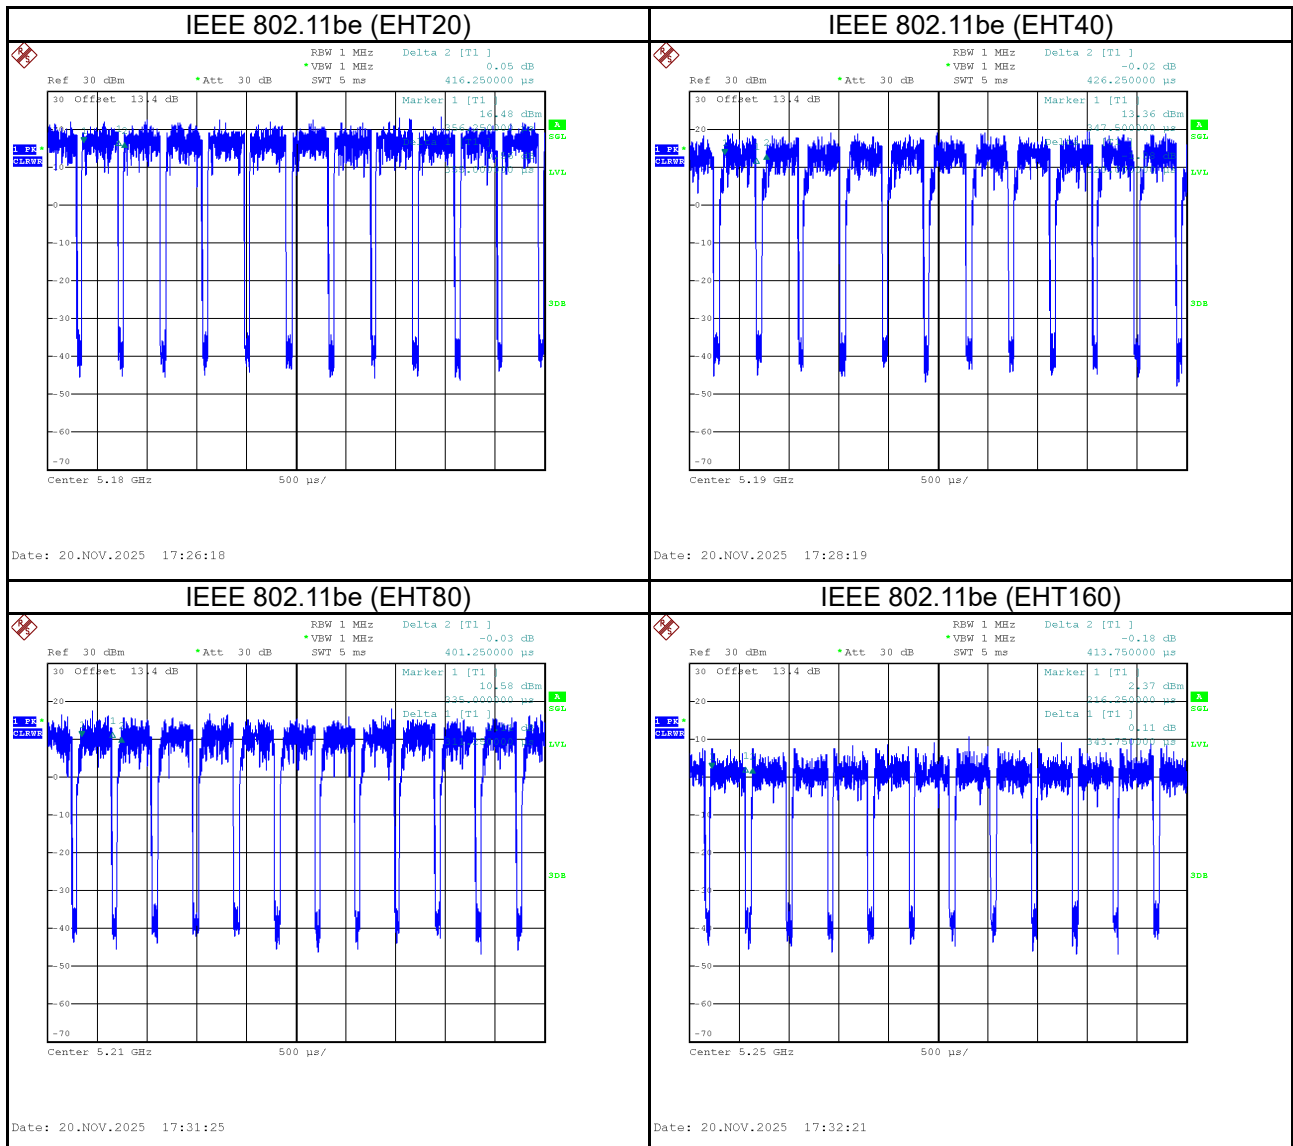

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	(1) Firewalla Orange USA (2) Firewalla Orange World
Model Name	(1) FWOS (2) FWOS-W
Brand Name	Firewalla
Model Difference	Different models distribute to different area.
Power Source	DC voltage supplied from AC/DC Adapter.
Power Rating	I/P: 100-240V~ 50/60Hz 1.0A O/P: 5.0V 3.0A 15.0W/9.0V 2.22A 20.0W/12.0V 1.67A 20.0W
Products Covered	2 * Adapter: (1) CWT / A1C020A, (2) CWT / A1C020AC 1 * Type-C to Type-C Cable 1 * RJ45 Cable
Operation Band	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz
Operation Frequency	UNII-1: 5180 MHz to 5250 MHz UNII-2A: 5250 MHz to 5320 MHz UNII-2C: 5500 MHz to 5720 MHz UNII-3: 5745 MHz to 5825 MHz
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: Up to 300 Mbps 802.11ac: Up to 866.6 Mbps 802.11ax: Up to 2402 Mbps 802.11be: Up to 2882 Mbps
Output Power Max. for UNII-1	IEEE 802.11a: 25.01 dBm (0.3168 W) IEEE 802.11n (HT20): 25.70 dBm (0.3711 W) IEEE 802.11n (HT40): 22.02 dBm (0.1593 W) IEEE 802.11ac (VHT20): 25.62 dBm (0.3652 W) IEEE 802.11ac (VHT40): 21.95 dBm (0.1565 W) IEEE 802.11ac (VHT80): 16.30 dBm (0.0426 W) IEEE 802.11ax (HE20): 26.83 dBm (0.4814 W) IEEE 802.11ax (HE40): 21.91 dBm (0.1551 W) IEEE 802.11ax (HE80): 15.70 dBm (0.0372 W) IEEE 802.11ax (HE160): 16.26 dBm (0.0423 W) IEEE 802.11be (EHT20): 26.84 dBm (0.4825 W) IEEE 802.11be (EHT40): 20.76 dBm (0.1191 W) IEEE 802.11be (EHT80): 16.50 dBm (0.8590 W) IEEE 802.11be (EHT160): 16.64 dBm (0.0461 W)
Output Power Max. for UNII-2A	IEEE 802.11a: 21.31 dBm (0.1352 W) IEEE 802.11n (HT20): 21.62 dBm (0.1453 W) IEEE 802.11n (HT40): 23.10 dBm (0.2041 W) IEEE 802.11ac (VHT20): 21.54 dBm (0.1426 W) IEEE 802.11ac (VHT40): 23.01 dBm (0.2001 W) IEEE 802.11ac (VHT80): 18.01 dBm (0.0632 W) IEEE 802.11ax (HE20): 21.44 dBm (0.1392 W) IEEE 802.11ax (HE40): 21.03 dBm (0.1266 W) IEEE 802.11ax (HE80): 17.28 dBm (0.0534 W) IEEE 802.11be (EHT20): 21.52 dBm (0.1420 W) IEEE 802.11be (EHT40): 21.92 dBm (0.1554 W) IEEE 802.11be (EHT80): 17.68 dBm (0.0586 W)

Output Power Max. for UNII-2C	IEEE 802.11a: 21.16 dBm (0.1307 W) IEEE 802.11n (HT20): 21.57 dBm (0.1436 W) IEEE 802.11n (HT40): 23.31 dBm (0.2143 W) IEEE 802.11ac (VHT20): 21.50 dBm (0.1411 W) IEEE 802.11ac (VHT40): 23.23 dBm (0.2104 W) IEEE 802.11ac (VHT80): 20.93 dBm (0.1240 W) IEEE 802.11ax (HE20): 21.26 dBm (0.1337 W) IEEE 802.11ax (HE40): 22.66 dBm (0.1844 W) IEEE 802.11ax (HE80): 20.78 dBm (0.1197 W) IEEE 802.11ax (HE160): 14.61 dBm (0.0289 W) IEEE 802.11be (EHT20): 21.37 dBm (0.1371 W) IEEE 802.11be (EHT40): 22.79 dBm (0.1901 W) IEEE 802.11be (EHT80): 21.03 dBm (0.1268 W) IEEE 802.11be (EHT160): 15.97 dBm (0.0395 W)
Output Power Max. for UNII-3	IEEE 802.11a: 23.56 dBm (0.2270 W) IEEE 802.11n (HT20): 28.95 dBm (0.7853 W) IEEE 802.11n (HT40): 28.83 dBm (0.7637 W) IEEE 802.11ac (VHT20): 28.87 dBm (0.7710 W) IEEE 802.11ac (VHT40): 28.74 dBm (0.7485 W) IEEE 802.11ac (VHT80): 21.54 dBm (0.1427 W) IEEE 802.11ax (HE20): 29.24 dBm (0.8386 W) IEEE 802.11ax (HE40): 23.32 dBm (0.2146 W) IEEE 802.11ax (HE80): 20.93 dBm (0.1239 W) IEEE 802.11be (EHT20): 29.15 dBm (0.8214 W) IEEE 802.11be (EHT40): 26.67 dBm (0.4647 W) IEEE 802.11be (EHT80): 21.22 dBm (0.1326 W)
Maximum Output Power for Straddle Channel	IEEE 802.11a: 19.87 dBm (0.0971 W) IEEE 802.11n (HT20): 19.70 dBm (0.0933 W) IEEE 802.11n (HT40): 22.95 dBm (0.1974 W) IEEE 802.11ac (VHT20): 19.67 dBm (0.0926 W) IEEE 802.11ac (VHT40): 22.92 dBm (0.1960 W) IEEE 802.11ac (VHT80): 25.22 dBm (0.3330 W) IEEE 802.11ax (HE20): 18.84 dBm (0.0765 W) IEEE 802.11ax (HE40): 22.39 dBm (0.1732 W) IEEE 802.11ax (HE80): 24.90 dBm (0.3087 W) IEEE 802.11be (EHT20): 18.92 dBm (0.0780 W) IEEE 802.11be (EHT40): 21.90 dBm (0.1547 W) IEEE 802.11be (EHT80): 25.07 dBm (0.3217 W)
Test Model	FWOS
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20) 802.11be (EHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40) 802.11be (EHT40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80) 802.11be (EHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20) 802.11be (EHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40) 802.11be (EHT40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80) 802.11be (EHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20) 802.11be (EHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40) 802.11be (EHT40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80) 802.11be (EHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20) 802.11be (EHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40) 802.11be (EHT40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80) 802.11be (EHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

802.11ax (HE160) 802.11be (EHT160)	
Channel	Frequency (MHz)
50	5250
114	5570

(3) Table for Filed Antenna:

Antenna	Manufacturer	Part No.	Type	Connector	Frequency (MHz)	Gain (dBi)
Ant. 1		ALA25P-222AA8-A	PCB	N/A	5150	3.6
					5550	3.3
					5850	3.1
Ant. 2		ALA25P-222AA8-A	PCB	N/A	5150	3.7
					5550	3.6
					5850	3.5

NOTE:

- Antenna gain higher is used for testing.
- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R).
- For Power Spectral Density:
 - To UNII-1 and,
 Directional Gain = $10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 6.66 \text{ dBi.} > 6\text{dBi.}$
 The reduced output power limits = $30 - (6.66 - 6) = 29.34$
 The reduced power spectral density limits = $17 - (6.66 - 6) = 16.34$
 - To UNII-2A,
 Directional Gain = $10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 6.66 \text{ dBi.} > 6\text{dBi.}$
 The reduced output power limits = $30 - (6.66 - 6) = 29.34$
 The reduced power spectral density limits = $11 - (6.66 - 6) = 10.34$
 - To UNII-2C,
 Directional Gain = $10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 6.46 \text{ dBi.} > 6\text{dBi.}$
 The reduced output power limits = $30 - (6.46 - 6) = 29.54$
 The reduced power spectral density limits = $11 - (6.46 - 6) = 10.54$
 - To UNII-3,
 Directional Gain = $10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 6.31 \text{ dBi.} > 6\text{dBi.}$
 The reduced output power limits = $30 - (6.31 - 6) = 29.69$
 The reduced power spectral density limits = $30 - (6.31 - 6) = 26.69$

- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(5) Operating Mode and Antenna Configuration

Operating Mode	TX Mode	2TX
IEEE 802.11a		V (Ant. 1 + Ant. 2)
IEEE 802.11n (HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n (HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HE80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HE160)		V (Ant. 1 + Ant. 2)
IEEE 802.11be (EHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11be (EHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11be (EHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11be (EHT160)		V (Ant. 1 + Ant. 2)

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_ IEEE 802.11a	48	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_ IEEE 802.11a	36/48, 52/64 100/140, 149/165	Bandedge
	TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)		
	TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)	38/46, 54/62 102/134, 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	42, 58 106/122, 155	
	TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50, 114	
	TX Mode_ IEEE 802.11a	36/40/48 52/60/64	Harmonic
	TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)	100/116/140/144 149/157/165	
	TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	42, 58 106/122/138 155	
	TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50 114	
Transmitter Radiated Emissions (above 18GHz)	TX Mode_ IEEE 802.11a	48	-
Bandwidth & Power Spectral Density	TX Mode_ IEEE 802.11a	36/40/48 52/60/64	-
	TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)	100/116/140/144 149/157/165	
	TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	42, 58 106/122/138 155	
	TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50 114	
	TX Mode_ IEEE 802.11a	36/40/48 52/60/64	
	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)	100/116/140/144 149/157/165	
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134/142 151/159	
Output Power	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	42, 58 106/122/138 155	
	TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50 114	


NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (3) IEEE 802.11n (HT20) & IEEE 802.11n (HT40) mode is worse than IEEE 802.11ac (VHT20) & IEEE 802.11ac (VHT40) mode, so we select IEEE 802.11n (HT20) & IEEE 802.11n (HT40) mode for the test.
- (4) For IEEE 802.11ax modes, refer to TCB Workshop presentations on October 3, 2018, after evaluated, all testing are performed under fully loaded conditions (Full RU). In the test data, only the partially loaded conditions data are marked with tones.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

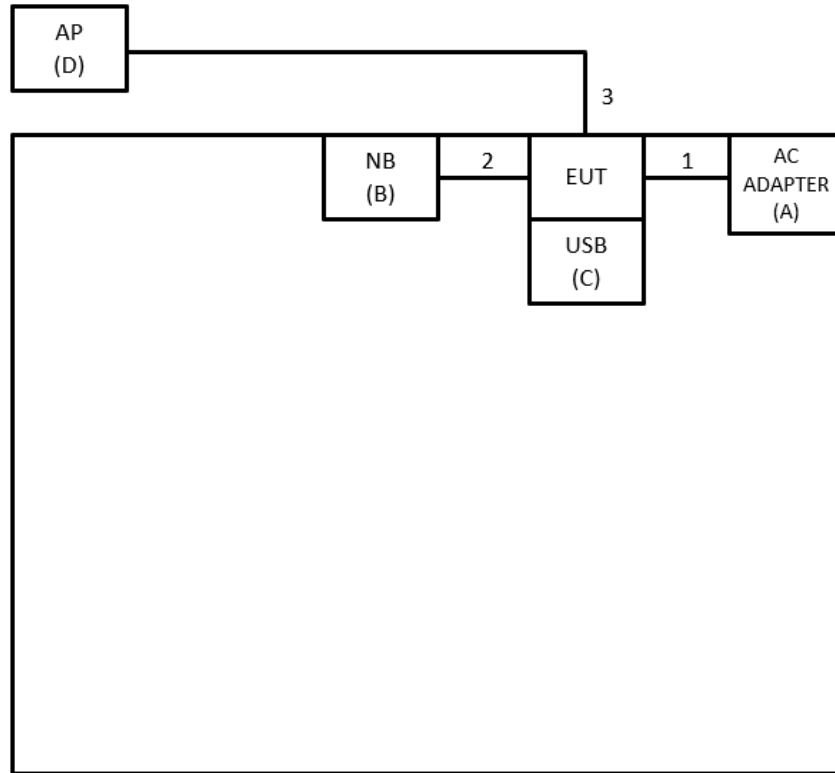

Radiated Emissions

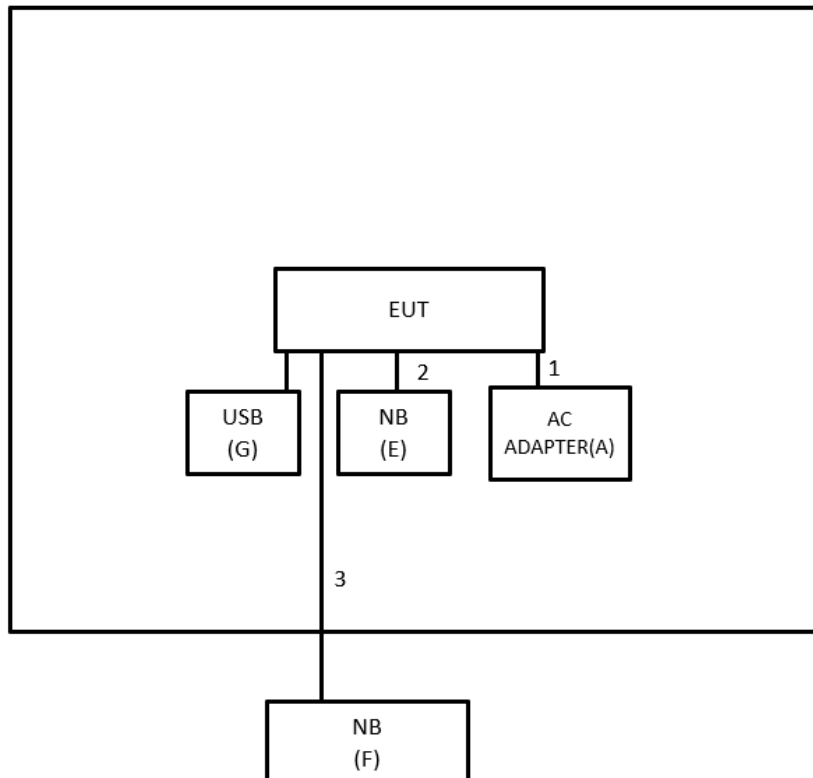

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	AC ADAPTER	CWT	A1C020A	N/A	Supplied by test requester
B	NB	HP	TPN-C125	N/A	Furnished by test lab.
C	USB	StarPoint	N/A	N/A	Furnished by test lab.
D	AP	ASUS	RT-N12+	N/A	Furnished by test lab.
E	NB	dyna	PORTEGE X30L-J	N/A	Furnished by test lab.
F	NB	dyna	Portege-X40 G	N/A	Furnished by test lab.
G	USB	ADATA	UV150	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1m	Type-C to Type-C cable	Supplied by test requester
2	N/A	N/A	1m	RJ45 Cable	Supplied by test requester
3	N/A	N/A	20m	RJ45 Cable	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

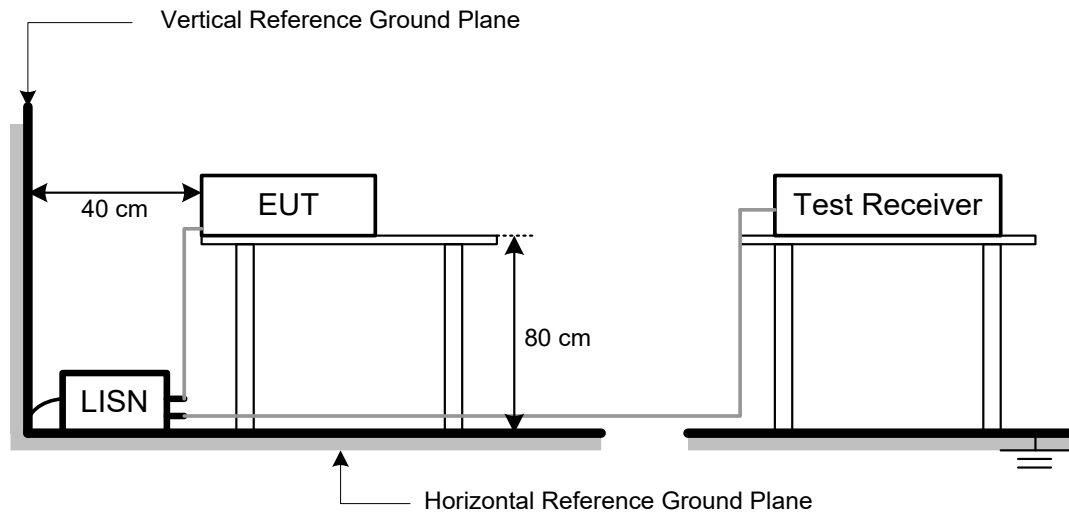

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
36.23	+	-11.97	=	24.26

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
24.26	-	40	=	-15.74

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 30MHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

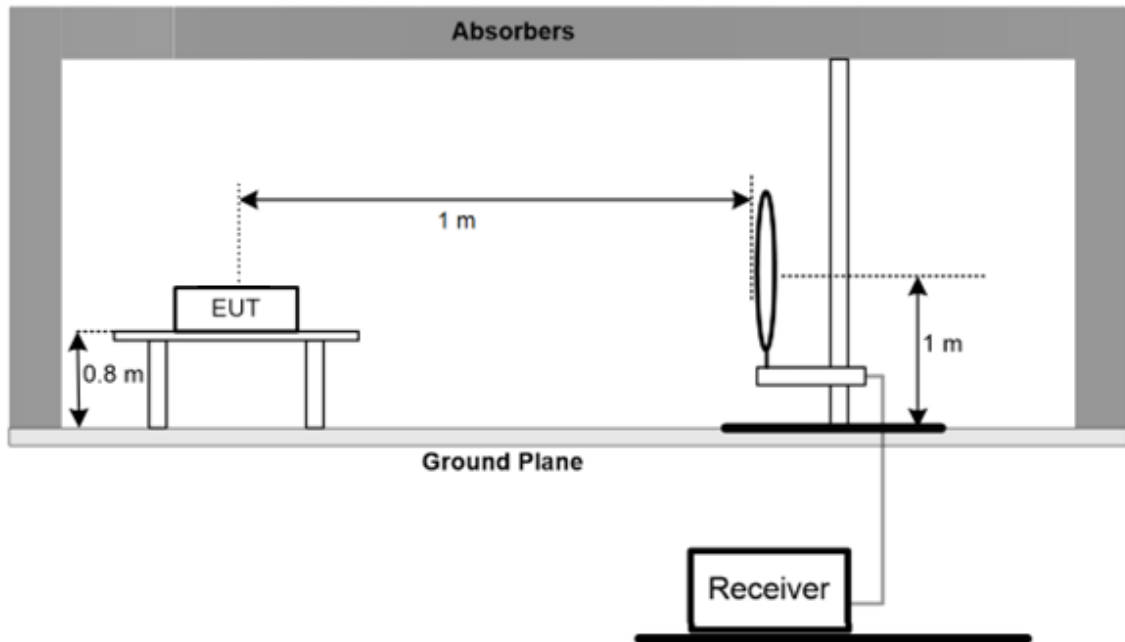

30 MHz to 1 GHz

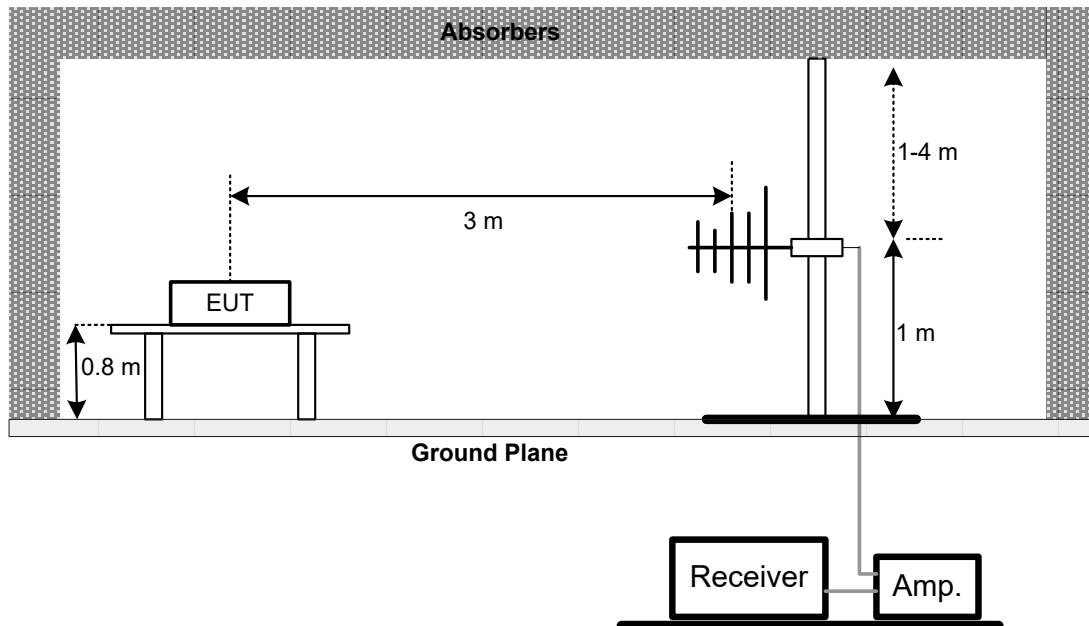

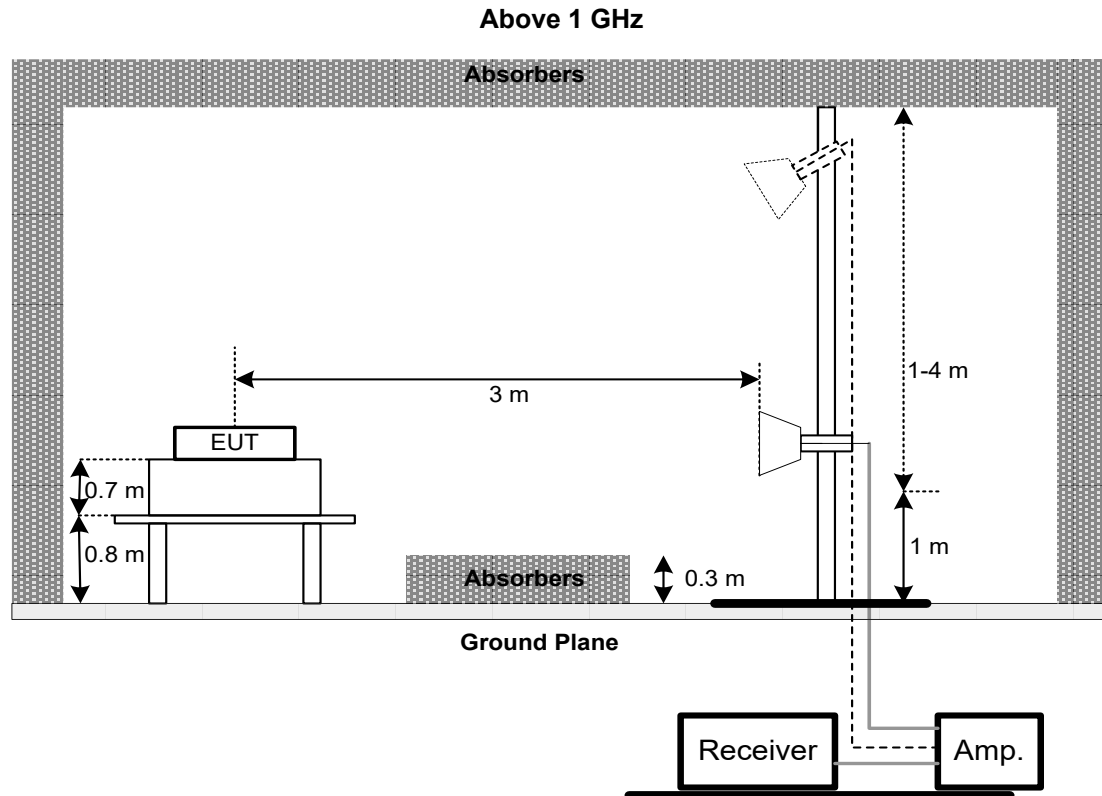

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX C.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX D.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

5.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz(Bandwidth 20 MHz) 1 MHz(Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz(Bandwidth 20 MHz) 3 MHz(Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

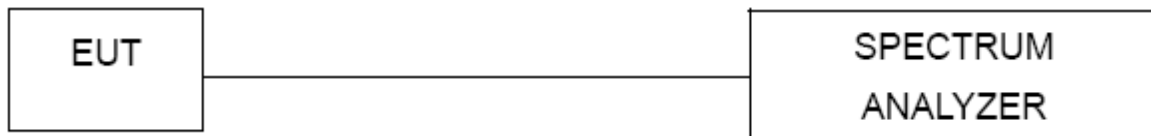

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX E.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed: 1 Watt (30 dBm) Mobile and portable: 250 mW (24 dBm)	5150-5250
		250 mW (24 dBm)	5250-5350
		1 Watt (30dBm)	5470-5725
			5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).


6.2 TEST PROCEDURE

- The EUT was directly connected to the Peak Power Analyzer and antenna output port as show in the block diagram below.
- The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - Method PM (Measurement using an RF average power meter):
 - Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

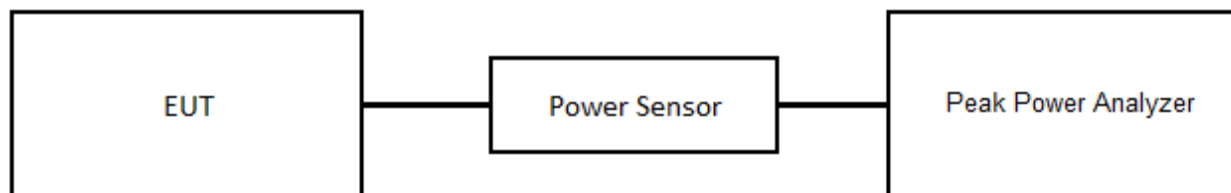

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX F.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	Other than Mobile and portable: 17 dBm/MHz	5150-5250
		Mobile and portable: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		30 dBm/500 kHz	5470-5725
			5725-5850

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX G.

8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101497	2025/5/20	2026/5/19
2	Test Cable	EMCI	EMC400-BM-BM-5000	170501	2025/7/31	2026/7/30
3	EMI Test Receiver	R&S	ESR3	102950	2025/4/14	2026/4/13
4	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2025/9/3	2026/9/2
2	Preamplifier	EMCI	EMC118A45SE	980819	2025/3/5	2026/3/4
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2025/9/3	2026/9/2
4	Preamplifier	EMCI	EMC001340	980579	2025/9/3	2026/9/2
5	Test Cable	EMCI	EMC104-SM-1000	180809	2025/3/5	2026/3/4
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2025/3/5	2026/3/4
7	Test Cable	EMCI	EMC105-SM-SM-8000	220422	2025/10/15	2026/10/14
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2025/2/19	2026/2/18
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2025/9/1	2026/8/31
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2025/5/9	2026/5/8
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2025/5/15	2026/5/14
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2025/7/4	2026/7/3
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2025/7/4	2026/7/3
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2025/3/12	2026/3/11
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2025/3/12	2026/3/11
16	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	101139	2025/3/7	2026/3/6

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Peak Power Analyzer	Keysight	8990B	MY51000517	2025/3/16	2026/3/15
2	Power Sensor	Keysight	N1923A	MY58310005	2025/3/18	2026/3/17

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	101139	2025/3/7	2026/3/6

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

9 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2510T110-FCCP-1 (APPENDIX-TEST PHOTOS).

10 EUT PHOTOS

Please refer to document Appendix No.: EP-2510T110-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2025/12/2
Test Frequency	-	Phase	Line

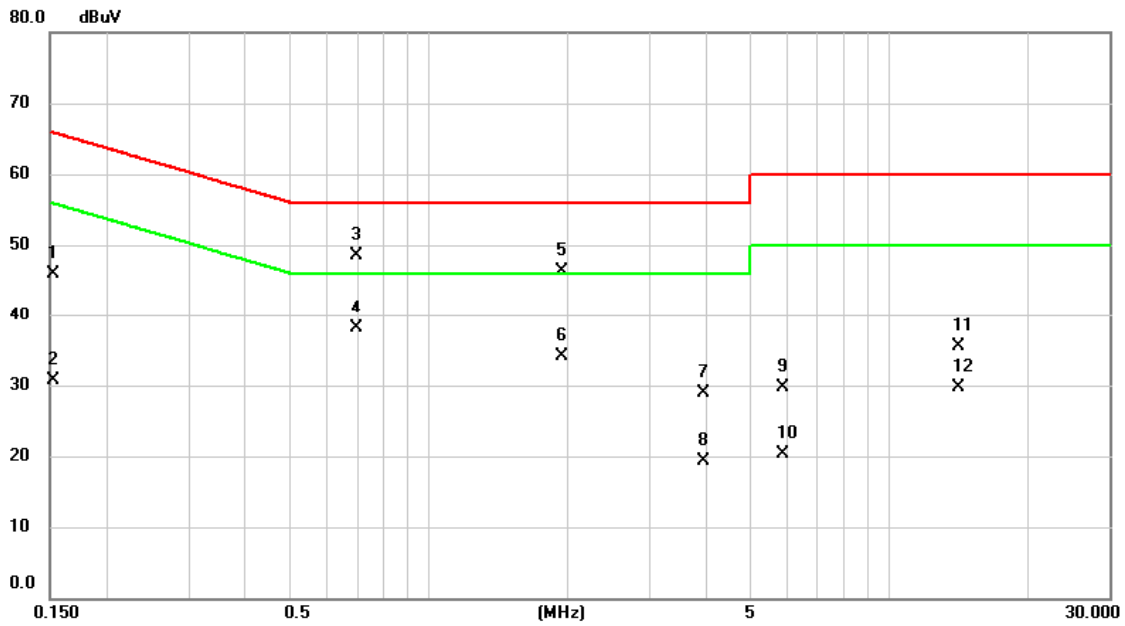


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	36.24	9.58	45.82	65.88	-20.06	QP	
2		0.1522	21.10	9.58	30.68	55.88	-25.20	AVG	
3	*	0.6967	38.95	9.55	48.50	56.00	-7.50	QP	
4		0.6967	28.63	9.55	38.18	46.00	-7.82	AVG	
5		1.9410	36.67	9.60	46.27	56.00	-9.73	QP	
6		1.9410	24.52	9.60	34.12	46.00	-11.88	AVG	
7		3.9323	19.23	9.71	28.94	56.00	-27.06	QP	
8		3.9323	9.59	9.71	19.30	46.00	-26.70	AVG	
9		5.9078	19.91	9.79	29.70	60.00	-30.30	QP	
10		5.9078	10.47	9.79	20.26	50.00	-29.74	AVG	
11		14.1518	25.63	9.90	35.53	60.00	-24.47	QP	
12		14.1518	19.74	9.90	29.64	50.00	-20.36	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/12/2
Test Frequency	-	Phase	Neutral

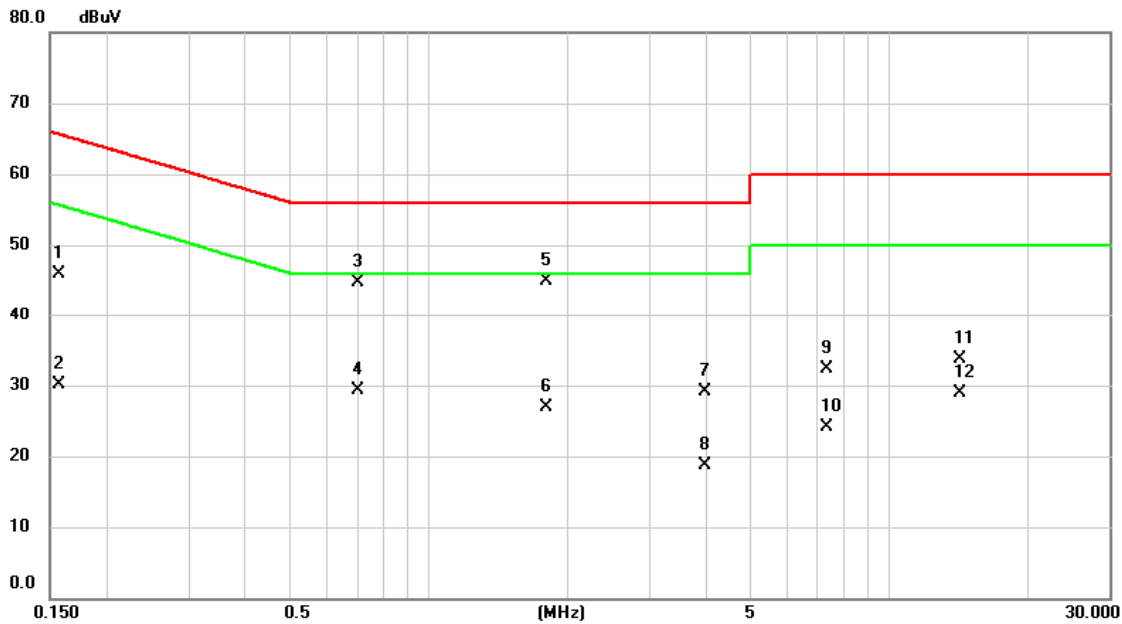


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1567	36.41	9.51	45.92	65.64	-19.72	QP	
2		0.1567	20.54	9.51	30.05	55.64	-25.59	AVG	
3		0.7012	35.12	9.53	44.65	56.00	-11.35	QP	
4		0.7012	19.77	9.53	29.30	46.00	-16.70	AVG	
5	*	1.7992	35.39	9.58	44.97	56.00	-11.03	QP	
6		1.7992	17.33	9.58	26.91	46.00	-19.09	AVG	
7		3.9615	19.38	9.67	29.05	56.00	-26.95	QP	
8		3.9615	9.08	9.67	18.75	46.00	-27.25	AVG	
9		7.3117	22.48	9.77	32.25	60.00	-27.75	QP	
10		7.3117	14.24	9.77	24.01	50.00	-25.99	AVG	
11		14.2147	23.76	9.89	33.65	60.00	-26.35	QP	
12		14.2147	19.02	9.89	28.91	50.00	-21.09	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2025/12/2
Test Frequency	-	Phase	Line

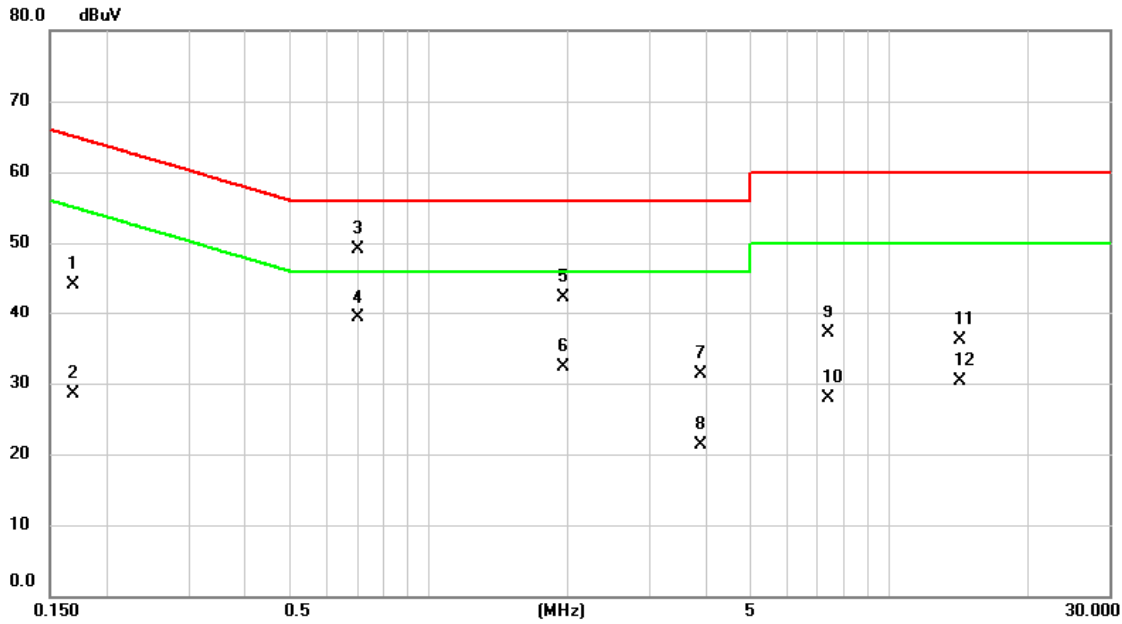


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	34.52	9.58	44.10	65.06	-20.96	QP	
2		0.1680	18.84	9.58	28.42	55.06	-26.64	AVG	
3		0.7012	39.56	9.55	49.11	56.00	-6.89	QP	
4	*	0.7012	29.78	9.55	39.33	46.00	-6.67	AVG	
5		1.9568	32.71	9.60	42.31	56.00	-13.69	QP	
6		1.9568	22.73	9.60	32.33	46.00	-13.67	AVG	
7		3.8693	21.56	9.71	31.27	56.00	-24.73	QP	
8		3.8693	11.61	9.71	21.32	46.00	-24.68	AVG	
9		7.4040	27.29	9.81	37.10	60.00	-22.90	QP	
10		7.4040	18.02	9.81	27.83	50.00	-22.17	AVG	
11		14.2125	26.30	9.90	36.20	60.00	-23.80	QP	
12		14.2125	20.45	9.90	30.35	50.00	-19.65	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2025/12/2
Test Frequency	-	Phase	Neutral

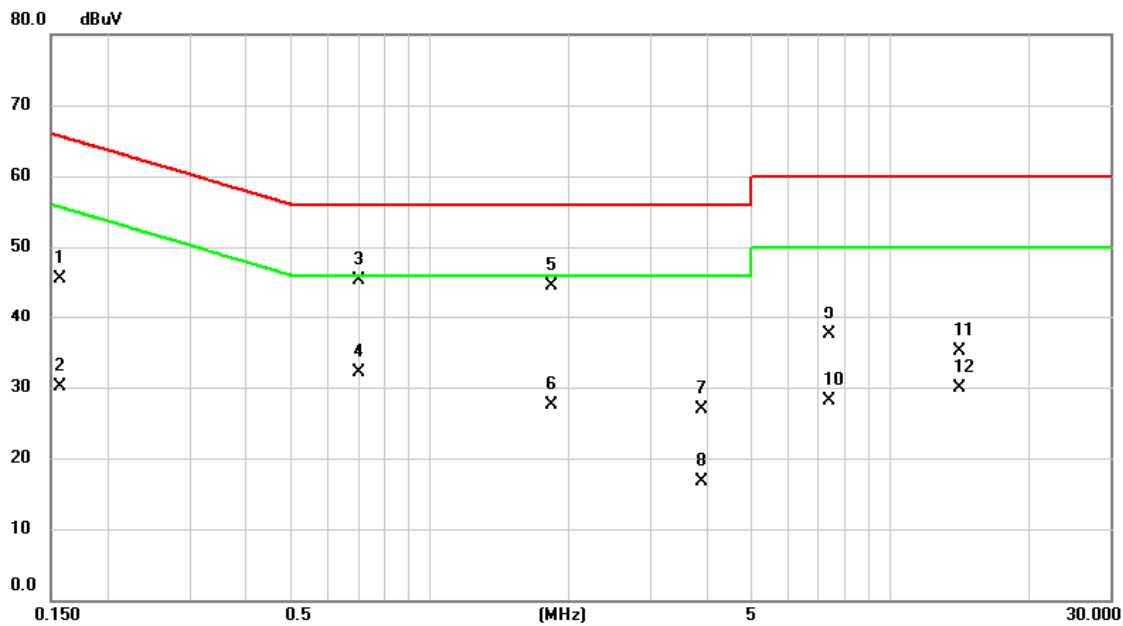

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1568	35.98	9.51	45.49	65.63	-20.14	QP	
2		0.1568	20.61	9.51	30.12	55.63	-25.51	AVG	
3	*	0.7035	35.78	9.53	45.31	56.00	-10.69	QP	
4		0.7035	22.54	9.53	32.07	46.00	-13.93	AVG	
5		1.8398	34.88	9.58	44.46	56.00	-11.54	QP	
6		1.8398	17.98	9.58	27.56	46.00	-18.44	AVG	
7		3.8783	17.26	9.67	26.93	56.00	-29.07	QP	
8		3.8783	7.04	9.67	16.71	46.00	-29.29	AVG	
9		7.4018	27.71	9.77	37.48	60.00	-22.52	QP	
10		7.4018	18.30	9.77	28.07	50.00	-21.93	AVG	
11		14.1518	25.31	9.89	35.20	60.00	-24.80	QP	
12		14.1518	19.97	9.89	29.86	50.00	-20.14	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ

Test Mode	IEEE 802.11a	Test Date	2025/12/8
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	64%

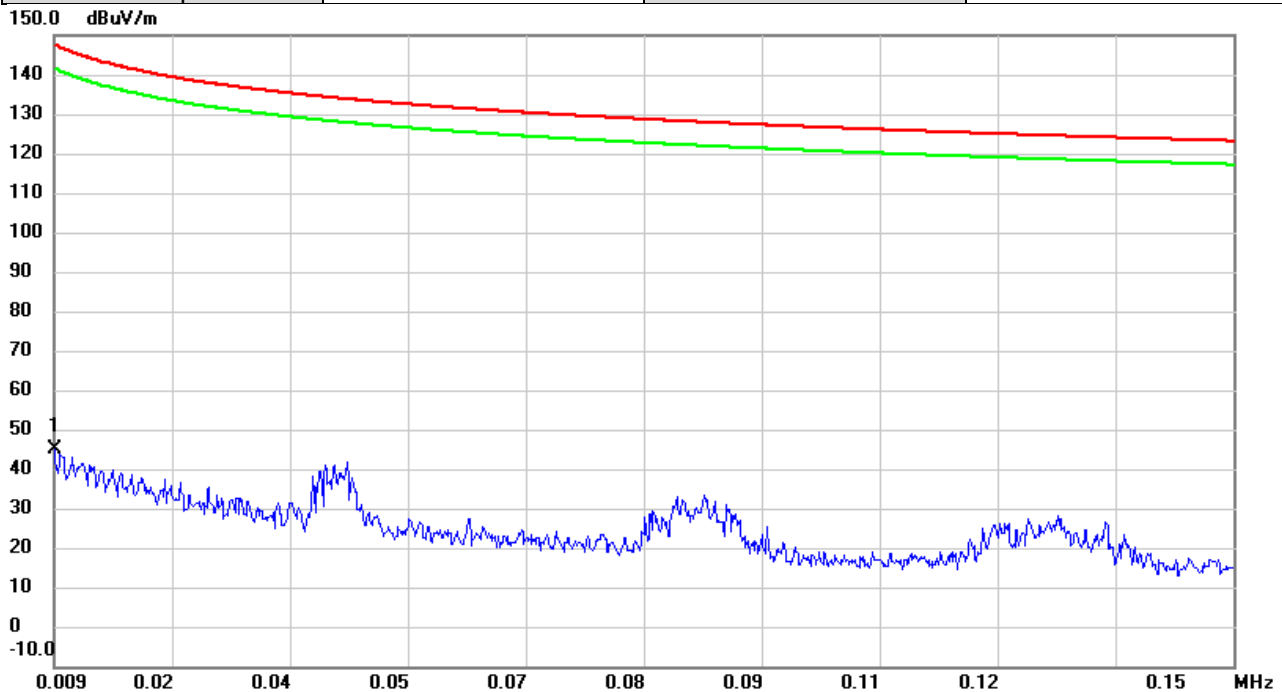


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0090	8.13	36.70	44.83	147.60	-102.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/8
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	64%

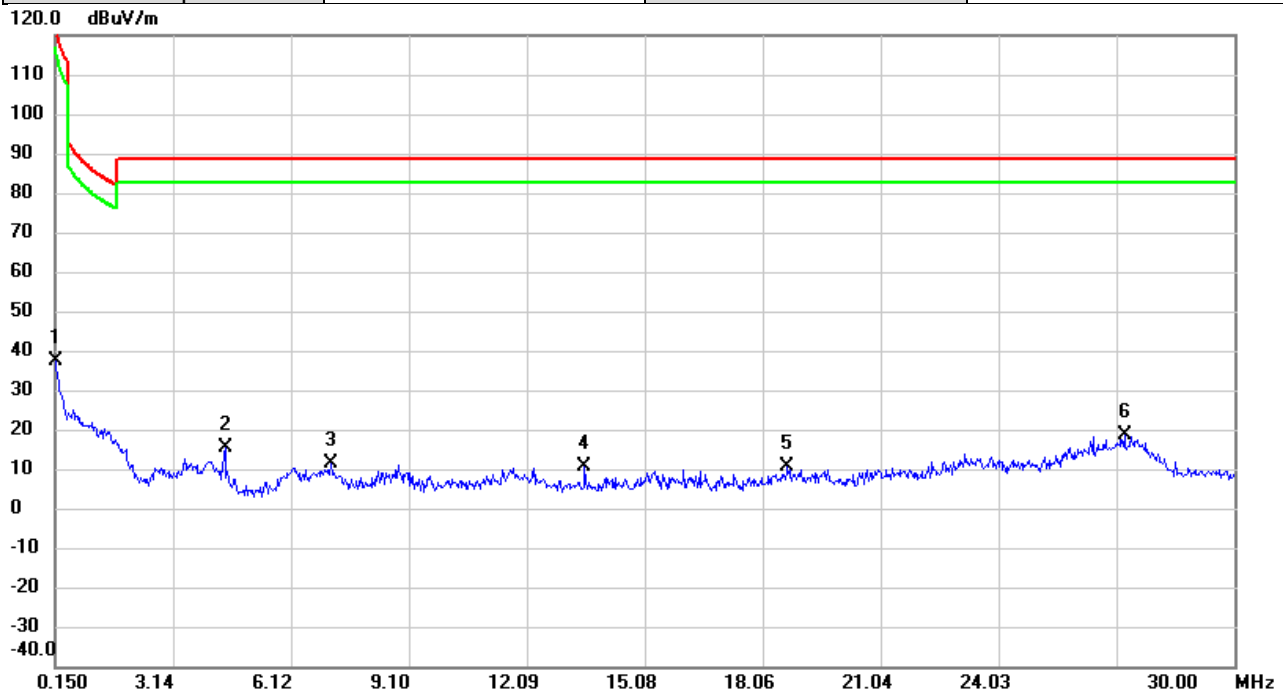


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	22.29	14.93	37.22	123.16	-85.94	AVG	
2		4.4484	19.02	-3.57	15.45	88.62	-73.17	QP	
3		7.1350	14.71	-3.18	11.53	88.62	-77.09	QP	
4		13.5526	13.33	-2.87	10.46	88.62	-78.16	QP	
5		18.6868	14.05	-3.34	10.71	88.62	-77.91	QP	
6	*	27.2240	21.31	-2.55	18.76	88.62	-69.86	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/8
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	64%

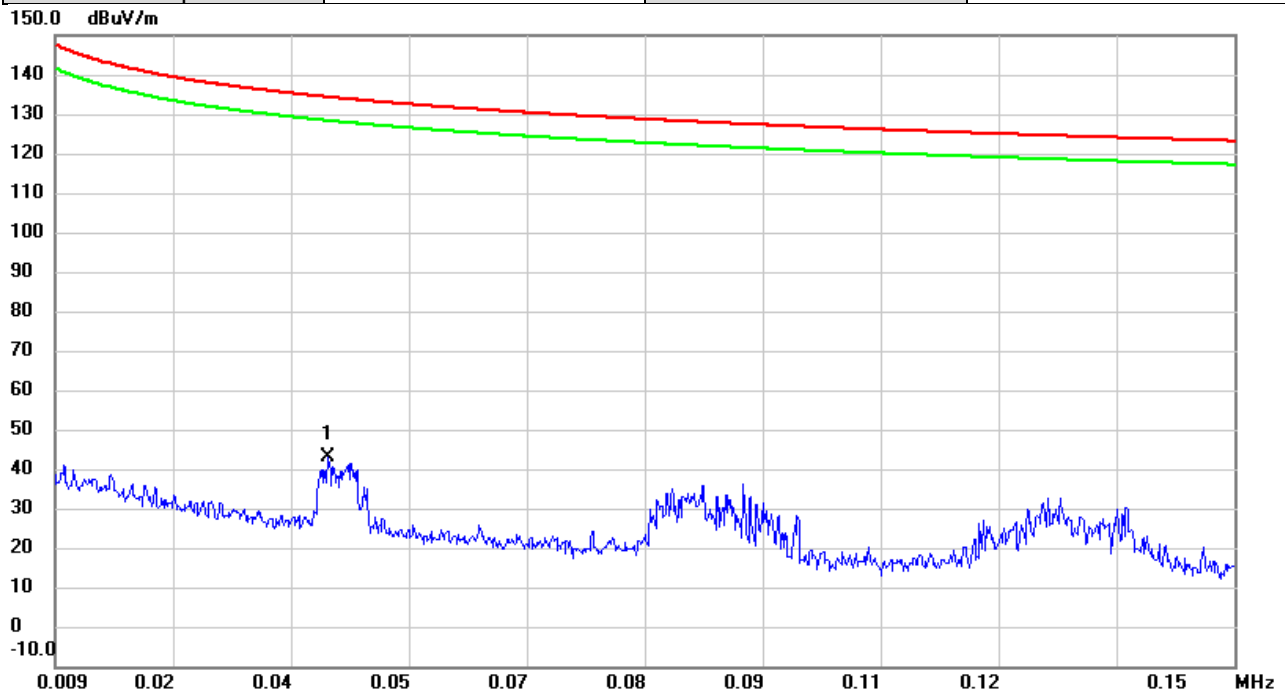


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0417	16.63	26.44	43.07	134.28	-91.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/8
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	64%

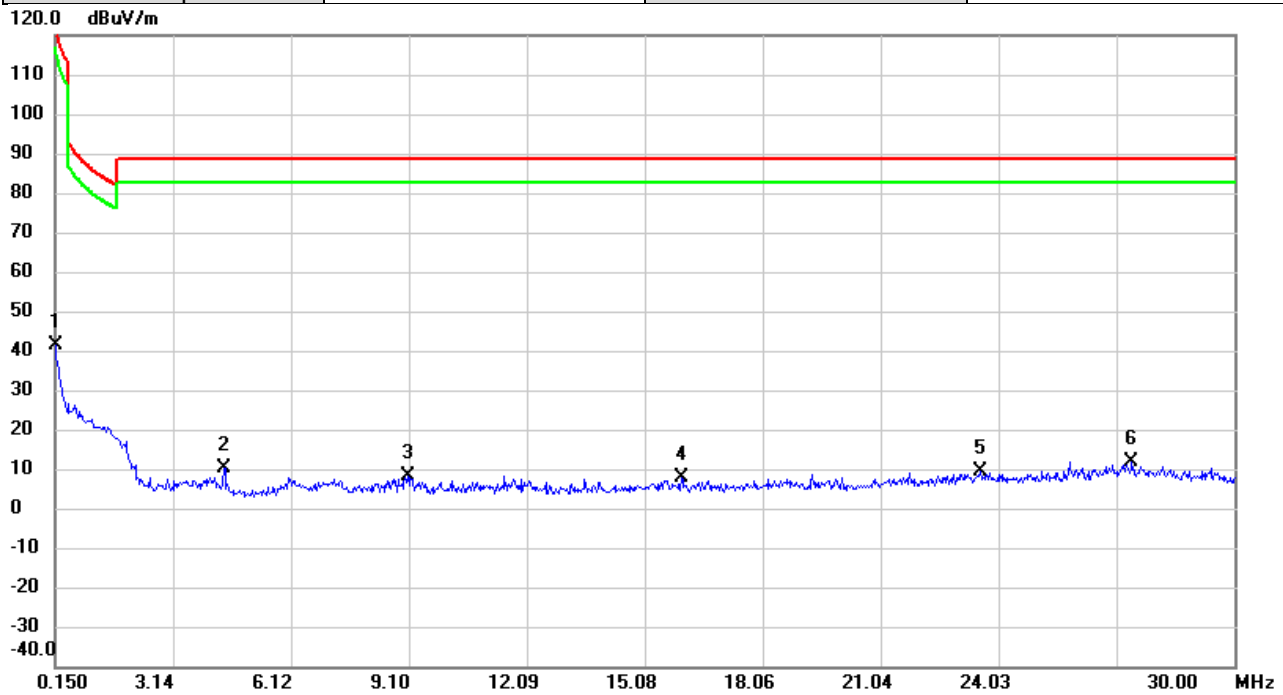


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	26.35	14.93	41.28	123.16	-81.88	AVG	
2		4.4185	13.75	-3.56	10.19	88.62	-78.43	QP	
3		9.0751	10.79	-2.74	8.05	88.62	-80.57	QP	
4		16.0003	11.05	-3.10	7.95	88.62	-80.67	QP	
5		23.5822	12.22	-3.00	9.22	88.62	-79.40	QP	
6	*	27.4030	14.27	-2.53	11.74	88.62	-76.88	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2025/12/8
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	64%

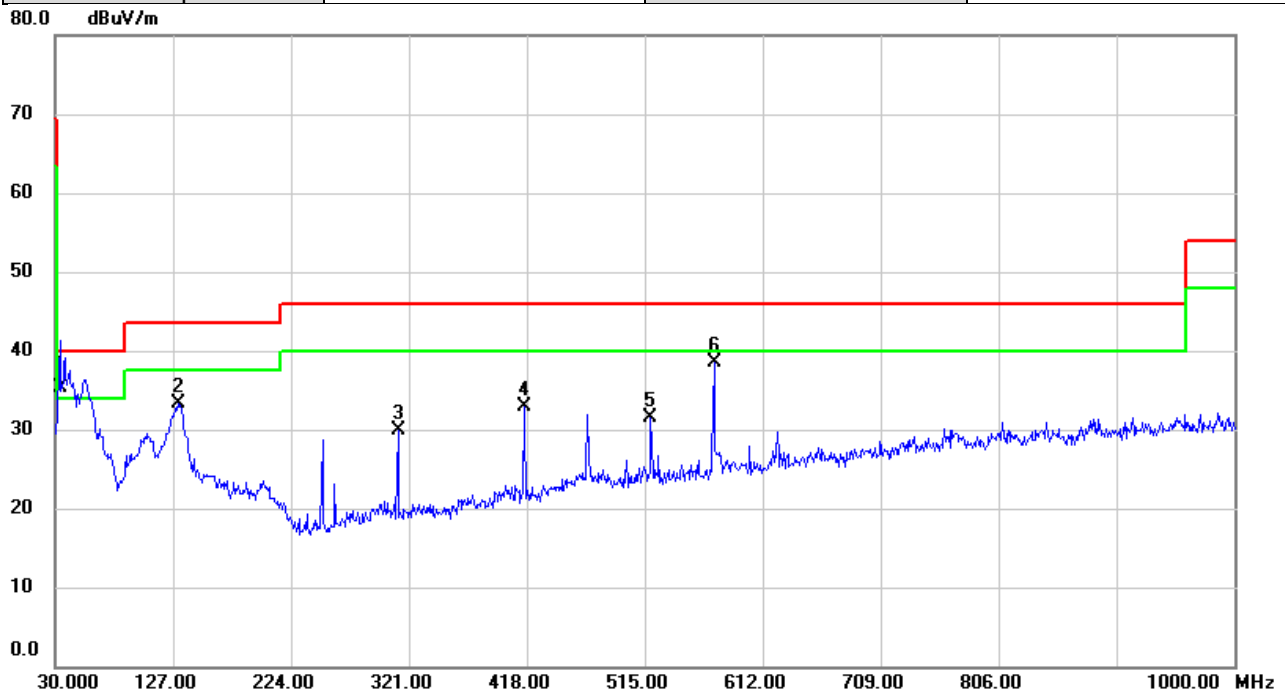


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	34.1387	47.93	-12.65	35.28	40.00	-4.72	QP	
2		131.7206	46.22	-13.01	33.21	43.50	-10.29	peak	
3		312.0113	40.49	-10.63	29.86	46.00	-16.14	peak	
4		415.9953	40.90	-8.01	32.89	46.00	-13.11	peak	
5		520.0117	37.31	-5.85	31.46	46.00	-14.54	peak	
6		572.0037	43.46	-4.88	38.58	46.00	-7.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/8
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	64%

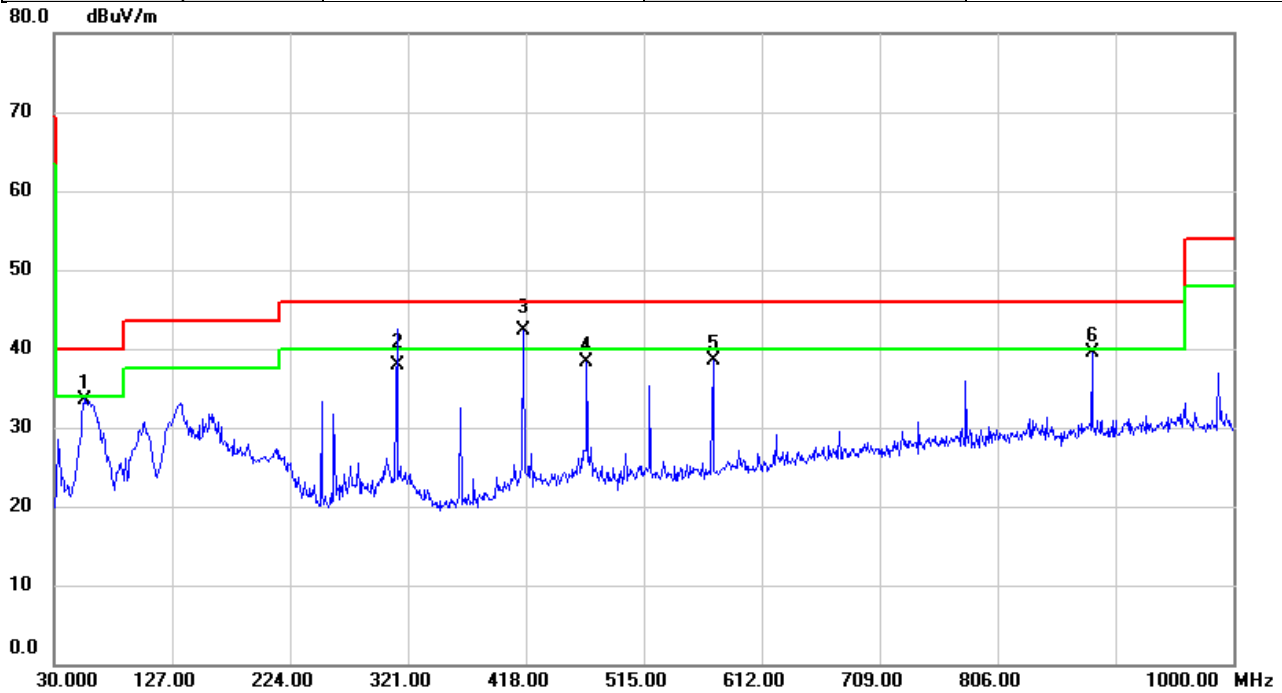


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		55.4463	45.41	-11.81	33.60	40.00	-6.40	peak	
2		312.0113	48.52	-10.63	37.89	46.00	-8.11	QP	
3	*	415.9953	50.26	-8.01	42.25	46.00	-3.75	QP	
4		467.9873	44.87	-6.64	38.23	46.00	-7.77	peak	
5		572.0036	43.31	-4.88	38.43	46.00	-7.57	peak	
6		883.9880	39.09	0.48	39.57	46.00	-6.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5180MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

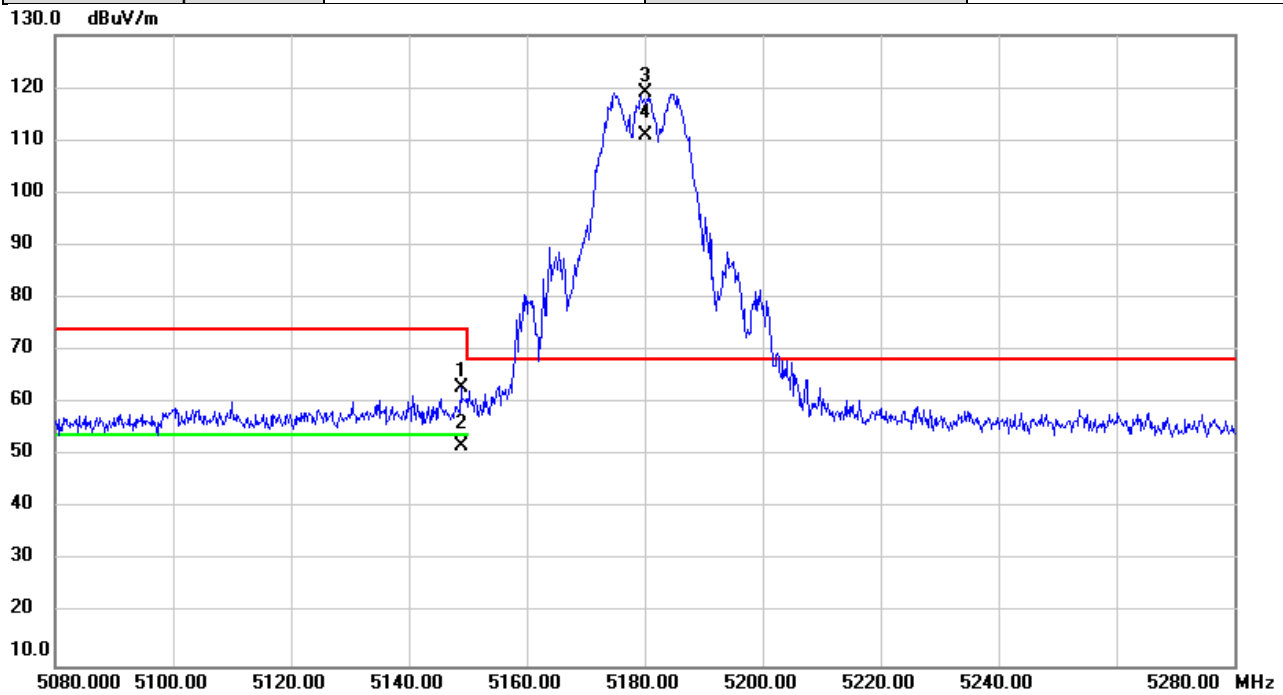


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.913	60.54	2.31	62.85	74.00	-11.15	peak	
2		5148.913	49.61	2.31	51.92	54.00	-2.08	AVG	
3	*	5180.000	116.74	2.29	119.03	68.20	50.83	peak	NoLimit
4	X	5180.000	108.80	2.29	111.09	68.20	42.89	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5200MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

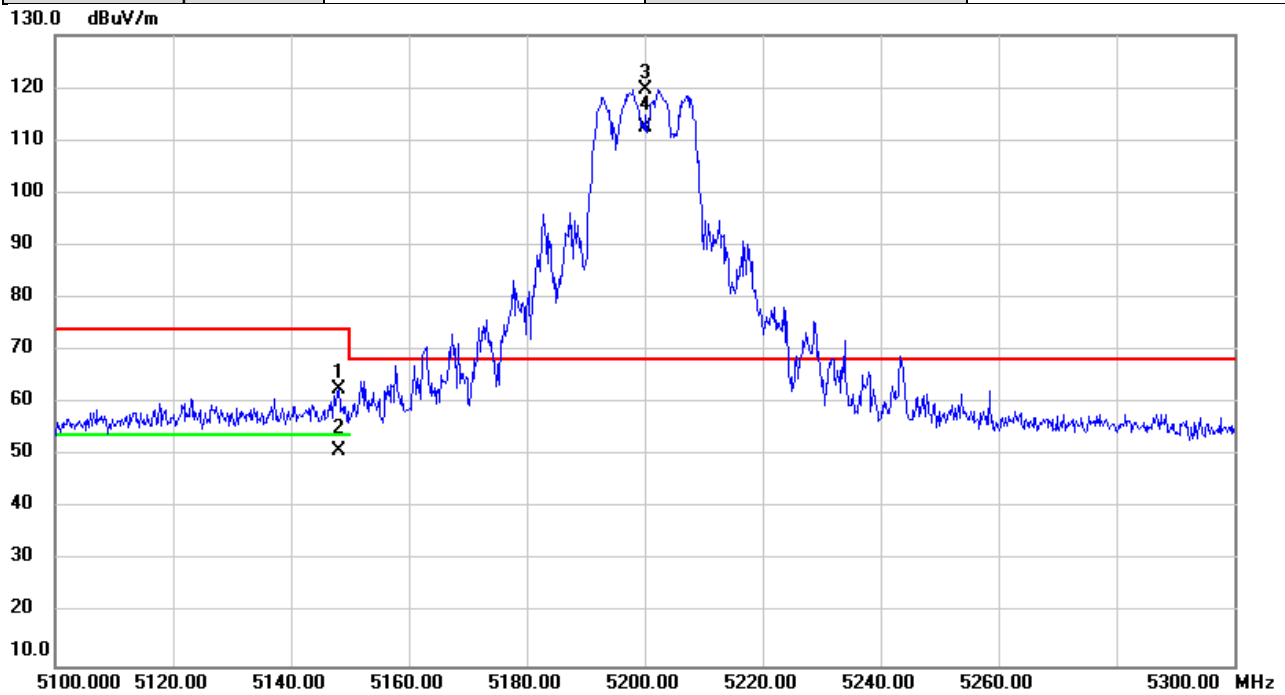


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.007	60.47	2.31	62.78	74.00	-11.22	peak	
2		5148.007	48.72	2.31	51.03	54.00	-2.97	AVG	
3	*	5200.000	117.51	2.28	119.79	68.20	51.59	peak	NoLimit
4	X	5200.000	110.03	2.28	112.31	68.20	44.11	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5240MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

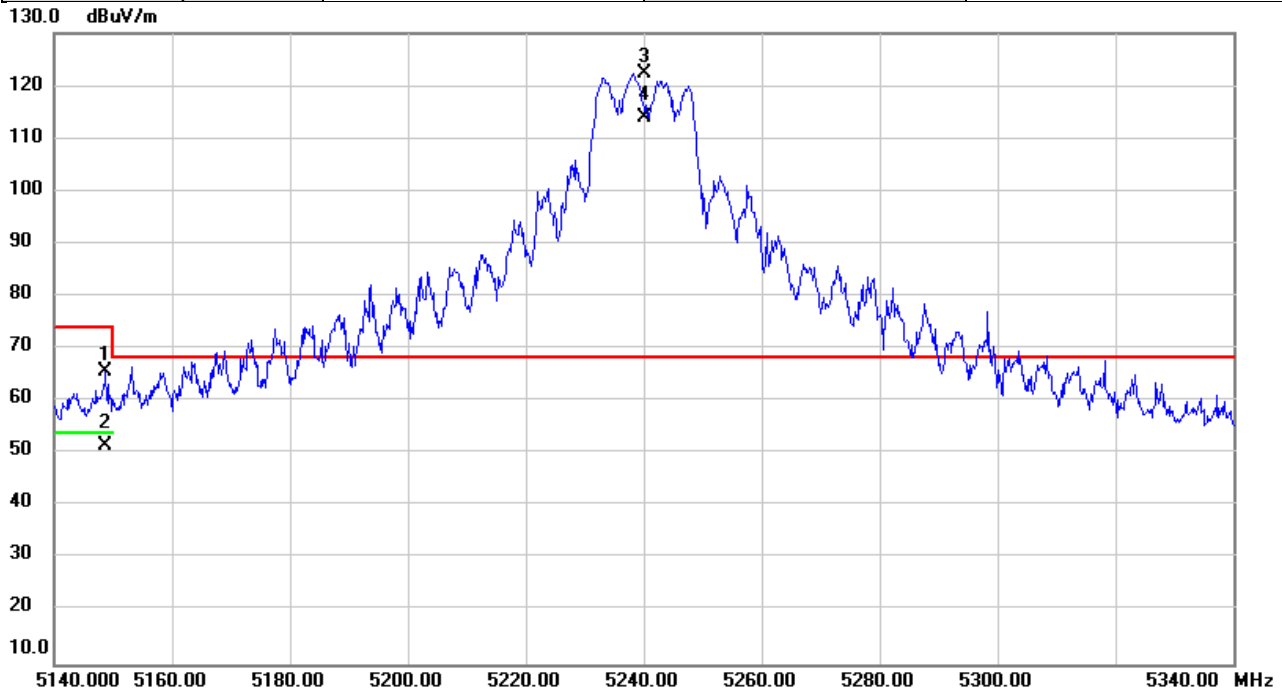


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.727	63.38	2.31	65.69	74.00	-8.31	peak	
2		5148.727	49.31	2.31	51.62	54.00	-2.38	AVG	
3	*	5240.000	120.08	2.26	122.34	68.20	54.14	peak	NoLimit
4	X	5240.000	111.81	2.26	114.07	68.20	45.87	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5260MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

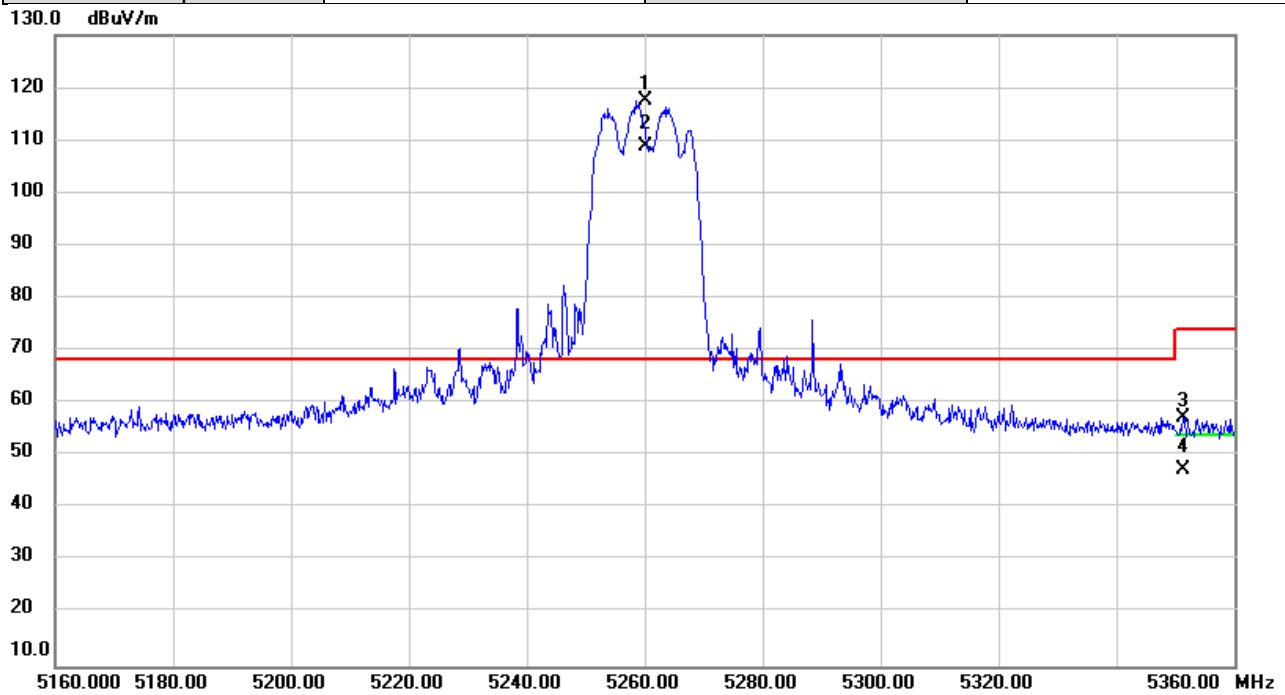


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	115.25	2.25	117.50	68.20	49.30	peak	NoLimit
2	X	5260.000	106.59	2.25	108.84	68.20	40.64	AVG	NoLimit
3		5351.400	55.15	2.20	57.35	74.00	-16.65	peak	
4		5351.400	45.14	2.20	47.34	54.00	-6.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5300MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

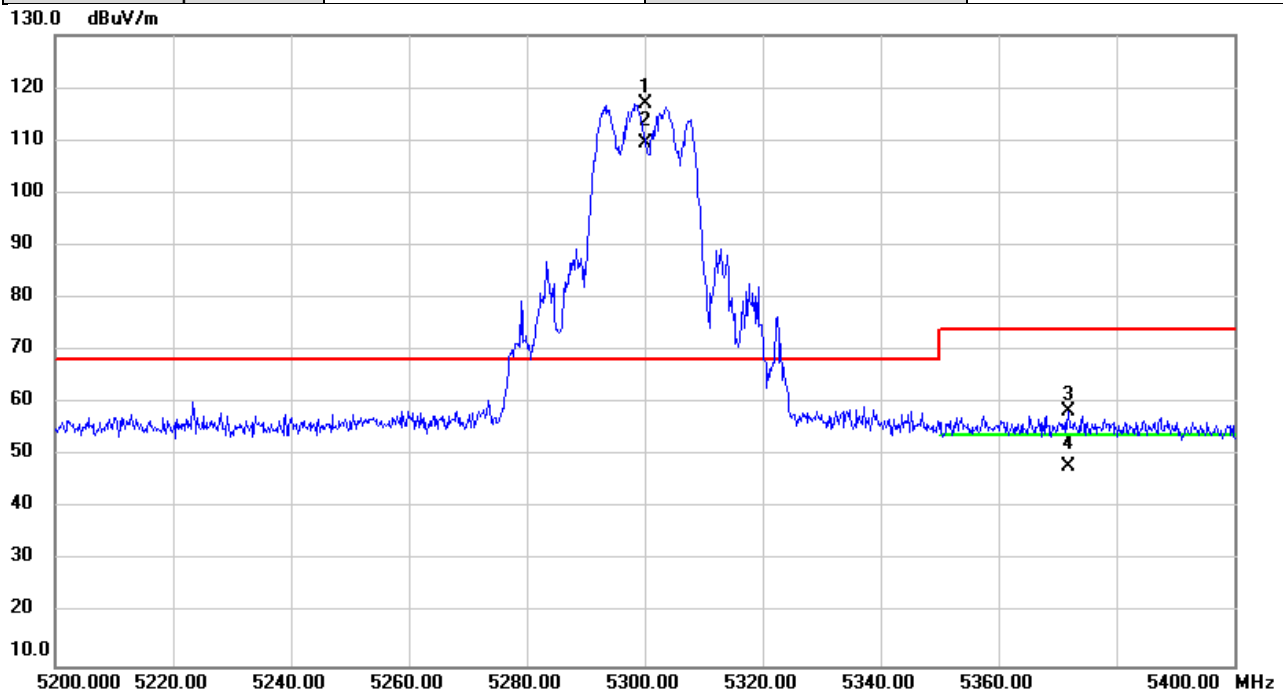


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5300.000	114.59	2.23	116.82	68.20	48.62	peak	NoLimit
2	X	5300.000	107.13	2.23	109.36	68.20	41.16	AVG	NoLimit
3		5371.840	56.16	2.19	58.35	74.00	-15.65	peak	
4		5371.840	45.75	2.19	47.94	54.00	-6.06	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5320MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

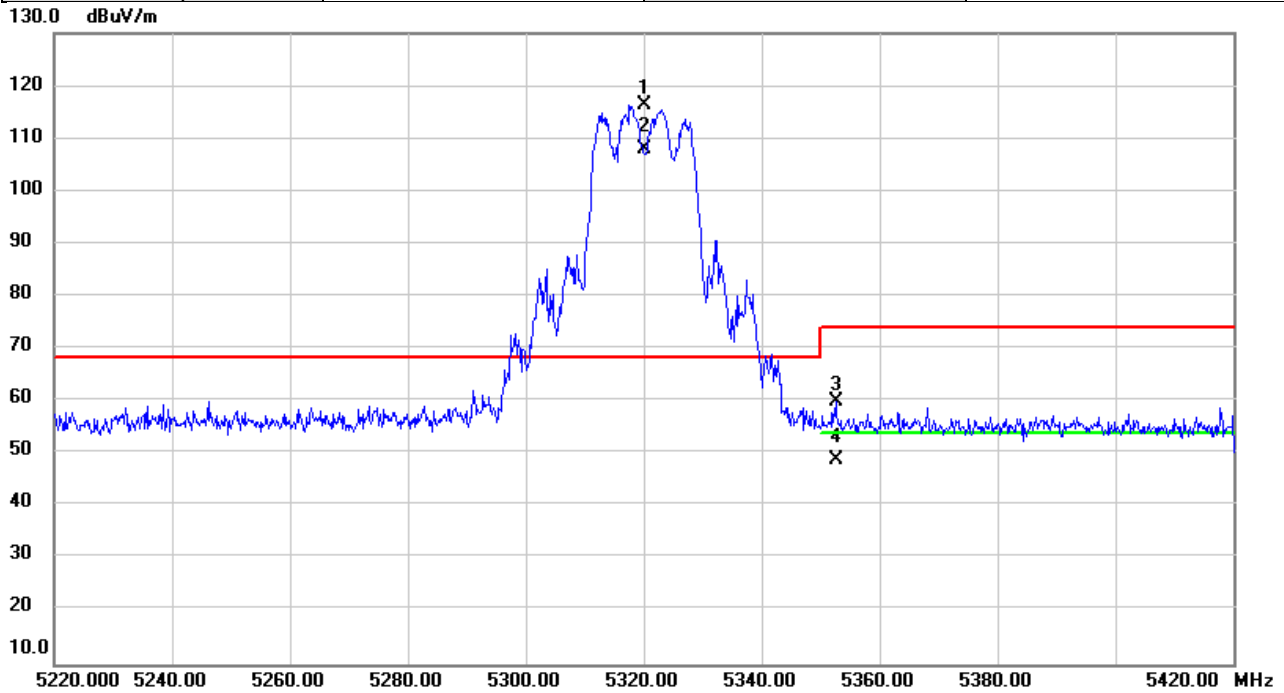


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	114.10	2.22	116.32	68.20	48.12	peak	NoLimit
2	X	5320.000	105.65	2.22	107.87	68.20	39.67	AVG	NoLimit
3		5352.573	57.64	2.20	59.84	74.00	-14.16	peak	
4		5352.573	46.63	2.20	48.83	54.00	-5.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5500MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

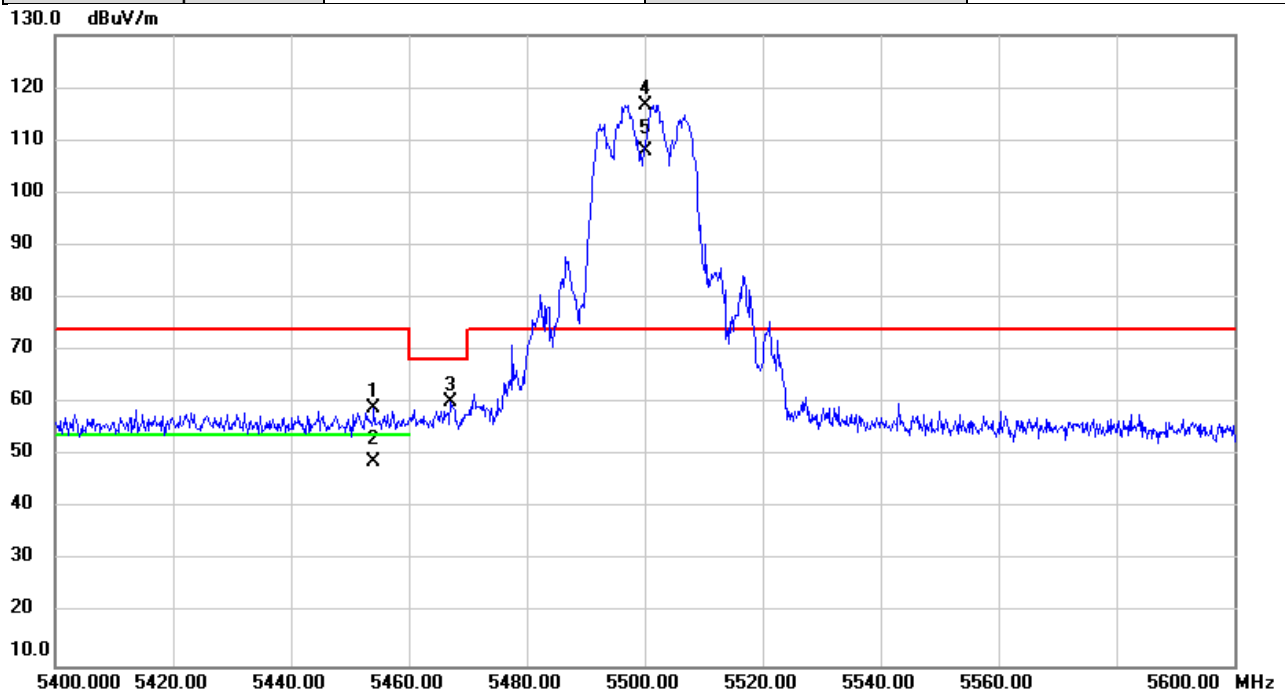


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5454.100	57.01	2.14	59.15	74.00	-14.85	peak	
2		5454.100	46.78	2.14	48.92	54.00	-5.08	AVG	
3		5467.100	58.08	2.14	60.22	68.20	-7.98	peak	
4	*	5500.000	114.55	2.12	116.67	74.00	42.67	peak	NoLimit
5	X	5500.000	105.73	2.12	107.85	74.00	33.85	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5580MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

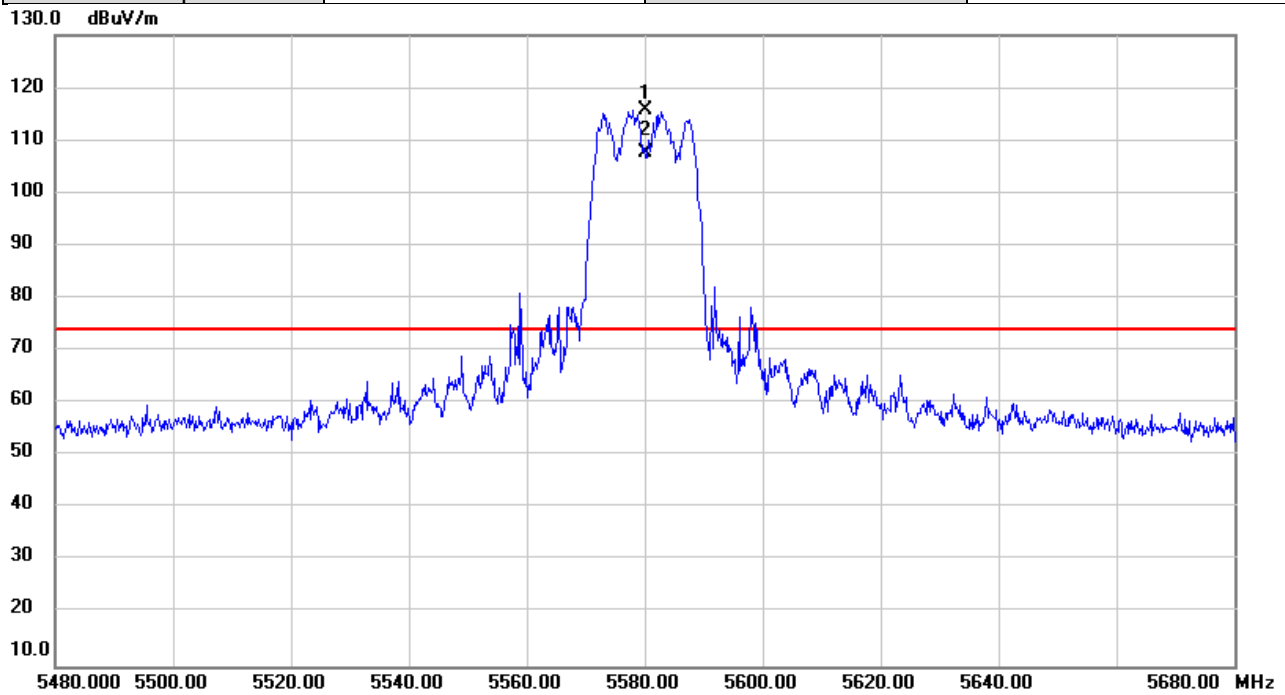


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5580.000	113.55	2.13	115.68	74.00	41.68	peak	NoLimit
2	X	5580.000	105.42	2.13	107.55	74.00	33.55	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5700MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

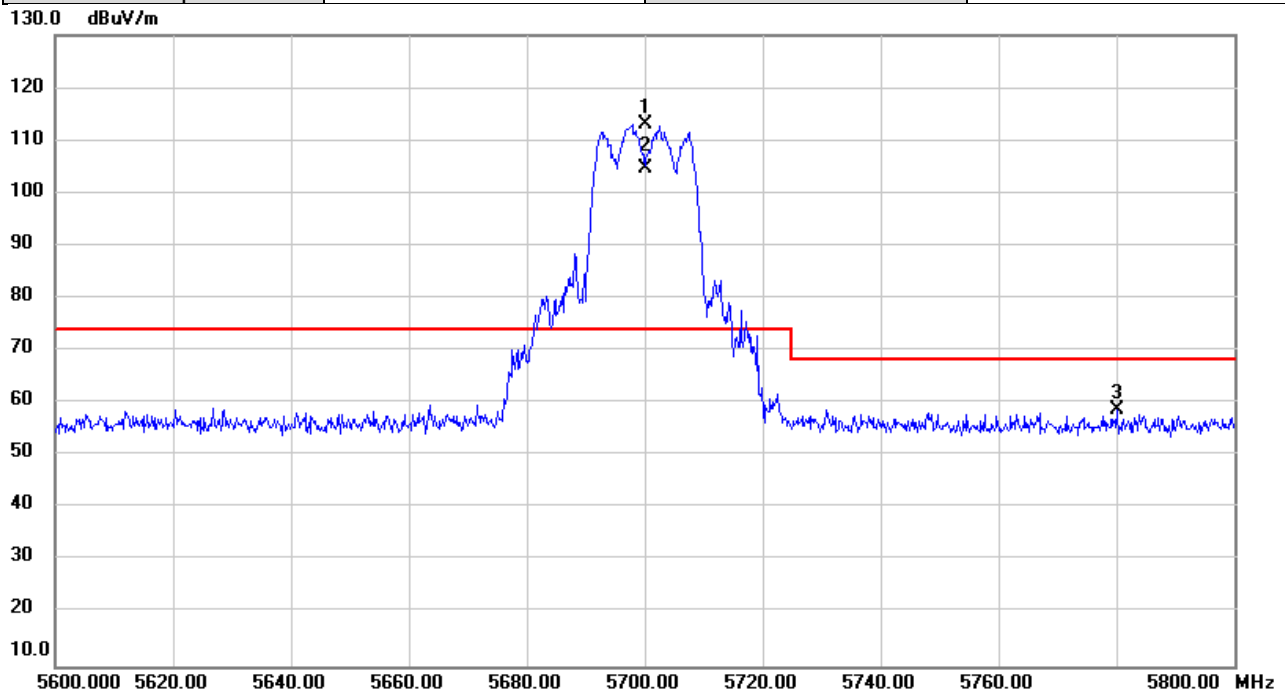


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	110.82	2.14	112.96	74.00	38.96	peak	NoLimit
2	X	5700.000	102.66	2.14	104.80	74.00	30.80	AVG	NoLimit
3		5780.173	56.61	2.15	58.76	68.20	-9.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5745MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

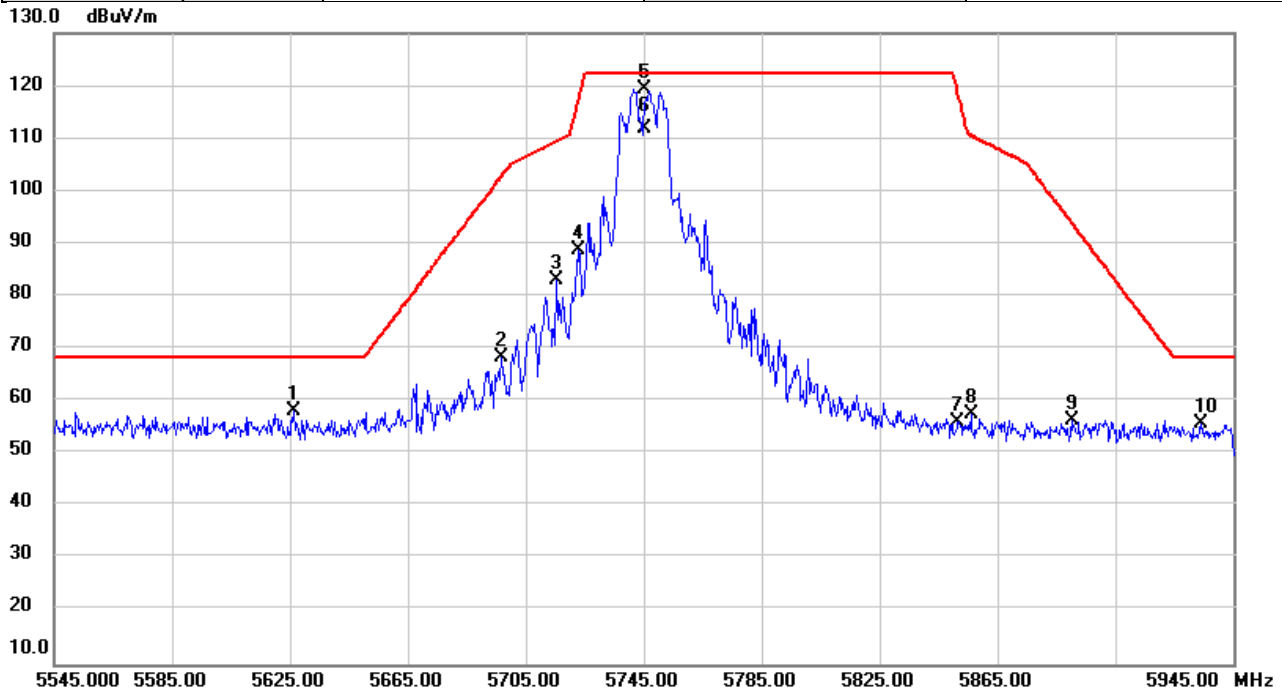


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5626.480	55.97	2.13	58.10	68.20	-10.10	peak	
2		5696.933	66.10	2.14	68.24	102.94	-34.70	peak	
3		5715.293	80.83	2.15	82.98	109.48	-26.50	peak	
4		5722.853	86.63	2.14	88.77	117.31	-28.54	peak	
5	*	5745.000	117.09	2.14	119.23	122.20	-2.97	peak	NoLimit
6		5745.000	109.65	2.14	111.79	122.20	-10.41	AVG	NoLimit
7		5851.587	54.02	2.15	56.17	118.58	-62.41	peak	
8		5856.000	55.28	2.16	57.44	110.52	-53.08	peak	
9		5890.147	54.33	2.16	56.49	93.96	-37.47	peak	
10		5933.840	53.55	2.16	55.71	68.20	-12.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5785MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

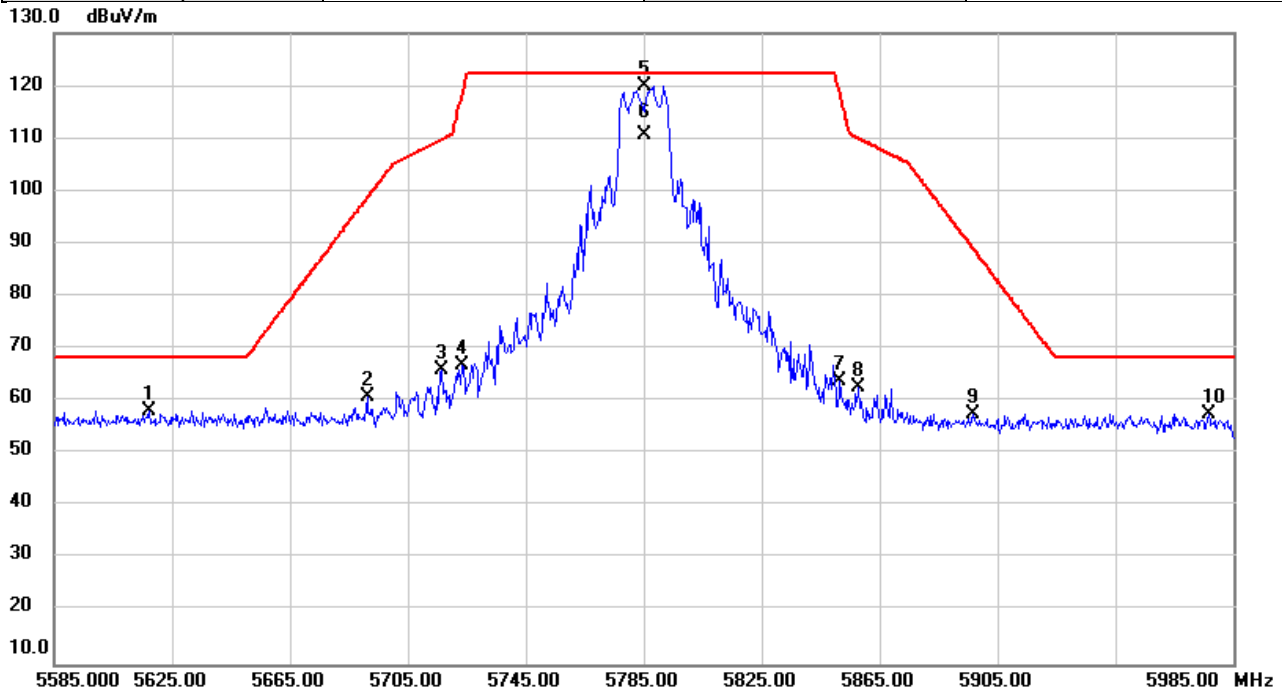


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5617.400	56.08	2.13	58.21	68.20	-9.99	peak	
2		5691.320	58.57	2.13	60.70	98.80	-38.10	peak	
3		5716.453	63.69	2.15	65.84	109.81	-43.97	peak	
4		5723.173	64.76	2.14	66.90	118.04	-51.14	peak	
5	*	5785.000	117.77	2.14	119.91	122.20	-2.29	peak	NoLimit
6		5785.000	108.61	2.14	110.75	122.20	-11.45	AVG	NoLimit
7		5851.440	61.70	2.15	63.85	118.92	-55.07	peak	
8		5857.813	60.63	2.16	62.79	110.01	-47.22	peak	
9		5896.893	55.47	2.17	57.64	88.96	-31.32	peak	
10		5976.600	55.39	2.17	57.56	68.20	-10.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/1
Test Frequency	5825MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

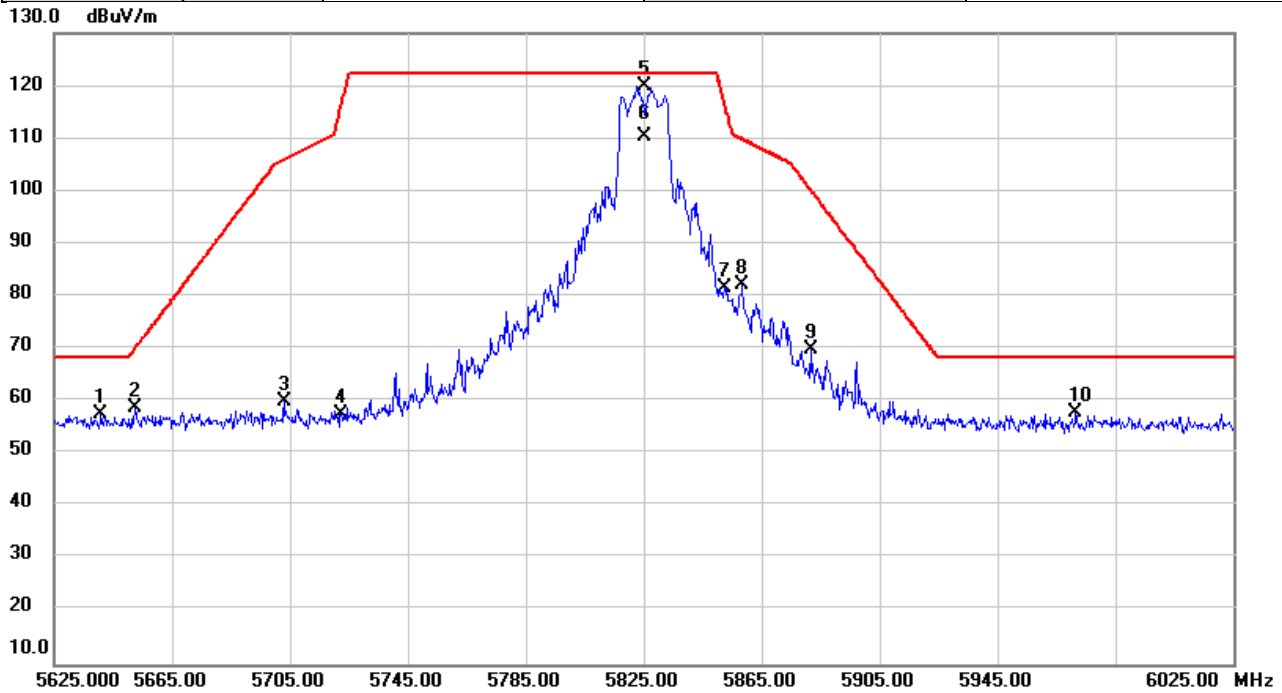


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5640.640	55.28	2.13	57.41	68.20	-10.79	peak	
2		5652.587	56.64	2.13	58.77	70.12	-11.35	peak	
3		5703.333	57.86	2.14	60.00	106.13	-46.13	peak	
4		5722.067	55.38	2.14	57.52	115.51	-57.99	peak	
5	*	5825.000	117.71	2.15	119.86	122.20	-2.34	peak	NoLimit
6		5825.000	108.15	2.15	110.30	122.20	-11.90	AVG	NoLimit
7		5852.547	79.45	2.15	81.60	116.39	-34.79	peak	
8		5858.507	80.09	2.16	82.25	109.82	-27.57	peak	
9		5881.613	67.78	2.16	69.94	100.29	-30.35	peak	
10		5971.440	55.66	2.17	57.83	68.20	-10.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5180MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

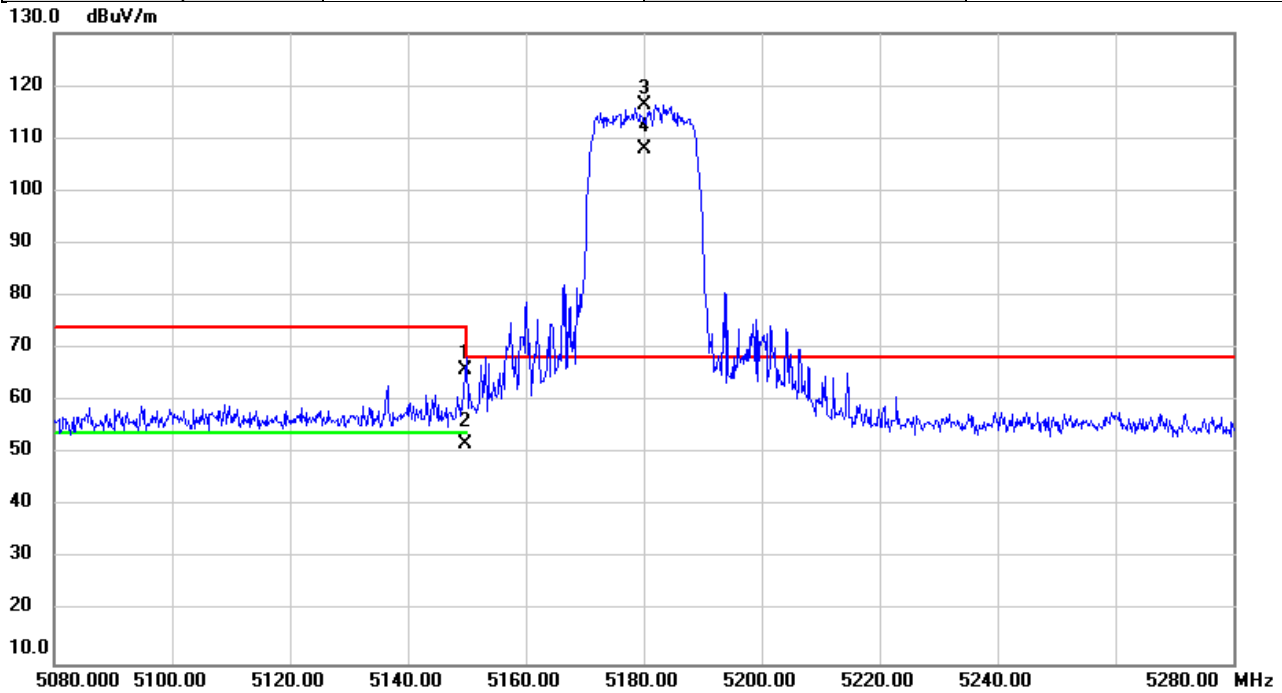


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5149.787	63.67	2.31	65.98	74.00	-8.02	peak	
2		5149.787	49.52	2.31	51.83	54.00	-2.17	AVG	
3	*	5180.000	114.19	2.29	116.48	68.20	48.28	peak	NoLimit
4	X	5180.000	105.58	2.29	107.87	68.20	39.67	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5200MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

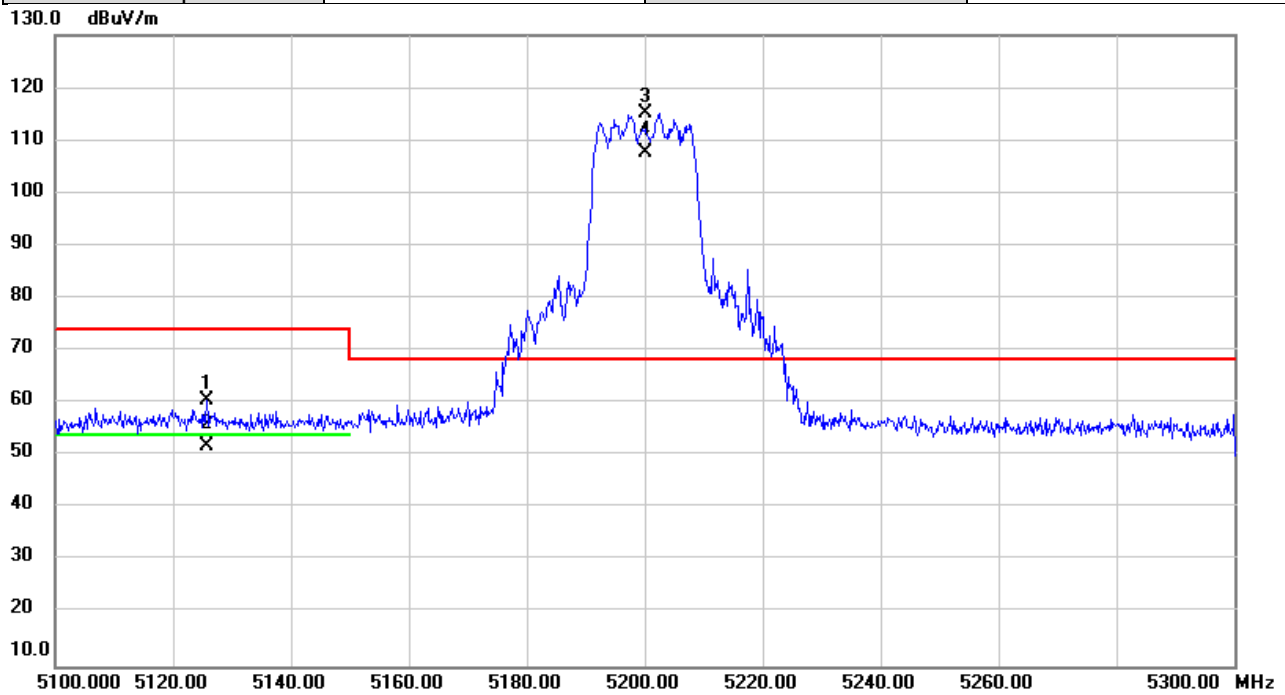


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5125.720	58.26	2.32	60.58	74.00	-13.42	peak	
2		5125.720	49.53	2.32	51.85	54.00	-2.15	AVG	
3	*	5200.000	112.81	2.28	115.09	68.20	46.89	peak	NoLimit
4	X	5200.000	105.43	2.28	107.71	68.20	39.51	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5240MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

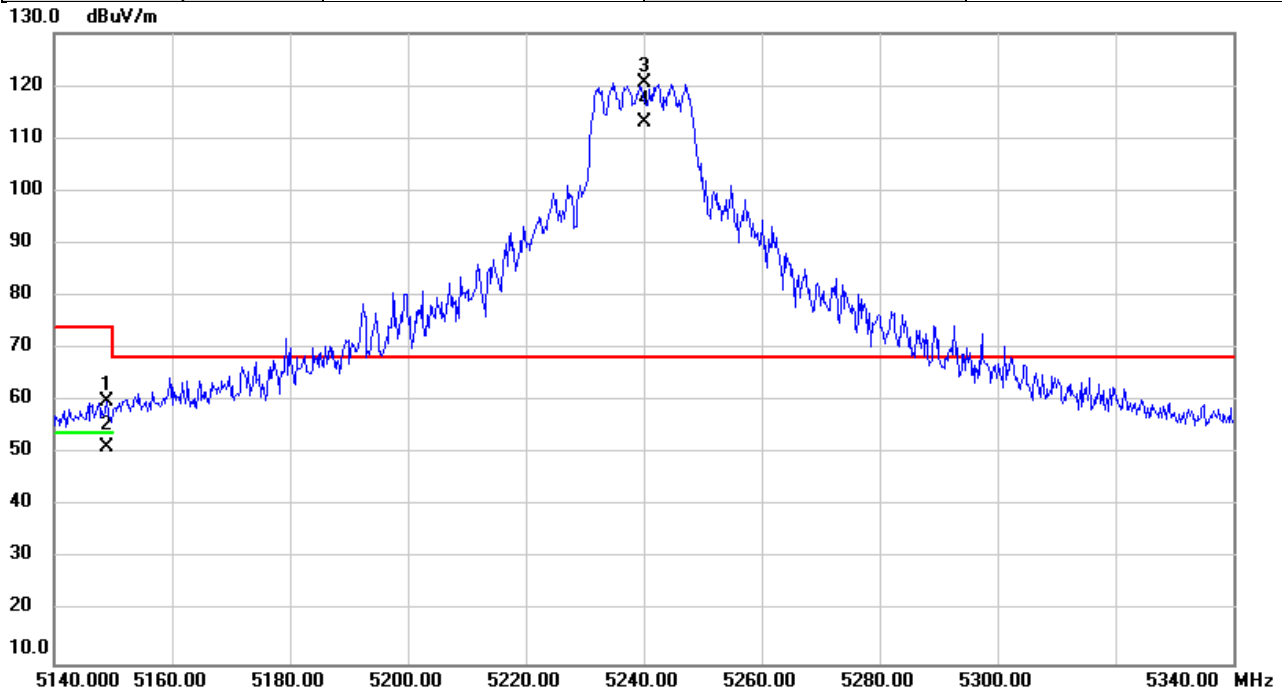


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.947	57.71	2.31	60.02	74.00	-13.98	peak	
2		5148.947	48.89	2.31	51.20	54.00	-2.80	AVG	
3	*	5240.000	118.21	2.26	120.47	68.20	52.27	peak	NoLimit
4	X	5240.000	110.88	2.26	113.14	68.20	44.94	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5260MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

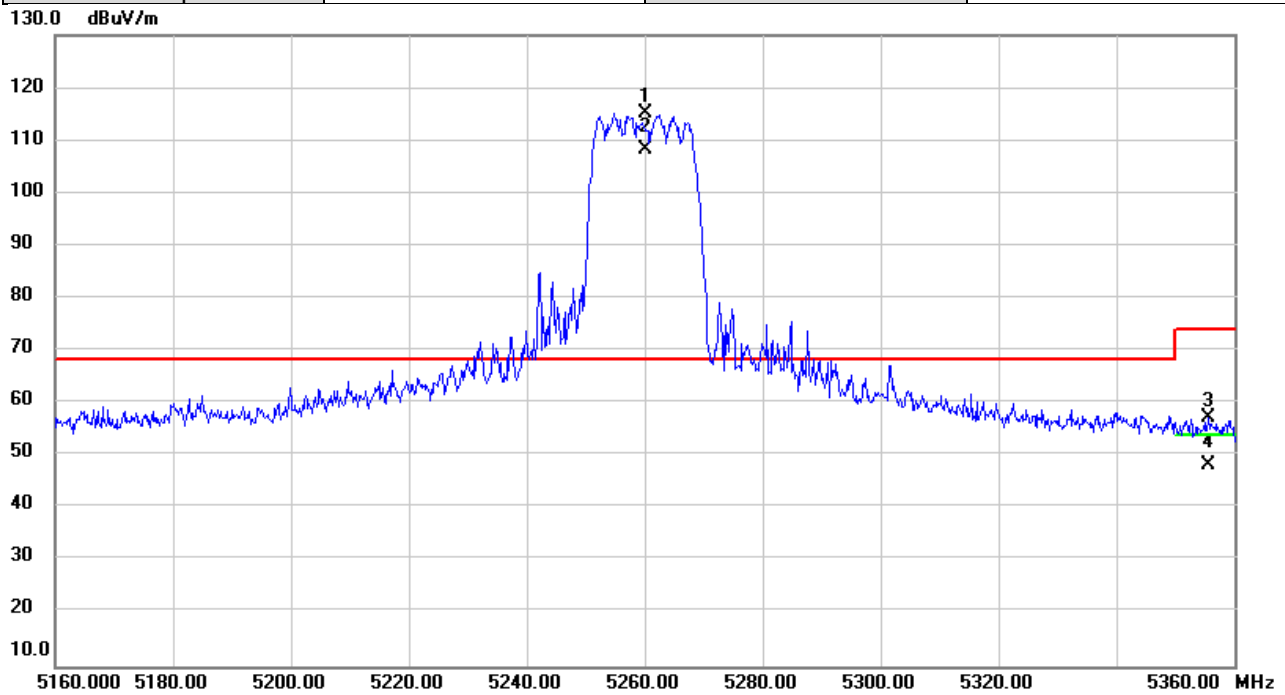


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	112.94	2.25	115.19	68.20	46.99	peak	NoLimit
2	X	5260.000	105.89	2.25	108.14	68.20	39.94	AVG	NoLimit
3		5355.620	54.93	2.20	57.13	74.00	-16.87	peak	
4		5355.620	45.94	2.20	48.14	54.00	-5.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5300MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

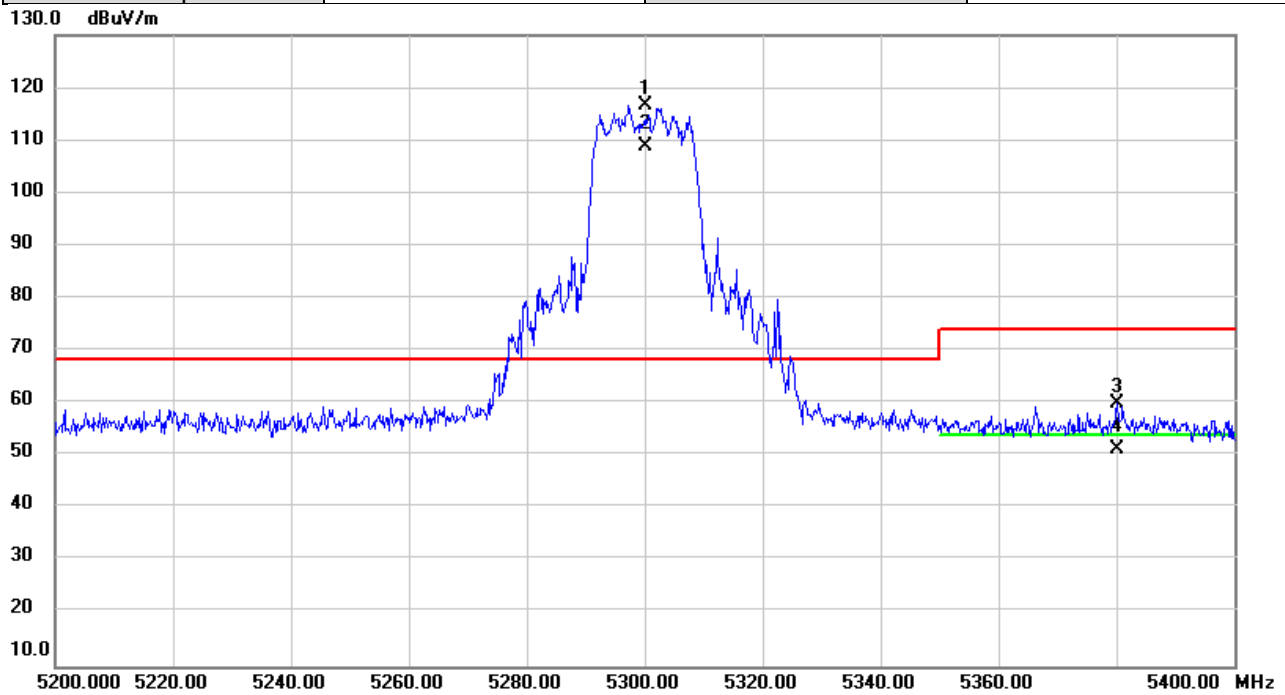


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5300.000	114.28	2.23	116.51	68.20	48.31	peak	NoLimit
2	X	5300.000	106.61	2.23	108.84	68.20	40.64	AVG	NoLimit
3		5380.113	57.72	2.18	59.90	74.00	-14.10	peak	
4		5380.113	49.15	2.18	51.33	54.00	-2.67	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5320MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

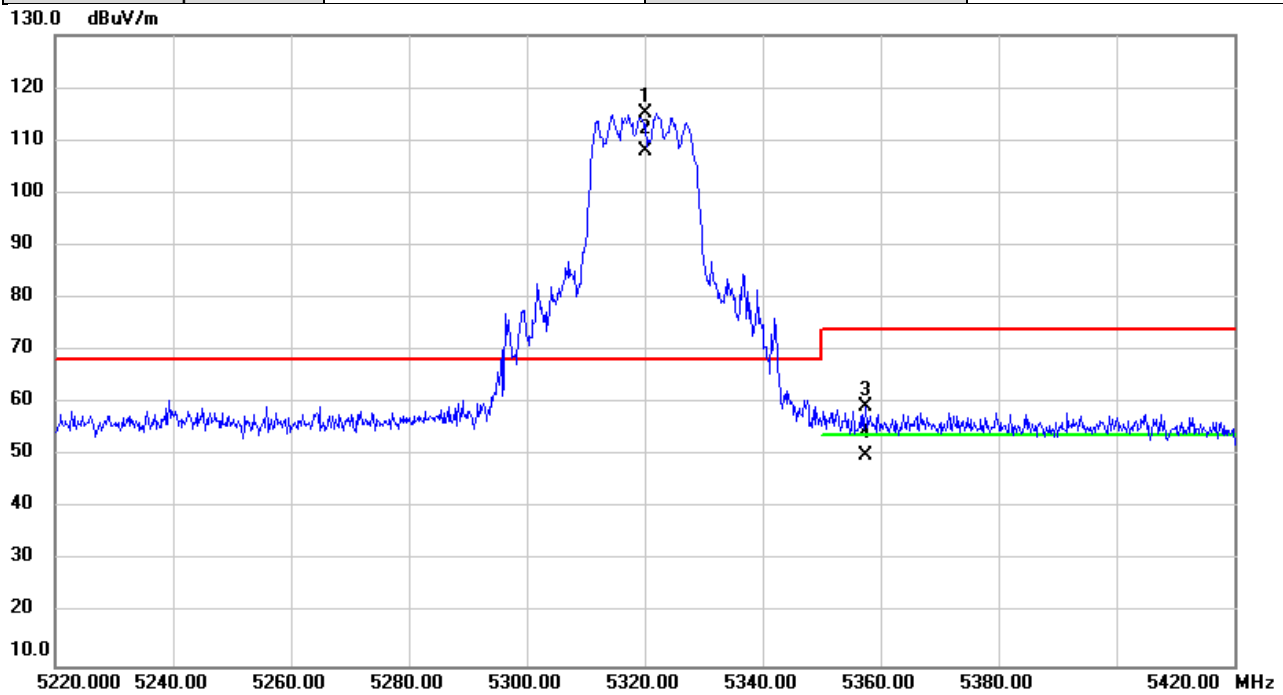


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	112.87	2.22	115.09	68.20	46.89	peak	NoLimit
2	X	5320.000	105.79	2.22	108.01	68.20	39.81	AVG	NoLimit
3		5357.467	57.16	2.20	59.36	74.00	-14.64	peak	
4		5357.467	47.90	2.20	50.10	54.00	-3.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5500MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

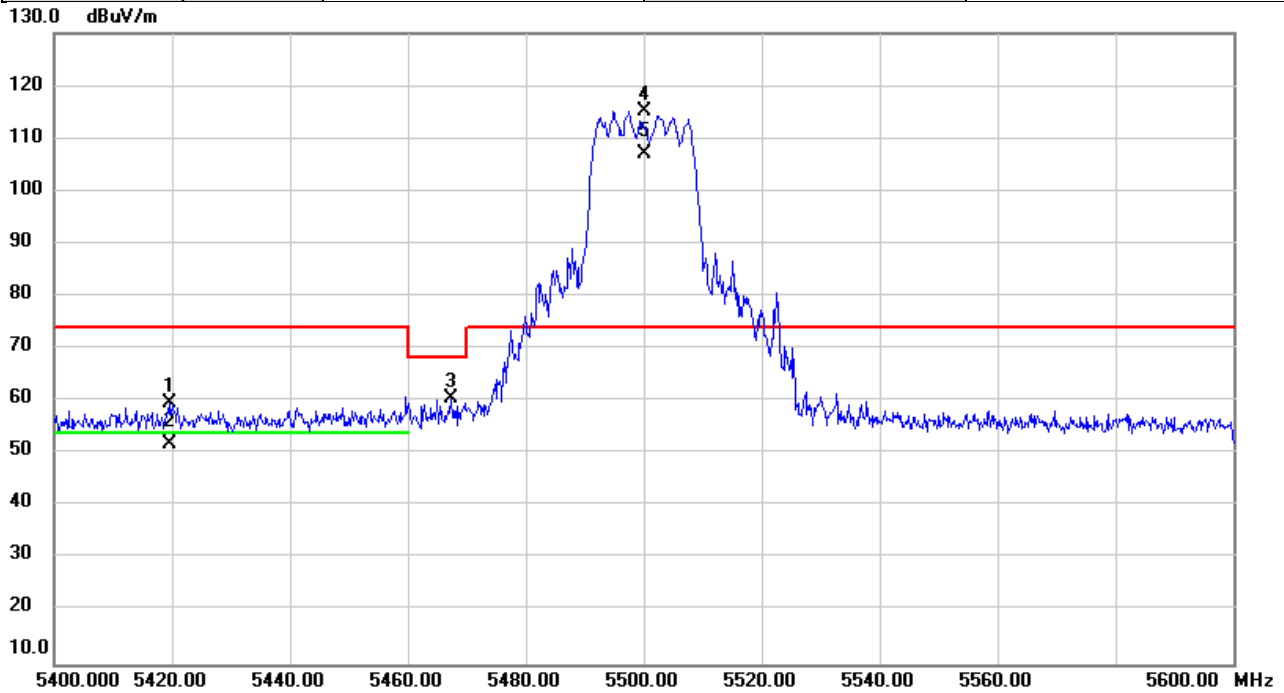


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5419.513	57.35	2.17	59.52	74.00	-14.48	peak	
2		5419.513	49.69	2.17	51.86	54.00	-2.14	AVG	
3		5467.353	58.28	2.14	60.42	68.20	-7.78	peak	
4	*	5500.000	113.10	2.12	115.22	74.00	41.22	peak	NoLimit
5	X	5500.000	105.04	2.12	107.16	74.00	33.16	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5700MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

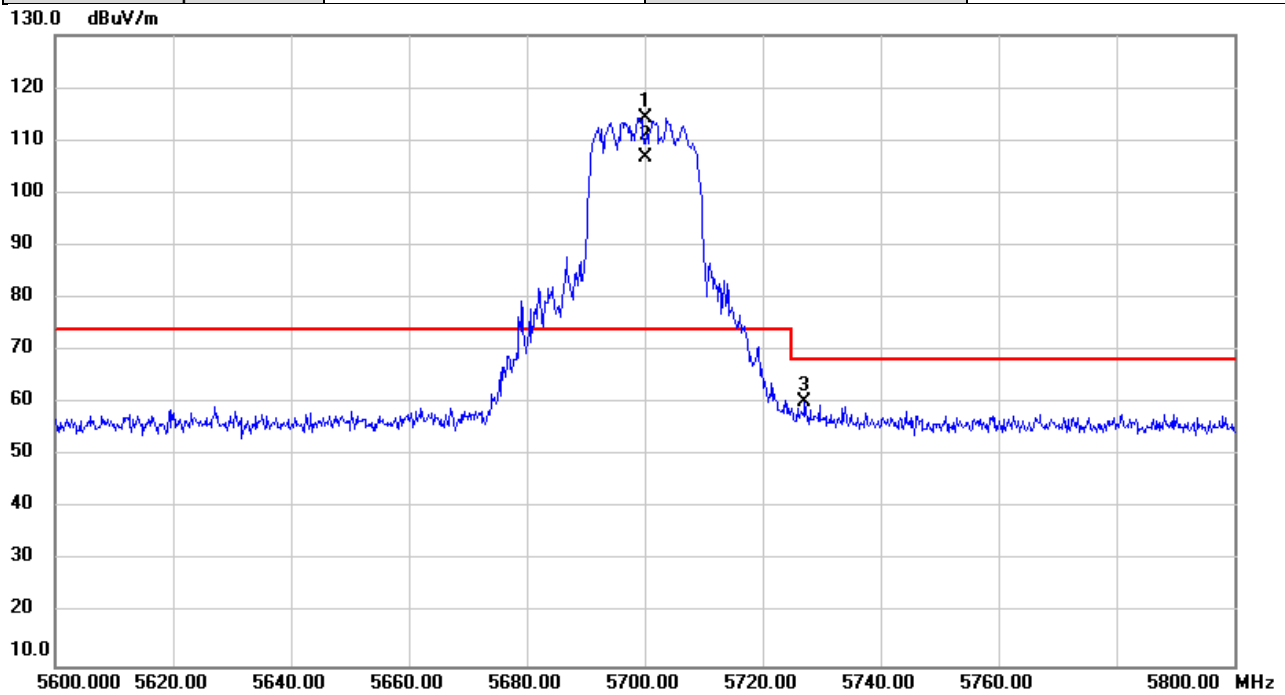


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	112.10	2.14	114.24	74.00	40.24	peak	NoLimit
2	X	5700.000	104.61	2.14	106.75	74.00	32.75	AVG	NoLimit
3		5727.053	58.24	2.14	60.38	68.20	-7.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5745MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

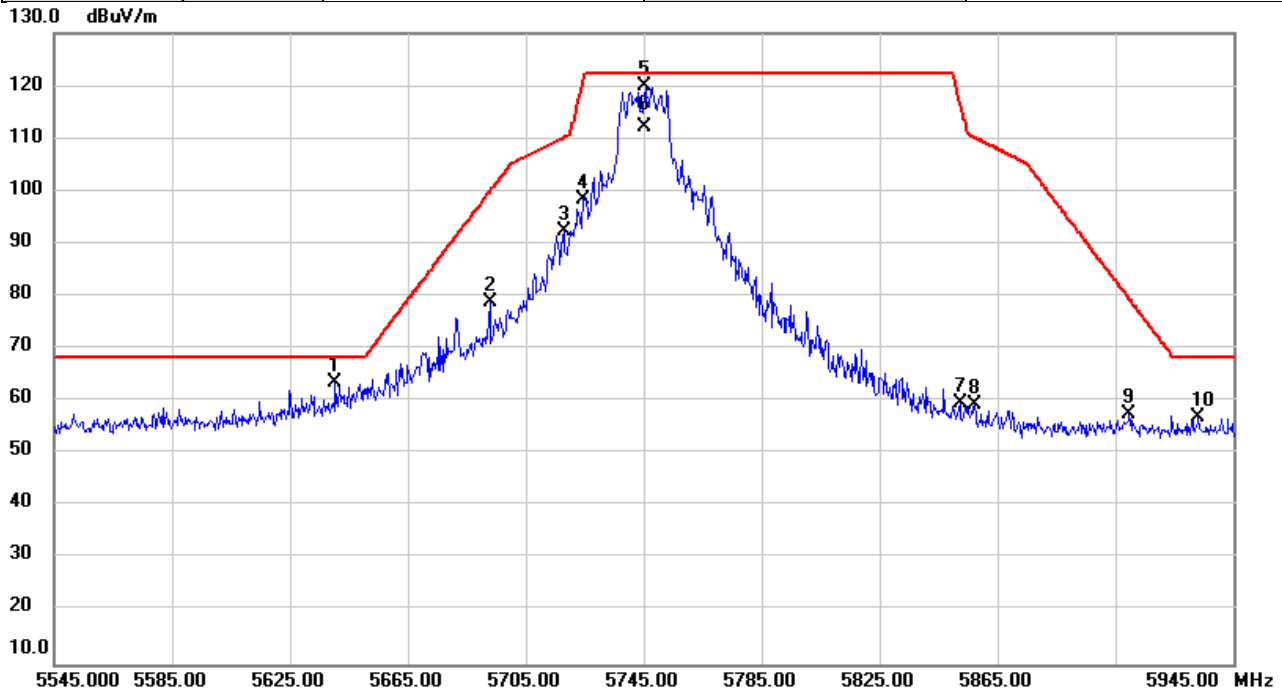


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5640.413	61.35	2.13	63.48	68.20	-4.72	peak	
2		5692.813	76.68	2.13	78.81	99.90	-21.09	peak	
3		5717.933	90.26	2.14	92.40	110.22	-17.82	peak	
4		5724.493	96.08	2.14	98.22	121.04	-22.82	peak	
5	*	5745.000	117.75	2.14	119.89	122.20	-2.31	peak	NoLimit
6		5745.000	110.11	2.14	112.25	122.20	-9.95	AVG	NoLimit
7		5852.520	57.44	2.15	59.59	116.45	-56.86	peak	
8		5857.267	57.25	2.16	59.41	110.16	-50.75	peak	
9		5909.653	55.51	2.16	57.67	79.52	-21.85	peak	
10		5933.027	54.76	2.16	56.92	68.20	-11.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5785MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

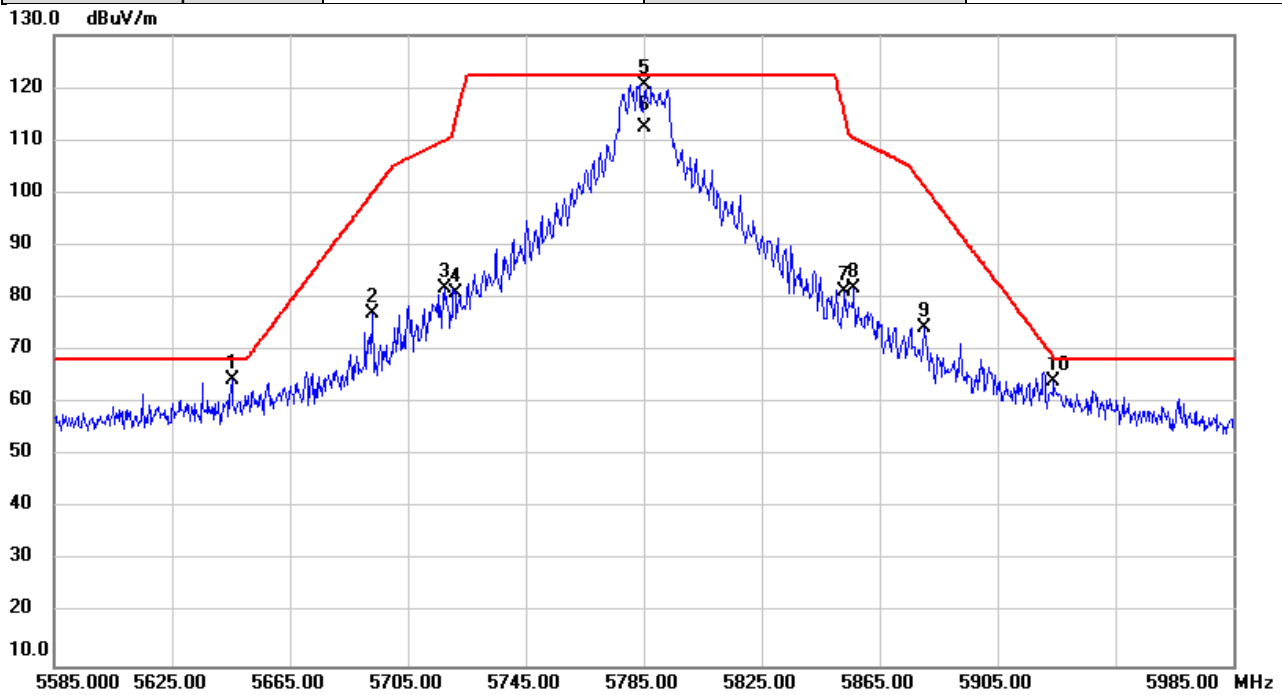


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5645.347	62.23	2.13	64.36	68.20	-3.84	peak	
2		5693.160	74.86	2.13	76.99	100.16	-23.17	peak	
3		5717.427	79.70	2.14	81.84	110.08	-28.24	peak	
4		5721.000	78.71	2.14	80.85	113.08	-32.23	peak	
5	*	5785.000	118.34	2.14	120.48	122.20	-1.72	peak	NoLimit
6		5785.000	110.26	2.14	112.40	122.20	-9.80	AVG	NoLimit
7		5853.027	79.07	2.15	81.22	115.30	-34.08	peak	
8		5856.213	79.65	2.16	81.81	110.46	-28.65	peak	
9		5880.080	72.30	2.16	74.46	101.43	-26.97	peak	
10		5924.200	61.88	2.17	64.05	68.79	-4.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/1
Test Frequency	5825MHz	Polarization	Vertical
Temp	22°C	Hum.	56%

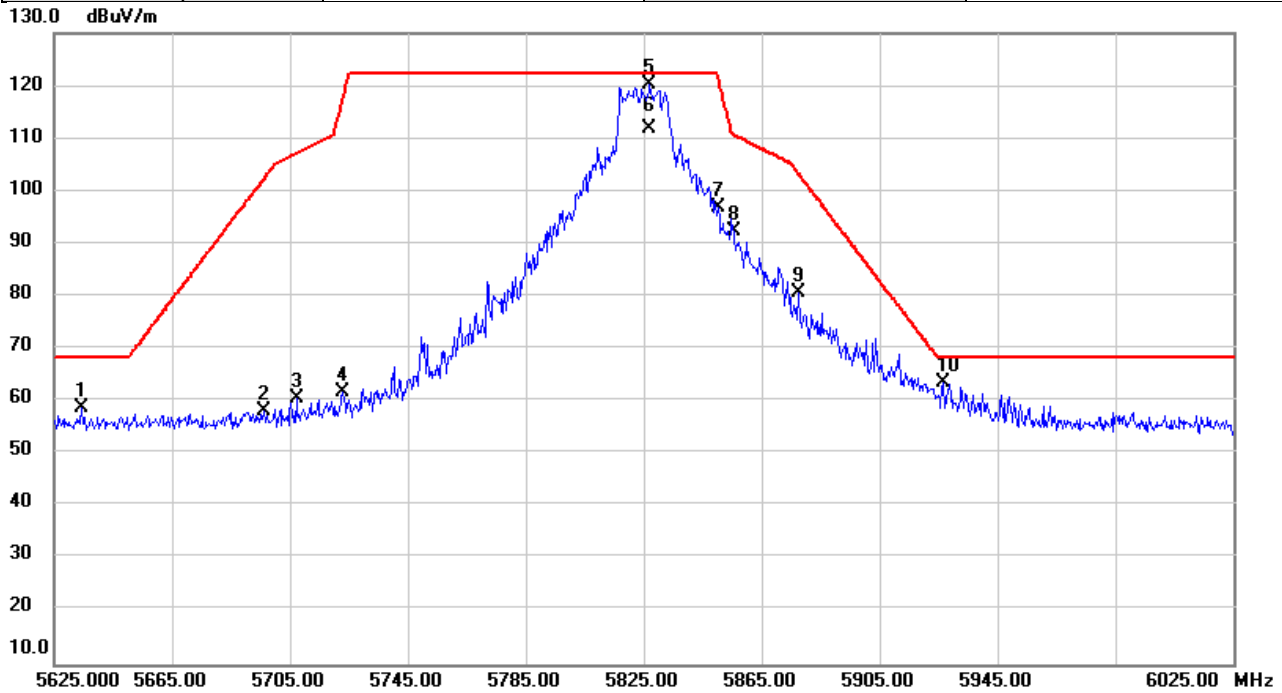


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5634.280	56.66	2.13	58.79	68.20	-9.41	peak	
2		5695.960	56.04	2.14	58.18	102.22	-44.04	peak	
3		5707.267	58.29	2.14	60.43	107.24	-46.81	peak	
4		5722.987	59.48	2.14	61.62	117.61	-55.99	peak	
5	*	5827.027	118.07	2.15	120.22	122.20	-1.98	peak	NoLimit
6		5827.027	109.65	2.15	111.80	122.20	-10.40	AVG	NoLimit
7		5850.360	94.79	2.15	96.94	121.38	-24.44	peak	
8		5855.440	90.10	2.16	92.26	110.68	-18.42	peak	
9		5877.600	78.46	2.15	80.61	103.27	-22.66	peak	
10		5926.787	61.51	2.16	63.67	68.20	-4.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5190MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

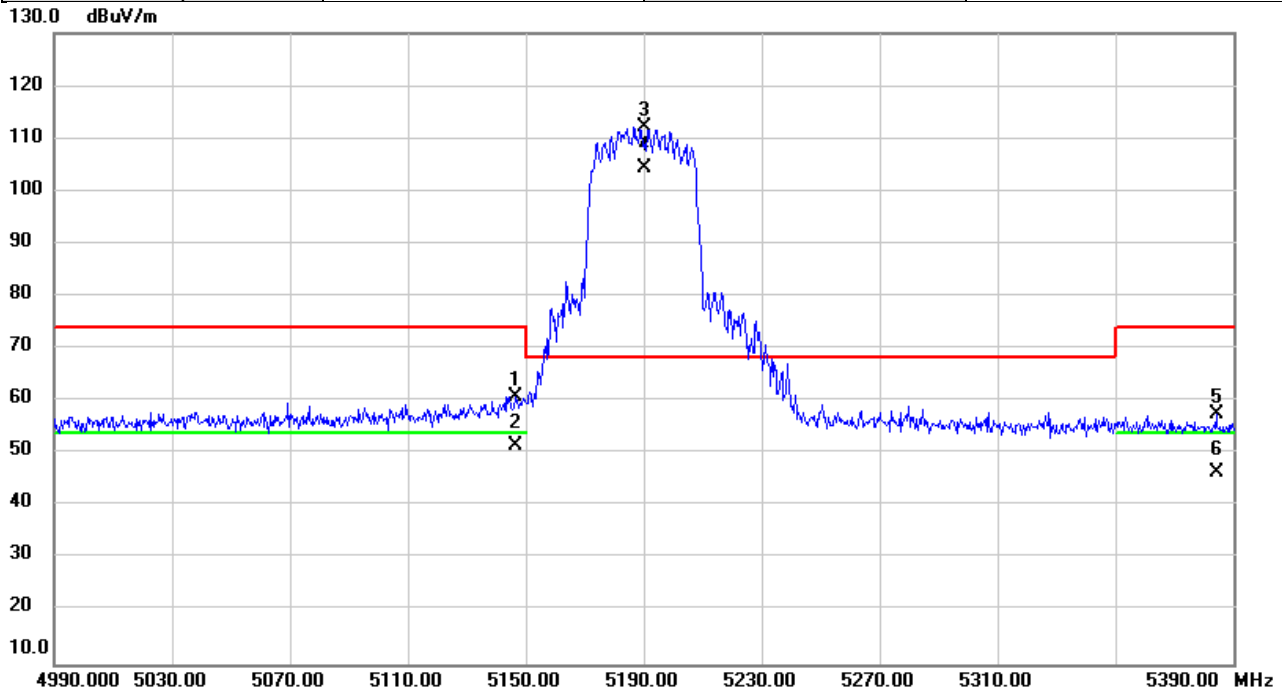


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.320	58.69	2.31	61.00	74.00	-13.00	peak	
2		5146.320	49.36	2.31	51.67	54.00	-2.33	AVG	
3	*	5190.000	109.83	2.28	112.11	68.20	43.91	peak	NoLimit
4	X	5190.000	102.16	2.28	104.44	68.20	36.24	AVG	NoLimit
5		5384.347	55.43	2.18	57.61	74.00	-16.39	peak	
6		5384.347	44.19	2.18	46.37	54.00	-7.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5230MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

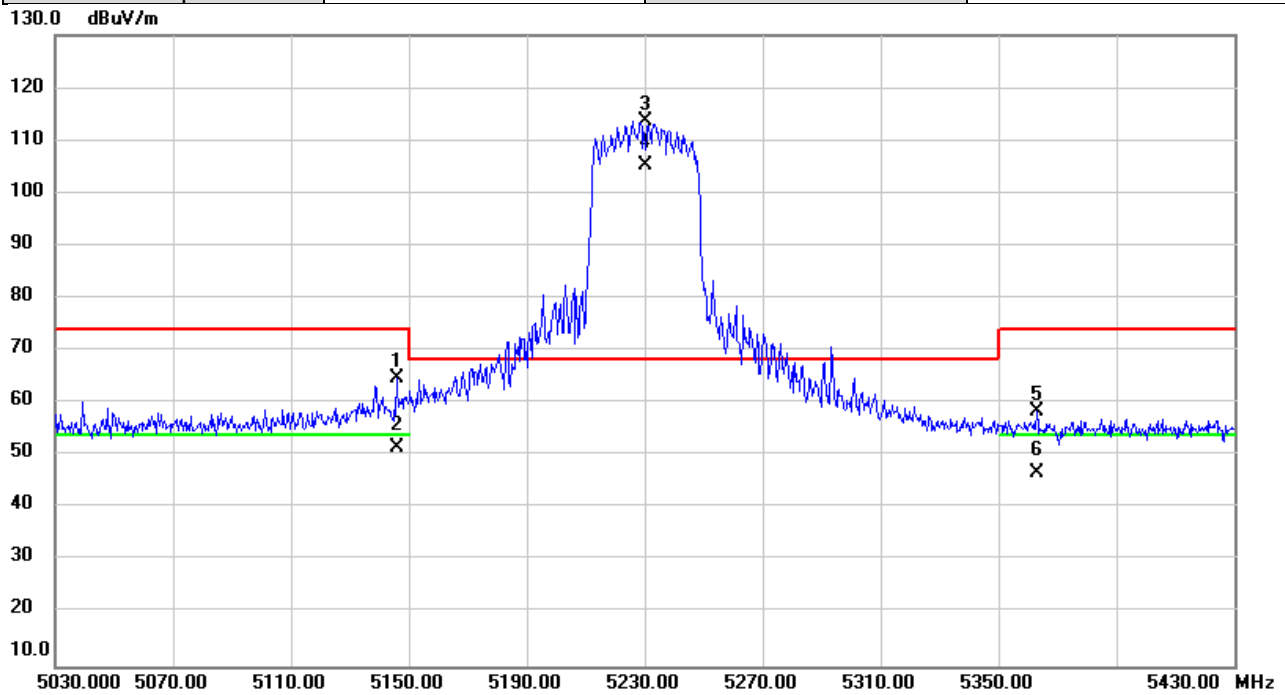


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.947	62.57	2.31	64.88	74.00	-9.12	peak	
2		5145.947	49.19	2.31	51.50	54.00	-2.50	AVG	
3	*	5230.000	111.29	2.26	113.55	68.20	45.35	peak	NoLimit
4	X	5230.000	103.13	2.26	105.39	68.20	37.19	AVG	NoLimit
5		5362.880	56.12	2.20	58.32	74.00	-15.68	peak	
6		5362.880	44.45	2.20	46.65	54.00	-7.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5270MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

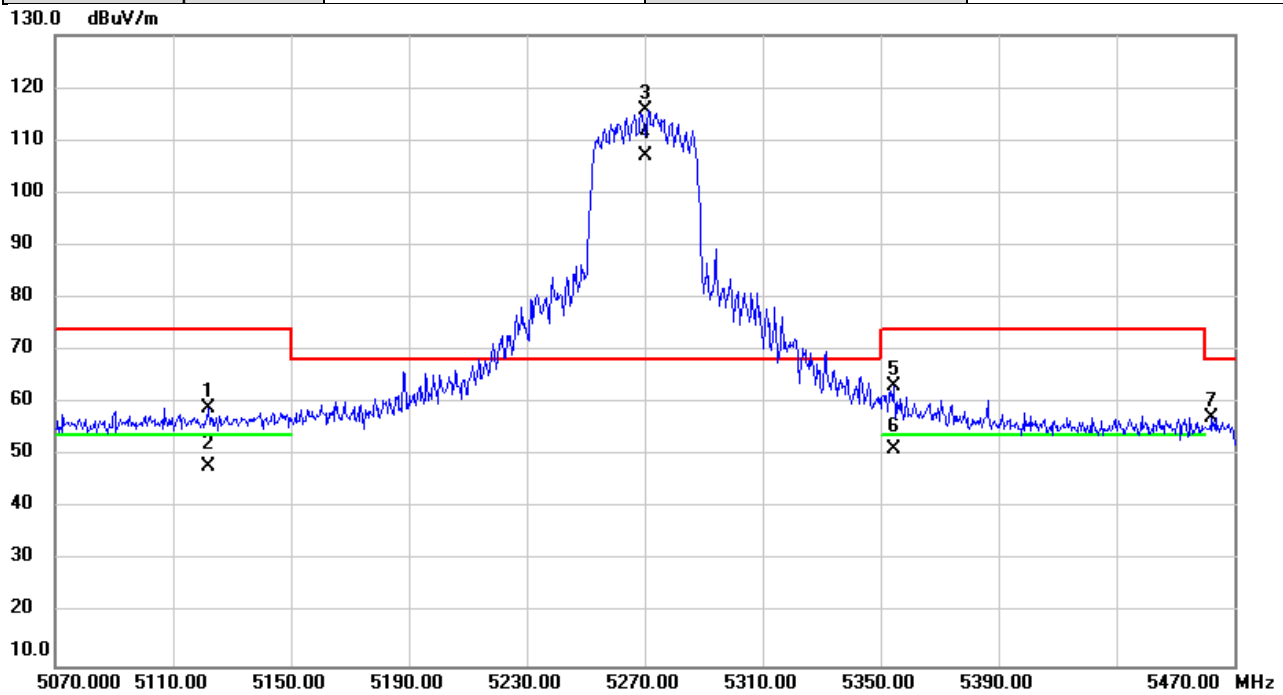


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5121.773	56.84	2.33	59.17	74.00	-14.83	peak	
2		5121.773	45.74	2.33	48.07	54.00	-5.93	AVG	
3	*	5270.000	113.46	2.25	115.71	68.20	47.51	peak	NoLimit
4	X	5270.000	104.87	2.25	107.12	68.20	38.92	AVG	NoLimit
5		5354.373	60.92	2.20	63.12	74.00	-10.88	peak	
6		5354.373	48.97	2.20	51.17	54.00	-2.83	AVG	
7		5462.507	55.13	2.14	57.27	68.20	-10.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5310MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

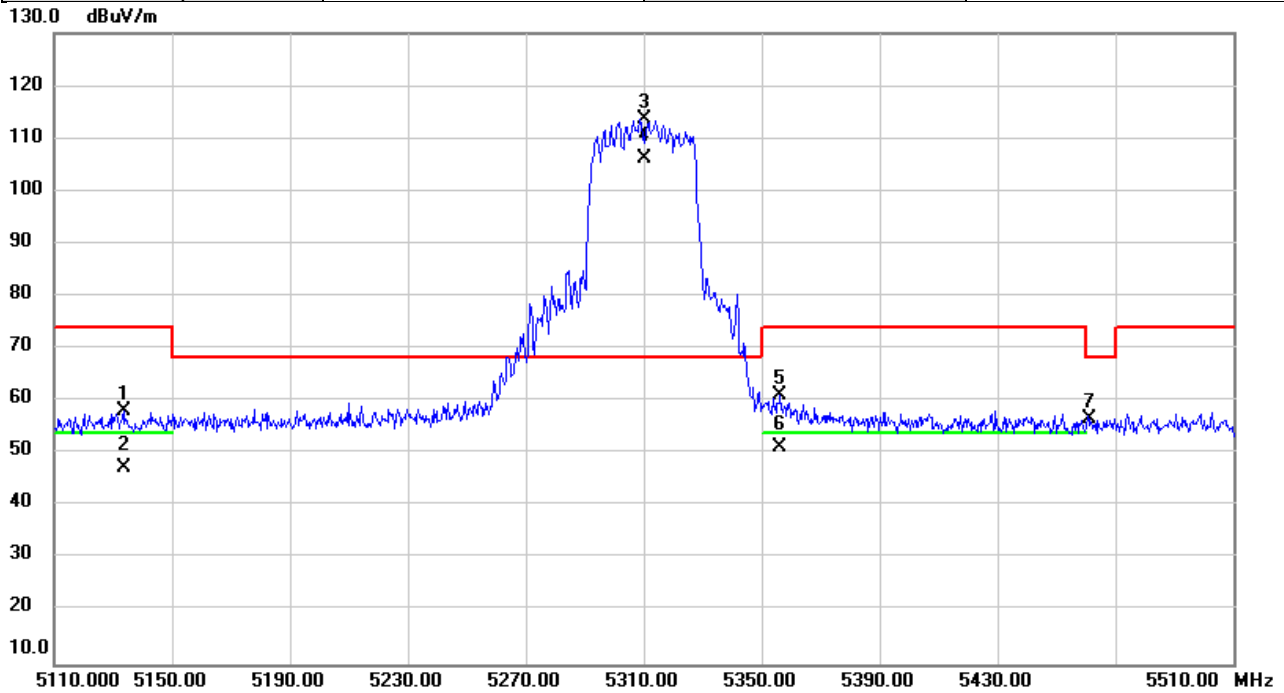


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5133.507	55.72	2.32	58.04	74.00	-15.96	peak	
2		5133.507	45.02	2.32	47.34	54.00	-6.66	AVG	
3	*	5310.000	111.43	2.23	113.66	68.20	45.46	peak	NoLimit
4	X	5310.000	103.87	2.23	106.10	68.20	37.90	AVG	NoLimit
5		5356.040	58.97	2.20	61.17	74.00	-12.83	peak	
6		5356.040	48.92	2.20	51.12	54.00	-2.88	AVG	
7		5461.227	54.63	2.14	56.77	68.20	-11.43	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5510MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

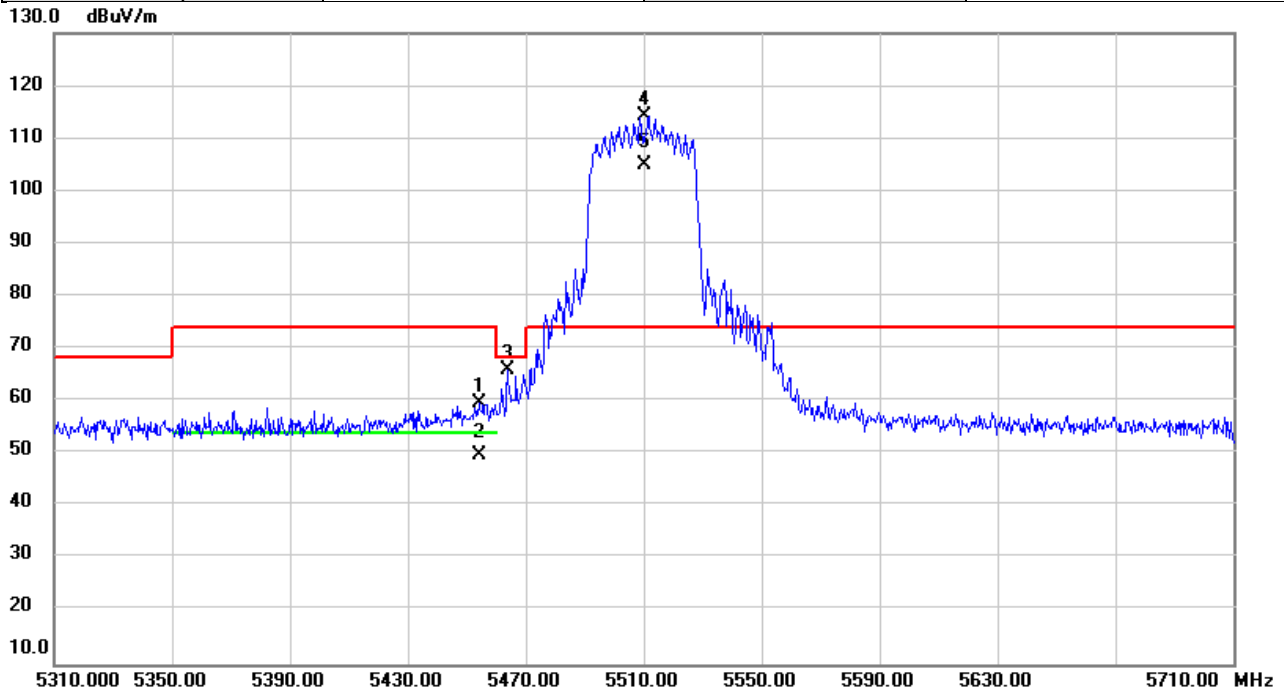


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5454.347	57.62	2.14	59.76	74.00	-14.24	peak	
2		5454.347	47.71	2.14	49.85	54.00	-4.15	AVG	
3		5463.960	63.69	2.14	65.83	68.20	-2.37	peak	
4	*	5510.000	112.23	2.12	114.35	74.00	40.35	peak	NoLimit
5	X	5510.000	102.89	2.12	105.01	74.00	31.01	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5550MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

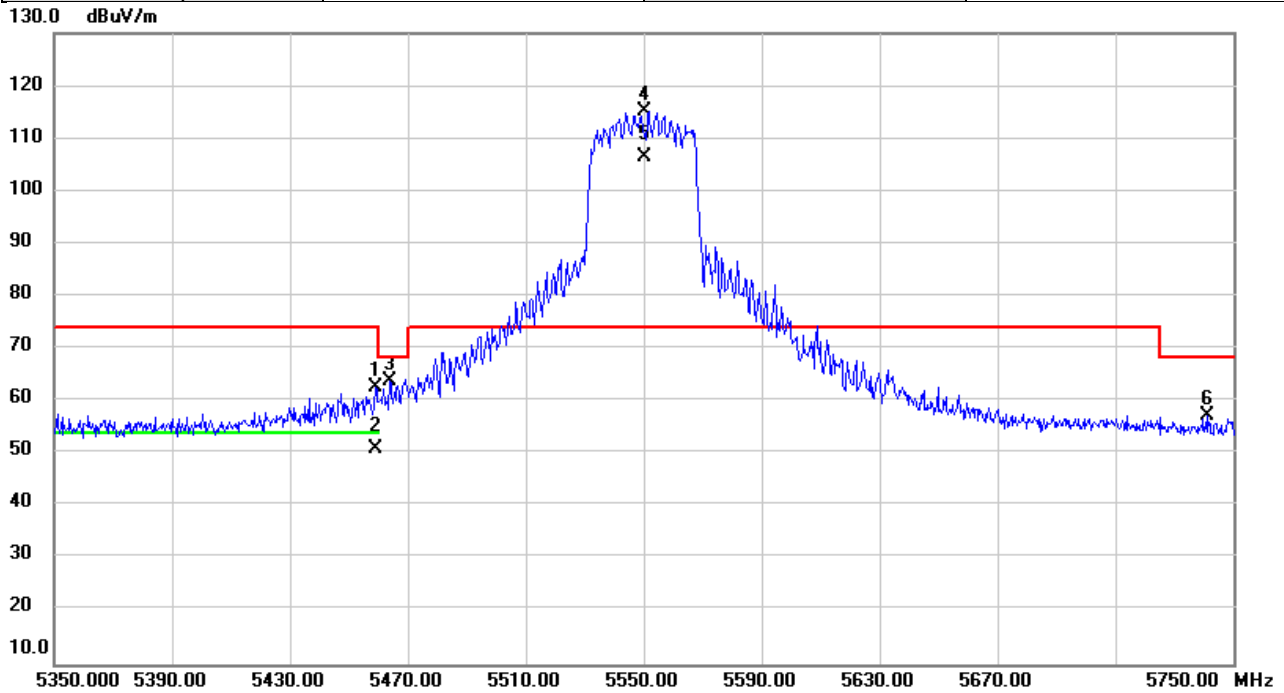


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5459.067	60.47	2.14	62.61	74.00	-11.39	peak	
2		5459.067	48.84	2.14	50.98	54.00	-3.02	AVG	
3		5463.800	61.79	2.14	63.93	68.20	-4.27	peak	
4	*	5550.000	113.09	2.12	115.21	74.00	41.21	peak	NoLimit
5	X	5550.000	104.30	2.12	106.42	74.00	32.42	AVG	NoLimit
6		5741.120	55.07	2.15	57.22	68.20	-10.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5670MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

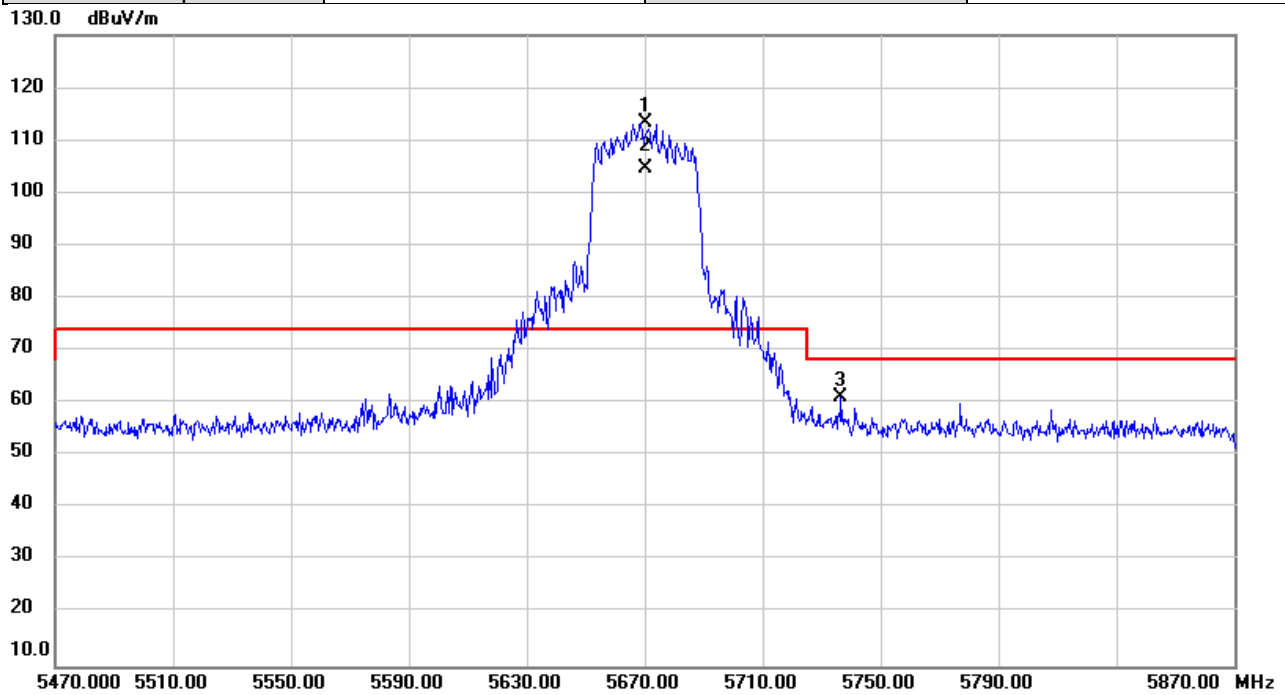


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5670.000	111.22	2.13	113.35	74.00	39.35	peak	NoLimit
2	X	5670.000	102.43	2.13	104.56	74.00	30.56	AVG	NoLimit
3		5736.493	58.90	2.14	61.04	68.20	-7.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5755MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

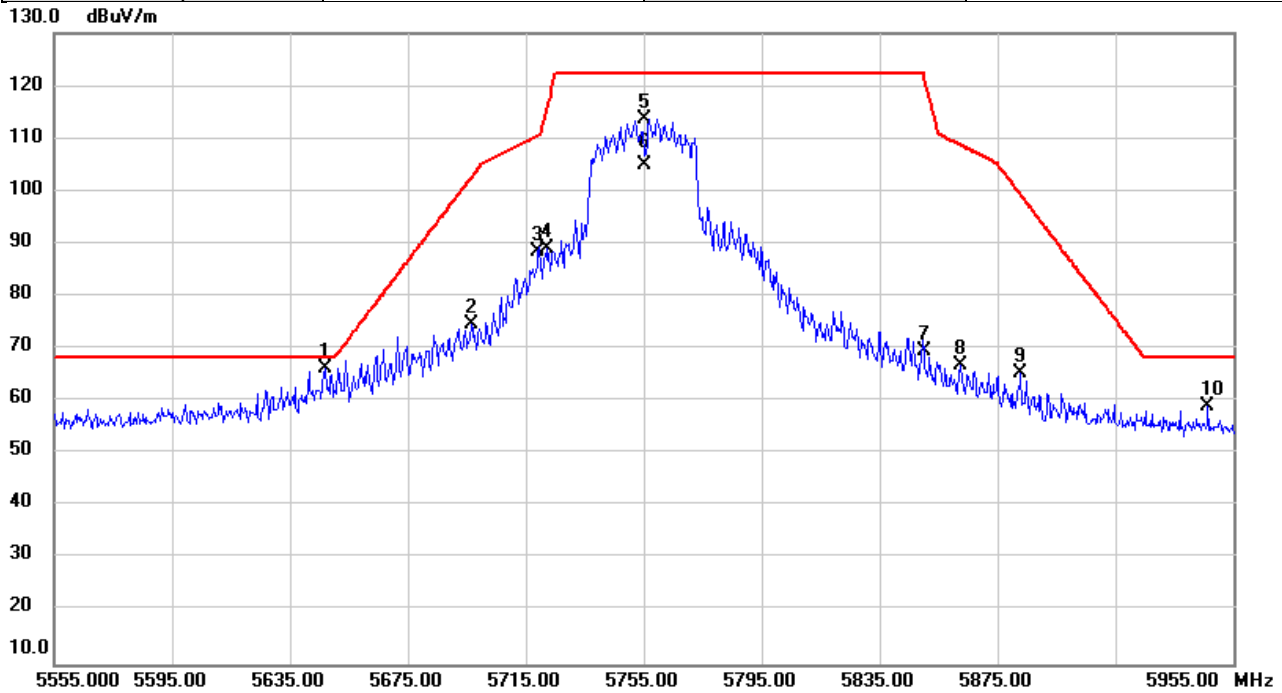


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5647.013	64.03	2.14	66.17	68.20	-2.03	peak	
2		5696.413	72.39	2.14	74.53	102.56	-28.03	peak	
3		5719.173	86.32	2.14	88.46	110.57	-22.11	peak	
4		5721.987	87.03	2.14	89.17	115.33	-26.16	peak	
5		5755.000	111.53	2.15	113.68	122.20	-8.52	peak	NoLimit
6		5755.000	102.80	2.15	104.95	122.20	-17.25	AVG	NoLimit
7		5850.053	67.50	2.15	69.65	122.08	-52.43	peak	
8		5862.387	64.81	2.15	66.96	108.73	-41.77	peak	
9		5882.640	63.28	2.16	65.44	99.53	-34.09	peak	
10		5946.387	56.87	2.17	59.04	68.20	-9.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/2
Test Frequency	5795MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

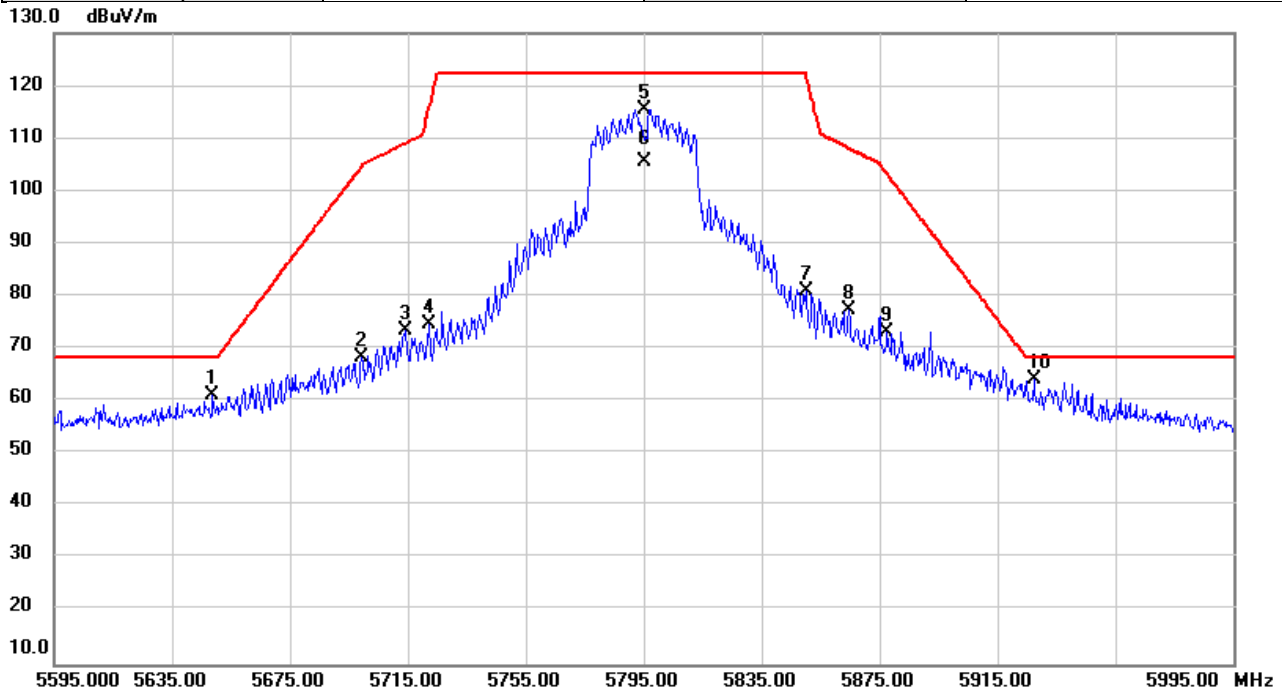


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5648.653	59.12	2.14	61.26	68.20	-6.94	peak	
2		5699.293	66.28	2.14	68.42	104.68	-36.26	peak	
3		5714.040	71.18	2.15	73.33	109.13	-35.80	peak	
4		5722.293	72.61	2.14	74.75	116.03	-41.28	peak	
5		5795.000	113.35	2.15	115.50	122.20	-6.70	peak	NoLimit
6		5795.000	103.45	2.15	105.60	122.20	-16.60	AVG	NoLimit
7		5849.947	78.70	2.15	80.85	122.20	-41.35	peak	
8		5864.760	75.26	2.16	77.42	108.06	-30.64	peak	
9		5877.547	71.07	2.15	73.22	103.31	-30.09	peak	
10	*	5927.333	61.98	2.16	64.14	68.20	-4.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/2
Test Frequency	5210MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

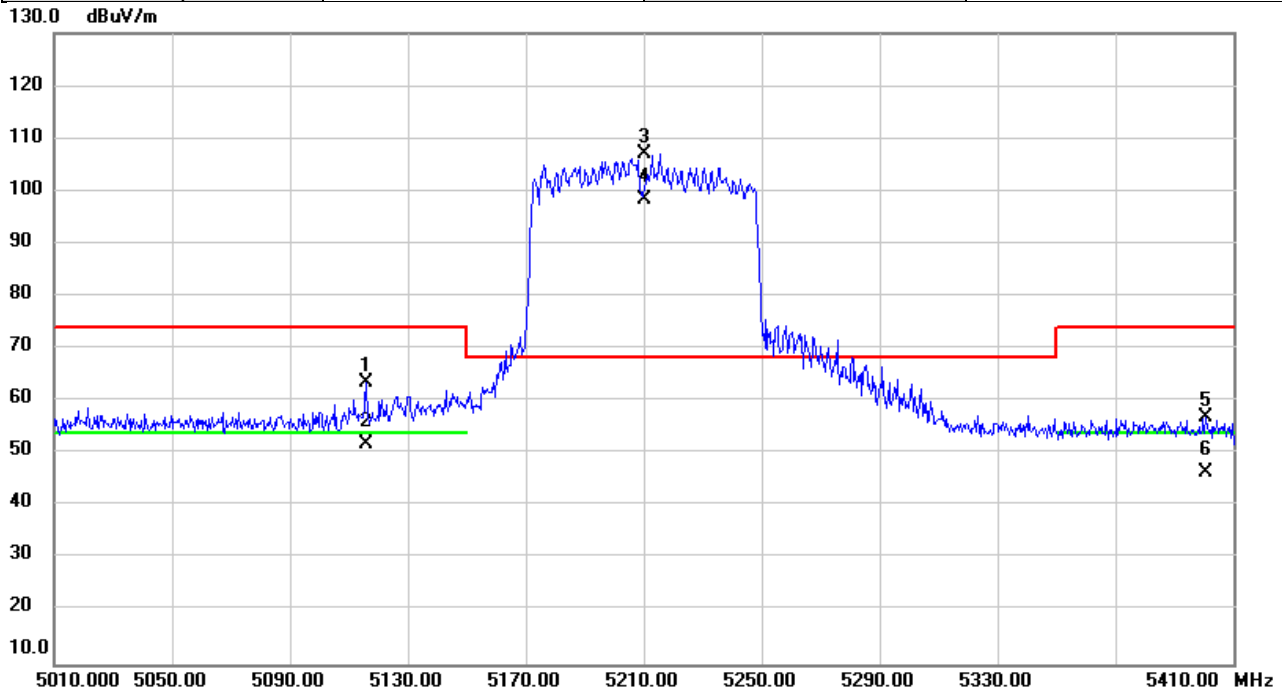


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5115.800	61.33	2.33	63.66	74.00	-10.34	peak	
2		5115.800	49.41	2.33	51.74	54.00	-2.26	AVG	
3	*	5210.000	104.66	2.28	106.94	68.20	38.74	peak	NoLimit
4	X	5210.000	96.16	2.28	98.44	68.20	30.24	AVG	NoLimit
5		5400.933	54.70	2.18	56.88	74.00	-17.12	peak	
6		5400.933	44.39	2.18	46.57	54.00	-7.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/2
Test Frequency	5290MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

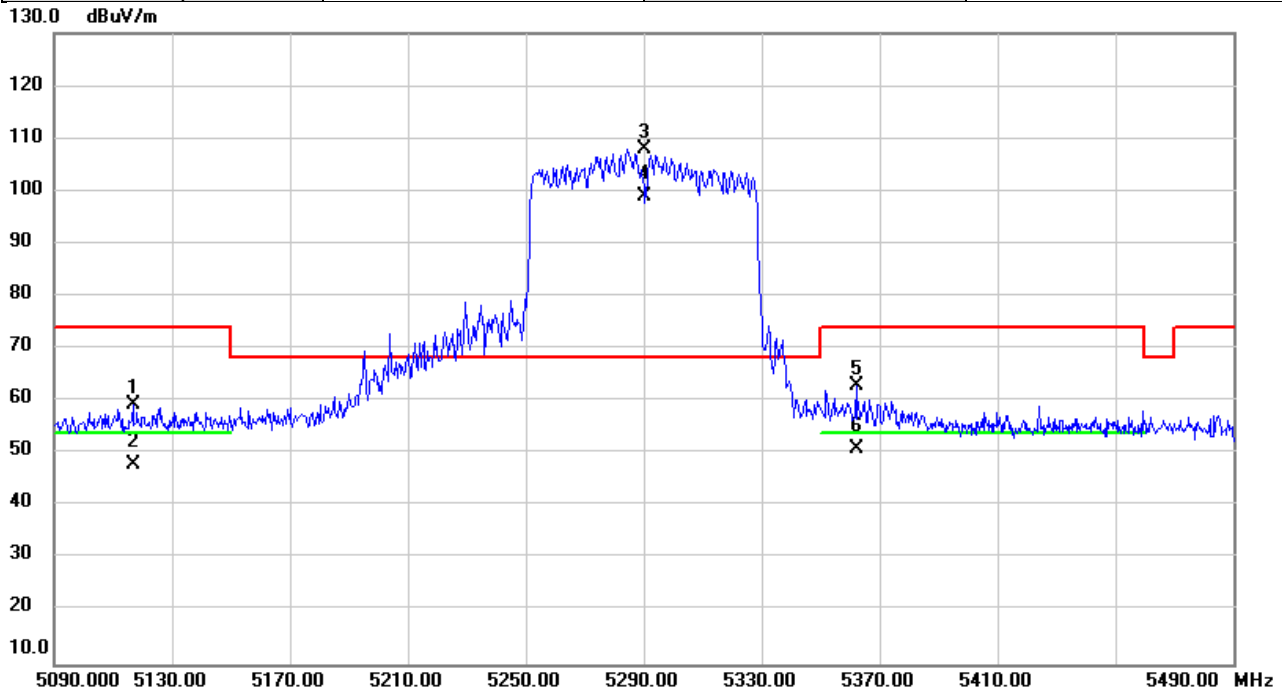


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5116.693	57.12	2.33	59.45	74.00	-14.55	peak	
2		5116.693	45.76	2.33	48.09	54.00	-5.91	AVG	
3	*	5290.000	105.82	2.23	108.05	68.20	39.85	peak	NoLimit
4	X	5290.000	96.73	2.23	98.96	68.20	30.76	AVG	NoLimit
5		5362.253	60.61	2.20	62.81	74.00	-11.19	peak	
6		5362.253	48.72	2.20	50.92	54.00	-3.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/2
Test Frequency	5530MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

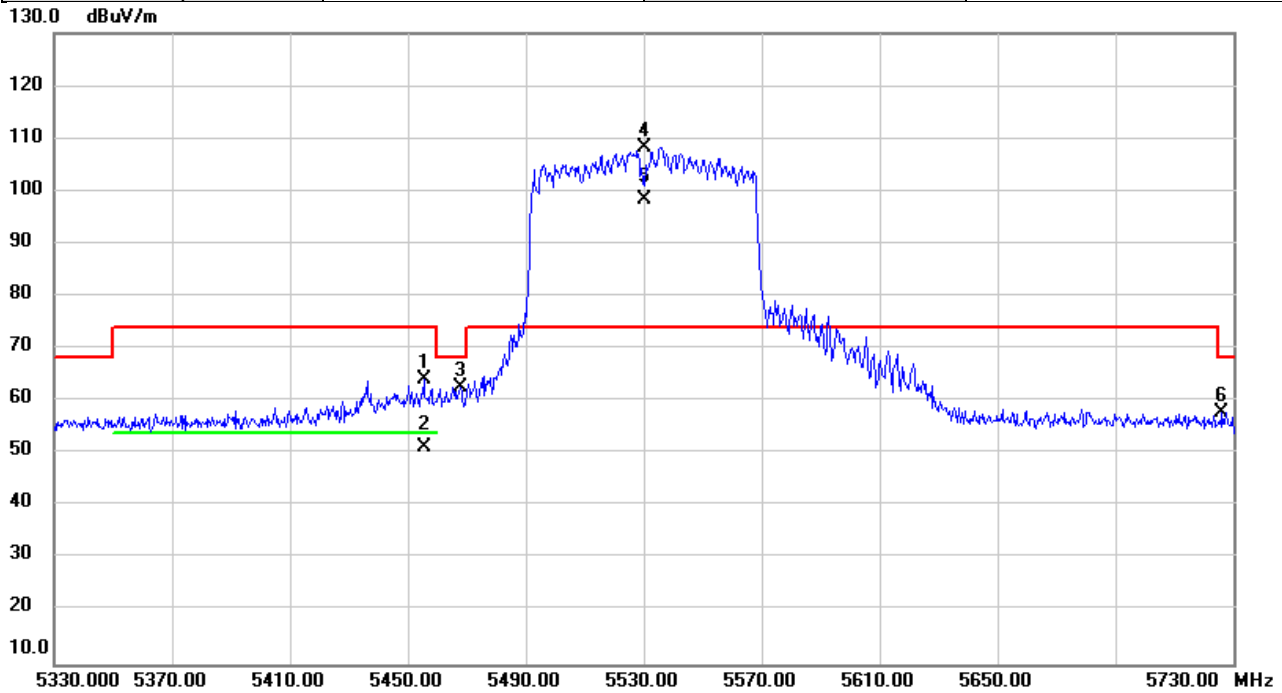


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5455.440	61.97	2.14	64.11	74.00	-9.89	peak	
2		5455.440	49.12	2.14	51.26	54.00	-2.74	AVG	
3		5467.827	60.48	2.14	62.62	68.20	-5.58	peak	
4	*	5530.000	106.21	2.13	108.34	74.00	34.34	peak	NoLimit
5	X	5530.000	96.15	2.13	98.28	74.00	24.28	AVG	NoLimit
6		5726.093	55.69	2.14	57.83	68.20	-10.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/2
Test Frequency	5610MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

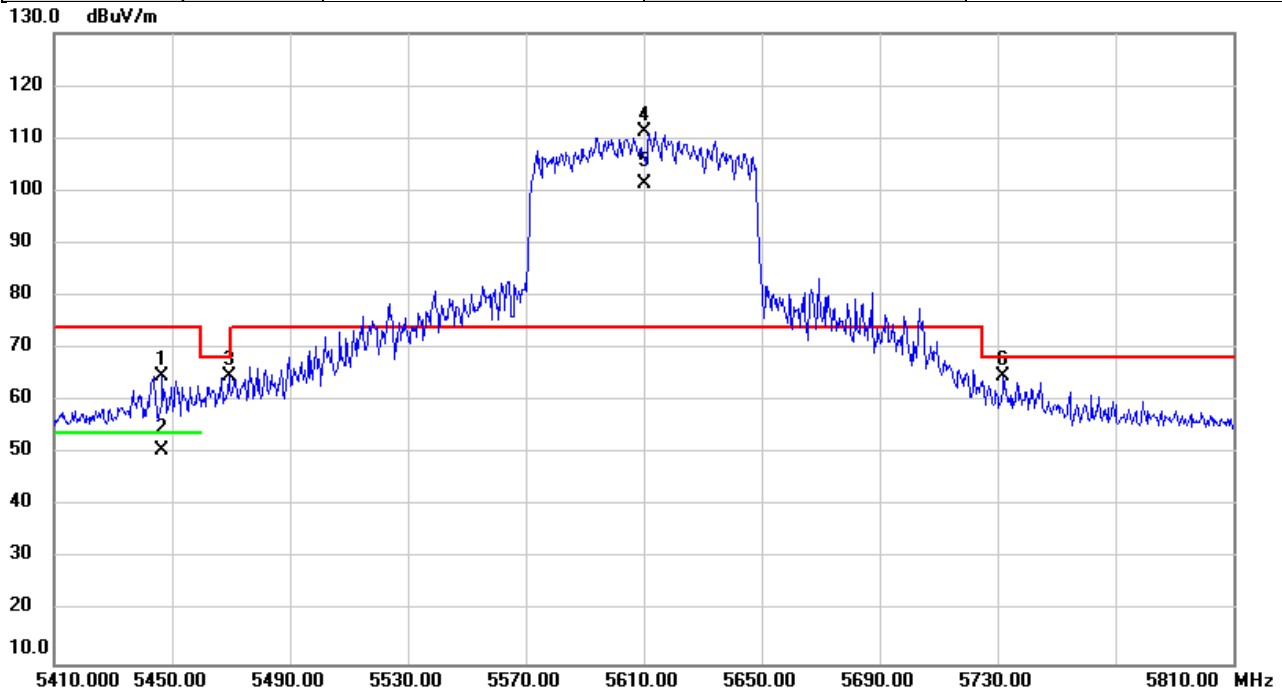


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5446.547	62.53	2.14	64.67	74.00	-9.33	peak	
2		5446.547	48.53	2.14	50.67	54.00	-3.33	AVG	
3		5469.320	62.57	2.14	64.71	68.20	-3.49	peak	
4	*	5610.000	109.22	2.13	111.35	74.00	37.35	peak	NoLimit
5	X	5610.000	99.23	2.13	101.36	74.00	27.36	AVG	NoLimit
6		5732.120	62.66	2.14	64.80	68.20	-3.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/2
Test Frequency	5775MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

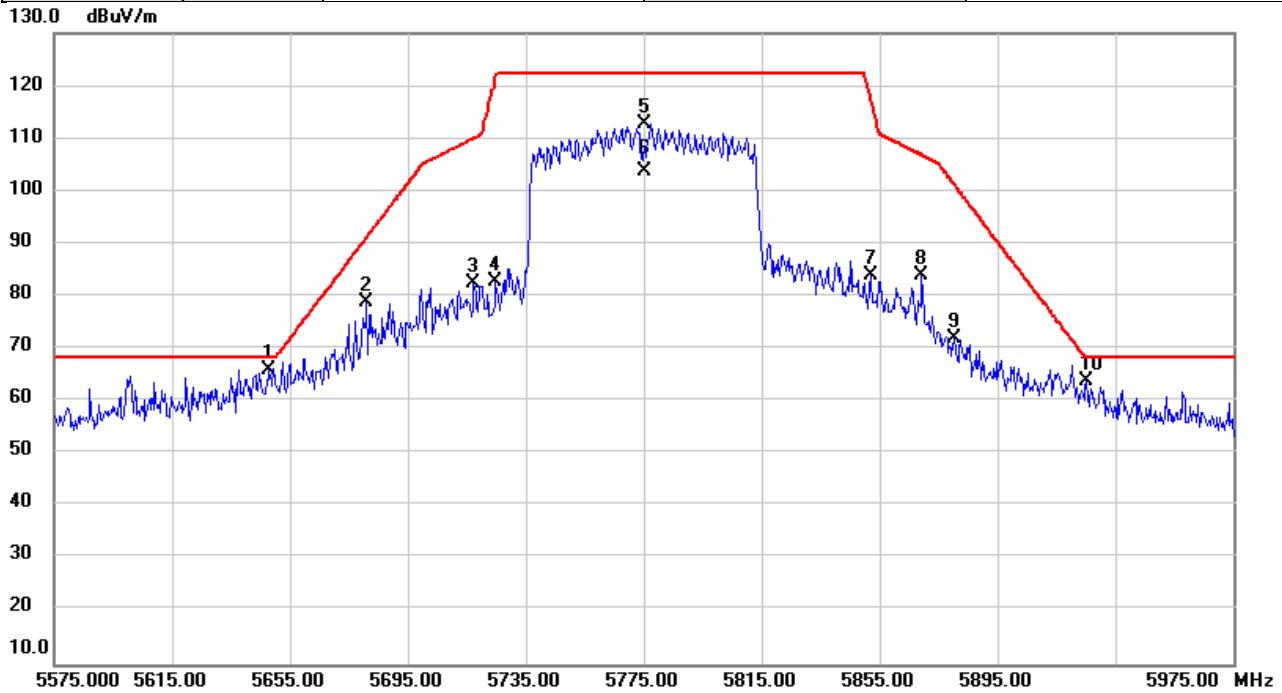


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5648.027	63.75	2.14	65.89	68.20	-2.31	peak	
2		5681.040	76.63	2.14	78.77	91.21	-12.44	peak	
3		5717.400	80.29	2.14	82.43	110.07	-27.64	peak	
4		5724.853	80.53	2.14	82.67	121.86	-39.19	peak	
5		5775.000	110.48	2.15	112.63	122.20	-9.57	peak	NoLimit
6		5775.000	101.51	2.15	103.66	122.20	-18.54	AVG	NoLimit
7		5852.173	81.82	2.15	83.97	117.24	-33.27	peak	
8		5869.320	81.76	2.15	83.91	106.79	-22.88	peak	
9		5880.333	69.68	2.16	71.84	101.24	-29.40	peak	
10		5925.133	61.69	2.17	63.86	68.20	-4.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5180MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

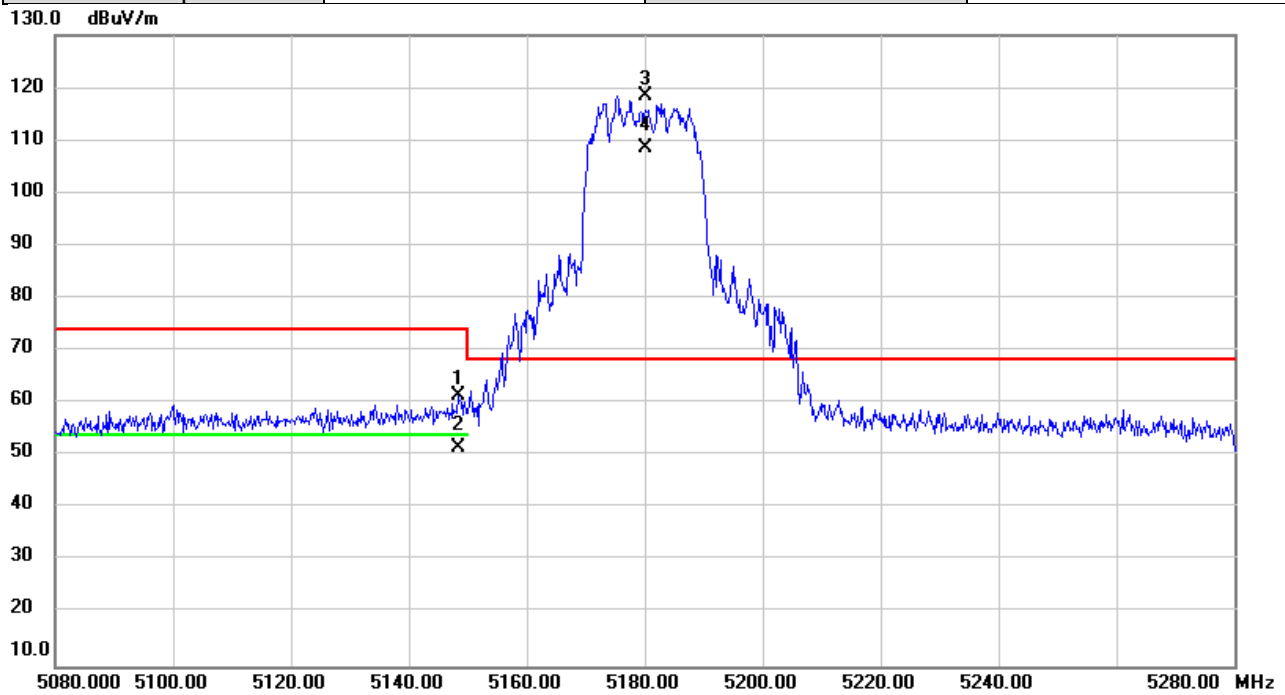


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.380	59.23	2.31	61.54	74.00	-12.46	peak	
2		5148.380	49.20	2.31	51.51	54.00	-2.49	AVG	
3	*	5180.000	116.08	2.29	118.37	68.20	50.17	peak	NoLimit
4	X	5180.000	106.27	2.29	108.56	68.20	40.36	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5200MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

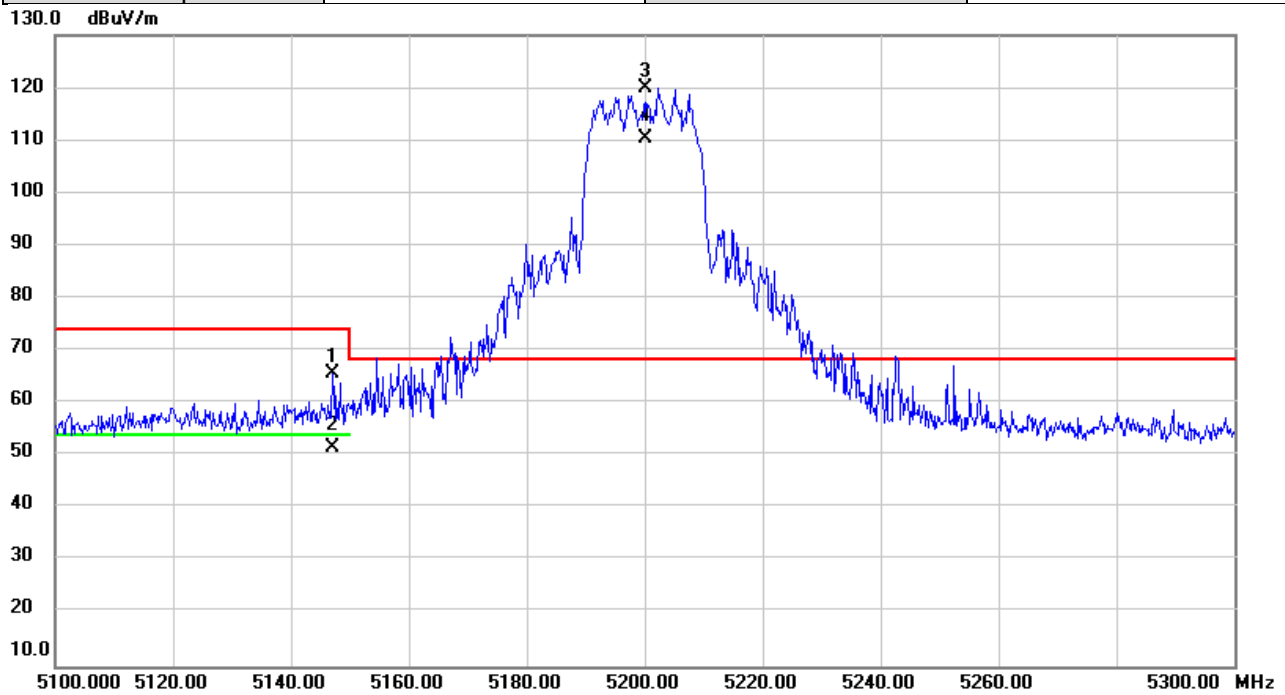


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5147.093	63.45	2.31	65.76	74.00	-8.24	peak	
2		5147.093	49.17	2.31	51.48	54.00	-2.52	AVG	
3	*	5200.000	117.71	2.28	119.99	68.20	51.79	peak	NoLimit
4	X	5200.000	108.19	2.28	110.47	68.20	42.27	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5240MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

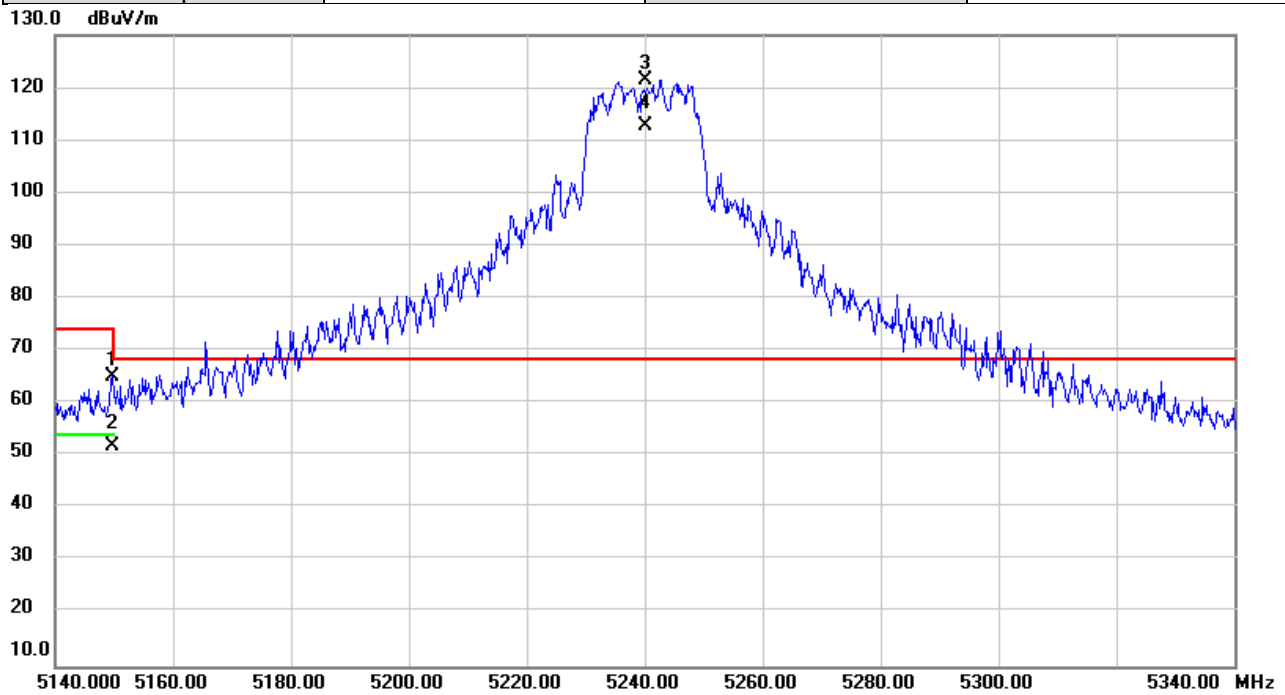


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5149.787	62.60	2.31	64.91	74.00	-9.09	peak	
2		5149.787	49.62	2.31	51.93	54.00	-2.07	AVG	
3	*	5240.000	119.32	2.26	121.58	68.20	53.38	peak	NoLimit
4	X	5240.000	110.49	2.26	112.75	68.20	44.55	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5260MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

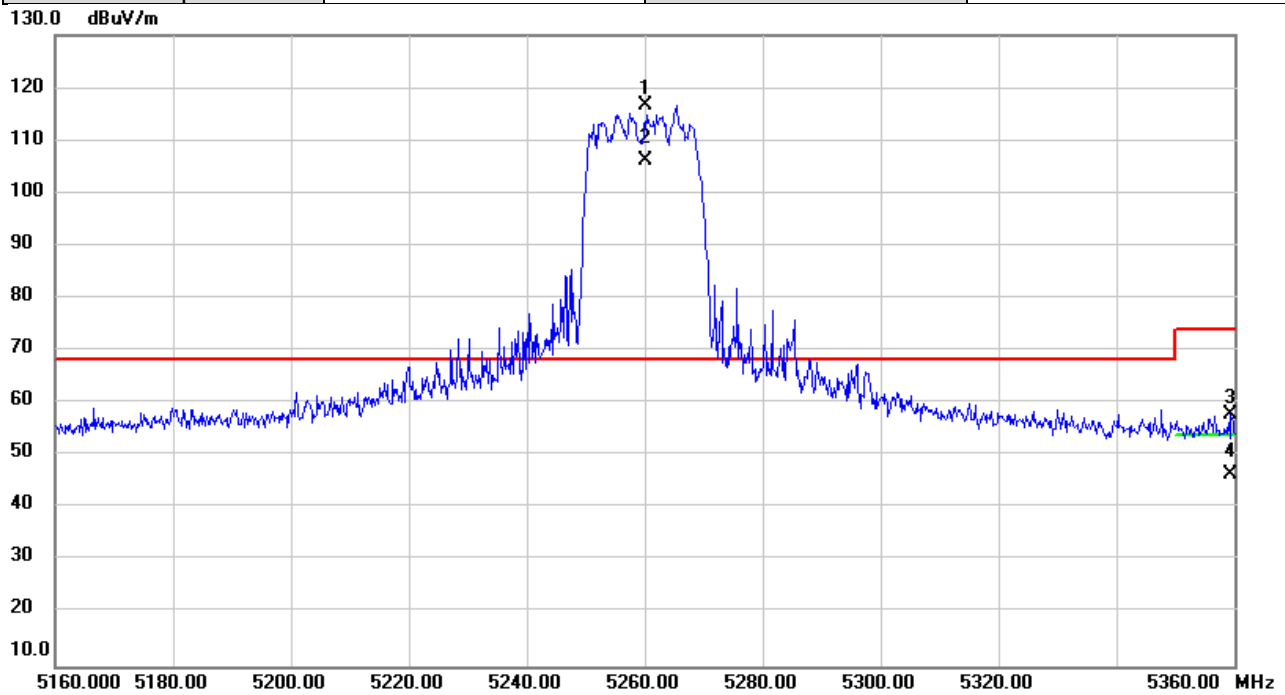


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	114.34	2.25	116.59	68.20	48.39	peak	NoLimit
2	X	5260.000	103.96	2.25	106.21	68.20	38.01	AVG	NoLimit
3		5359.460	55.78	2.20	57.98	74.00	-16.02	peak	
4		5359.460	44.34	2.20	46.54	54.00	-7.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5320MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

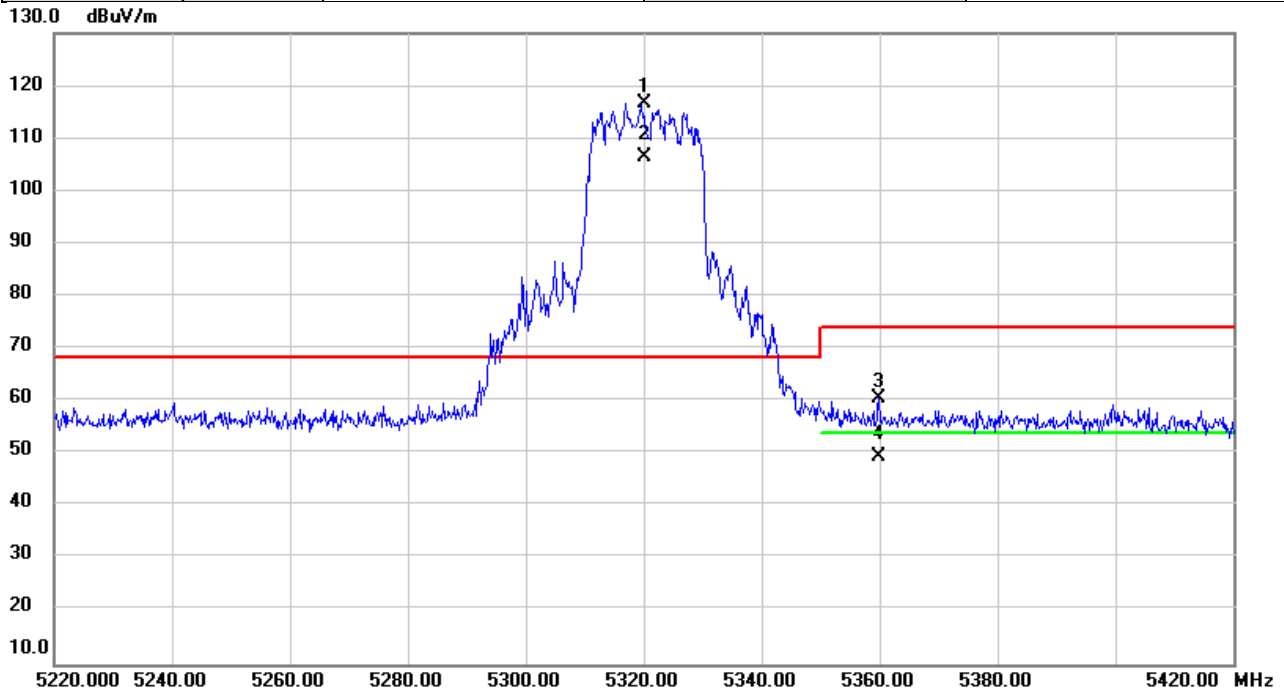


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	114.36	2.22	116.58	68.20	48.38	peak	NoLimit
2	X	5320.000	104.31	2.22	106.53	68.20	38.33	AVG	NoLimit
3		5359.853	58.29	2.20	60.49	74.00	-13.51	peak	
4		5359.853	47.16	2.20	49.36	54.00	-4.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5500MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

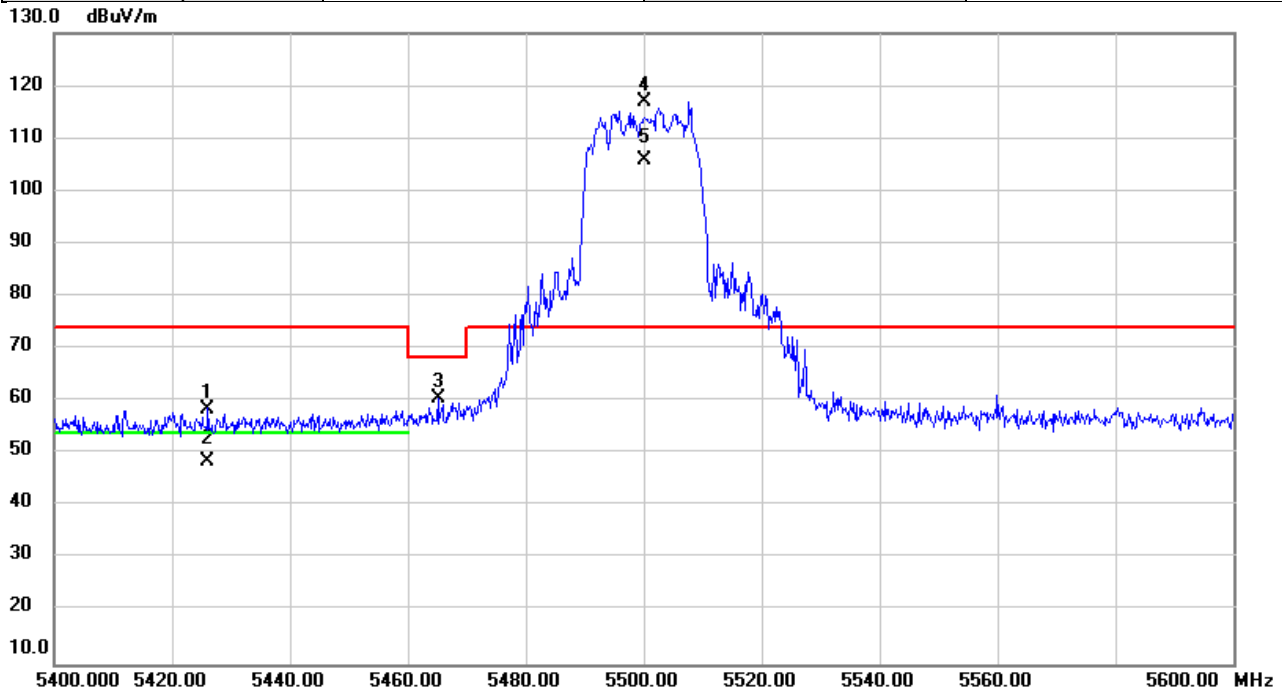


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5426.120	56.44	2.16	58.60	74.00	-15.40	peak	
2		5426.120	46.30	2.16	48.46	54.00	-5.54	AVG	
3		5465.087	58.38	2.14	60.52	68.20	-7.68	peak	
4	*	5500.000	114.93	2.12	117.05	74.00	43.05	peak	NoLimit
5	X	5500.000	103.79	2.12	105.91	74.00	31.91	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5700MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

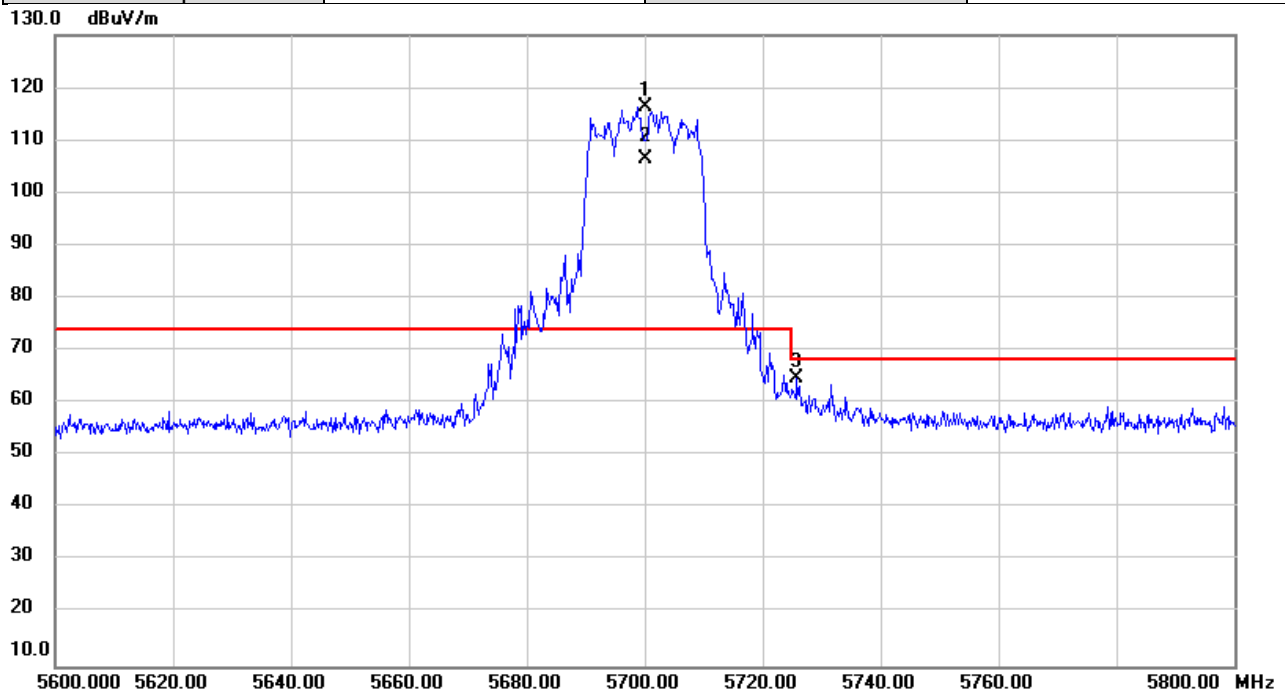


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	114.15	2.14	116.29	74.00	42.29	peak	NoLimit
2	X	5700.000	104.23	2.14	106.37	74.00	32.37	AVG	NoLimit
3		5725.847	62.69	2.14	64.83	68.20	-3.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

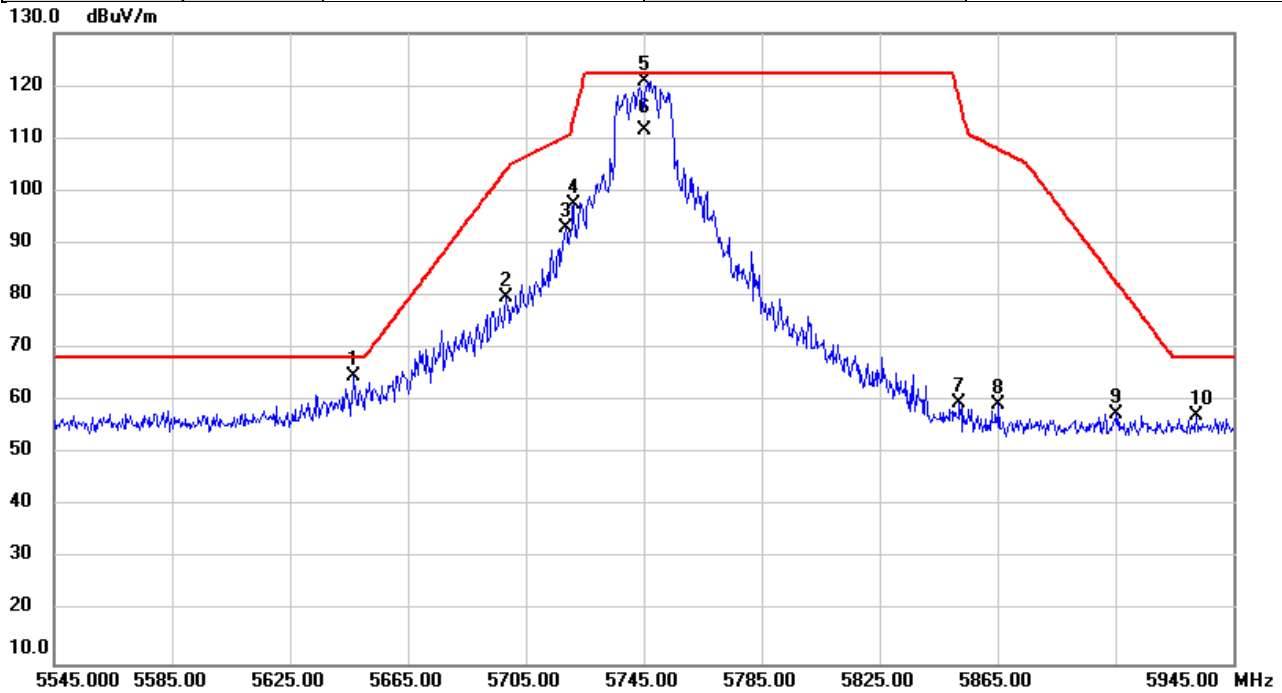


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5646.587	62.50	2.14	64.64	68.20	-3.56	peak	
2		5698.427	77.49	2.14	79.63	104.04	-24.41	peak	
3		5718.520	90.69	2.14	92.83	110.39	-17.56	peak	
4		5721.013	95.22	2.14	97.36	113.11	-15.75	peak	
5	*	5745.000	118.61	2.14	120.75	122.20	-1.45	peak	NoLimit
6		5745.000	109.34	2.14	111.48	122.20	-10.72	AVG	NoLimit
7		5851.987	57.41	2.15	59.56	117.67	-58.11	peak	
8		5865.507	57.23	2.16	59.39	107.86	-48.47	peak	
9		5905.533	55.40	2.16	57.56	82.57	-25.01	peak	
10		5932.507	55.05	2.16	57.21	68.20	-10.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5785MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

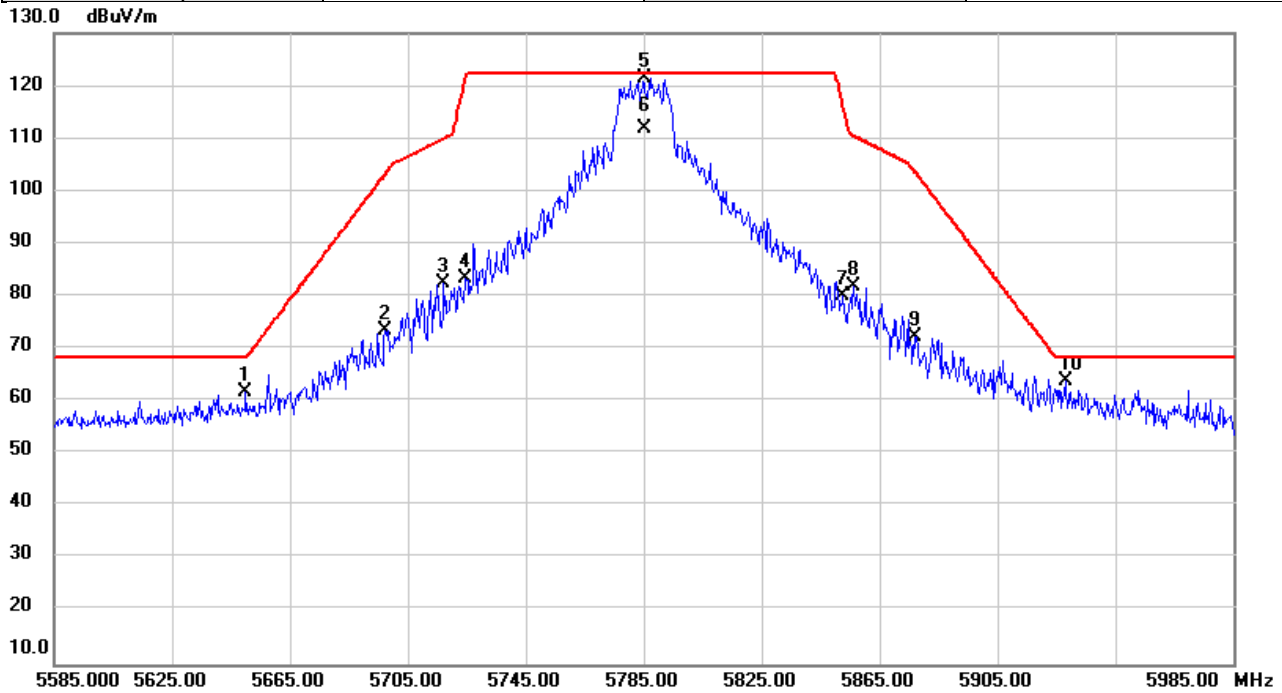


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5649.933	59.51	2.14	61.65	68.20	-6.55	peak	
2		5697.360	71.30	2.14	73.44	103.25	-29.81	peak	
3		5717.253	80.19	2.14	82.33	110.03	-27.70	peak	
4		5724.507	81.32	2.14	83.46	121.08	-37.62	peak	
5	*	5785.000	119.30	2.14	121.44	122.20	-0.76	peak	NoLimit
6		5785.000	109.72	2.14	111.86	122.20	-10.34	AVG	NoLimit
7		5852.667	77.93	2.15	80.08	116.12	-36.04	peak	
8		5856.373	79.68	2.16	81.84	110.41	-28.57	peak	
9		5876.840	70.13	2.15	72.28	103.83	-31.55	peak	
10		5928.000	61.85	2.15	64.00	68.20	-4.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/2
Test Frequency	5825MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

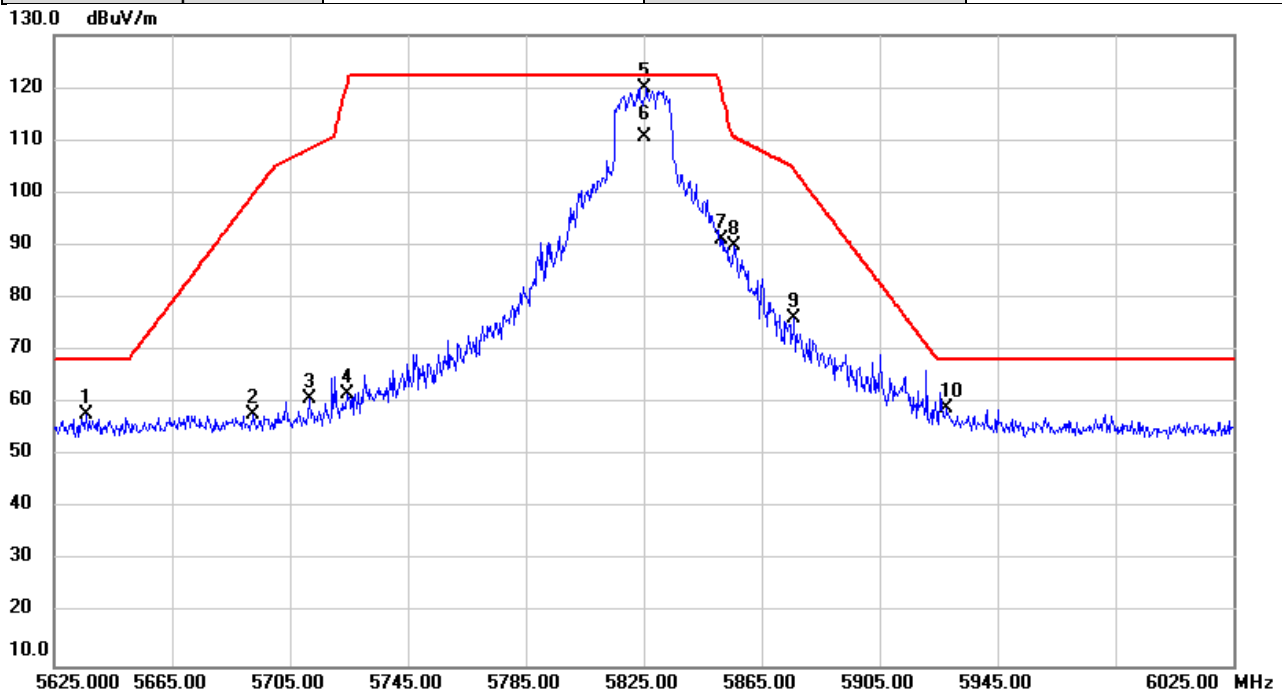


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5636.120	55.73	2.13	57.86	68.20	-10.34	peak	
2		5692.667	55.76	2.13	57.89	99.79	-41.90	peak	
3		5711.800	58.84	2.14	60.98	108.51	-47.53	peak	
4		5724.280	59.62	2.14	61.76	120.56	-58.80	peak	
5	*	5825.000	117.93	2.15	120.08	122.20	-2.12	peak	NoLimit
6		5825.000	108.53	2.15	110.68	122.20	-11.52	AVG	NoLimit
7		5851.240	89.09	2.15	91.24	119.37	-28.13	peak	
8		5855.747	87.69	2.16	89.85	110.59	-20.74	peak	
9		5875.827	74.14	2.15	76.29	104.59	-28.30	peak	
10		5927.853	56.77	2.15	58.92	68.20	-9.28	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/2
Test Frequency	5190MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

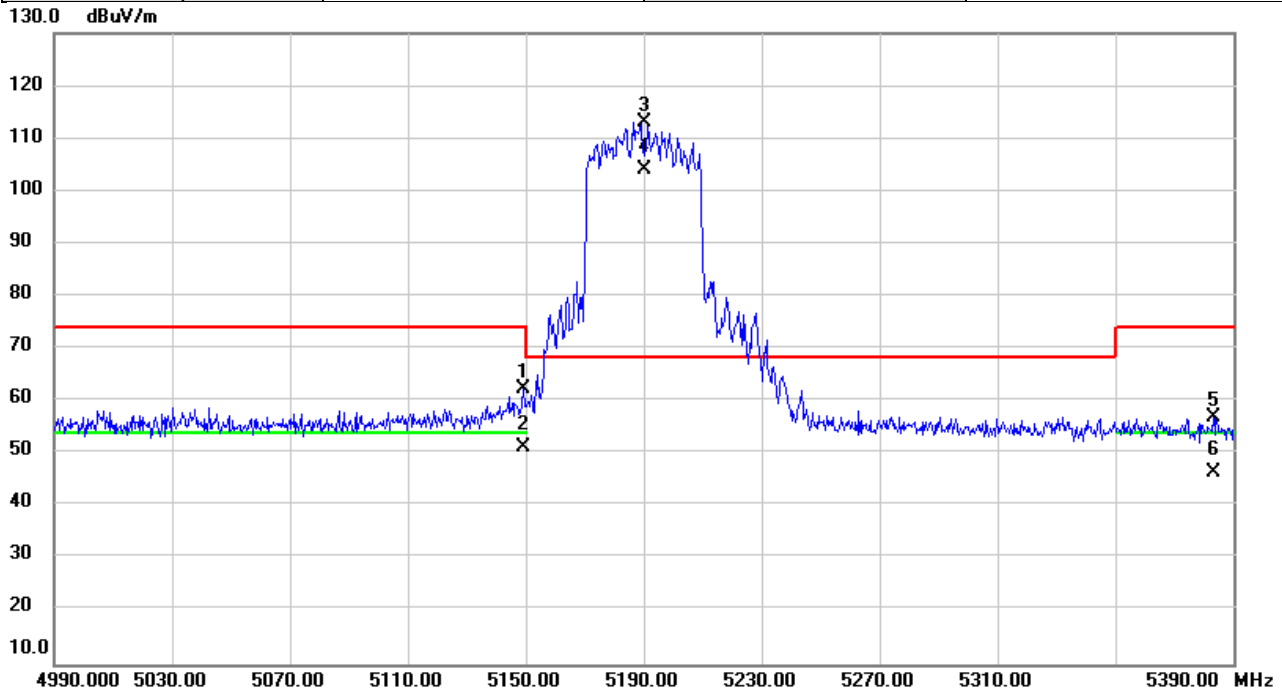


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5149.040	60.01	2.31	62.32	74.00	-11.68	peak	
2		5149.040	49.09	2.31	51.40	54.00	-2.60	AVG	
3	*	5190.000	110.63	2.28	112.91	68.20	44.71	peak	NoLimit
4	X	5190.000	101.63	2.28	103.91	68.20	35.71	AVG	NoLimit
5		5383.533	54.76	2.18	56.94	74.00	-17.06	peak	
6		5383.533	44.16	2.18	46.34	54.00	-7.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/2
Test Frequency	5230MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

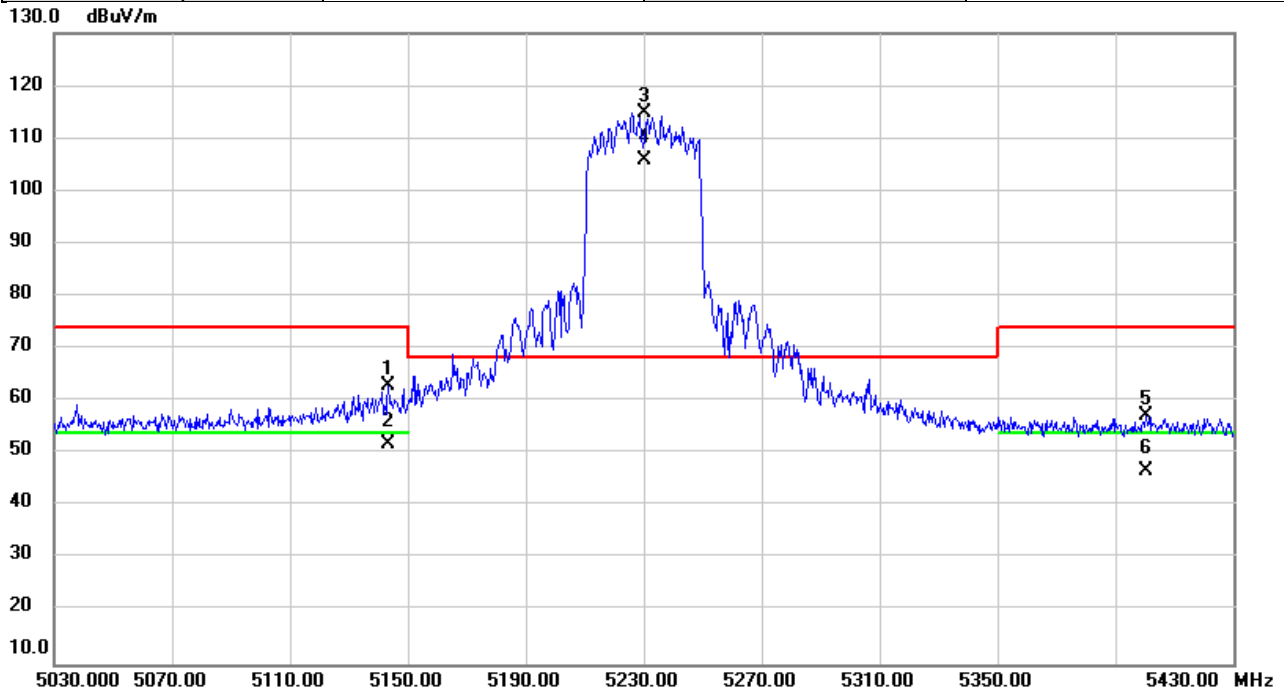


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5143.293	60.63	2.31	62.94	74.00	-11.06	peak	
2		5143.293	49.50	2.31	51.81	54.00	-2.19	AVG	
3	*	5230.000	112.74	2.26	115.00	68.20	46.80	peak	NoLimit
4	X	5230.000	103.68	2.26	105.94	68.20	37.74	AVG	NoLimit
5		5400.507	55.03	2.18	57.21	74.00	-16.79	peak	
6		5400.507	44.54	2.18	46.72	54.00	-7.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/2
Test Frequency	5270MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

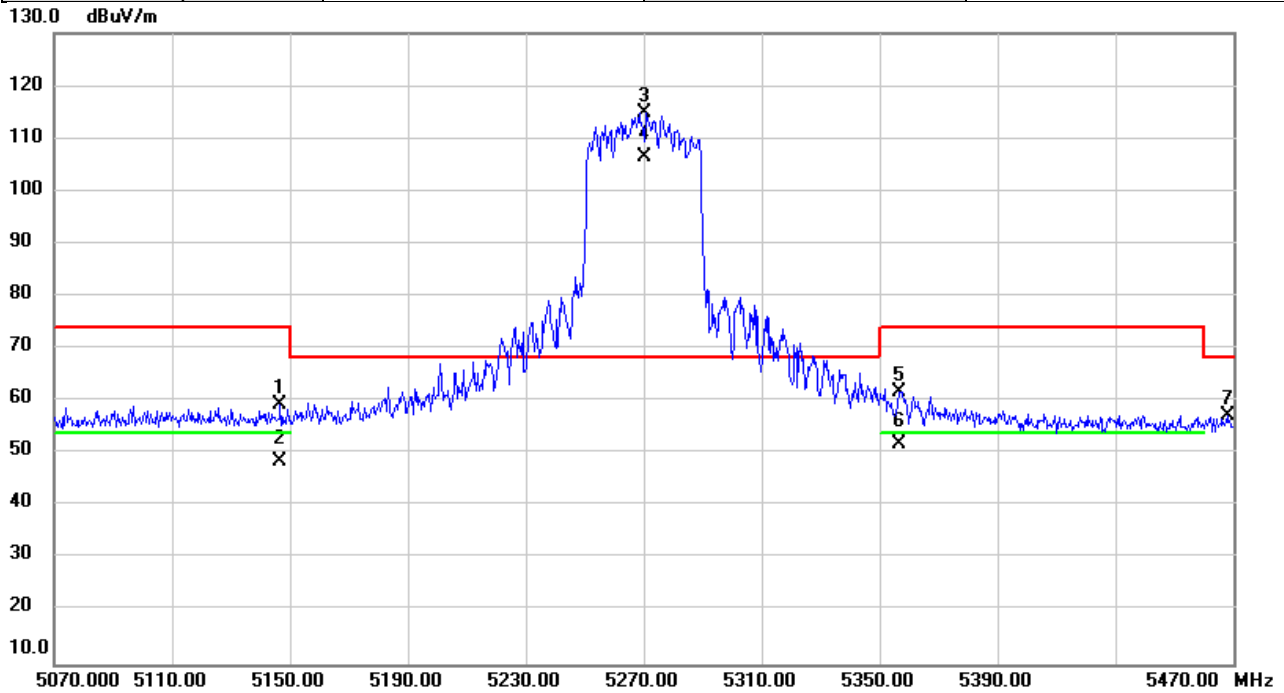


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.493	57.16	2.31	59.47	74.00	-14.53	peak	
2		5146.493	46.16	2.31	48.47	54.00	-5.53	AVG	
3	*	5270.000	112.52	2.25	114.77	68.20	46.57	peak	NoLimit
4	X	5270.000	104.14	2.25	106.39	68.20	38.19	AVG	NoLimit
5		5356.787	59.66	2.20	61.86	74.00	-12.14	peak	
6		5356.787	49.57	2.20	51.77	54.00	-2.23	AVG	
7		5467.933	55.08	2.14	57.22	68.20	-10.98	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/2
Test Frequency	5310MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

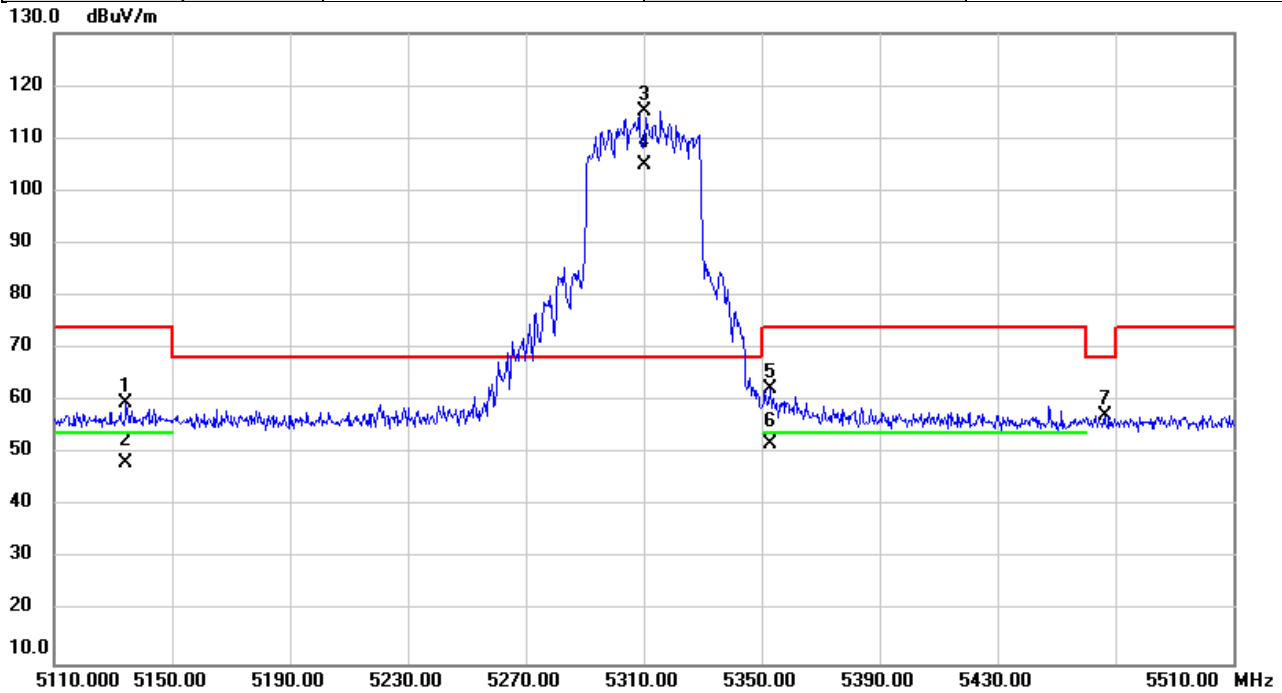


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5134.533	57.35	2.32	59.67	74.00	-14.33	peak	
2		5134.533	45.91	2.32	48.23	54.00	-5.77	AVG	
3	*	5310.000	112.92	2.23	115.15	68.20	46.95	peak	NoLimit
4	X	5310.000	102.64	2.23	104.87	68.20	36.67	AVG	NoLimit
5		5352.987	60.28	2.20	62.48	74.00	-11.52	peak	
6		5352.987	49.59	2.20	51.79	54.00	-2.21	AVG	
7		5466.320	55.20	2.14	57.34	68.20	-10.86	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/2
Test Frequency	5510MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

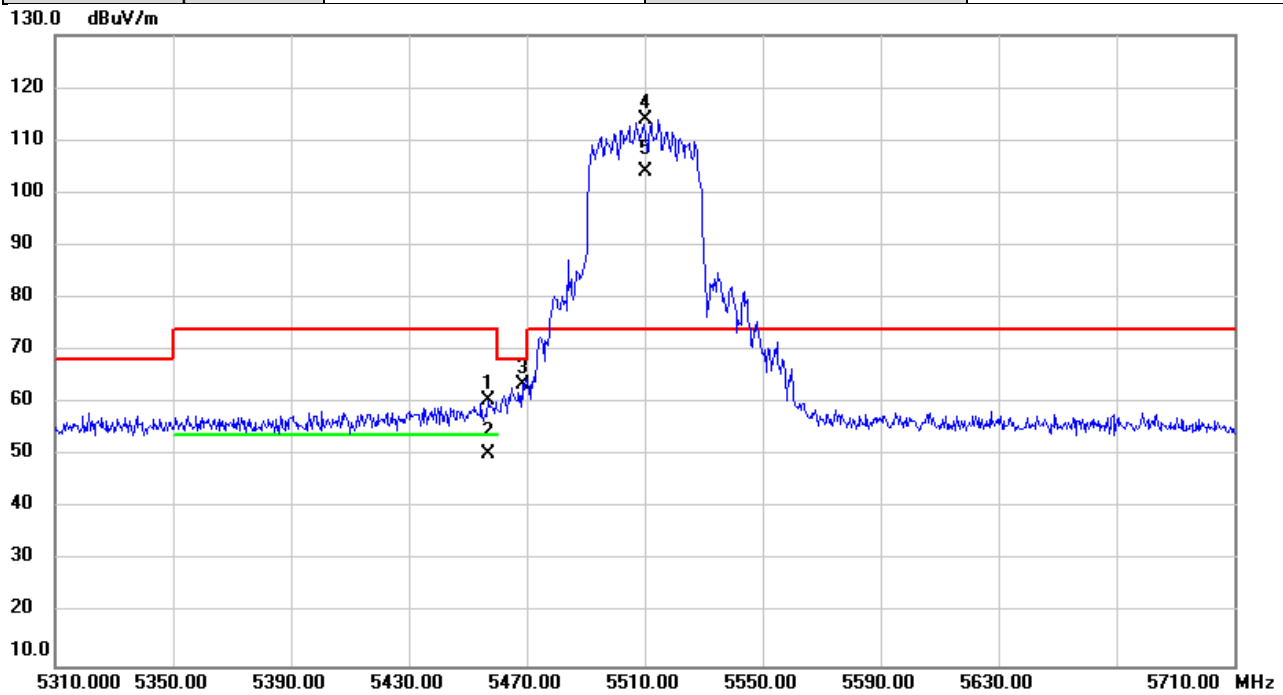


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5457.187	58.52	2.14	60.66	74.00	-13.34	peak	
2		5457.187	48.34	2.14	50.48	54.00	-3.52	AVG	
3		5468.467	61.41	2.14	63.55	68.20	-4.65	peak	
4	*	5510.000	111.84	2.12	113.96	74.00	39.96	peak	NoLimit
5	X	5510.000	101.86	2.12	103.98	74.00	29.98	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/3
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

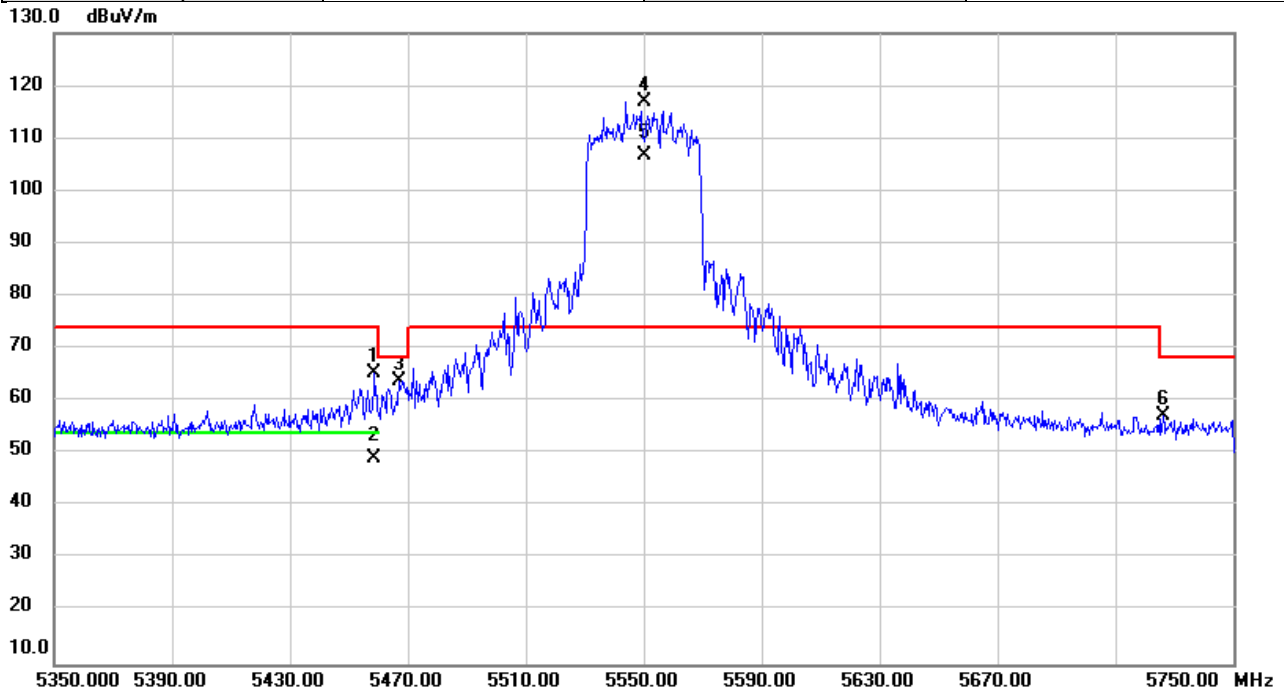


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5458.427	63.09	2.14	65.23	74.00	-8.77	peak	
2		5458.527	46.95	2.14	49.09	54.00	-4.91	AVG	
3		5467.213	61.81	2.14	63.95	68.20	-4.25	peak	
4	*	5550.000	114.83	2.12	116.95	74.00	42.95	peak	NoLimit
5	X	5550.000	104.53	2.12	106.65	74.00	32.65	AVG	NoLimit
6		5726.293	55.04	2.14	57.18	68.20	-11.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/2
Test Frequency	5670MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

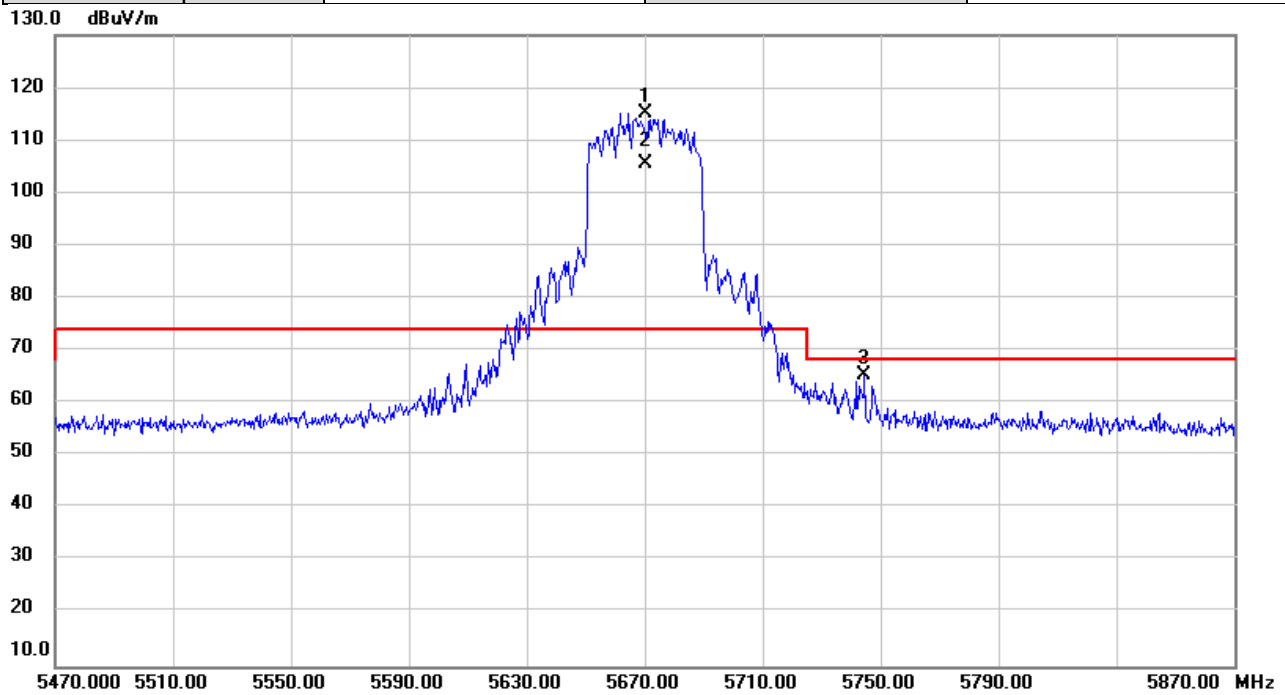


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5670.000	113.15	2.13	115.28	74.00	41.28	peak	NoLimit
2	X	5670.000	103.44	2.13	105.57	74.00	31.57	AVG	NoLimit
3		5744.440	63.06	2.14	65.20	68.20	-3.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/2
Test Frequency	5755MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

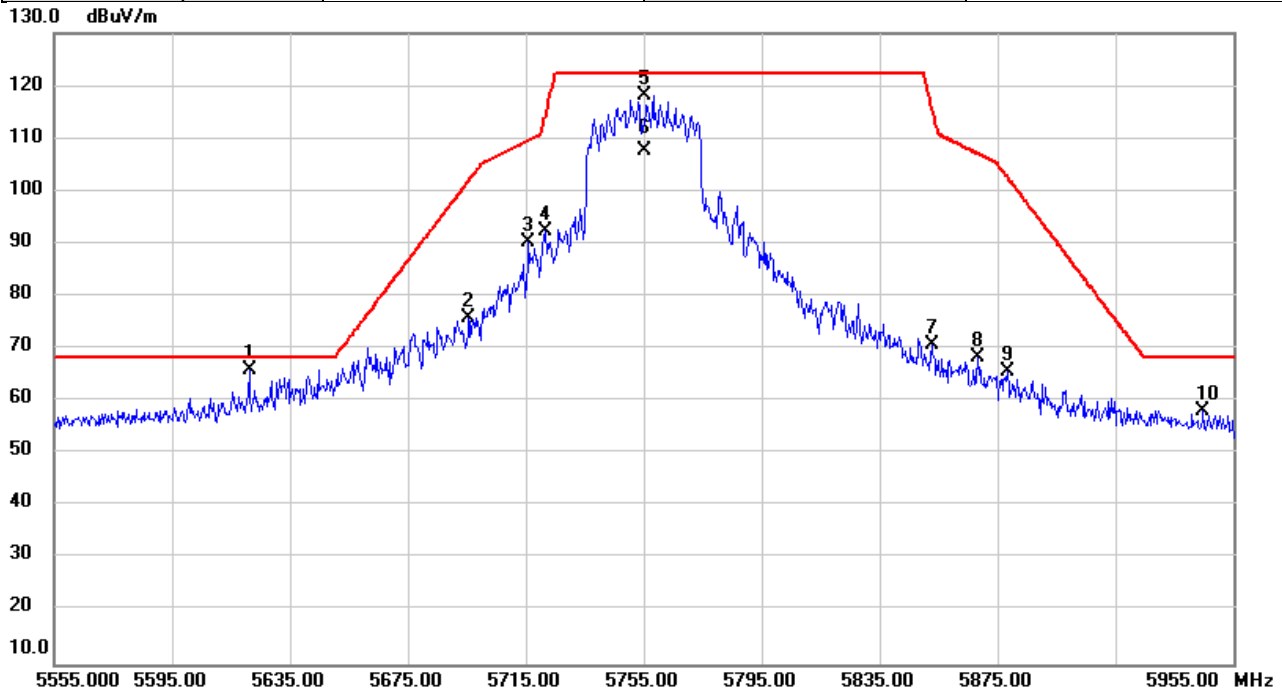


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5621.187	63.89	2.14	66.03	68.20	-2.17	peak	
2		5695.773	73.82	2.13	75.95	102.08	-26.13	peak	
3		5715.947	88.16	2.15	90.31	109.67	-19.36	peak	
4		5721.427	90.35	2.14	92.49	114.05	-21.56	peak	
5		5755.000	115.95	2.15	118.10	122.20	-4.10	peak	NoLimit
6		5755.000	105.41	2.15	107.56	122.20	-14.64	AVG	NoLimit
7		5852.920	68.54	2.15	70.69	115.54	-44.85	peak	
8		5868.507	66.14	2.15	68.29	107.02	-38.73	peak	
9		5878.240	63.63	2.15	65.78	102.79	-37.01	peak	
10		5944.773	56.04	2.16	58.20	68.20	-10.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/2
Test Frequency	5795MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

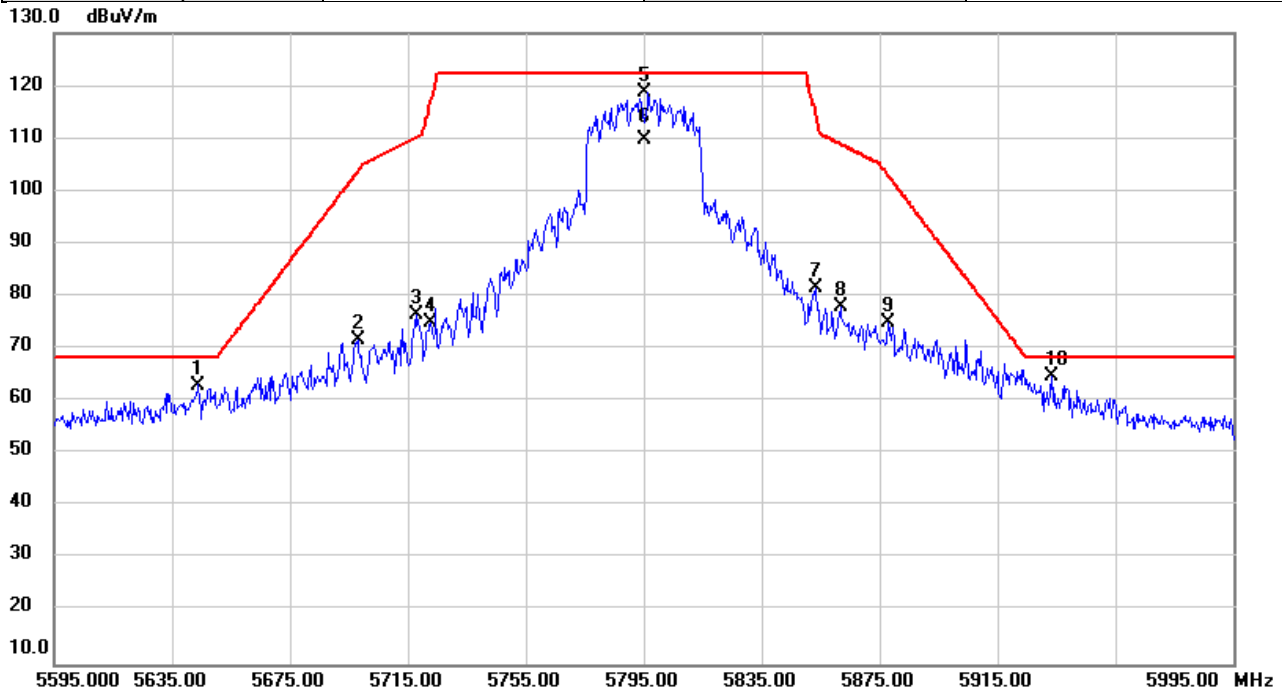


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5643.827	60.97	2.13	63.10	68.20	-5.10	peak	
2		5698.080	69.64	2.14	71.78	103.79	-32.01	peak	
3		5717.800	74.35	2.14	76.49	110.18	-33.69	peak	
4		5722.800	72.92	2.14	75.06	117.19	-42.13	peak	
5		5795.000	116.61	2.15	118.76	122.20	-3.44	peak	NoLimit
6		5795.000	107.55	2.15	109.70	122.20	-12.50	AVG	NoLimit
7		5853.360	79.27	2.15	81.42	114.54	-33.12	peak	
8		5862.147	75.81	2.15	77.96	108.80	-30.84	peak	
9		5878.093	72.80	2.15	74.95	102.90	-27.95	peak	
10	*	5933.253	62.63	2.16	64.79	68.20	-3.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/2
Test Frequency	5210MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

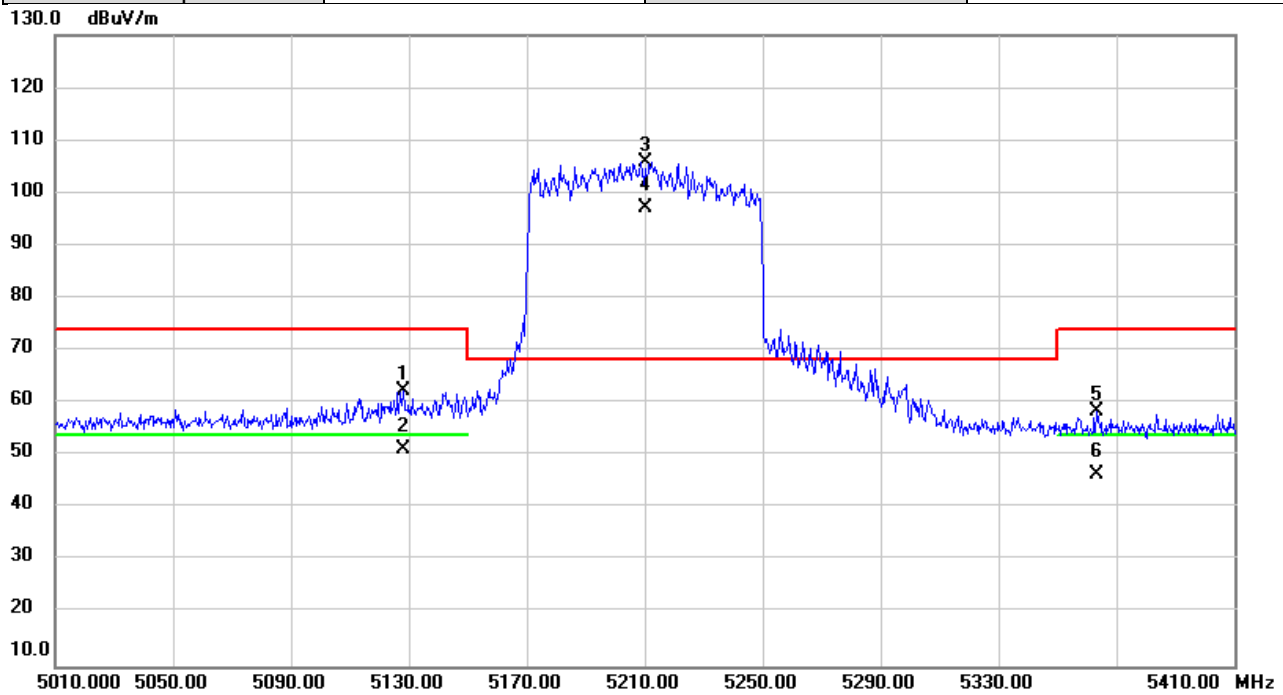


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5128.067	60.02	2.32	62.34	74.00	-11.66	peak	
2		5128.067	49.08	2.32	51.40	54.00	-2.60	AVG	
3	*	5210.000	103.65	2.28	105.93	68.20	37.73	peak	NoLimit
4	X	5210.000	94.84	2.28	97.12	68.20	28.92	AVG	NoLimit
5		5363.560	56.34	2.20	58.54	74.00	-15.46	peak	
6		5363.560	44.38	2.20	46.58	54.00	-7.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/2
Test Frequency	5290MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

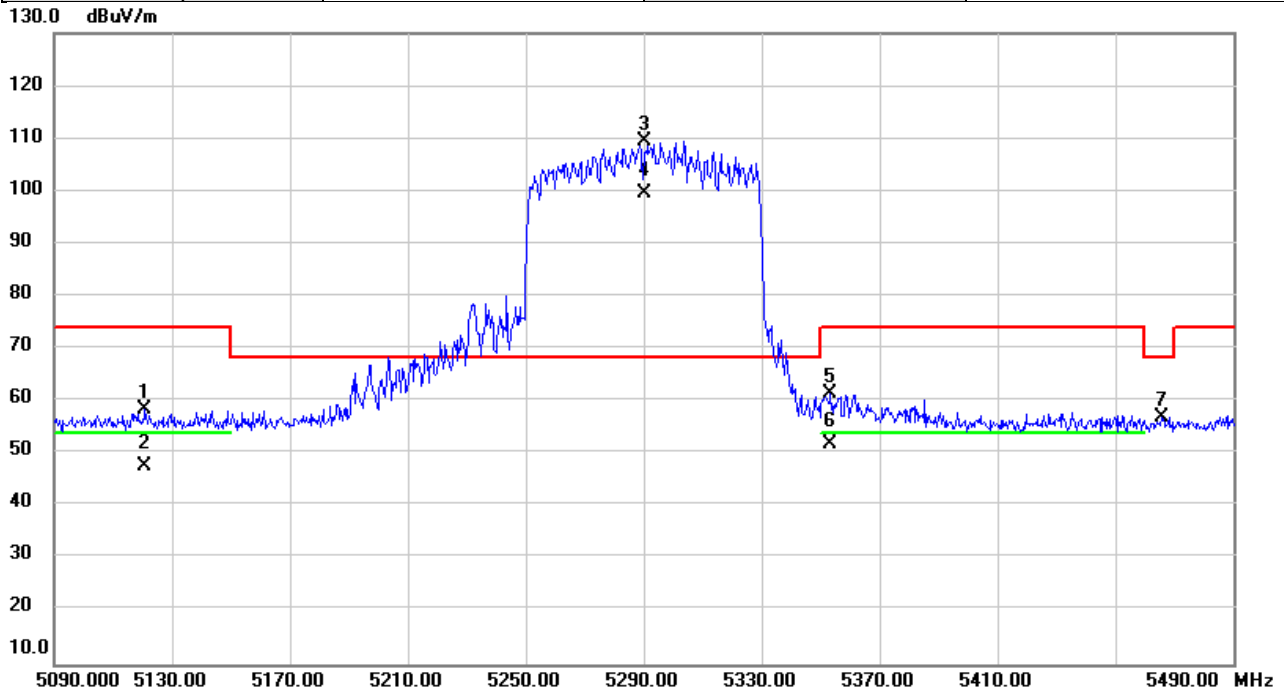


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5120.840	56.05	2.33	58.38	74.00	-15.62	peak	
2		5120.840	45.35	2.33	47.68	54.00	-6.32	AVG	
3	*	5290.000	107.14	2.23	109.37	68.20	41.17	peak	NoLimit
4	X	5290.000	97.27	2.23	99.50	68.20	31.30	AVG	NoLimit
5		5353.320	59.20	2.20	61.40	74.00	-12.60	peak	
6		5353.320	49.59	2.20	51.79	54.00	-2.21	AVG	
7		5465.573	54.79	2.14	56.93	68.20	-11.27	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/2
Test Frequency	5530MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

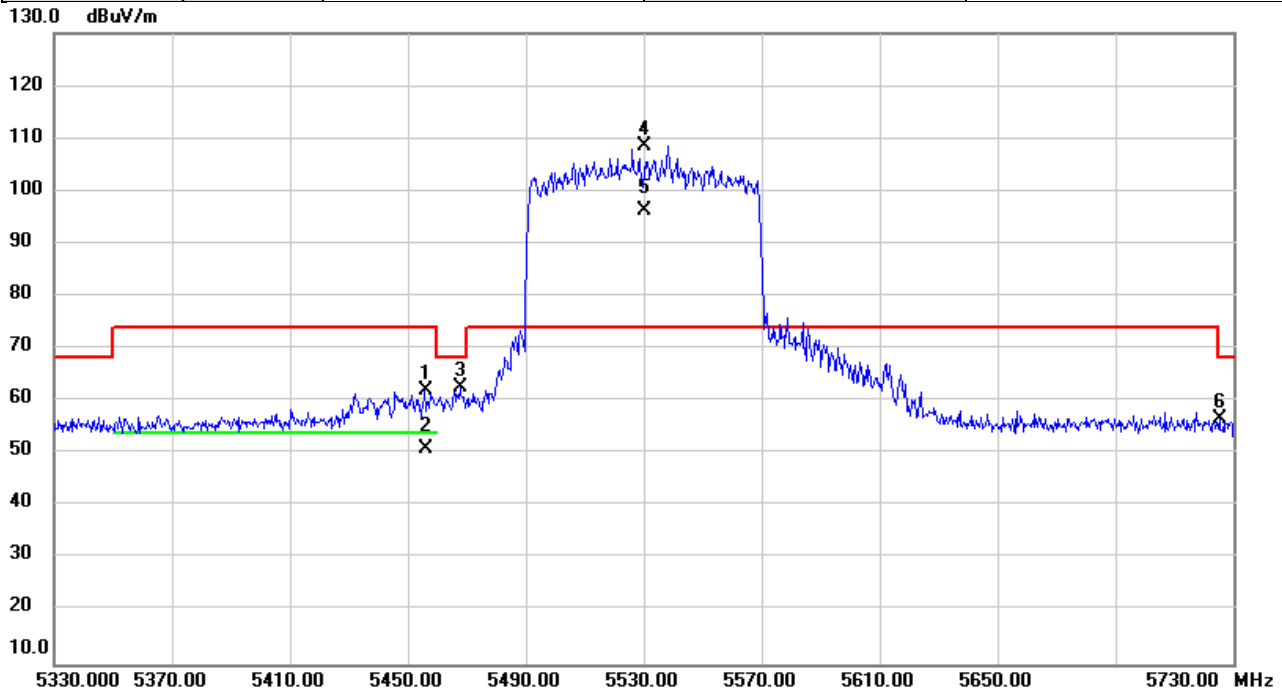


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5455.867	59.84	2.14	61.98	74.00	-12.02	peak	
2		5455.867	48.95	2.14	51.09	54.00	-2.91	AVG	
3		5467.947	60.52	2.14	62.66	68.20	-5.54	peak	
4	*	5530.000	106.28	2.13	108.41	74.00	34.41	peak	NoLimit
5	X	5530.000	94.12	2.13	96.25	74.00	22.25	AVG	NoLimit
6		5725.373	54.38	2.14	56.52	68.20	-11.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/2
Test Frequency	5610MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

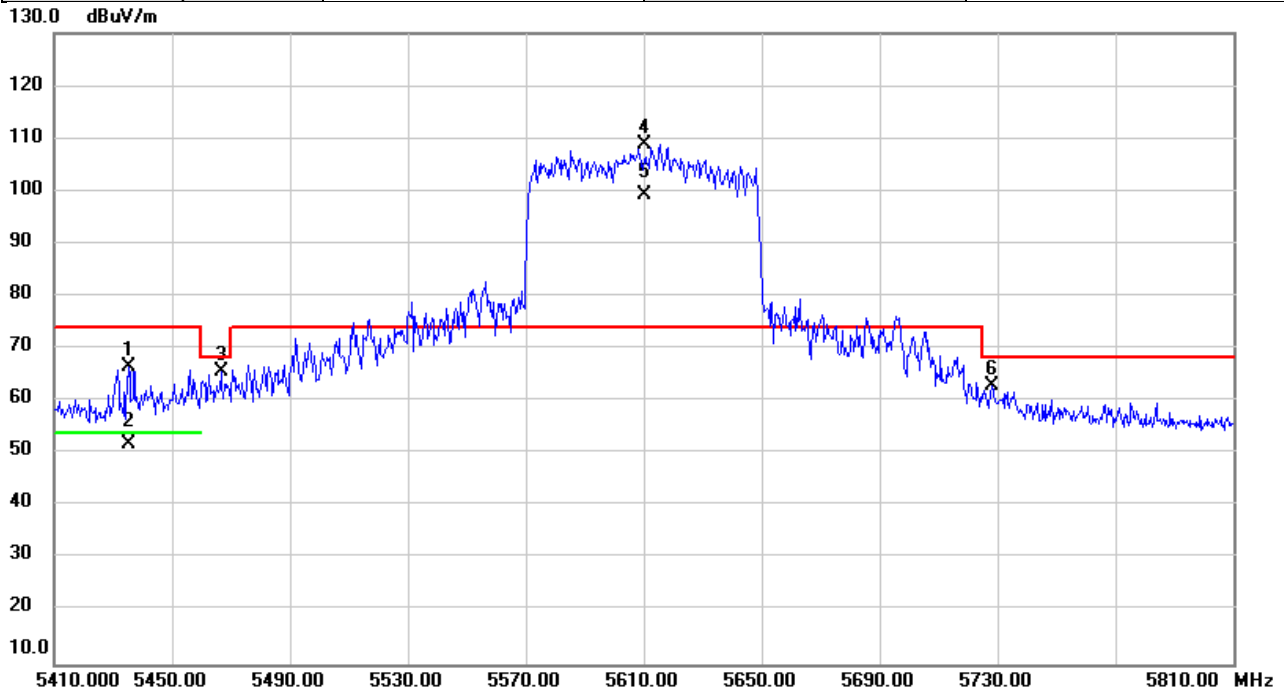


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5435.133	64.34	2.16	66.50	74.00	-7.50	peak	
2		5435.133	49.58	2.16	51.74	54.00	-2.26	AVG	
3		5466.640	63.60	2.14	65.74	68.20	-2.46	peak	
4	*	5610.000	106.72	2.13	108.85	74.00	34.85	peak	NoLimit
5	X	5610.000	97.00	2.13	99.13	74.00	25.13	AVG	NoLimit
6		5728.347	60.78	2.14	62.92	68.20	-5.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/2
Test Frequency	5775MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

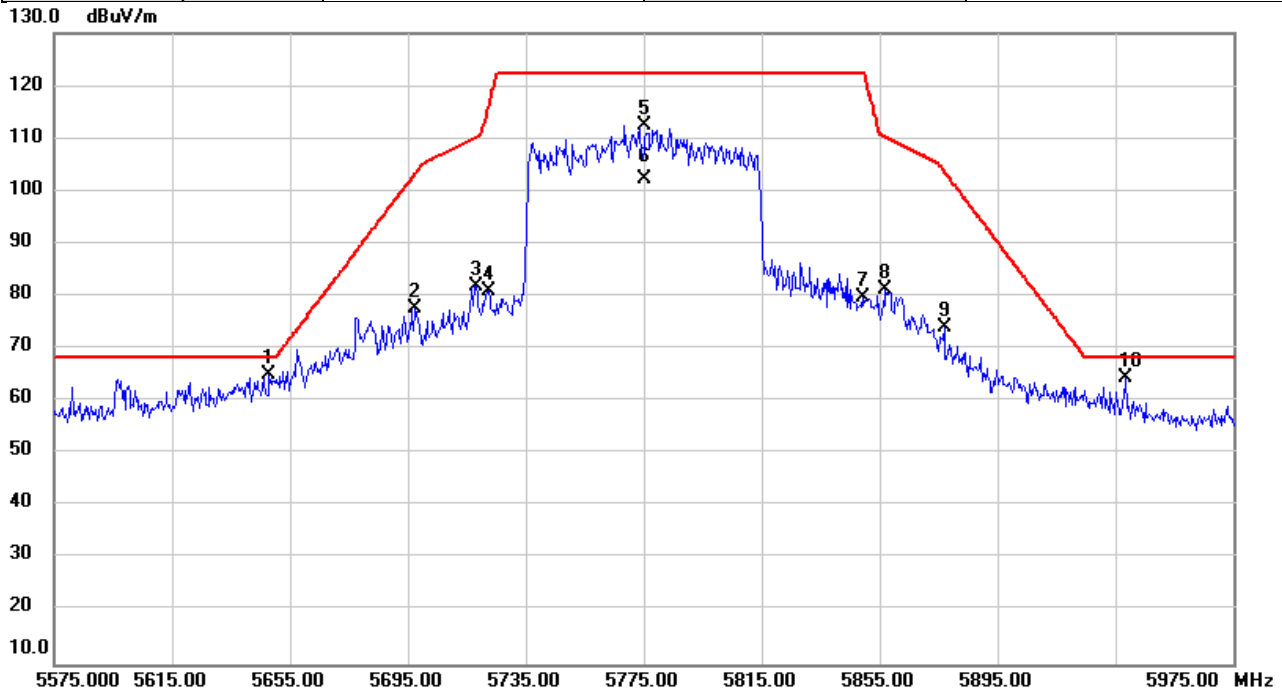


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5647.920	62.84	2.14	64.98	68.20	-3.22	peak	
2		5697.560	75.50	2.14	77.64	103.40	-25.76	peak	
3		5718.067	79.83	2.14	81.97	110.26	-28.29	peak	
4		5722.333	78.95	2.14	81.09	116.12	-35.03	peak	
5		5775.000	110.43	2.15	112.58	122.20	-9.62	peak	NoLimit
6		5775.000	100.06	2.15	102.21	122.20	-19.99	AVG	NoLimit
7		5849.227	77.57	2.15	79.72	122.20	-42.48	peak	
8		5857.120	78.98	2.16	81.14	110.21	-29.07	peak	
9		5877.000	72.00	2.15	74.15	103.71	-29.56	peak	
10		5938.453	62.37	2.17	64.54	68.20	-3.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/2
Test Frequency	5250MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

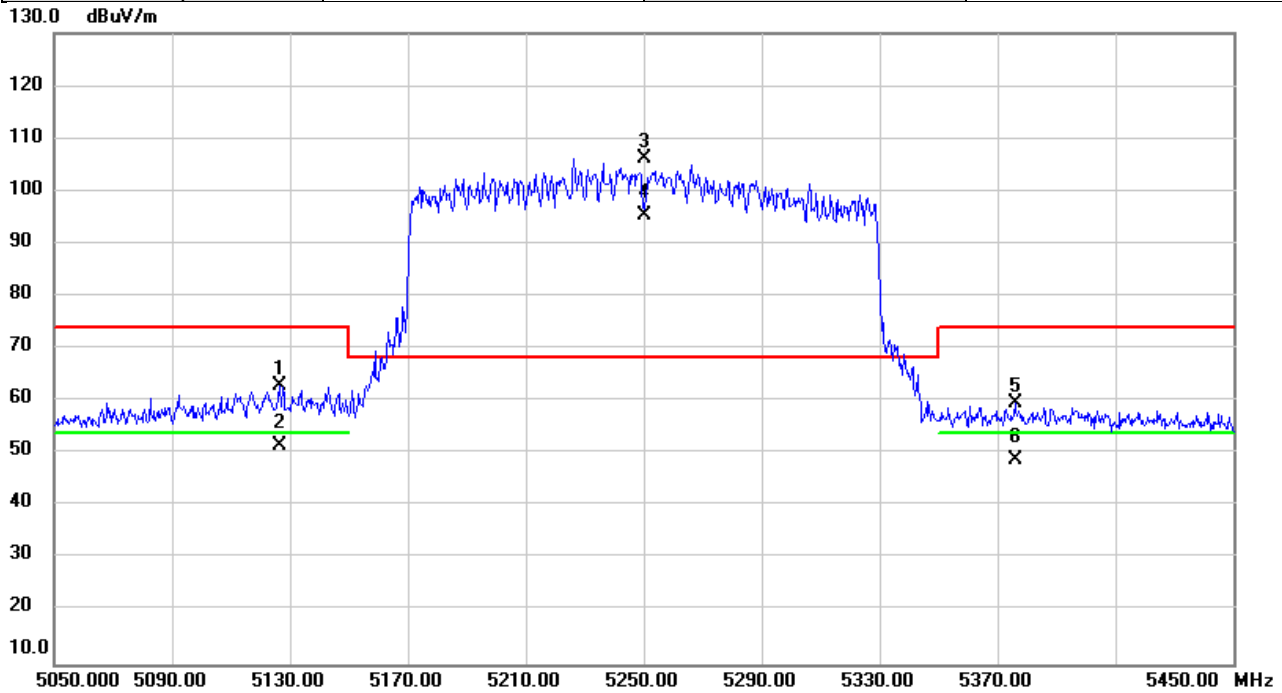


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5126.707	60.78	2.32	63.10	74.00	-10.90	peak	
2		5126.707	49.23	2.32	51.55	54.00	-2.45	AVG	
3	*	5250.000	103.84	2.25	106.09	68.20	37.89	peak	NoLimit
4	X	5250.000	93.05	2.25	95.30	68.20	27.10	AVG	NoLimit
5		5375.947	57.33	2.18	59.51	74.00	-14.49	peak	
6		5375.947	46.81	2.18	48.99	54.00	-5.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/2
Test Frequency	5570MHz	Polarization	Vertical
Temp	23°C	Hum.	54%

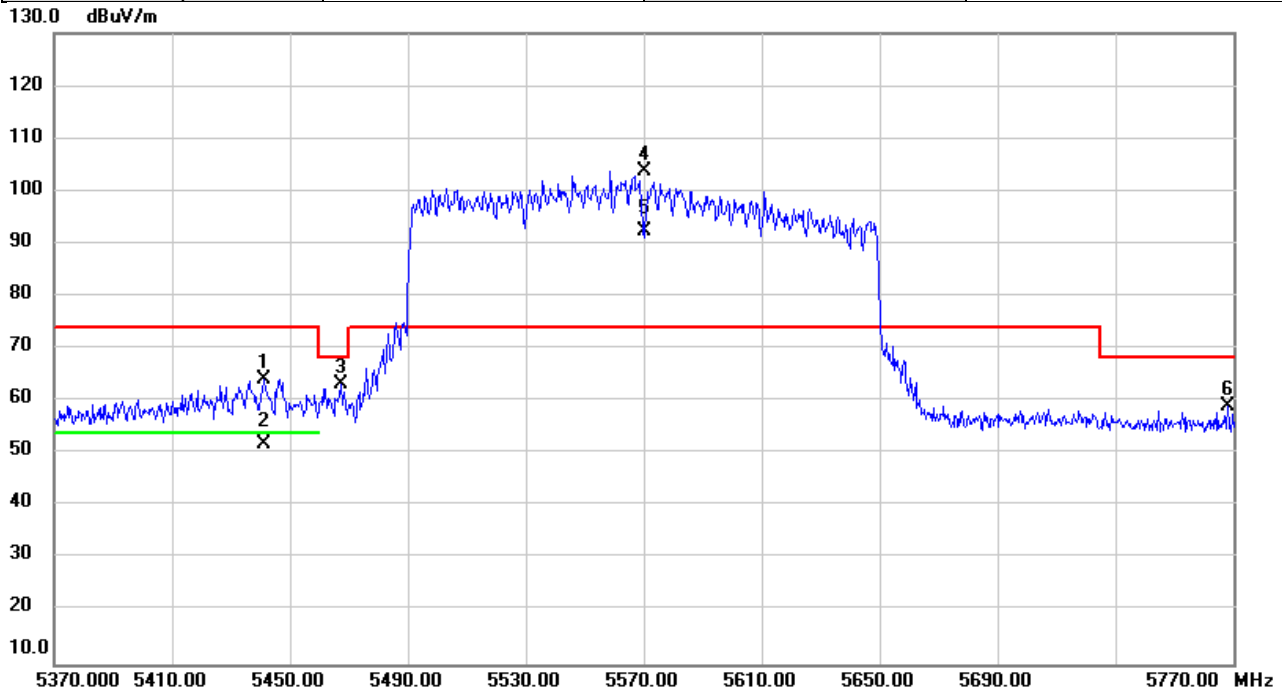


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5441.240	62.03	2.15	64.18	74.00	-9.82	peak	
2		5441.240	49.56	2.15	51.71	54.00	-2.29	AVG	
3		5467.427	61.19	2.14	63.33	68.20	-4.87	peak	
4	*	5570.000	101.56	2.13	103.69	74.00	29.69	peak	NoLimit
5	X	5570.000	90.35	2.13	92.48	74.00	18.48	AVG	NoLimit
6		5768.093	56.85	2.15	59.00	68.20	-9.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

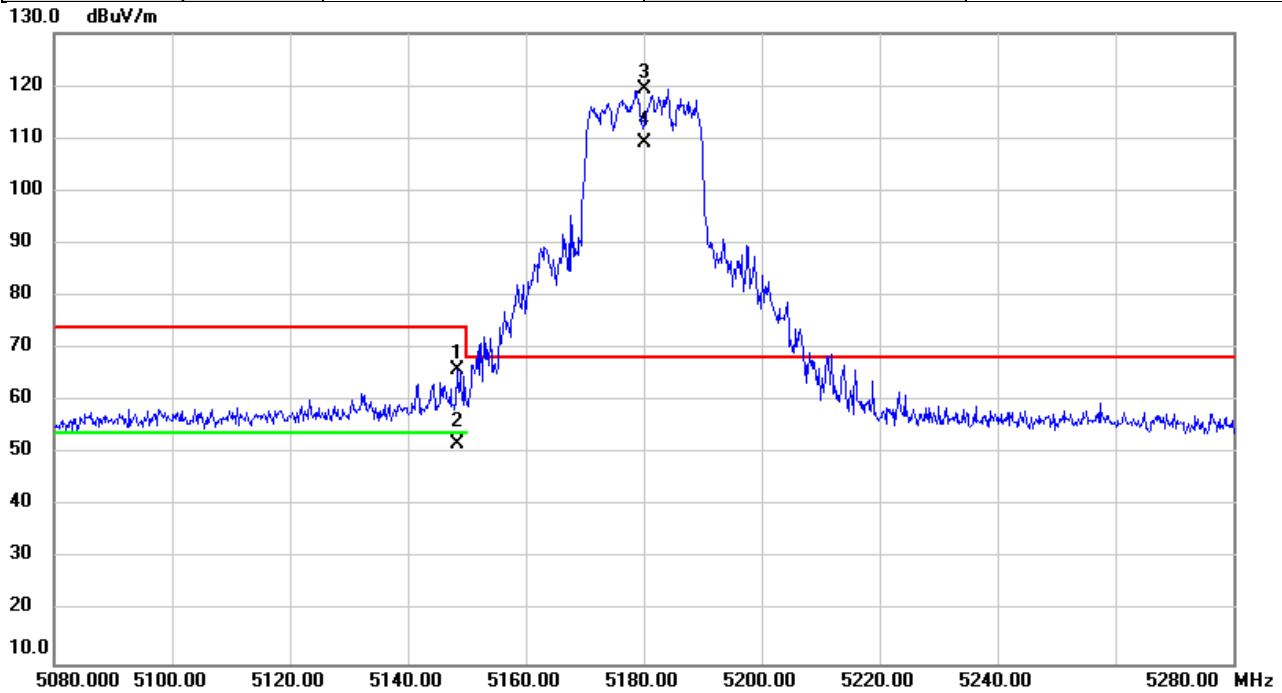


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.347	63.65	2.31	65.96	74.00	-8.04	peak	
2		5148.347	49.60	2.31	51.91	54.00	-2.09	AVG	
3	*	5180.000	117.01	2.29	119.30	68.20	51.10	peak	NoLimit
4	X	5180.000	106.77	2.29	109.06	68.20	40.86	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

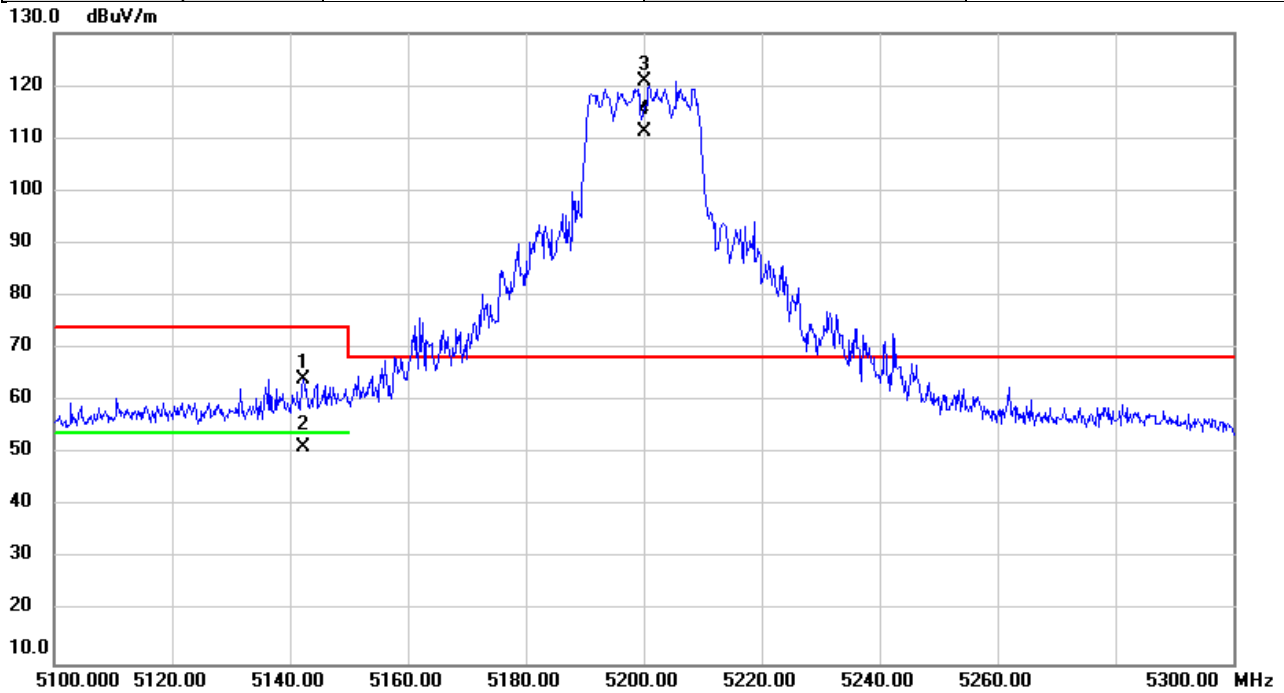


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5142.267	61.98	2.31	64.29	74.00	-9.71	peak	
2		5142.267	48.88	2.31	51.19	54.00	-2.81	AVG	
3	*	5200.000	118.56	2.28	120.84	68.20	52.64	peak	NoLimit
4	X	5200.000	108.98	2.28	111.26	68.20	43.06	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

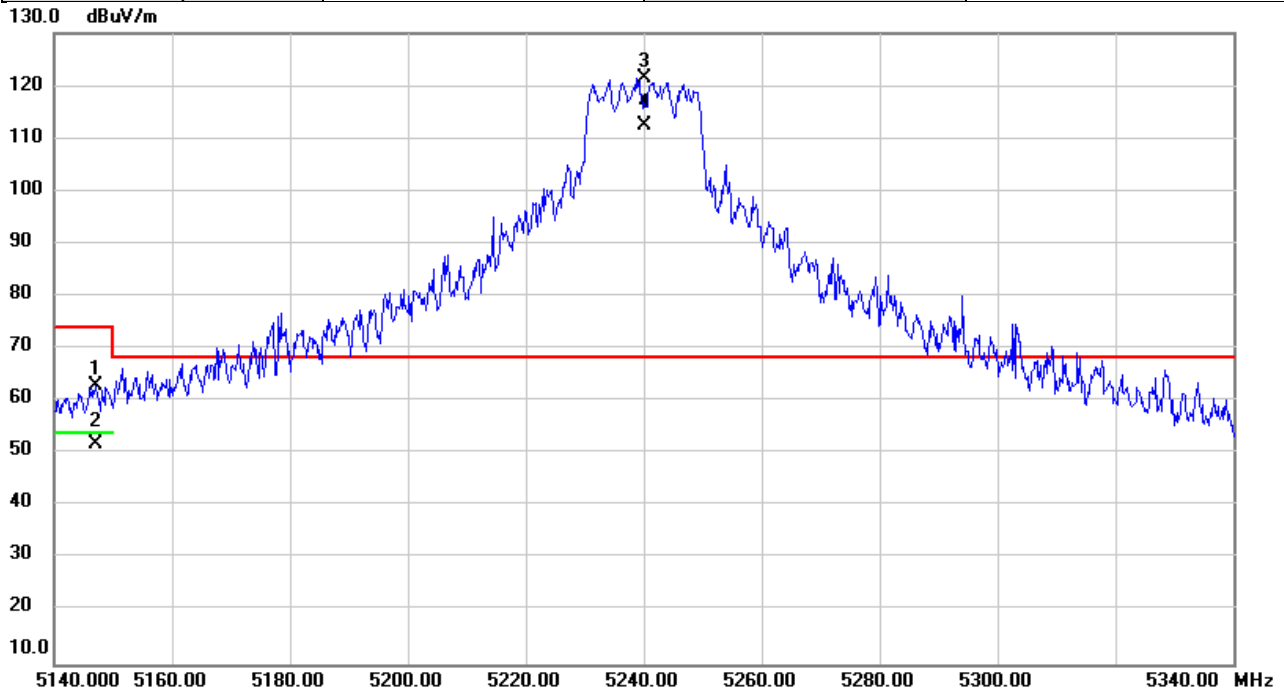


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5147.000	60.57	2.31	62.88	74.00	-11.12	peak	
2		5147.000	49.68	2.31	51.99	54.00	-2.01	AVG	
3	*	5240.000	119.28	2.26	121.54	68.20	53.34	peak	NoLimit
4	X	5240.000	110.33	2.26	112.59	68.20	44.39	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

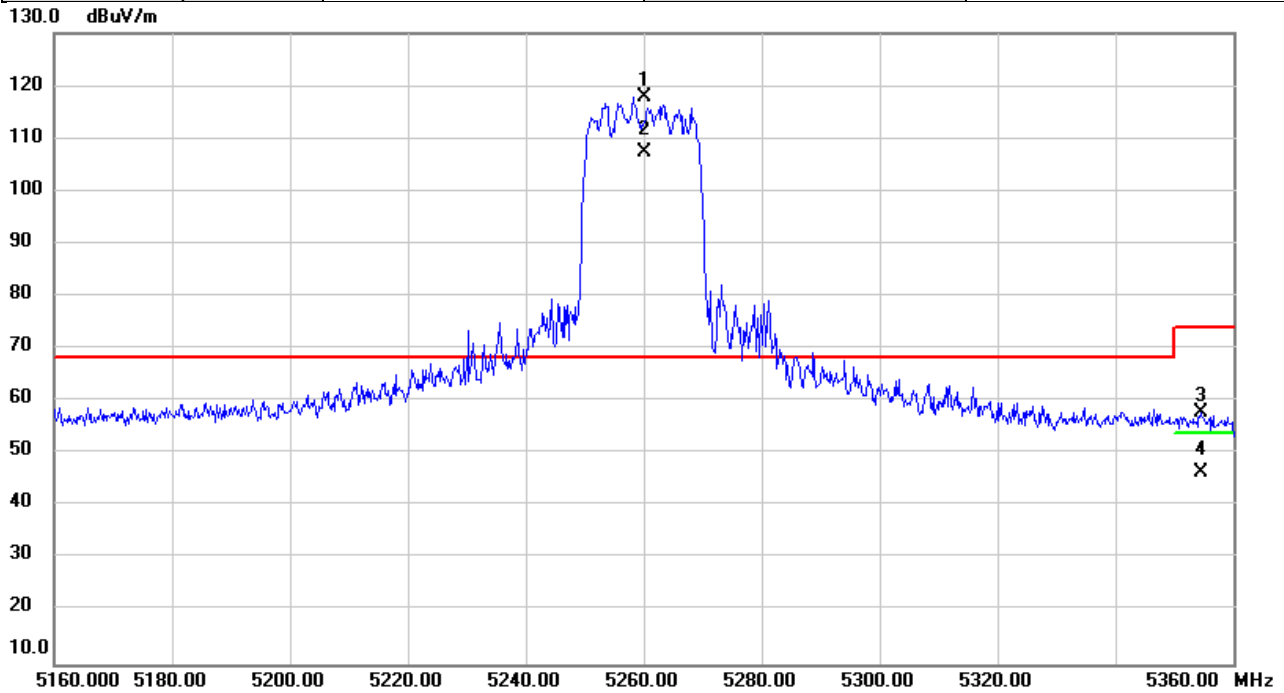


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	115.48	2.25	117.73	68.20	49.53	peak	NoLimit
2	X	5260.000	105.11	2.25	107.36	68.20	39.16	AVG	NoLimit
3		5354.593	55.64	2.20	57.84	74.00	-16.16	peak	
4		5354.593	44.27	2.20	46.47	54.00	-7.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

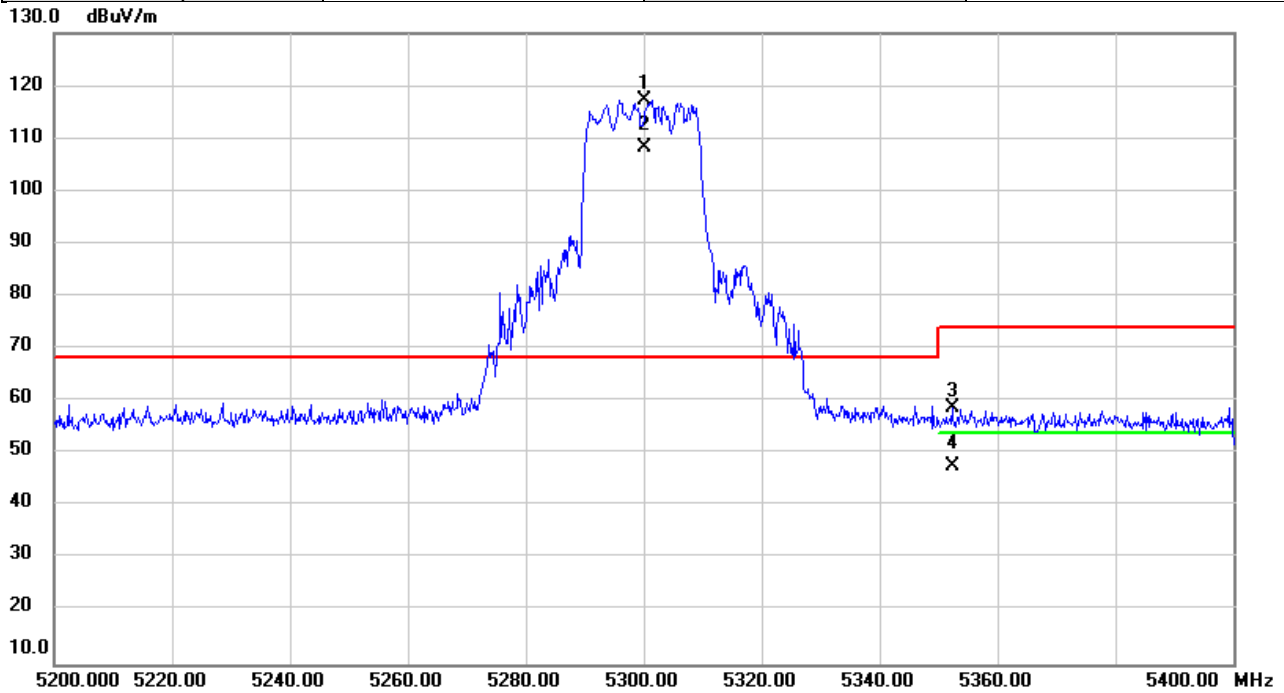


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5300.000	115.04	2.23	117.27	68.20	49.07	peak	NoLimit
2	X	5300.000	106.10	2.23	108.33	68.20	40.13	AVG	NoLimit
3		5352.287	56.48	2.20	58.68	74.00	-15.32	peak	
4		5352.287	45.48	2.20	47.68	54.00	-6.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

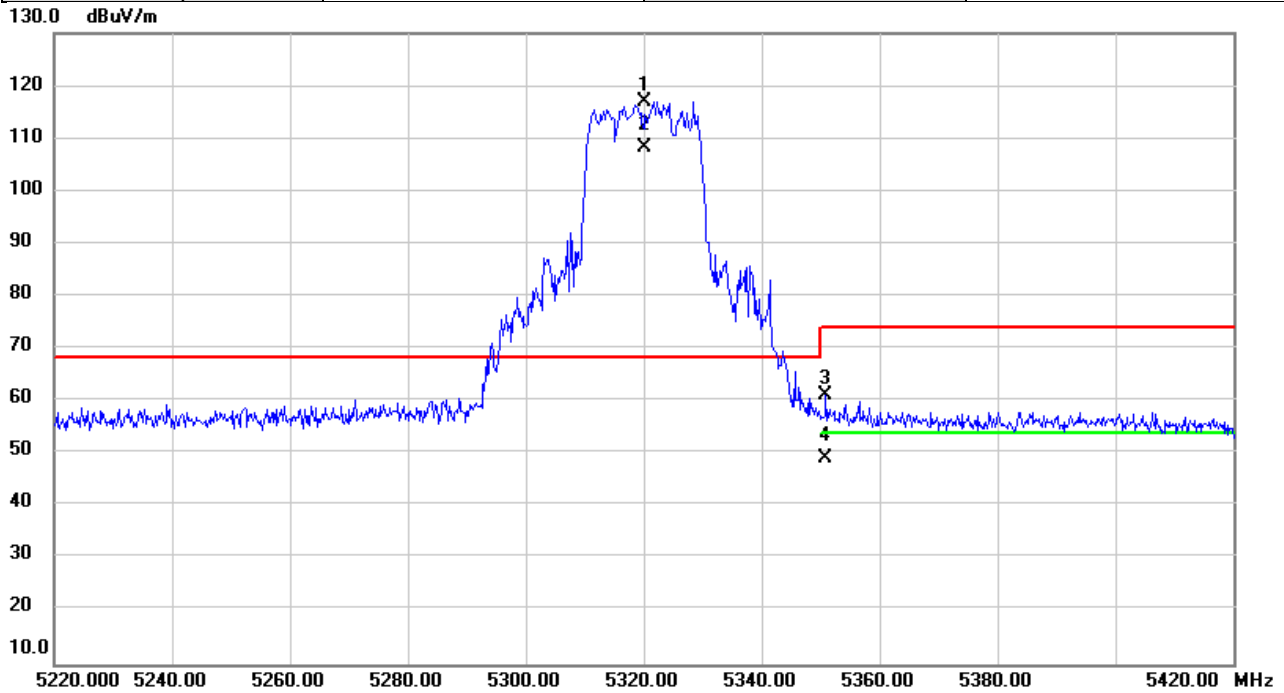


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	114.79	2.22	117.01	68.20	48.81	peak	NoLimit
2	X	5320.000	105.89	2.22	108.11	68.20	39.91	AVG	NoLimit
3		5350.913	58.82	2.20	61.02	74.00	-12.98	peak	
4		5350.913	46.89	2.20	49.09	54.00	-4.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

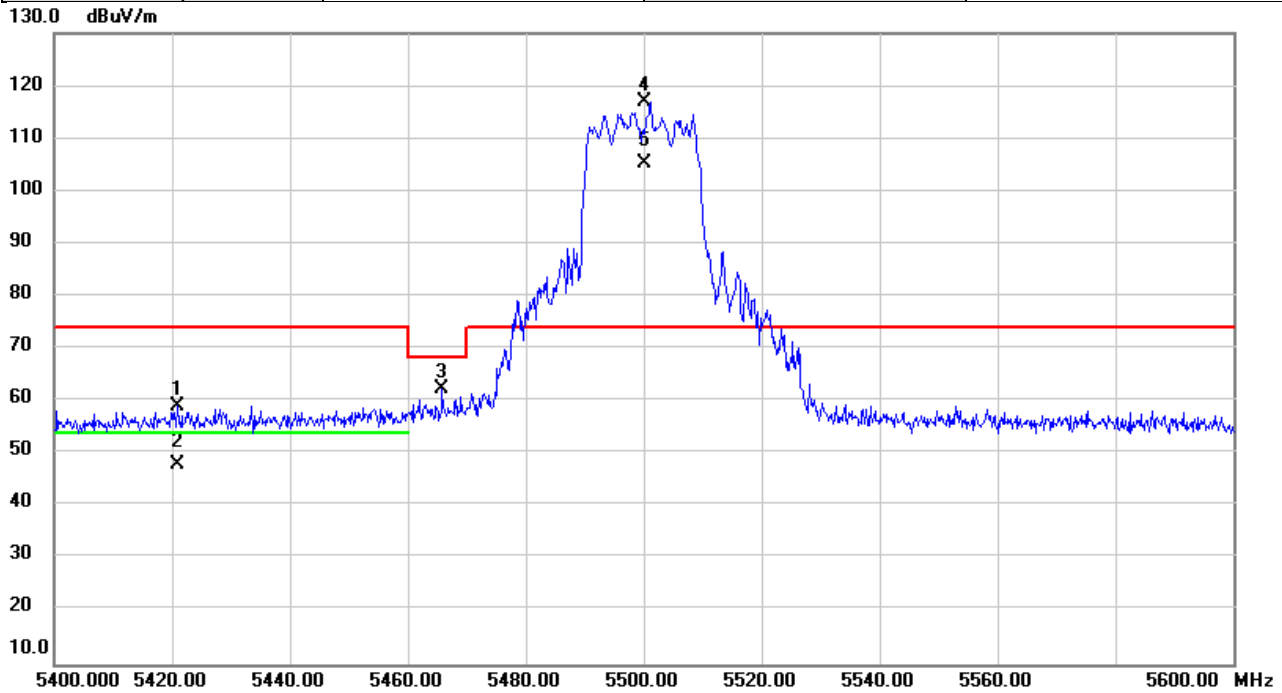


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5420.920	56.92	2.17	59.09	74.00	-14.91	peak	
2		5420.920	45.76	2.17	47.93	54.00	-6.07	AVG	
3		5465.833	60.18	2.14	62.32	68.20	-5.88	peak	
4	*	5500.000	114.76	2.12	116.88	74.00	42.88	peak	NoLimit
5	X	5500.000	103.08	2.12	105.20	74.00	31.20	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

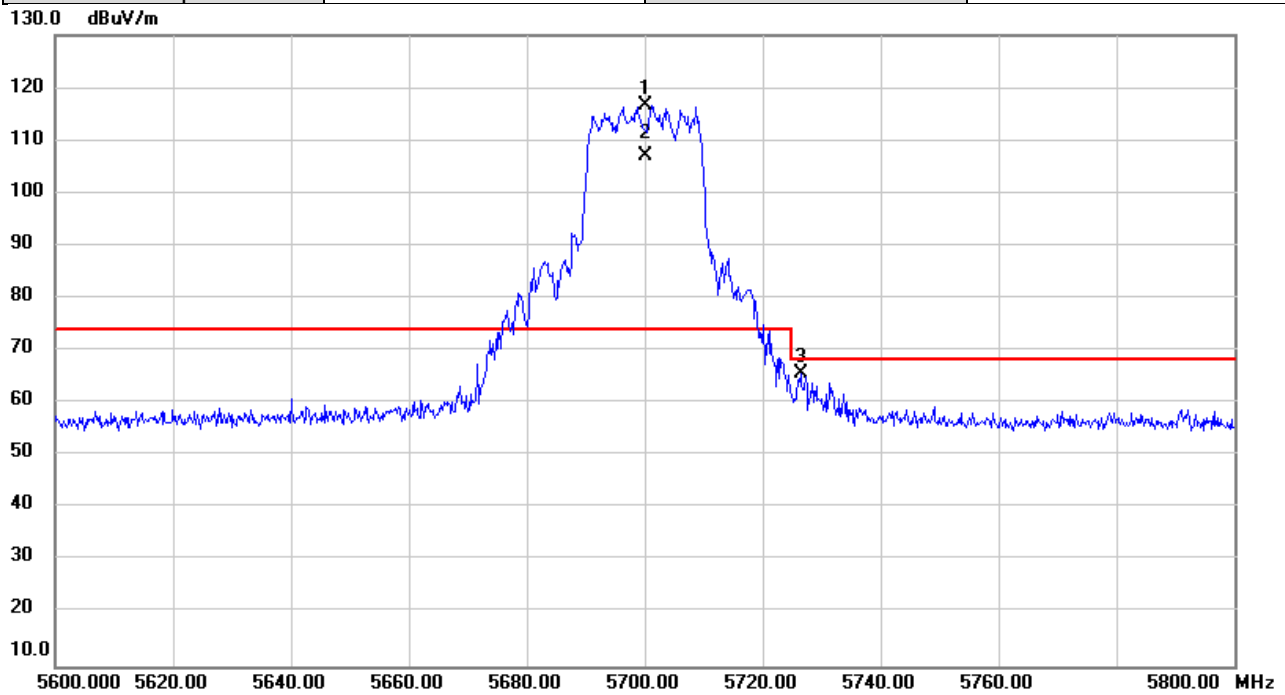


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	114.48	2.14	116.62	74.00	42.62	peak	NoLimit
2	X	5700.000	104.82	2.14	106.96	74.00	32.96	AVG	NoLimit
3		5726.553	63.54	2.14	65.68	68.20	-2.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

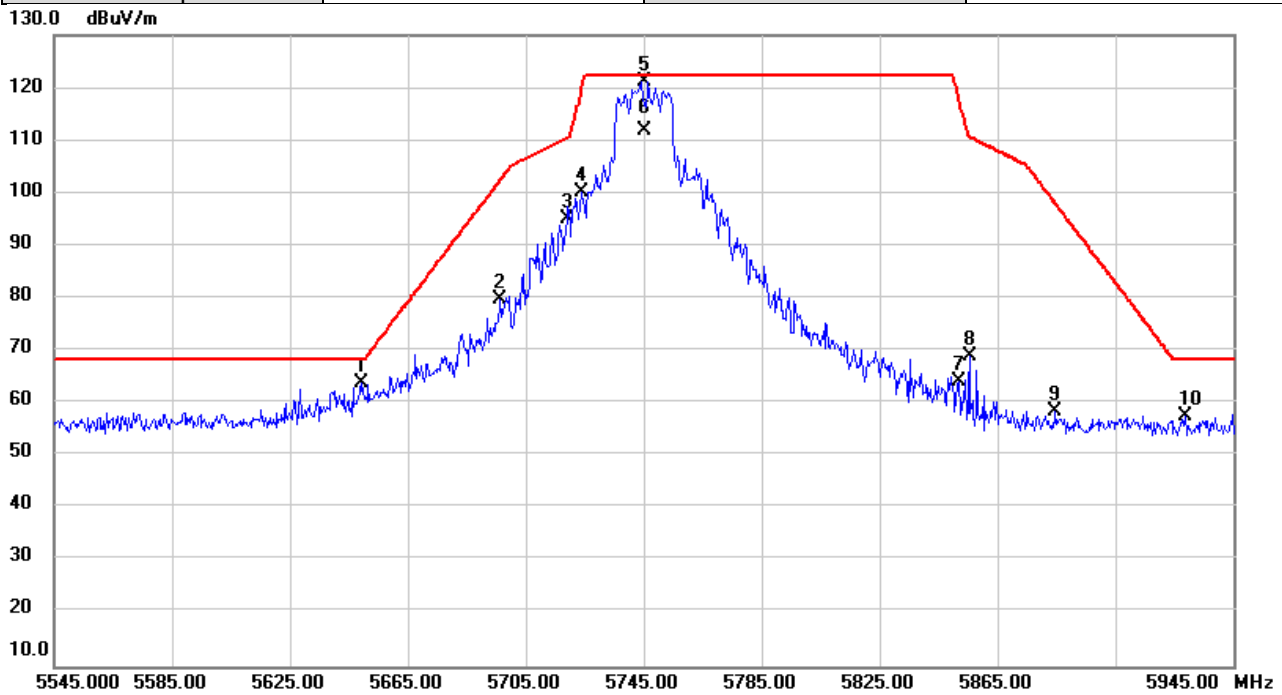


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5649.507	61.69	2.14	63.83	68.20	-4.37	peak	
2		5696.227	77.61	2.14	79.75	102.42	-22.67	peak	
3		5718.987	93.01	2.14	95.15	110.52	-15.37	peak	
4		5723.747	97.93	2.14	100.07	119.34	-19.27	peak	
5	*	5745.000	119.04	2.14	121.18	122.20	-1.02	peak	NoLimit
6		5745.000	109.84	2.14	111.98	122.20	-10.22	AVG	NoLimit
7		5852.053	61.87	2.15	64.02	117.52	-53.50	peak	
8		5855.467	66.69	2.16	68.85	110.67	-41.82	peak	
9		5884.640	56.20	2.16	58.36	98.04	-39.68	peak	
10		5928.933	55.38	2.15	57.53	68.20	-10.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

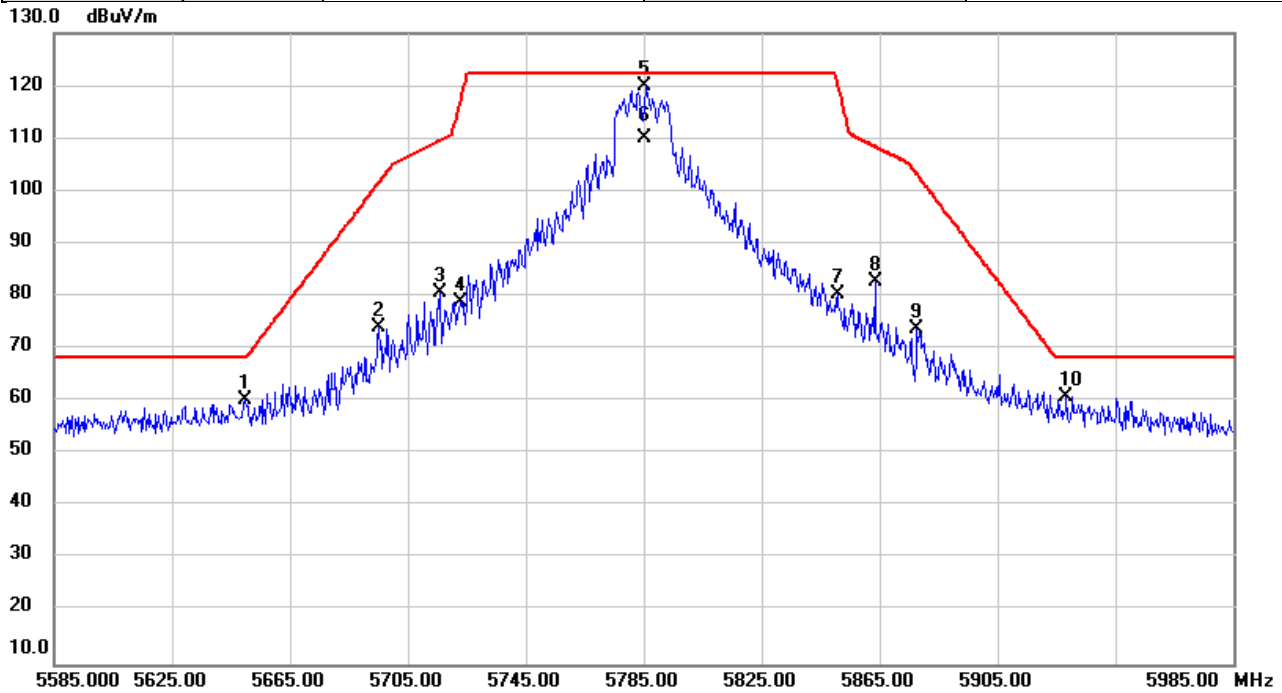


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5649.787	58.02	2.14	60.16	68.20	-8.04	peak	
2		5695.213	72.06	2.13	74.19	101.67	-27.48	peak	
3		5715.760	78.40	2.15	80.55	109.61	-29.06	peak	
4		5722.733	76.78	2.14	78.92	117.03	-38.11	peak	
5	*	5785.000	117.81	2.14	119.95	122.20	-2.25	peak	NoLimit
6		5785.000	107.82	2.14	109.96	122.20	-12.24	AVG	NoLimit
7		5850.893	78.16	2.15	80.31	120.16	-39.85	peak	
8		5863.507	80.67	2.16	82.83	108.42	-25.59	peak	
9		5877.747	71.59	2.15	73.74	103.16	-29.42	peak	
10		5928.440	58.85	2.15	61.00	68.20	-7.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT20)	Test Date	2025/12/3
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

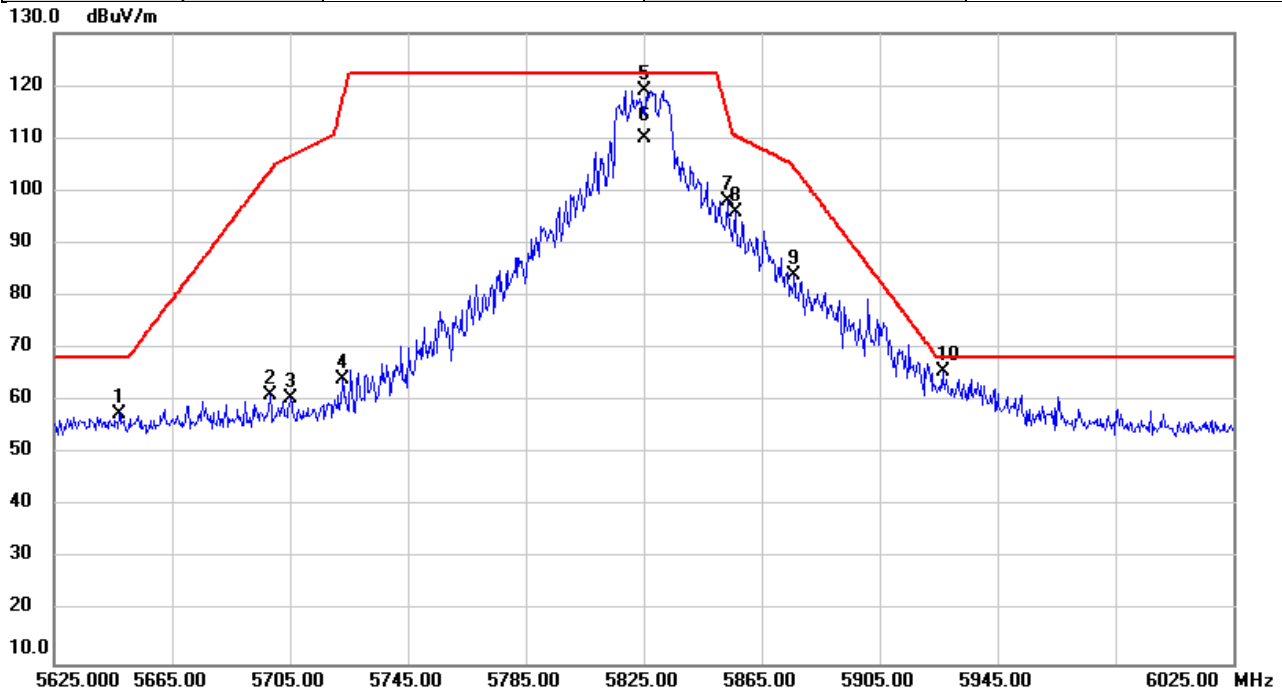


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5647.347	55.48	2.14	57.62	68.20	-10.58	peak	
2		5698.173	58.88	2.14	61.02	103.85	-42.83	peak	
3		5705.280	58.54	2.14	60.68	106.68	-46.00	peak	
4		5723.027	61.92	2.14	64.06	117.70	-53.64	peak	
5		5825.000	116.91	2.15	119.06	122.20	-3.14	peak	NoLimit
6		5825.000	108.03	2.15	110.18	122.20	-12.02	AVG	NoLimit
7		5853.280	95.92	2.15	98.07	114.72	-16.65	peak	
8		5855.973	93.86	2.16	96.02	110.53	-14.51	peak	
9		5876.107	81.90	2.15	84.05	104.38	-20.33	peak	
10	*	5926.427	63.57	2.17	65.74	68.20	-2.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

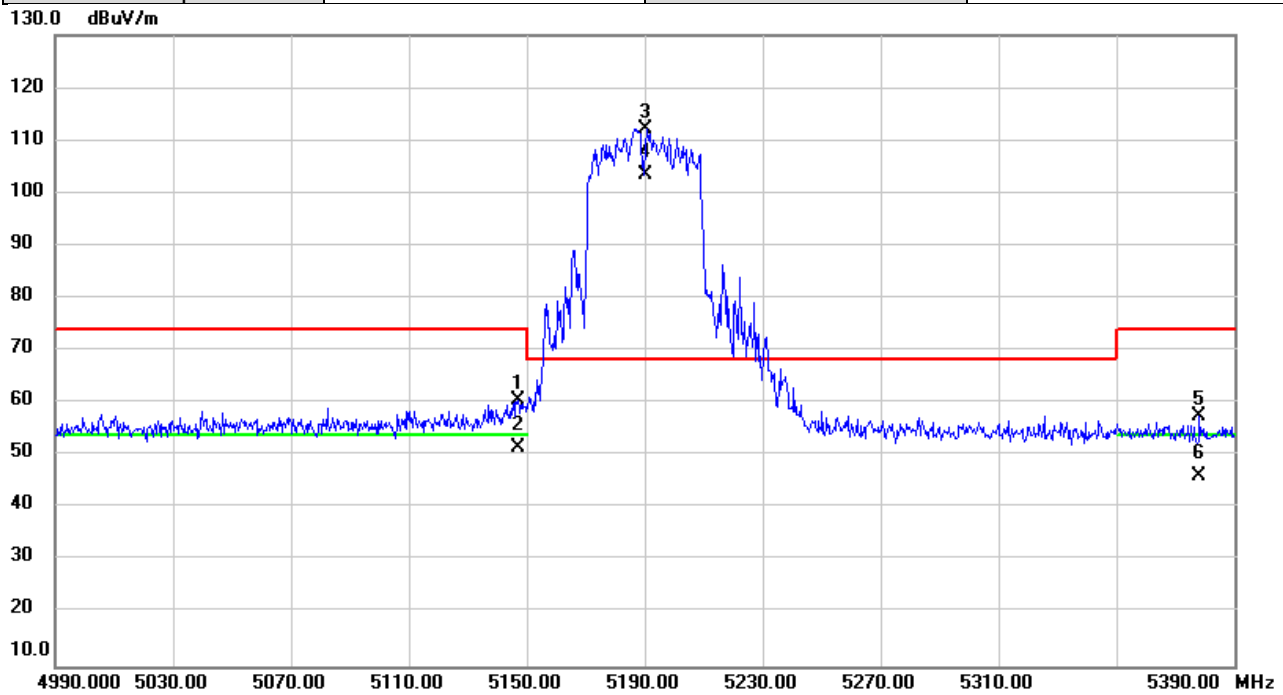


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.920	58.20	2.31	60.51	74.00	-13.49	peak	
2		5146.920	49.14	2.31	51.45	54.00	-2.55	AVG	
3	*	5190.000	109.96	2.28	112.24	68.20	44.04	peak	NoLimit
4	X	5190.000	101.14	2.28	103.42	68.20	35.22	AVG	NoLimit
5		5378.213	55.27	2.18	57.45	74.00	-16.55	peak	
6		5378.213	44.01	2.18	46.19	54.00	-7.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

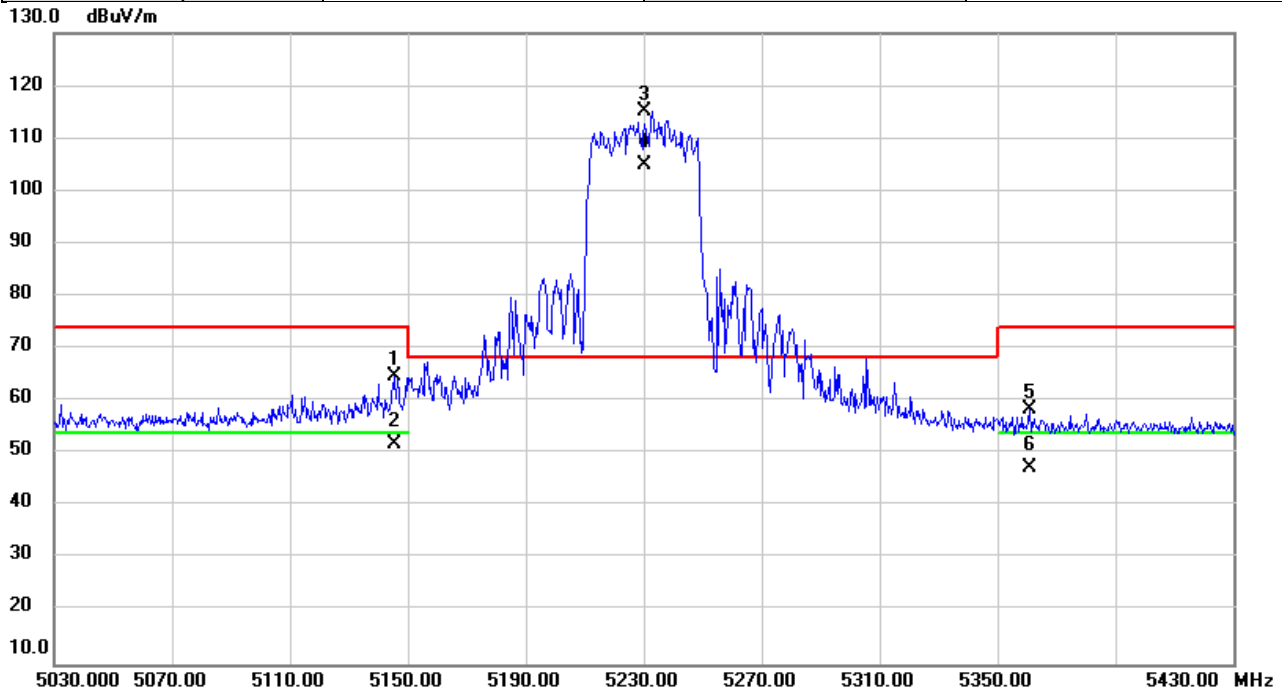


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.480	62.40	2.31	64.71	74.00	-9.29	peak	
2		5145.480	49.48	2.31	51.79	54.00	-2.21	AVG	
3	*	5230.000	112.82	2.26	115.08	68.20	46.88	peak	NoLimit
4	X	5230.000	102.71	2.26	104.97	68.20	36.77	AVG	NoLimit
5		5361.027	56.29	2.20	58.49	74.00	-15.51	peak	
6		5361.027	45.12	2.20	47.32	54.00	-6.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

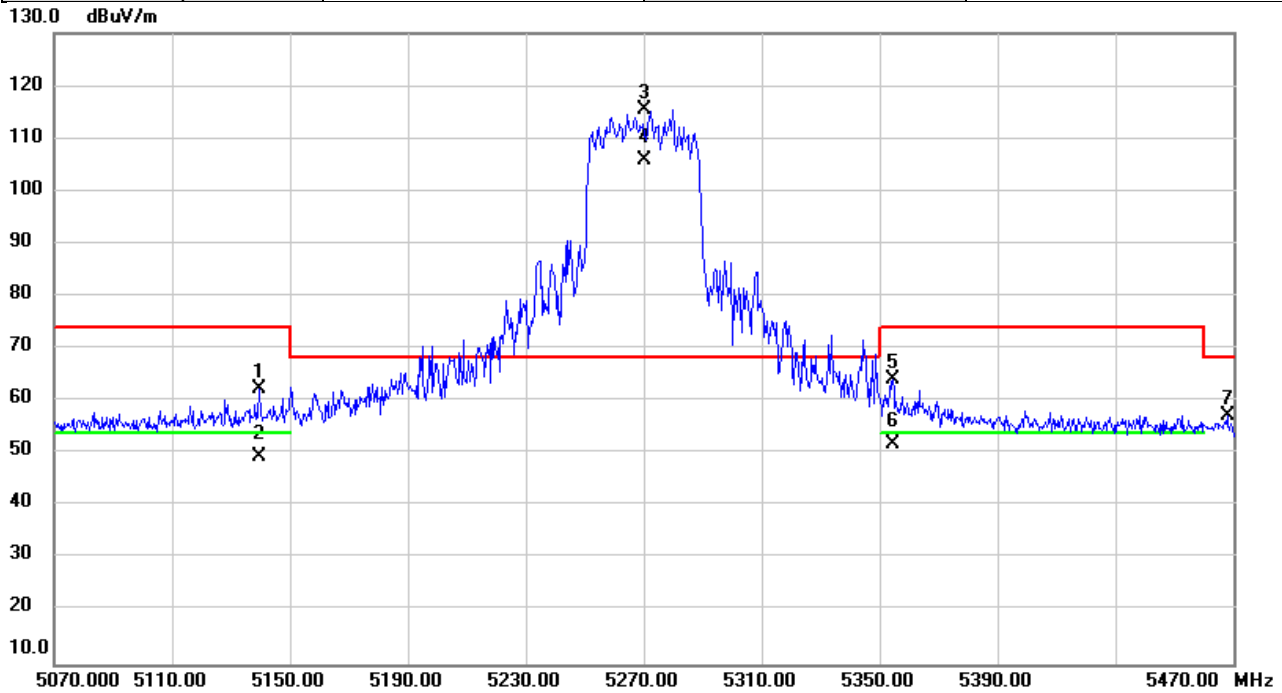


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5139.440	60.13	2.31	62.44	74.00	-11.56	peak	
2		5139.440	47.15	2.31	49.46	54.00	-4.54	AVG	
3	*	5270.000	113.30	2.25	115.55	68.20	47.35	peak	NoLimit
4	X	5270.000	103.50	2.25	105.75	68.20	37.55	AVG	NoLimit
5		5354.693	62.05	2.20	64.25	74.00	-9.75	peak	
6		5354.693	49.54	2.20	51.74	54.00	-2.26	AVG	
7		5468.147	55.24	2.14	57.38	68.20	-10.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

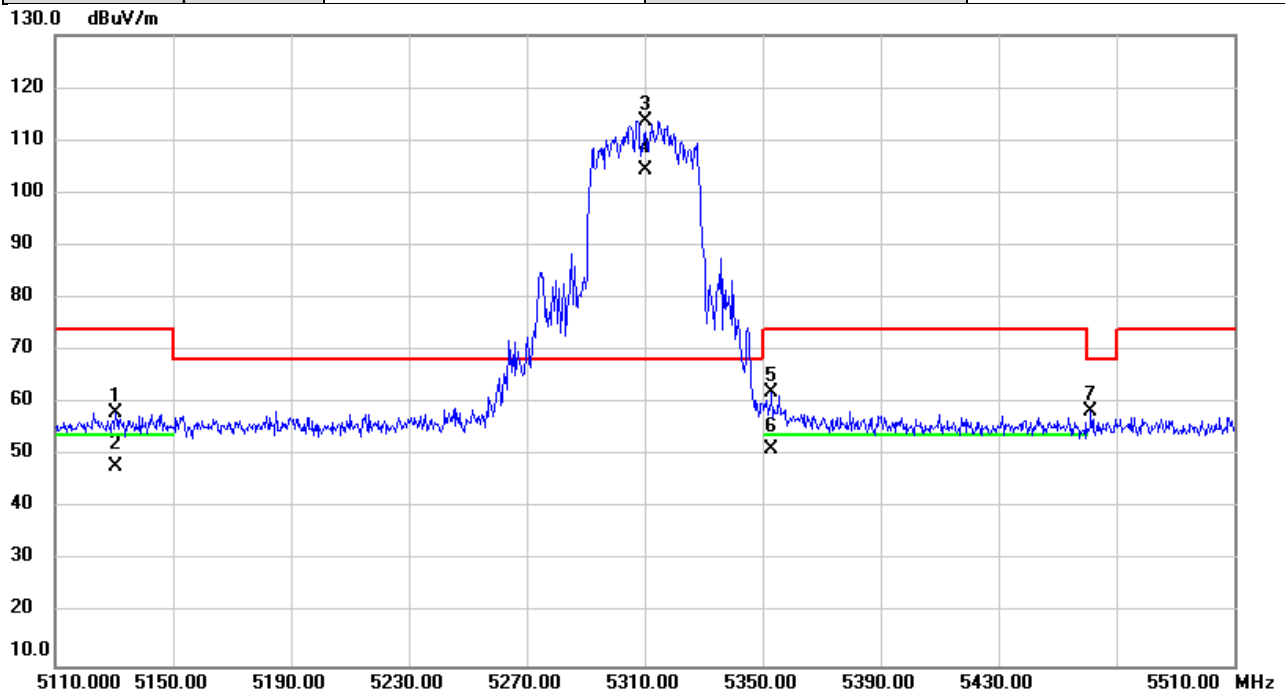


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
1		5130.667	55.83	2.32	58.15	74.00	-15.85	peak	
2		5130.667	45.76	2.32	48.08	54.00	-5.92	AVG	
3	*	5310.000	111.56	2.23	113.79	68.20	45.59	peak	NoLimit
4	X	5310.000	102.17	2.23	104.40	68.20	36.20	AVG	NoLimit
5		5352.880	59.87	2.20	62.07	74.00	-11.93	peak	
6		5352.880	49.15	2.20	51.35	54.00	-2.65	AVG	
7		5461.360	56.20	2.14	58.34	68.20	-9.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

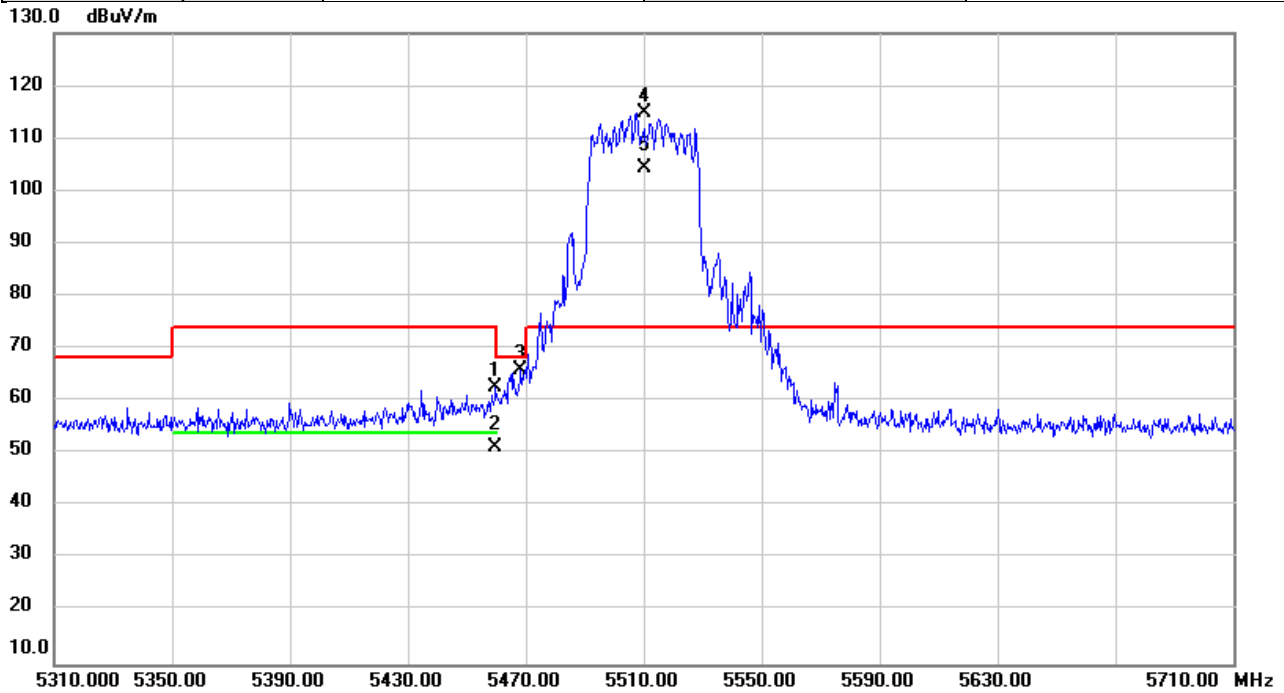


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5459.760	60.46	2.14	62.60	74.00	-11.40	peak	
2		5459.760	49.07	2.14	51.21	54.00	-2.79	AVG	
3		5468.027	63.77	2.14	65.91	68.20	-2.29	peak	
4	*	5510.000	112.73	2.12	114.85	74.00	40.85	peak	NoLimit
5	X	5510.000	102.17	2.12	104.29	74.00	30.29	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

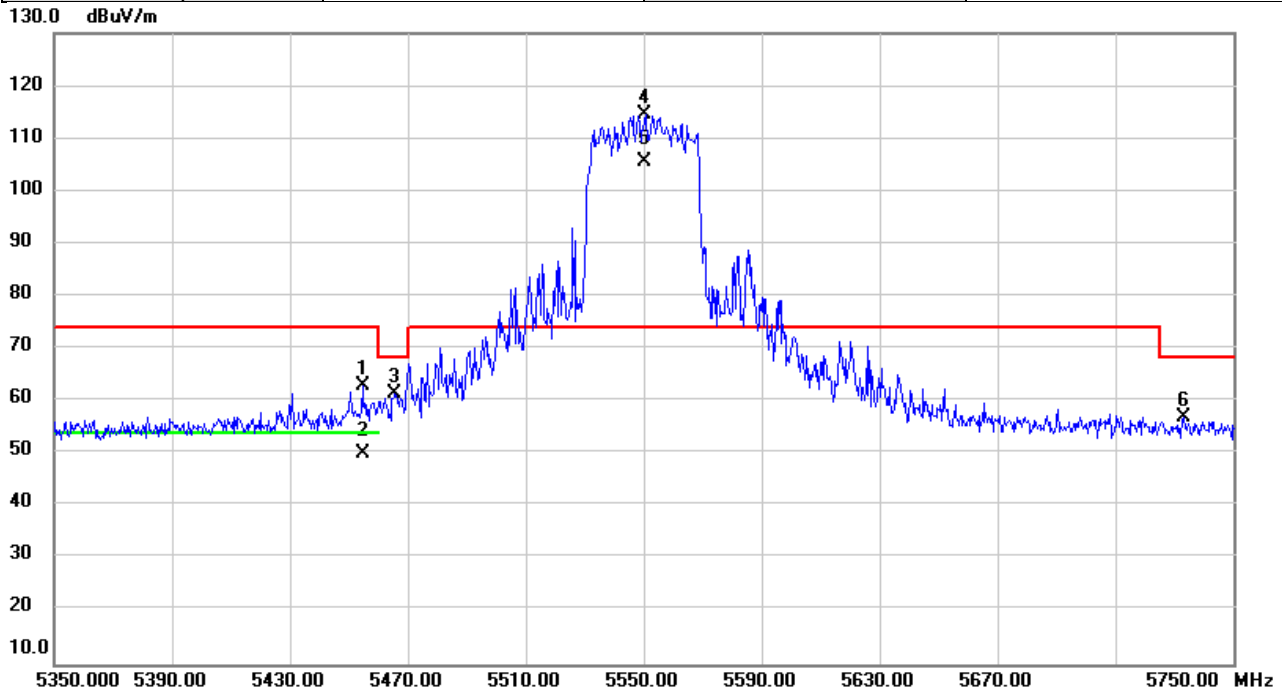


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5454.667	60.67	2.14	62.81	74.00	-11.19	peak	
2		5454.667	47.80	2.14	49.94	54.00	-4.06	AVG	
3		5465.640	59.46	2.14	61.60	68.20	-6.60	peak	
4	*	5550.000	112.32	2.12	114.44	74.00	40.44	peak	NoLimit
5	X	5550.000	103.41	2.12	105.53	74.00	31.53	AVG	NoLimit
6		5733.187	54.70	2.14	56.84	68.20	-11.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

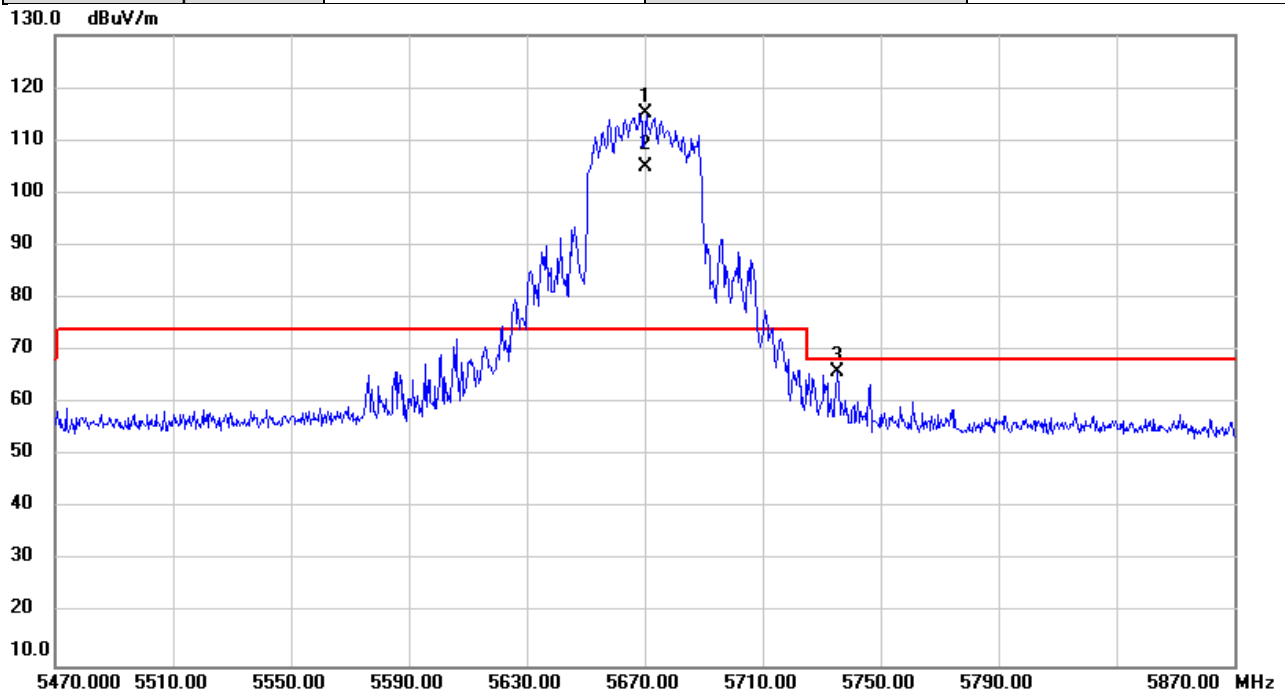


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5670.000	113.08	2.13	115.21	74.00	41.21	peak	NoLimit
2	X	5670.000	102.83	2.13	104.96	74.00	30.96	AVG	NoLimit
3		5735.213	63.72	2.14	65.86	68.20	-2.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

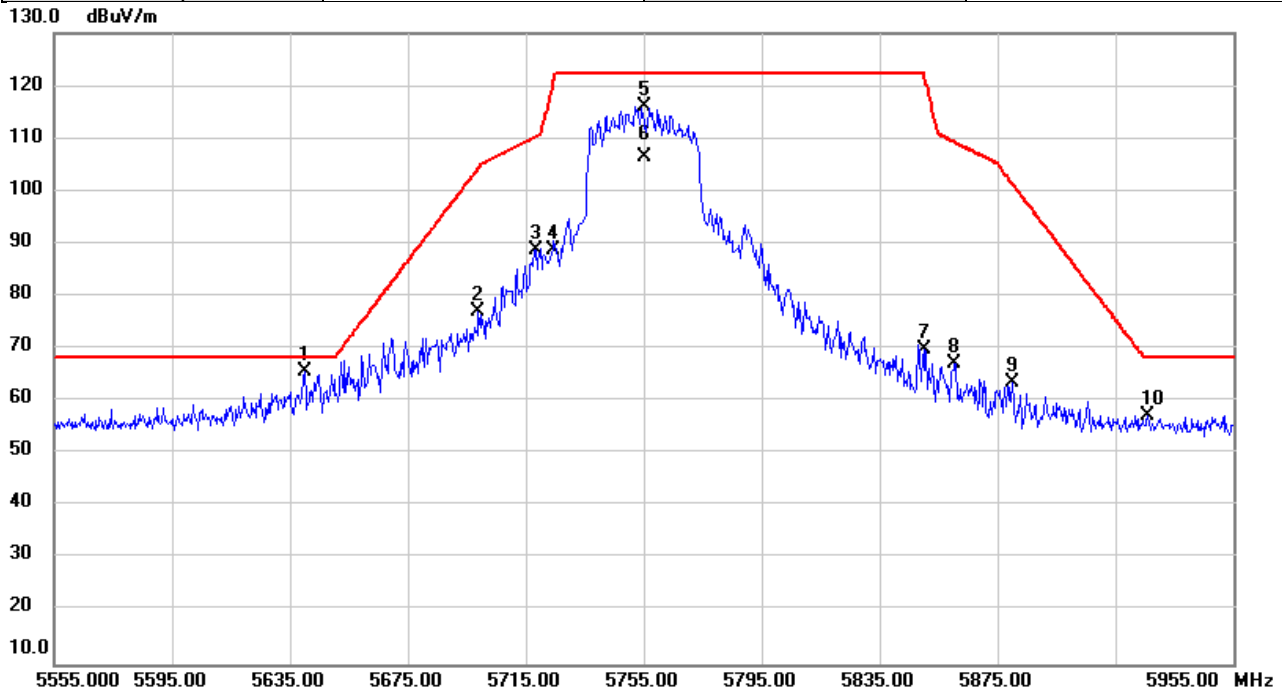


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5639.853	63.39	2.13	65.52	68.20	-2.68	peak	
2		5698.680	74.77	2.14	76.91	104.23	-27.32	peak	
3		5718.213	86.64	2.14	88.78	110.30	-21.52	peak	
4		5724.080	86.50	2.14	88.64	120.10	-31.46	peak	
5		5755.000	113.94	2.15	116.09	122.20	-6.11	peak	NoLimit
6		5755.000	104.26	2.15	106.41	122.20	-15.79	AVG	NoLimit
7		5850.387	67.71	2.15	69.86	121.32	-51.46	peak	
8		5860.267	65.13	2.16	67.29	109.32	-42.03	peak	
9		5880.053	61.27	2.16	63.43	101.45	-38.02	peak	
10		5926.027	55.09	2.17	57.26	68.20	-10.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT40)	Test Date	2025/12/3
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

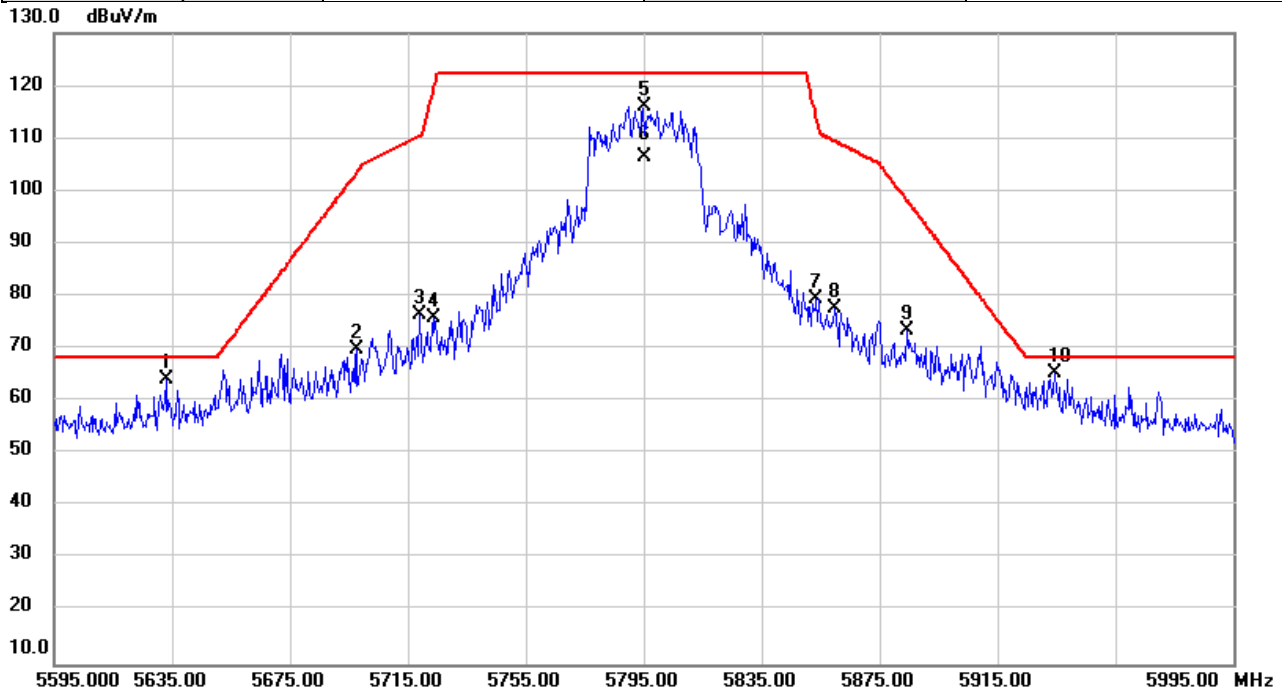


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5632.893	62.09	2.13	64.22	68.20	-3.98	peak	
2		5697.680	67.80	2.14	69.94	103.49	-33.55	peak	
3		5718.800	74.43	2.14	76.57	110.46	-33.89	peak	
4		5723.960	73.77	2.14	75.91	119.83	-43.92	peak	
5		5795.000	113.77	2.15	115.92	122.20	-6.28	peak	NoLimit
6		5795.000	104.28	2.15	106.43	122.20	-15.77	AVG	NoLimit
7		5853.600	77.24	2.15	79.39	113.99	-34.60	peak	
8		5859.747	75.39	2.16	77.55	109.47	-31.92	peak	
9		5884.440	71.26	2.16	73.42	98.19	-24.77	peak	
10	*	5934.507	63.21	2.16	65.37	68.20	-2.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT80)	Test Date	2025/12/3
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

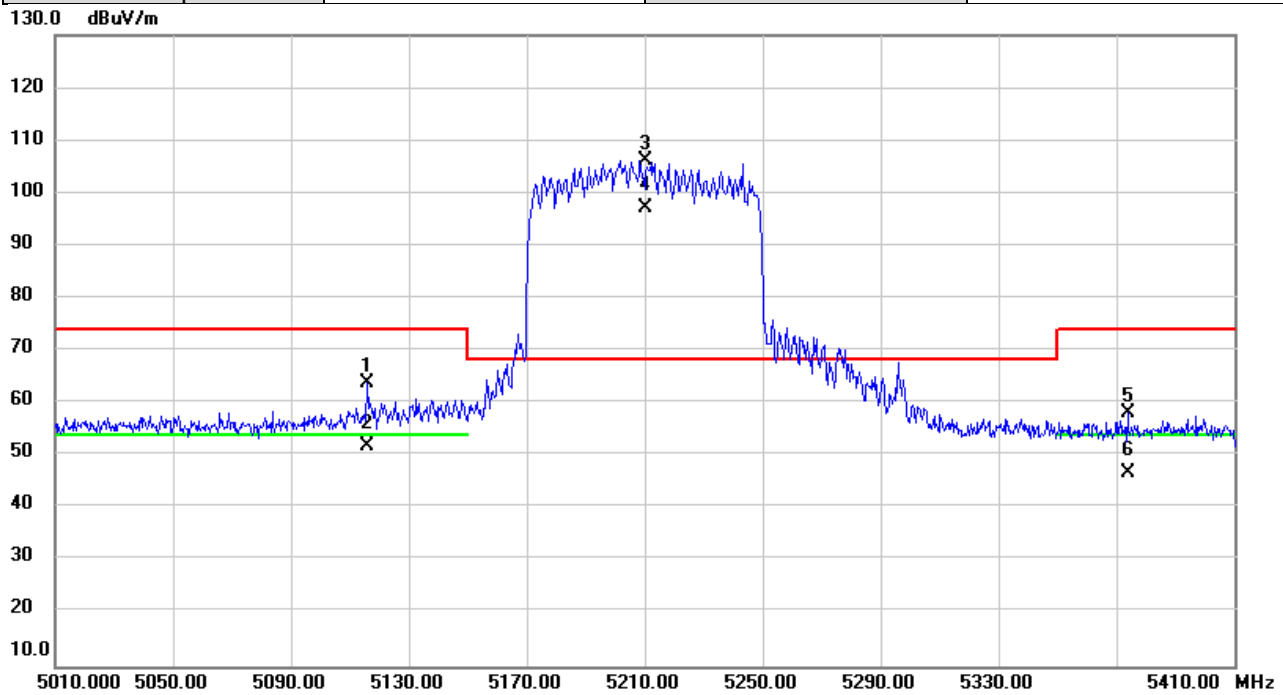


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5116.120	61.52	2.33	63.85	74.00	-10.15	peak	
2		5116.120	49.56	2.33	51.89	54.00	-2.11	AVG	
3	*	5210.000	103.96	2.28	106.24	68.20	38.04	peak	NoLimit
4	X	5210.000	95.01	2.28	97.29	68.20	29.09	AVG	NoLimit
5		5373.893	56.10	2.19	58.29	74.00	-15.71	peak	
6		5373.893	44.59	2.19	46.78	54.00	-7.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT80)	Test Date	2025/12/3
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

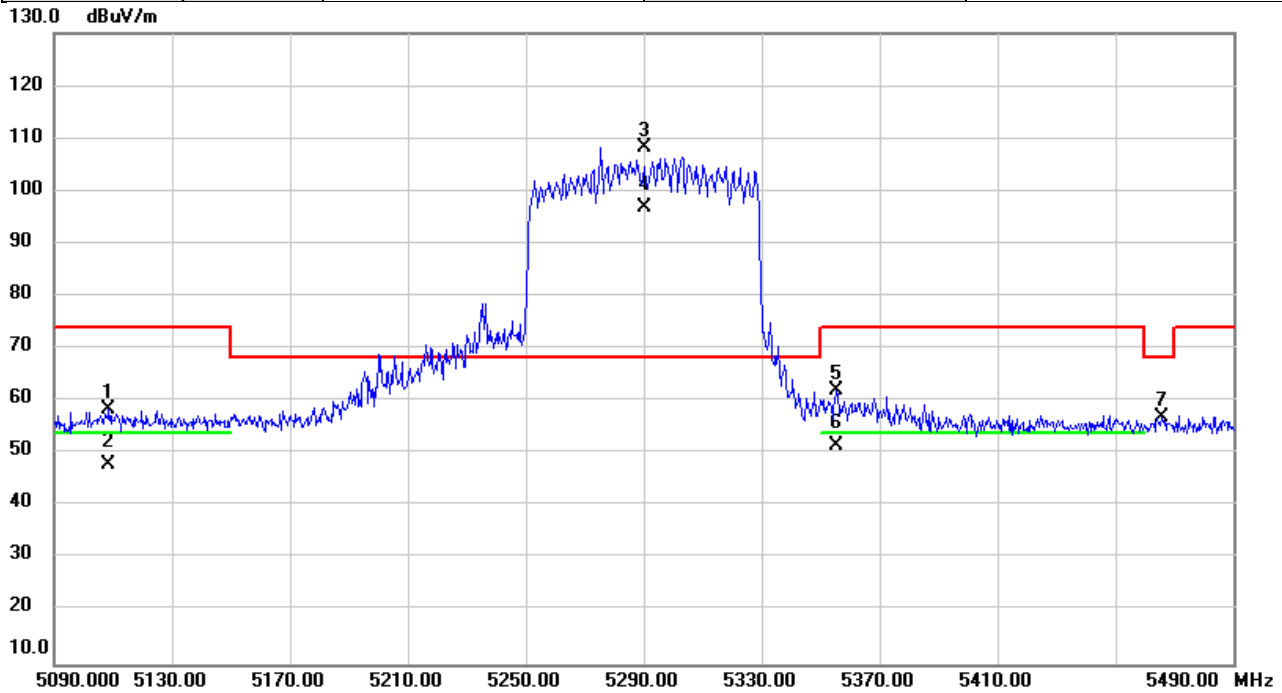


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5108.533	56.00	2.33	58.33	74.00	-15.67	peak	
2		5108.533	45.75	2.33	48.08	54.00	-5.92	AVG	
3	*	5290.000	105.88	2.23	108.11	68.20	39.91	peak	NoLimit
4	X	5290.000	94.73	2.23	96.96	68.20	28.76	AVG	NoLimit
5		5355.333	59.99	2.20	62.19	74.00	-11.81	peak	
6		5355.333	49.47	2.20	51.67	54.00	-2.33	AVG	
7		5465.893	54.80	2.14	56.94	68.20	-11.26	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT80)	Test Date	2025/12/3
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

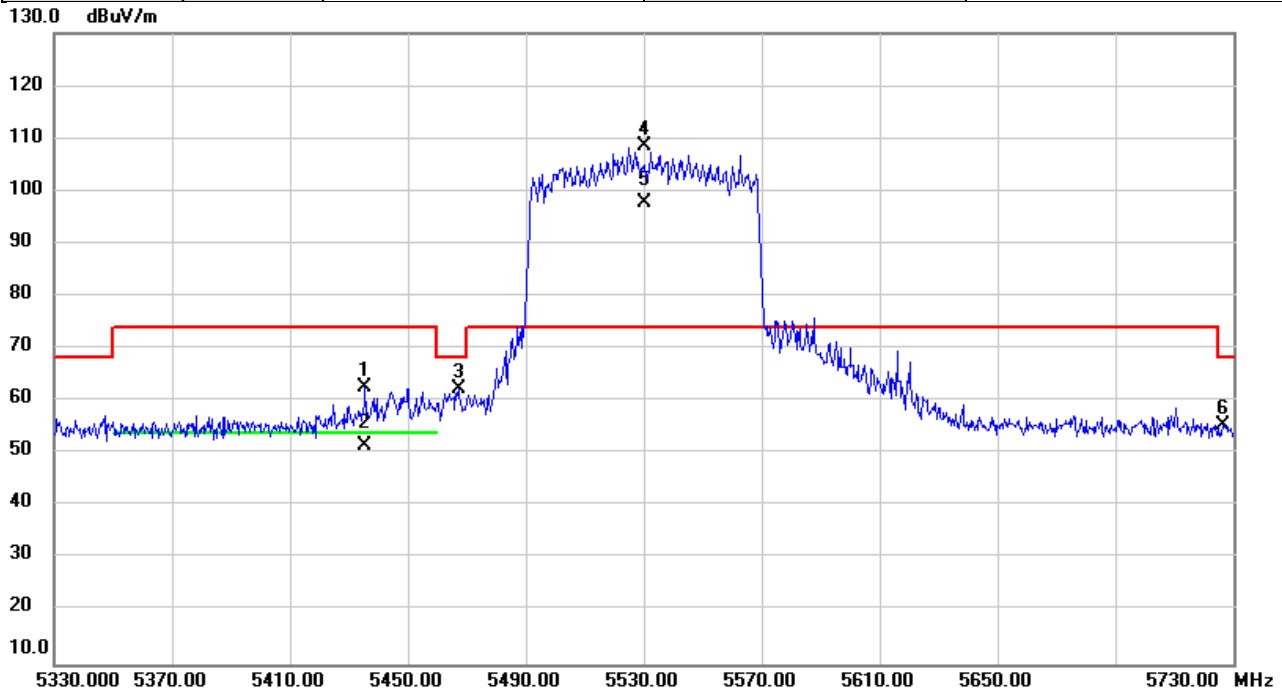


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5435.333	60.60	2.16	62.76	74.00	-11.24	peak	
2		5435.333	49.51	2.16	51.67	54.00	-2.33	AVG	
3		5467.160	60.16	2.14	62.30	68.20	-5.90	peak	
4	*	5530.000	106.27	2.13	108.40	74.00	34.40	peak	NoLimit
5	X	5530.000	95.72	2.13	97.85	74.00	23.85	AVG	NoLimit
6		5726.627	53.37	2.14	55.51	68.20	-12.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT80)	Test Date	2025/12/3
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

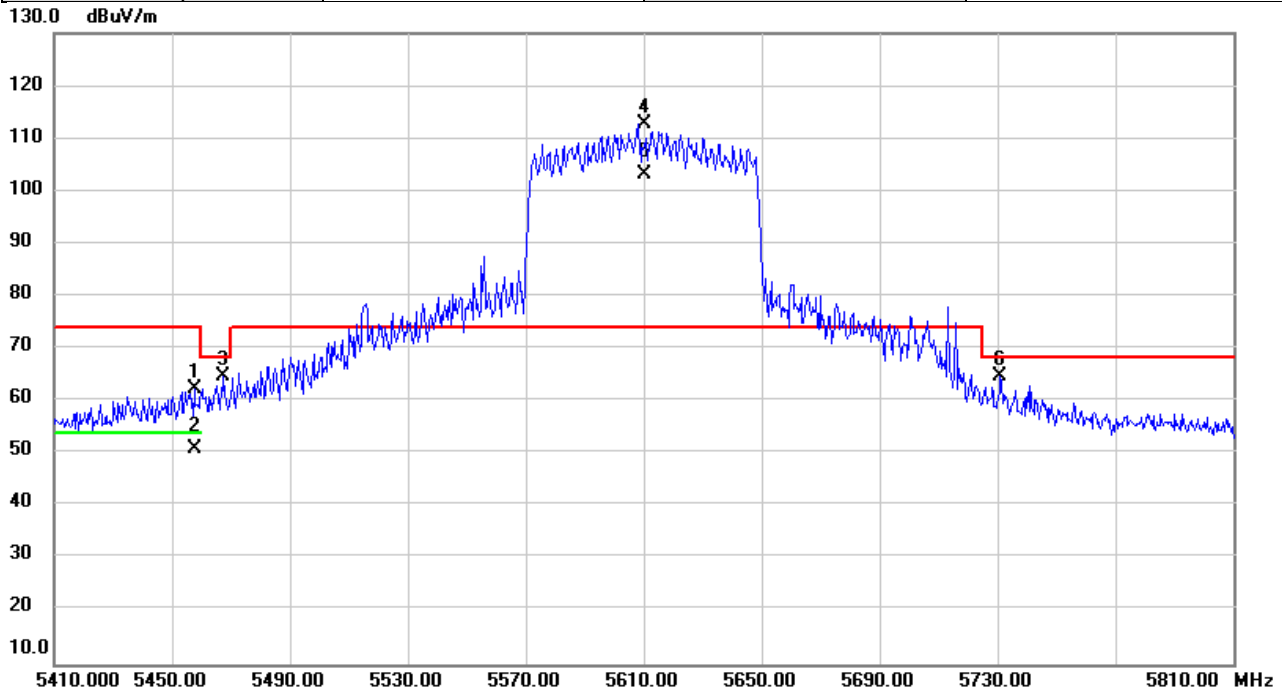


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5457.480	60.31	2.14	62.45	74.00	-11.55	peak	
2		5457.480	48.95	2.14	51.09	54.00	-2.91	AVG	
3		5467.320	62.60	2.14	64.74	68.20	-3.46	peak	
4	*	5610.000	110.49	2.13	112.62	74.00	38.62	peak	NoLimit
5	X	5610.000	100.95	2.13	103.08	74.00	29.08	AVG	NoLimit
6		5730.907	62.57	2.14	64.71	68.20	-3.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT80)	Test Date	2025/12/3
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

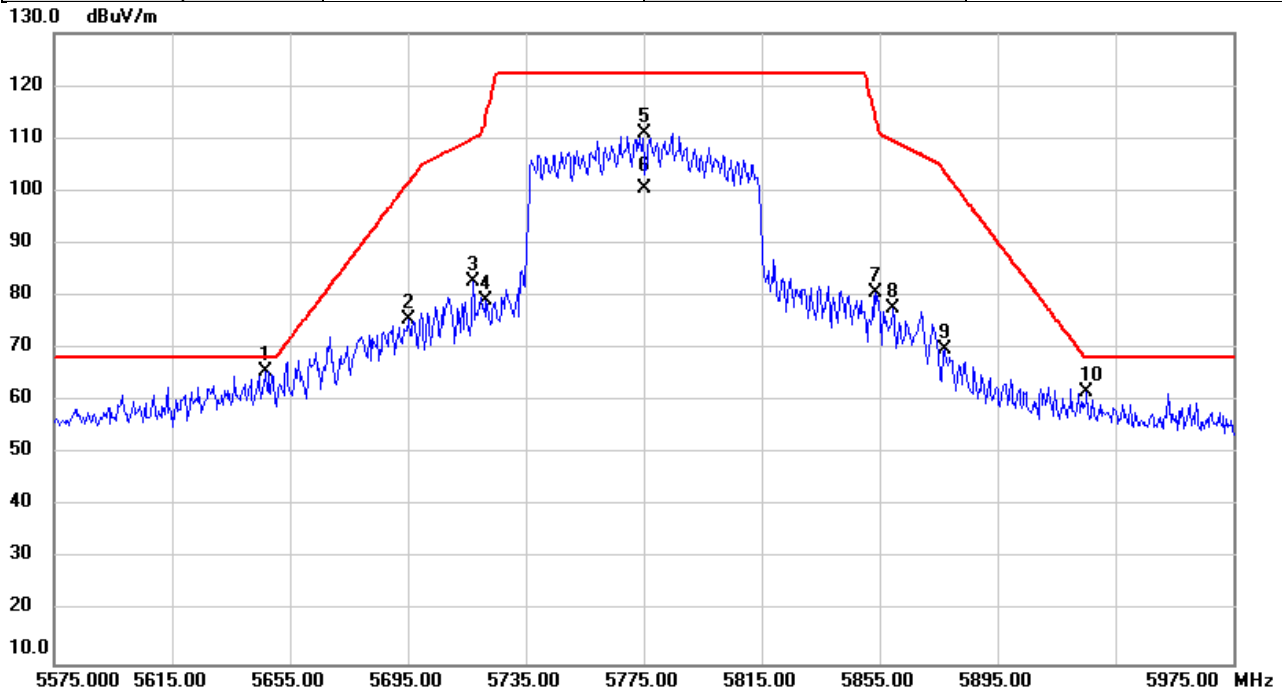


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5646.627	63.64	2.14	65.78	68.20	-2.42	peak	
2		5695.080	73.54	2.13	75.67	101.57	-25.90	peak	
3		5717.160	80.51	2.14	82.65	110.01	-27.36	peak	
4		5721.627	76.89	2.14	79.03	114.51	-35.48	peak	
5		5775.000	108.88	2.15	111.03	122.20	-11.17	peak	NoLimit
6		5775.000	98.43	2.15	100.58	122.20	-21.62	AVG	NoLimit
7		5853.733	78.38	2.15	80.53	113.69	-33.16	peak	
8		5859.427	75.62	2.16	77.78	109.56	-31.78	peak	
9		5877.080	67.65	2.15	69.80	103.65	-33.85	peak	
10		5925.280	59.72	2.17	61.89	68.20	-6.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT160)	Test Date	2025/12/3
Test Frequency	5250MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

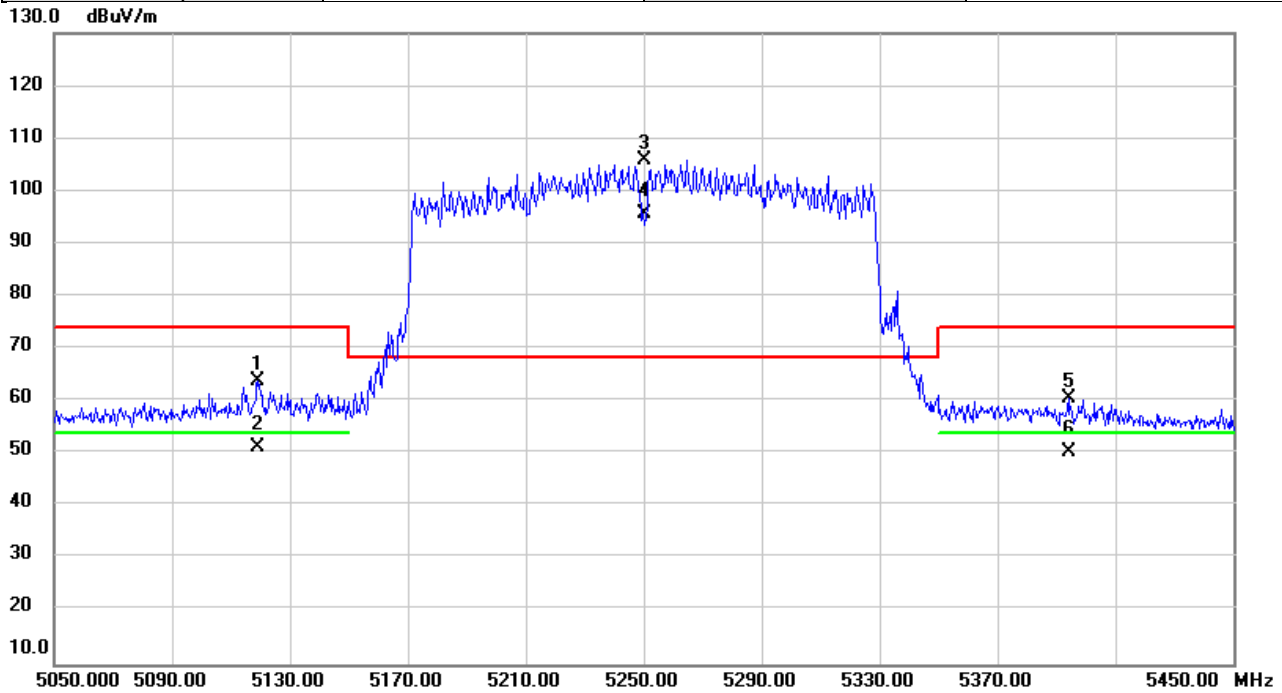


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5119.053	61.58	2.33	63.91	74.00	-10.09	peak	
2		5119.053	49.04	2.33	51.37	54.00	-2.63	AVG	
3	*	5250.000	103.67	2.25	105.92	68.20	37.72	peak	NoLimit
4	X	5250.000	93.44	2.25	95.69	68.20	27.49	AVG	NoLimit
5		5394.147	58.40	2.18	60.58	74.00	-13.42	peak	
6		5394.147	48.28	2.18	50.46	54.00	-3.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (VHT160)	Test Date	2025/12/3
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

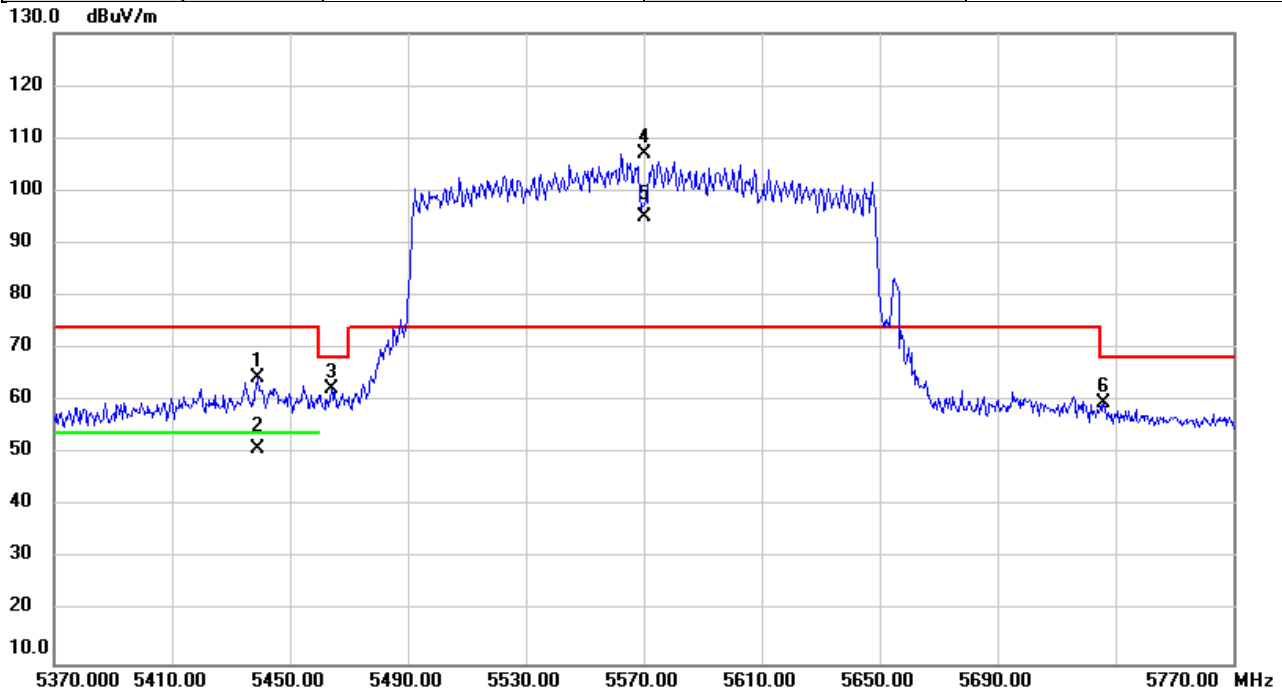


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5439.253	62.44	2.15	64.59	74.00	-9.41	peak	
2		5439.253	48.72	2.15	50.87	54.00	-3.13	AVG	
3		5464.320	60.25	2.14	62.39	68.20	-5.81	peak	
4	*	5570.000	104.94	2.13	107.07	74.00	33.07	peak	NoLimit
5	X	5570.000	93.00	2.13	95.13	74.00	21.13	AVG	NoLimit
6		5726.213	57.45	2.14	59.59	68.20	-8.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

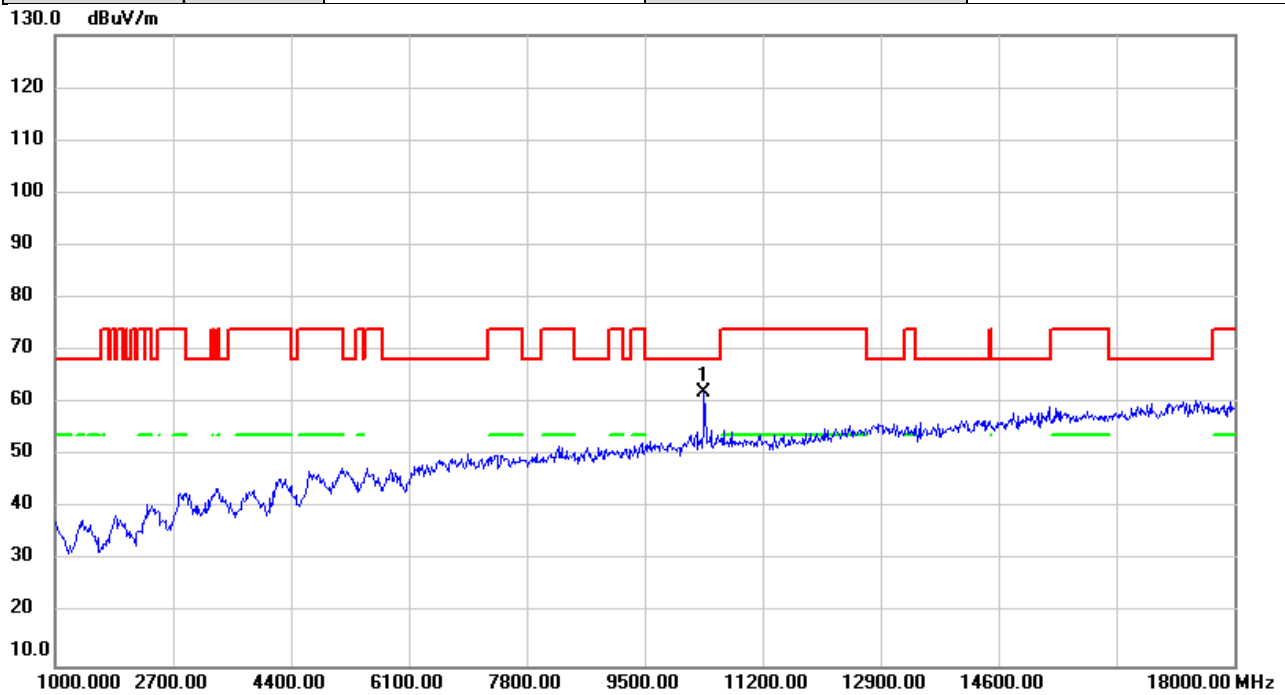


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	54.94	7.07	62.01	68.20	-6.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

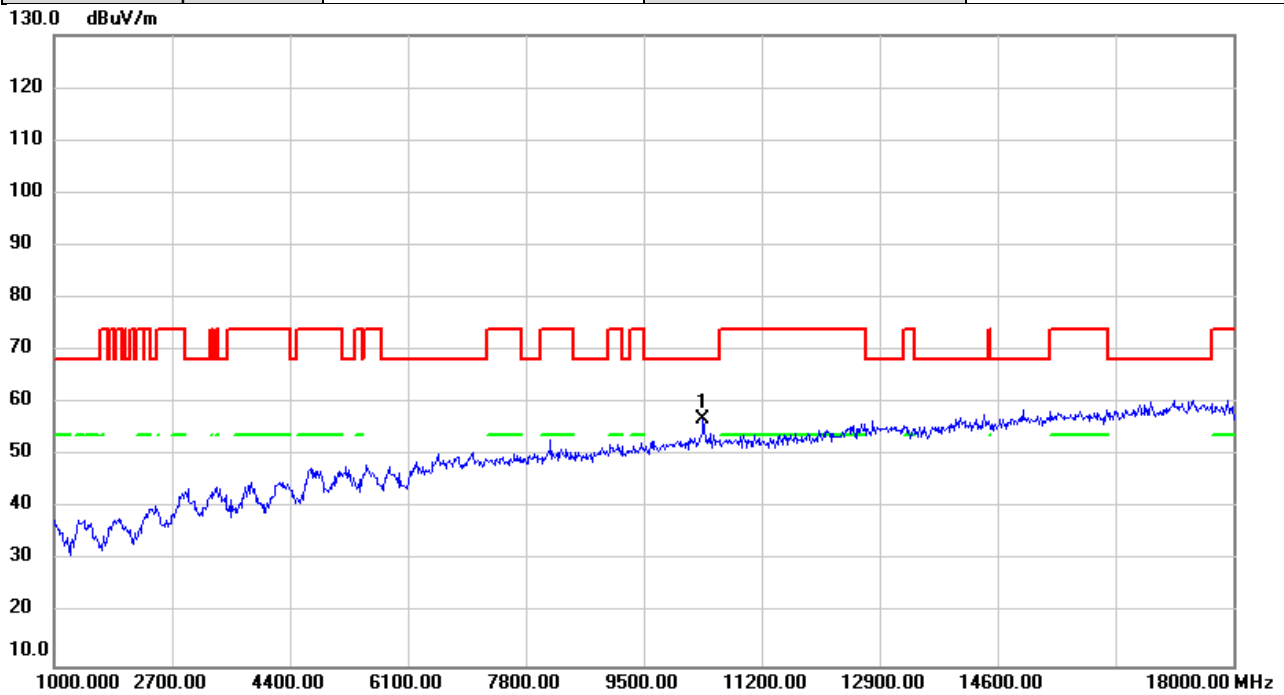


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	49.79	7.07	56.86	68.20	-11.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

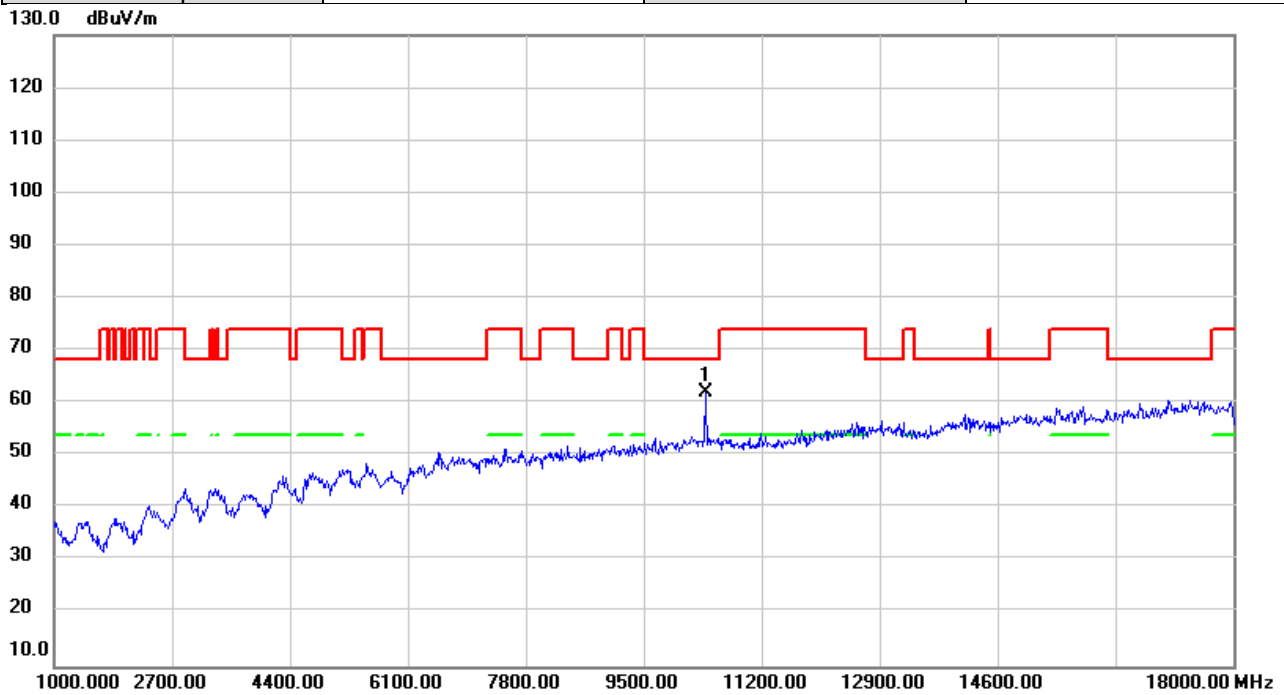


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	54.94	7.08	62.02	68.20	-6.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

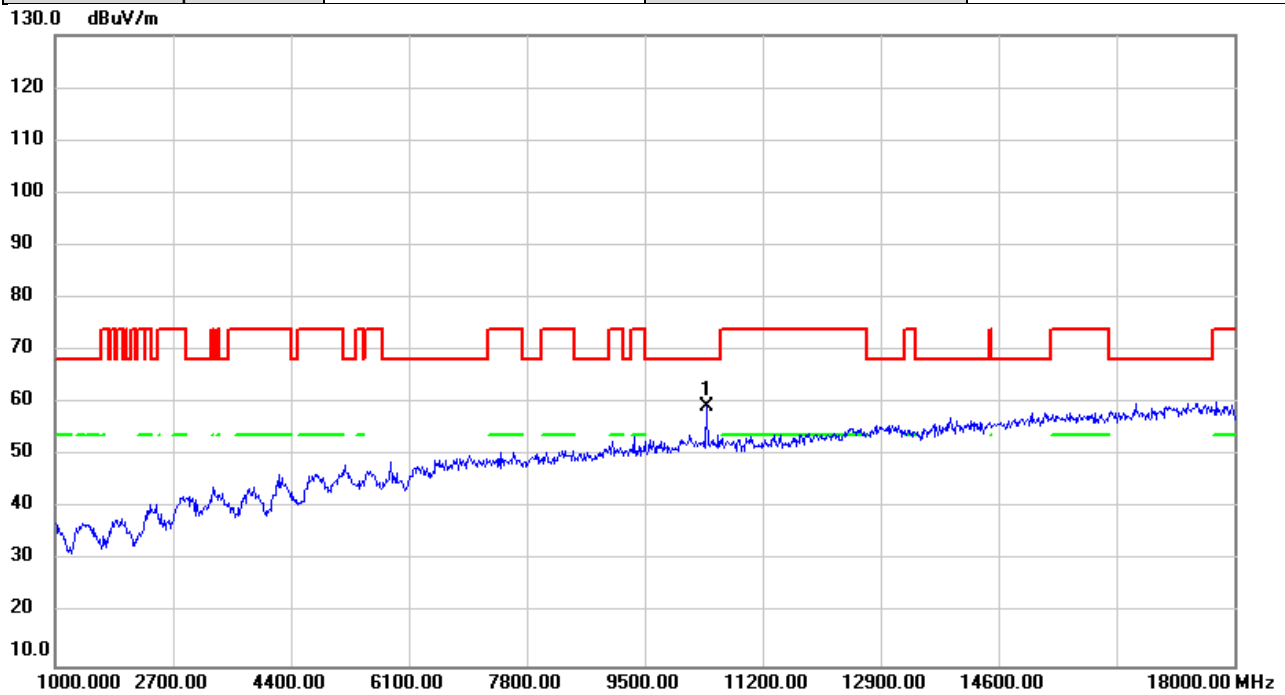


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	52.15	7.08	59.23	68.20	-8.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

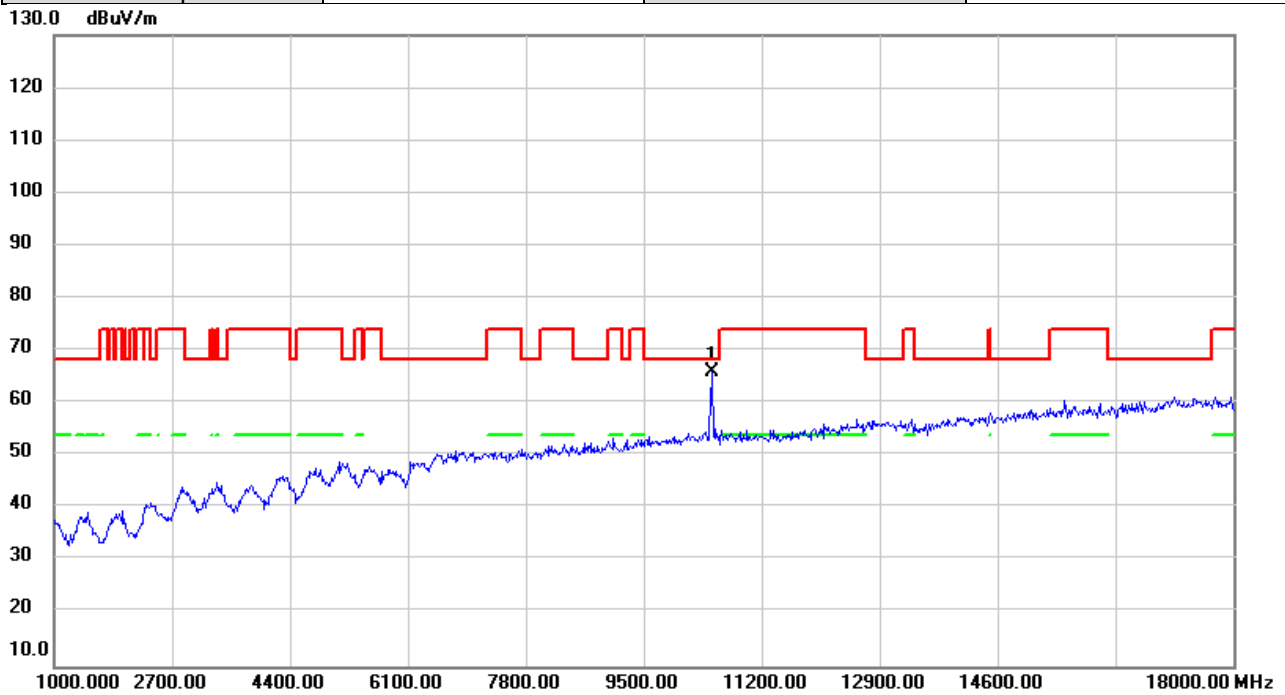


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	58.71	7.10	65.81	68.20	-2.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

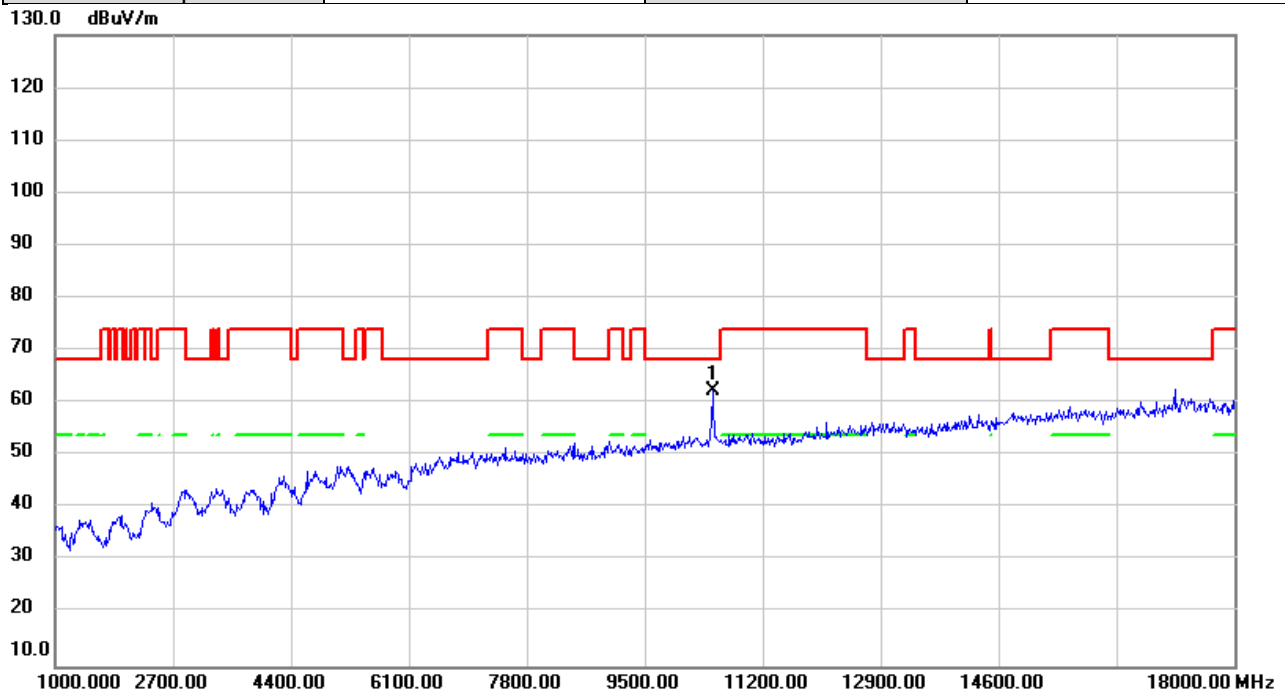


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	55.20	7.10	62.30	68.20	-5.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

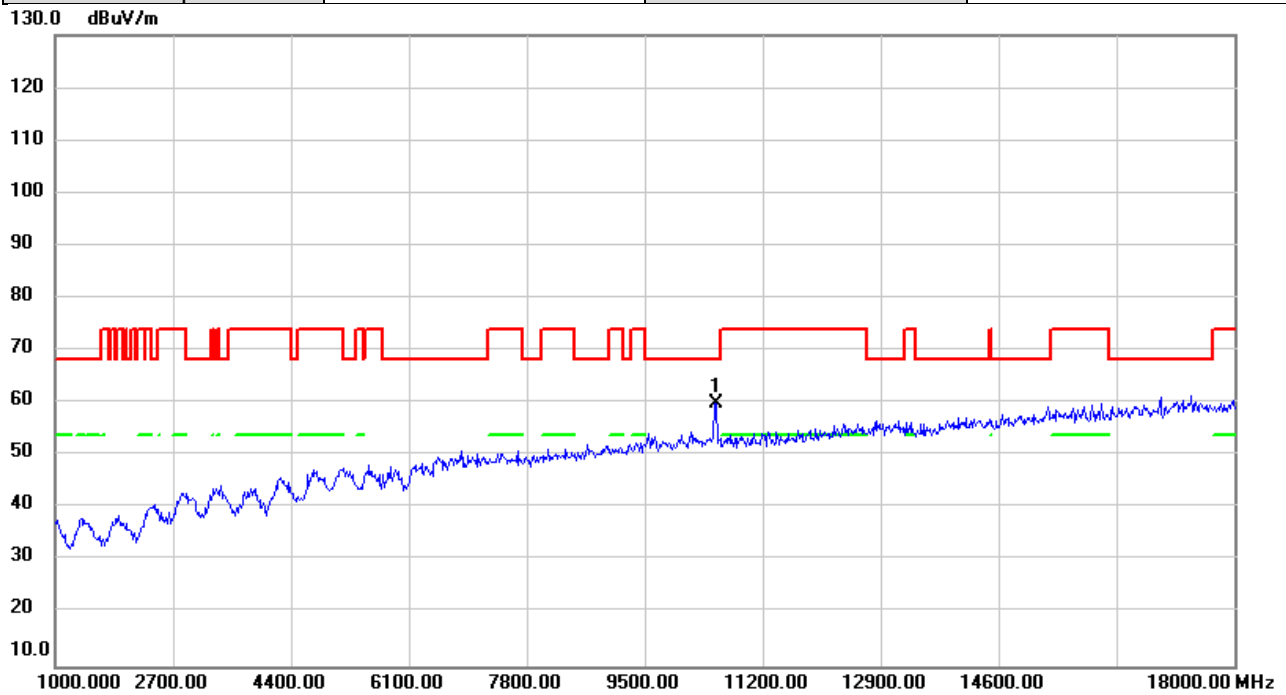


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	52.97	7.07	60.04	68.20	-8.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

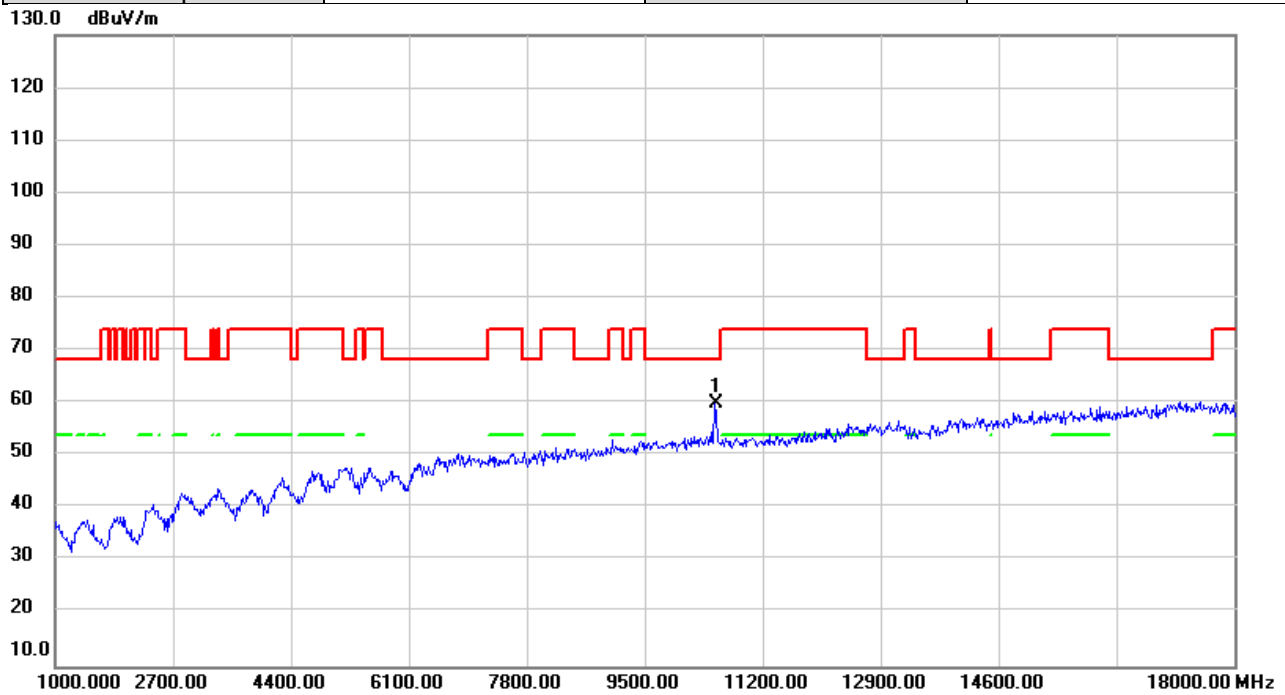


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	52.96	7.07	60.03	68.20	-8.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

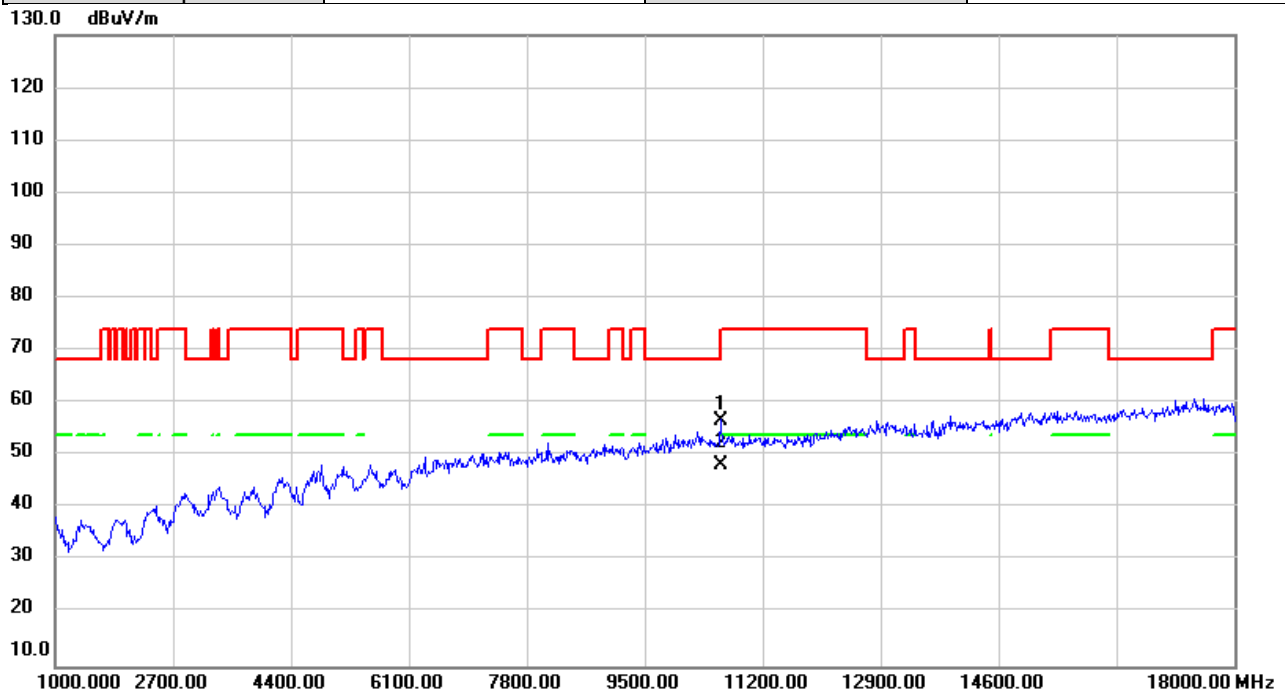


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	49.85	6.95	56.80	68.20	-11.40	peak	
2	*	10600.00	41.44	6.95	48.39	54.00	-5.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5300MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

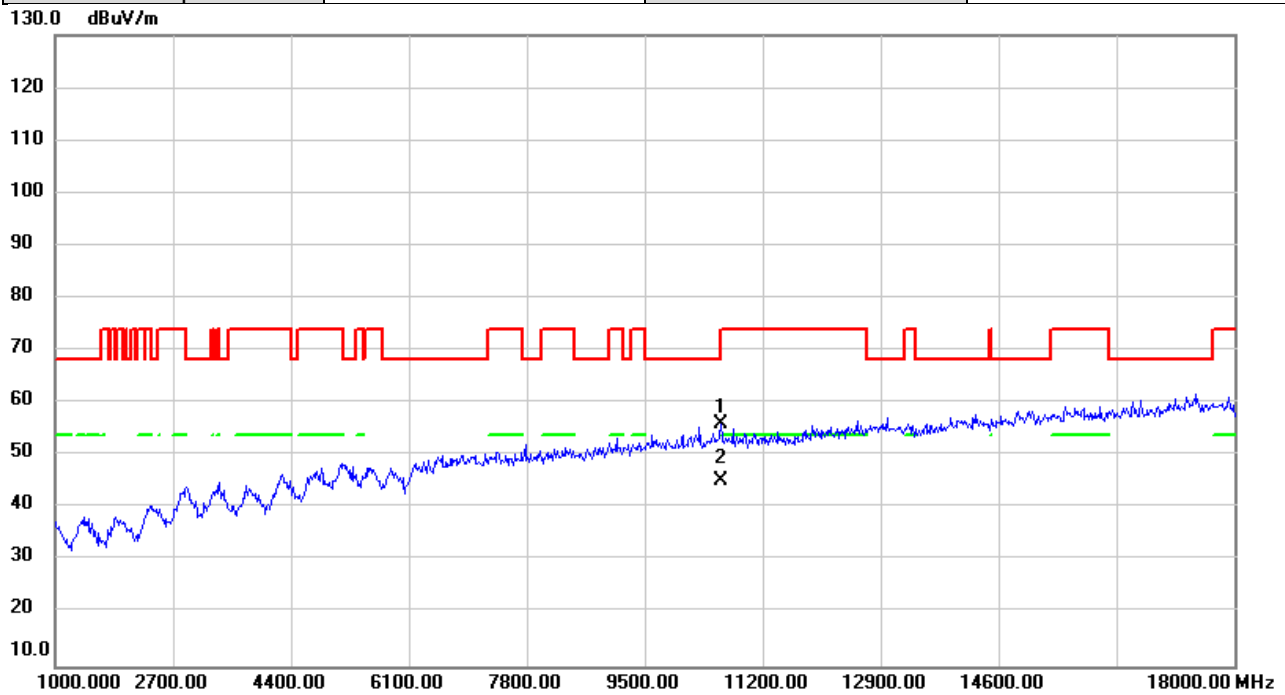


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	49.12	6.95	56.07	68.20	-12.13	peak	
2	*	10600.00	38.33	6.95	45.28	54.00	-8.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

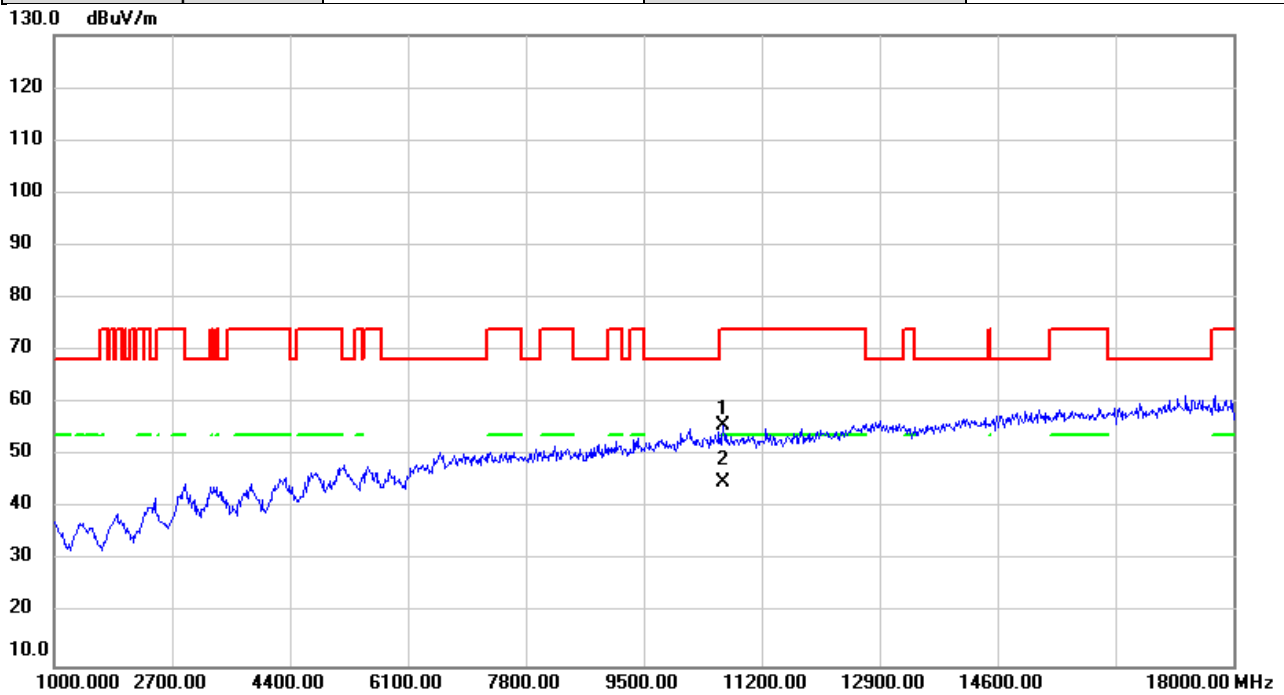


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	48.89	6.89	55.78	74.00	-18.22	peak	
2	*	10640.00	38.14	6.89	45.03	54.00	-8.97	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

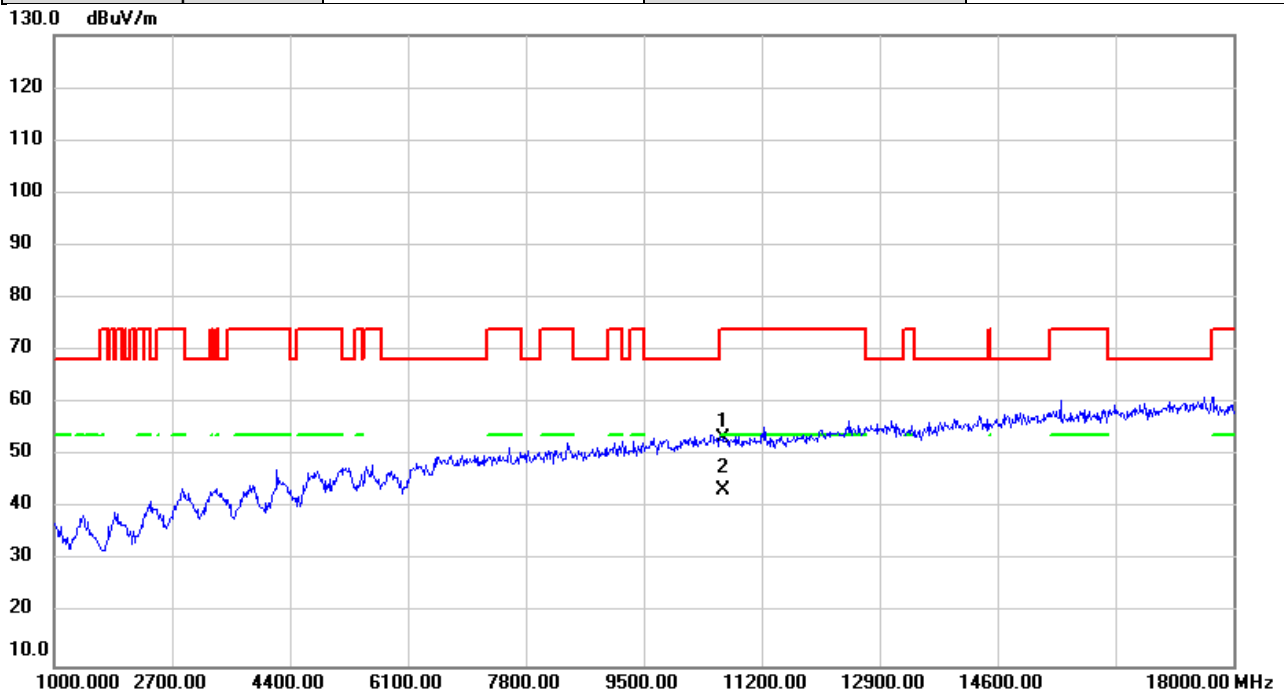


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	46.47	6.89	53.36	74.00	-20.64	peak	
2	*	10640.00	36.55	6.89	43.44	54.00	-10.56	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

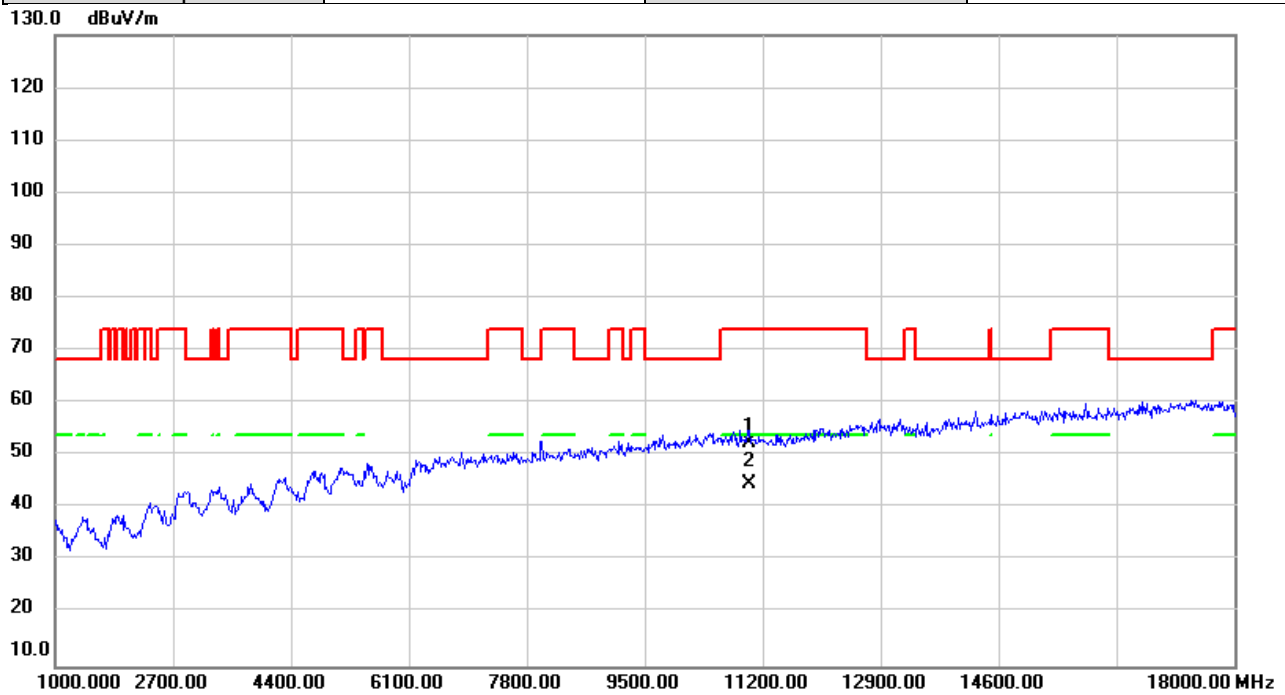


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	46.06	6.36	52.42	74.00	-21.58	peak	
2	*	11000.00	38.23	6.36	44.59	54.00	-9.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

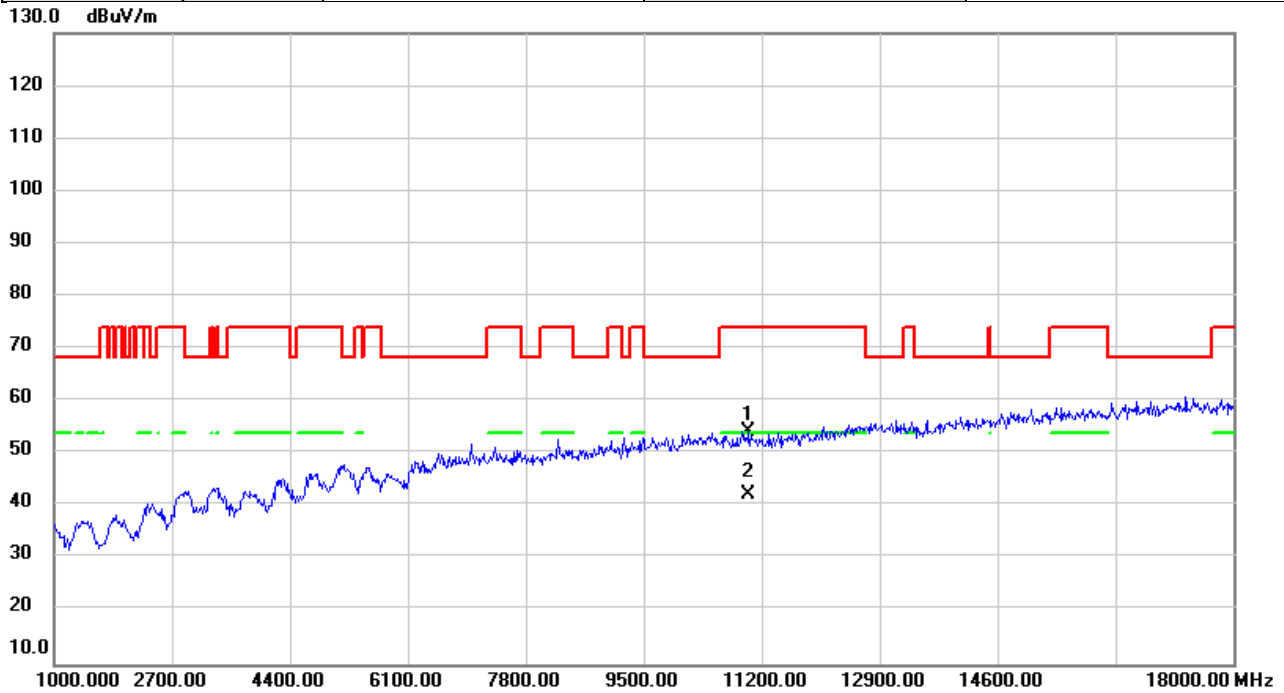


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	47.90	6.36	54.26	74.00	-19.74	peak	
2	*	11000.00	35.92	6.36	42.28	54.00	-11.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

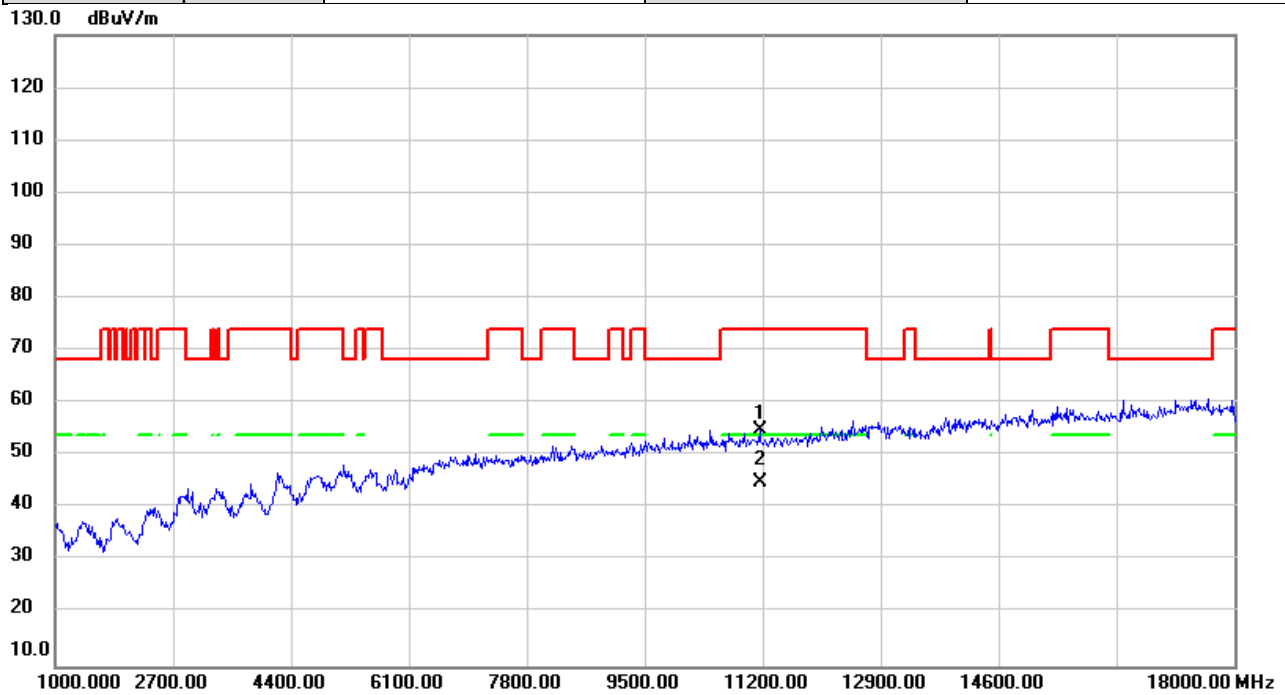


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	48.38	6.38	54.76	74.00	-19.24	peak	
2	*	11160.00	38.50	6.38	44.88	54.00	-9.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

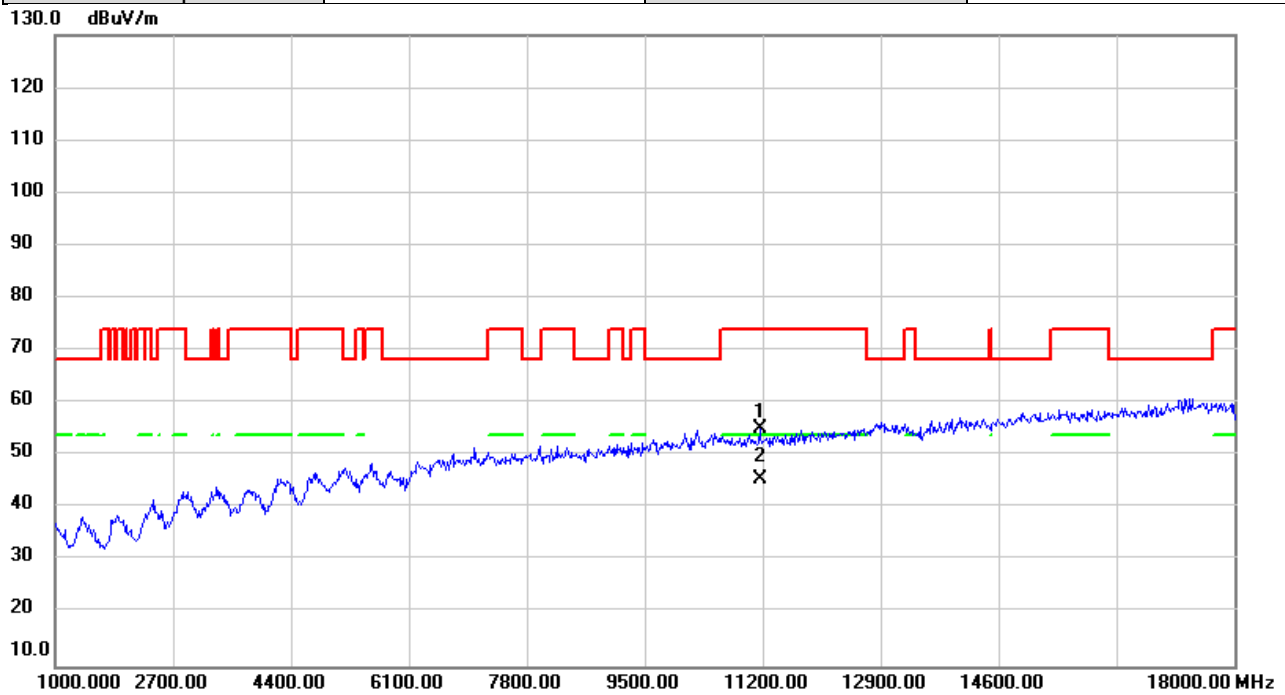


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.90	48.87	6.38	55.25	74.00	-18.75	peak	
2	*	11160.90	39.08	6.38	45.46	54.00	-8.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

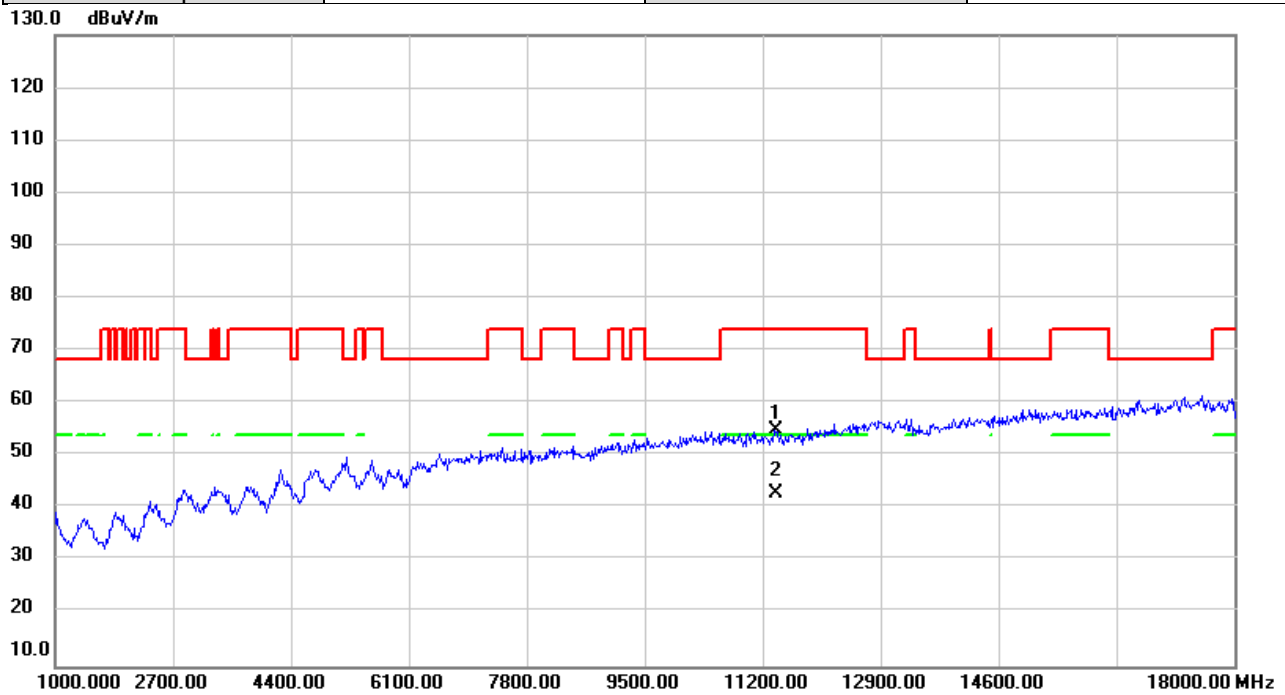


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	48.33	6.41	54.74	74.00	-19.26	peak	
2	*	11400.00	36.59	6.41	43.00	54.00	-11.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

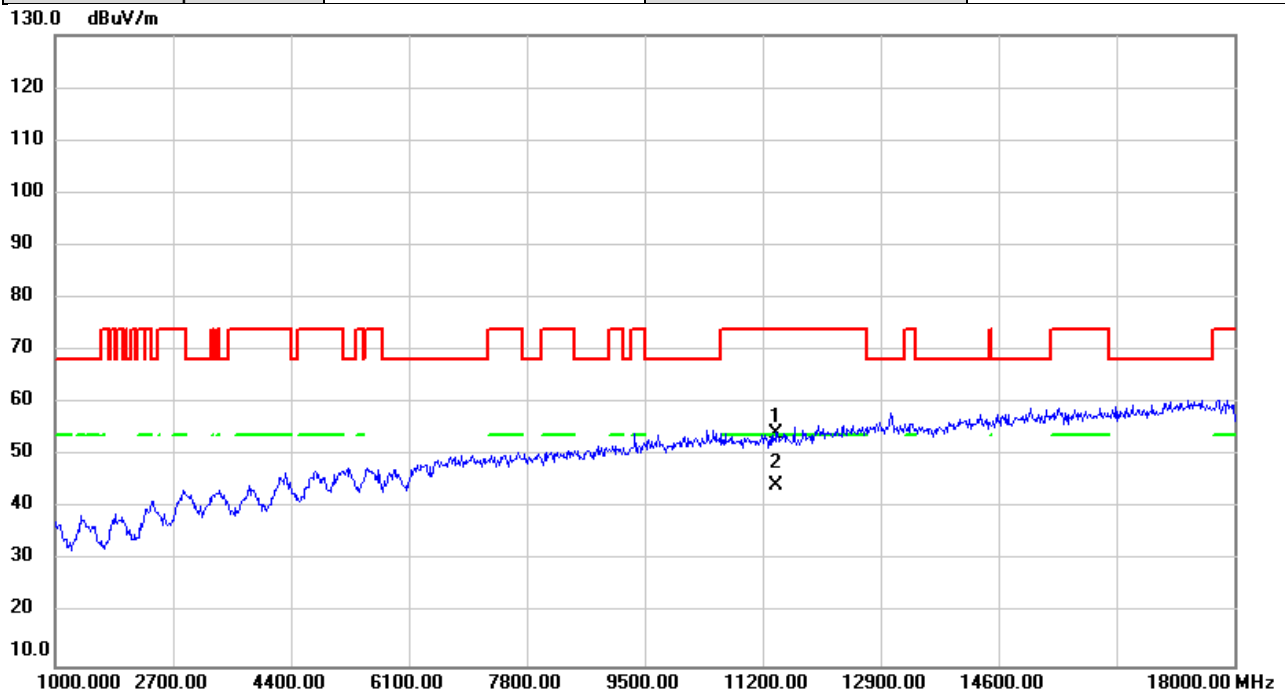


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	47.93	6.41	54.34	74.00	-19.66	peak	
2	*	11400.00	38.07	6.41	44.48	54.00	-9.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

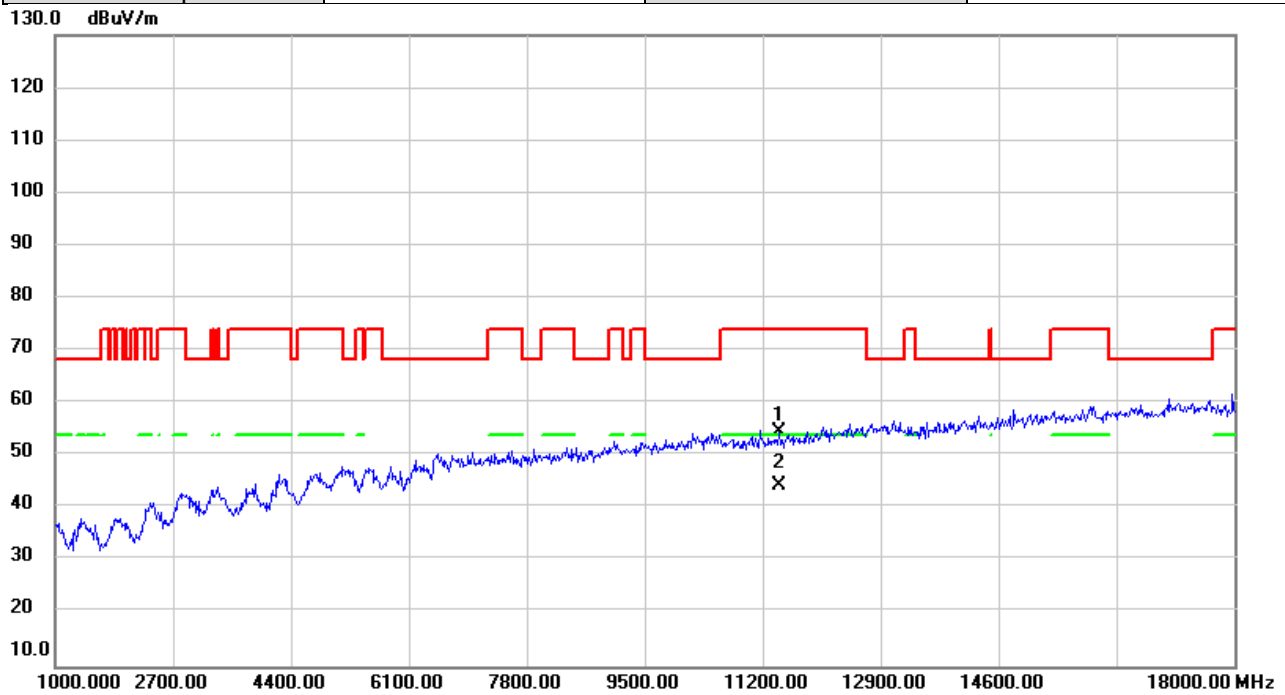


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	48.01	6.41	54.42	74.00	-19.58	peak	
2	*	11440.00	37.92	6.41	44.33	54.00	-9.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

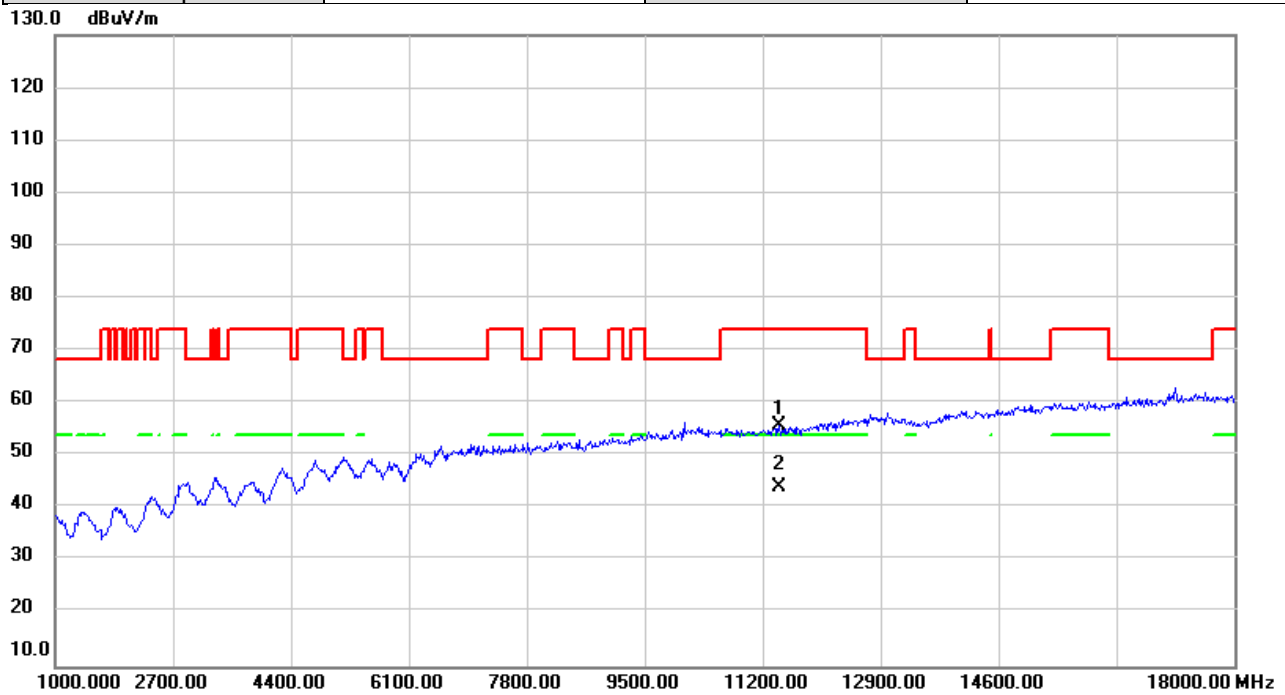


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	49.45	6.41	55.86	74.00	-18.14	peak	
2	*	11440.00	37.54	6.41	43.95	54.00	-10.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

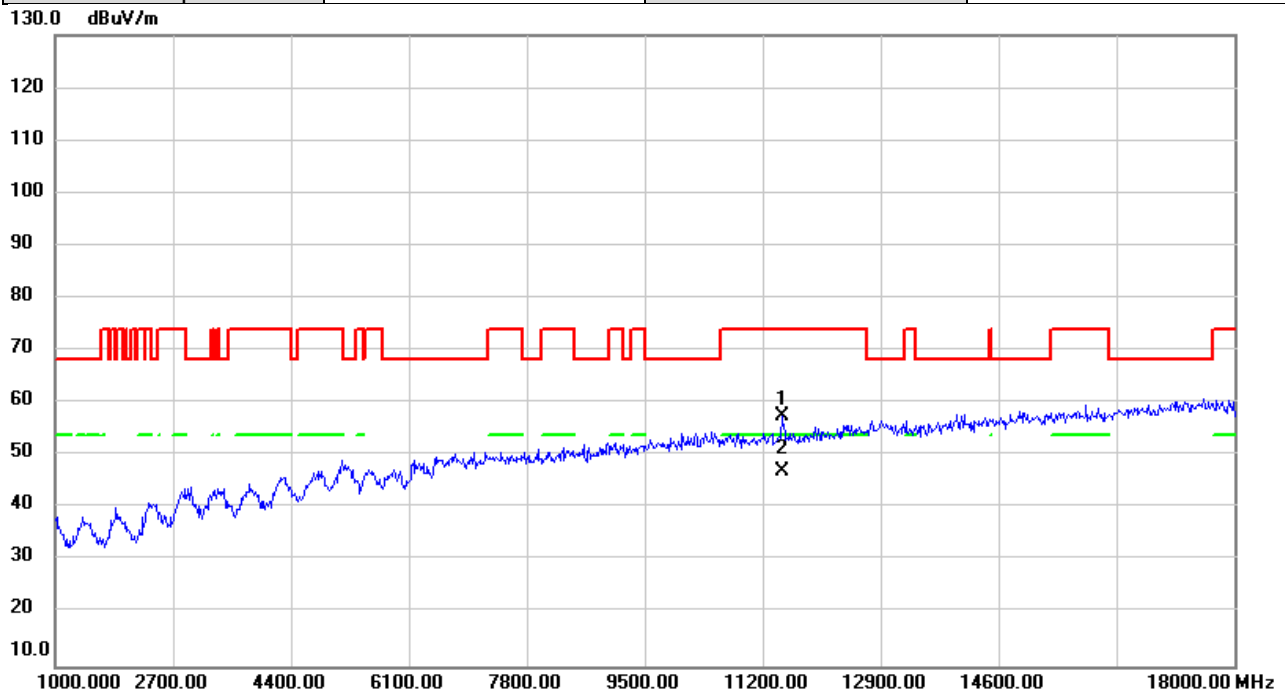


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	51.11	6.42	57.53	74.00	-16.47	peak	
2	*	11490.00	40.66	6.42	47.08	54.00	-6.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

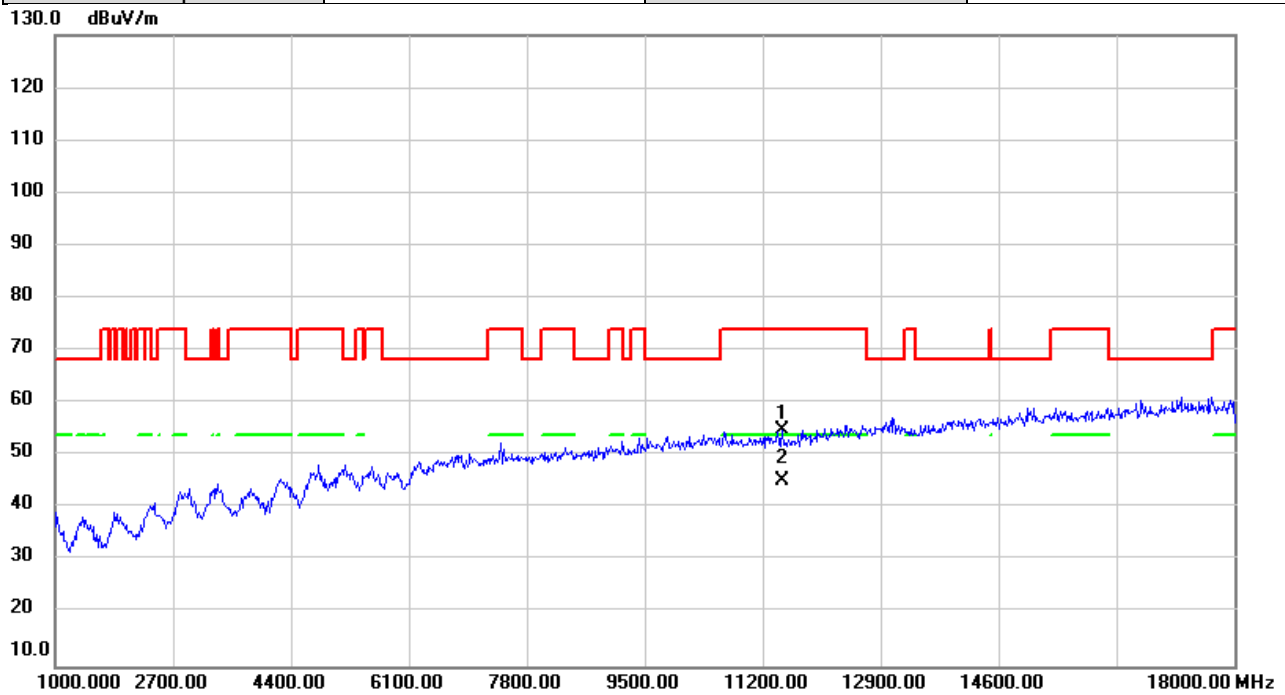


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	48.52	6.42	54.94	74.00	-19.06	peak	
2	*	11490.00	38.79	6.42	45.21	54.00	-8.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

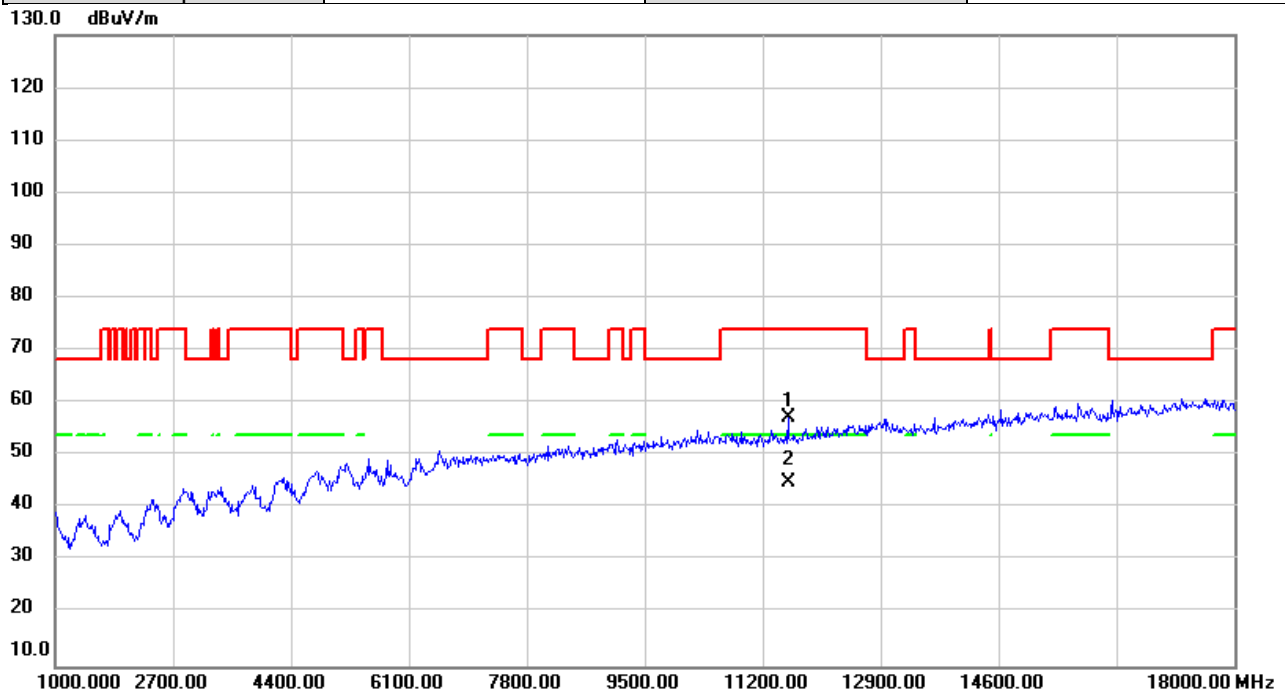


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	50.81	6.50	57.31	74.00	-16.69	peak	
2	*	11570.00	38.59	6.50	45.09	54.00	-8.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

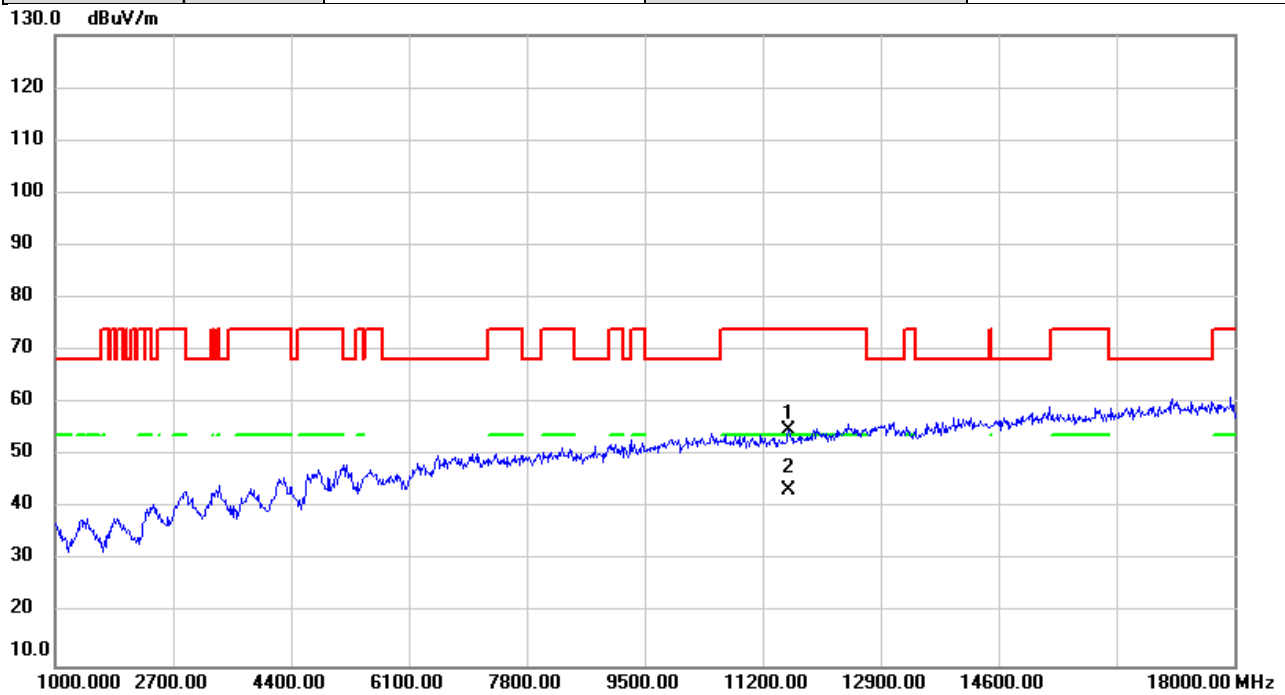


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	48.37	6.50	54.87	74.00	-19.13	peak	
2	*	11570.00	36.84	6.50	43.34	54.00	-10.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

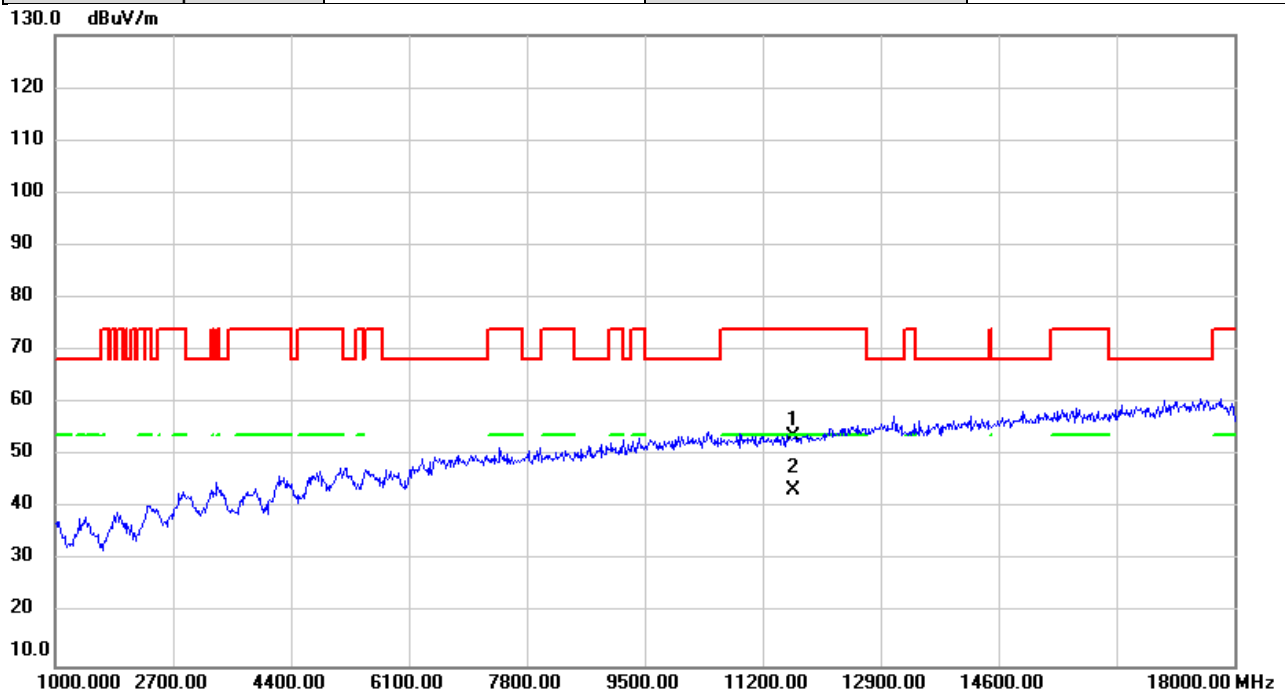


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	47.16	6.59	53.75	74.00	-20.25	peak	
2	*	11650.00	36.72	6.59	43.31	54.00	-10.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/3
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

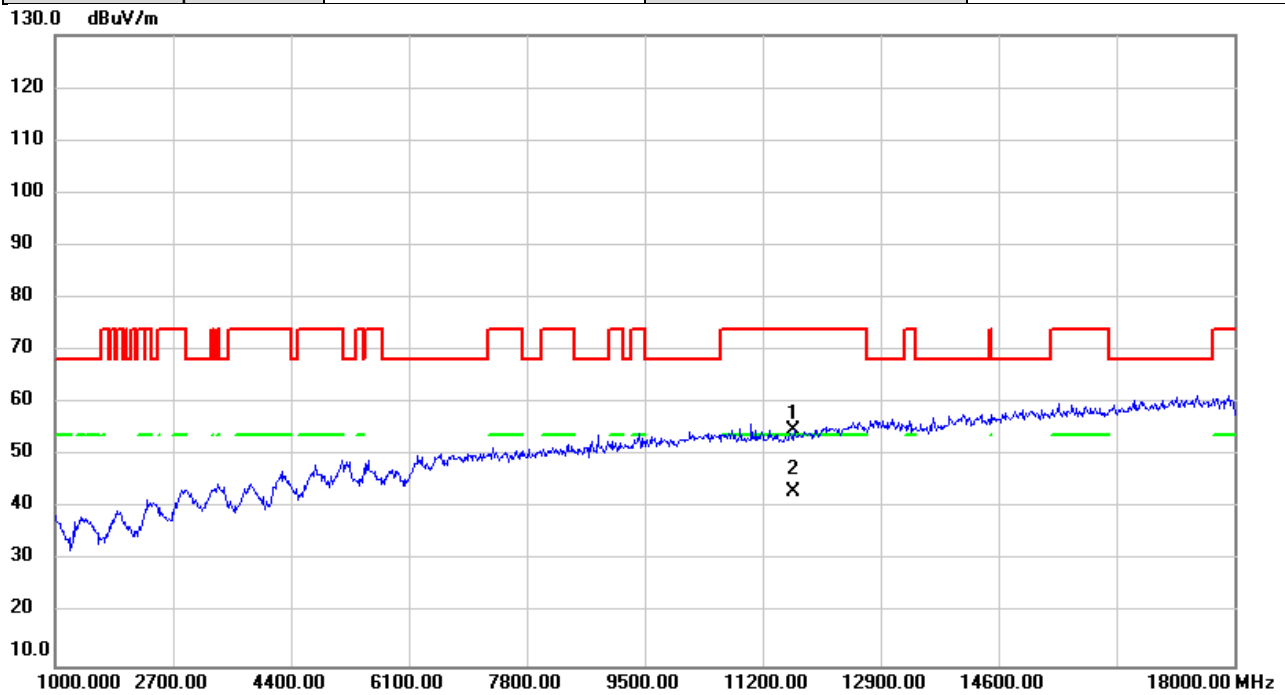


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	48.29	6.59	54.88	74.00	-19.12	peak	
2	*	11650.00	36.43	6.59	43.02	54.00	-10.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

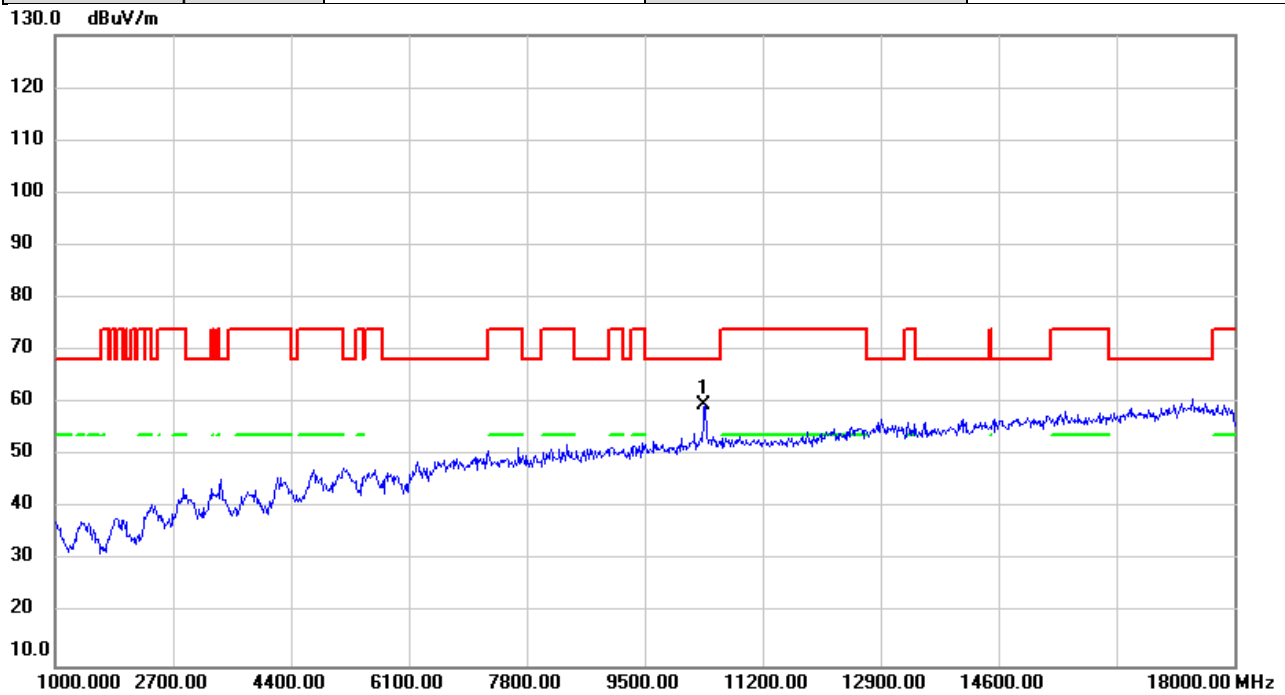


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	52.46	7.07	59.53	68.20	-8.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

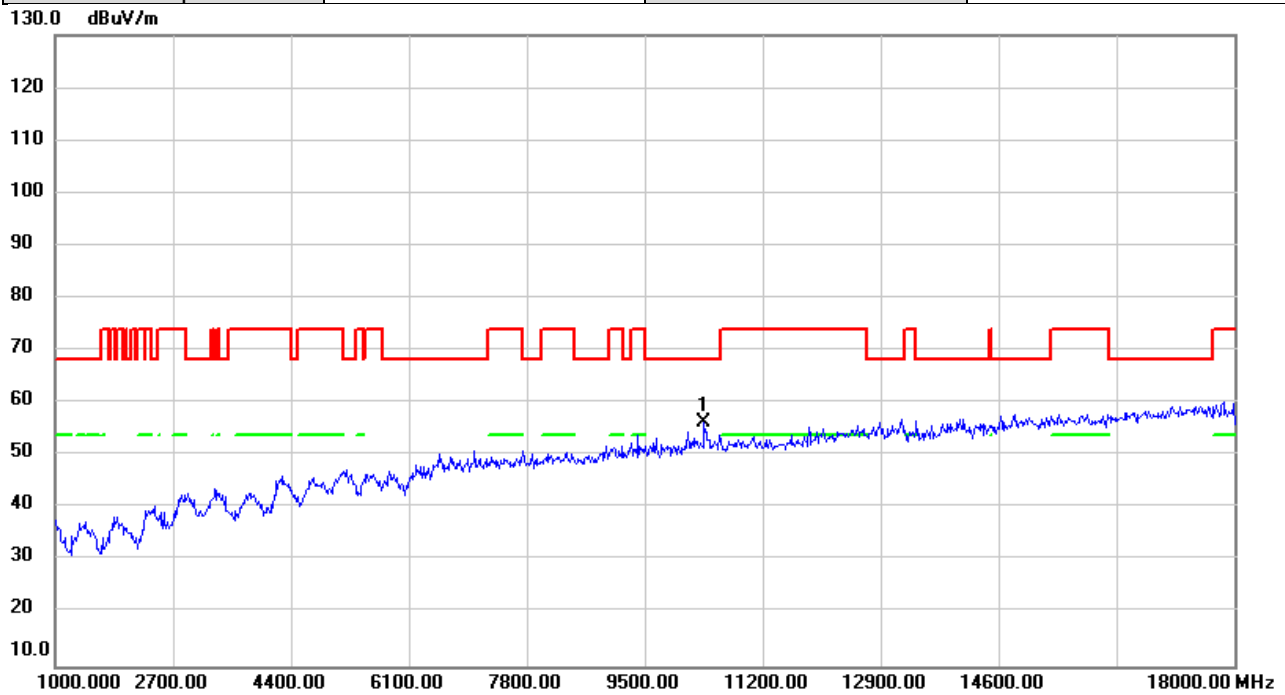


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	49.26	7.07	56.33	68.20	-11.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

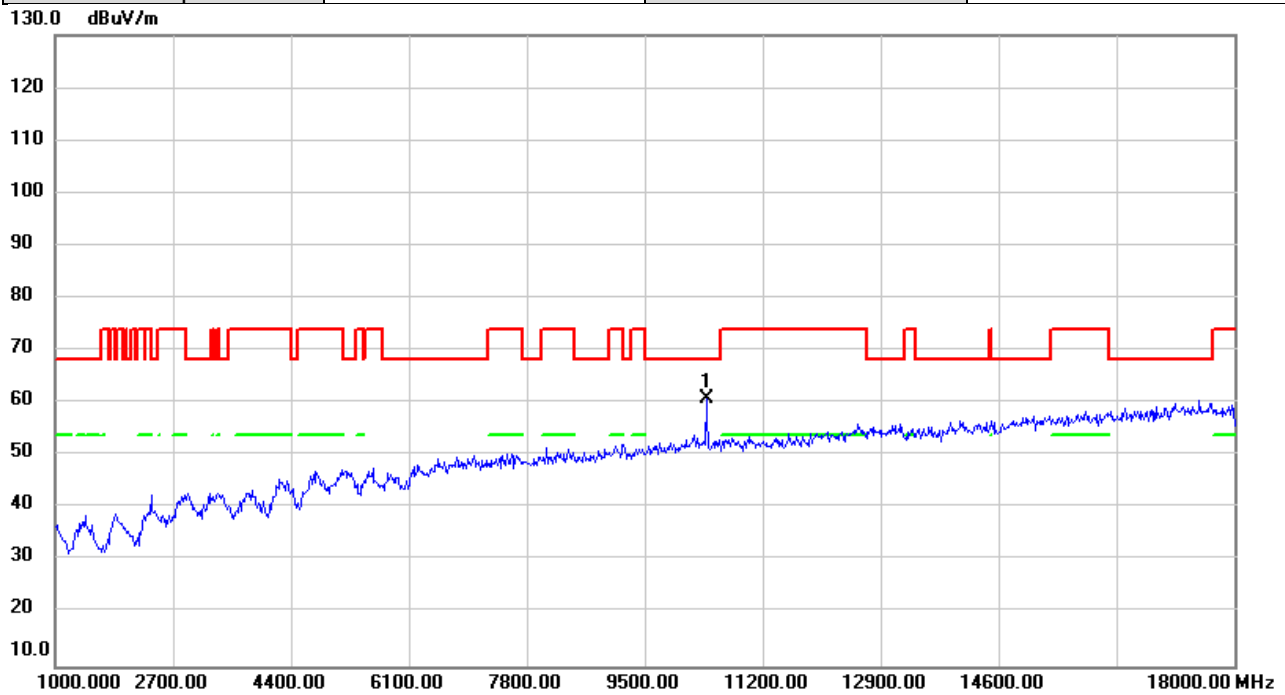


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	53.62	7.08	60.70	68.20	-7.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

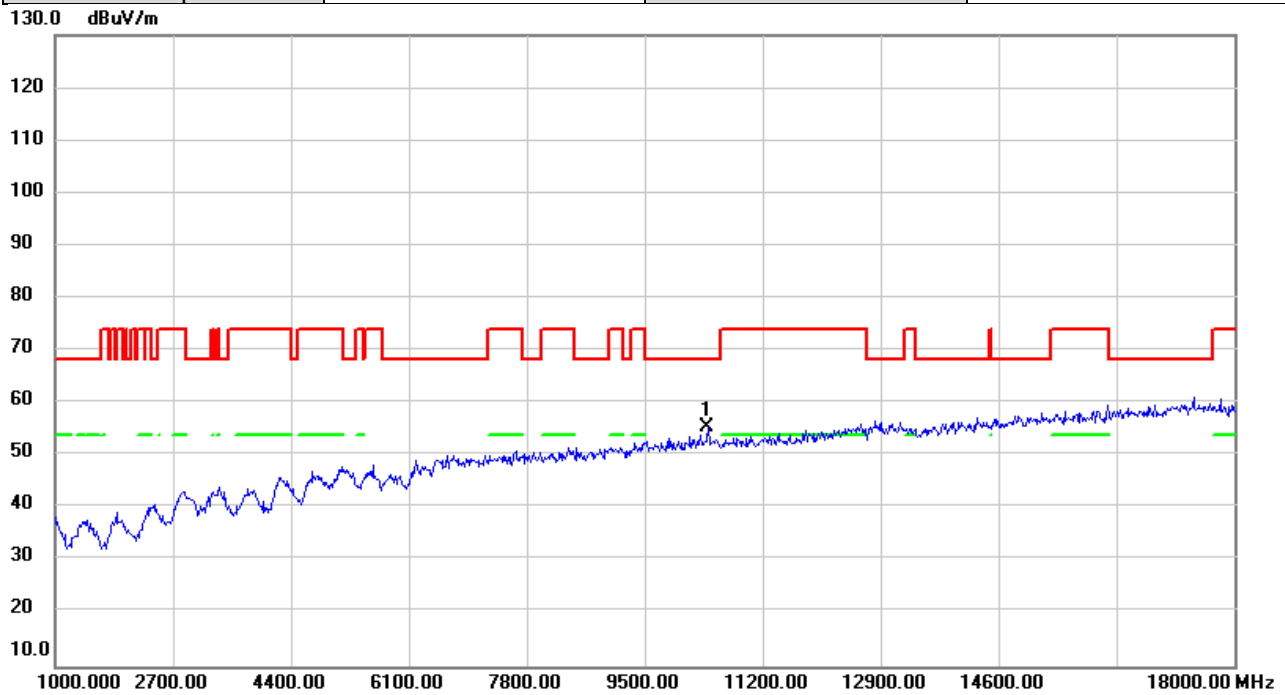


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	48.29	7.08	55.37	68.20	-12.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

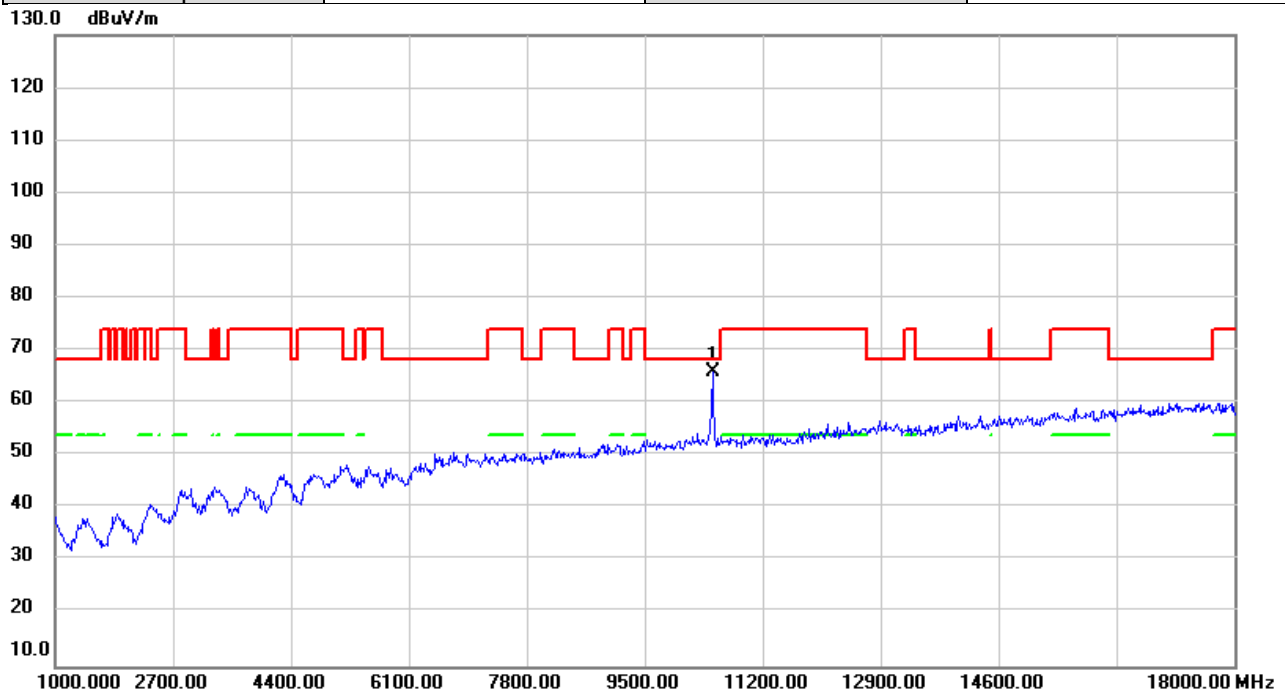


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	58.71	7.10	65.81	68.20	-2.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

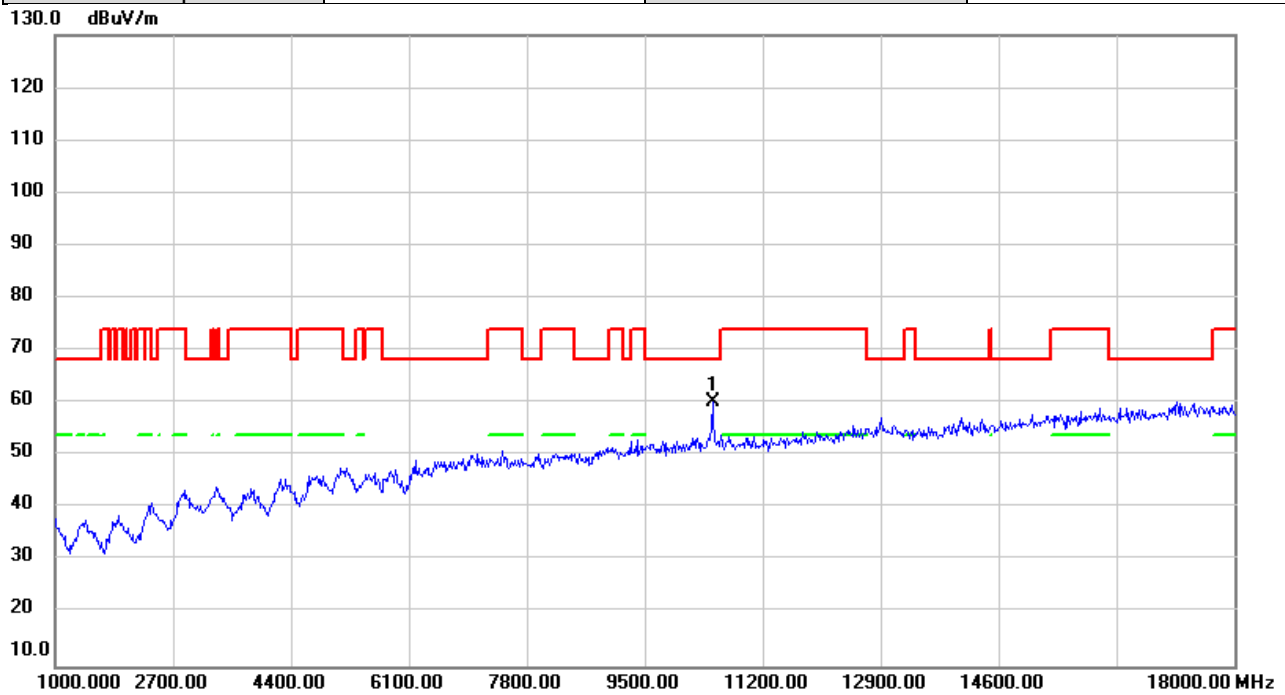


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	53.10	7.10	60.20	68.20	-8.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

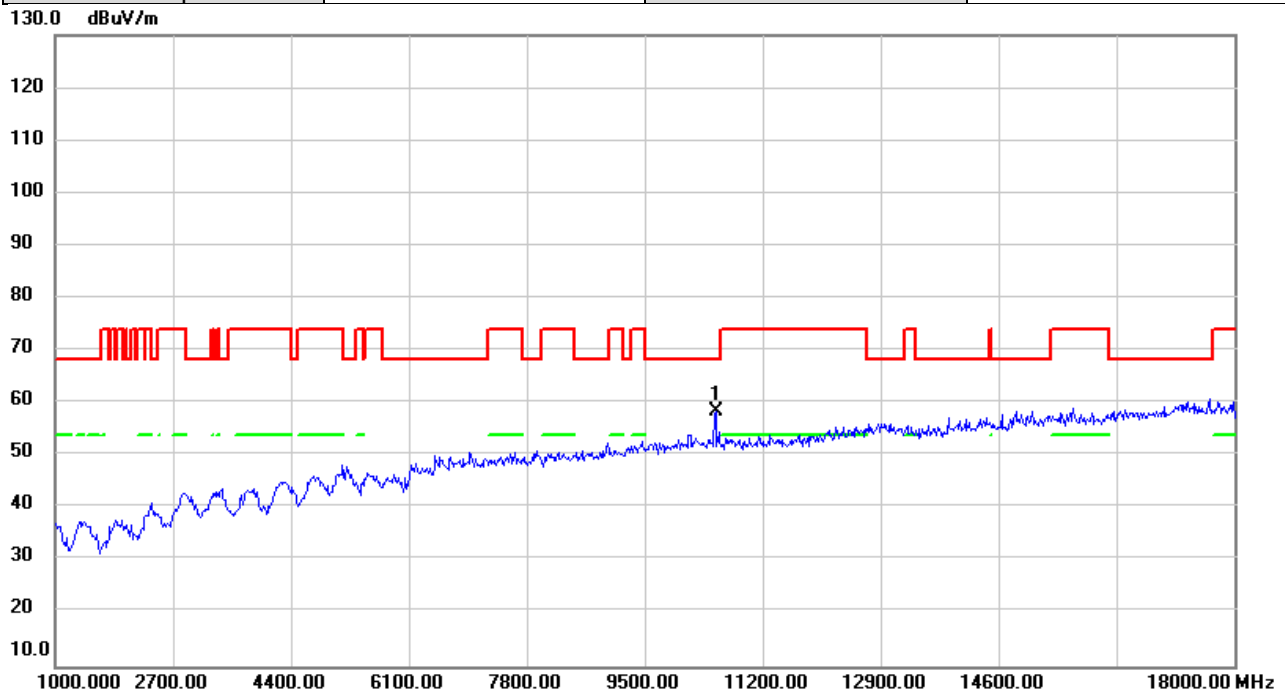


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	51.34	7.07	58.41	68.20	-9.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	58%

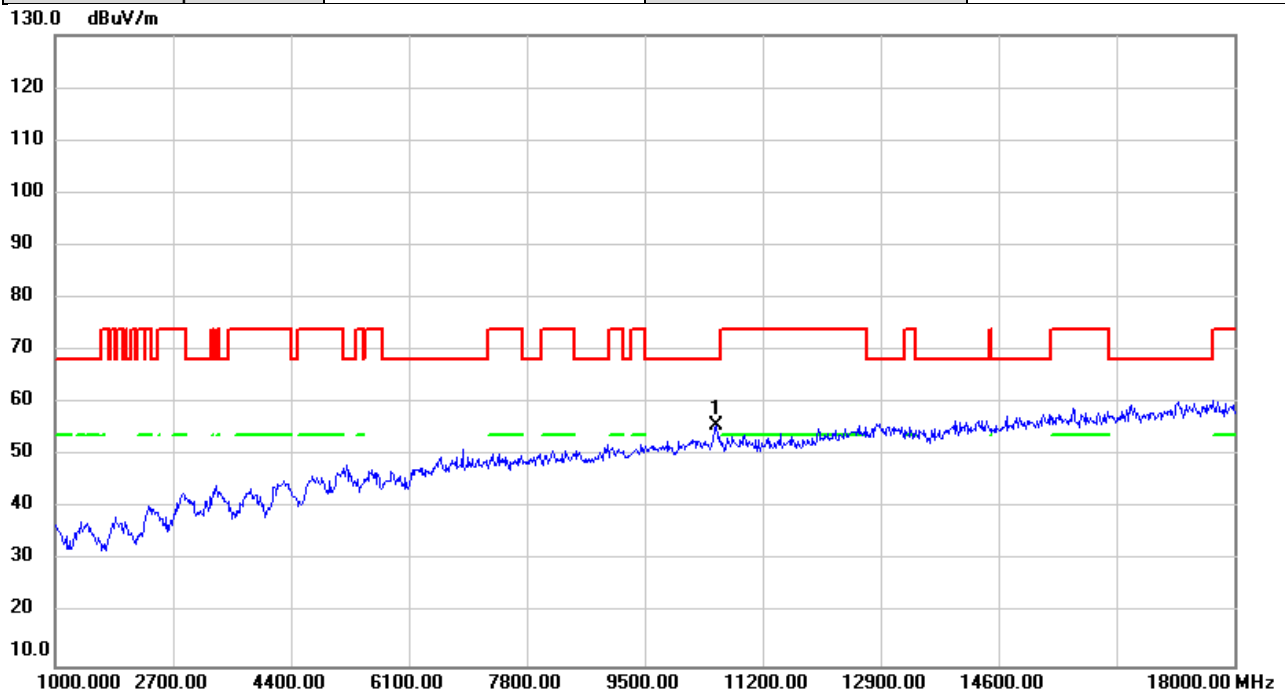


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	48.76	7.07	55.83	68.20	-12.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	58%

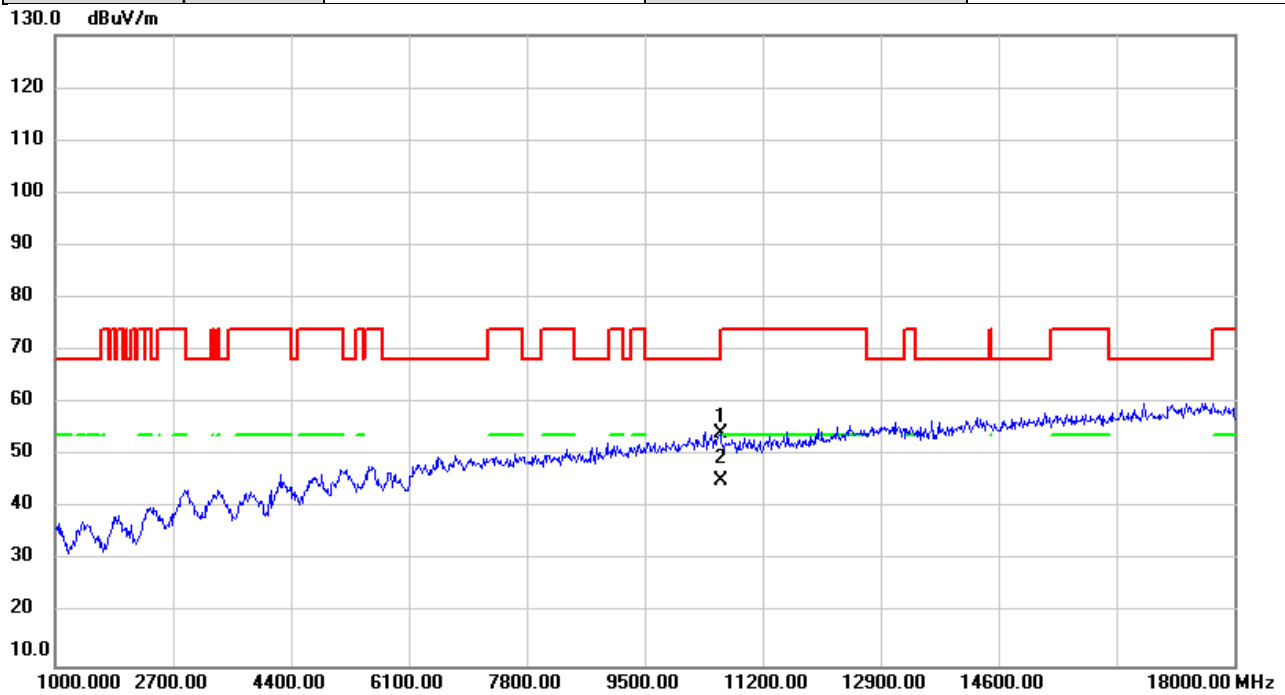


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	47.42	6.95	54.37	68.20	-13.83	peak	
2	*	10600.00	38.23	6.95	45.18	54.00	-8.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5300MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

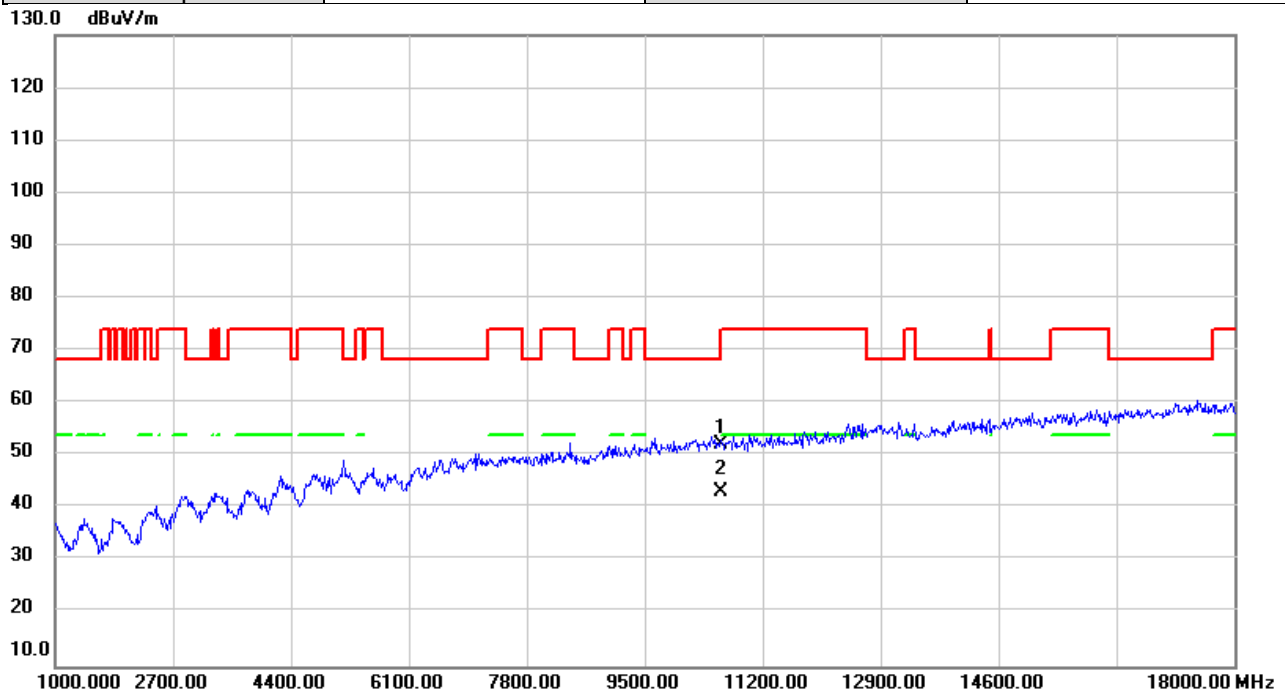


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	45.25	6.95	52.20	68.20	-16.00	peak	
2	*	10600.00	36.07	6.95	43.02	54.00	-10.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

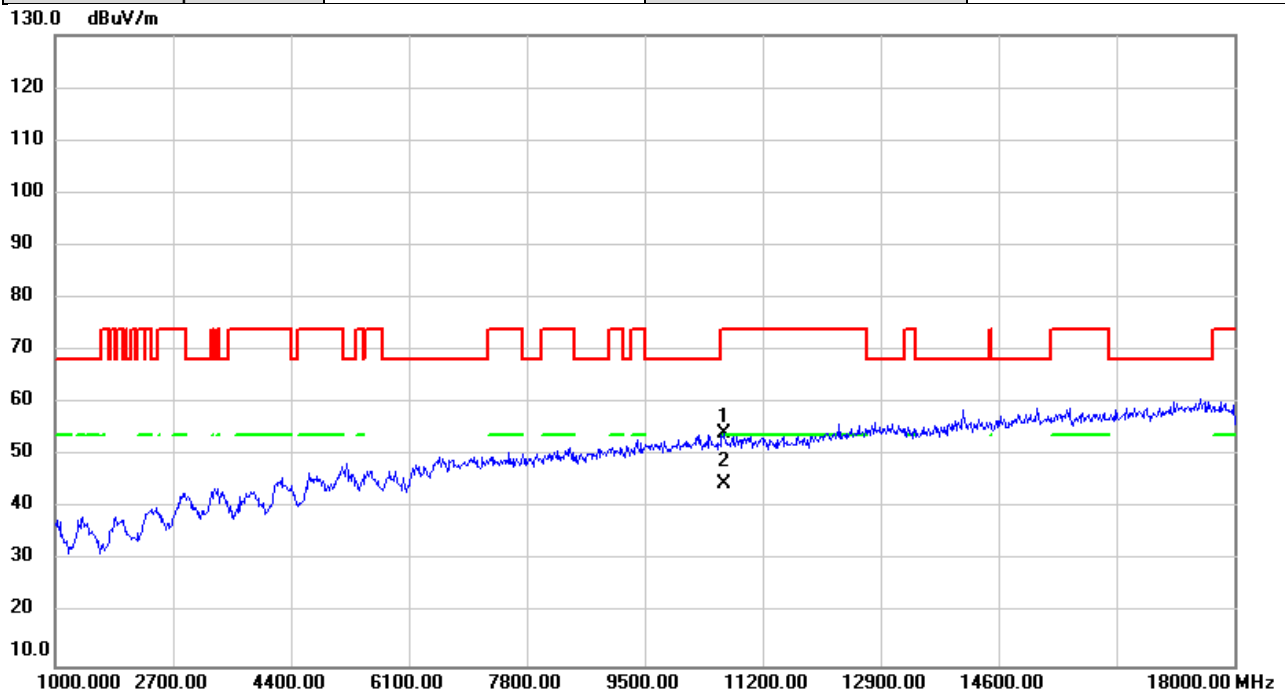


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	47.49	6.89	54.38	74.00	-19.62	peak	
2	*	10640.00	37.81	6.89	44.70	54.00	-9.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

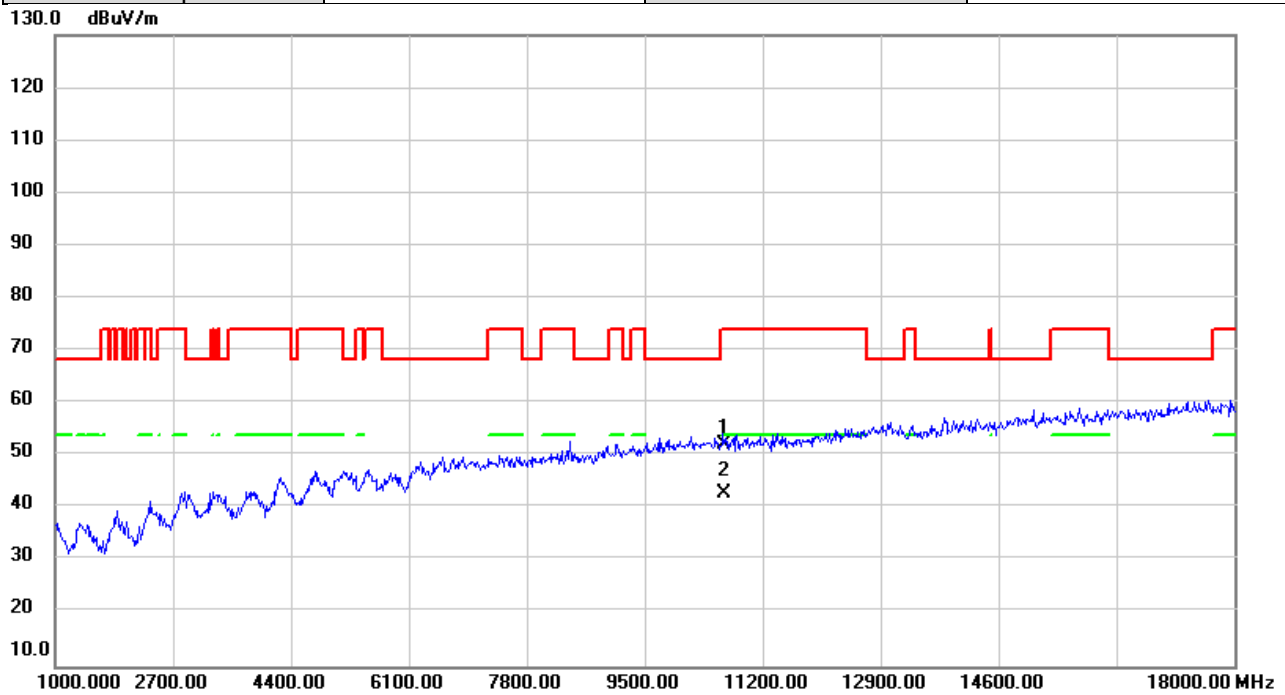


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	45.41	6.89	52.30	74.00	-21.70	peak	
2	*	10640.00	36.06	6.89	42.95	54.00	-11.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

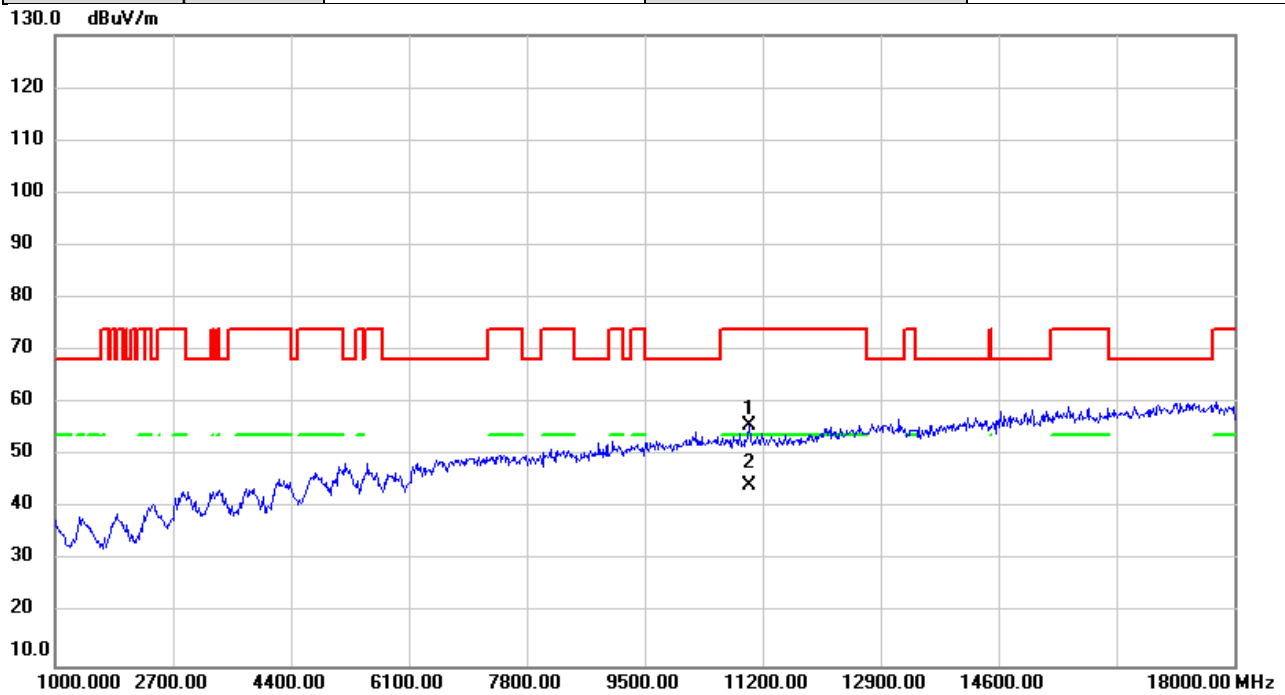


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	49.34	6.36	55.70	74.00	-18.30	peak	
2	*	11000.00	38.03	6.36	44.39	54.00	-9.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

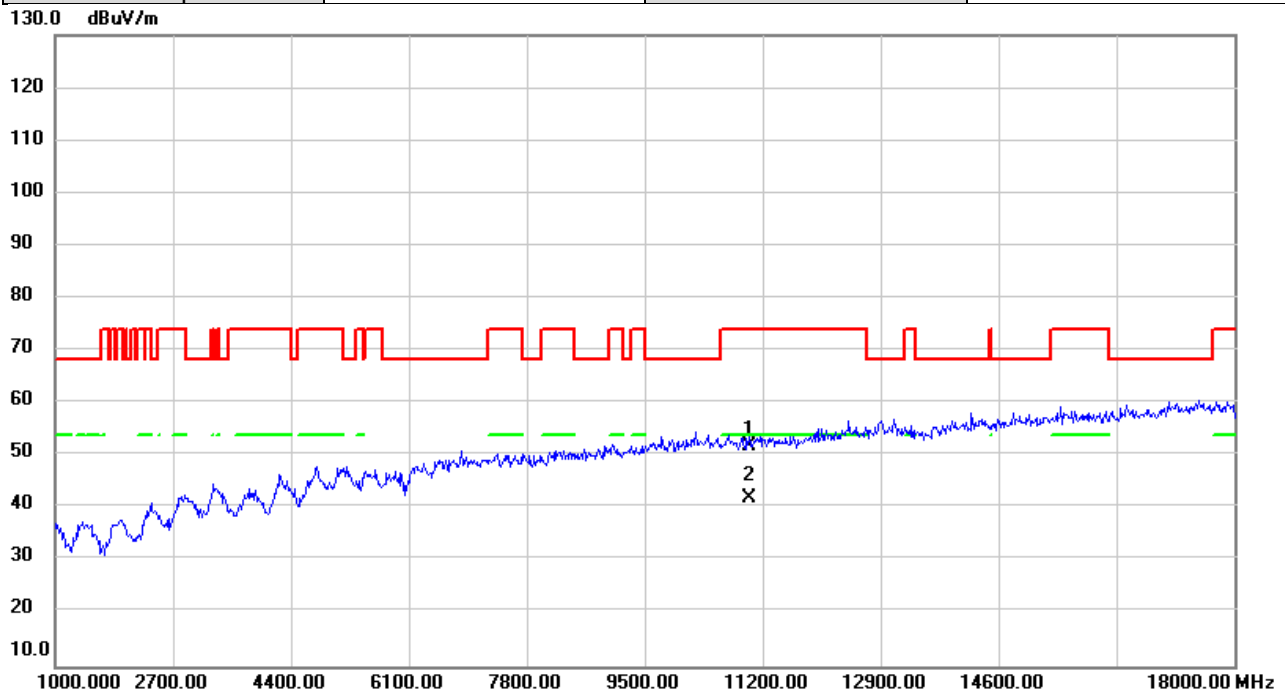


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	45.59	6.36	51.95	74.00	-22.05	peak	
2	*	11000.00	35.48	6.36	41.84	54.00	-12.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

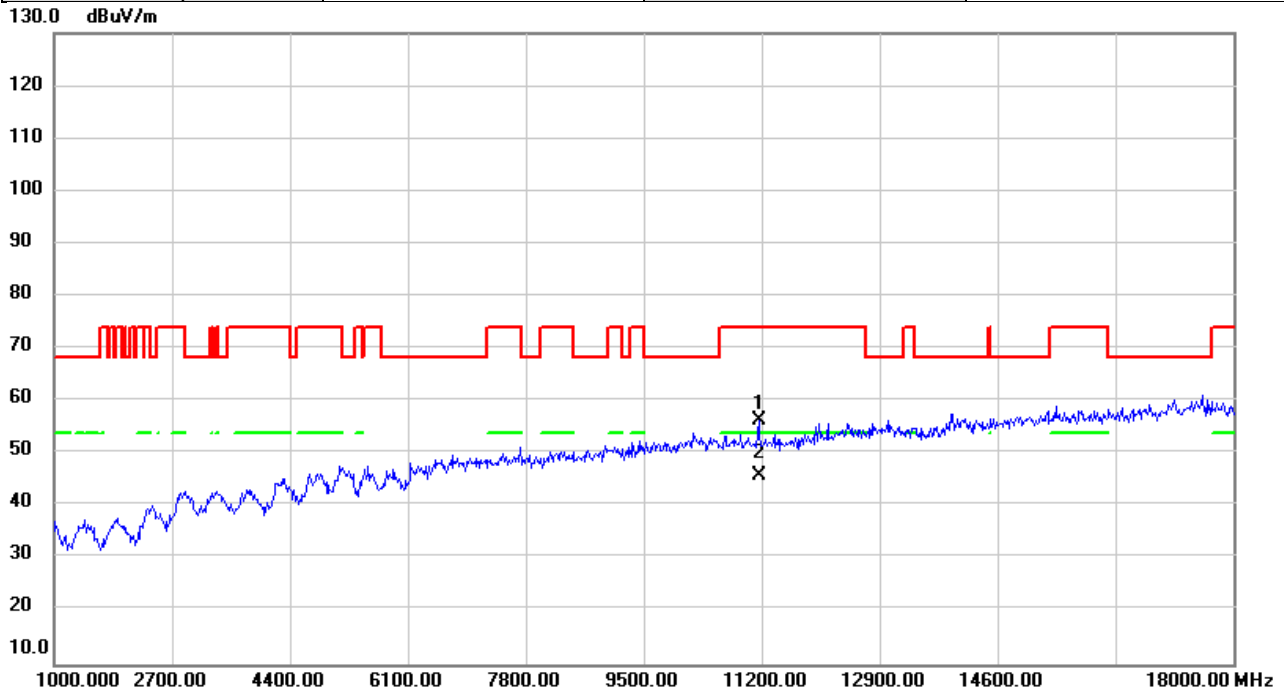


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	49.82	6.38	56.20	74.00	-17.80	peak	
2	*	11160.00	39.54	6.38	45.92	54.00	-8.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

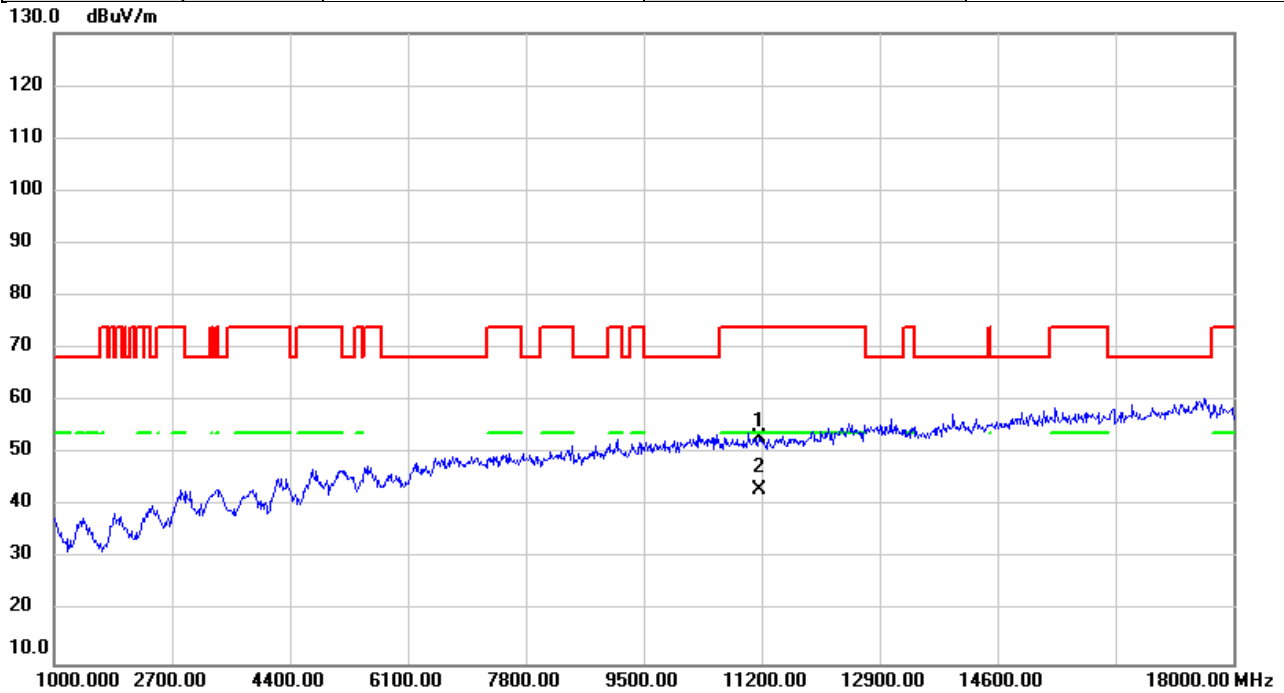


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	46.70	6.38	53.08	74.00	-20.92	peak	
2	*	11160.00	36.85	6.38	43.23	54.00	-10.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

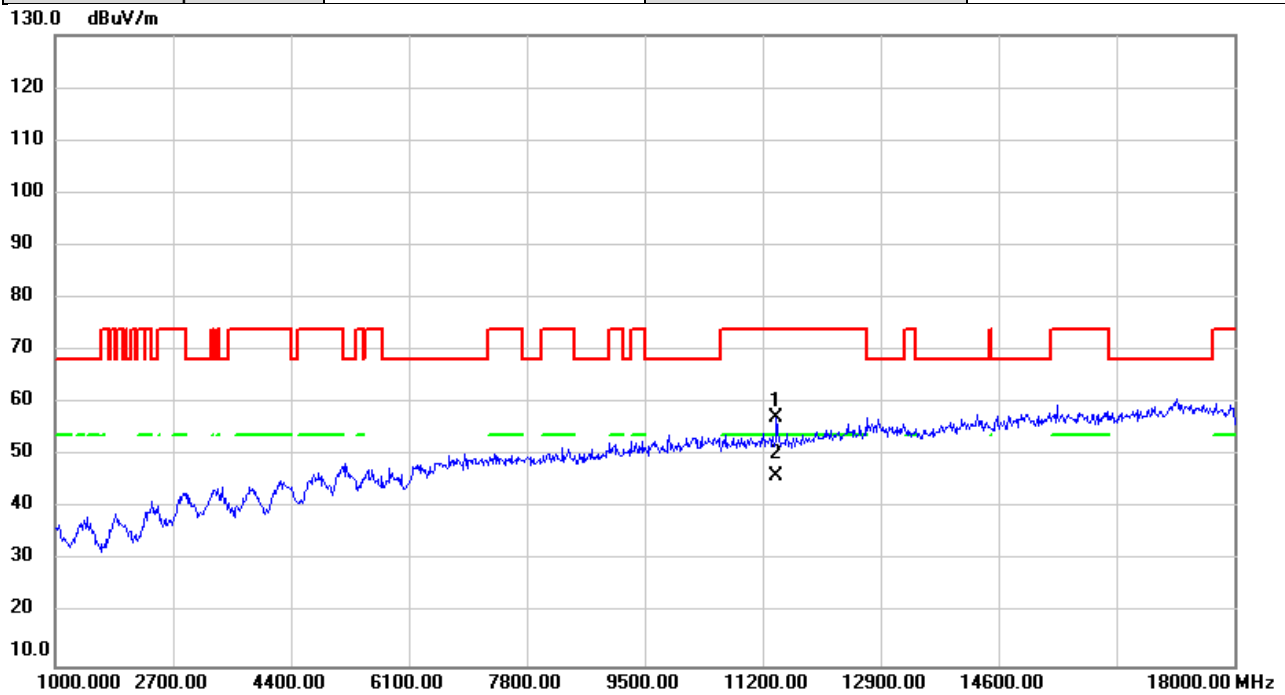


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	50.75	6.41	57.16	74.00	-16.84	peak	
2	*	11400.00	39.61	6.41	46.02	54.00	-7.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

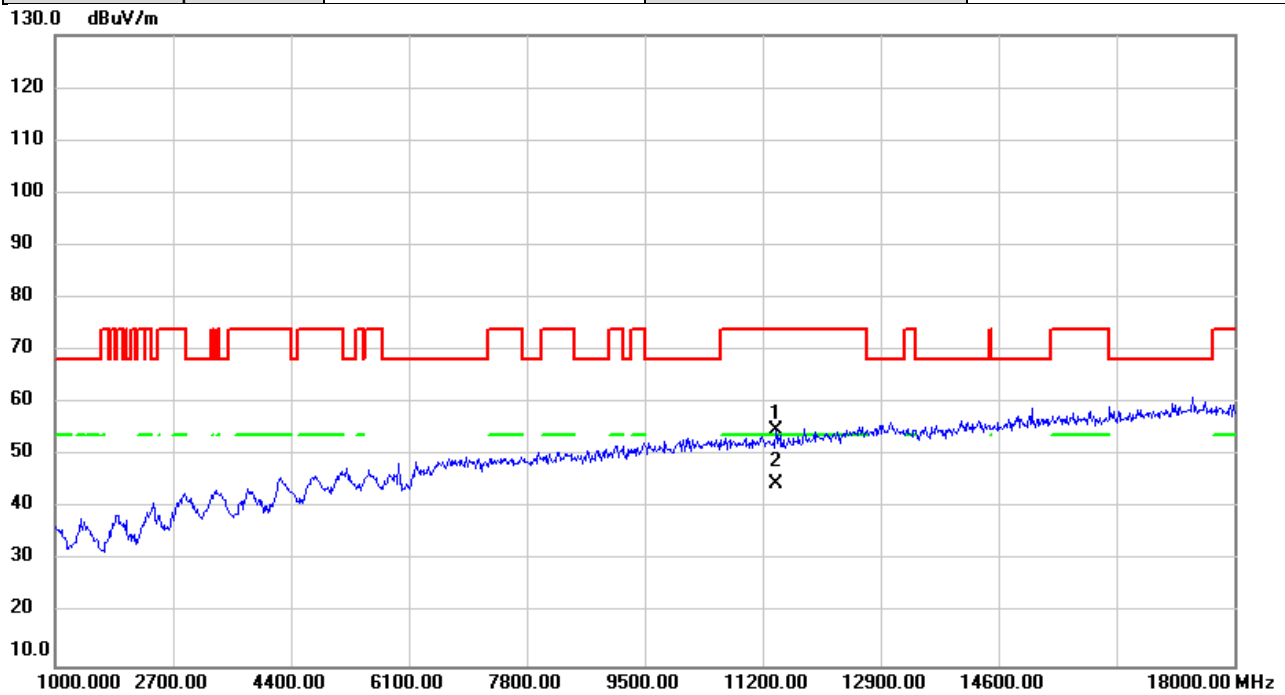


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	48.30	6.41	54.71	74.00	-19.29	peak	
2	*	11400.00	38.15	6.41	44.56	54.00	-9.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

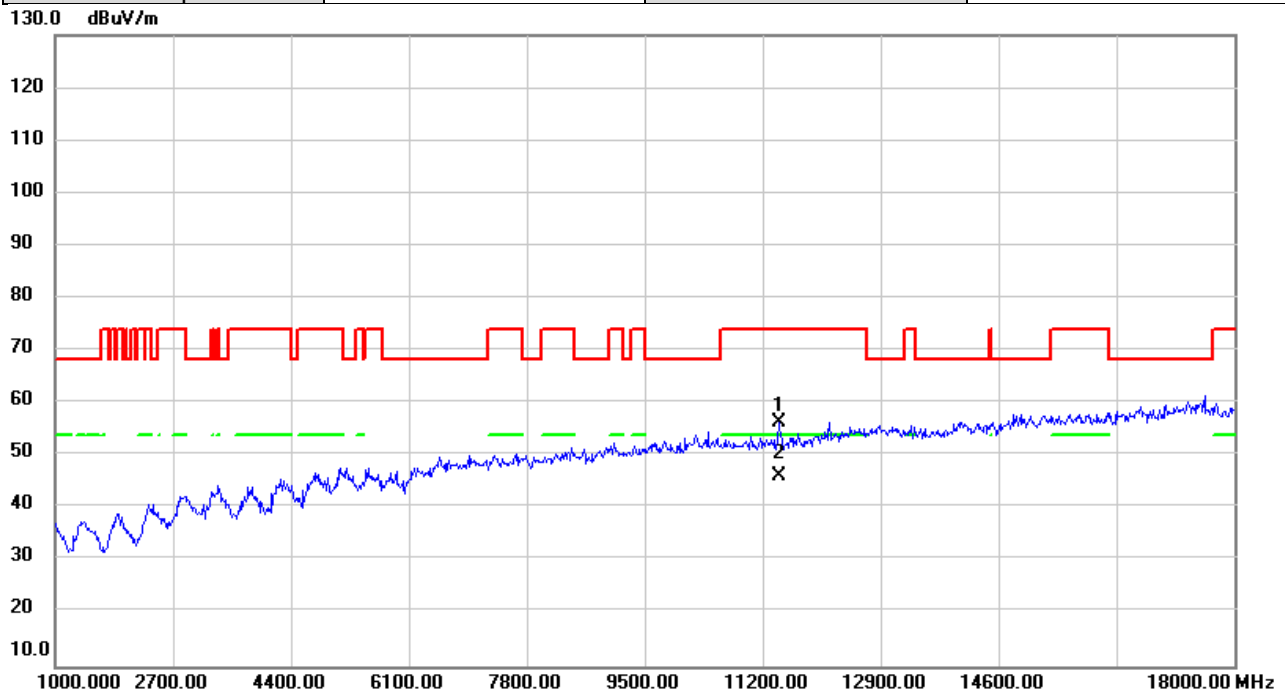


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	50.06	6.41	56.47	74.00	-17.53	peak	
2	*	11440.00	39.77	6.41	46.18	54.00	-7.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

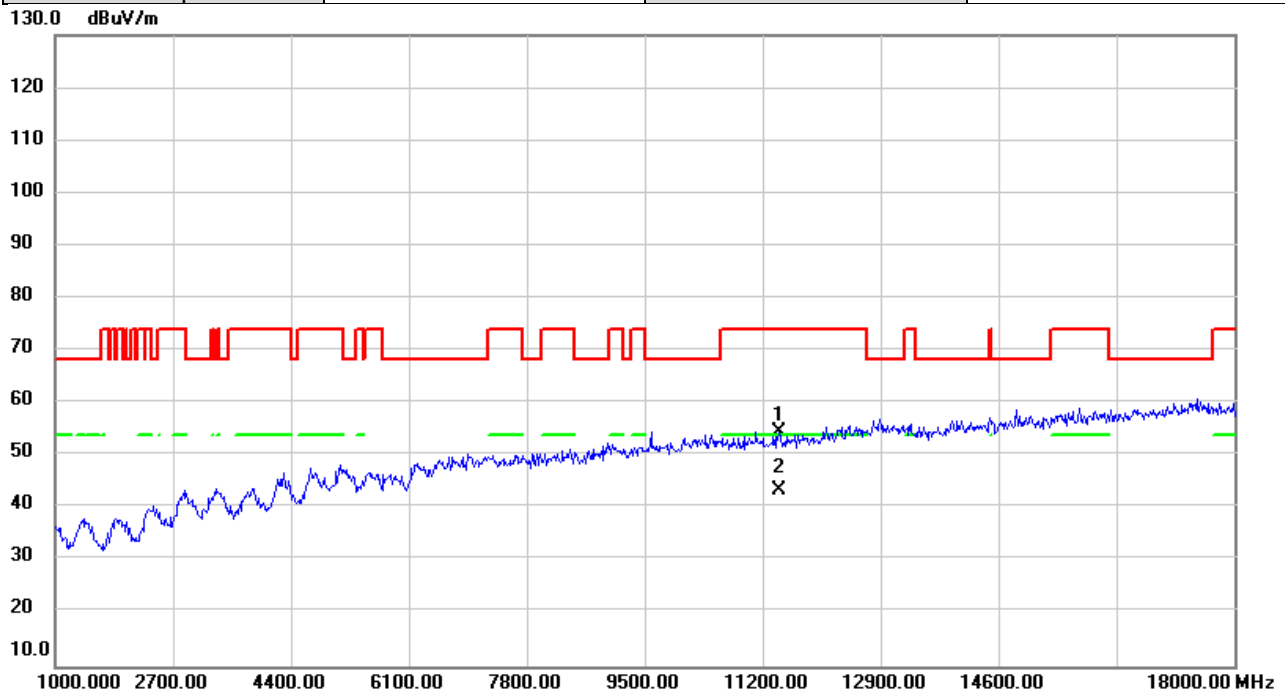


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	48.26	6.41	54.67	74.00	-19.33	peak	
2	*	11440.00	36.98	6.41	43.39	54.00	-10.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

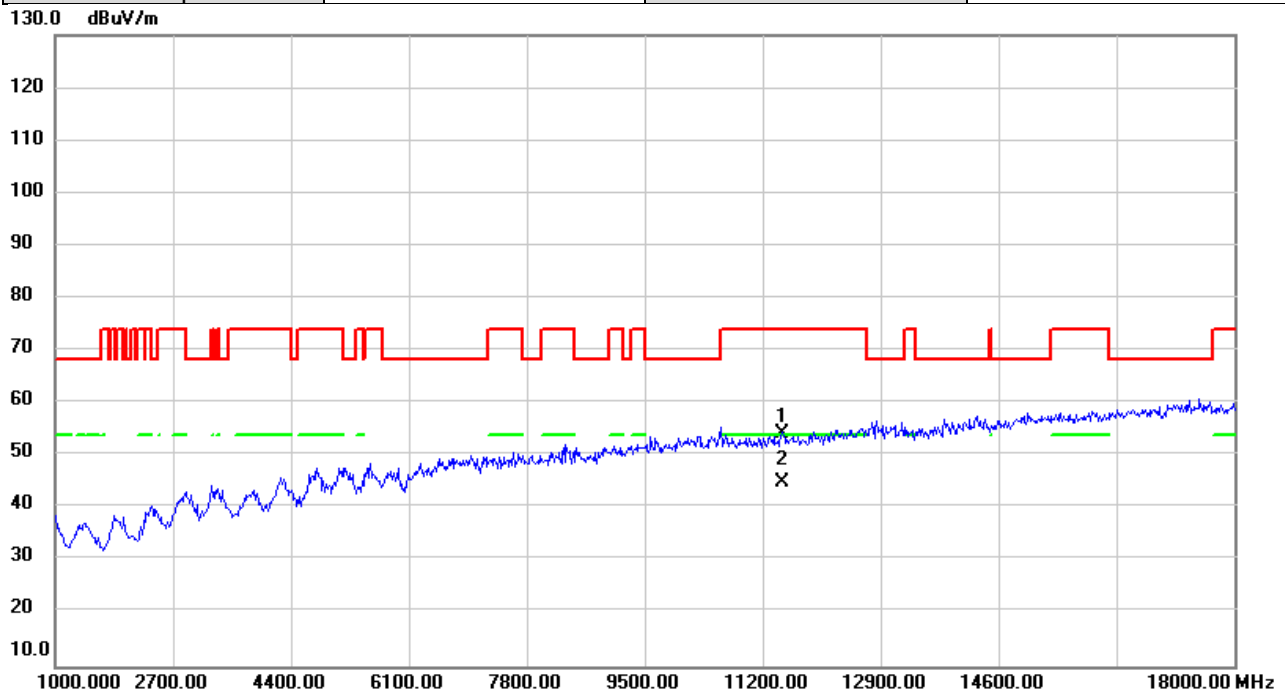


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	47.75	6.42	54.17	74.00	-19.83	peak	
2	*	11490.00	38.54	6.42	44.96	54.00	-9.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

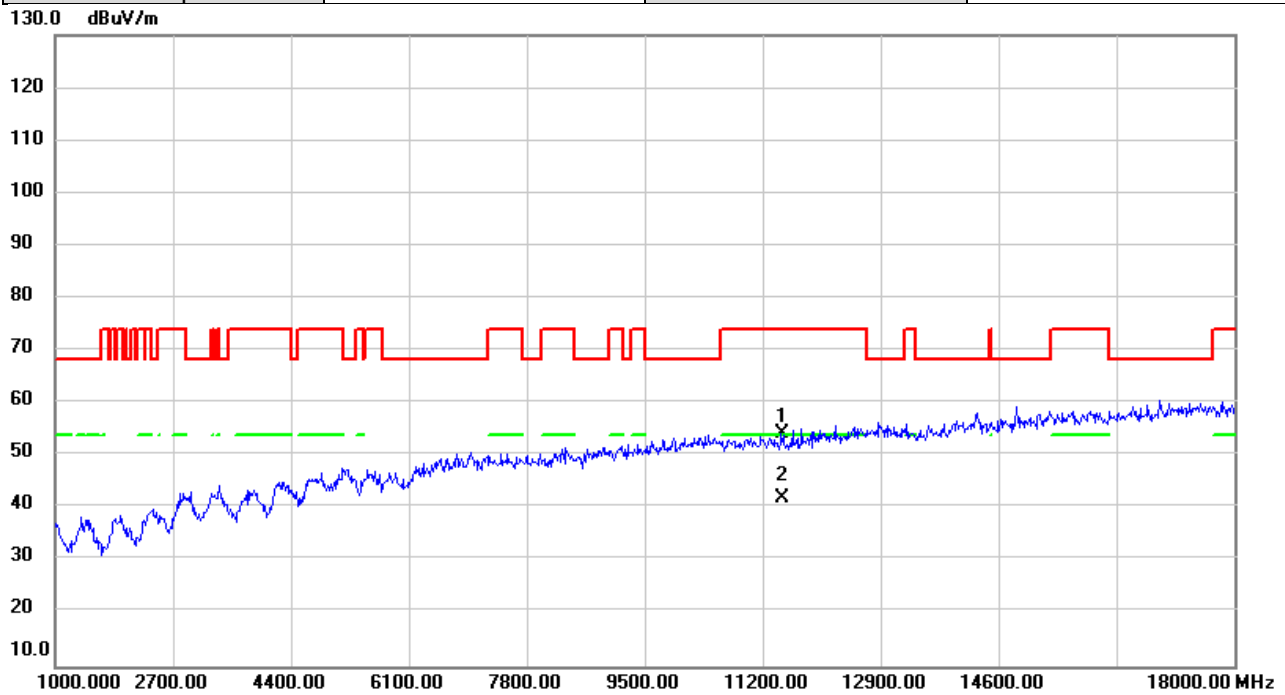


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	47.89	6.42	54.31	74.00	-19.69	peak	
2	*	11490.00	35.67	6.42	42.09	54.00	-11.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

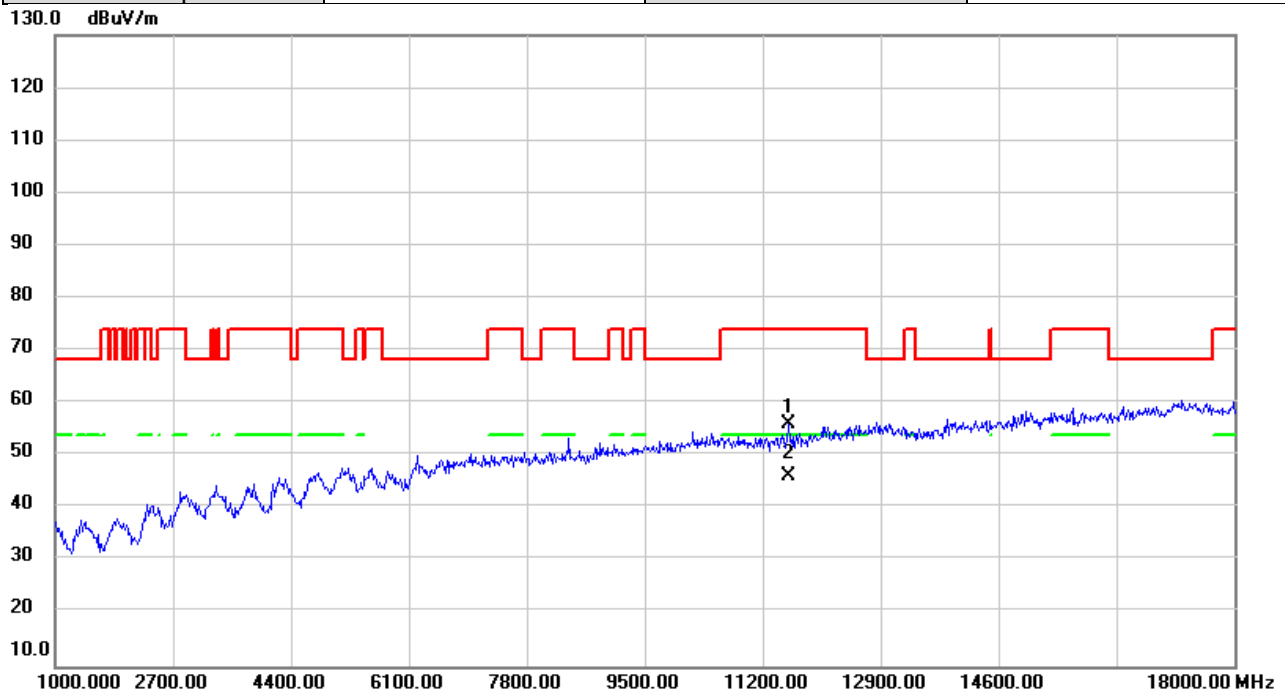


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	49.46	6.50	55.96	74.00	-18.04	peak	
2	*	11570.00	39.54	6.50	46.04	54.00	-7.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

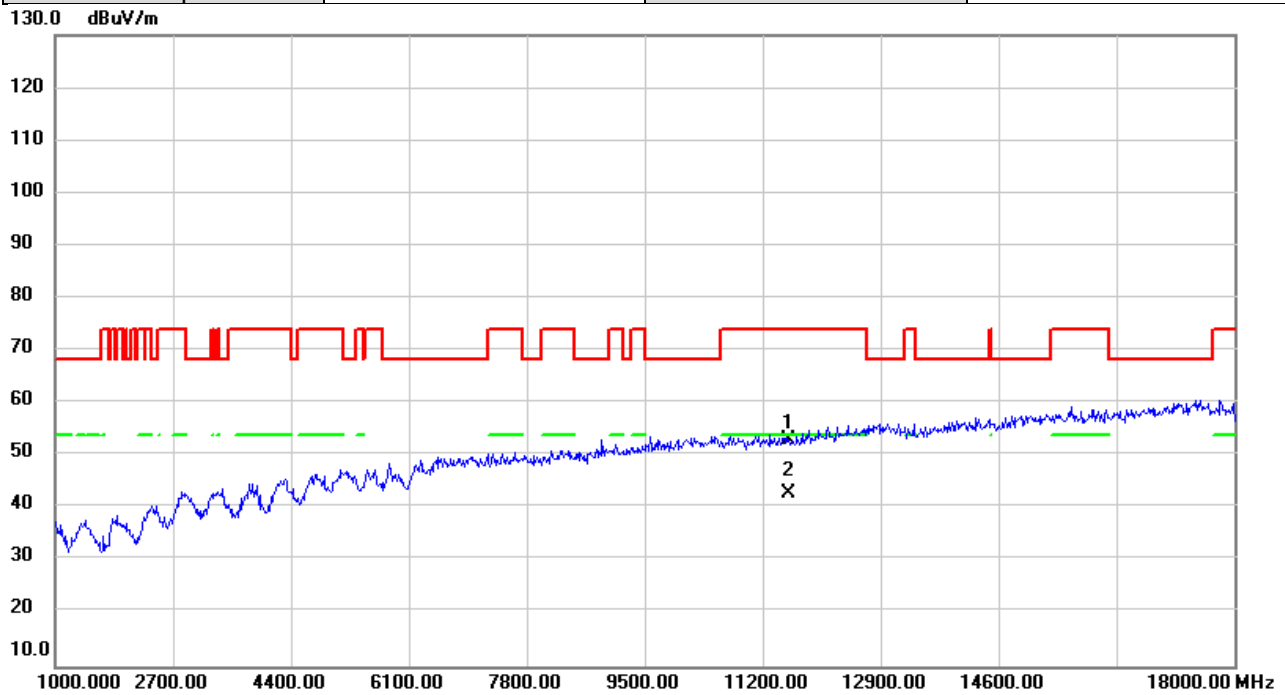


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	46.44	6.50	52.94	74.00	-21.06	peak	
2	*	11570.00	36.25	6.50	42.75	54.00	-11.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

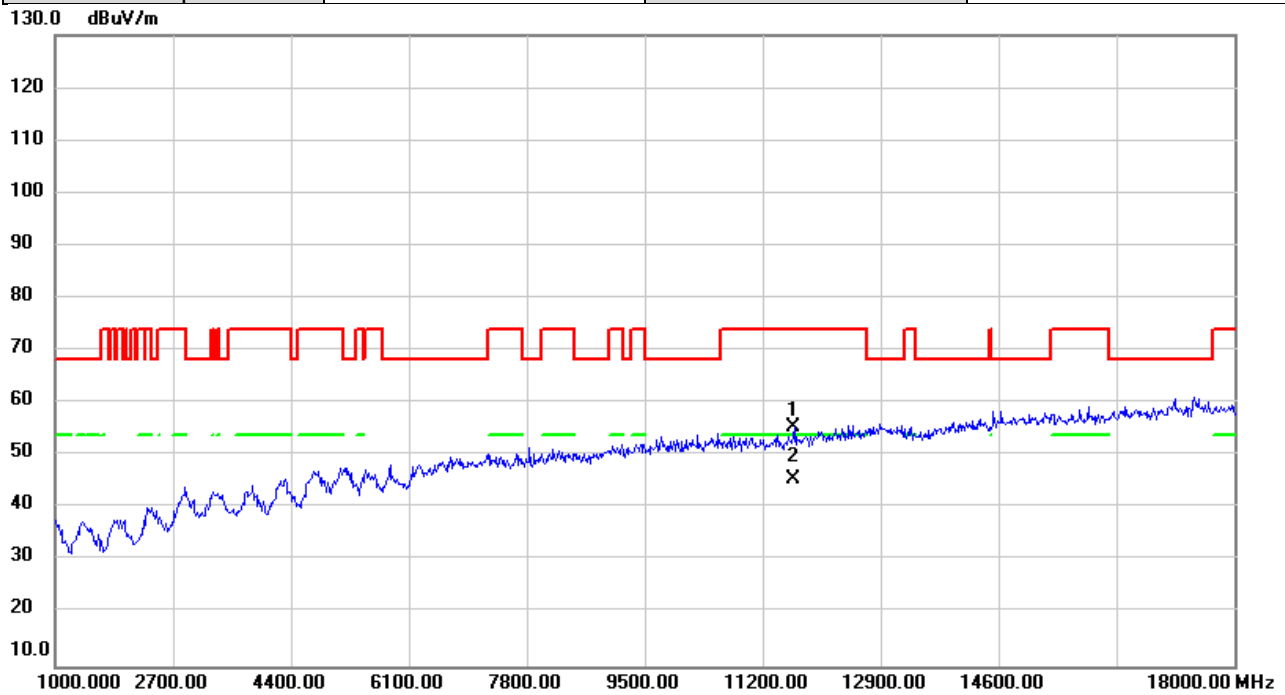


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	48.91	6.59	55.50	74.00	-18.50	peak	
2	*	11650.00	38.82	6.59	45.41	54.00	-8.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/4
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

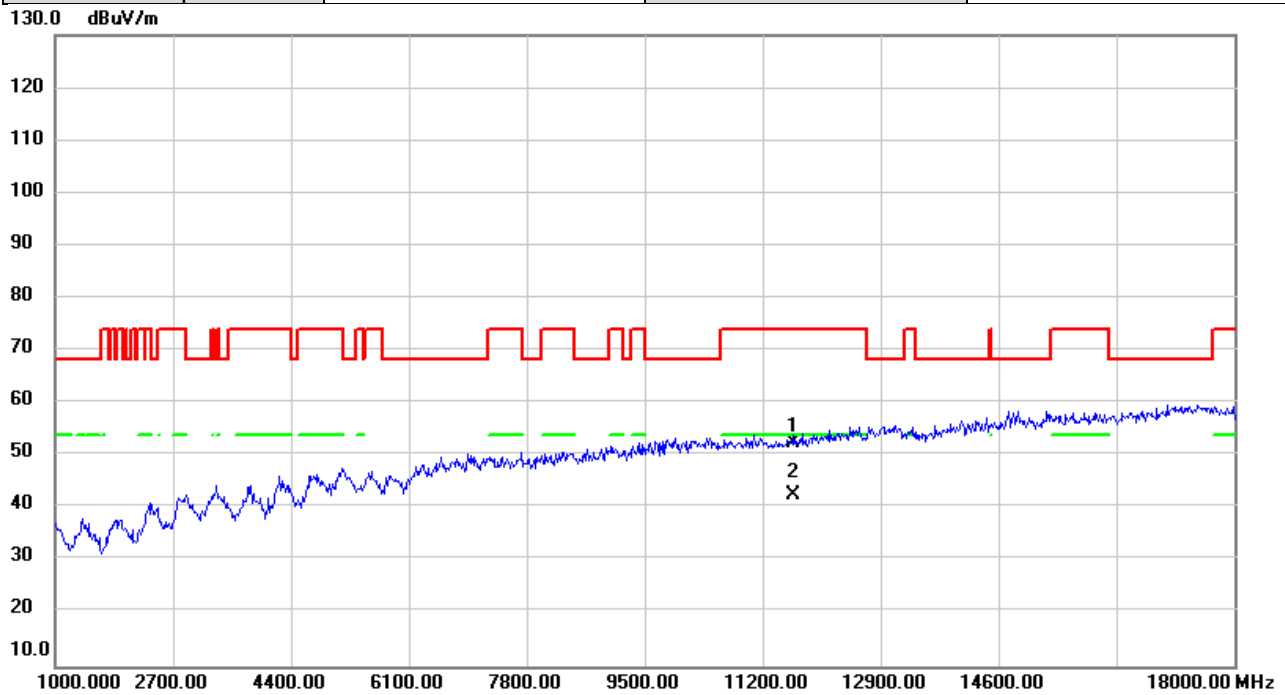


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	46.00	6.59	52.59	74.00	-21.41	peak	
2	*	11650.00	35.95	6.59	42.54	54.00	-11.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

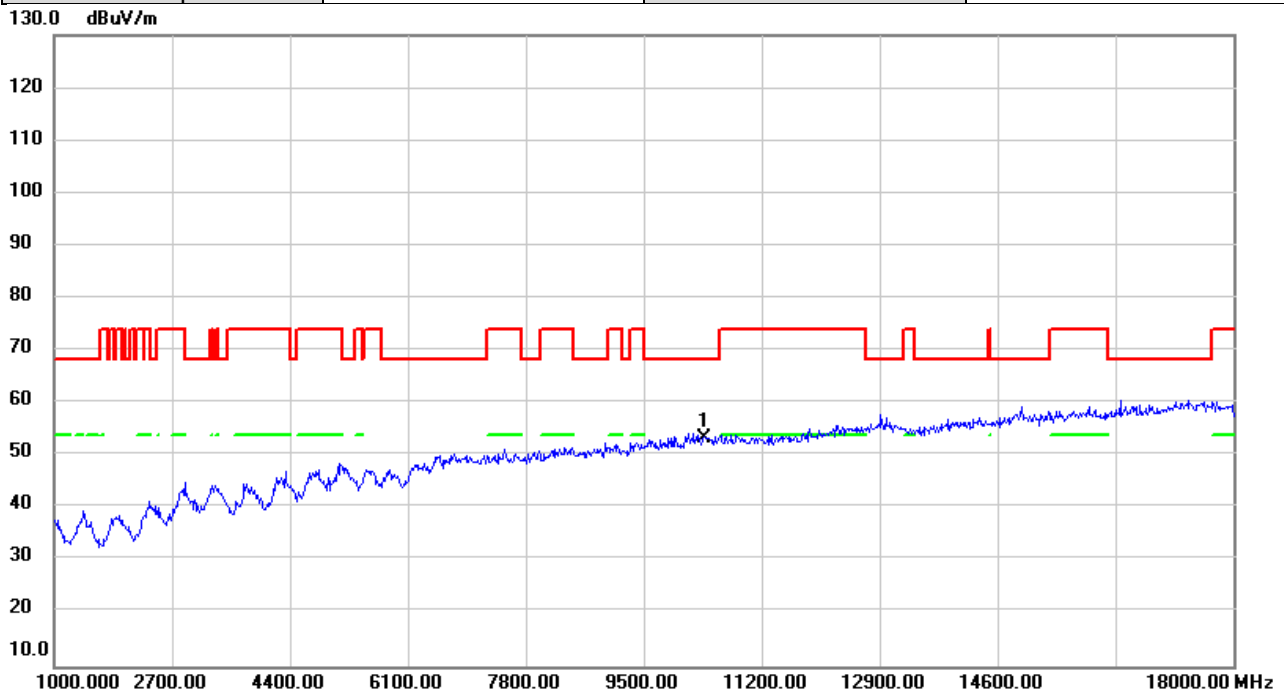


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	46.35	7.08	53.43	68.20	-14.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

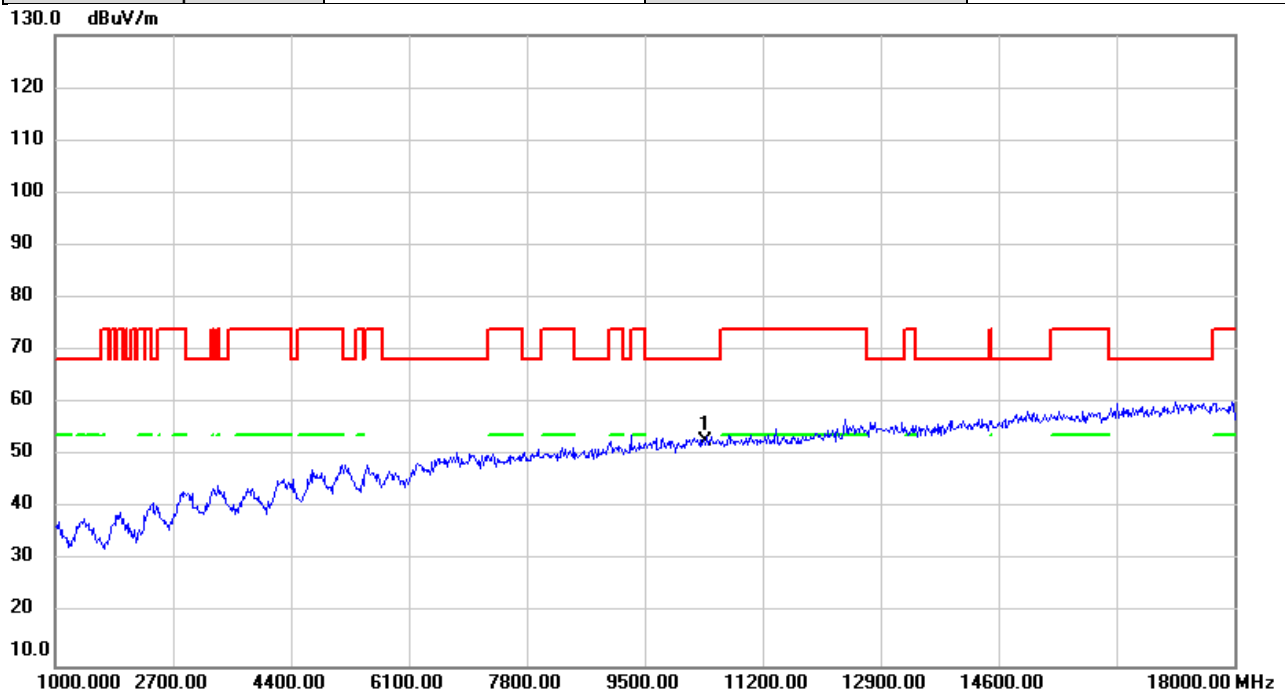


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	45.78	7.08	52.86	68.20	-15.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

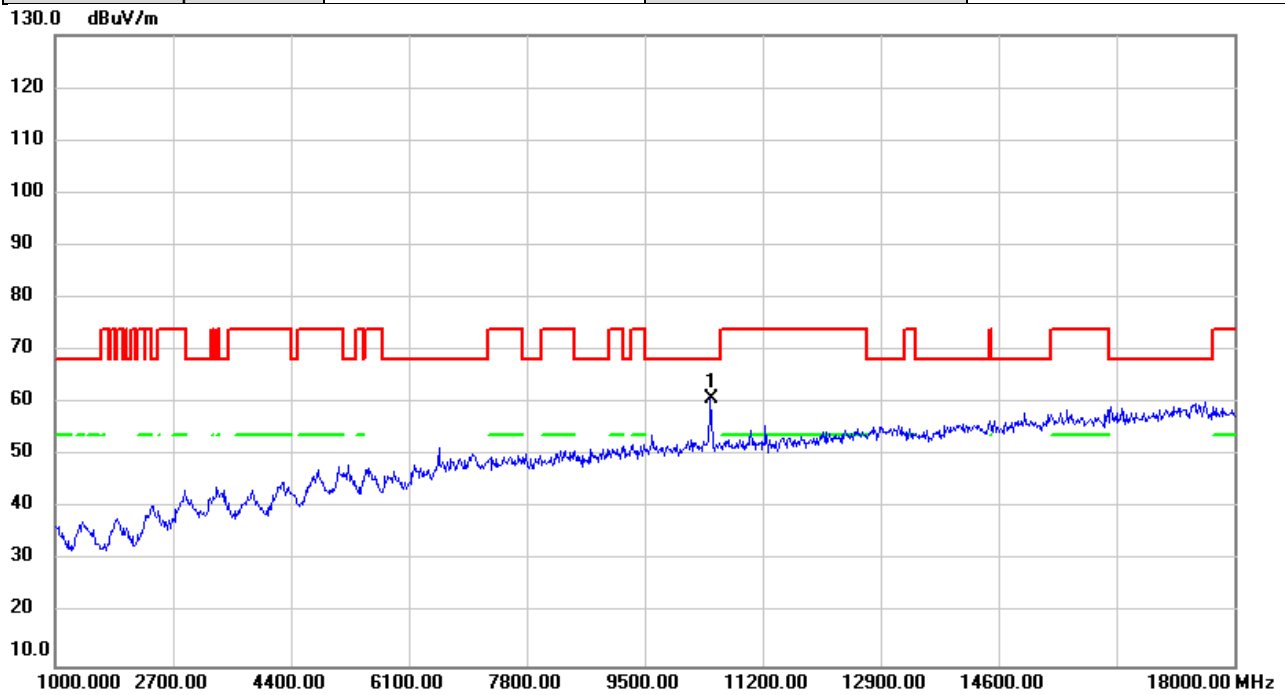


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	53.76	7.10	60.86	68.20	-7.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

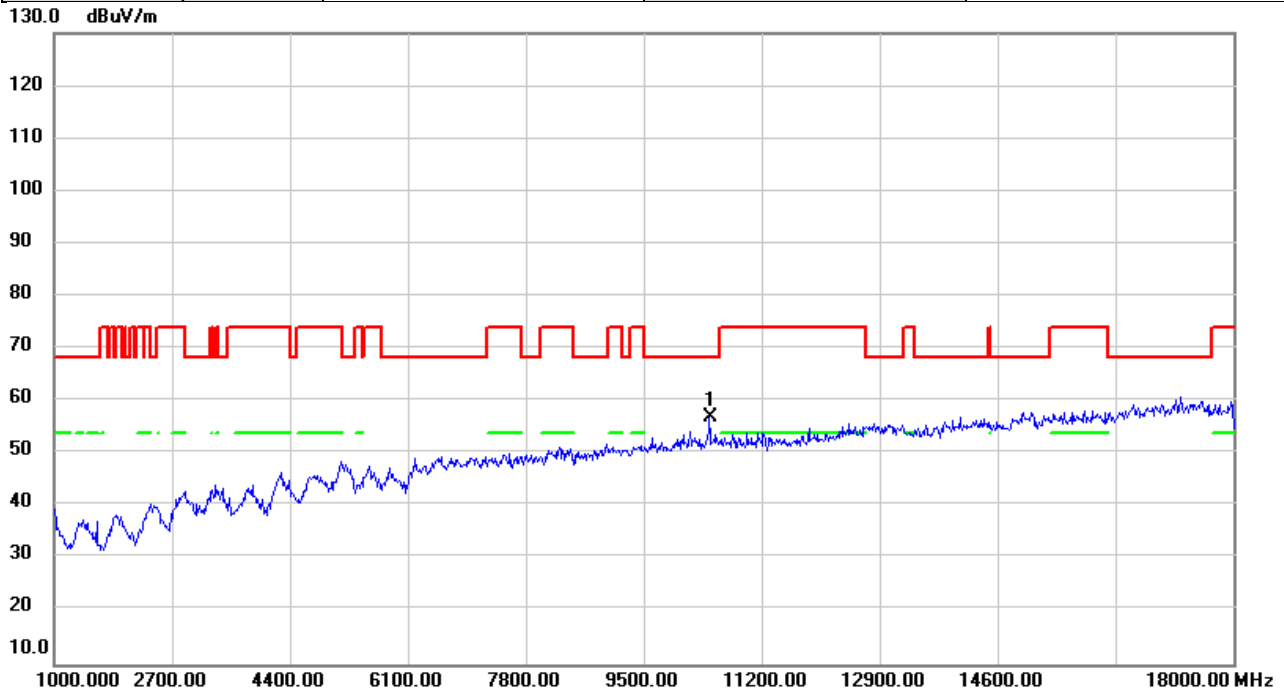


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	49.96	7.10	57.06	68.20	-11.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

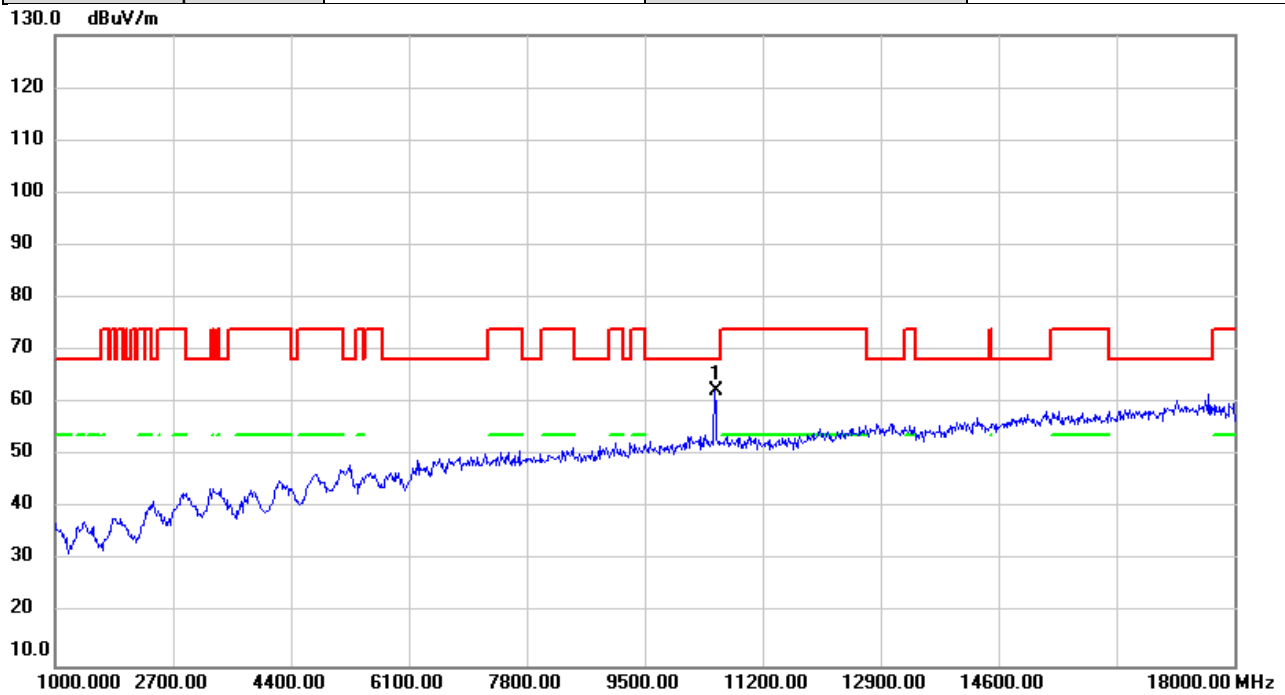


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	55.20	7.04	62.24	68.20	-5.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

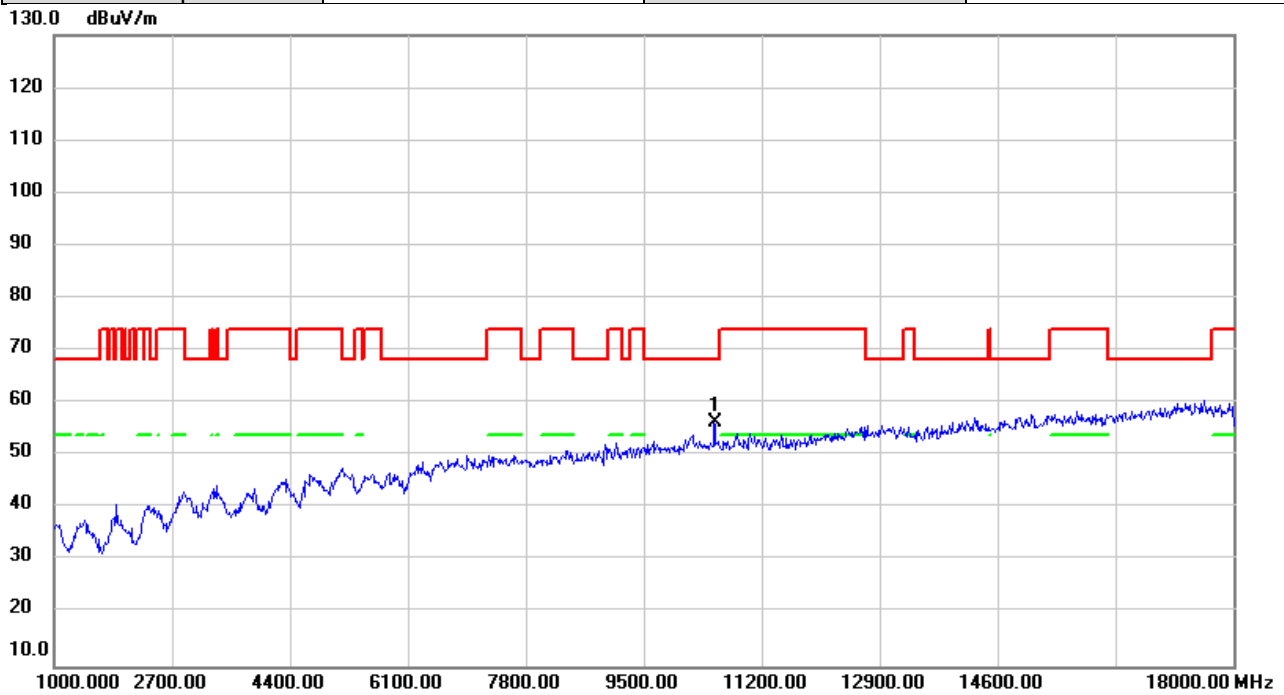


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	49.41	7.04	56.45	68.20	-11.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

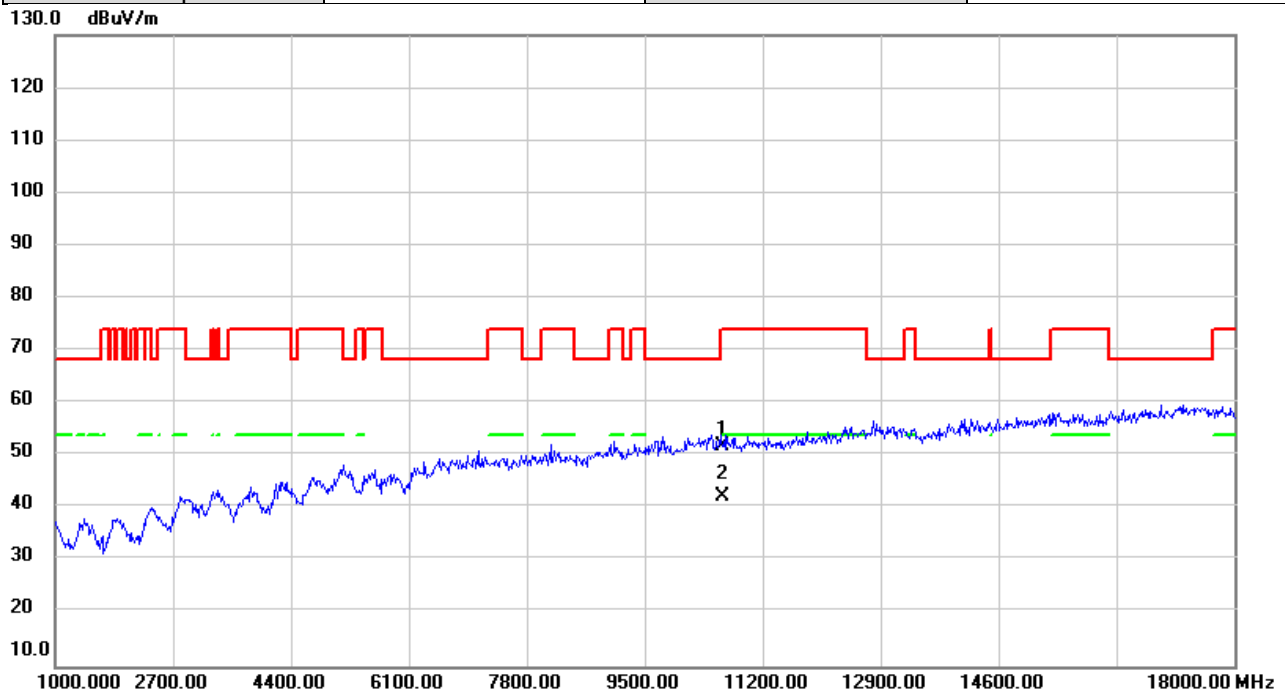


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	45.00	6.92	51.92	74.00	-22.08	peak	
2	*	10620.00	35.34	6.92	42.26	54.00	-11.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

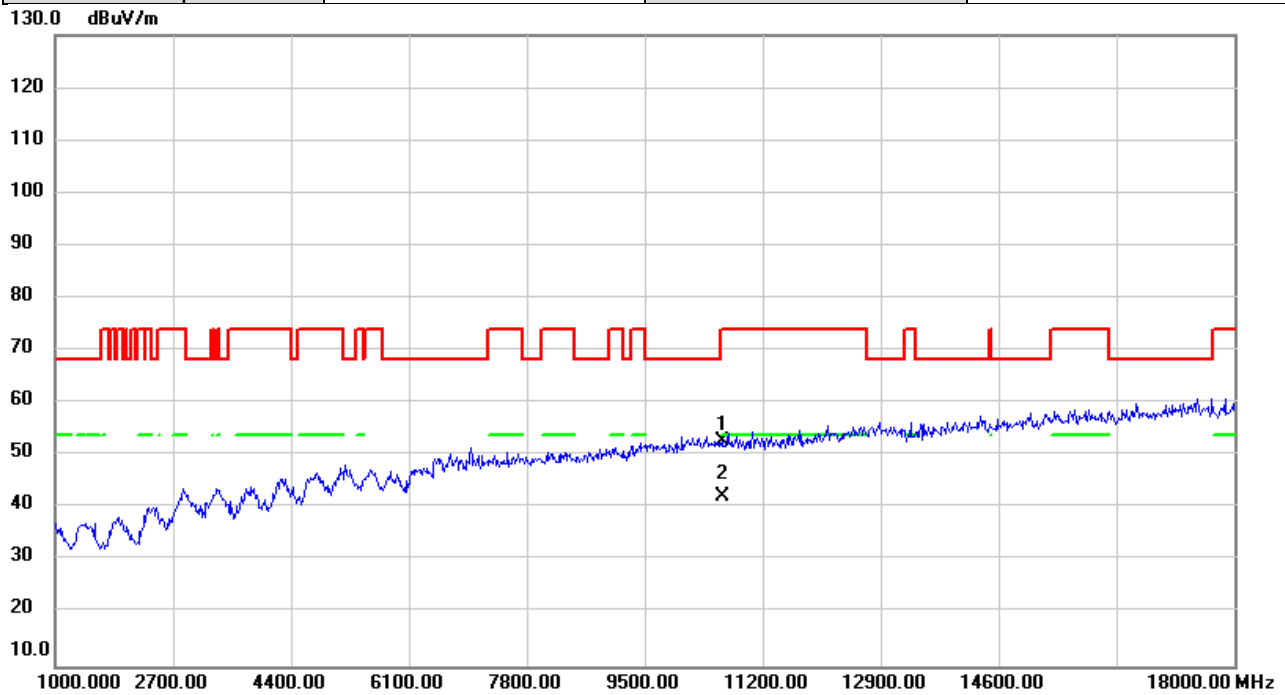


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	45.71	6.92	52.63	74.00	-21.37	peak	
2	*	10620.00	35.26	6.92	42.18	54.00	-11.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

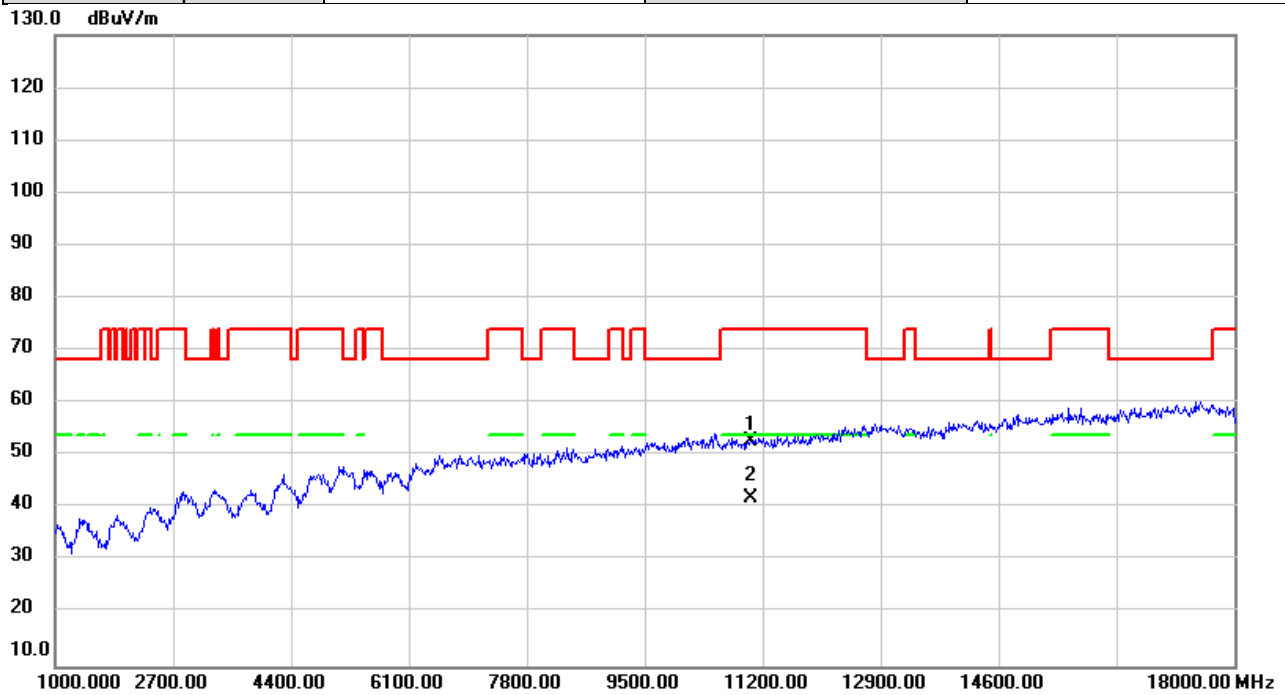


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	46.36	6.36	52.72	74.00	-21.28	peak	
2	*	11020.00	35.56	6.36	41.92	54.00	-12.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

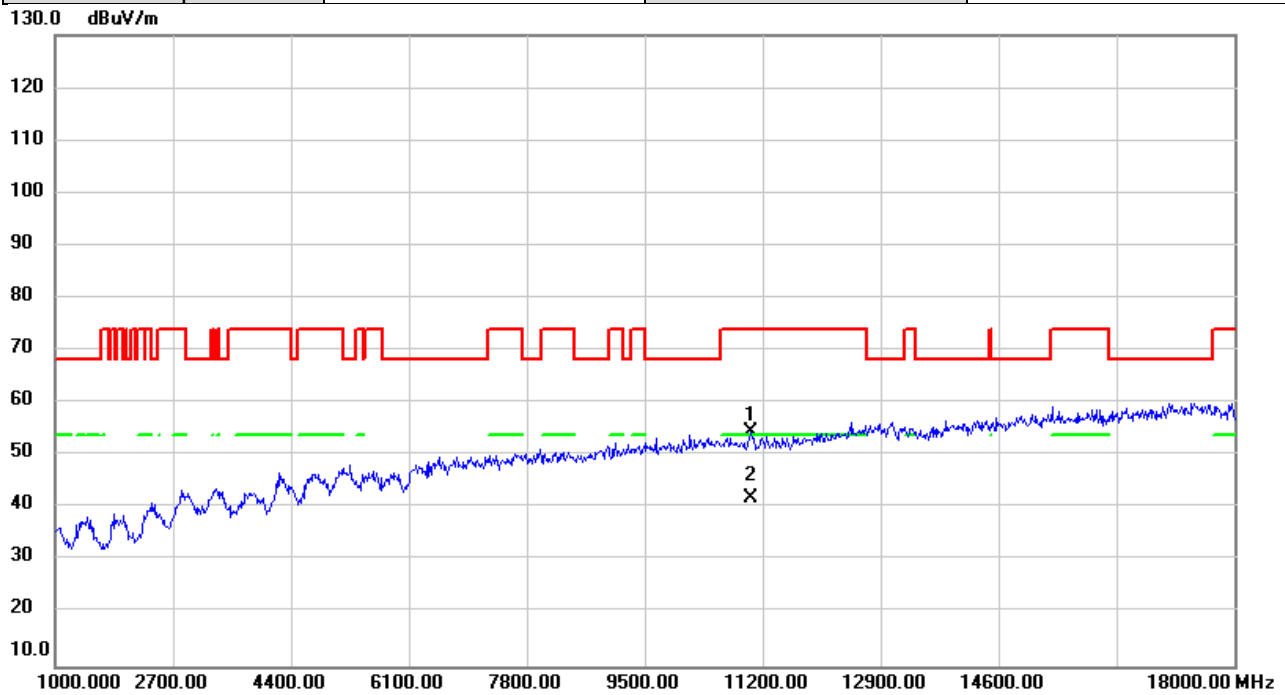


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11032.26	48.17	6.36	54.53	74.00	-19.47	peak	
2		11032.26	35.58	6.36	41.94	54.00	-12.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

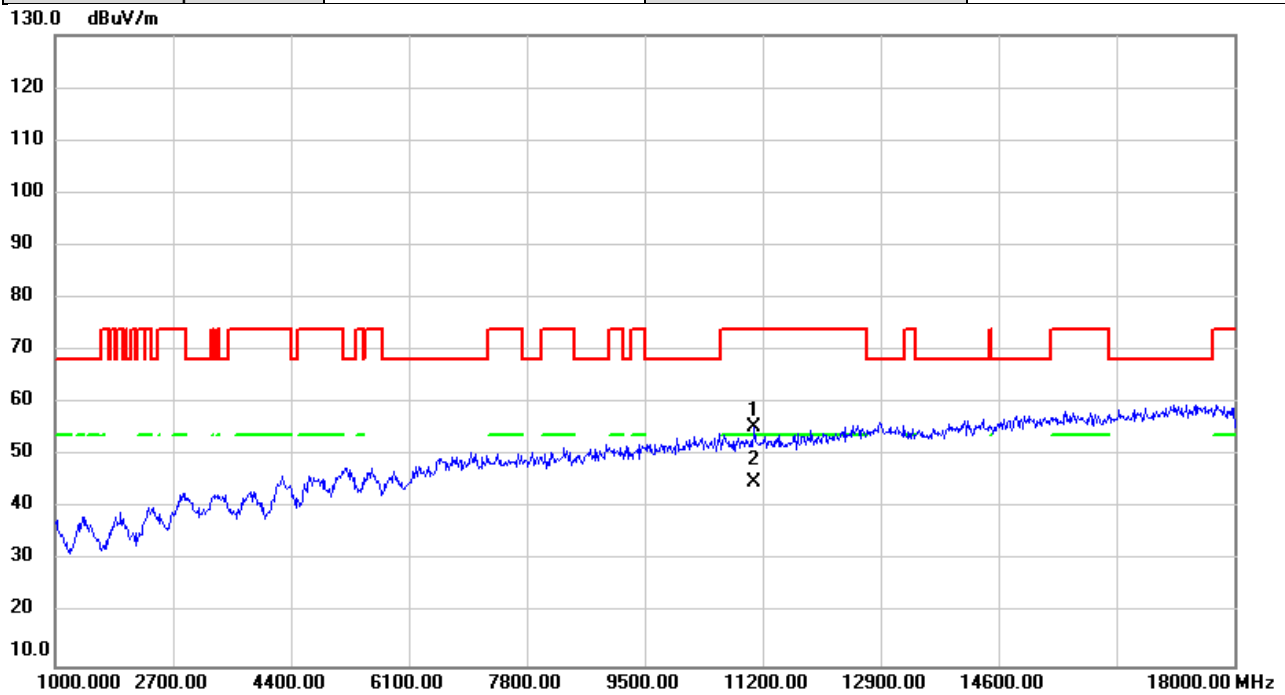


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11083.83	49.00	6.37	55.37	74.00	-18.63	peak	
2		11083.83	38.56	6.37	44.93	54.00	-9.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5550MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

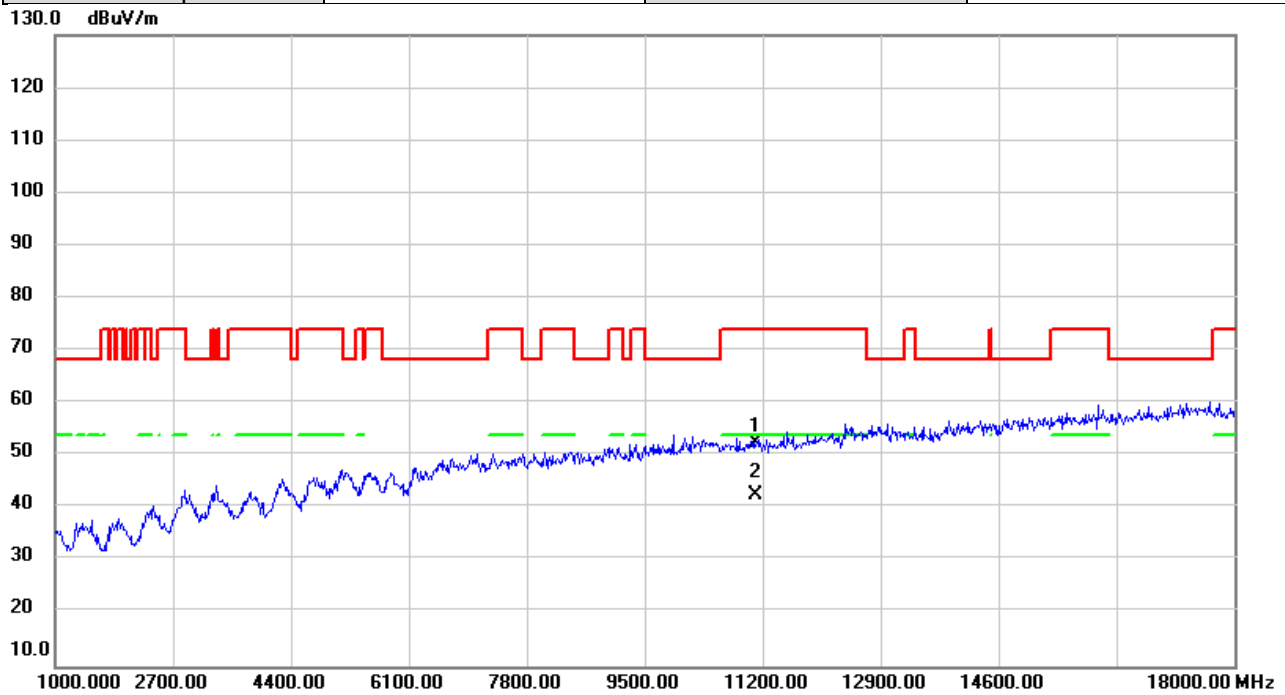


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	46.18	6.37	52.55	74.00	-21.45	peak	
2	*	11100.00	36.05	6.37	42.42	54.00	-11.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

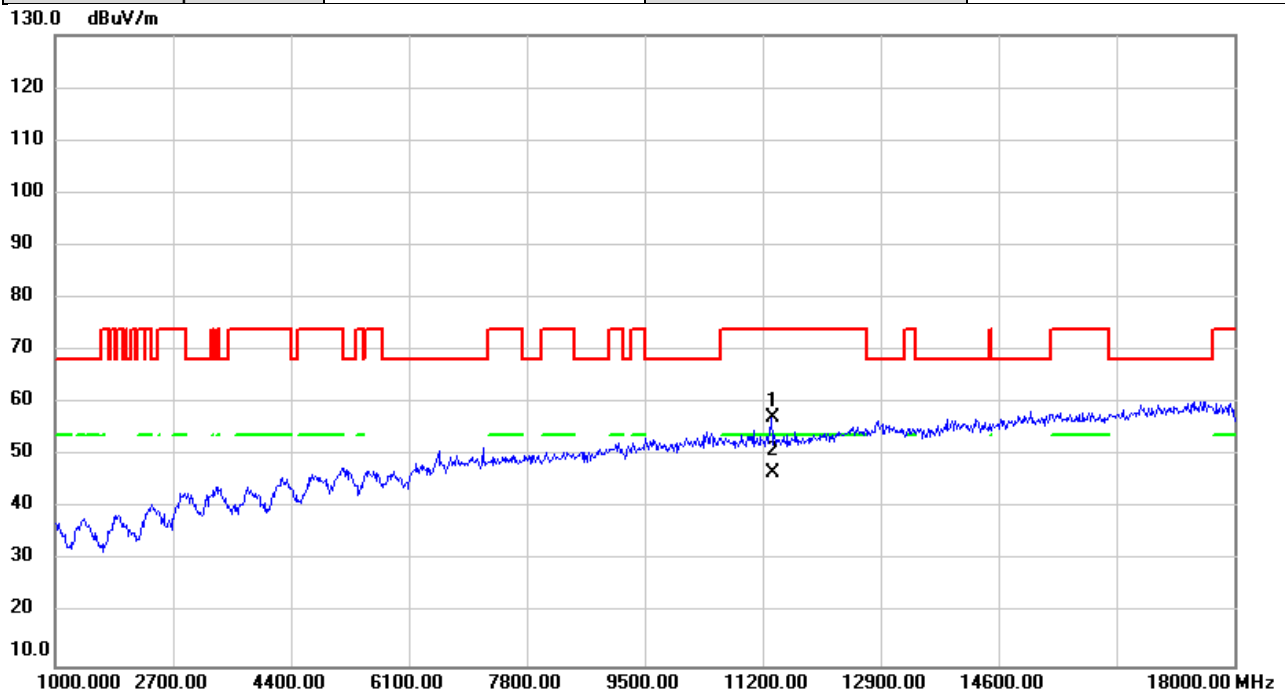


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	50.96	6.40	57.36	74.00	-16.64	peak	
2	*	11340.00	40.50	6.40	46.90	54.00	-7.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

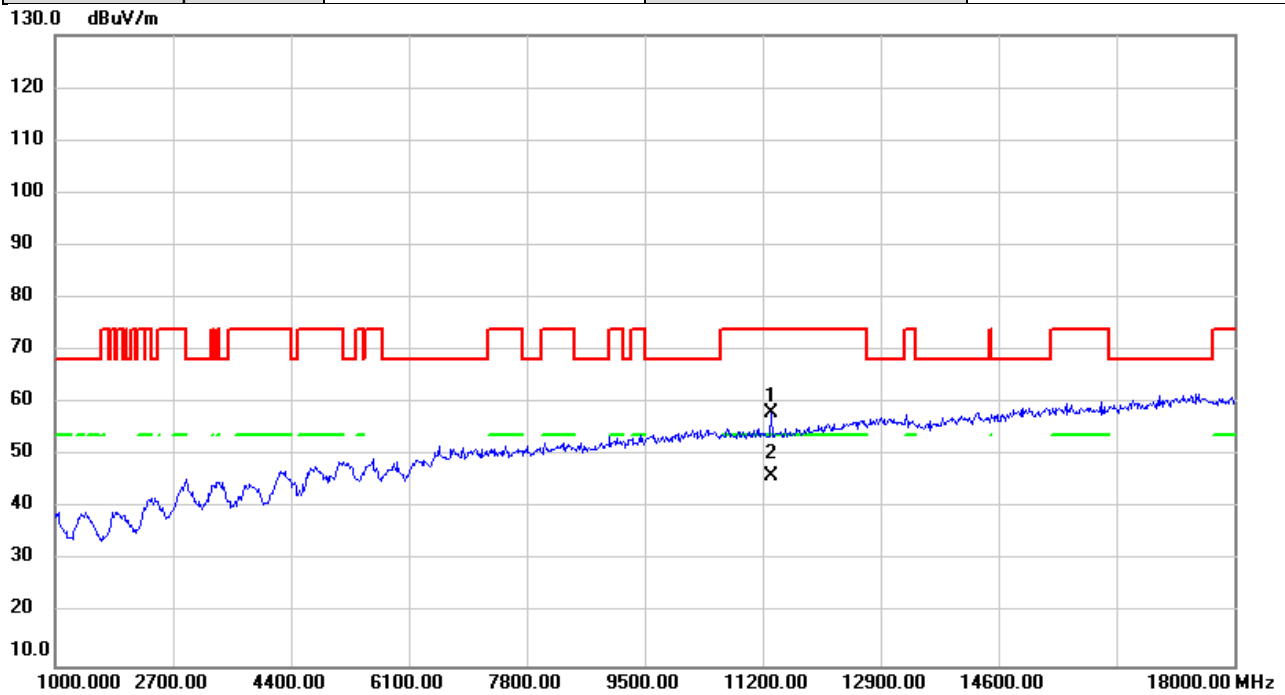


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11318.43	51.85	6.40	58.25	74.00	-15.75	peak	
2		11318.43	39.68	6.40	46.08	54.00	-7.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

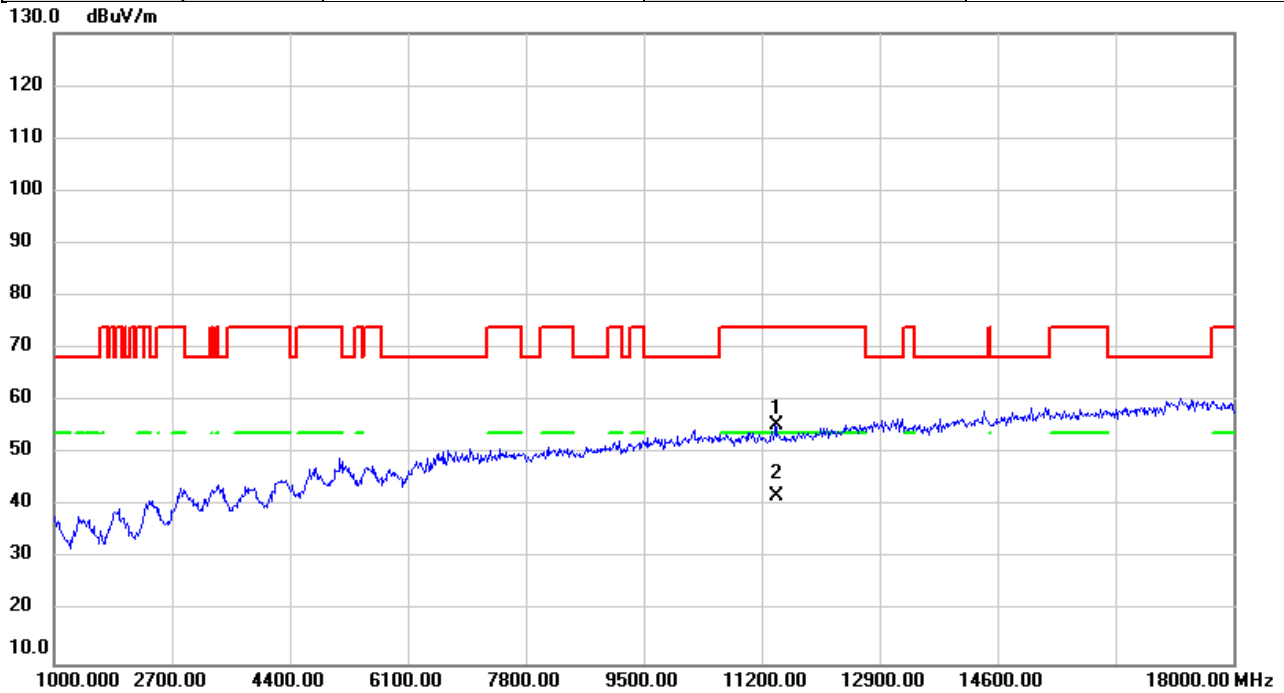


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	48.94	6.41	55.35	74.00	-18.65	peak	
2	*	11420.00	35.62	6.41	42.03	54.00	-11.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

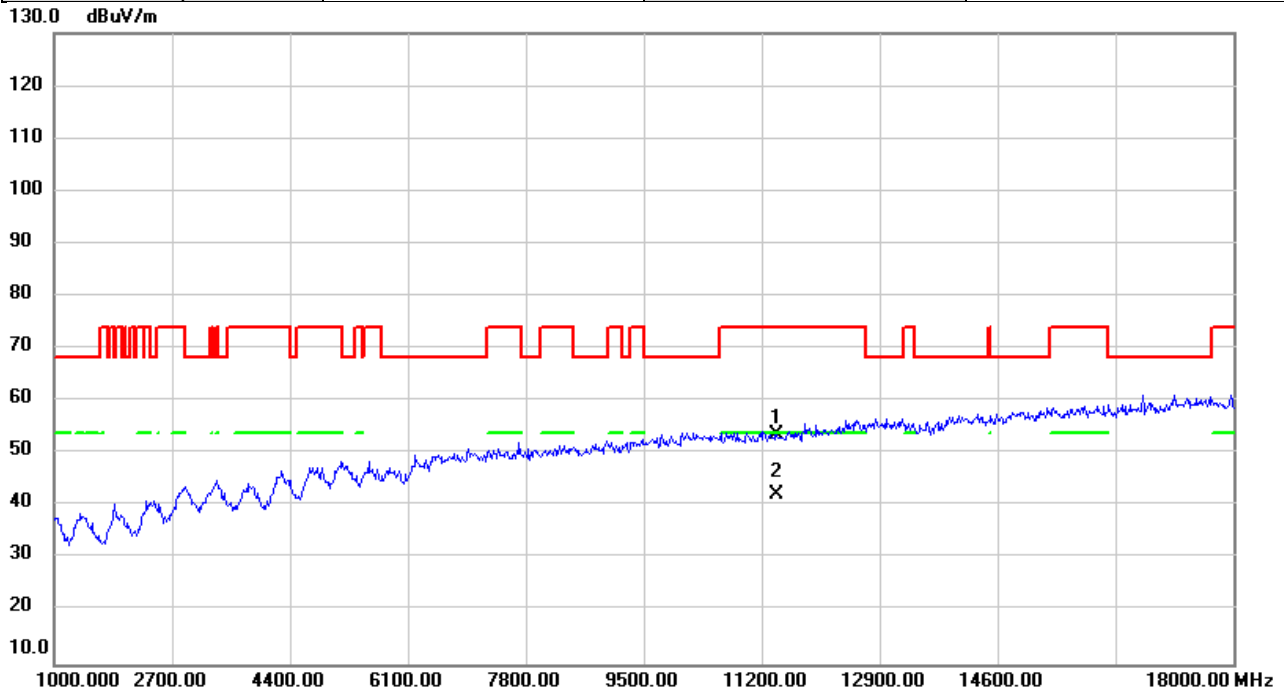


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	47.33	6.41	53.74	74.00	-20.26	peak	
2	*	11420.00	35.94	6.41	42.35	54.00	-11.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

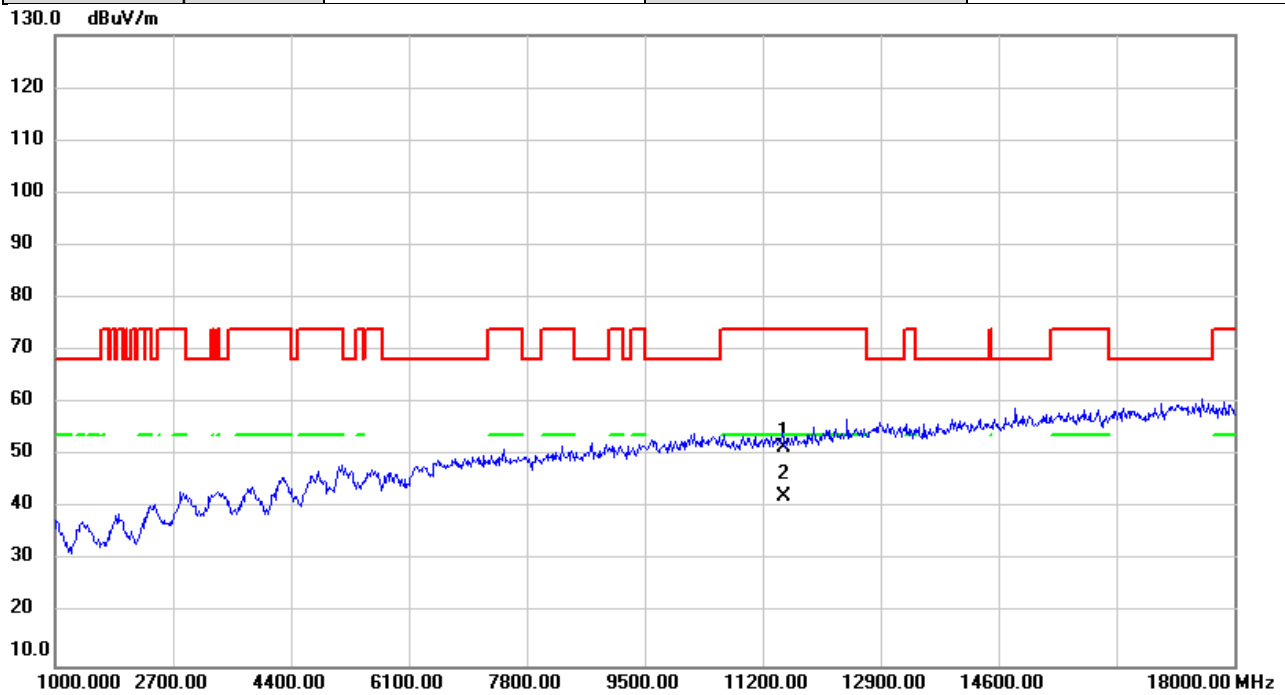


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	44.98	6.43	51.41	74.00	-22.59	peak	
2	*	11510.00	35.68	6.43	42.11	54.00	-11.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

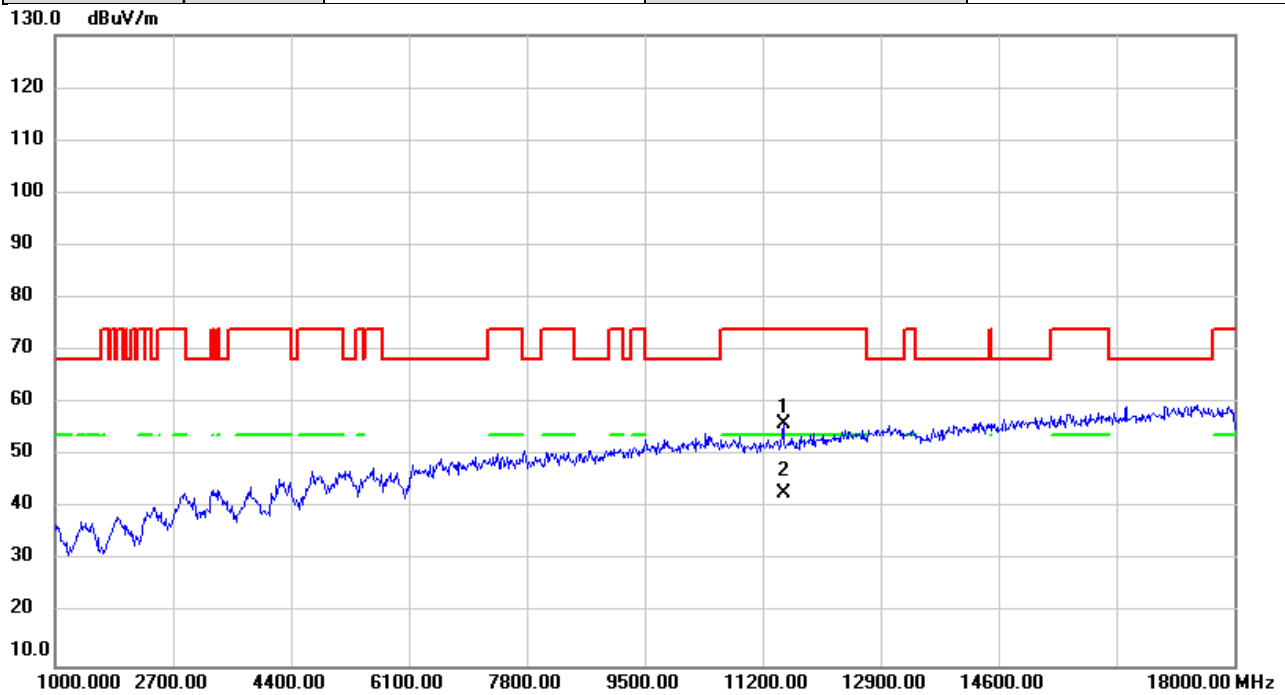


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	49.48	6.43	55.91	74.00	-18.09	peak	
2	*	11510.00	36.48	6.43	42.91	54.00	-11.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

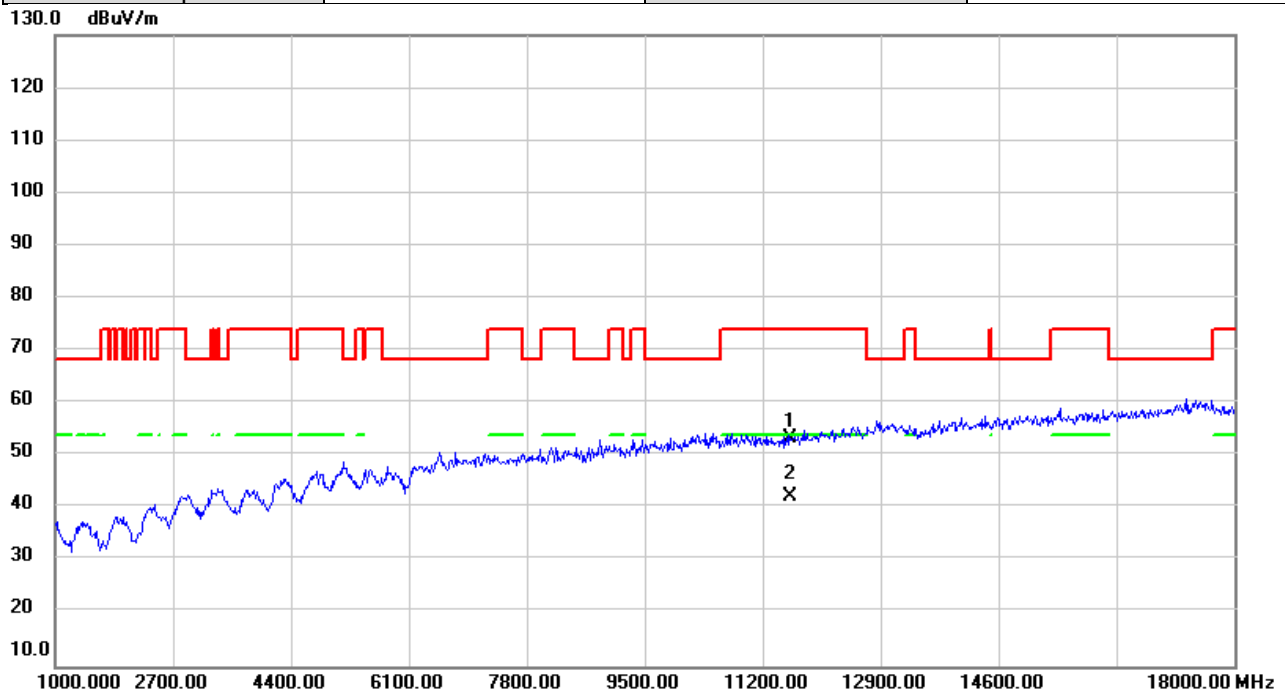


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	46.86	6.53	53.39	74.00	-20.61	peak	
2	*	11590.00	35.62	6.53	42.15	54.00	-11.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/4
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

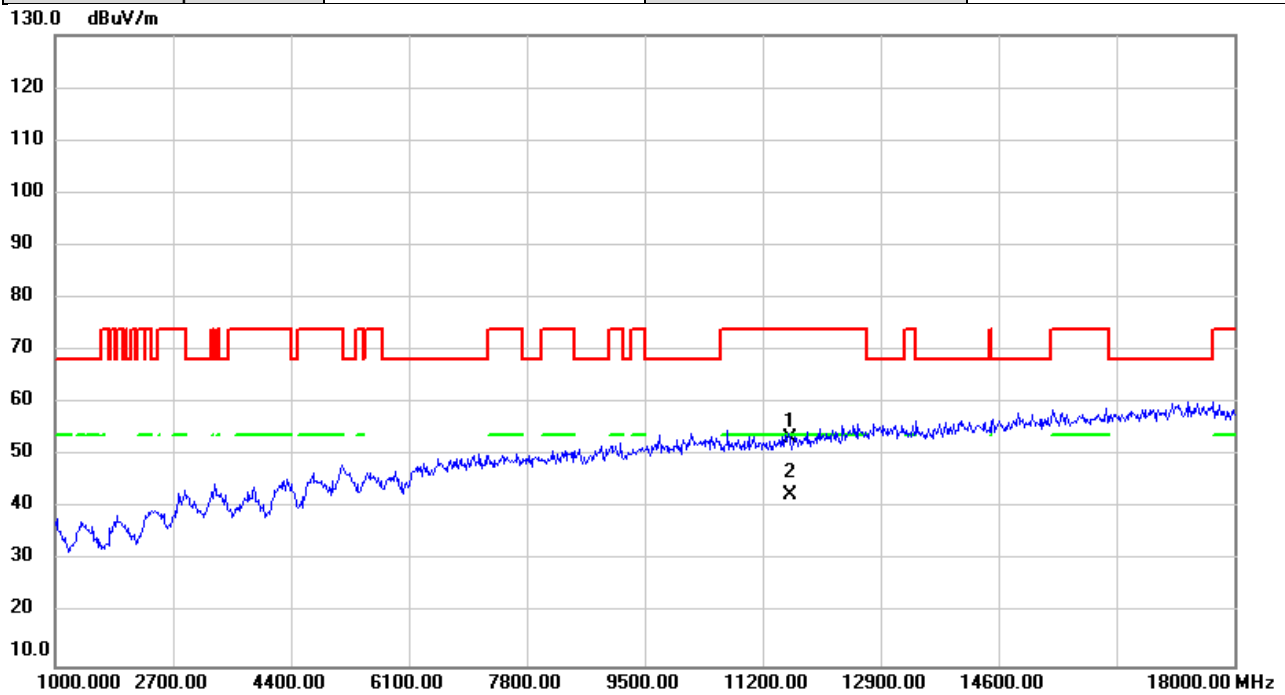


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	46.88	6.53	53.41	74.00	-20.59	peak	
2	*	11590.00	36.04	6.53	42.57	54.00	-11.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

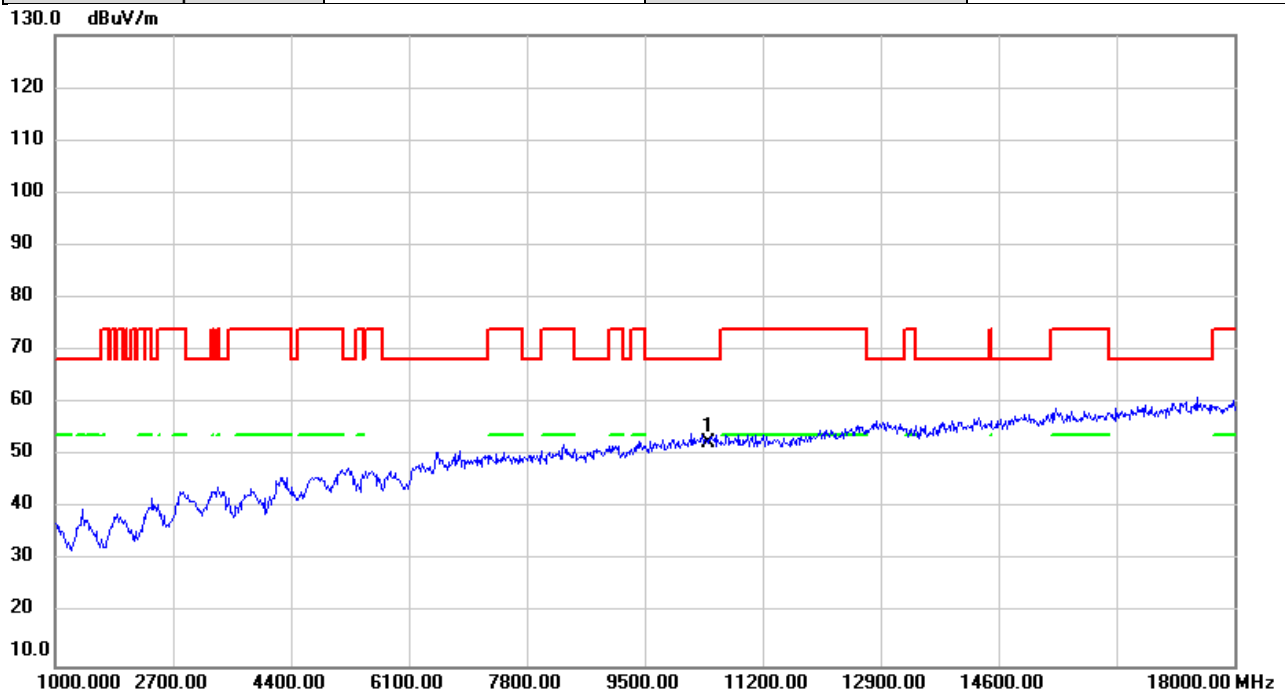


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	45.37	7.08	52.45	68.20	-15.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

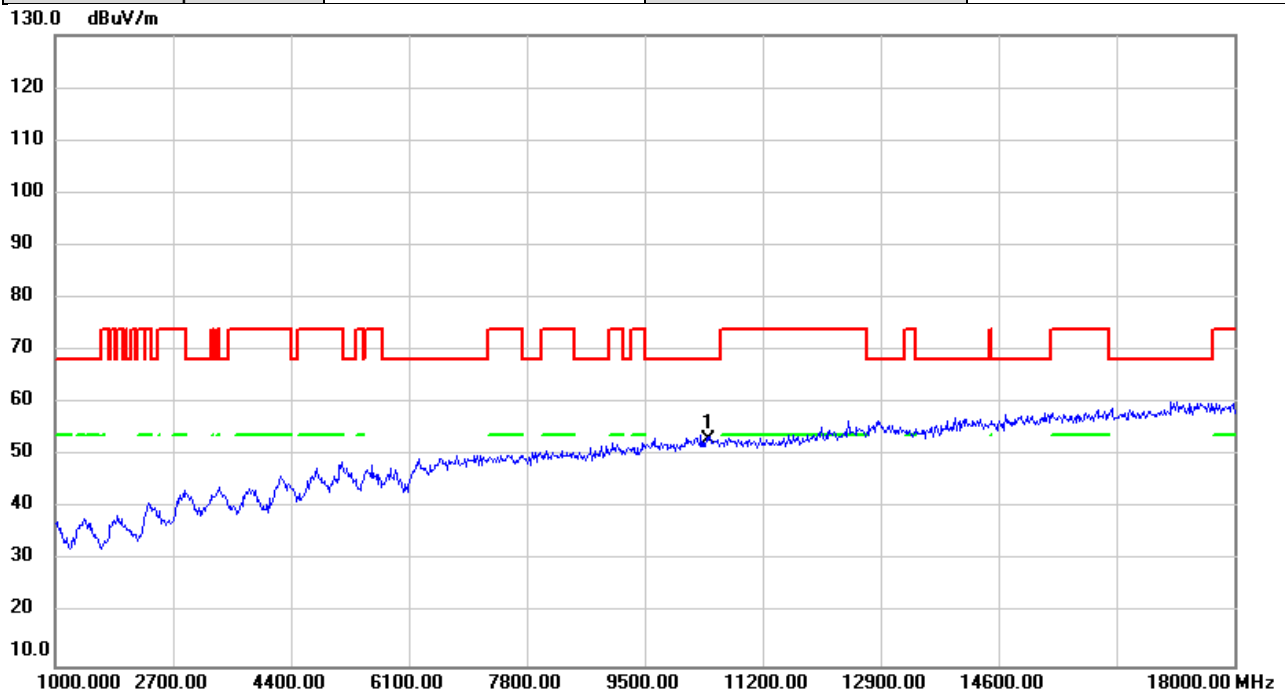


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	45.89	7.08	52.97	68.20	-15.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

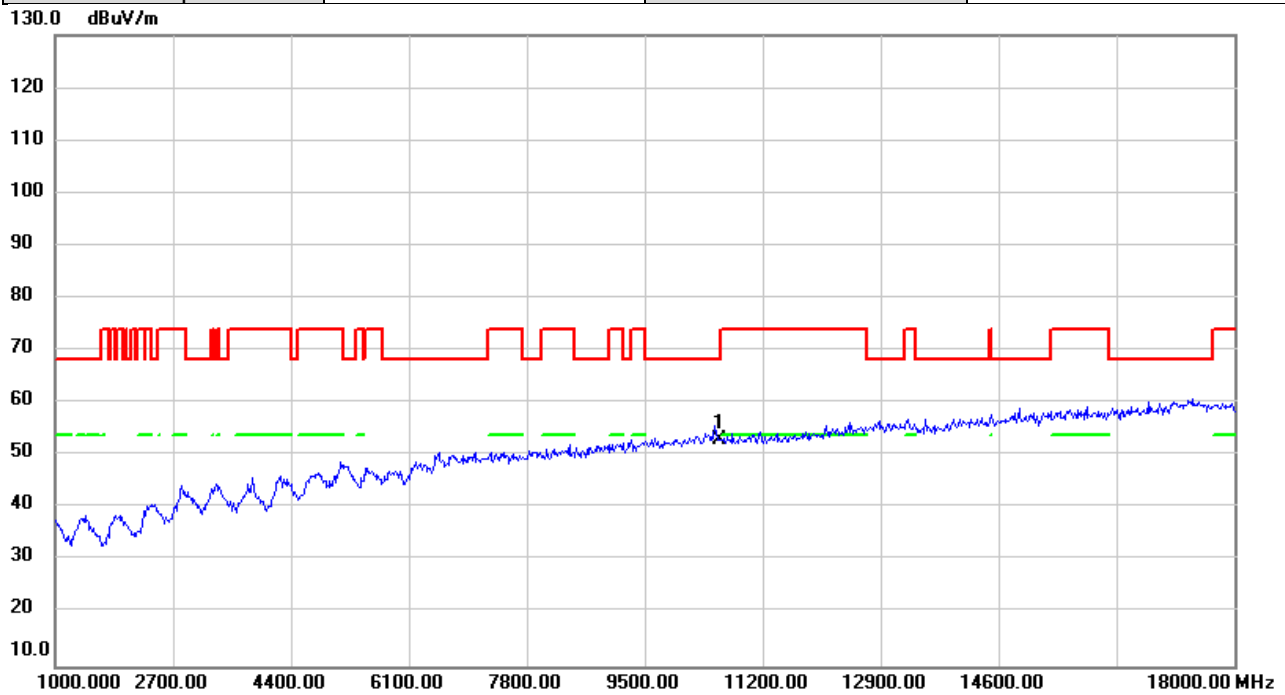


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	46.03	6.99	53.02	68.20	-15.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

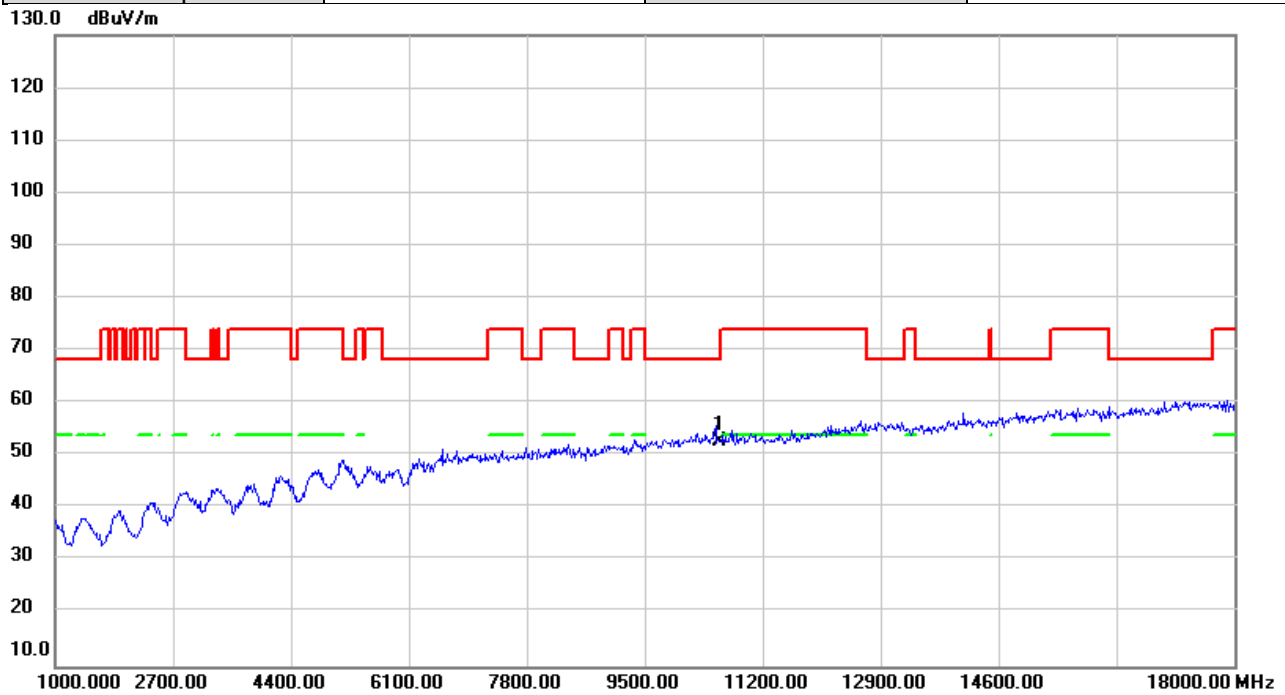


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	45.75	6.99	52.74	68.20	-15.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

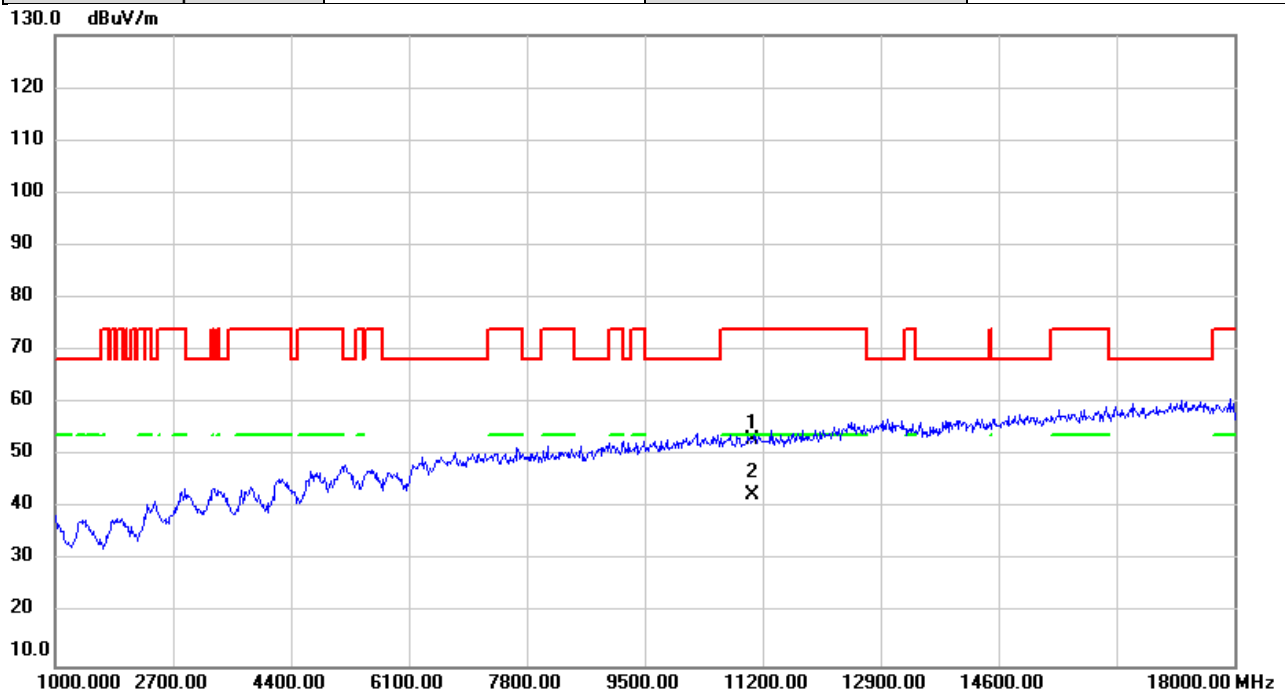


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	46.55	6.37	52.92	74.00	-21.08	peak	
2	*	11060.00	36.21	6.37	42.58	54.00	-11.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

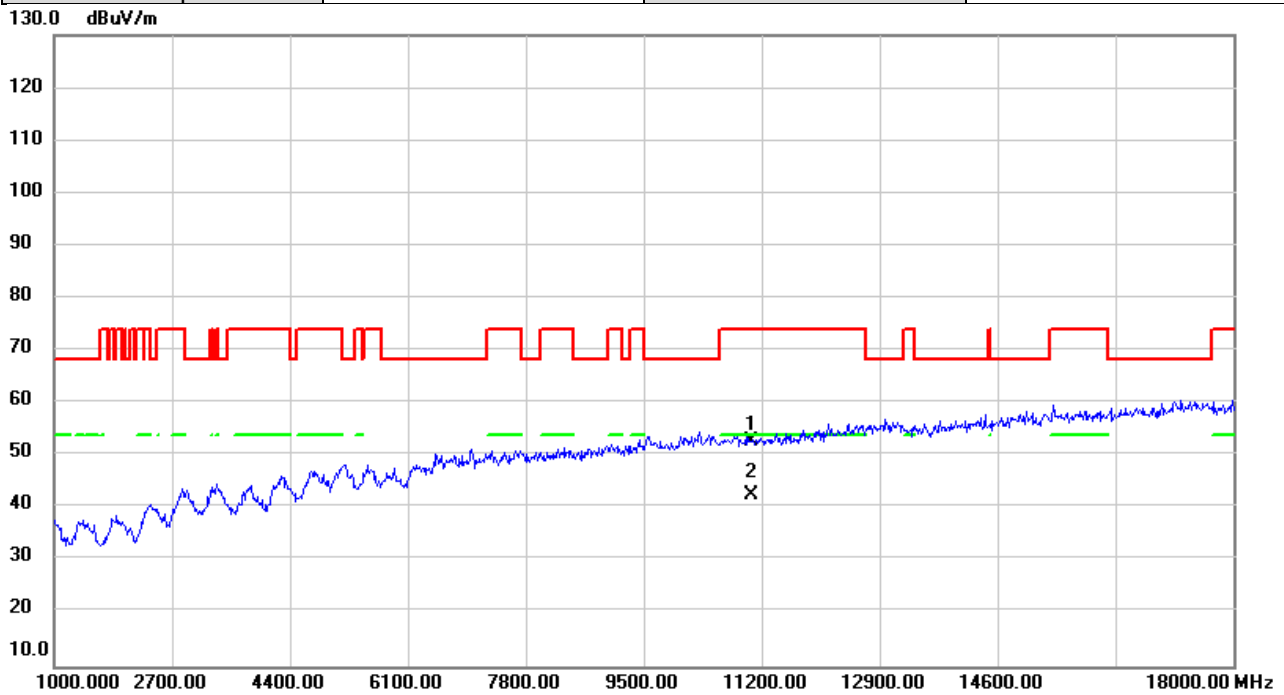


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	46.45	6.37	52.82	74.00	-21.18	peak	
2	*	11060.00	36.11	6.37	42.48	54.00	-11.52	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

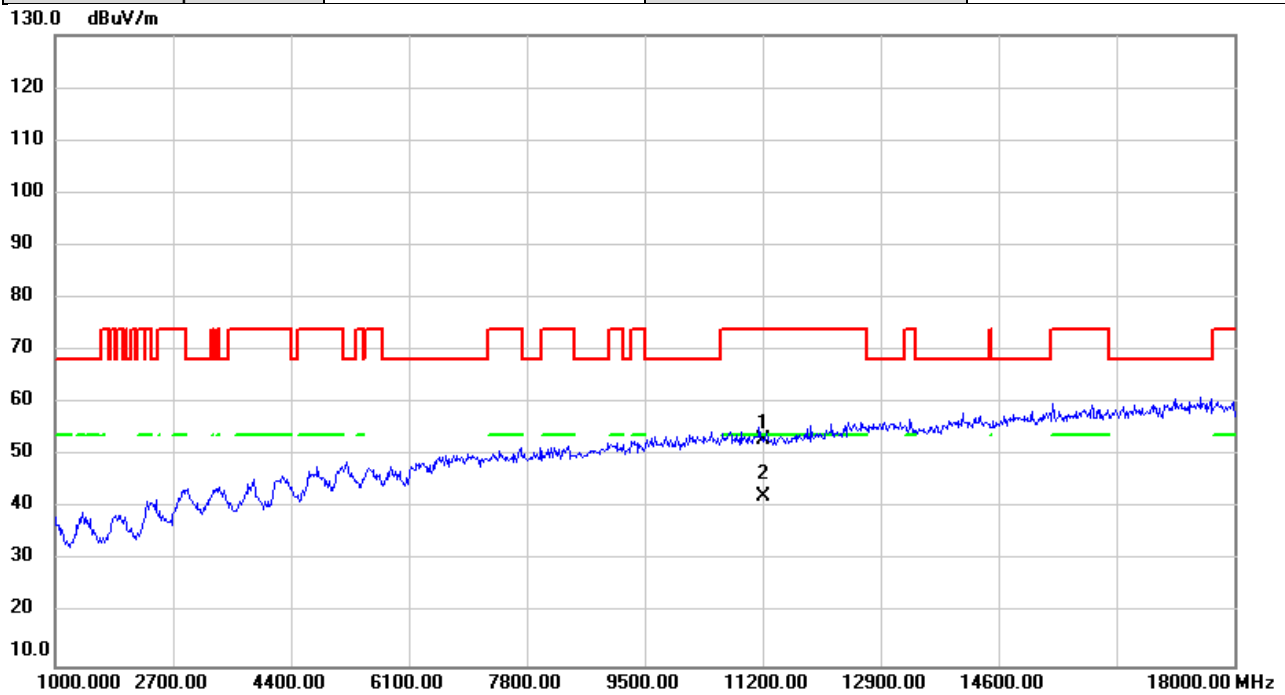


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	46.58	6.39	52.97	74.00	-21.03	peak	
2	*	11220.00	35.88	6.39	42.27	54.00	-11.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

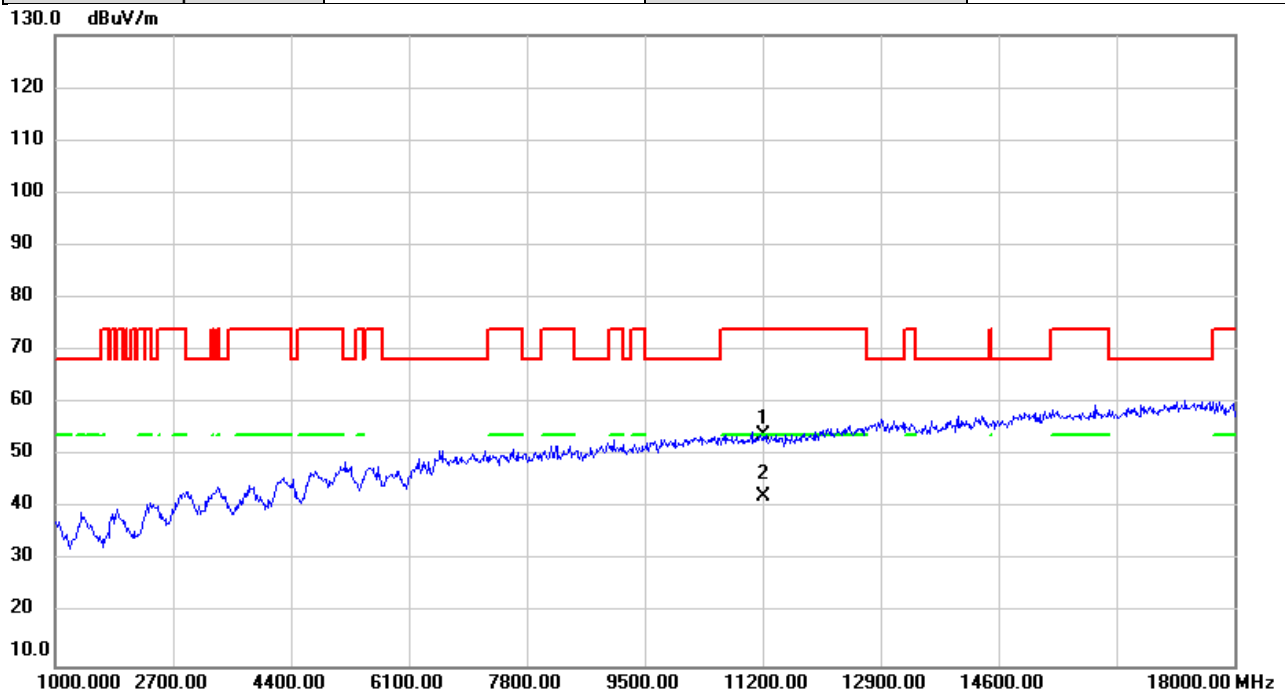


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	47.59	6.39	53.98	74.00	-20.02	peak	
2	*	11220.00	35.73	6.39	42.12	54.00	-11.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

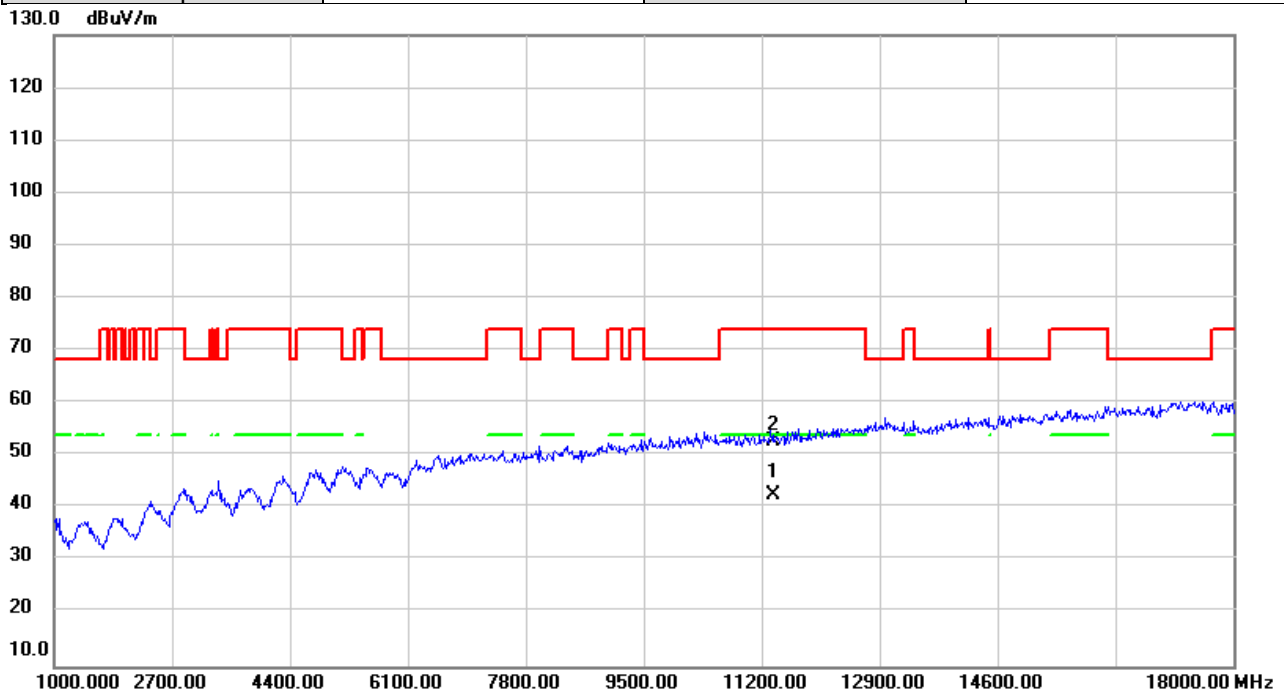


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11380.00	36.02	6.41	42.43	54.00	-11.57	AVG	
2		11380.00	46.25	6.41	52.66	74.00	-21.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

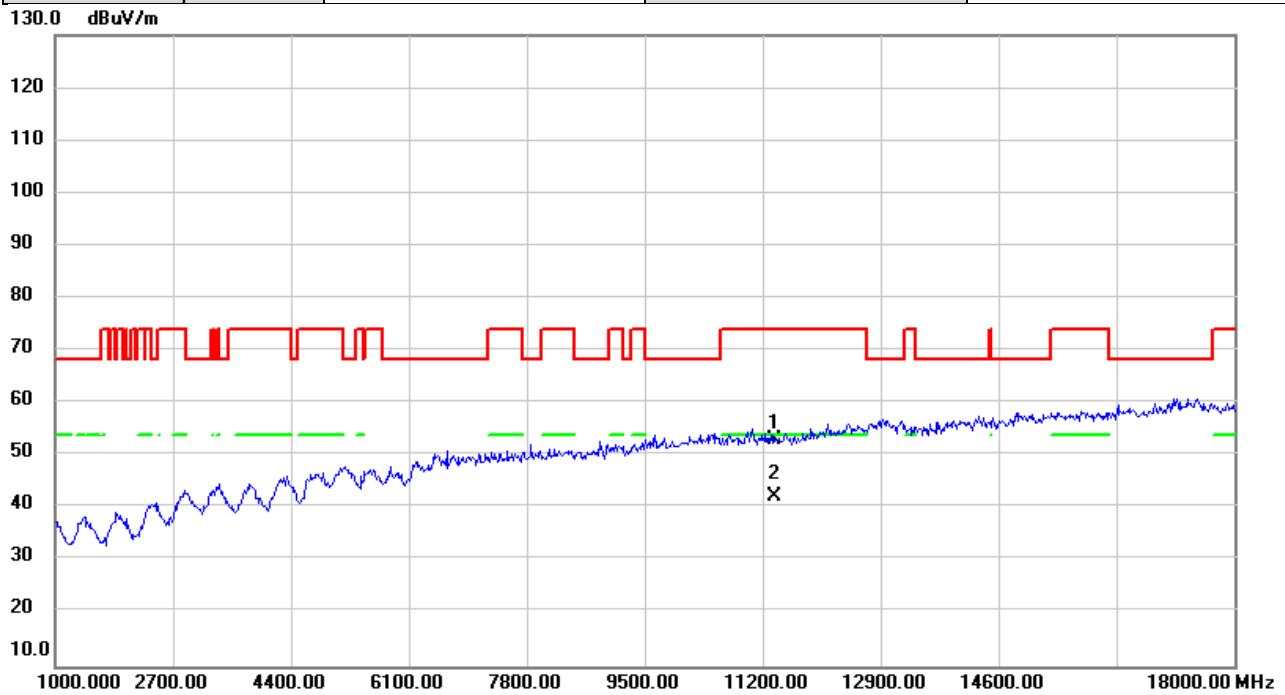


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	46.67	6.41	53.08	74.00	-20.92	peak	
2	*	11380.00	35.96	6.41	42.37	54.00	-11.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

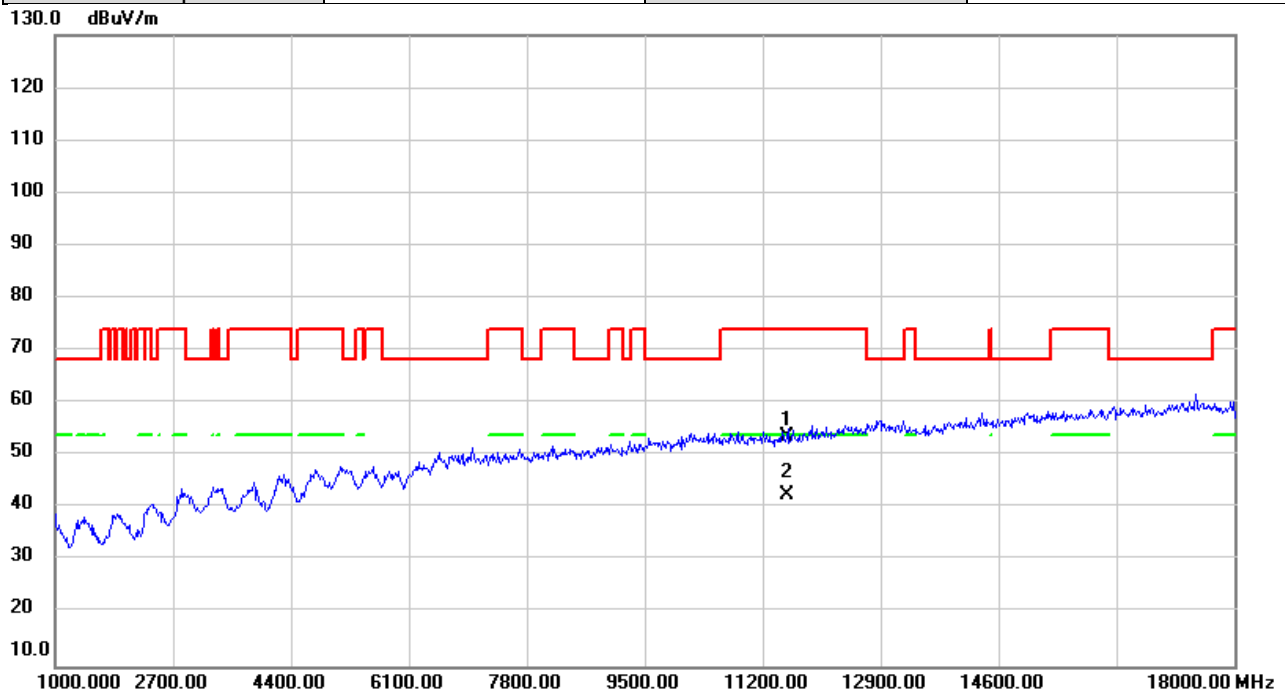


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	47.24	6.47	53.71	74.00	-20.29	peak	
2	*	11550.00	35.98	6.47	42.45	54.00	-11.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/4
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

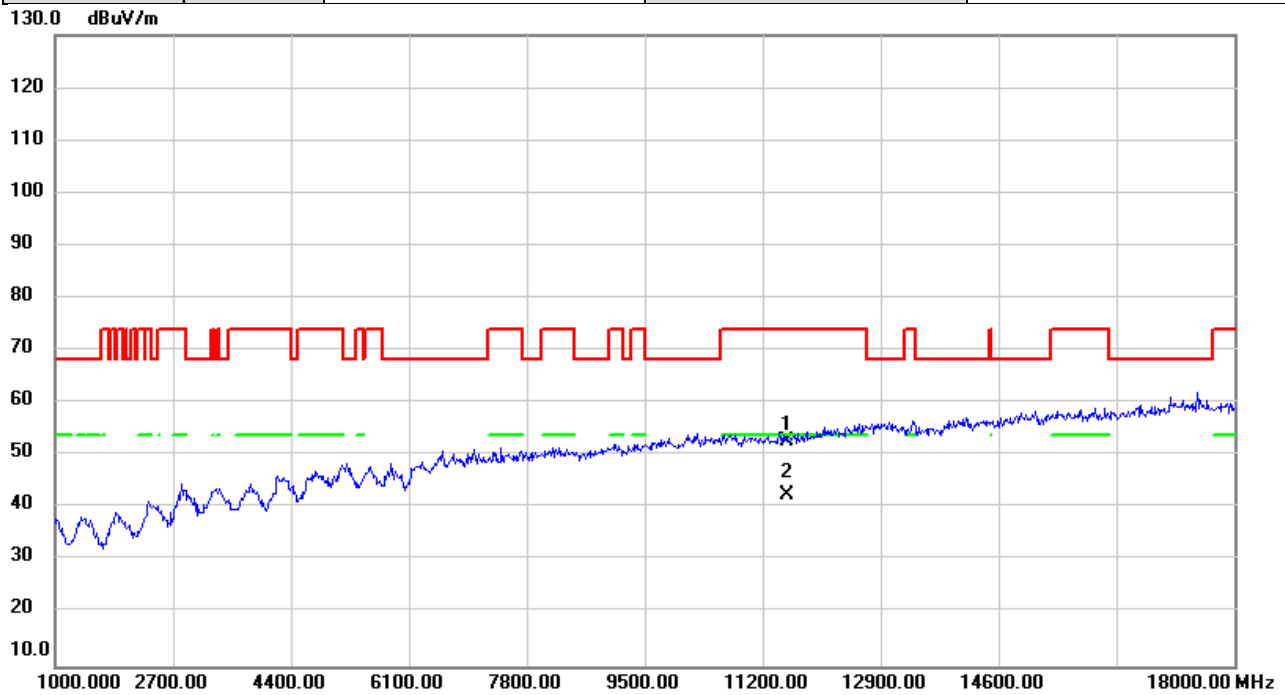


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	46.41	6.47	52.88	74.00	-21.12	peak	
2	*	11550.00	36.03	6.47	42.50	54.00	-11.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

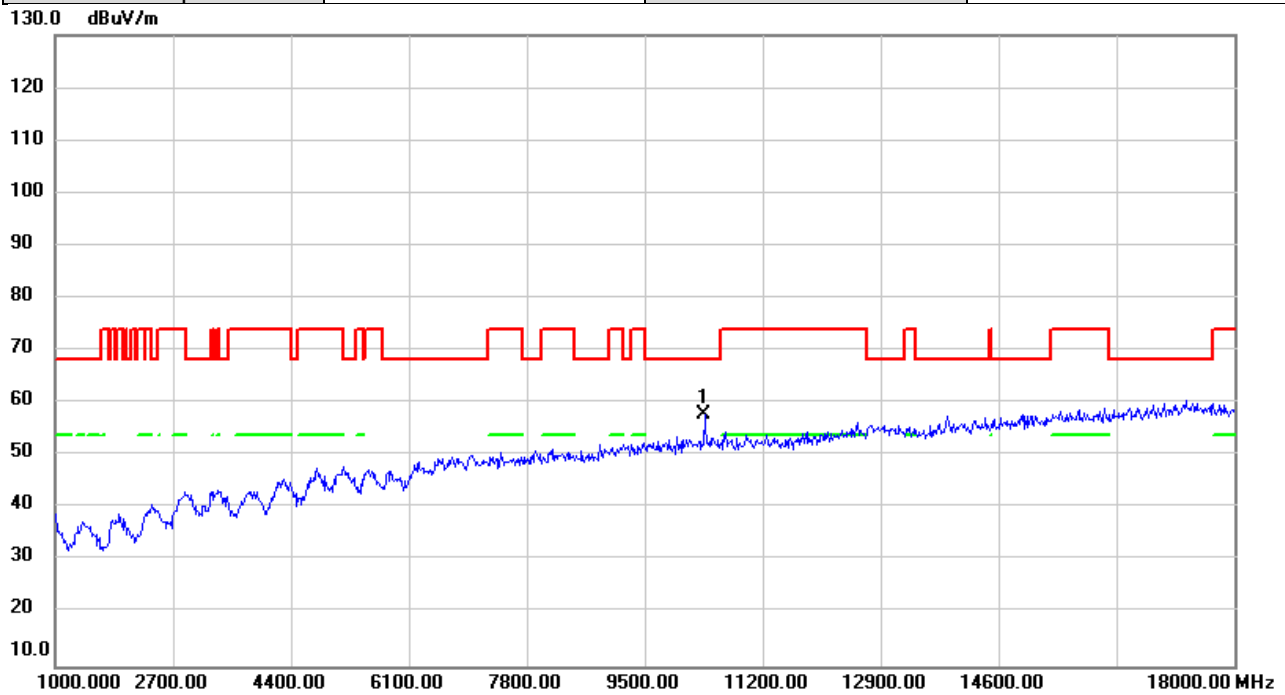


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	50.90	7.07	57.97	68.20	-10.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

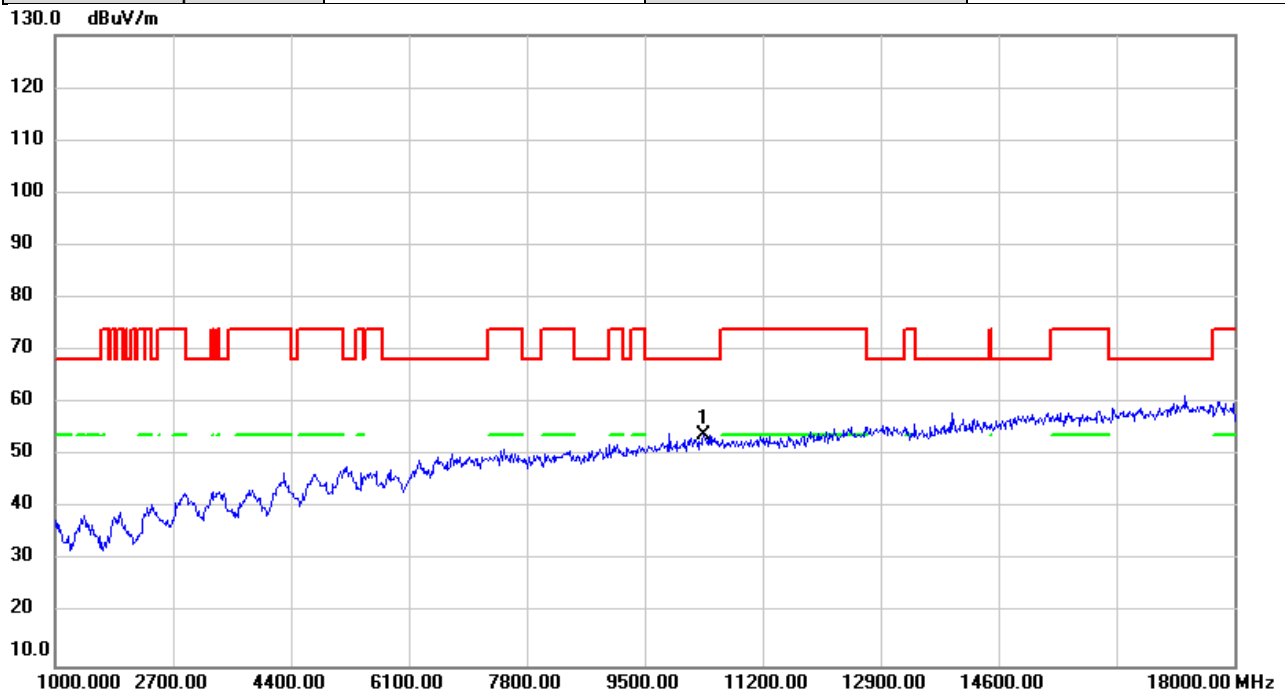


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.20	46.86	7.07	53.93	68.20	-14.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

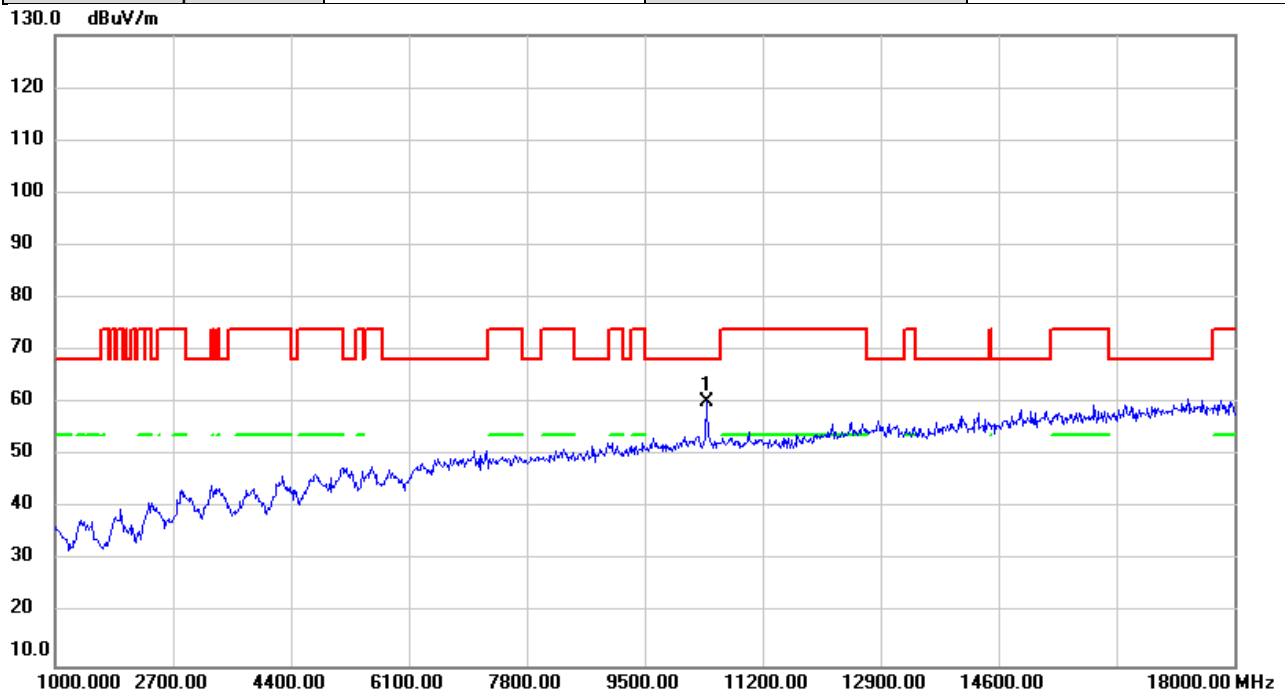


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	53.11	7.08	60.19	68.20	-8.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

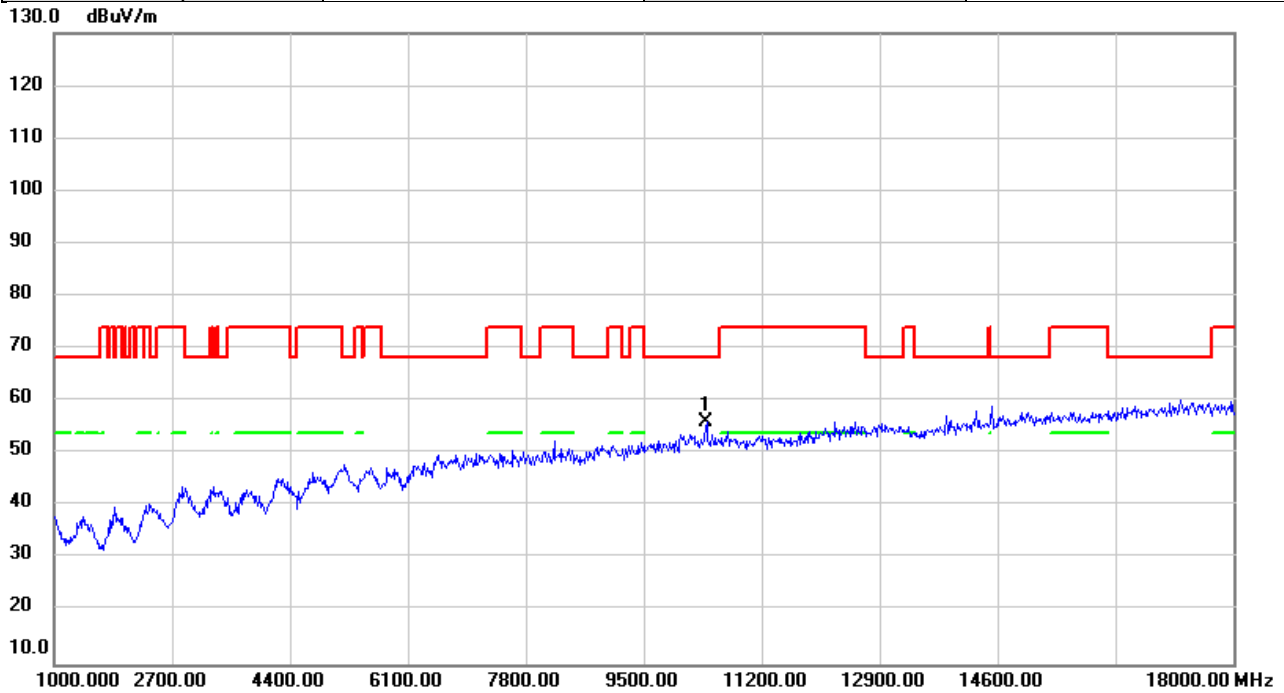


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	48.99	7.08	56.07	68.20	-12.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

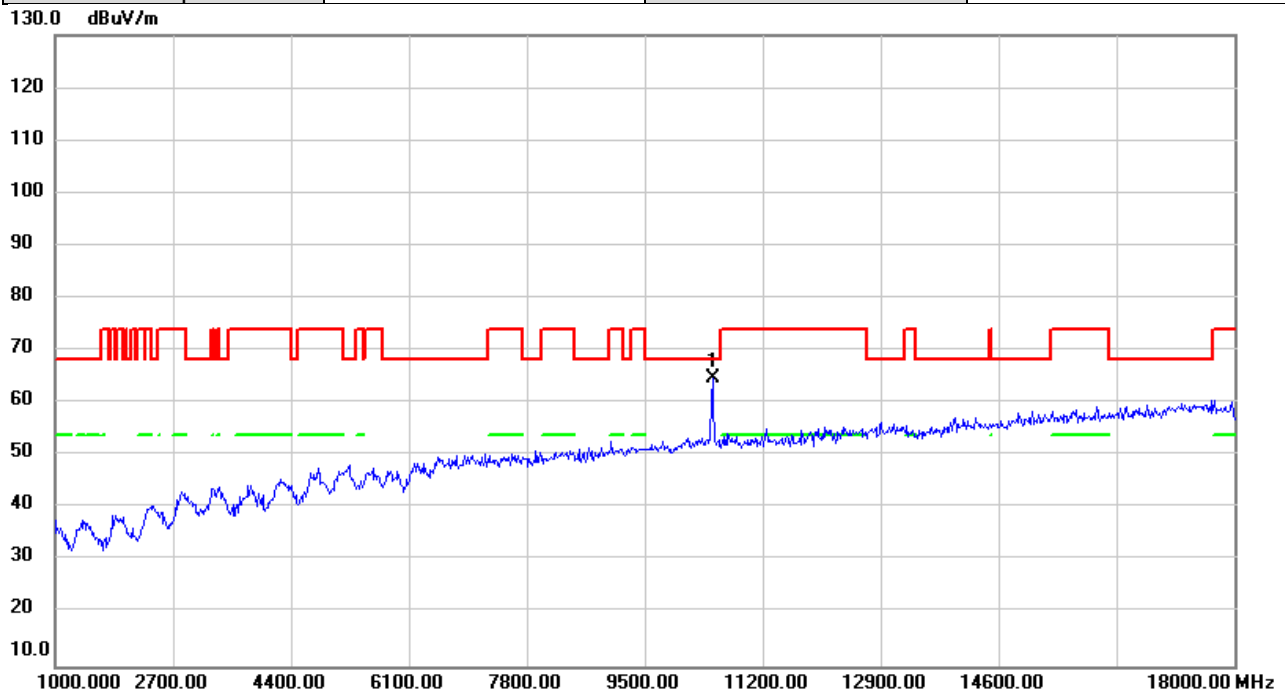


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	57.73	7.10	64.83	68.20	-3.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

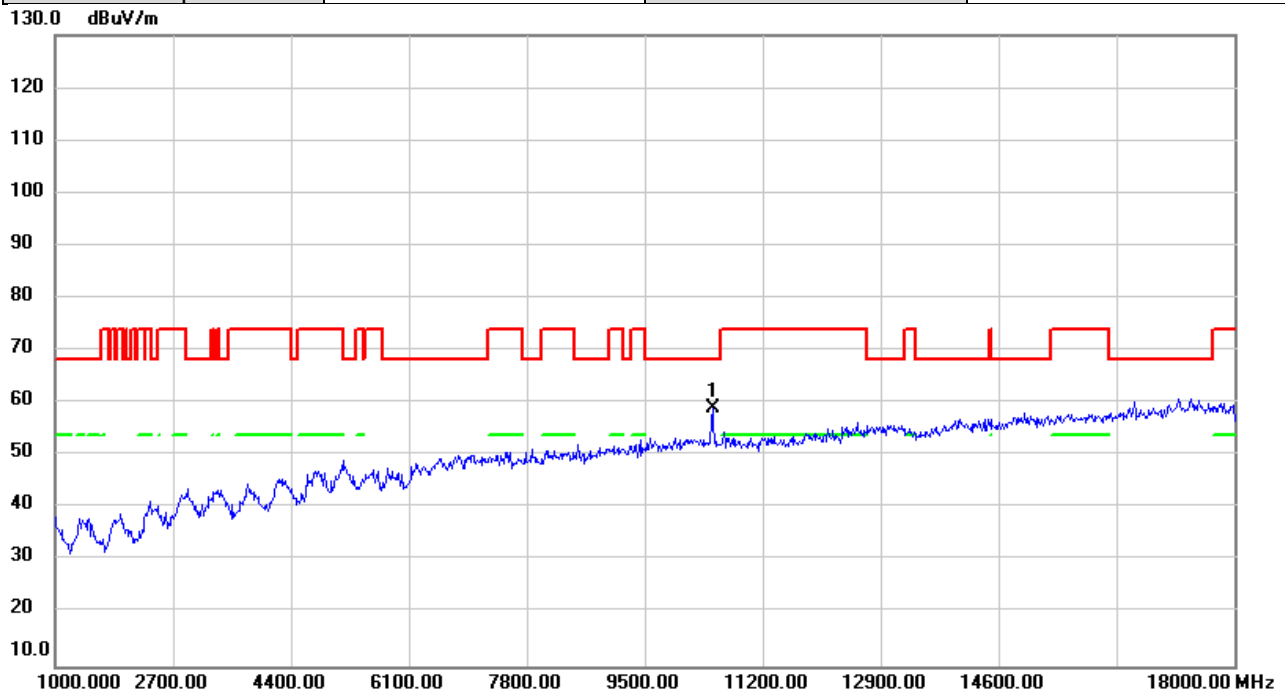


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	52.06	7.10	59.16	68.20	-9.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

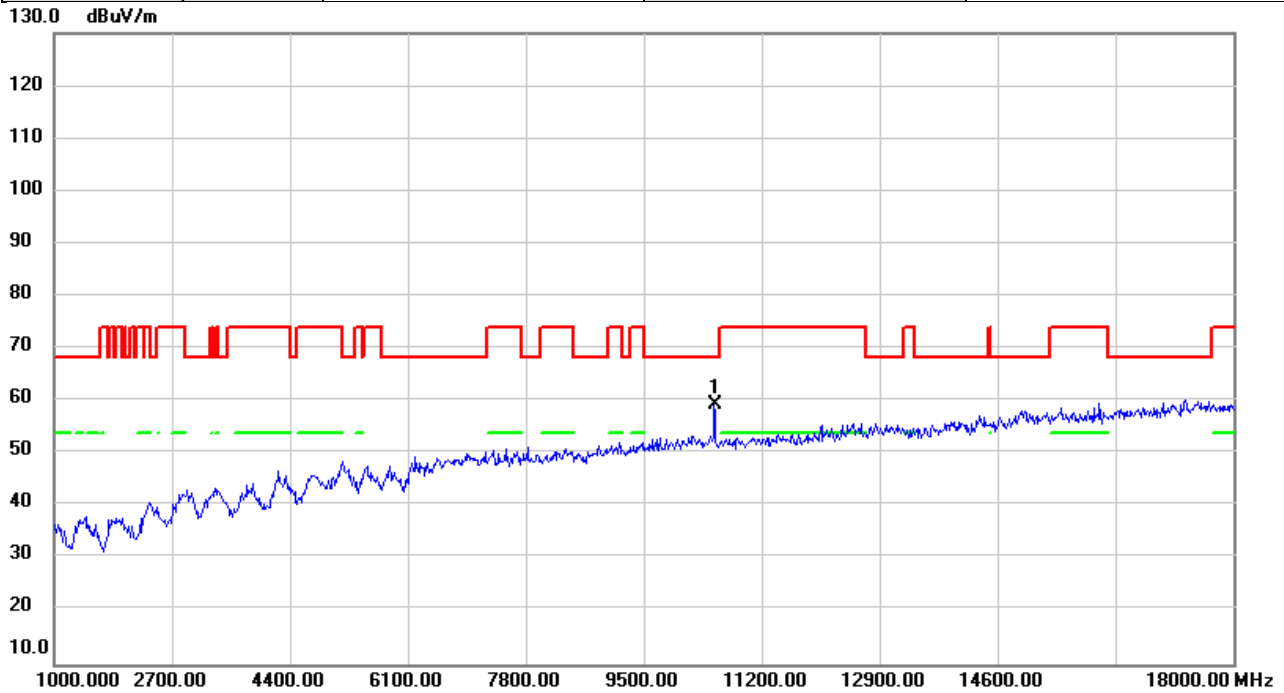


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	52.36	7.07	59.43	68.20	-8.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

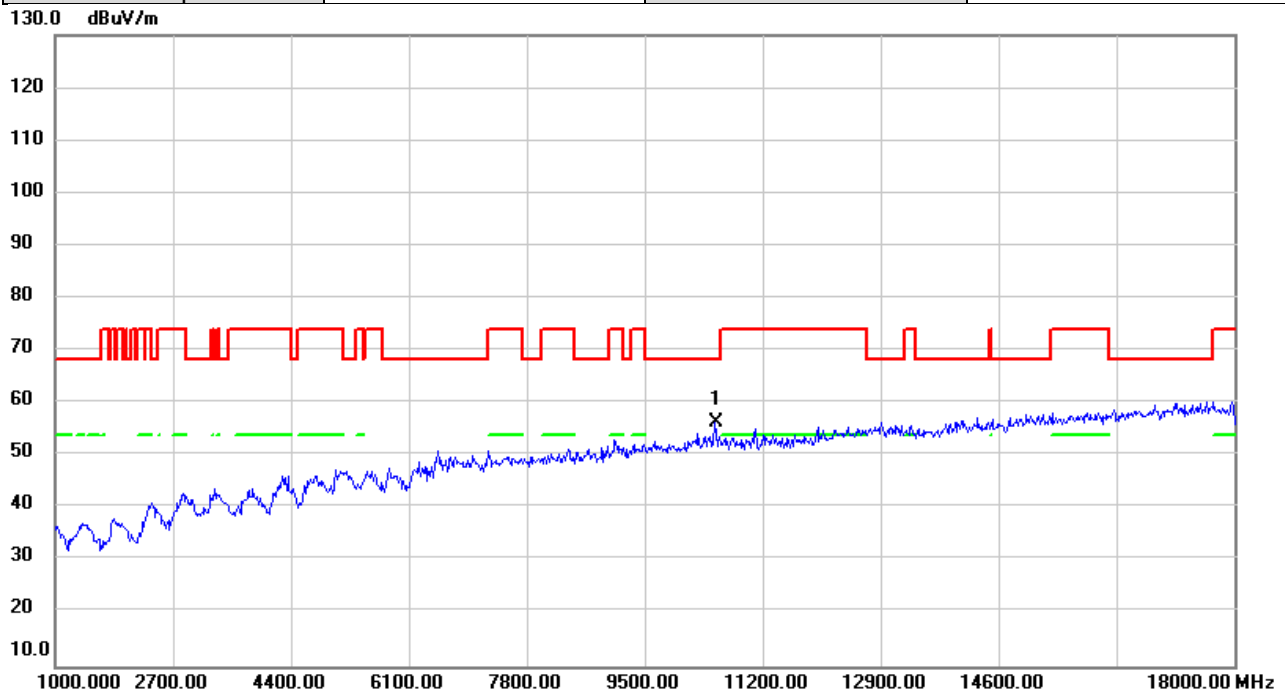


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	49.39	7.07	56.46	68.20	-11.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

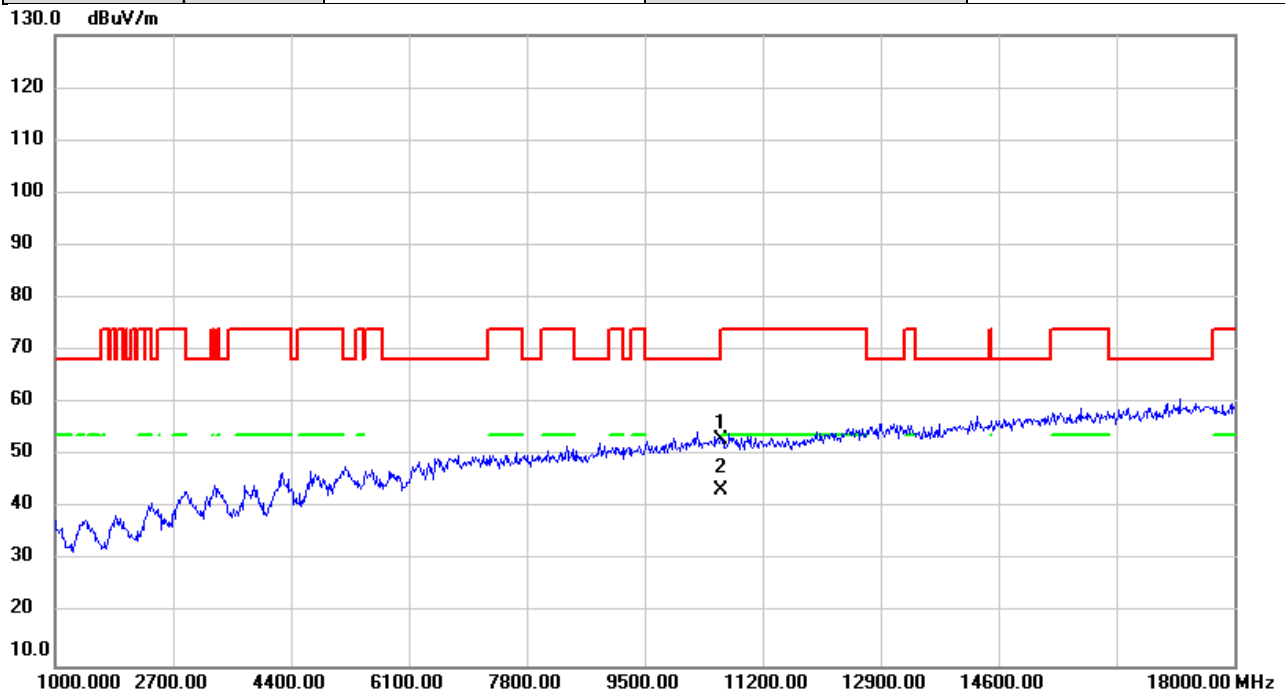


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	46.02	6.95	52.97	68.20	-15.23	peak	
2	*	10600.00	36.61	6.95	43.56	54.00	-10.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5300MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

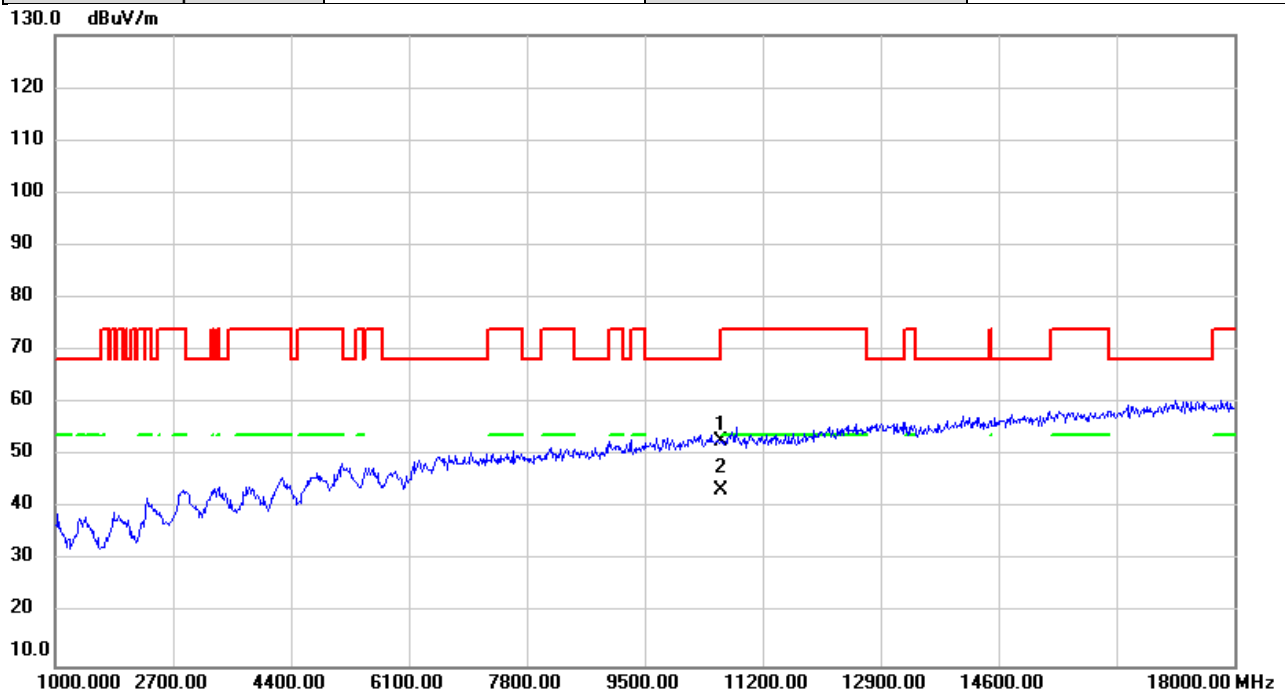


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	45.87	6.95	52.82	68.20	-15.38	peak	
2	*	10600.00	36.38	6.95	43.33	54.00	-10.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

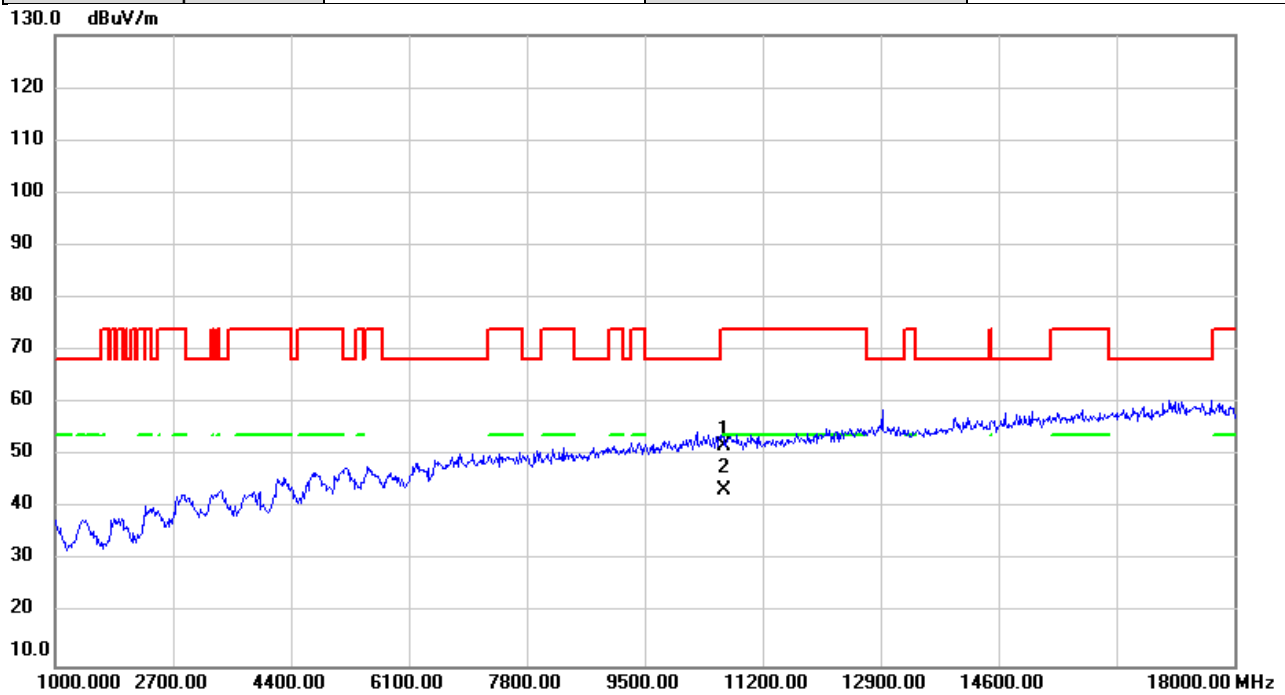


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	45.01	6.89	51.90	74.00	-22.10	peak	
2	*	10640.00	36.50	6.89	43.39	54.00	-10.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

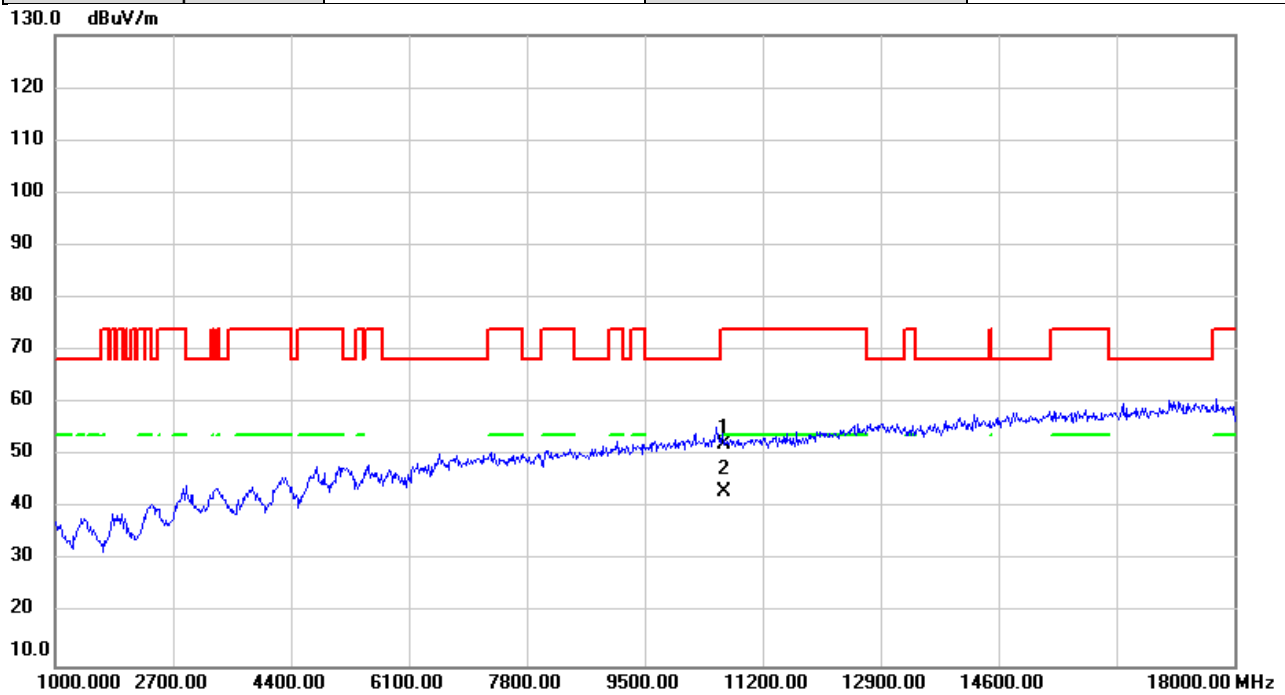


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	45.24	6.89	52.13	74.00	-21.87	peak	
2	*	10640.00	36.26	6.89	43.15	54.00	-10.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

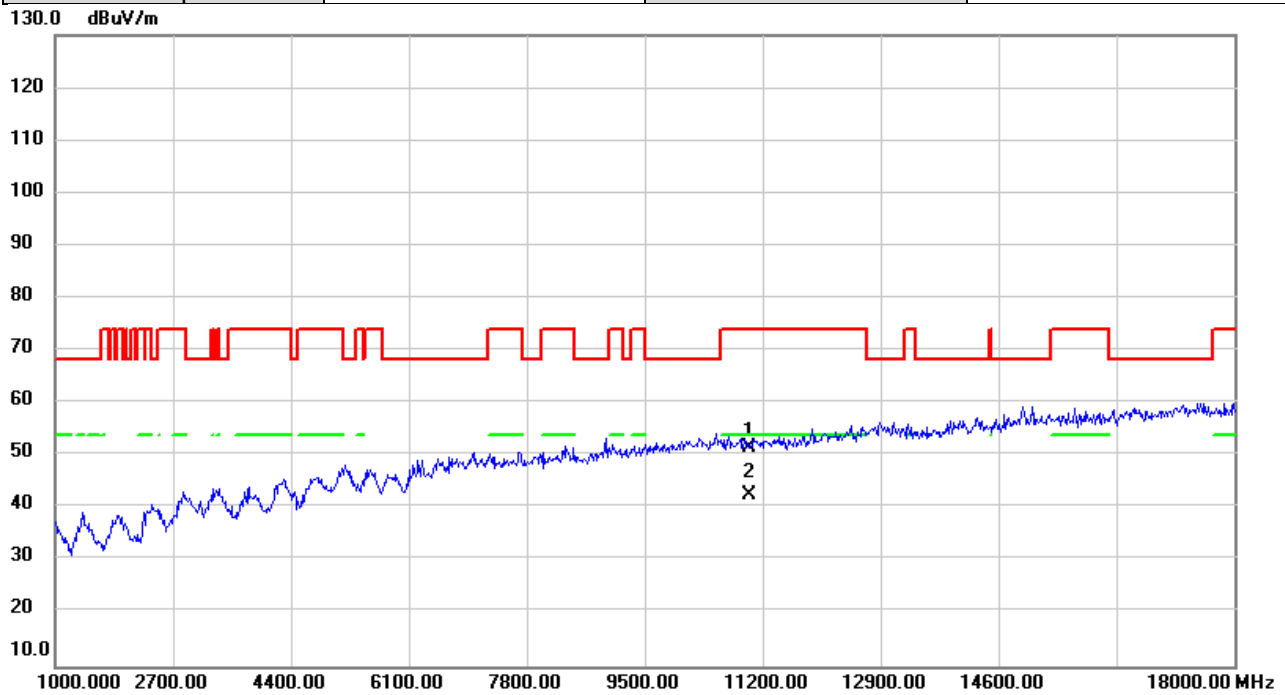


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	45.20	6.36	51.56	74.00	-22.44	peak	
2	*	11000.00	36.05	6.36	42.41	54.00	-11.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

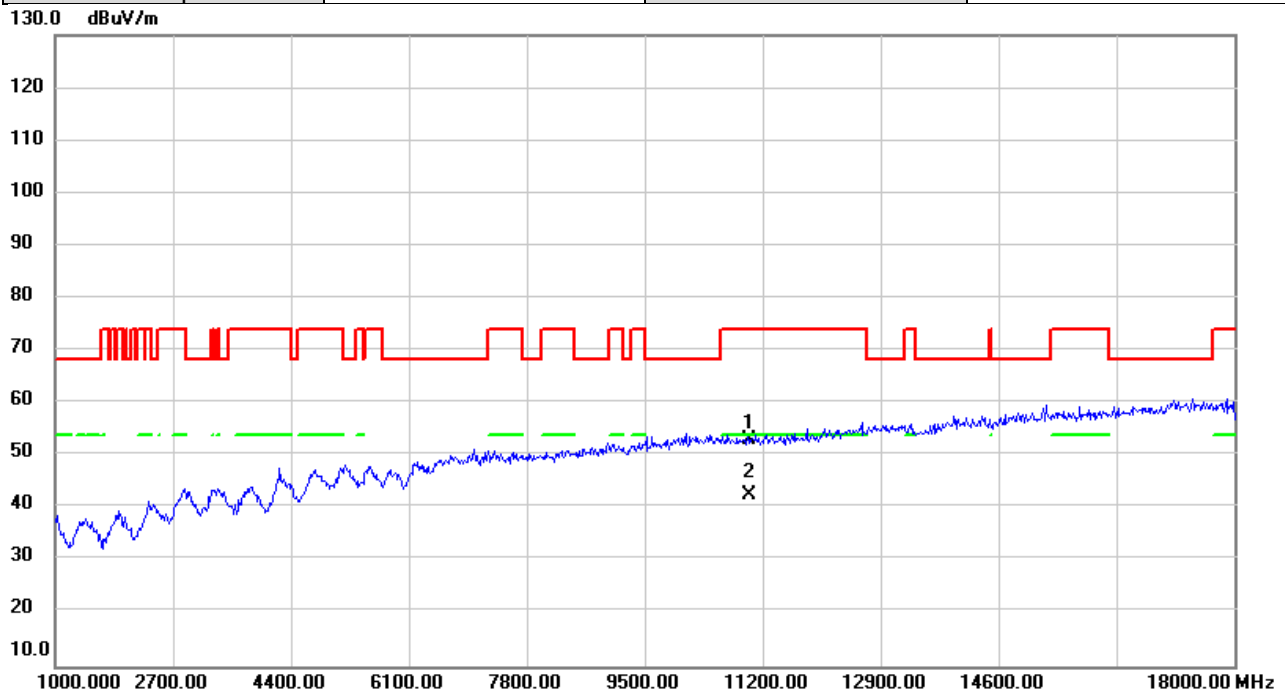


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	46.69	6.36	53.05	74.00	-20.95	peak	
2	*	11000.00	36.19	6.36	42.55	54.00	-11.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

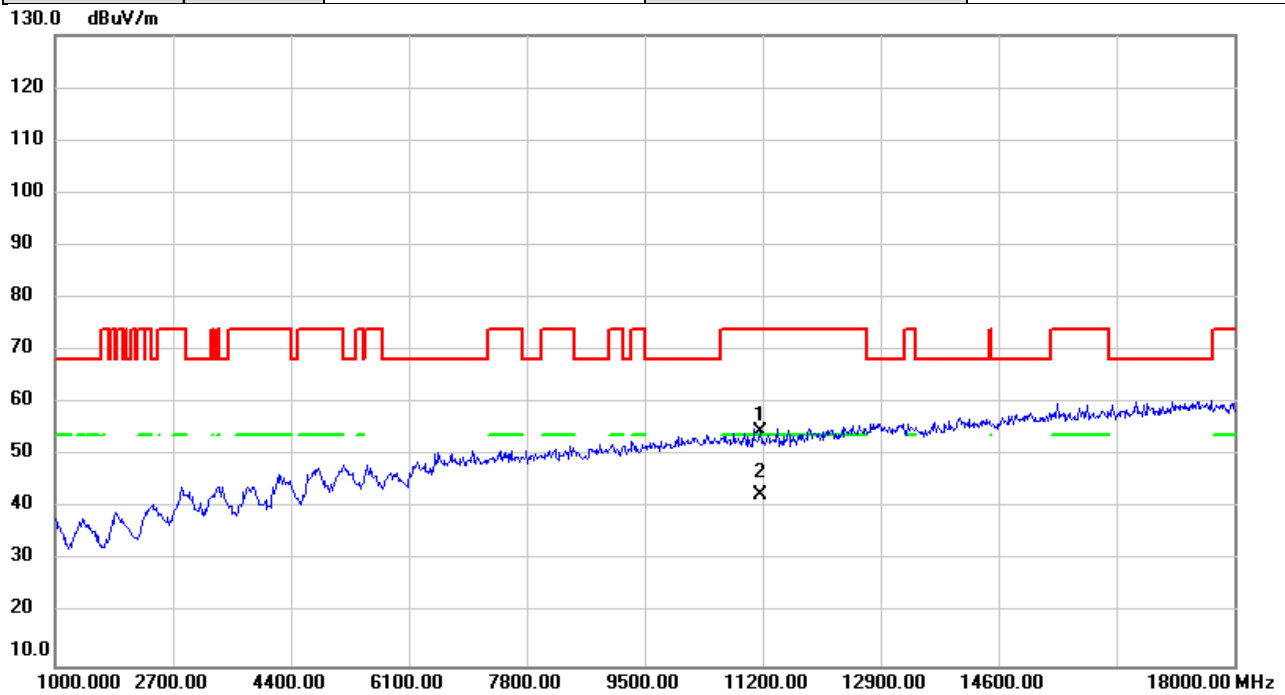


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	48.14	6.38	54.52	74.00	-19.48	peak	
2	*	11160.00	36.05	6.38	42.43	54.00	-11.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

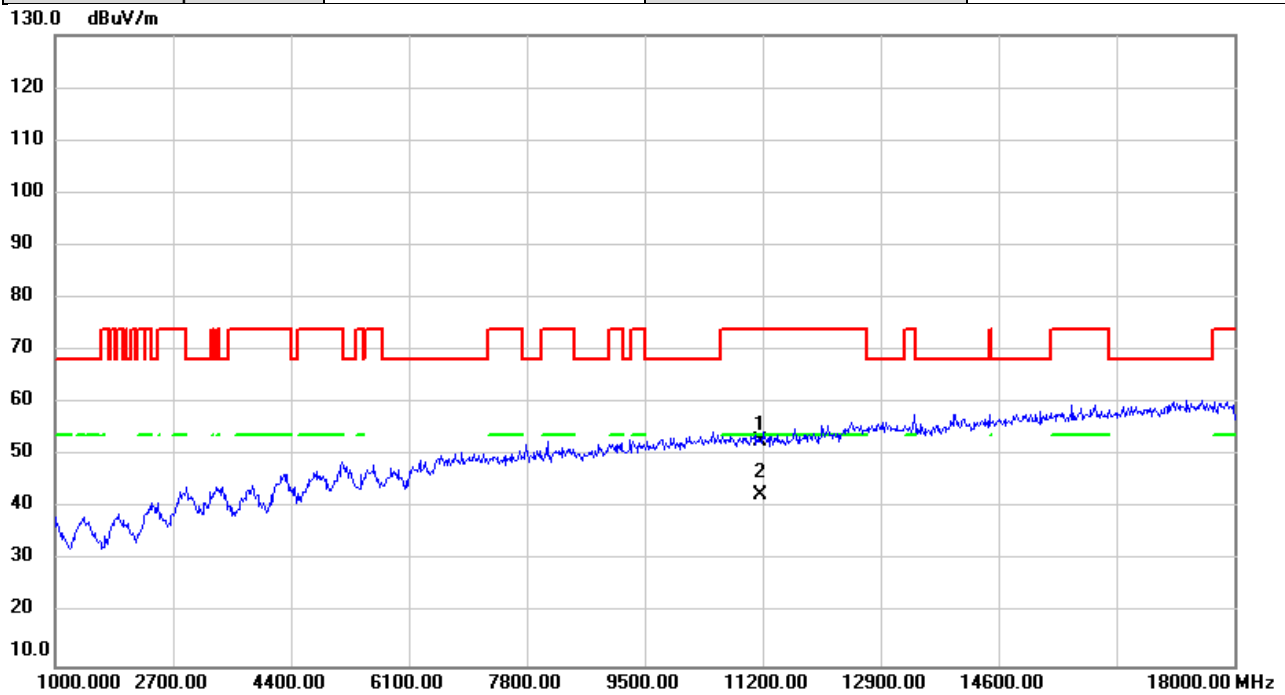


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	46.33	6.38	52.71	74.00	-21.29	peak	
2	*	11160.00	36.27	6.38	42.65	54.00	-11.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

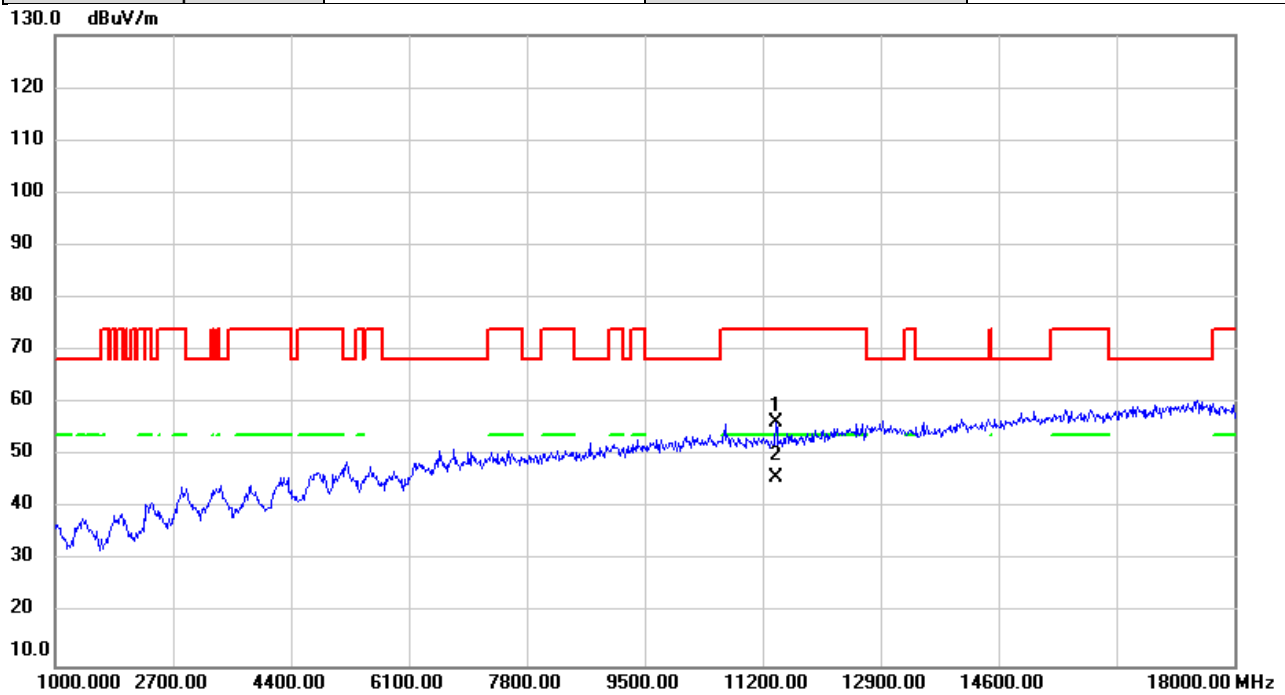


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	49.98	6.41	56.39	74.00	-17.61	peak	
2	*	11400.00	39.40	6.41	45.81	54.00	-8.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

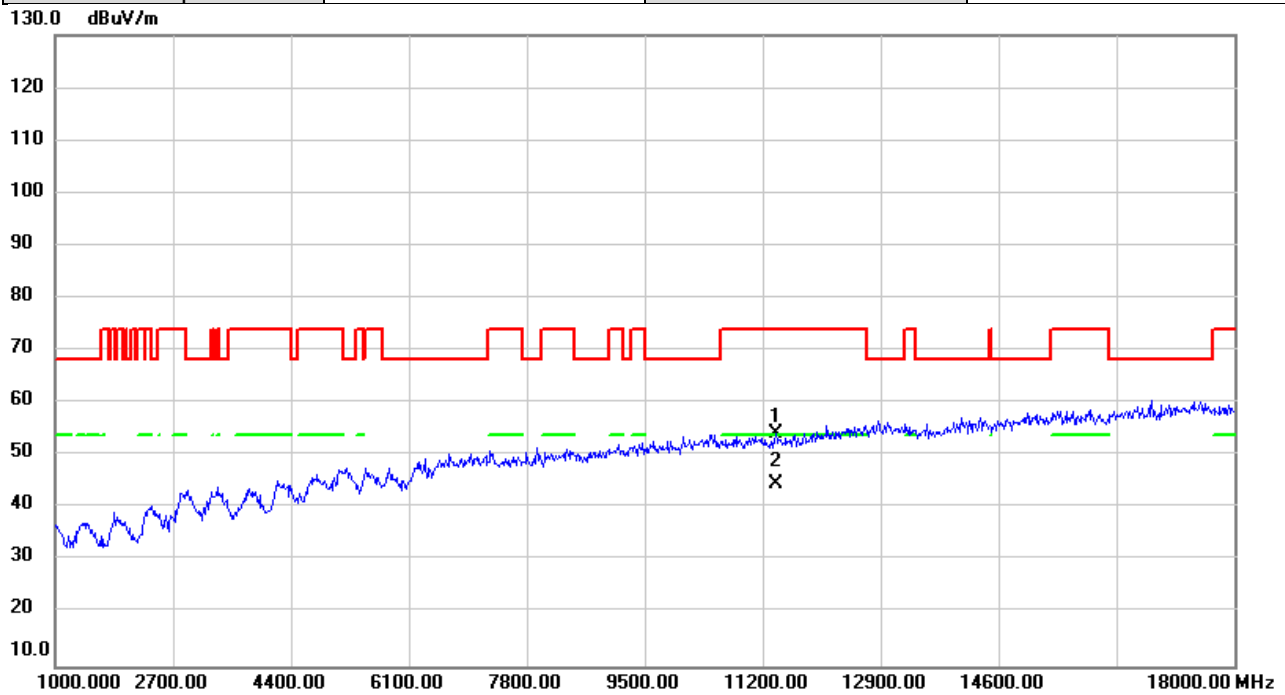


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	47.74	6.41	54.15	74.00	-19.85	peak	
2	*	11400.00	38.36	6.41	44.77	54.00	-9.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

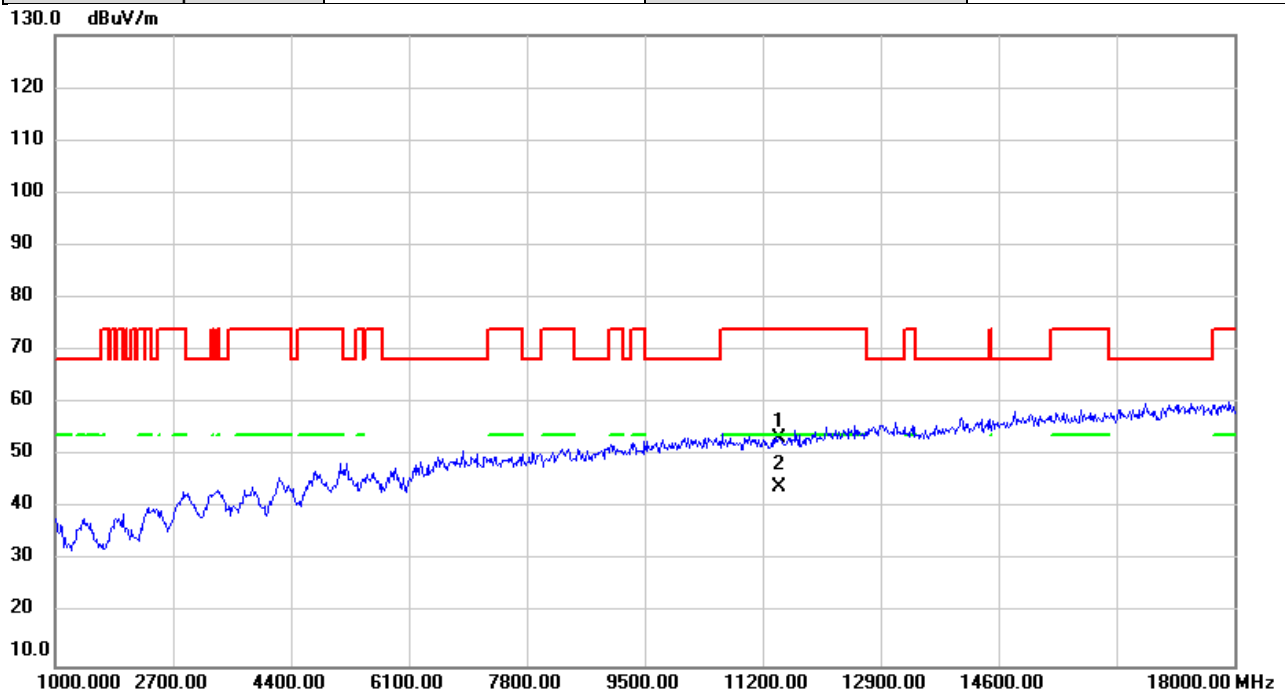


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	46.87	6.41	53.28	74.00	-20.72	peak	
2	*	11440.00	37.53	6.41	43.94	54.00	-10.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

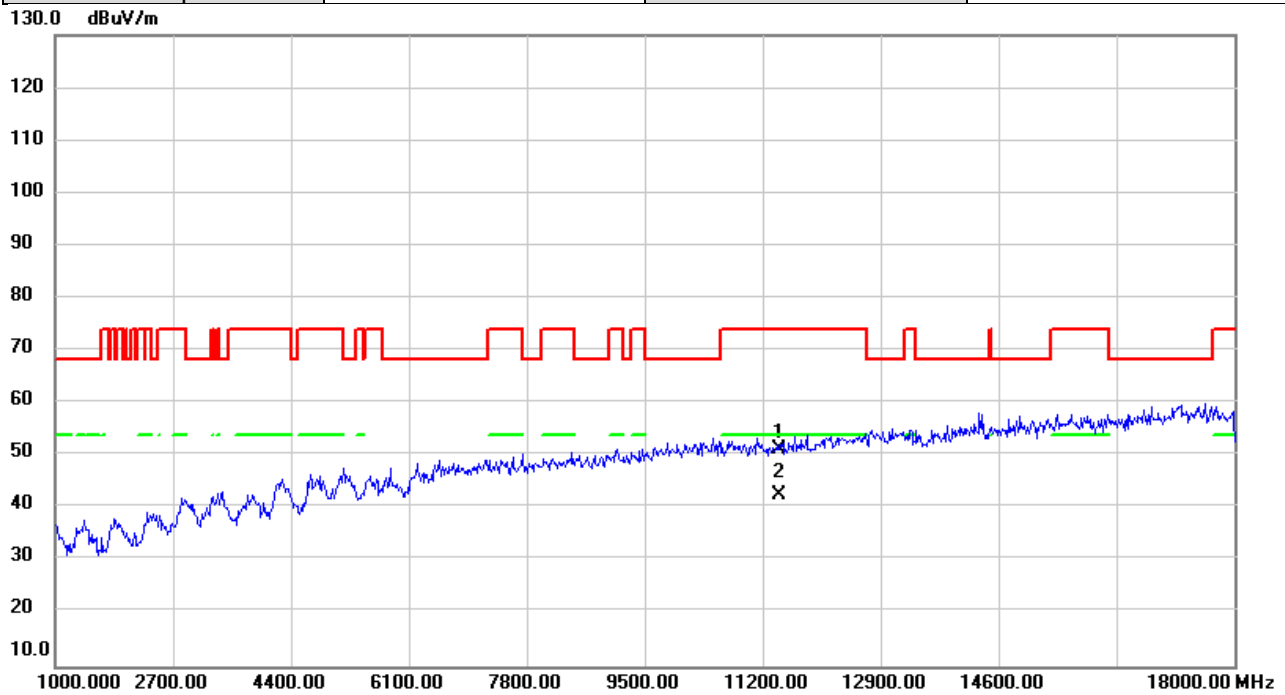


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	44.91	6.41	51.32	74.00	-22.68	peak	
2	*	11440.00	36.08	6.41	42.49	54.00	-11.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

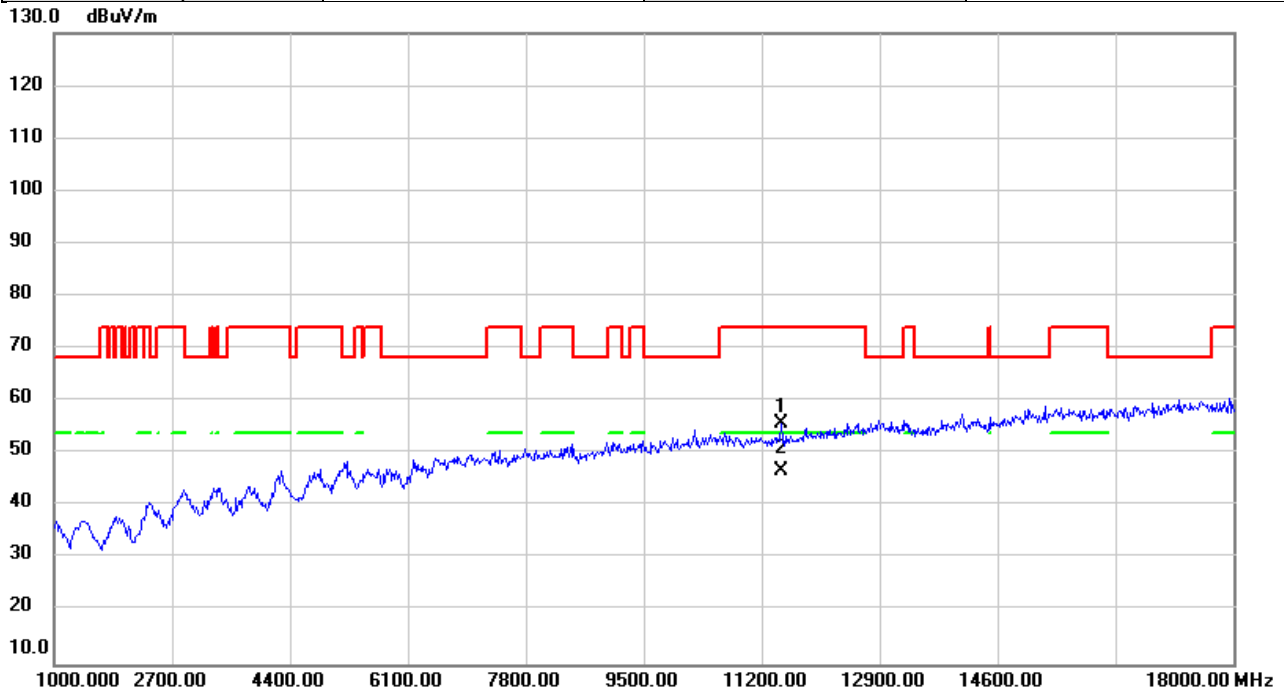


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	49.33	6.42	55.75	74.00	-18.25	peak	
2	*	11490.00	40.37	6.42	46.79	54.00	-7.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

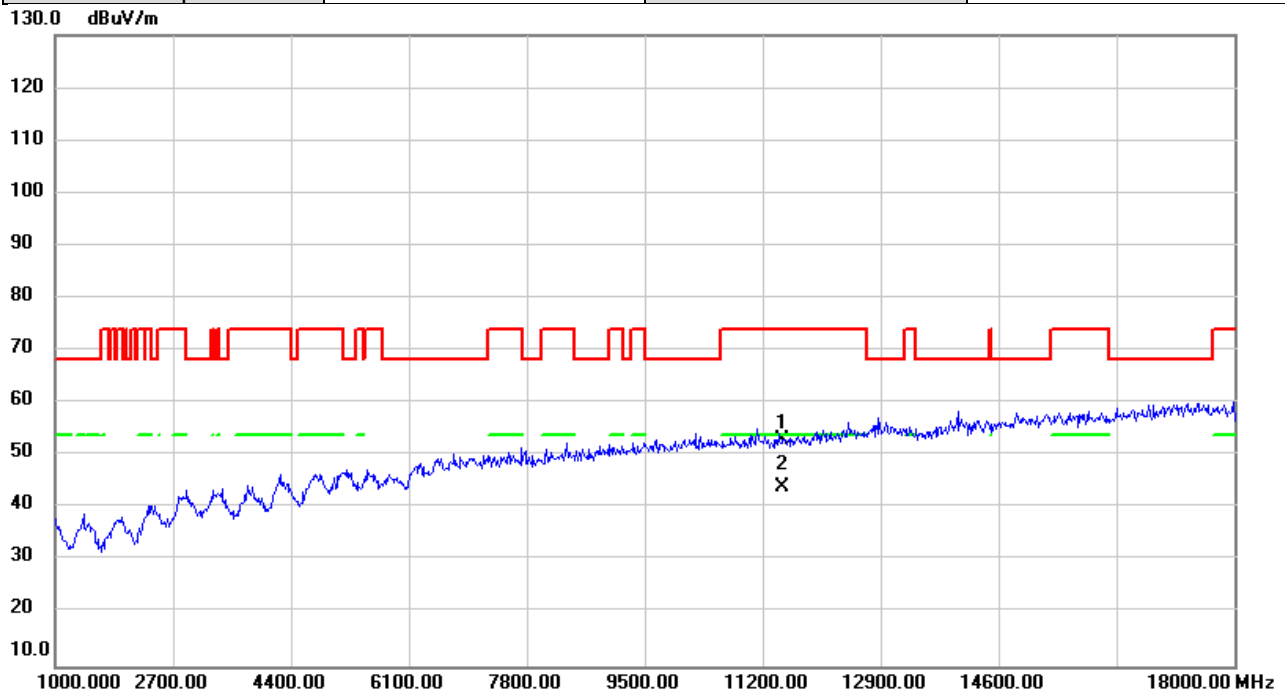


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	46.51	6.42	52.93	74.00	-21.07	peak	
2	*	11490.00	37.52	6.42	43.94	54.00	-10.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

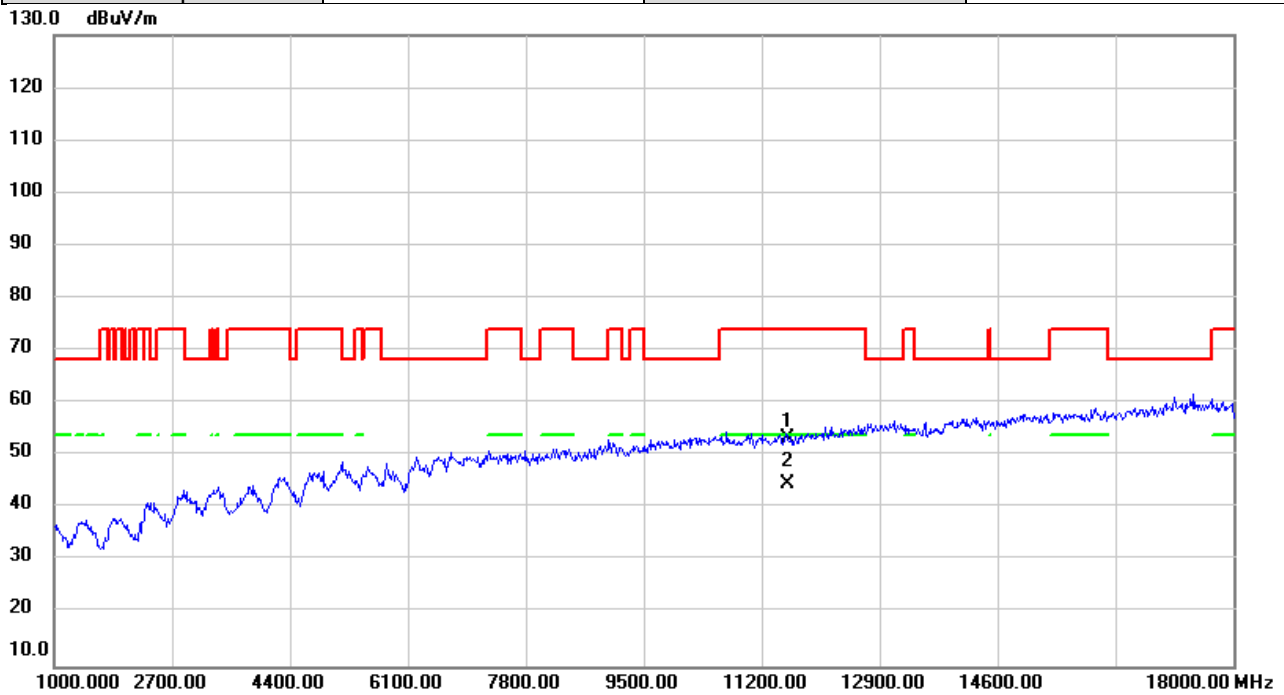


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	46.90	6.50	53.40	74.00	-20.60	peak	
2	*	11570.00	38.29	6.50	44.79	54.00	-9.21	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

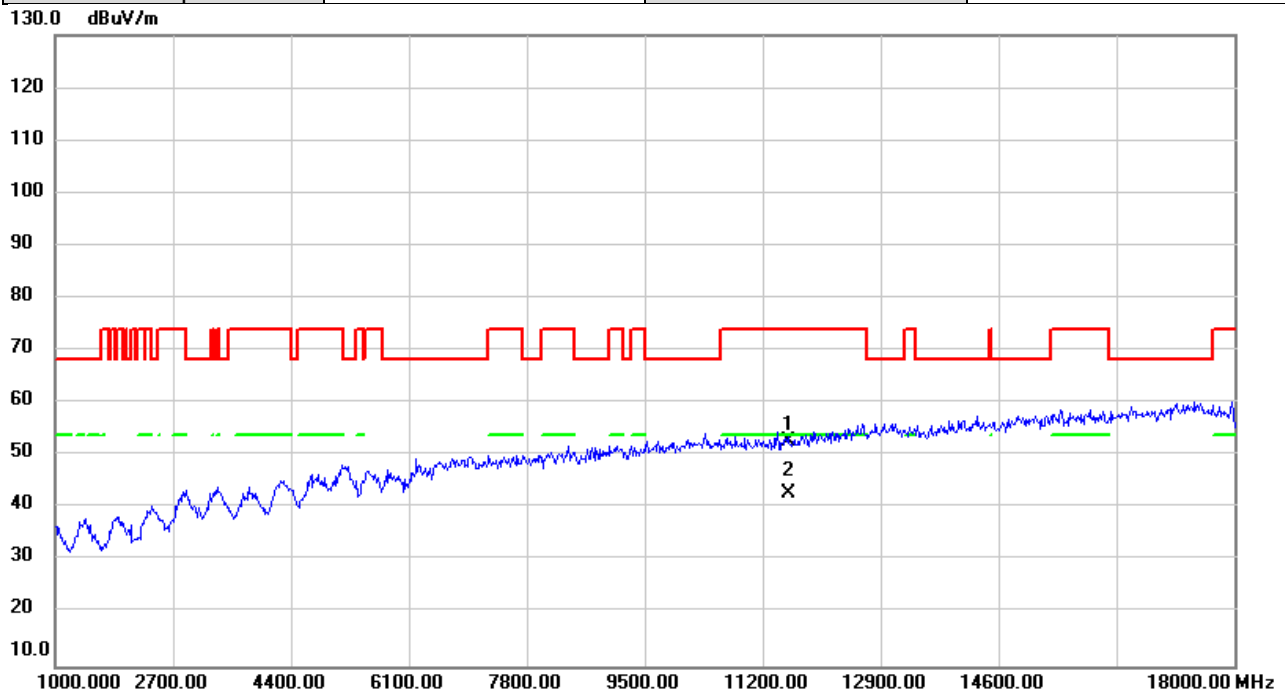


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	46.17	6.50	52.67	74.00	-21.33	peak	
2	*	11570.00	36.30	6.50	42.80	54.00	-11.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	60%

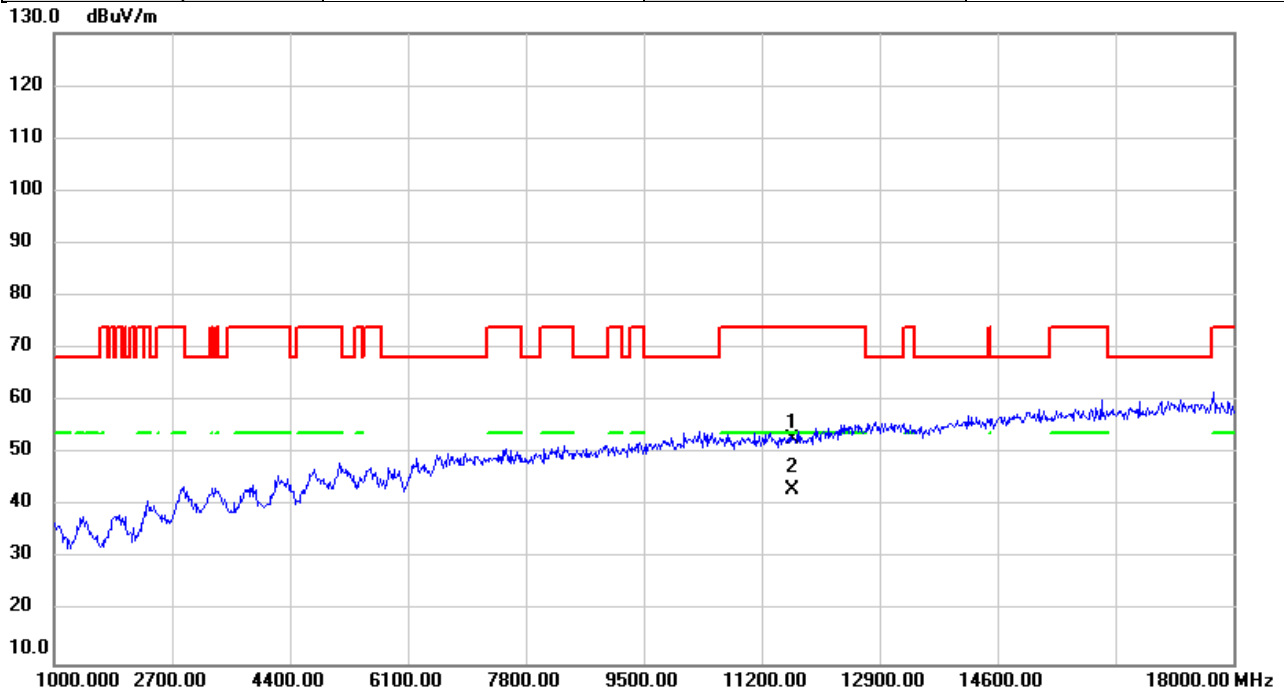


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	46.21	6.59	52.80	74.00	-21.20	peak	
2	*	11650.00	36.43	6.59	43.02	54.00	-10.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/4
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

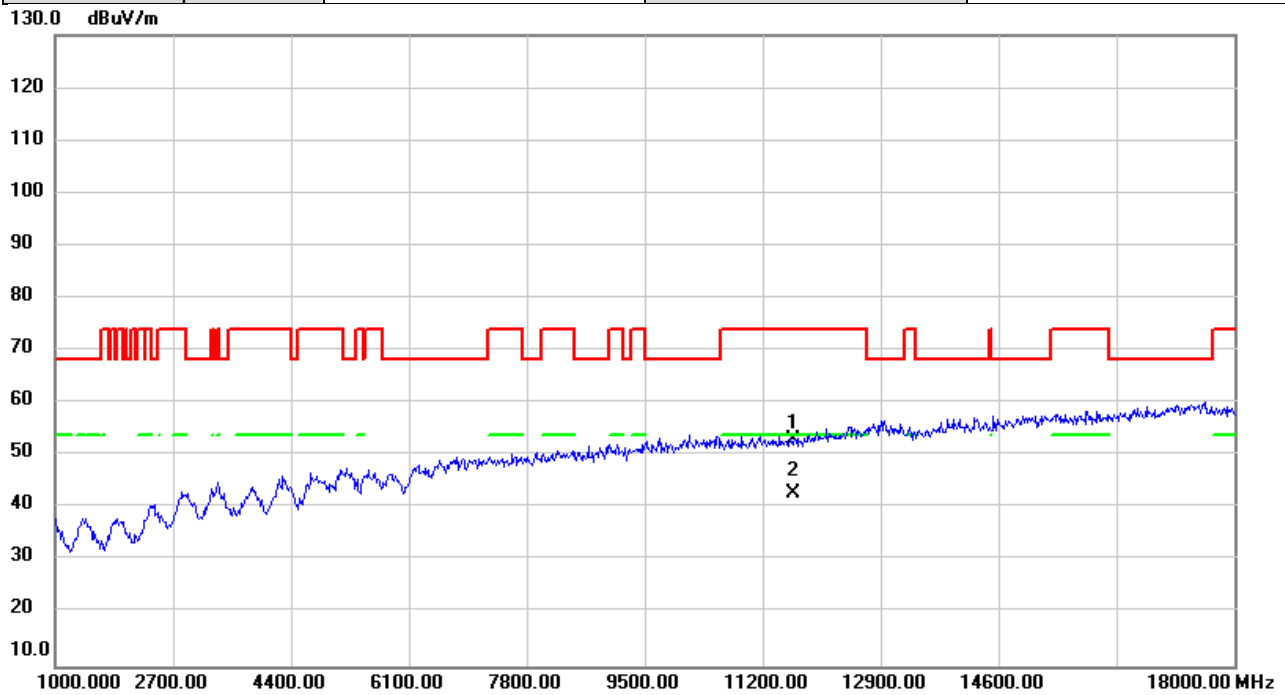


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	46.39	6.59	52.98	74.00	-21.02	peak	
2	*	11650.00	36.37	6.59	42.96	54.00	-11.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5190MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

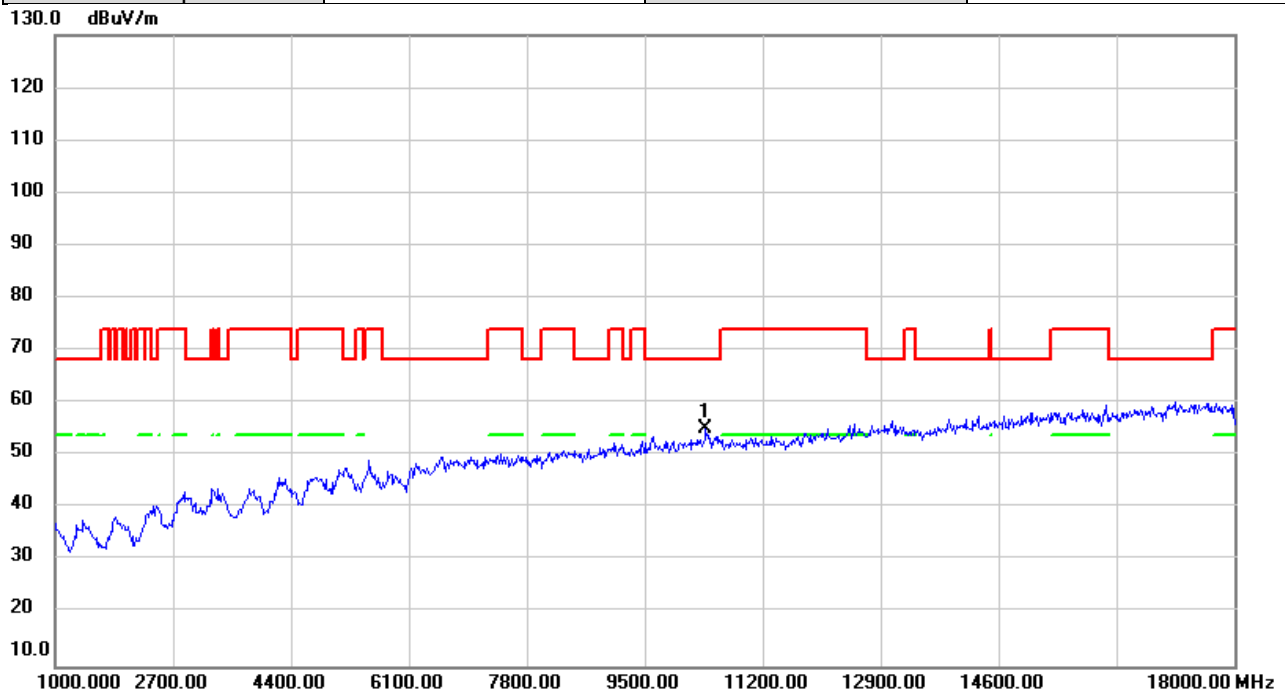


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	47.97	7.08	55.05	68.20	-13.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5190MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

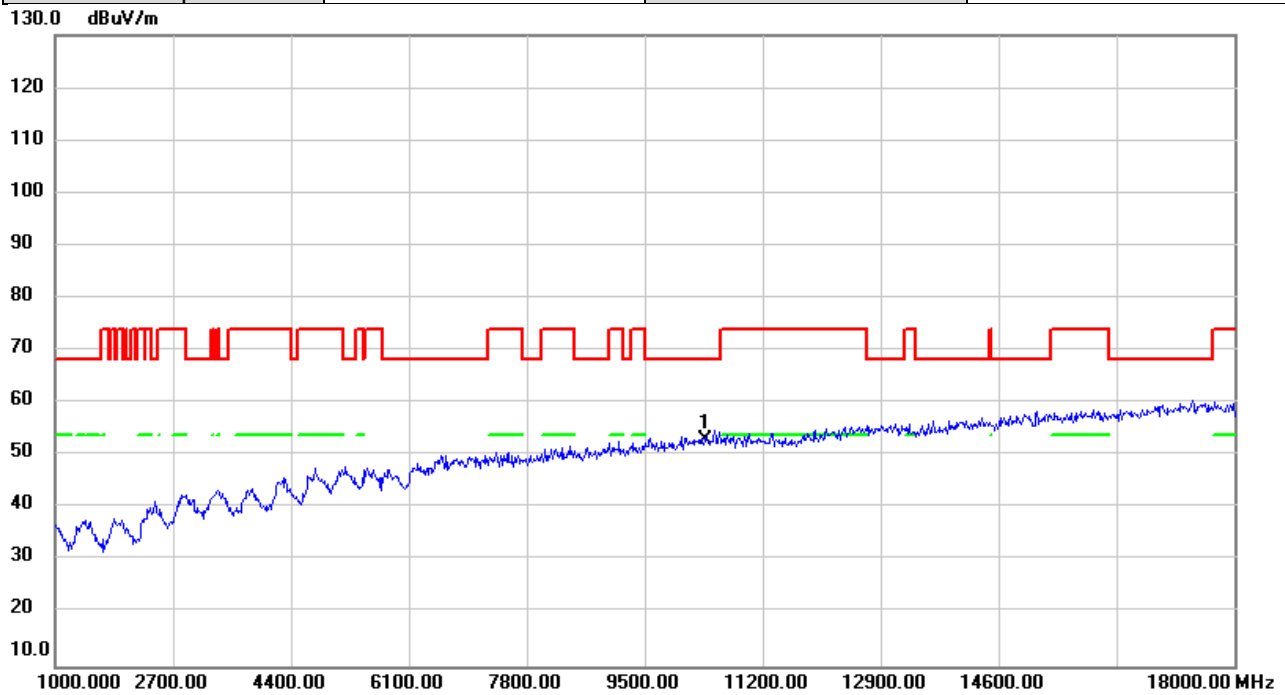


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	45.89	7.08	52.97	68.20	-15.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5230MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

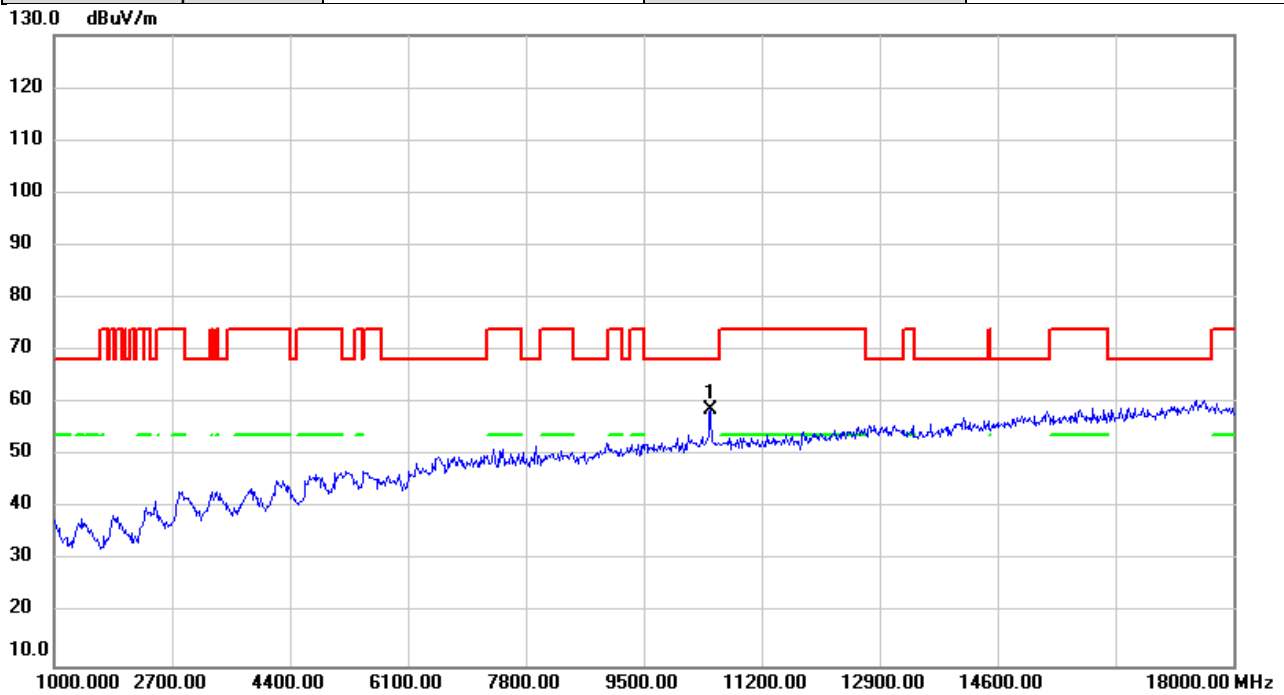


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	51.72	7.10	58.82	68.20	-9.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5230MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

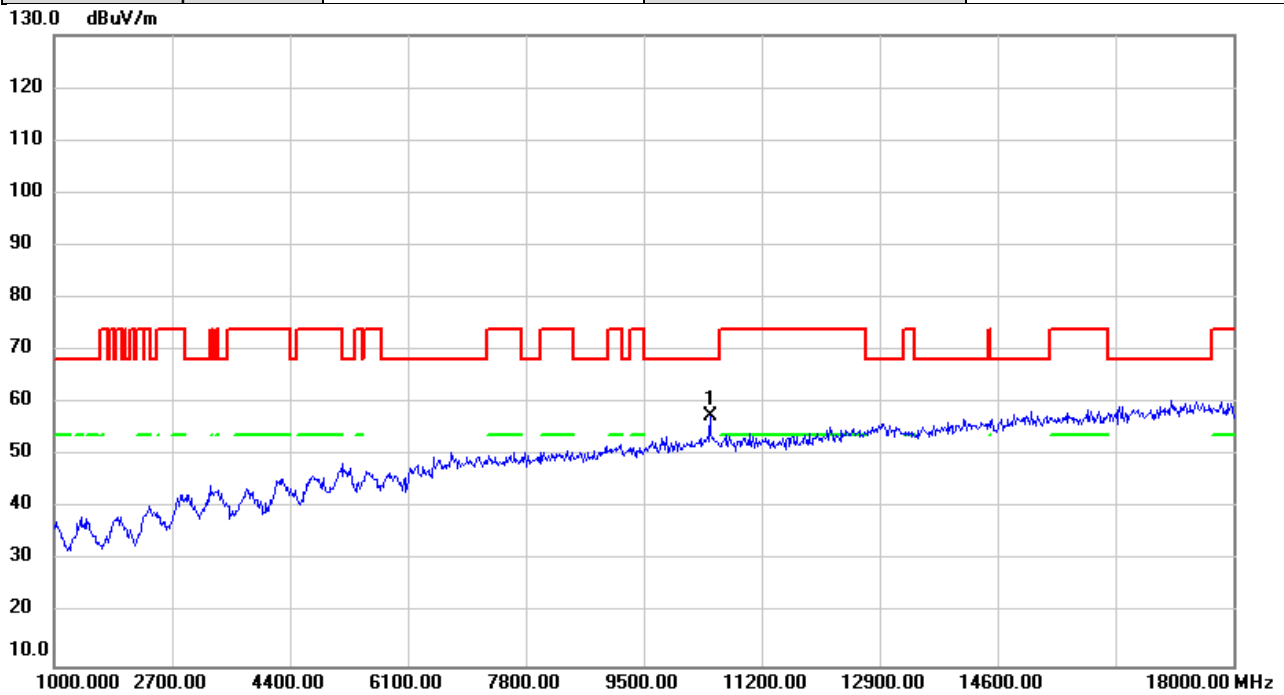


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	50.50	7.10	57.60	68.20	-10.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5270MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

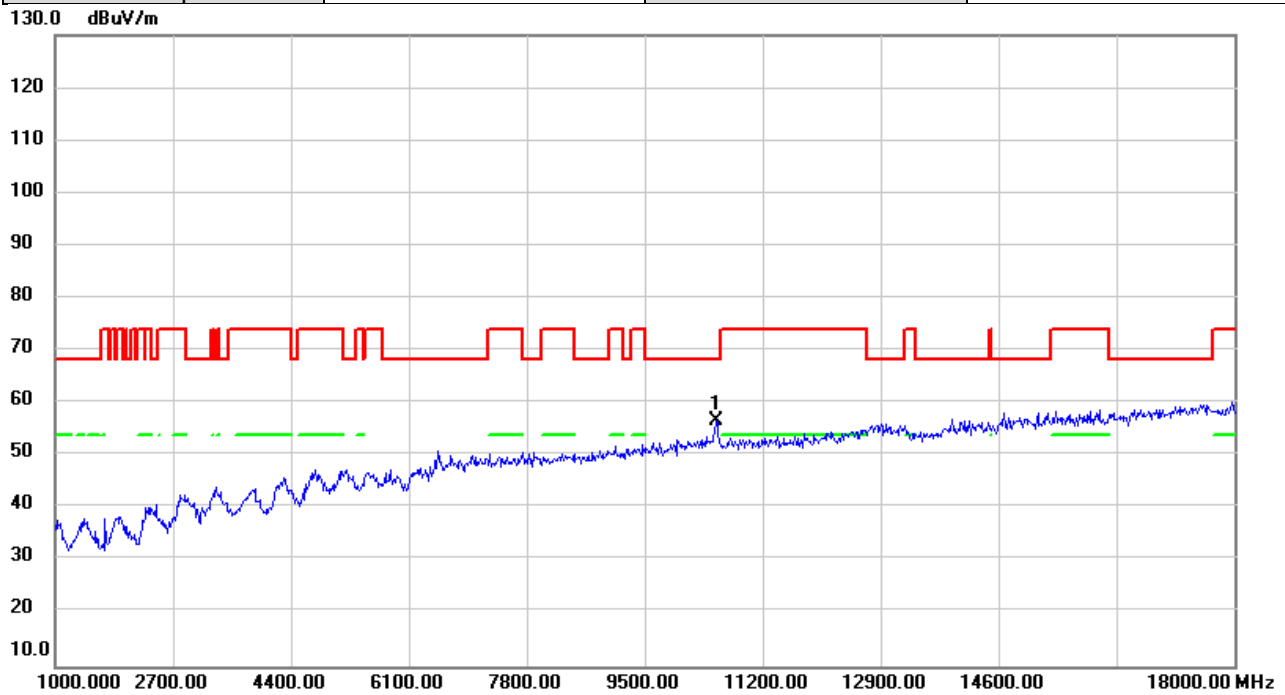


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	49.65	7.04	56.69	68.20	-11.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5270MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

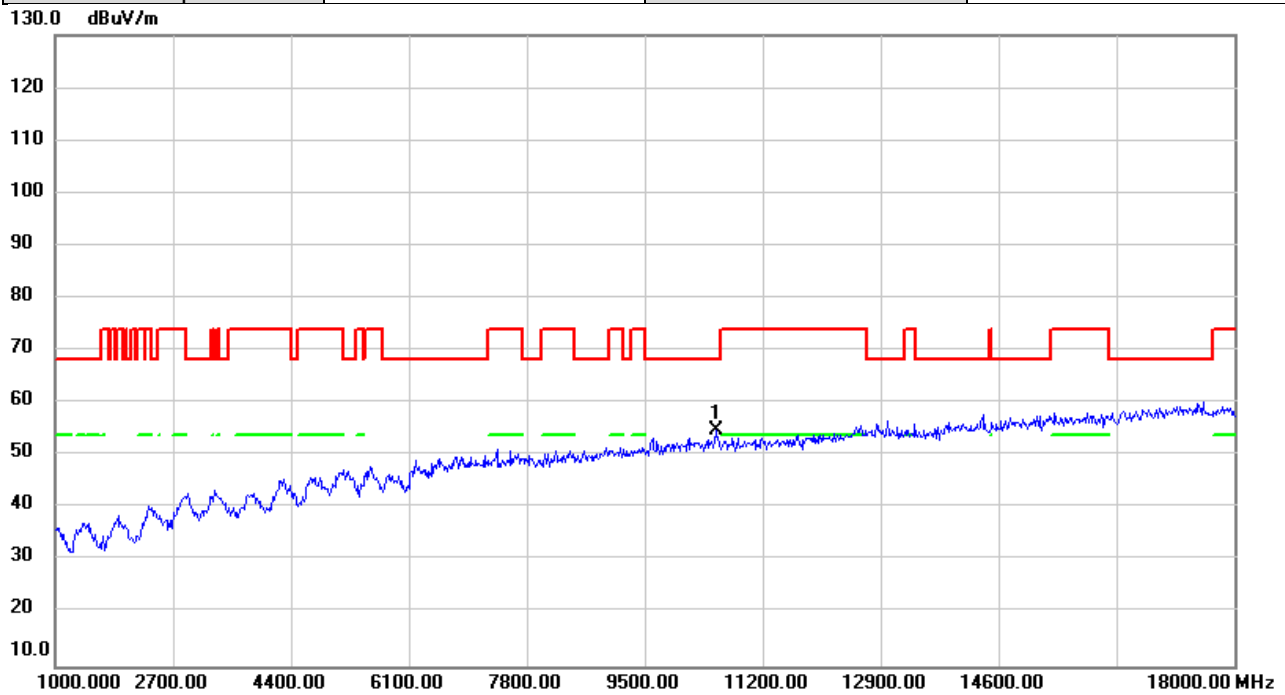


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	47.79	7.04	54.83	68.20	-13.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5310MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

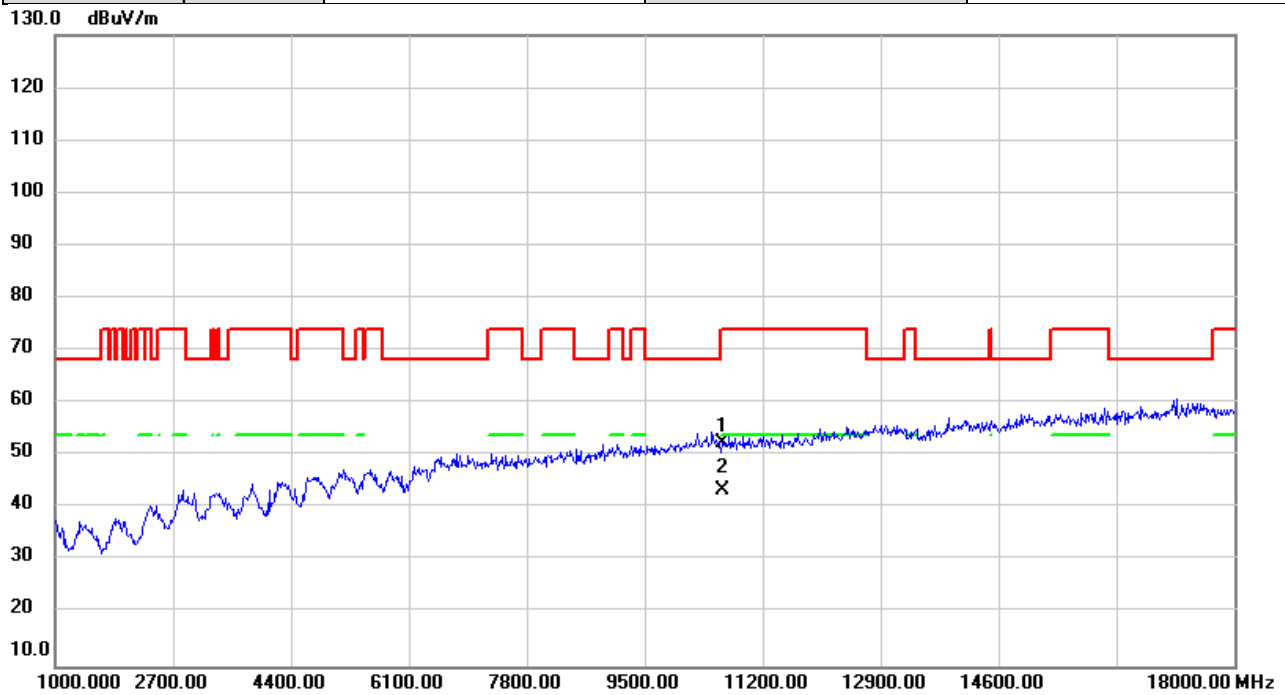


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	45.60	6.92	52.52	74.00	-21.48	peak	
2	*	10620.00	36.53	6.92	43.45	54.00	-10.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5310MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

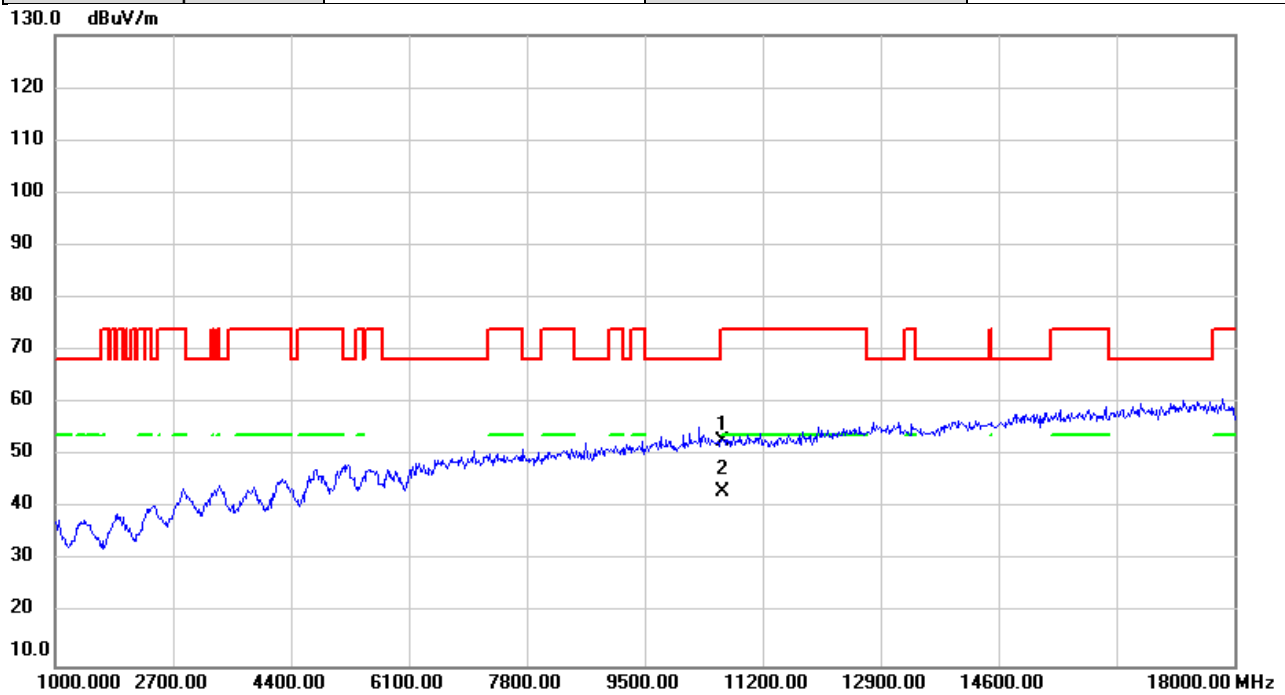


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	45.76	6.92	52.68	74.00	-21.32	peak	
2	*	10620.00	36.34	6.92	43.26	54.00	-10.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5510MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

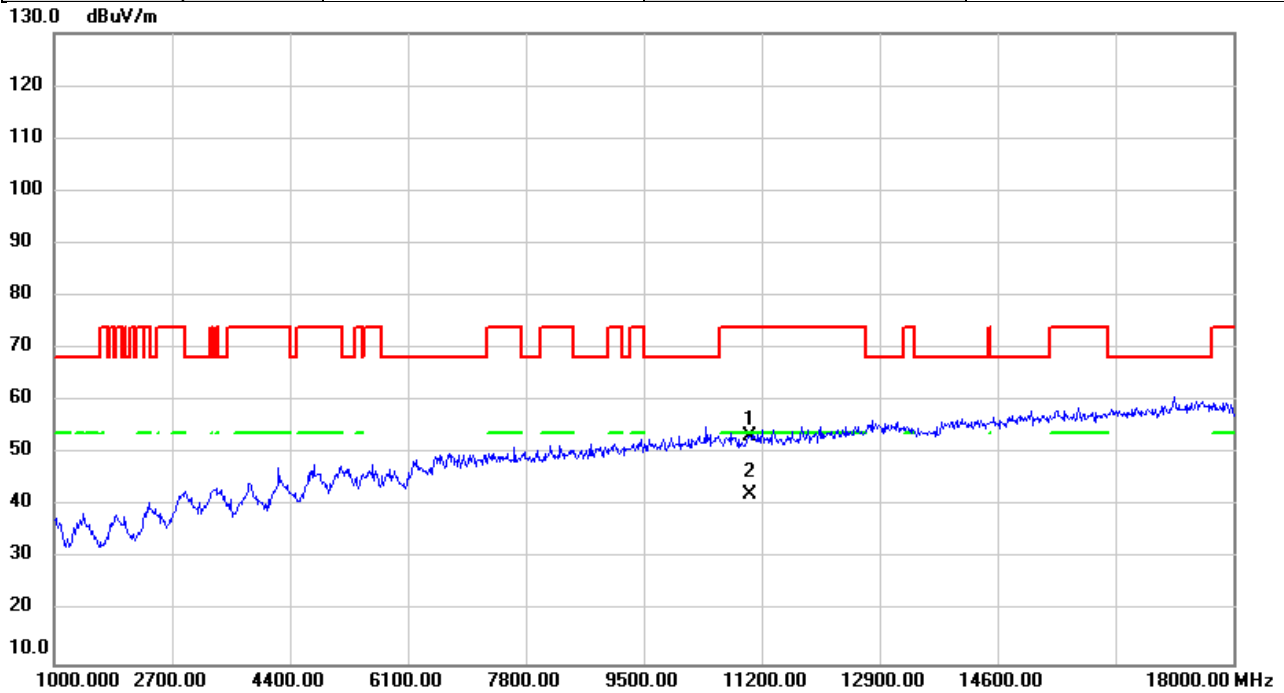


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	47.01	6.36	53.37	74.00	-20.63	peak	
2	*	11020.00	36.02	6.36	42.38	54.00	-11.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5510MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

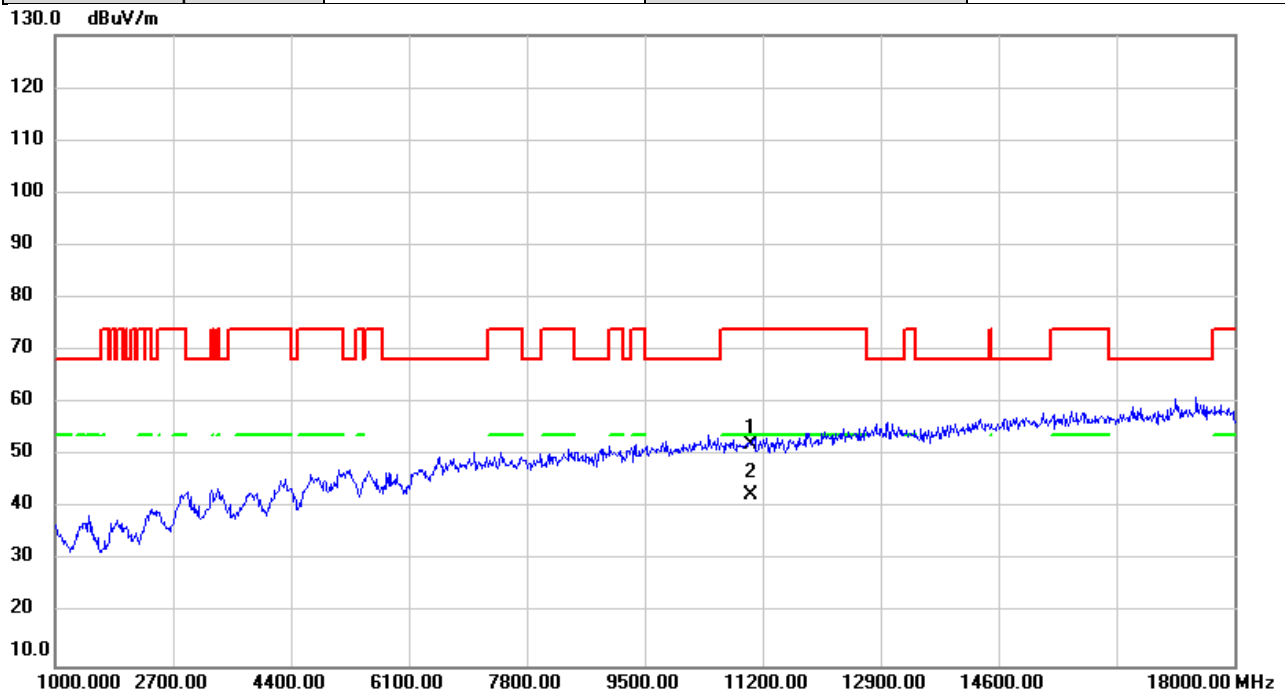


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	45.84	6.36	52.20	74.00	-21.80	peak	
2	*	11020.00	36.15	6.36	42.51	54.00	-11.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5550MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

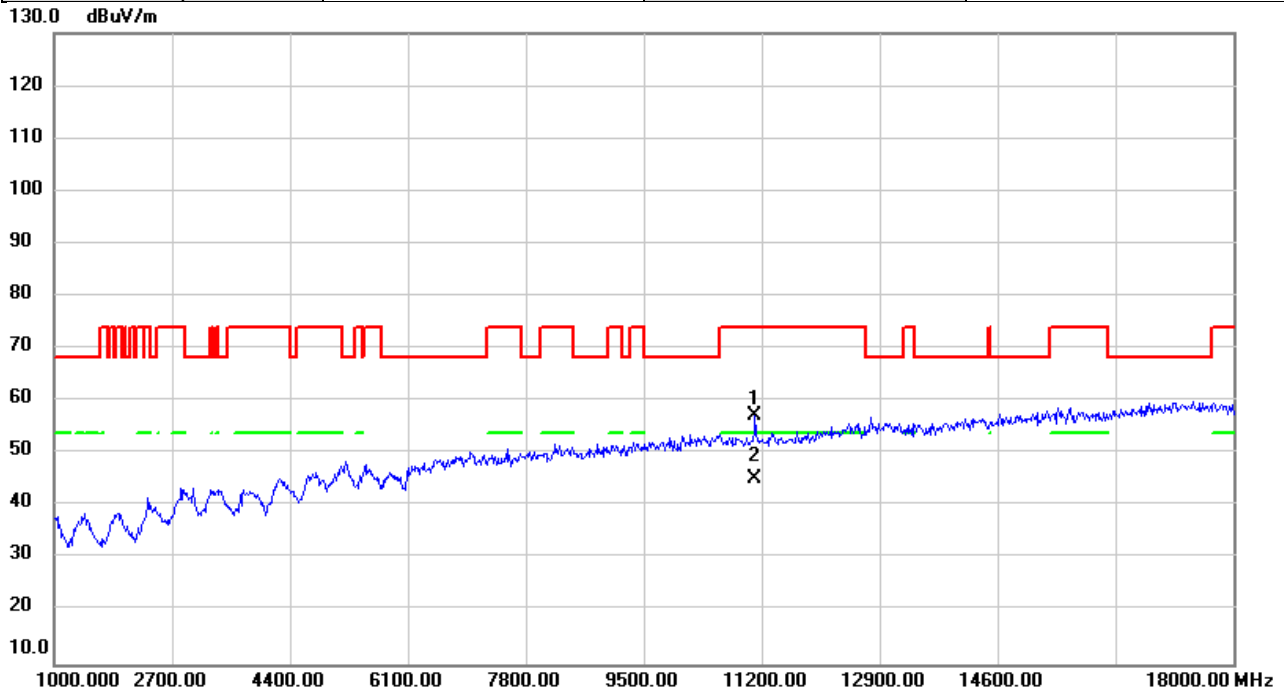


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	50.75	6.37	57.12	74.00	-16.88	peak	
2	*	11100.00	38.80	6.37	45.17	54.00	-8.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5550MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

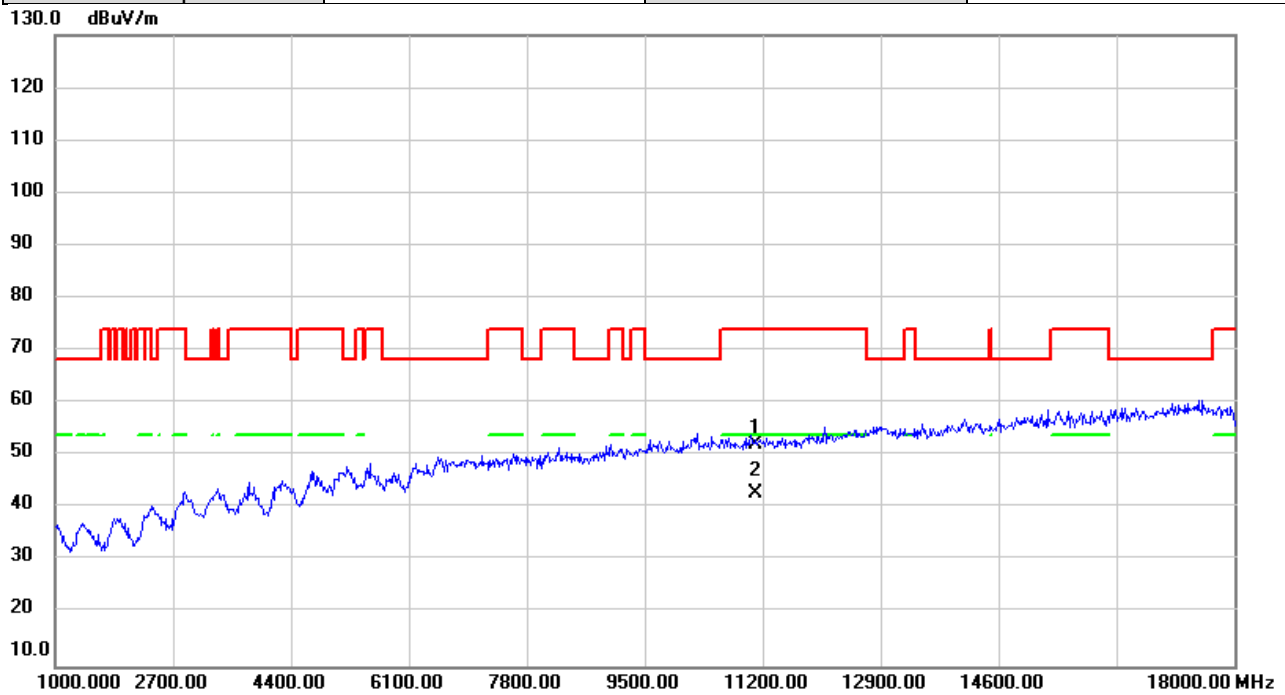


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	45.64	6.37	52.01	74.00	-21.99	peak	
2	*	11100.00	36.39	6.37	42.76	54.00	-11.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5670MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

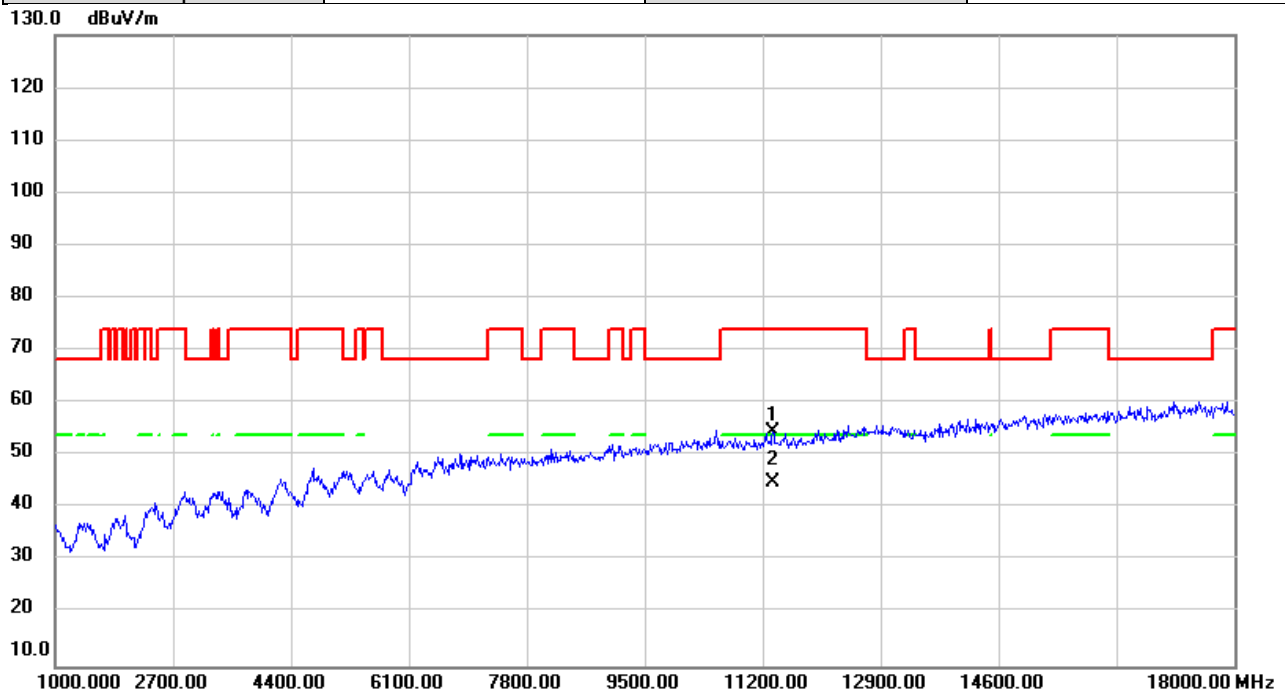


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	48.29	6.40	54.69	74.00	-19.31	peak	
2	*	11340.00	38.54	6.40	44.94	54.00	-9.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

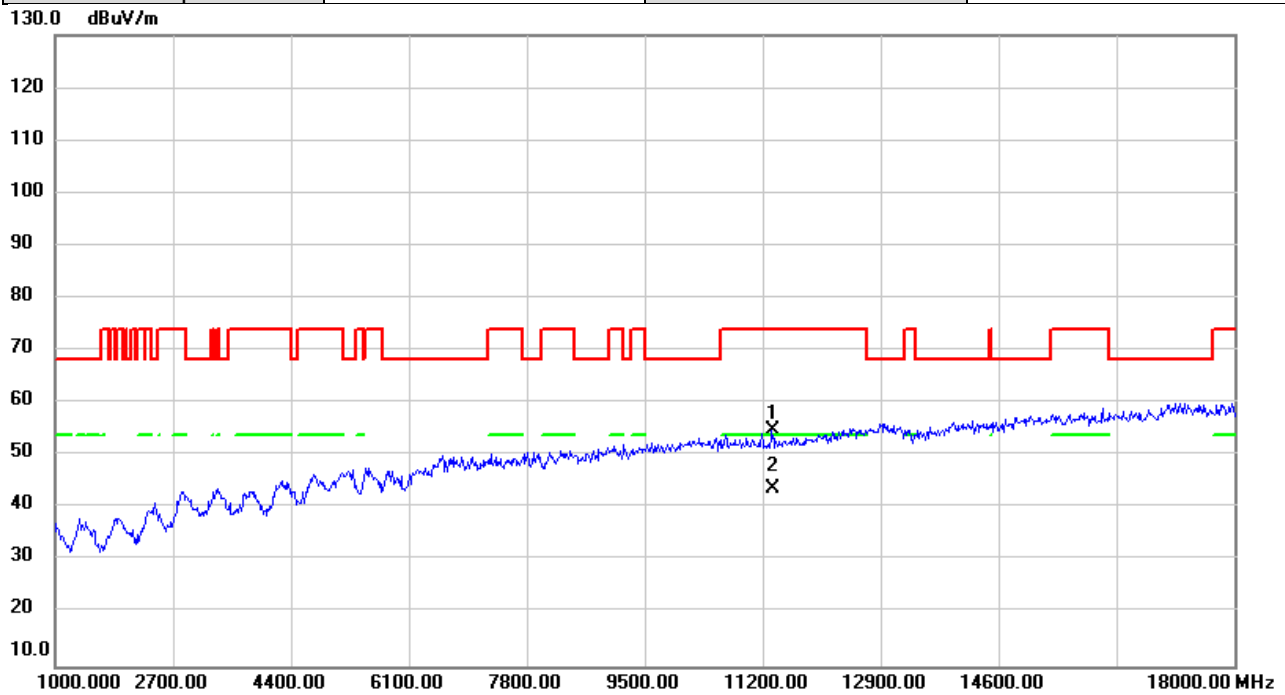


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	48.56	6.40	54.96	74.00	-19.04	peak	
2	*	11340.00	37.48	6.40	43.88	54.00	-10.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5710MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

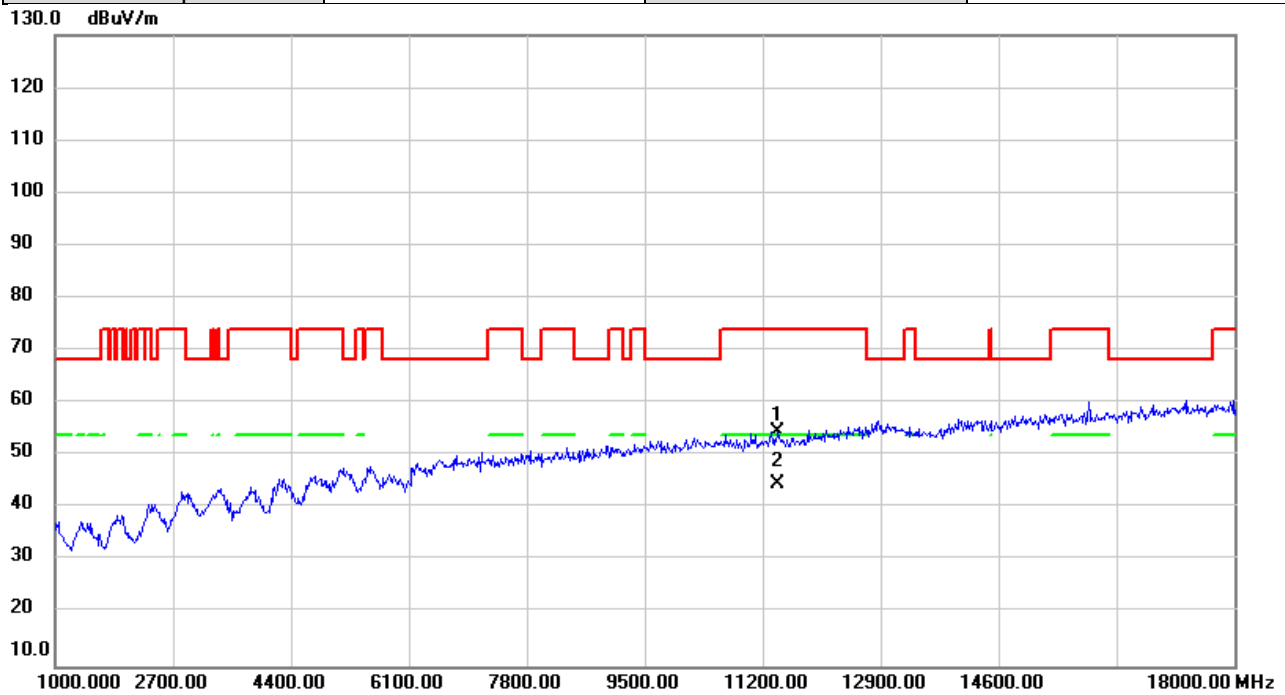


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	48.04	6.41	54.45	74.00	-19.55	peak	
2	*	11420.00	38.29	6.41	44.70	54.00	-9.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5710MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

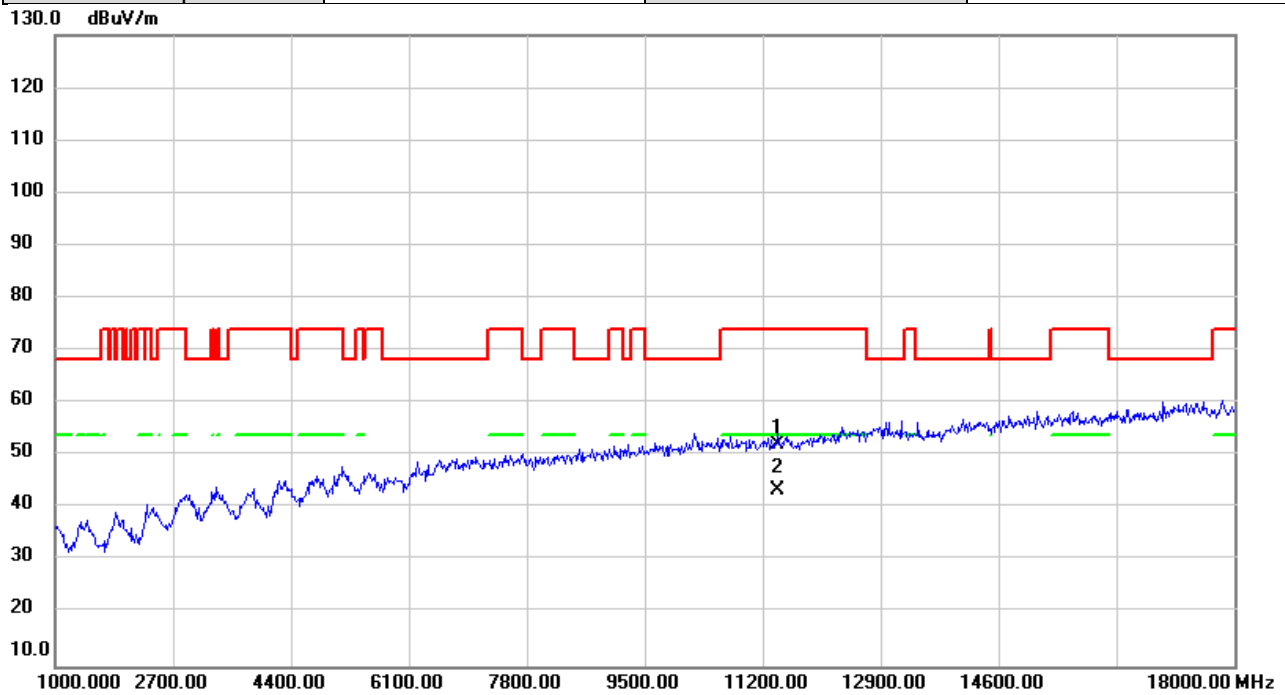


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	45.81	6.41	52.22	74.00	-21.78	peak	
2	*	11420.00	36.95	6.41	43.36	54.00	-10.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5755MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

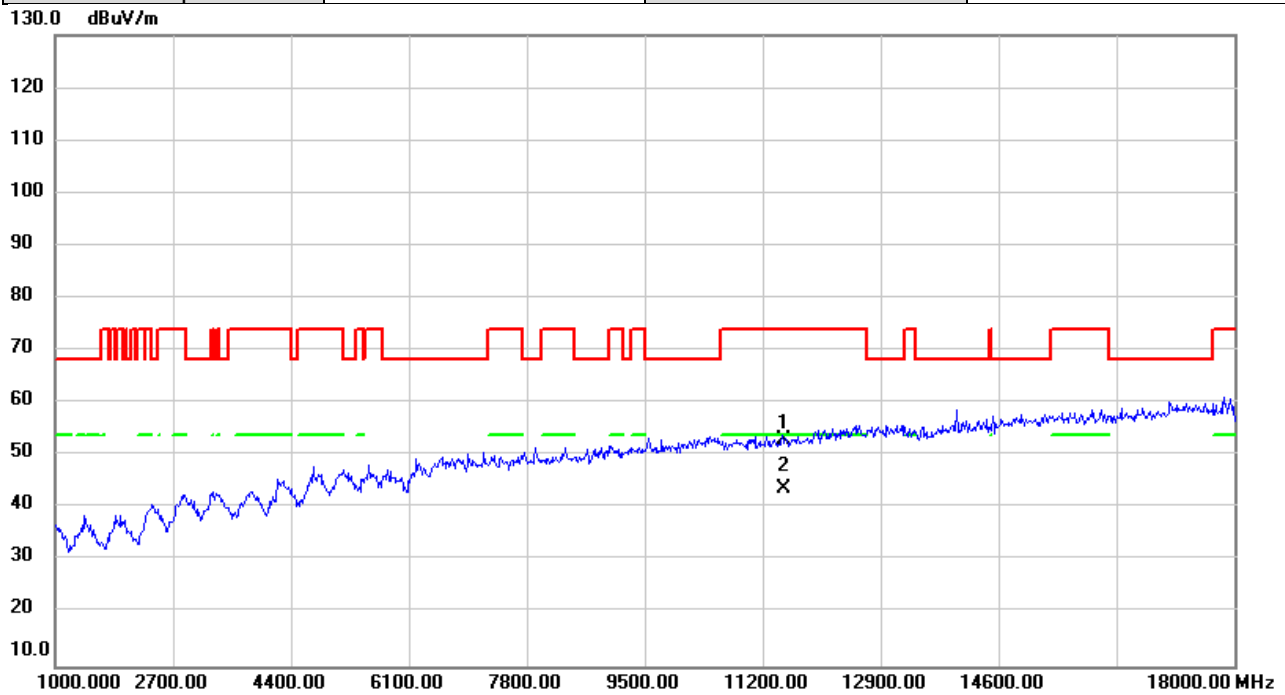


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	46.69	6.43	53.12	74.00	-20.88	peak	
2	*	11510.00	37.20	6.43	43.63	54.00	-10.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

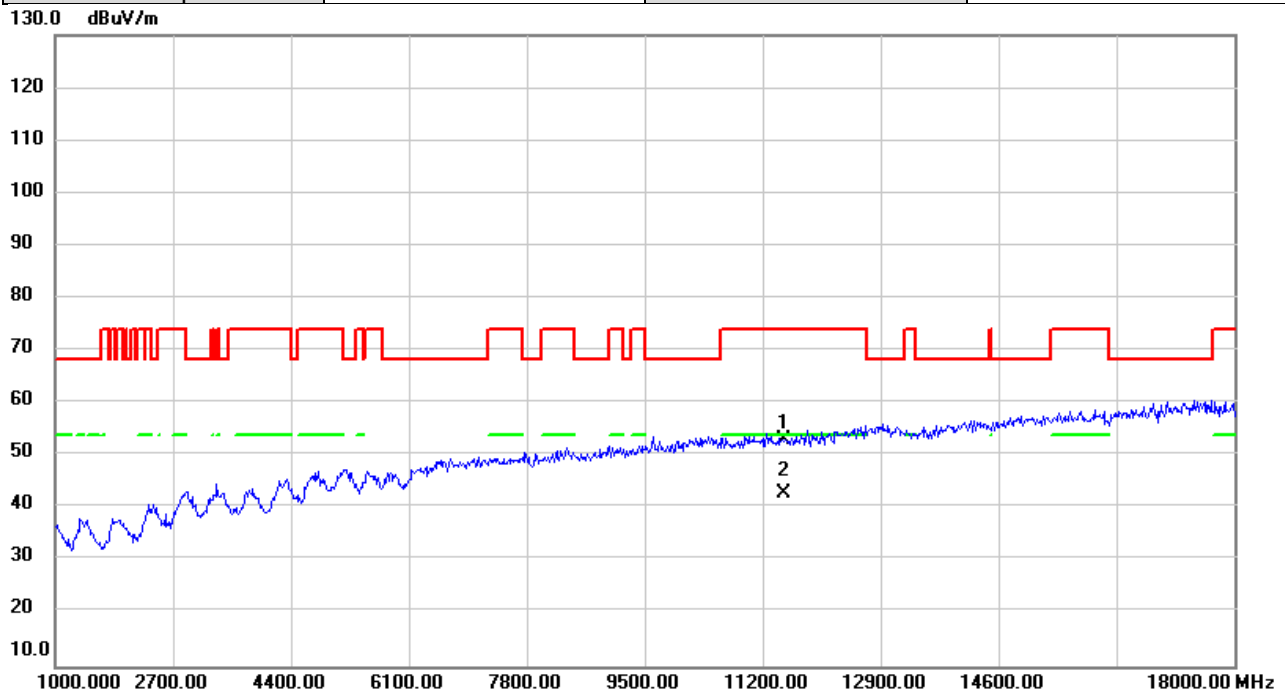


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	46.63	6.43	53.06	74.00	-20.94	peak	
2	*	11510.00	36.48	6.43	42.91	54.00	-11.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5795MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

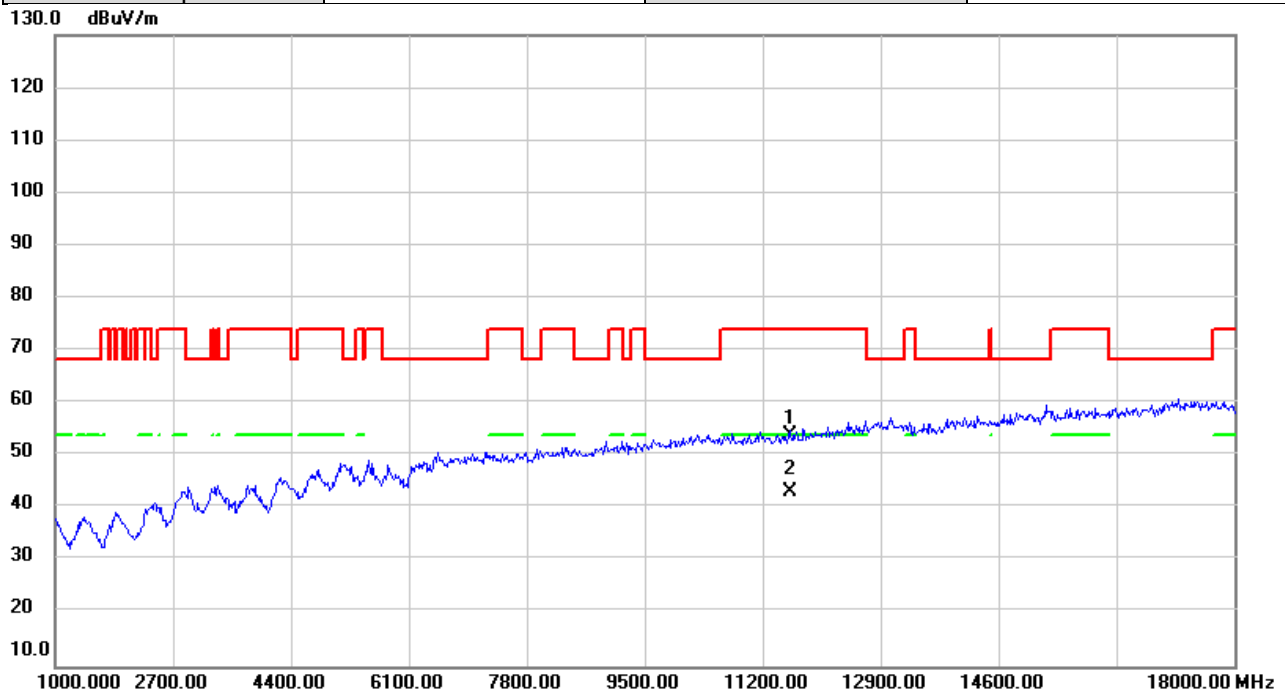


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	47.34	6.53	53.87	74.00	-20.13	peak	
2	*	11590.00	36.68	6.53	43.21	54.00	-10.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/5
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

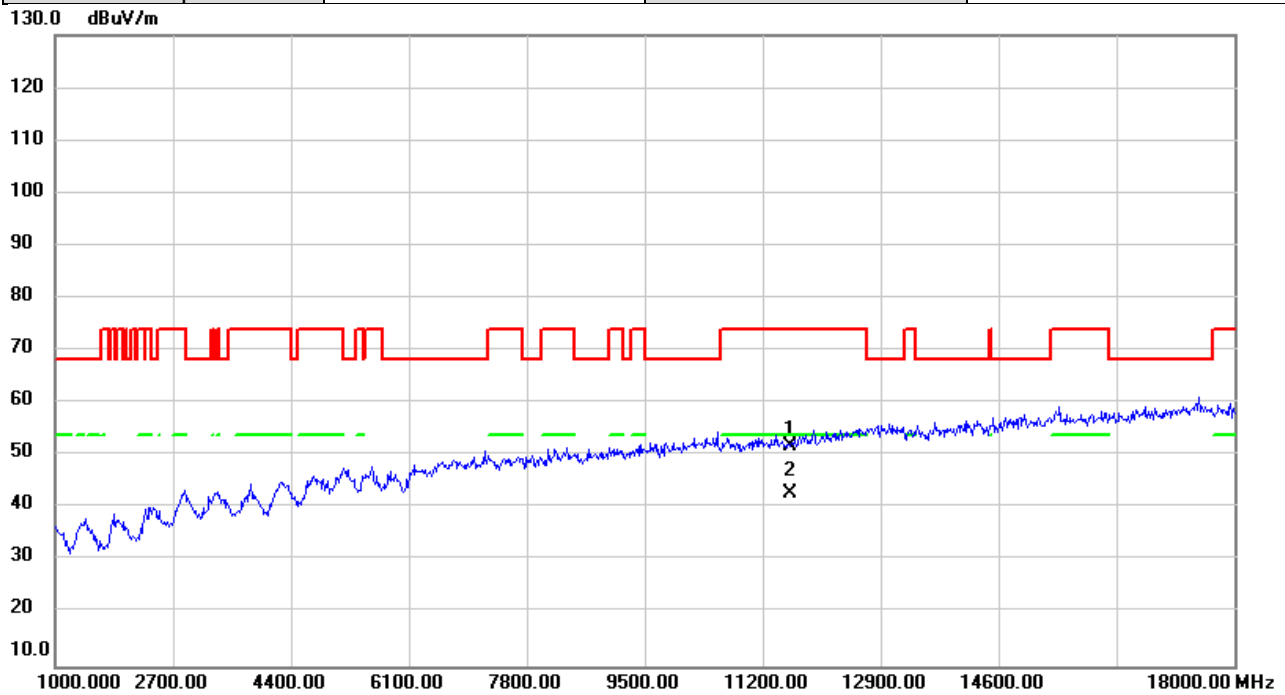


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	45.38	6.53	51.91	74.00	-22.09	peak	
2	*	11590.00	36.28	6.53	42.81	54.00	-11.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5210MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

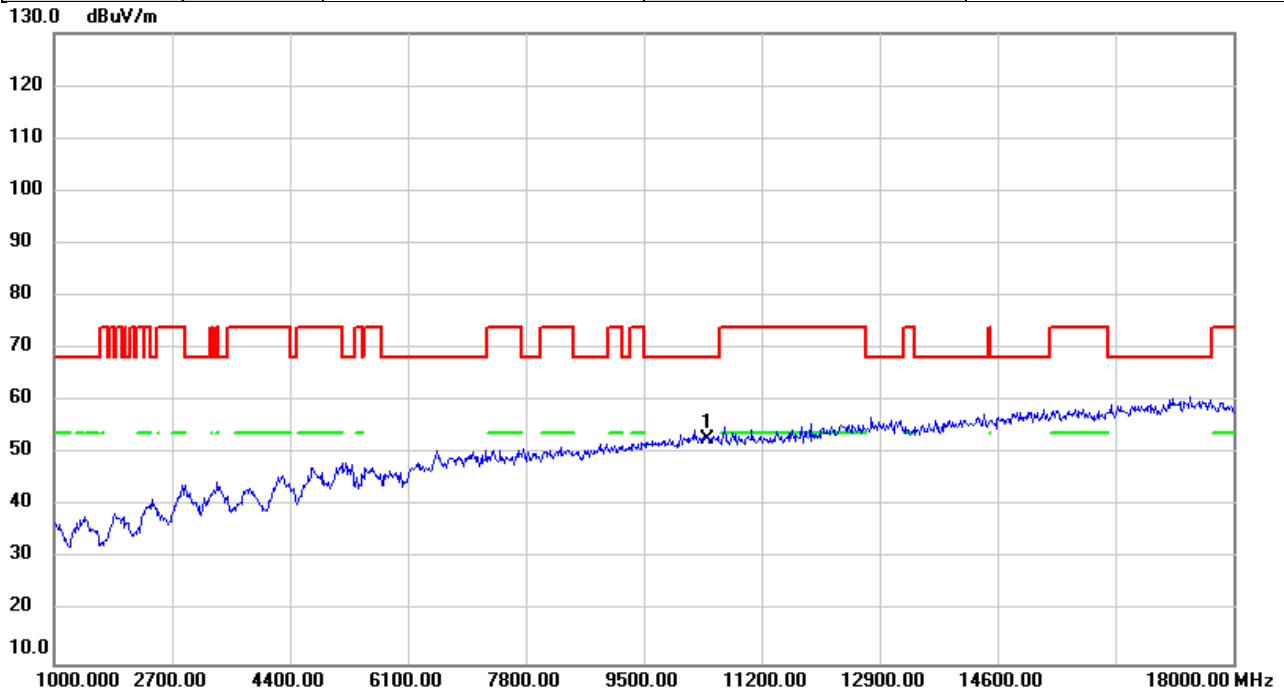


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	45.60	7.08	52.68	68.20	-15.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5210MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

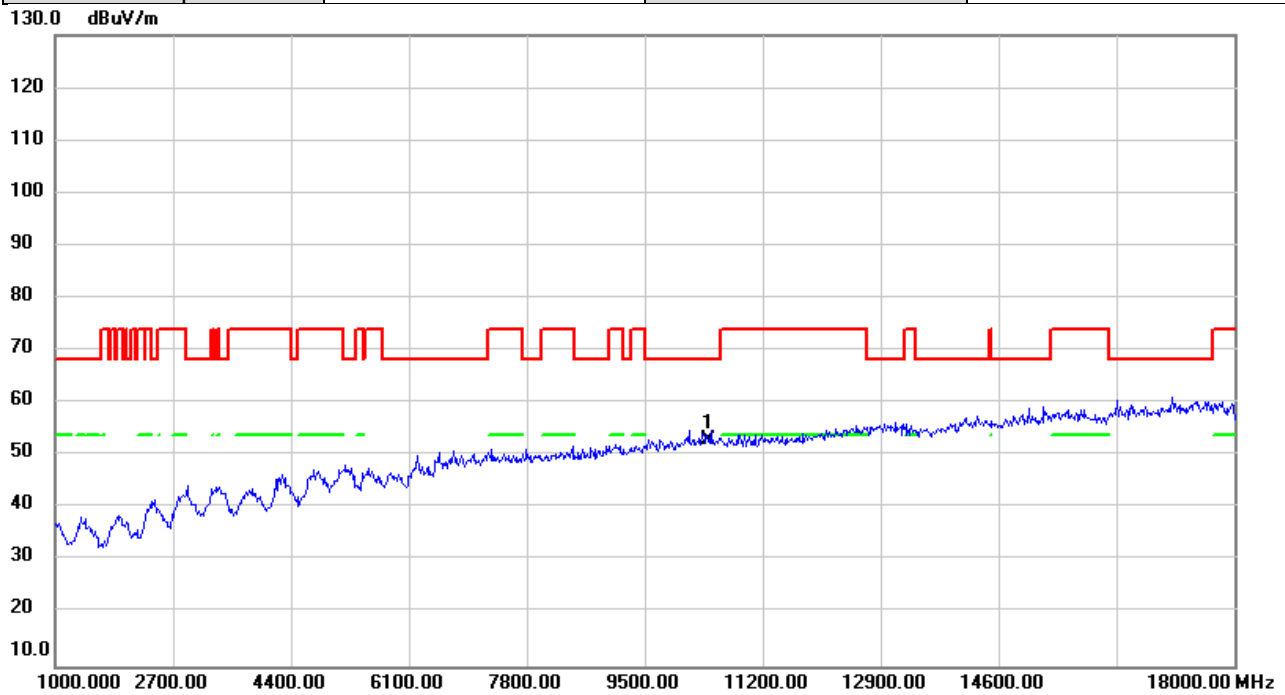


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	46.10	7.08	53.18	68.20	-15.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5290MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

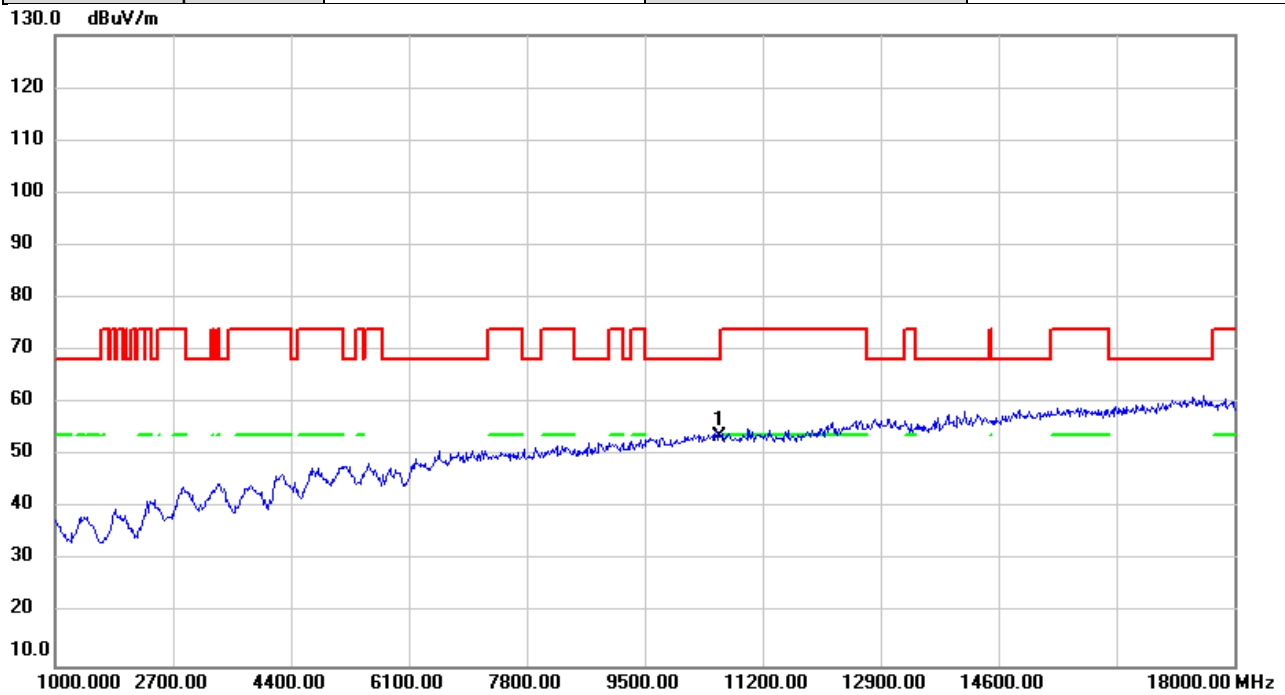


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	46.81	6.99	53.80	68.20	-14.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5290MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

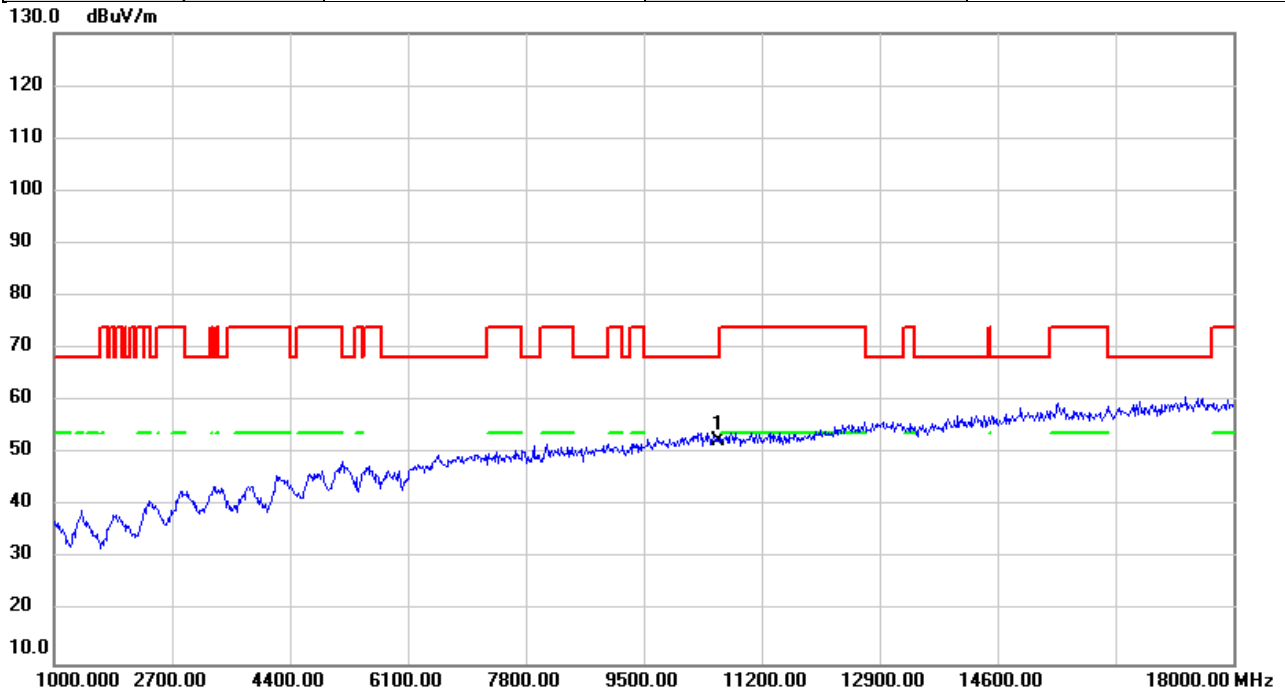


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	45.38	6.99	52.37	68.20	-15.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5530MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

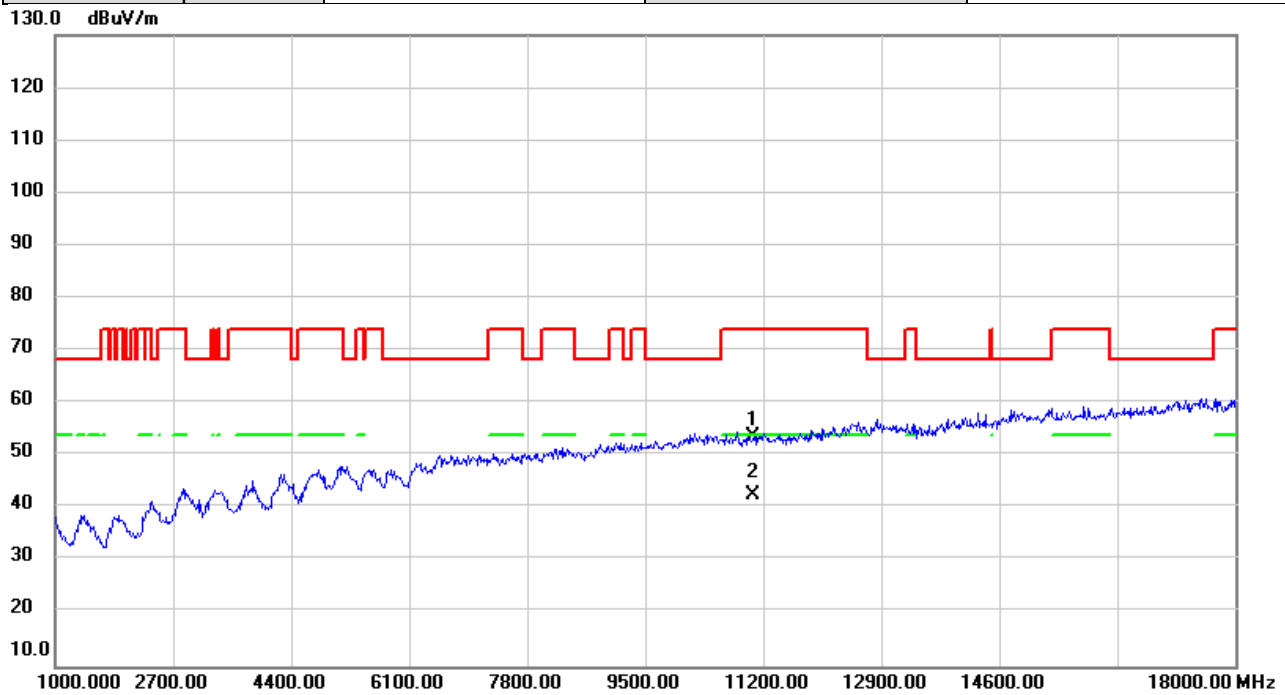


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	47.23	6.37	53.60	74.00	-20.40	peak	
2	*	11060.00	36.16	6.37	42.53	54.00	-11.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5530MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

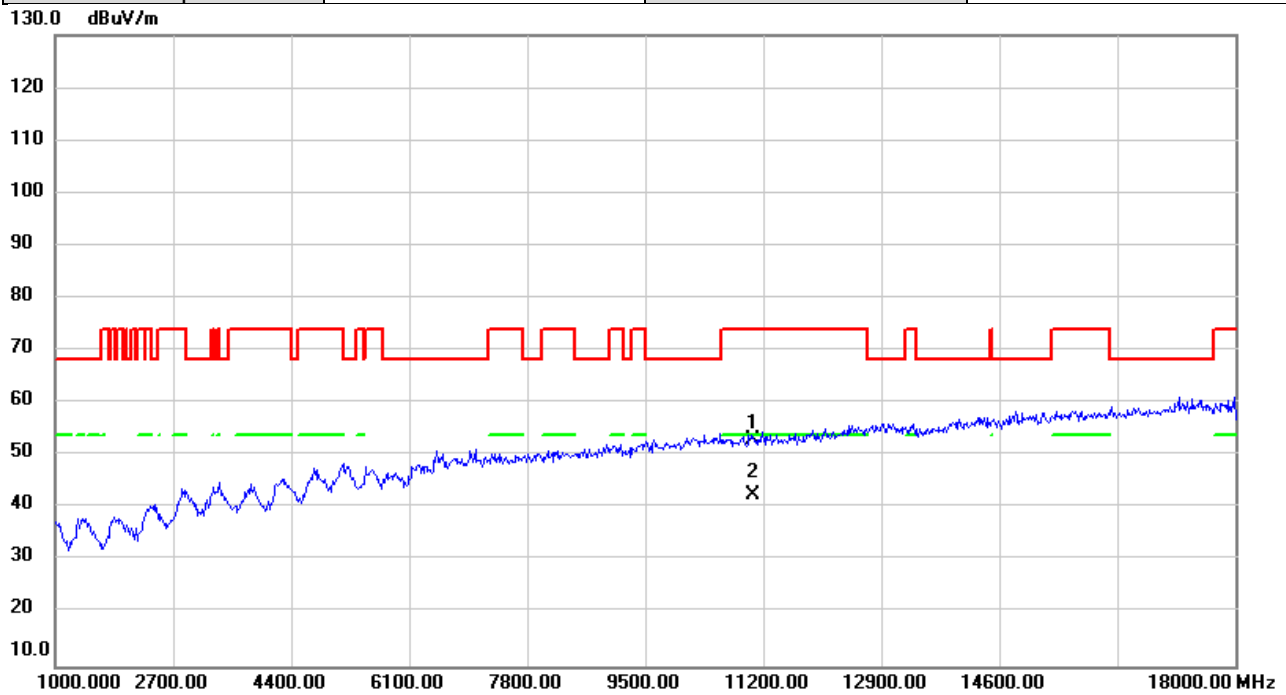


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	46.59	6.37	52.96	74.00	-21.04	peak	
2	*	11060.00	36.07	6.37	42.44	54.00	-11.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5610MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

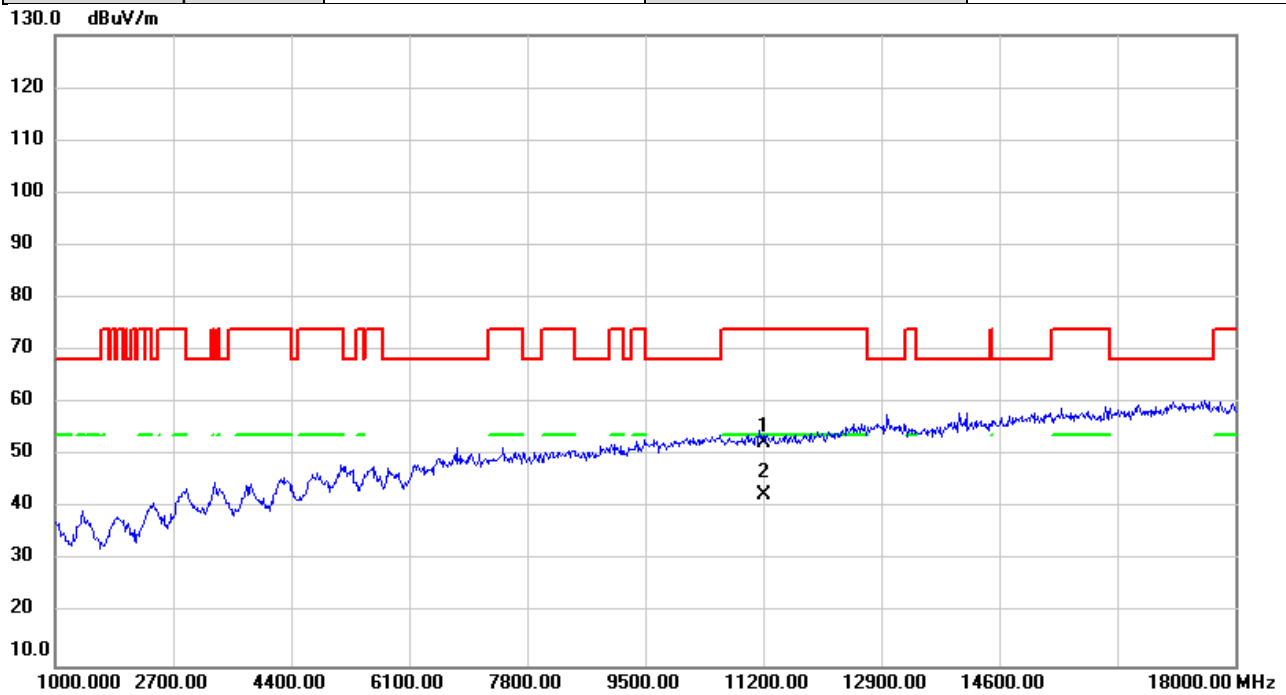


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	46.10	6.39	52.49	74.00	-21.51	peak	
2	*	11220.00	36.05	6.39	42.44	54.00	-11.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5610MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

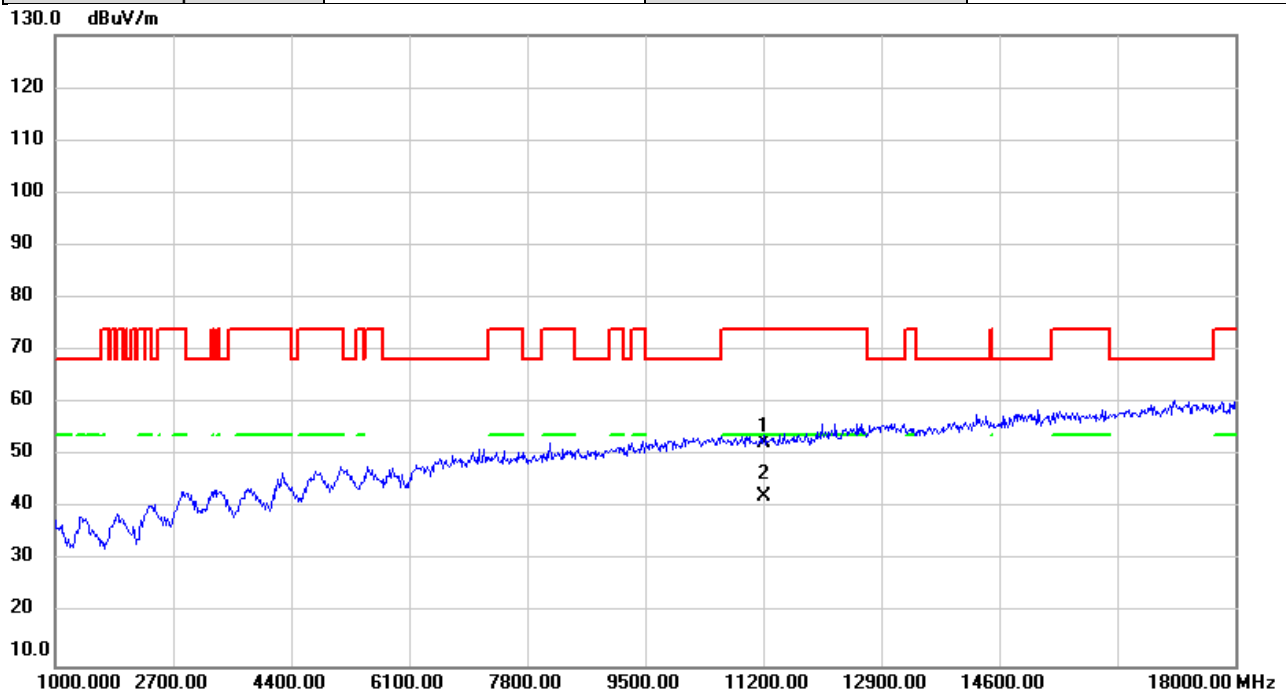


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	46.05	6.39	52.44	74.00	-21.56	peak	
2	*	11220.00	35.94	6.39	42.33	54.00	-11.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5690MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

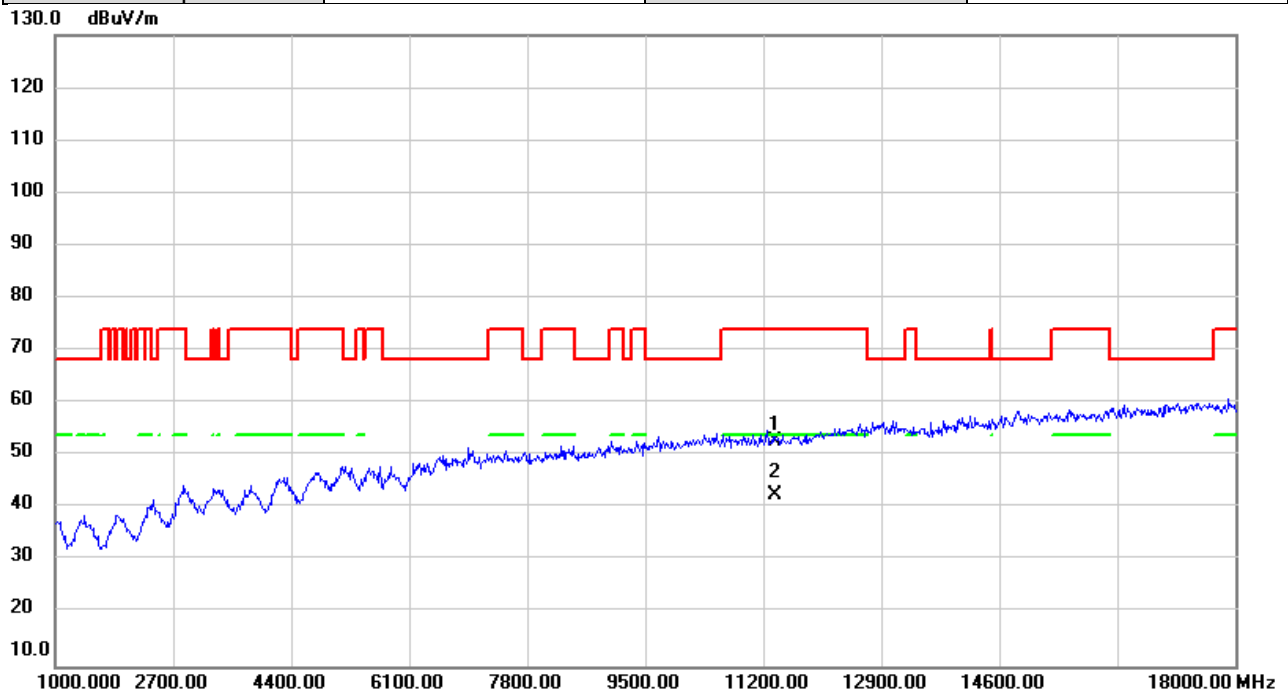


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	46.49	6.41	52.90	74.00	-21.10	peak	
2	*	11380.00	36.16	6.41	42.57	54.00	-11.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5690MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

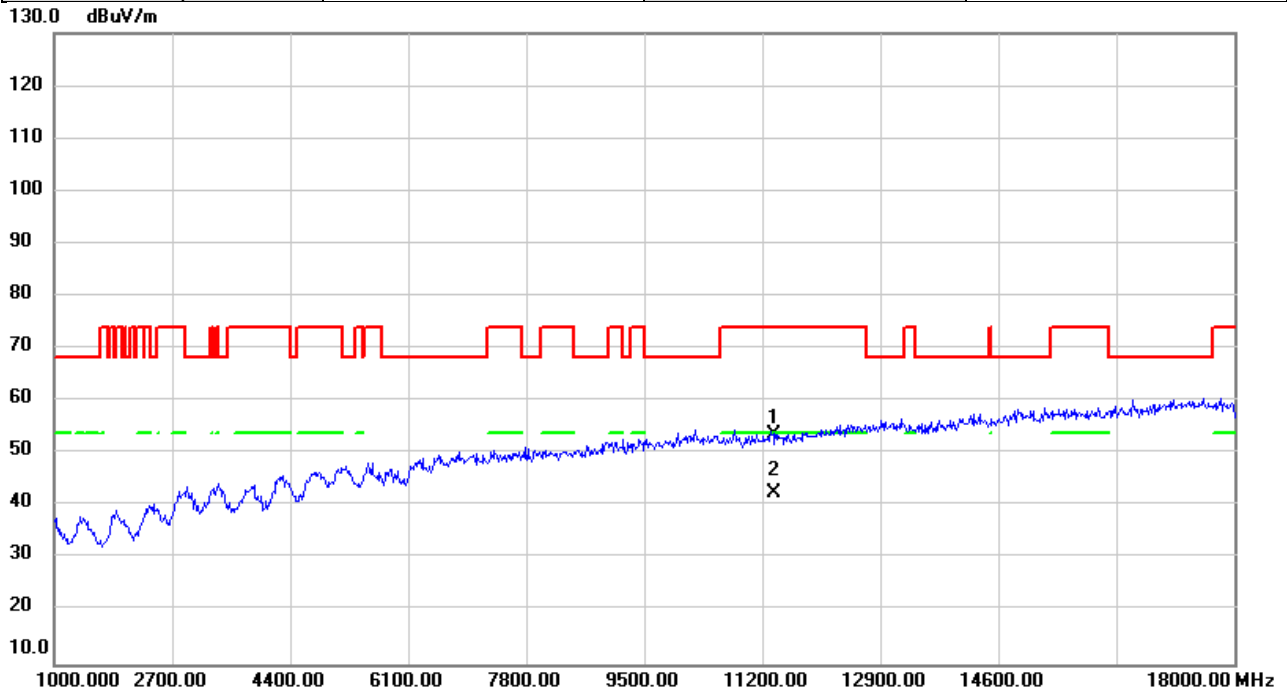


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	47.11	6.41	53.52	74.00	-20.48	peak	
2	*	11380.00	36.24	6.41	42.65	54.00	-11.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5775MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

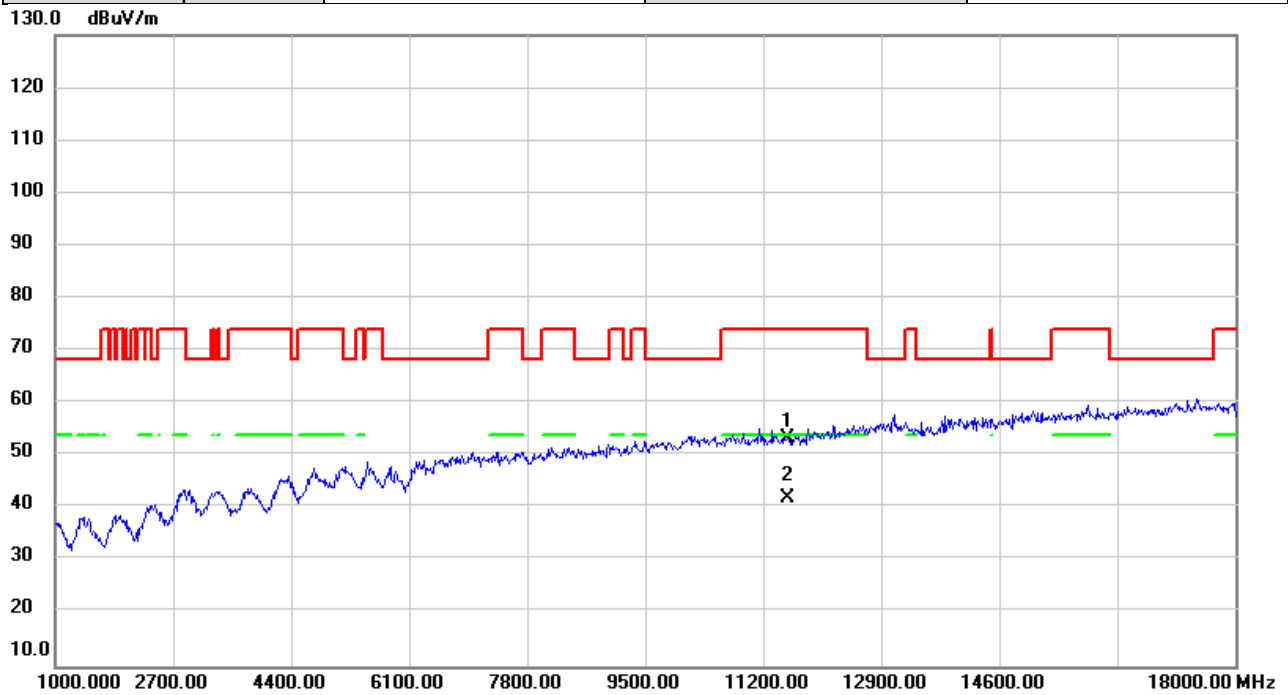


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	46.79	6.47	53.26	74.00	-20.74	peak	
2	*	11550.00	35.62	6.47	42.09	54.00	-11.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/5
Test Frequency	5775MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

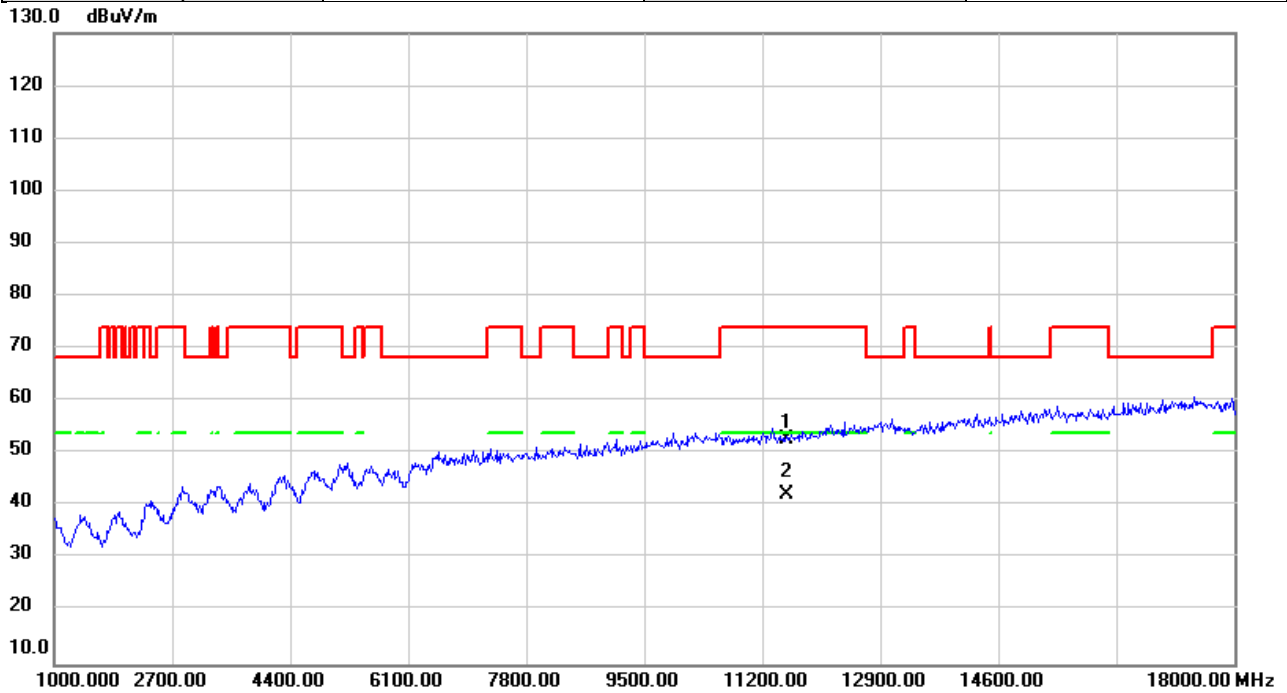


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	46.43	6.47	52.90	74.00	-21.10	peak	
2	*	11550.00	35.69	6.47	42.16	54.00	-11.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/5
Test Frequency	5250MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

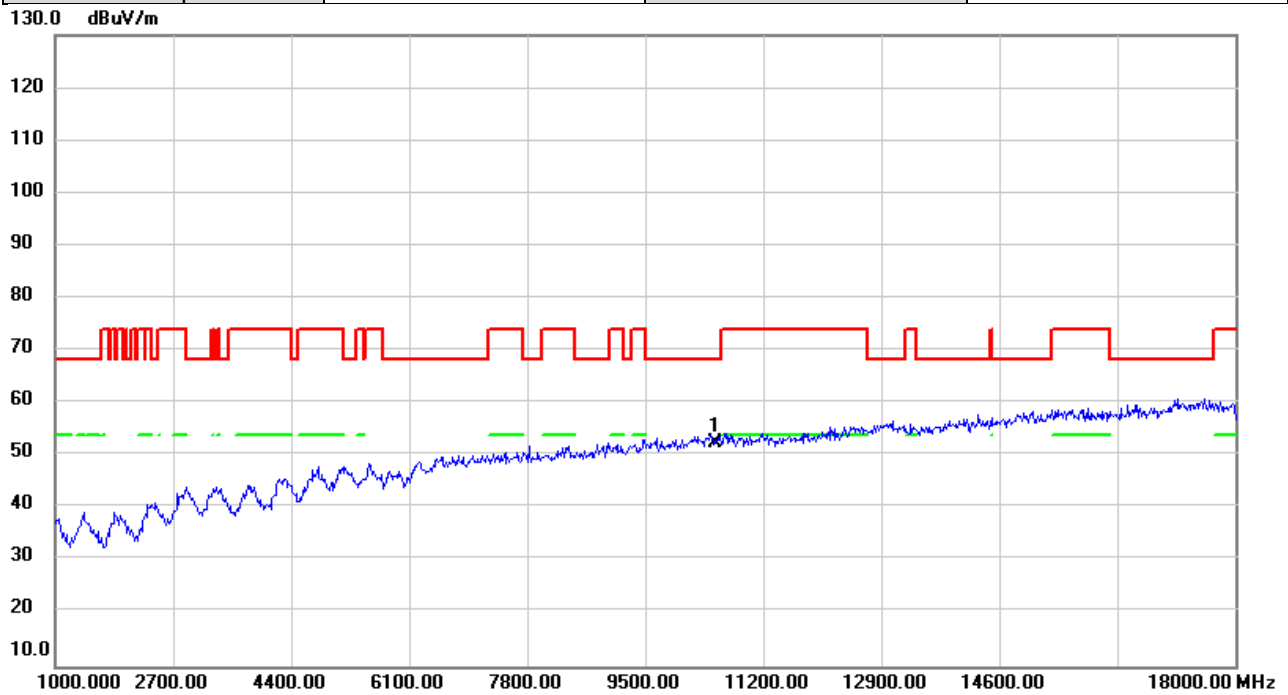


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	45.45	7.10	52.55	68.20	-15.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/5
Test Frequency	5250MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

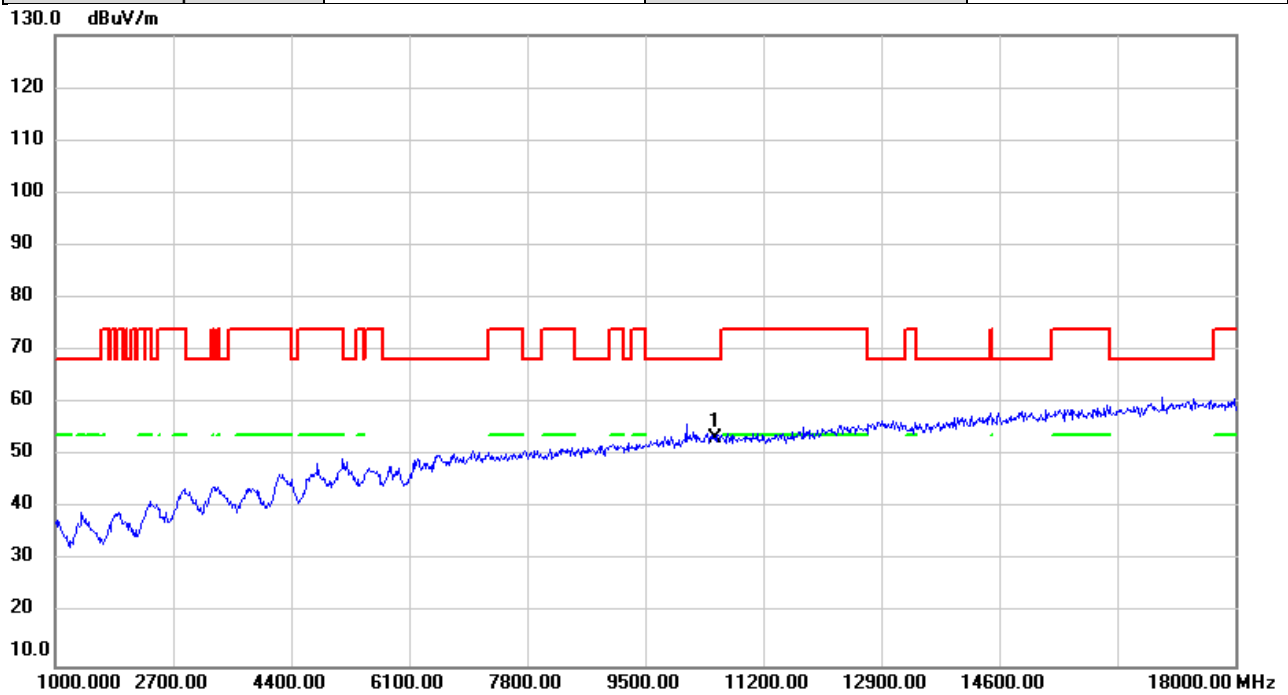


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	46.25	7.10	53.35	68.20	-14.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/5
Test Frequency	5570MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

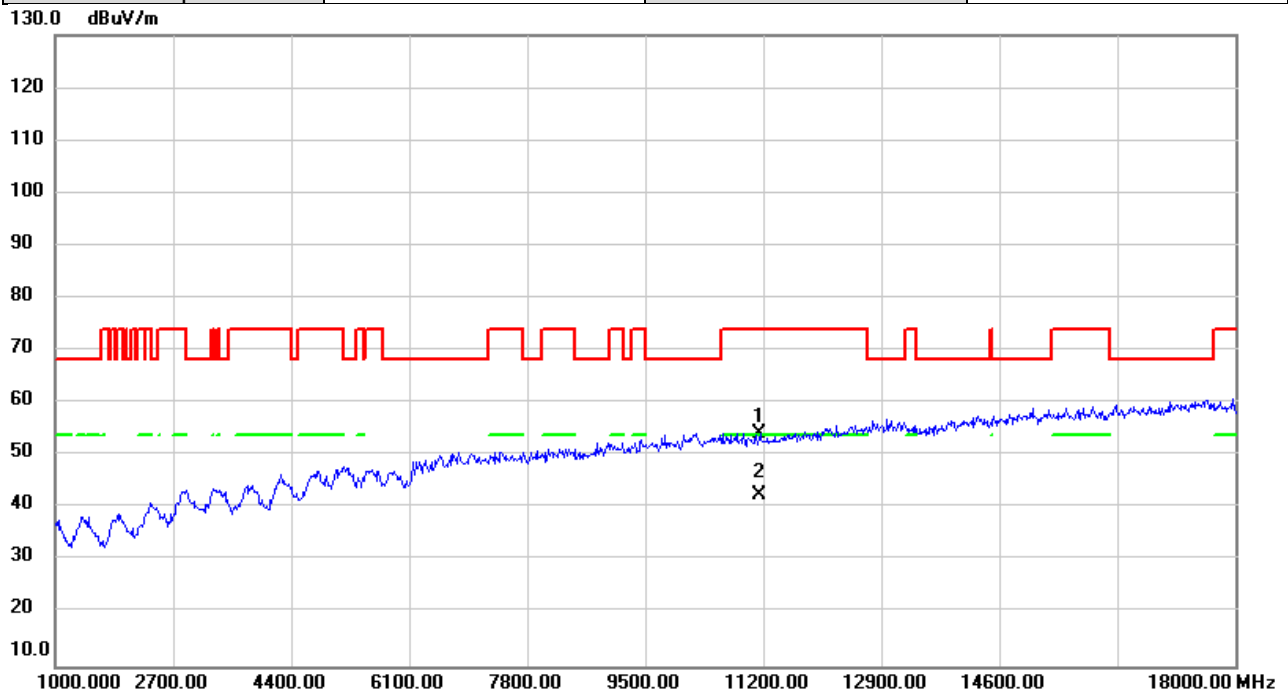


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	47.83	6.38	54.21	74.00	-19.79	peak	
2	*	11140.00	36.25	6.38	42.63	54.00	-11.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/5
Test Frequency	5570MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

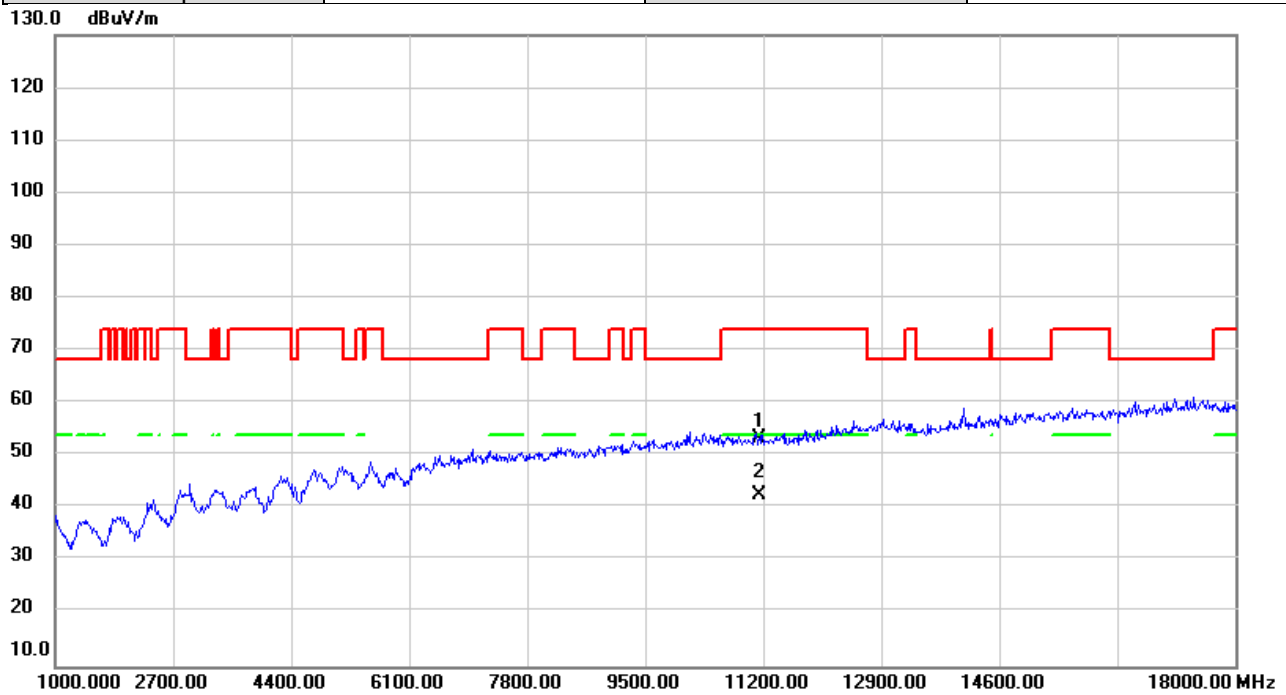


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	46.87	6.38	53.25	74.00	-20.75	peak	
2	*	11140.00	36.24	6.38	42.62	54.00	-11.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5180MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

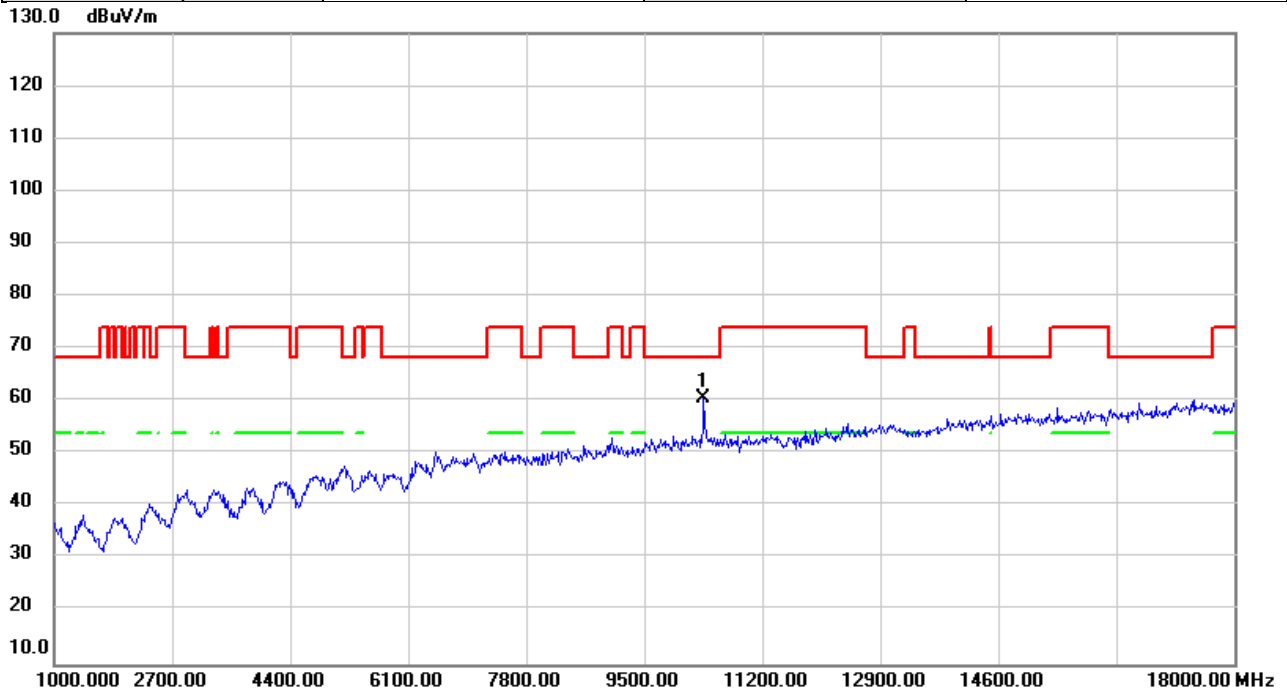


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	53.55	7.07	60.62	68.20	-7.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

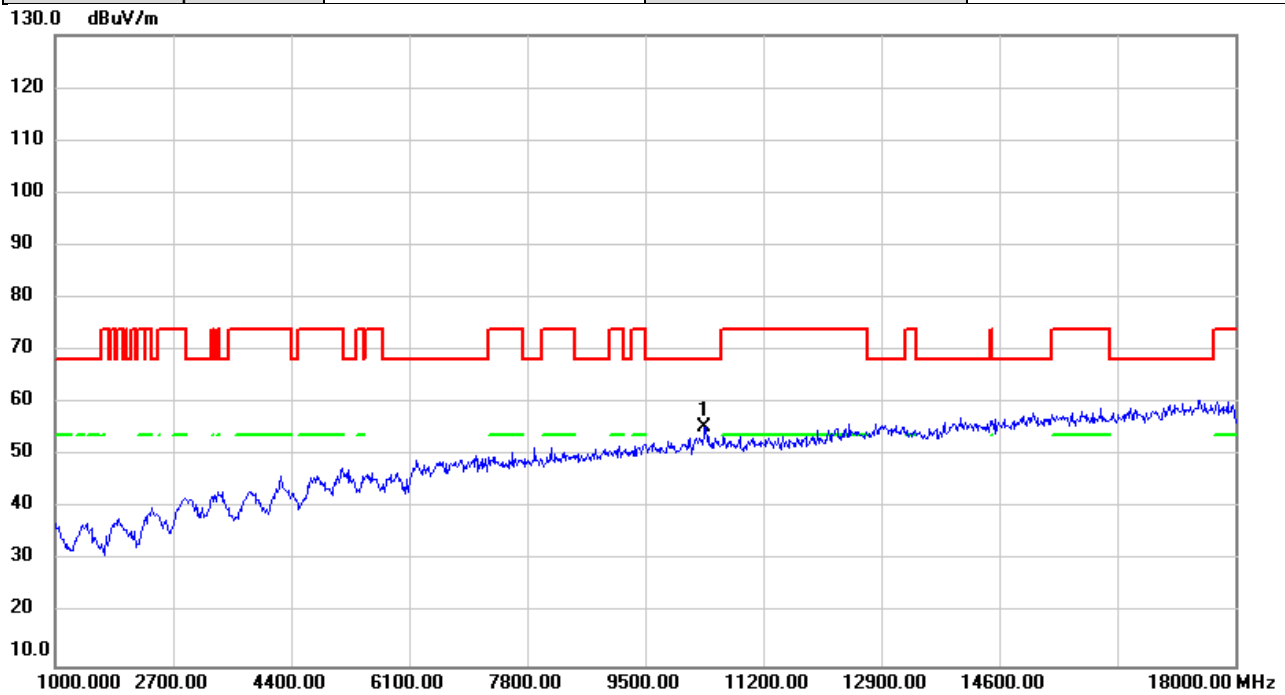


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	48.51	7.07	55.58	68.20	-12.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5200MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

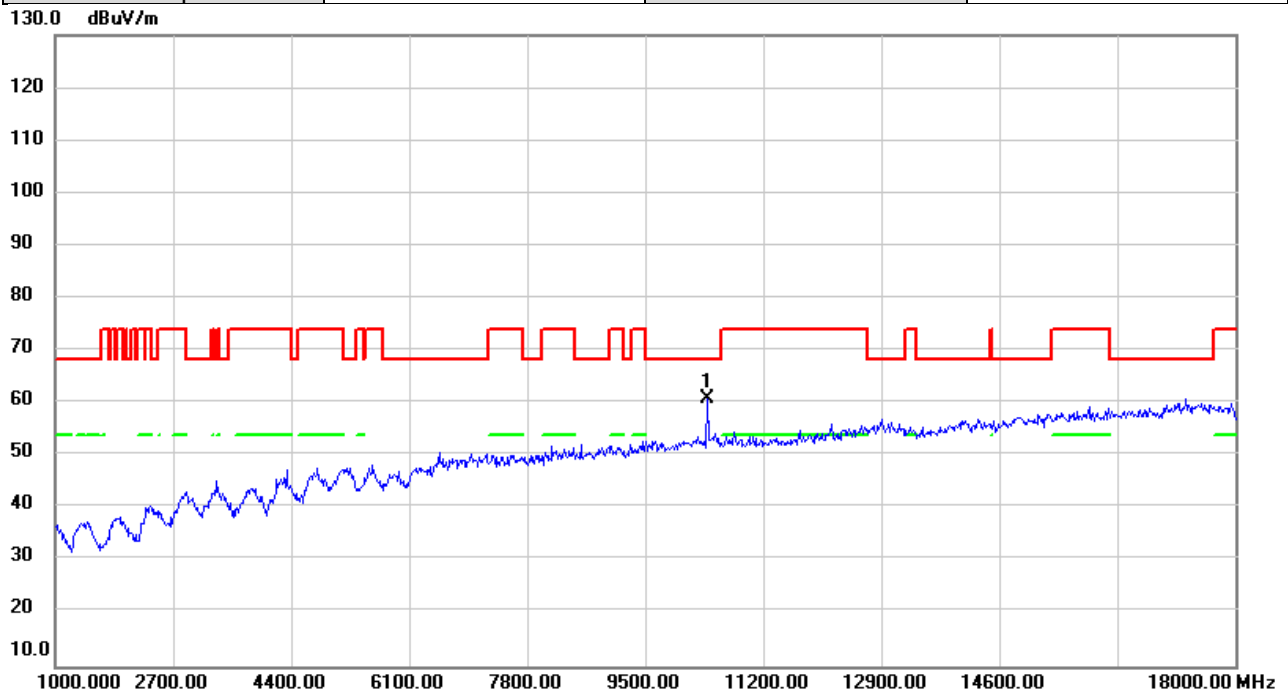


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	53.80	7.08	60.88	68.20	-7.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5200MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

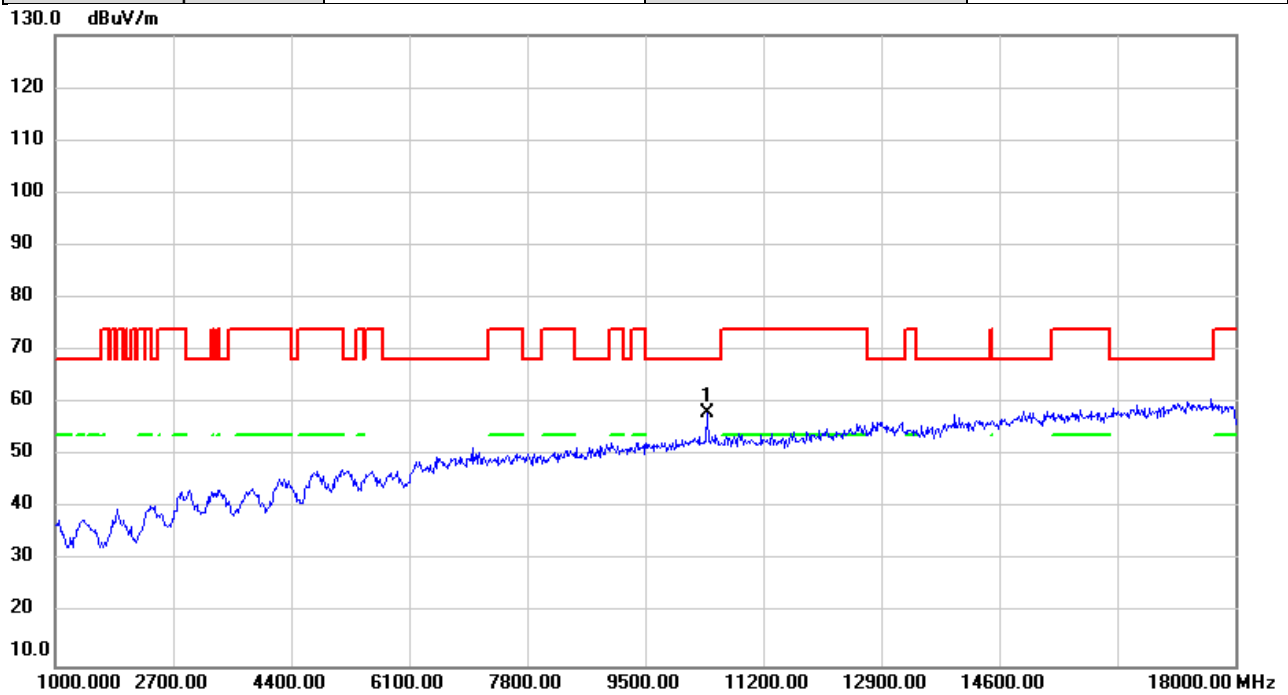


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	51.03	7.08	58.11	68.20	-10.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5240MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

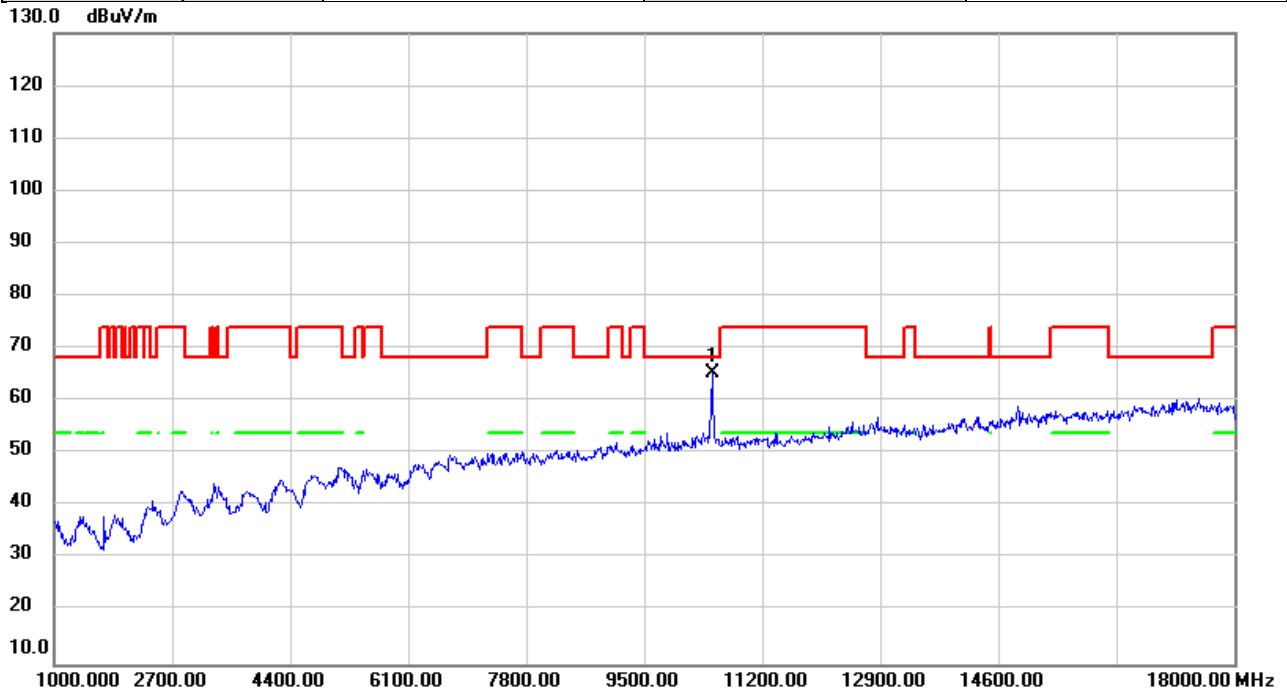


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	58.20	7.10	65.30	68.20	-2.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

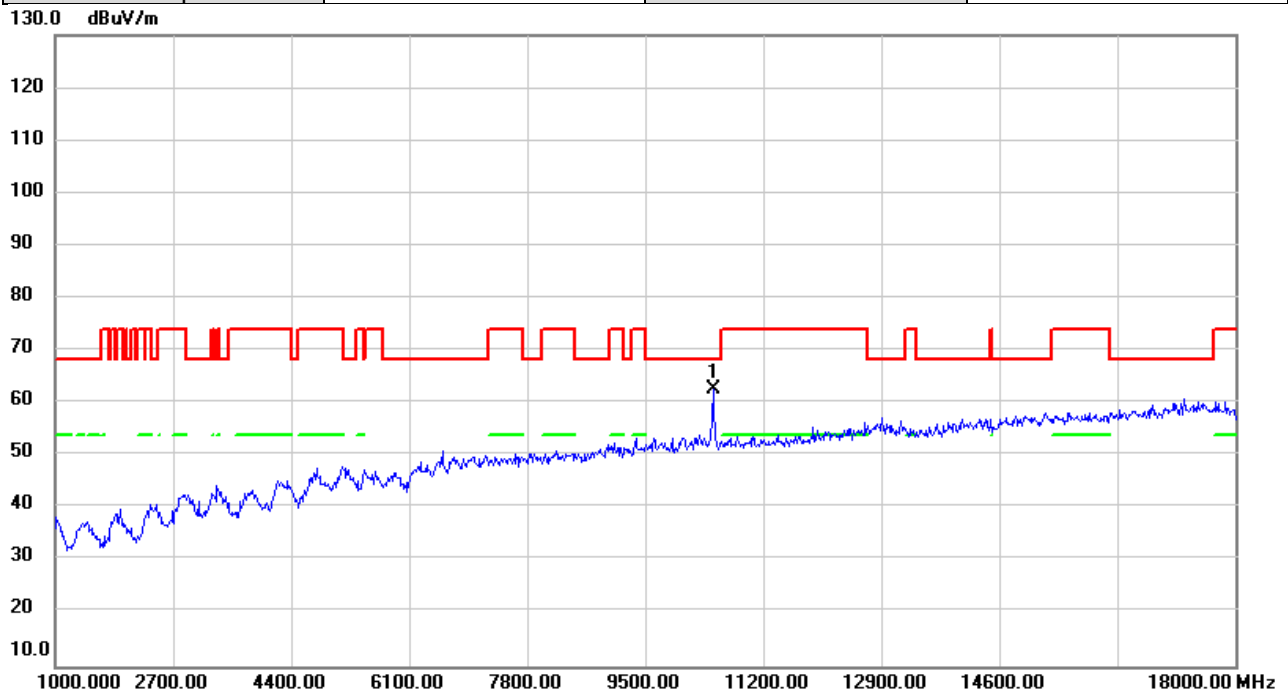


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	55.50	7.10	62.60	68.20	-5.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5260MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

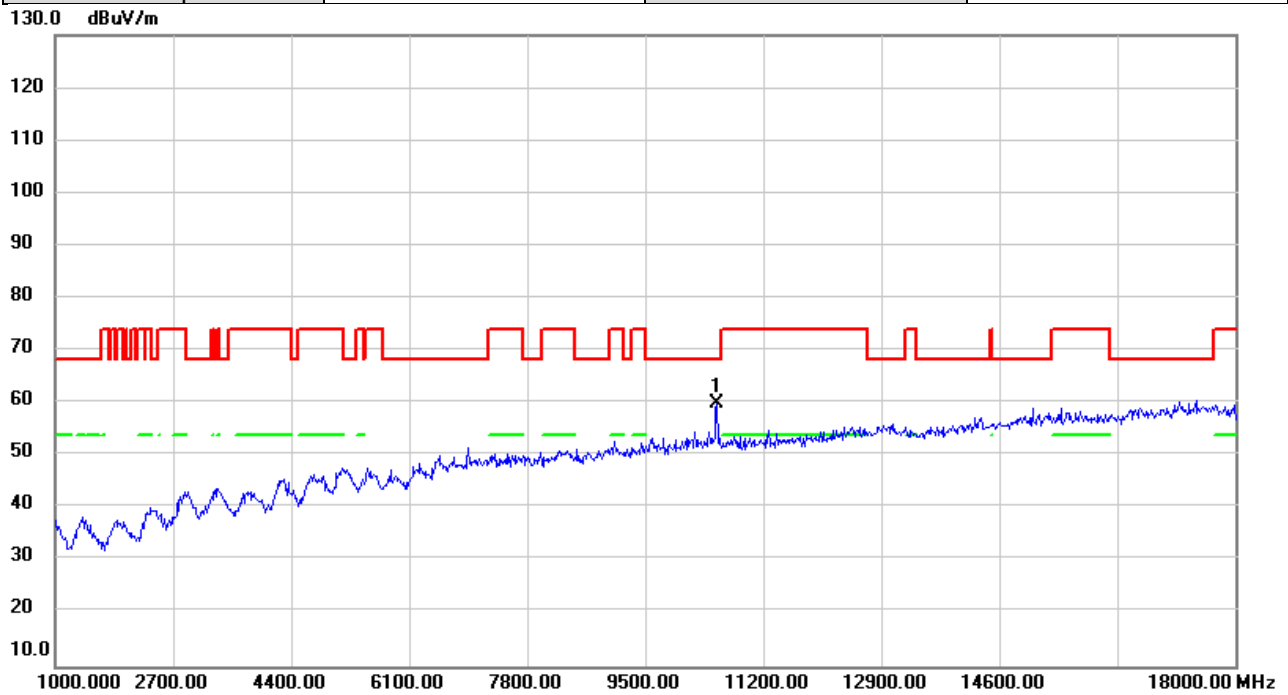


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	53.01	7.07	60.08	68.20	-8.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

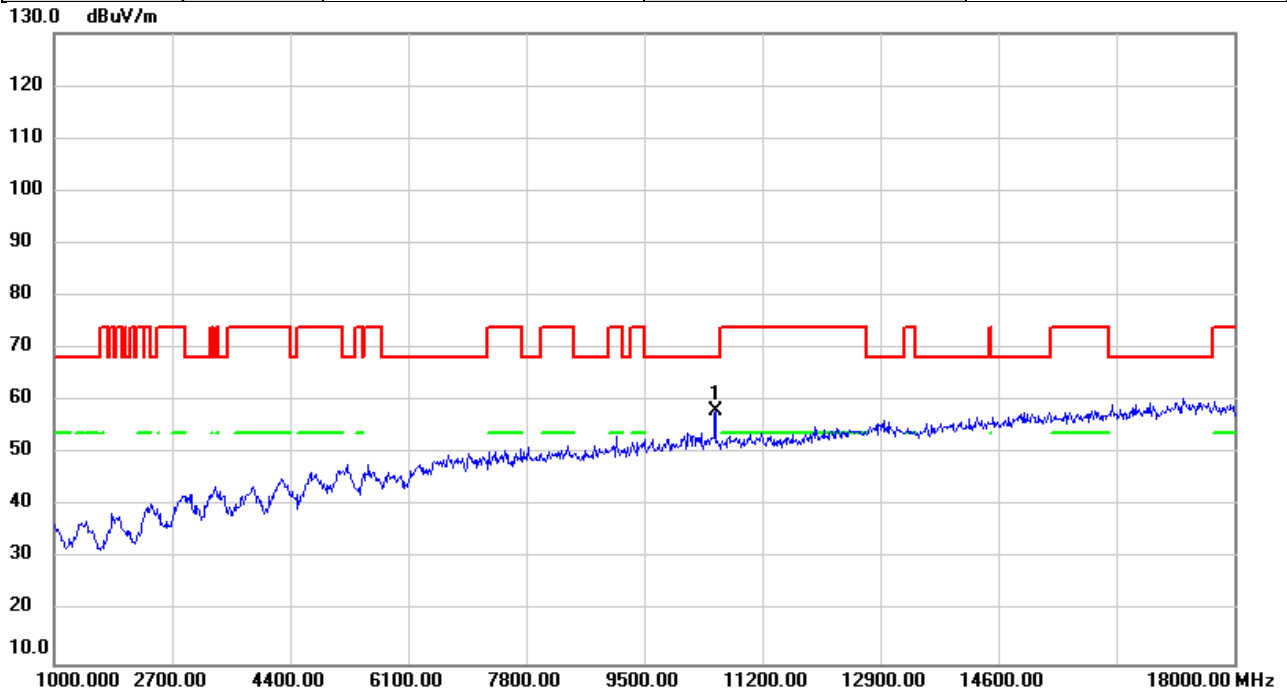


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	51.09	7.07	58.16	68.20	-10.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5300MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

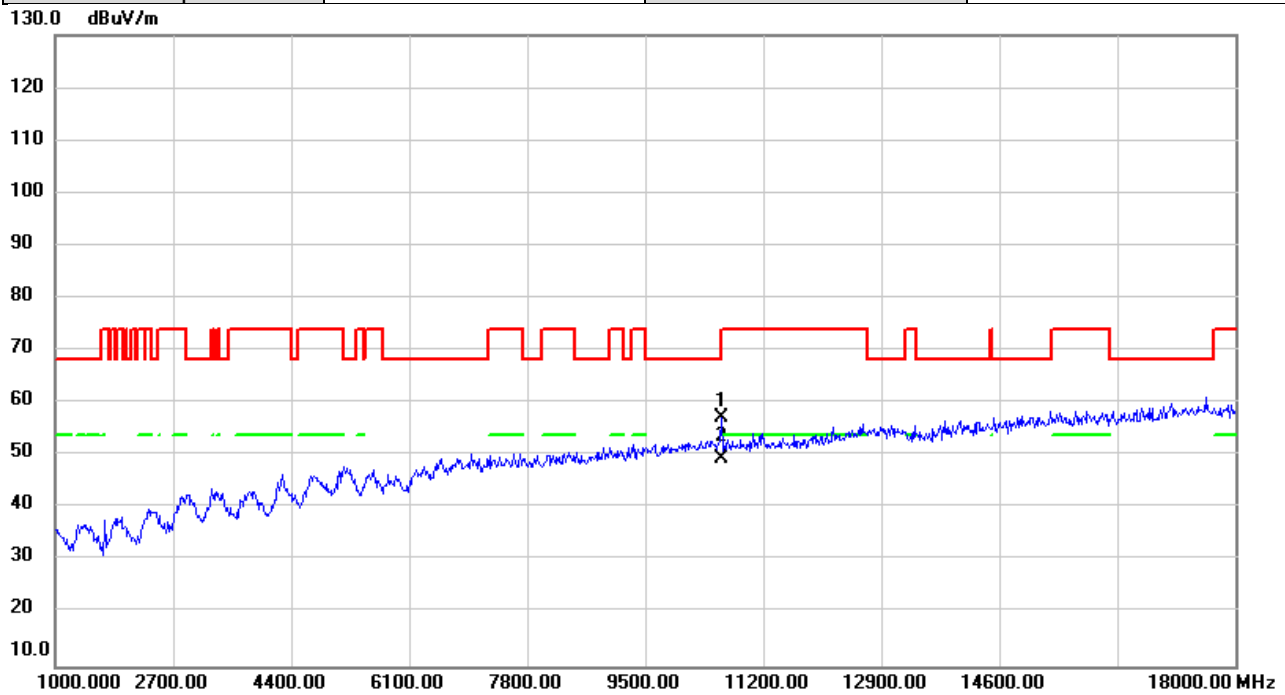


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	50.35	6.95	57.30	68.20	-10.90	peak	
2	*	10600.00	42.55	6.95	49.50	54.00	-4.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5300MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

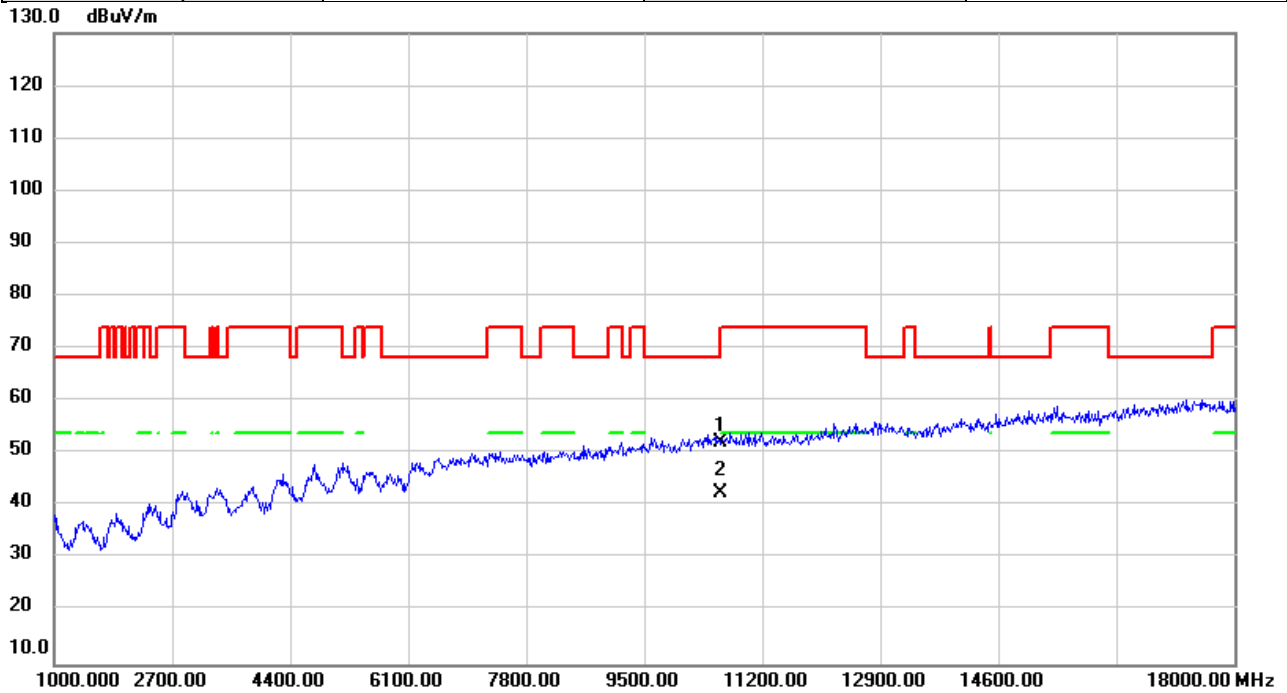


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	45.30	6.95	52.25	68.20	-15.95	peak	
2	*	10600.00	35.62	6.95	42.57	54.00	-11.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5320MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

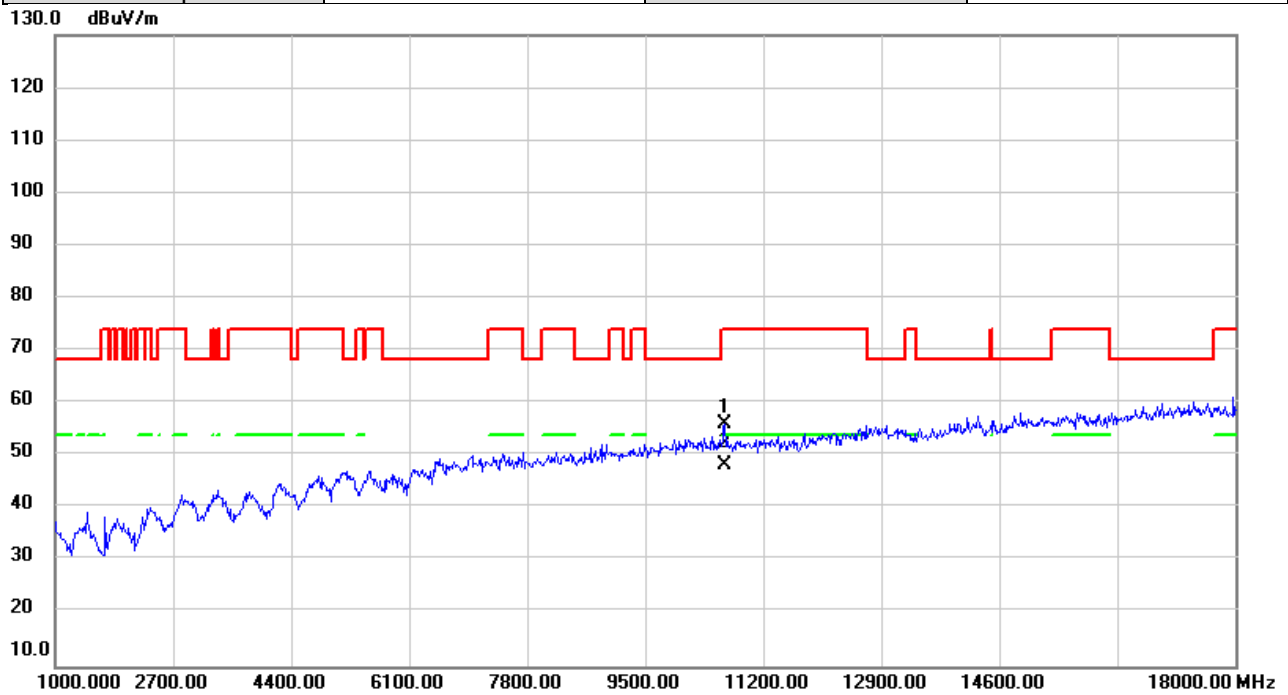


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	49.02	6.89	55.91	74.00	-18.09	peak	
2	*	10640.00	41.23	6.89	48.12	54.00	-5.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

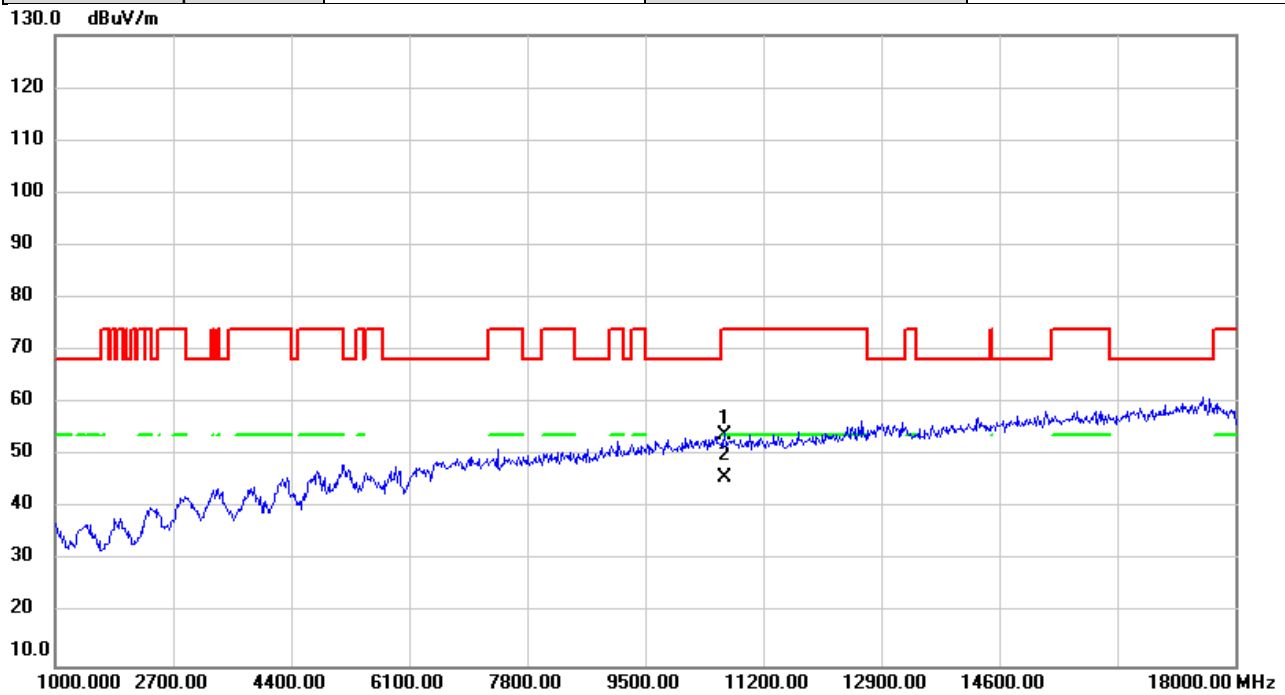


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	47.01	6.89	53.90	74.00	-20.10	peak	
2	*	10640.00	39.11	6.89	46.00	54.00	-8.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5500MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

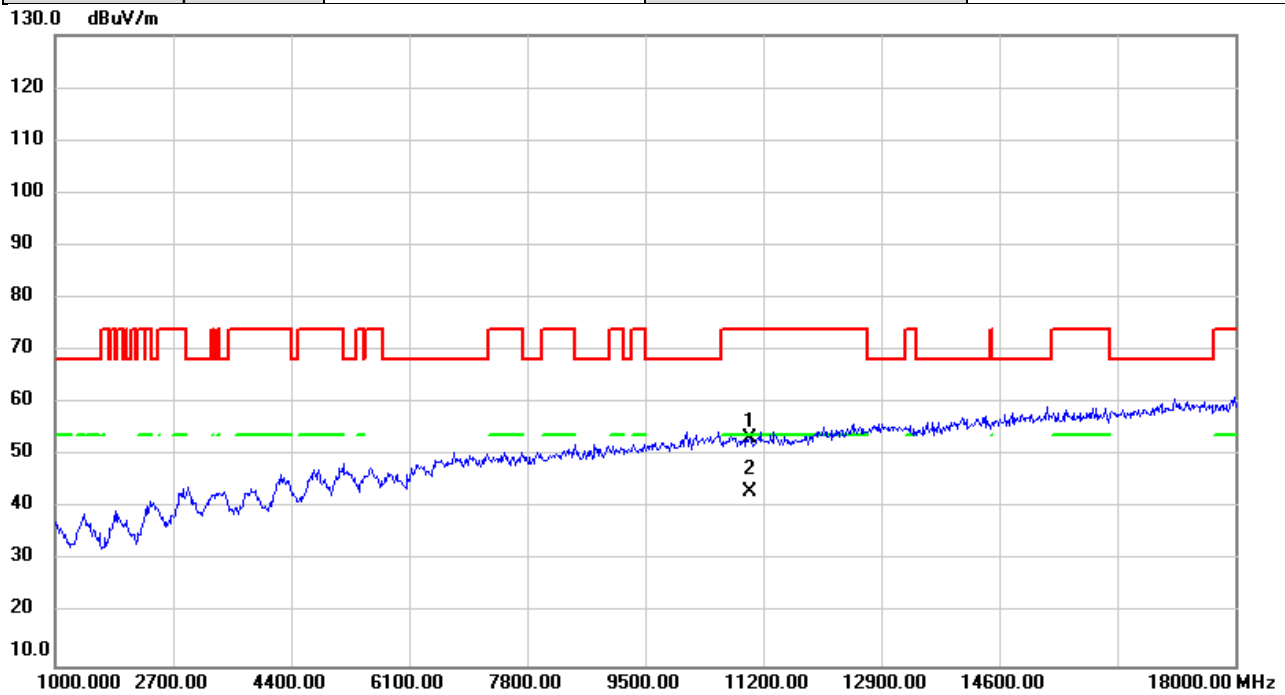


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	46.93	6.36	53.29	74.00	-20.71	peak	
2	*	11000.00	36.77	6.36	43.13	54.00	-10.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

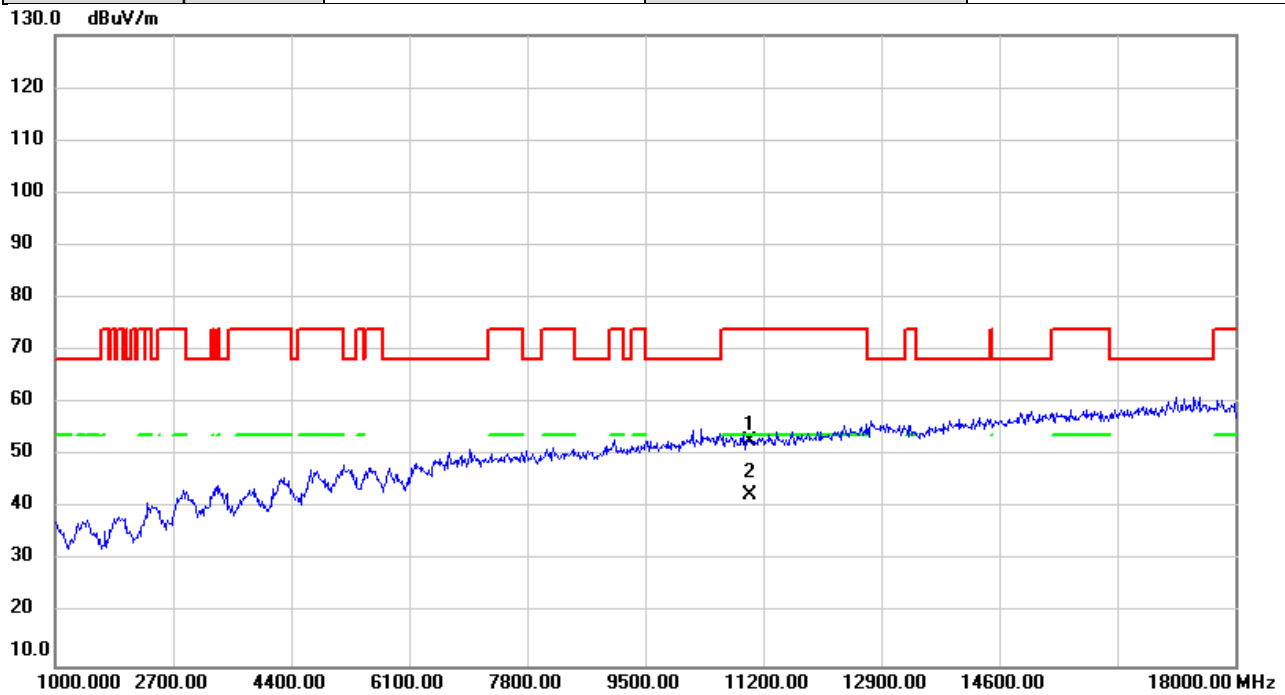


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	46.45	6.36	52.81	74.00	-21.19	peak	
2	*	11000.00	36.20	6.36	42.56	54.00	-11.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5580MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

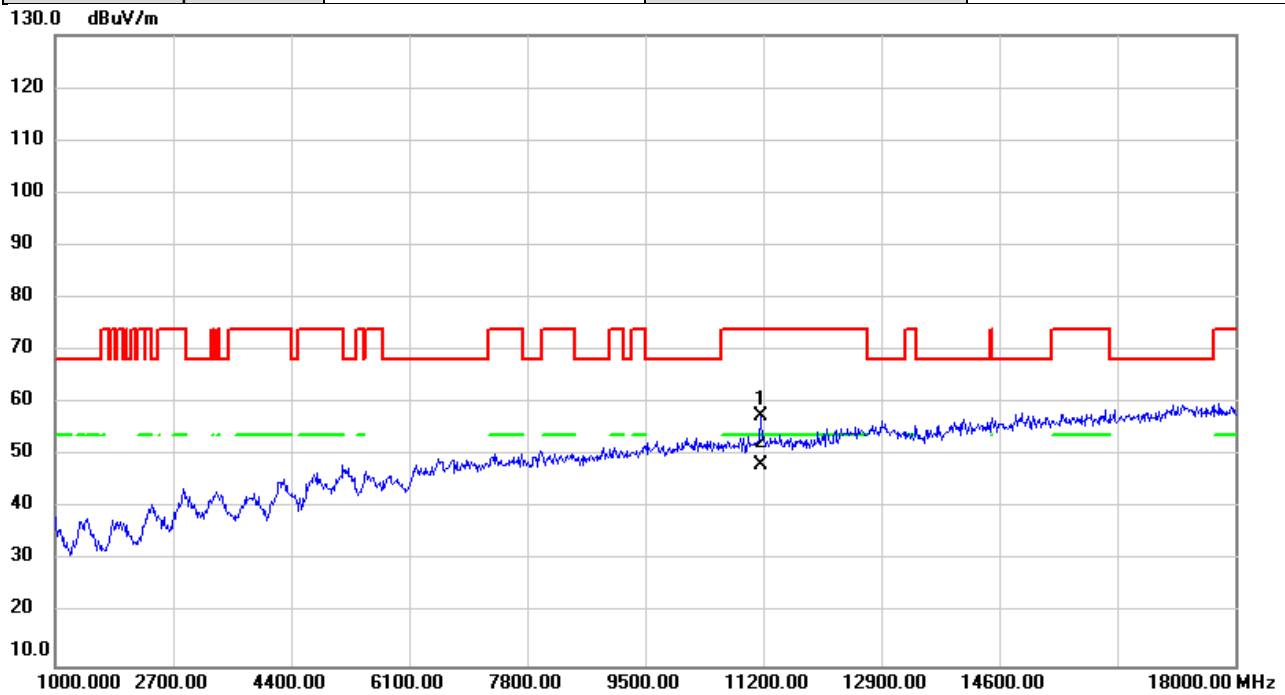


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	51.10	6.38	57.48	74.00	-16.52	peak	
2	*	11160.00	41.84	6.38	48.22	54.00	-5.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5580MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

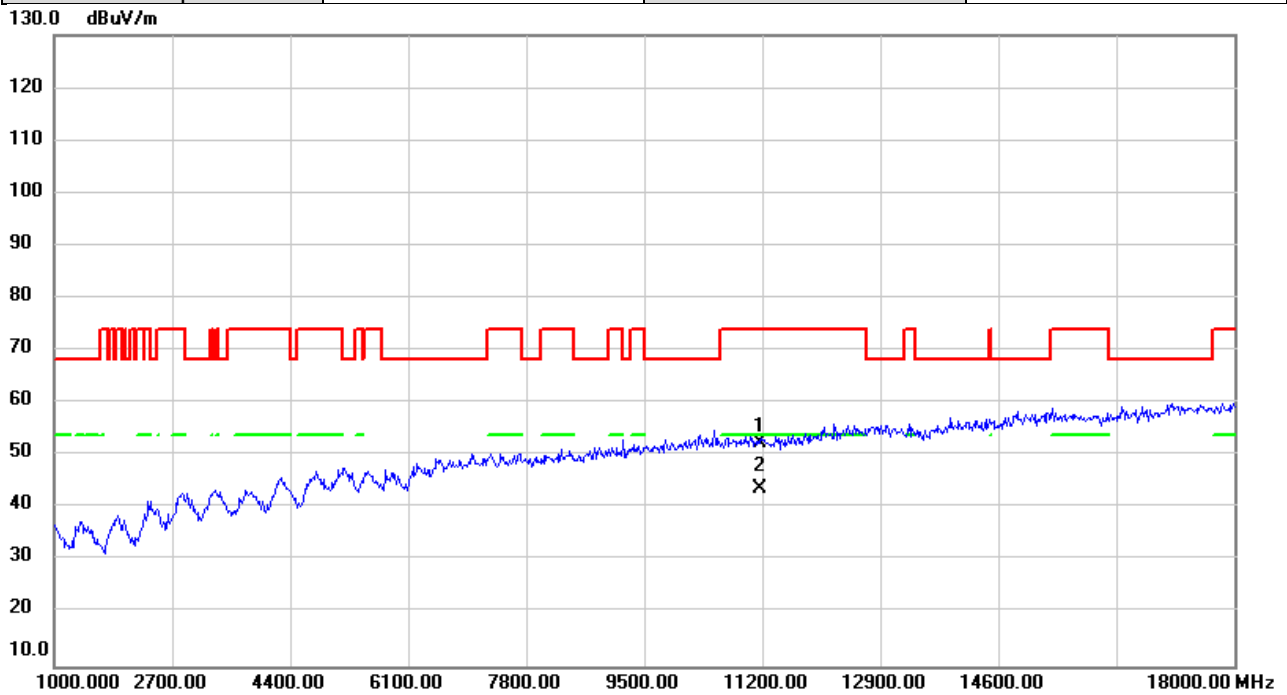


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	46.00	6.38	52.38	74.00	-21.62	peak	
2	*	11160.00	37.48	6.38	43.86	54.00	-10.14	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5700MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

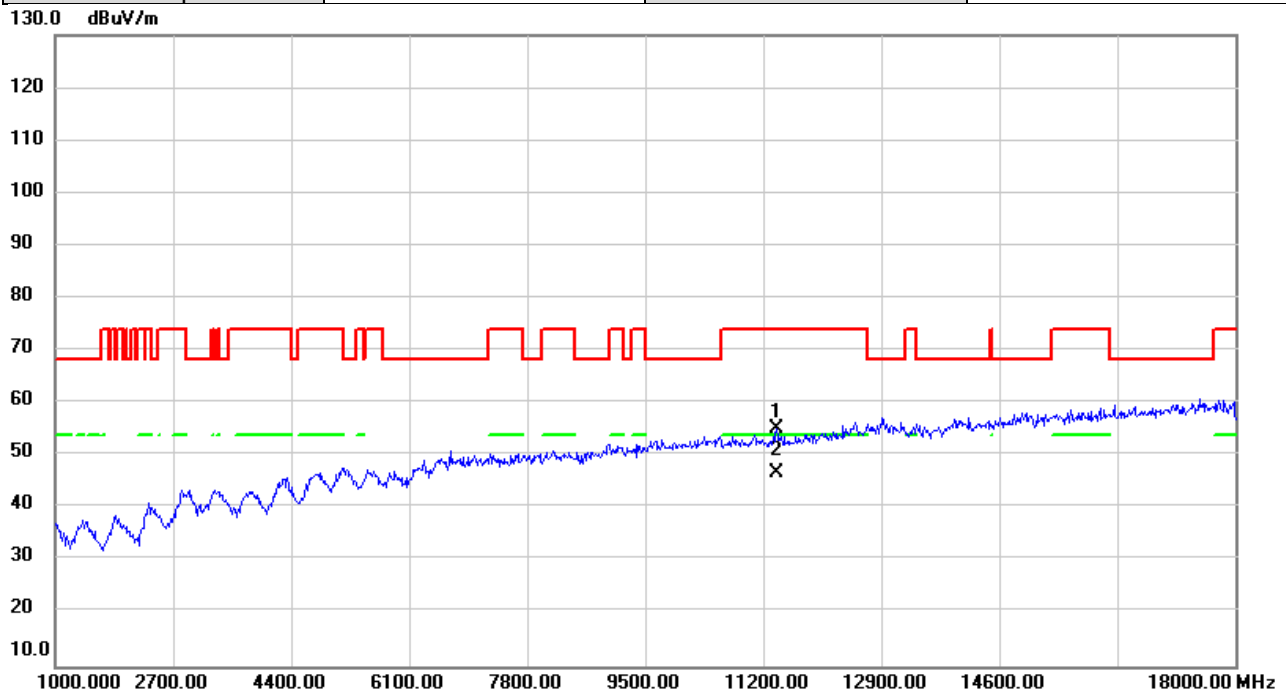


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	48.64	6.41	55.05	74.00	-18.95	peak	
2	*	11400.00	40.31	6.41	46.72	54.00	-7.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

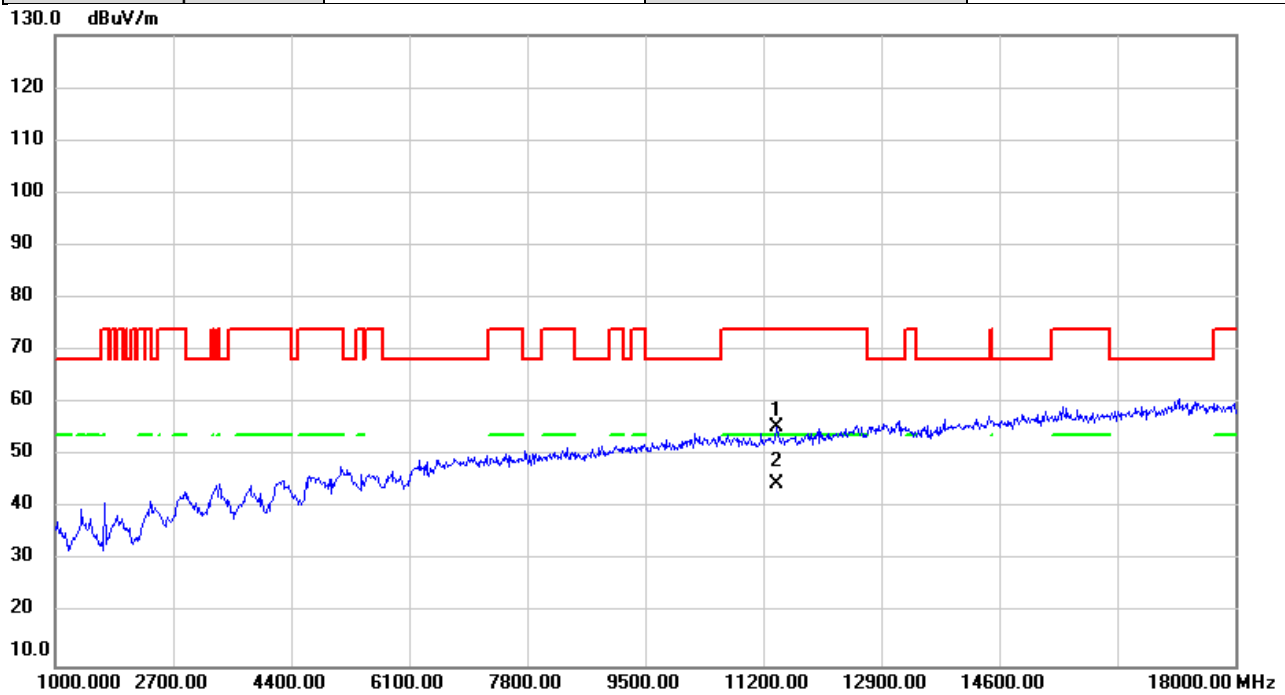


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11403.43	49.17	6.40	55.57	74.00	-18.43	peak	
2		11403.43	38.34	6.40	44.74	54.00	-9.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5720MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

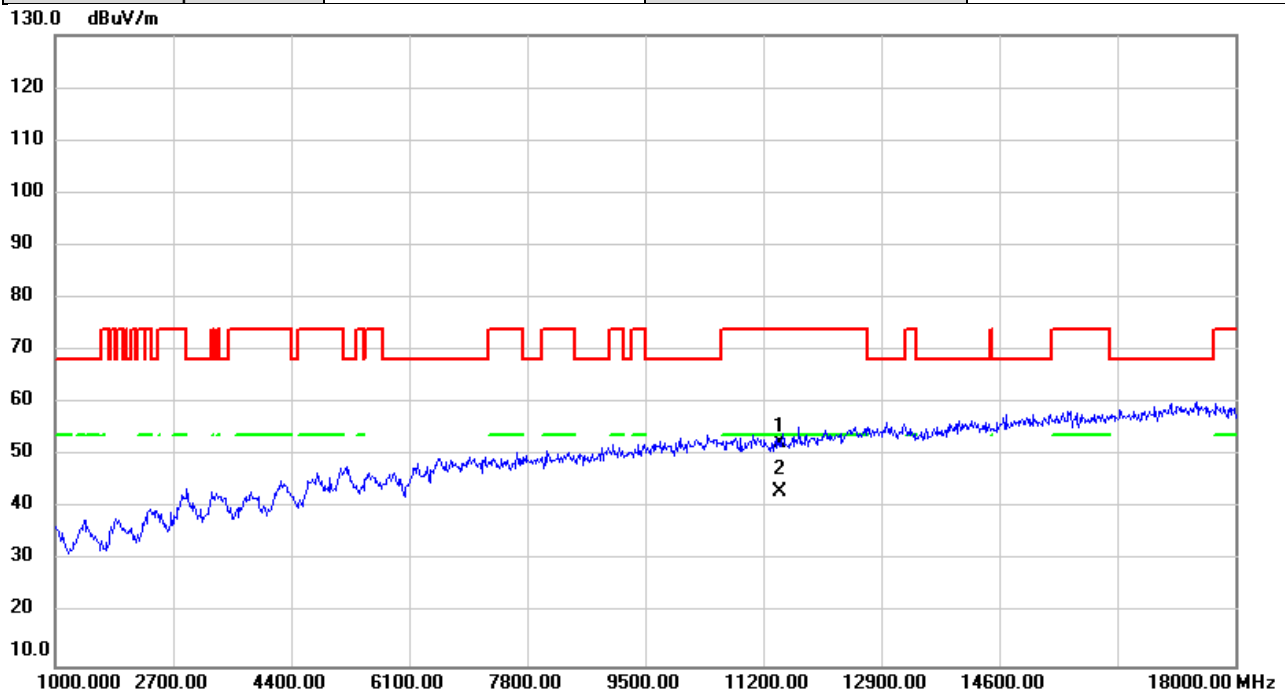


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	46.11	6.41	52.52	74.00	-21.48	peak	
2	*	11440.00	36.60	6.41	43.01	54.00	-10.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5720MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

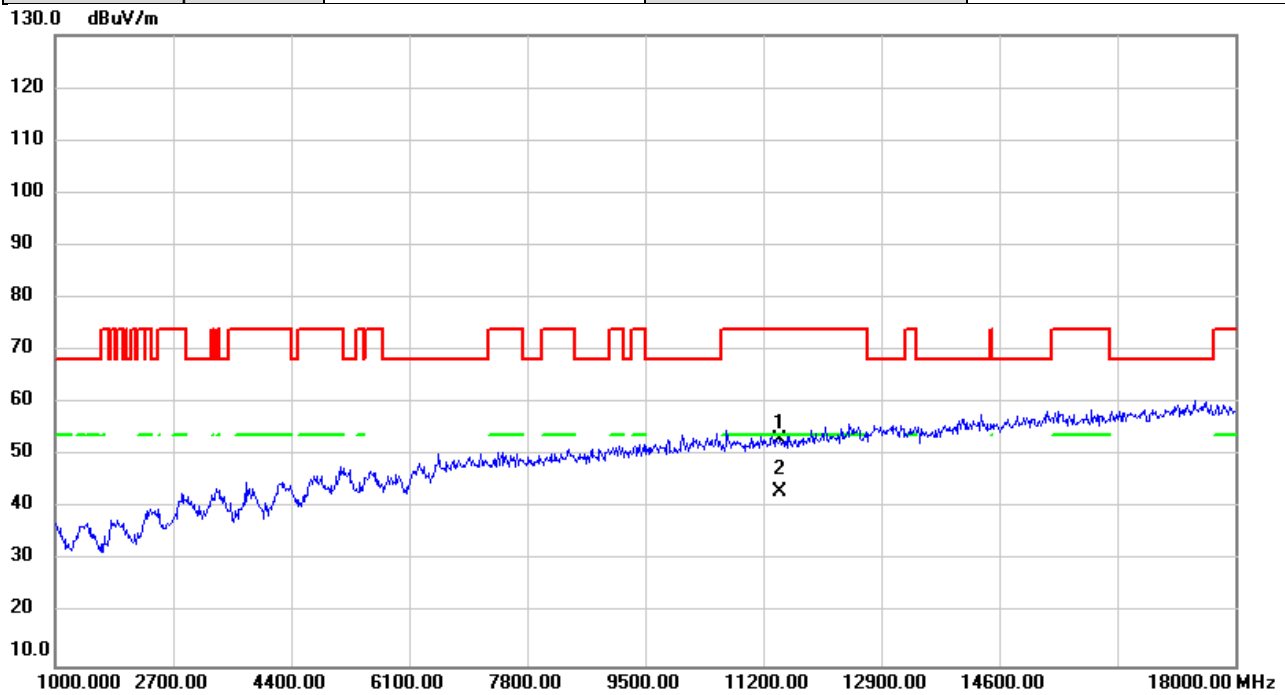


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	46.77	6.41	53.18	74.00	-20.82	peak	
2	*	11440.00	36.64	6.41	43.05	54.00	-10.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

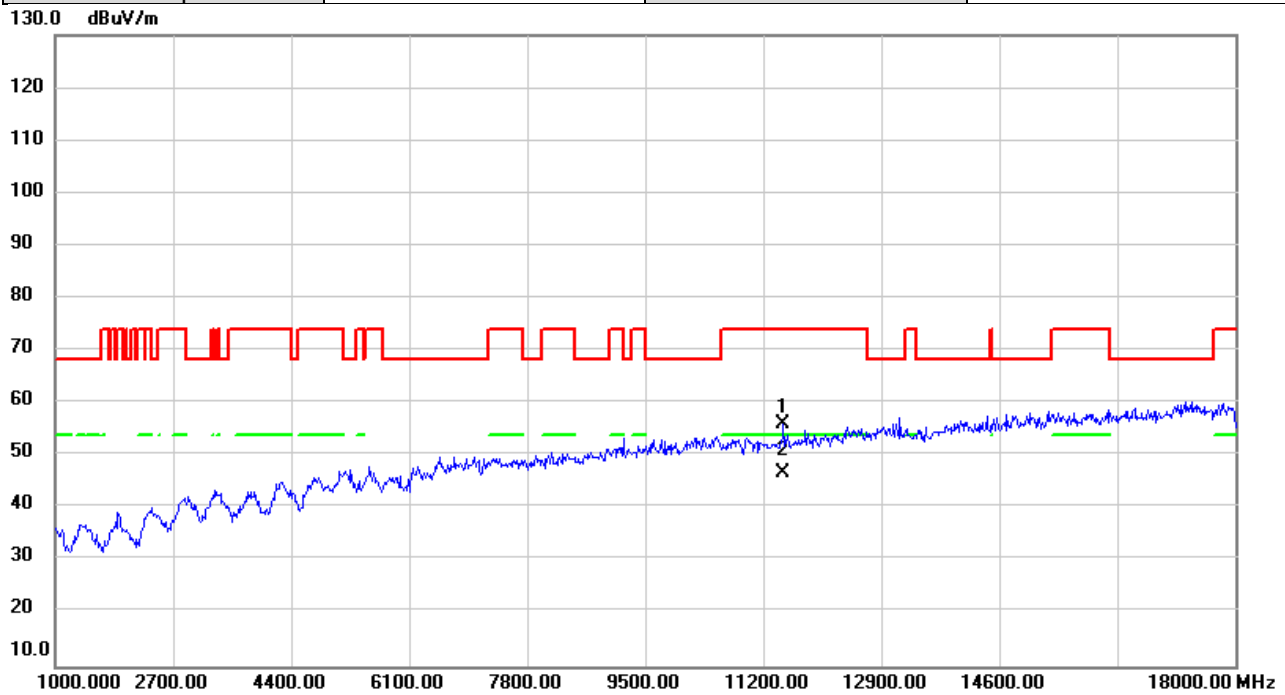


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	49.62	6.42	56.04	74.00	-17.96	peak	
2	*	11490.00	40.37	6.42	46.79	54.00	-7.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

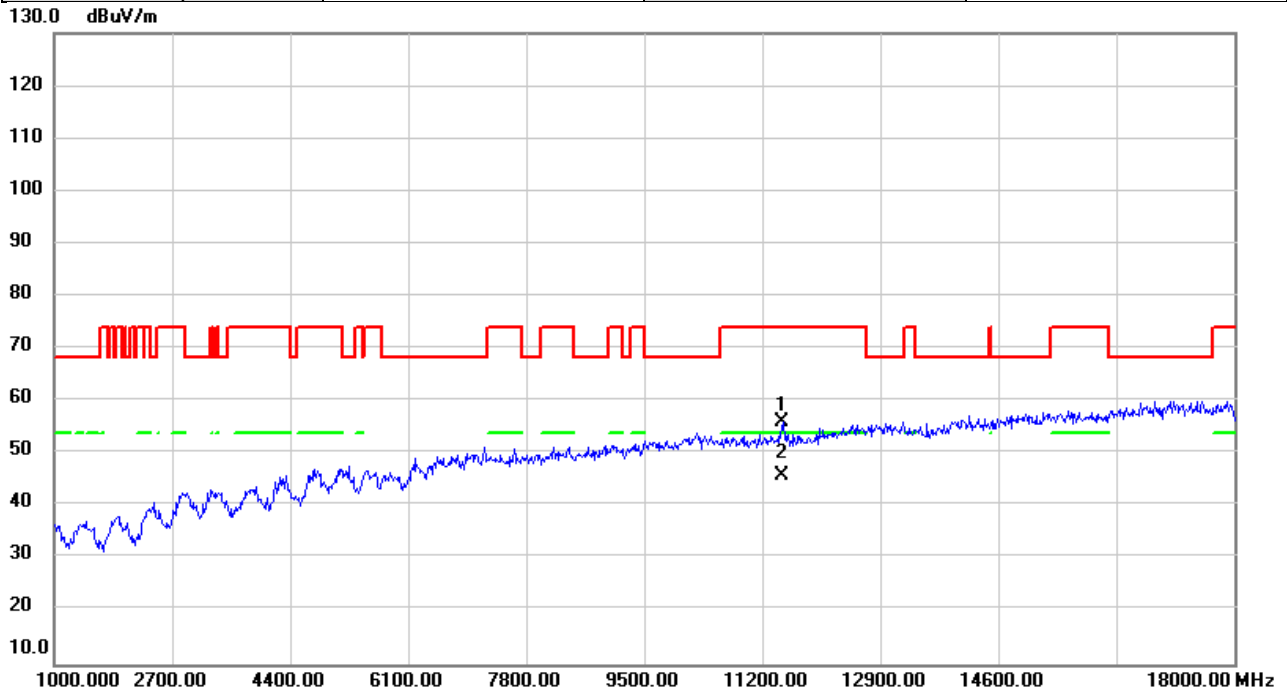


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	49.77	6.42	56.19	74.00	-17.81	peak	
2	*	11490.00	39.30	6.42	45.72	54.00	-8.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5785MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

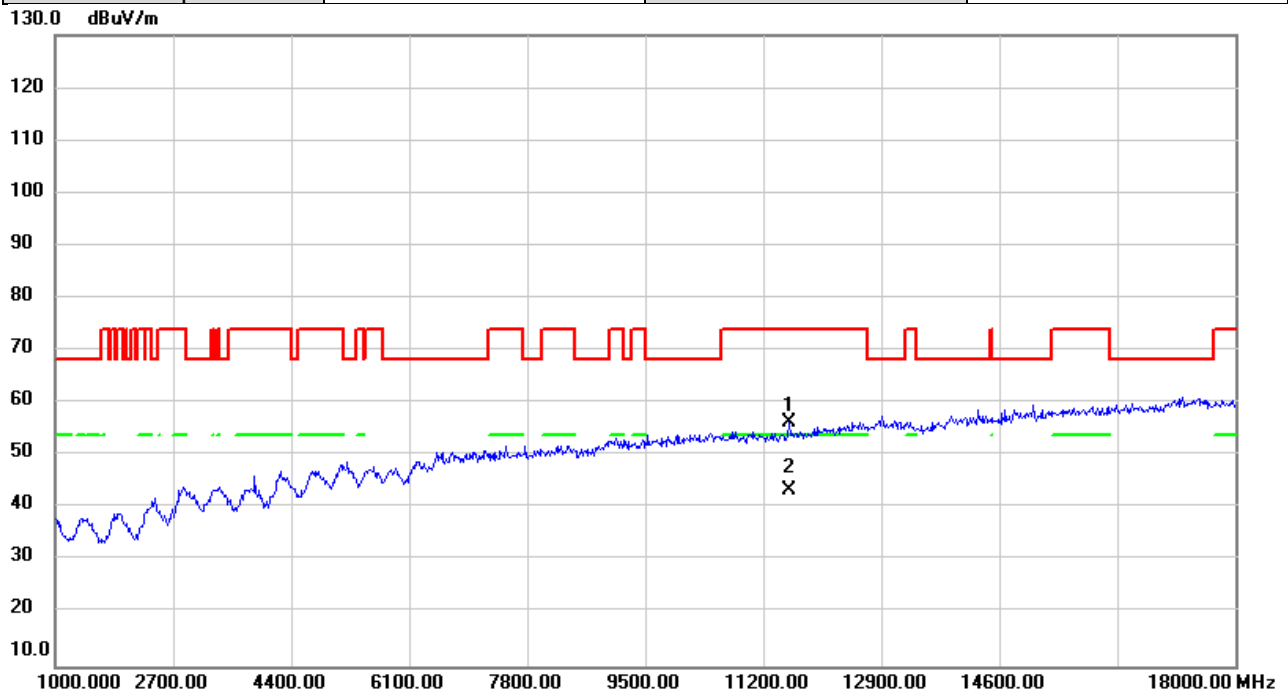


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	49.87	6.50	56.37	74.00	-17.63	peak	
2	*	11570.00	36.81	6.50	43.31	54.00	-10.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5785MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

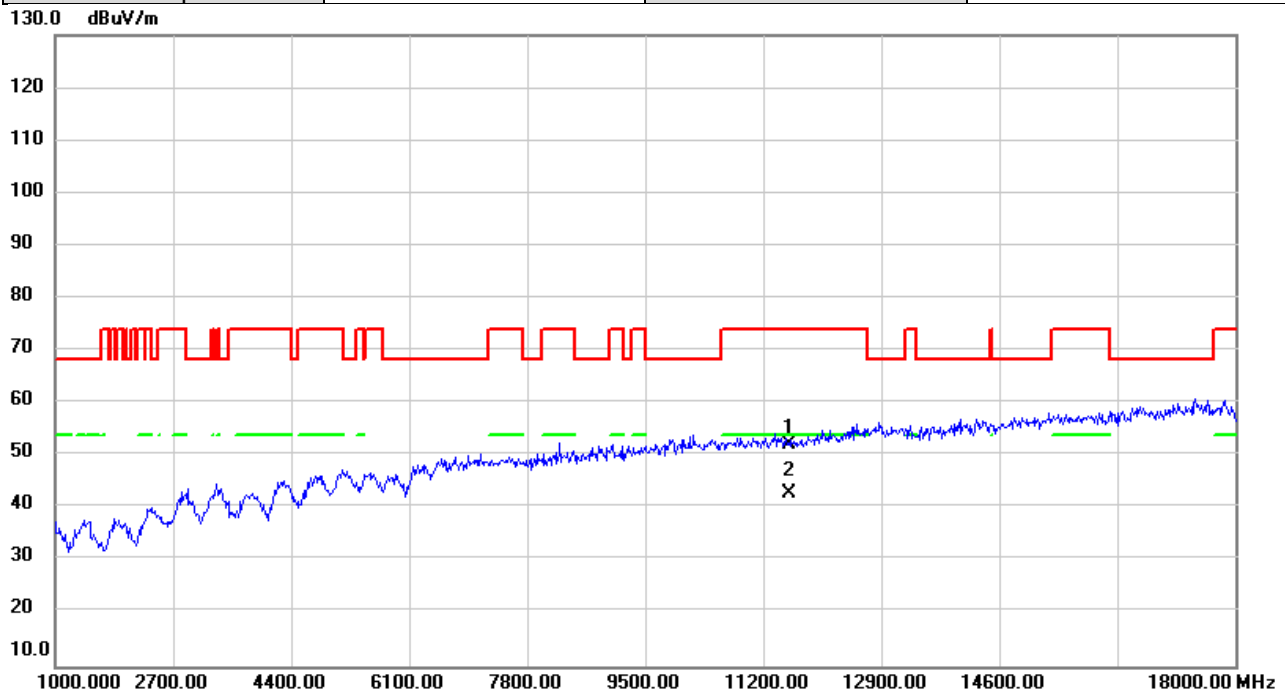

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	45.71	6.50	52.21	74.00	-21.79	peak	
2	*	11570.00	36.48	6.50	42.98	54.00	-11.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.