

A. ADDRESS SETTING

PORT A	PORT B	378	278	3BC	208	218	228	238	248	258	268	318	338	358	398
JP2	JP11	1-2	1-2	1-2	1-2	1-2	1-2	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3
JP3	JP12	1-2	1-2	1-2	2-3	2-3	2-3	1-2	1-2	1-2	1-2	2-3	2-3	2-3	2-3
JP4	JP13	1-2	1-2	2-3	1-2	1-2	2-3	1-2	1-2	2-3	2-3	1-2	1-2	2-3	2-3
JP5	JP14	1-2	2-3	1-2	1-2	2-3	1-2	1-2	2-3	1-2	2-3	1-2	2-3	1-2	2-3

B. PRINT MODE

PROT A	JP6	JP7	
PROT B	JP15	JP16	
	2-3	2-3	ECP
	2-3	1-2	EPP
	1-2	2-3	PS2
	1-2	1-2	SPP

C. IRQ SETTING

IRQ : 3,4,5,6,7,9,10,11,12,15

D. DMA CHANNEL (FOR ECP MODE ONLY)

PORT A	JP8		
PORT B	JP17		
	1-2	3-4	DMA CHANNEL 1
	5-6	7-8	DMA CHANNEL 2
	9-10	11-12	DMA CHANNEL 3

Megapower International Corp.

Room 403, No. 24, Wu-Chung 2nd Rd., Hsing Chium,
Taipei, Taiwan, R.O.C. Tel:886-2-22995172~4 Fax:886-2-22995134

PRINTER PORT 1 JUMPER SETTINGS

JP8 : 3-4 DMA CHANNEL 1
1-2 7-8 DMA CHANNEL 2
5-6 11-12 DMA CHANNEL 3

JP9 : IRQ 3
1-2 IRQ 4
3-4 IRQ 5
5-6 IRQ 6
7-8 IRQ 7
9-10 IRQ 8
11-12 IRQ 9
13-14 IRQ 10
15-16 IRQ 11
17-18 IRQ 12
19-20 IRQ 15

JP10 : 3 378
1-2 278
3-4 288
5-6 208
7-8 218
9-10 228
11-12 238
13-14 248
15-16 258
17-18 318
19-20 328
338
348

JP11 : SPB
1-2 SPB/2
3-4 ECP
5-6 ECP


PRINTER PORT 2 JUMPER SETTINGS

JP17 : 3-4 DMA CHANNEL 1
1-2 7-8 DMA CHANNEL 2
5-6 11-12 DMA CHANNEL 3

JP18 : IRQ 3
1-2 IRQ 4
3-4 IRQ 5
5-6 IRQ 6
7-8 IRQ 7
9-10 IRQ 8
11-12 IRQ 9
13-14 IRQ 10
15-16 IRQ 11
17-18 IRQ 12
19-20 IRQ 15

JP19 : 3 378
1-2 278
3-4 288
5-6 208
7-8 218
9-10 228
11-12 238
13-14 248
15-16 258
17-18 318
19-20 328
338
348

JP20 : SPB
1-2 SPB/2
3-4 ECP
5-6 ECP

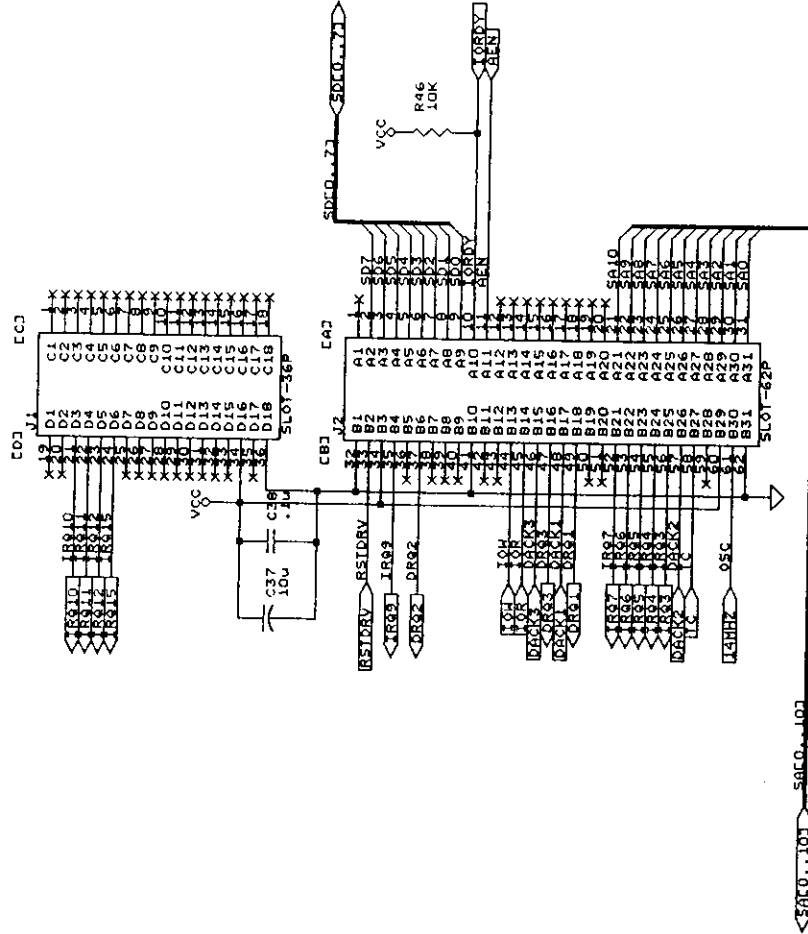

SIMPLIFIED VERSION

HOLTEK MICROELECTRONICS INC.

HT6535A ISA BUS

Size Document Number

REV

