


2.4GHz 3216 Chip Antenna: ANT3216R24003KL2**Application:**

WLAN, 802.11b/g, Bluetooth, etc...

Features

SMD, high reliability, ultra compact, Omni-directional...

**Part number**

ANT 3216 R 2400 3K L2
 (1) (2) (3) (4) (5)

(1)Size Code	3.2x1.6mm
(2) Packing	Tape and reel
(3) Frequency	2.4GHz
(4) Packing Number	3K
(5)Code	L2

Electrical Specification




WorkingFrequencyRange	2400 ~2484 MHz
Peak Gain	0.9dBi (Typ.)
Impedance	50 Ohm
VSWR	2.5(Max)
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Operation Temperature(°C)	-40 ~85°C

The specification is defined on HEK EVB.

Dimension and Terminal Configuration

Top

Side



Bottom


Dimension (mm)	
L	3.20+-0.15
W	1.60+-0.15
T	0.60+-0.10
D	0.50+-0.15

No.	Terminal Name
1	Feeding
2	Ground


2.4GHz 3216 Chip Antenna: ANT3216R24003KL2

Evaluation Board Reference

PCB Dimension

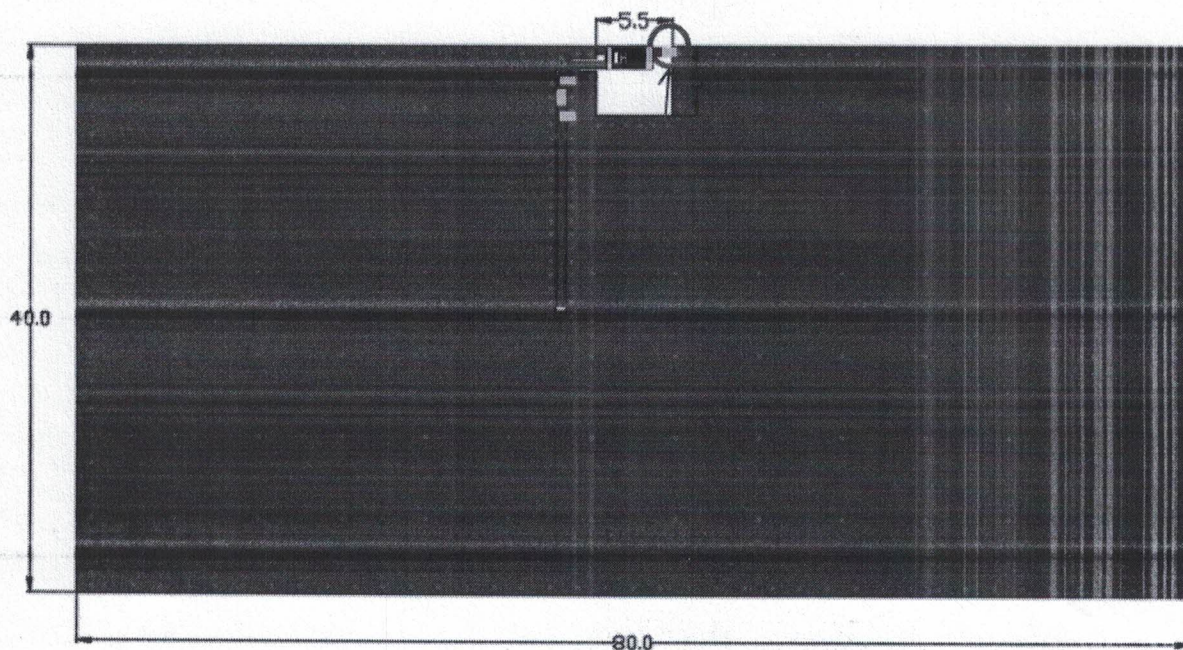

Antenna Layout Reference

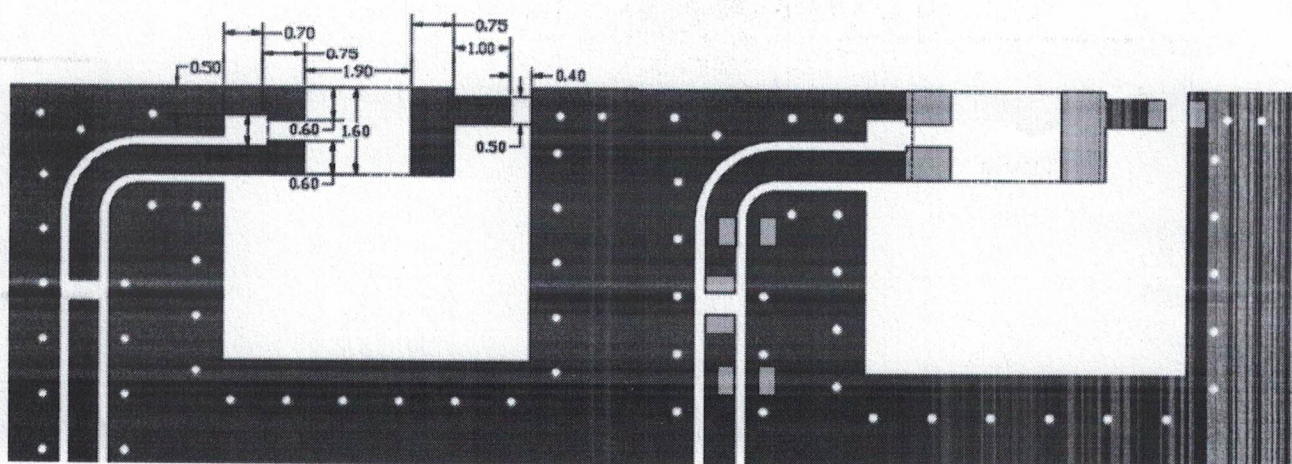



Unit : mm

□ : Chip Antenna
 ■ : Land Pattern



2.4GHz 3216 Chip Antenna: ANT3216R24003KL2

Electrical Characteristics




VSWR&Efficiency

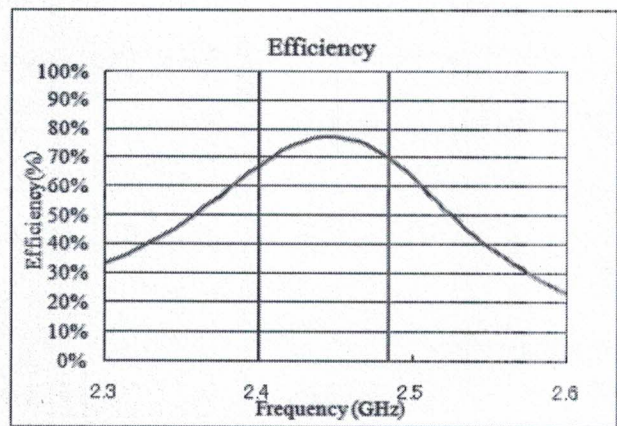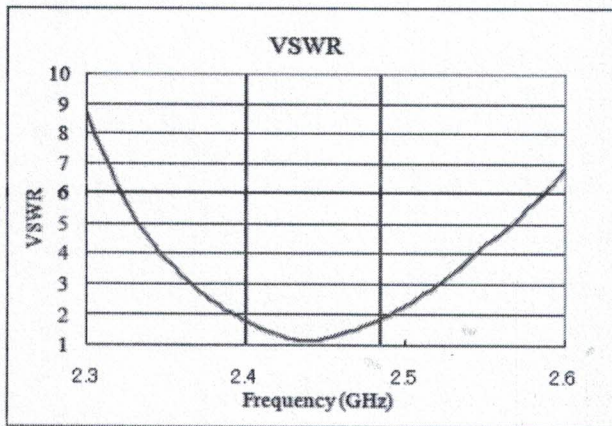

Radiation Pattern

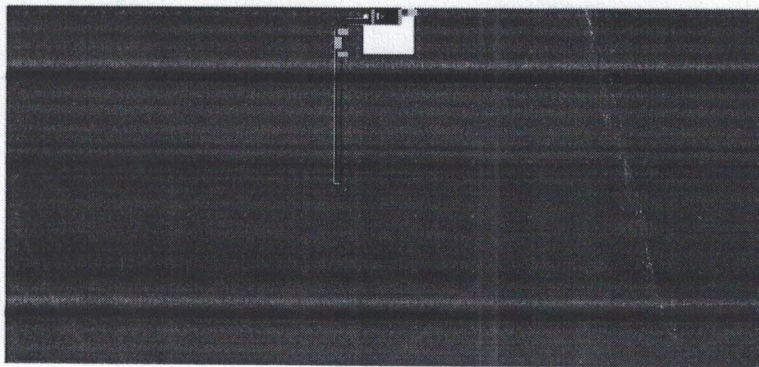


ZX-Plane

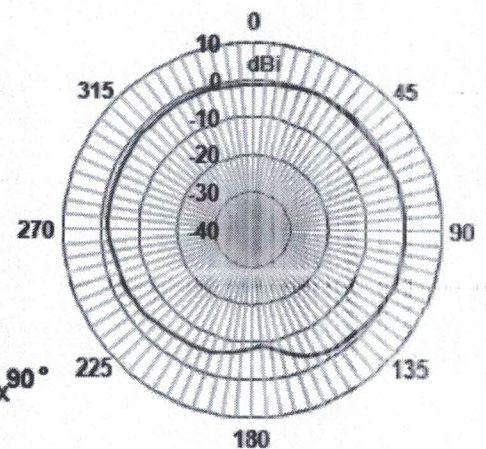
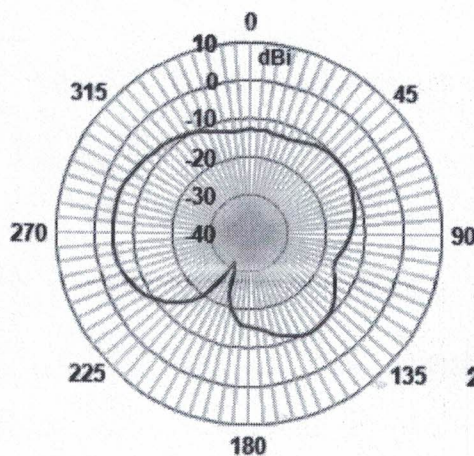


2.4GHz 3216 Chip Antenna: ANT3216R24003KL2

ZY-Plane

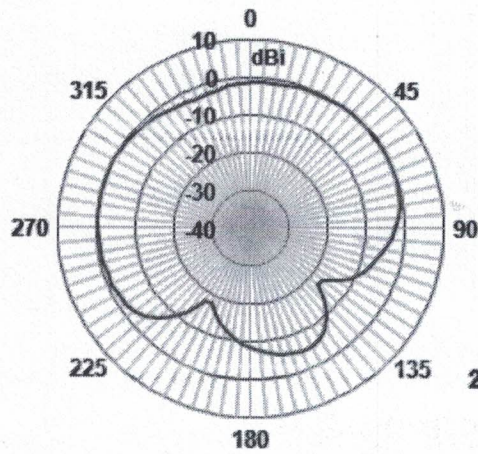


Horizontal Polarization

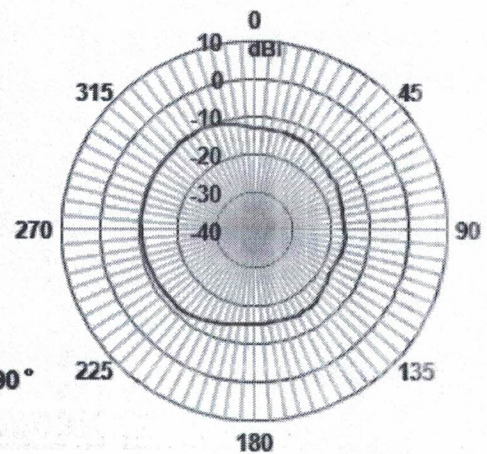



Vertical Polarization

XY-Plane

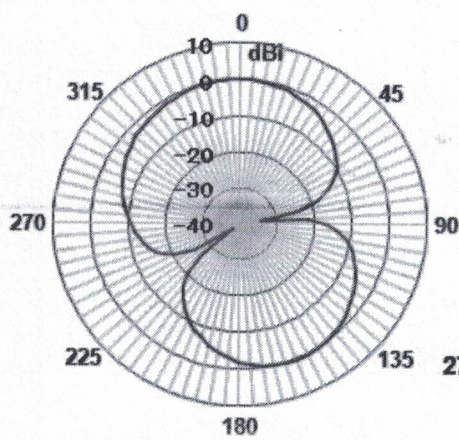

Horizontal Polarization

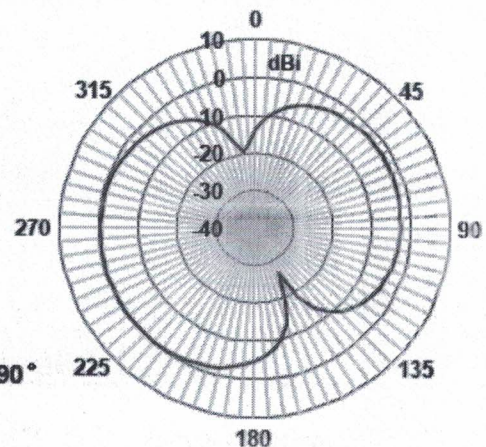


Vertical Polarization

2.4GHz 3216 Chip Antenna: ANT3216R24003KL2

Taping Specifications


Reel and Taping Specification

Reel Specification

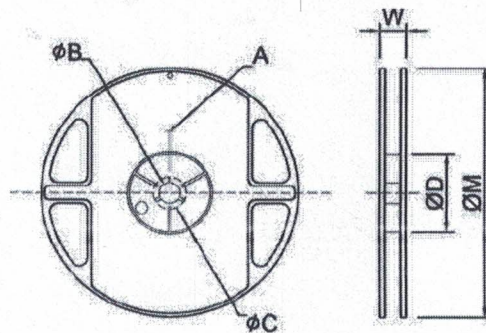

TYPE	SIZE		A	φ B	φ C	φ D	W	φ M
3216	7"	3K/Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0

Taping Specification

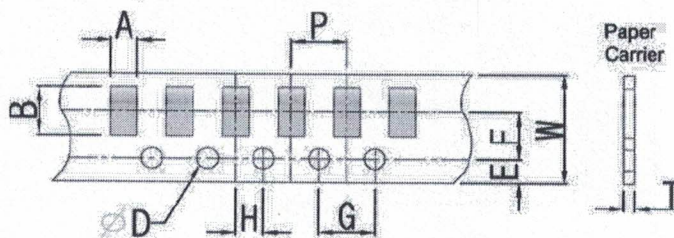


Packaging	Type	A	B	W	E	F	G	H	T	ϕD	P
Paper Type	3216	1.90 $\pm$ 0.20	3.50 $\pm$ 0.20	8.0 $\pm$ 0.20	1.75 $\pm$ 0.10	3.5 $\pm$ 0.05	4.0 $\pm$ 0.10	2.0 $\pm$ 0.05	0.75 $\pm$ 0.10	1.50 $\pm$ 0.10	4.0 $\pm$ 0.1

2.4GHz 3216 Chip Antenna: ANT3216R24003KL2

Recommended Reflow Profile

Pb free solder

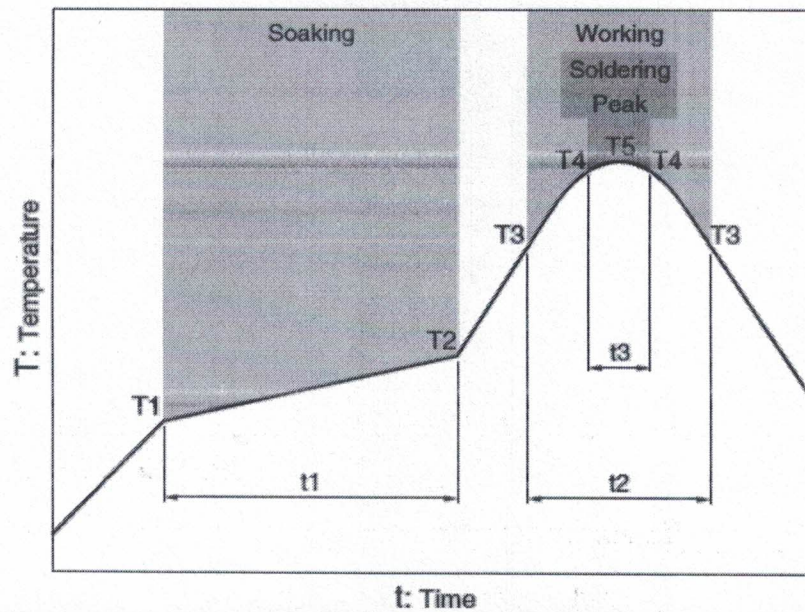

Soaking			Working		Soldering		Peak
Temp.		Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3	T5
150°C	180°C	60 to 120sec	230°C	more than 30sec	247 to 253°C	within 10sec	260°C Max.

April. 2020 Ver.H01